


INTERTEK TESTING SERVICES

Report No.: HK10051167-1
Sample No.: 1/2

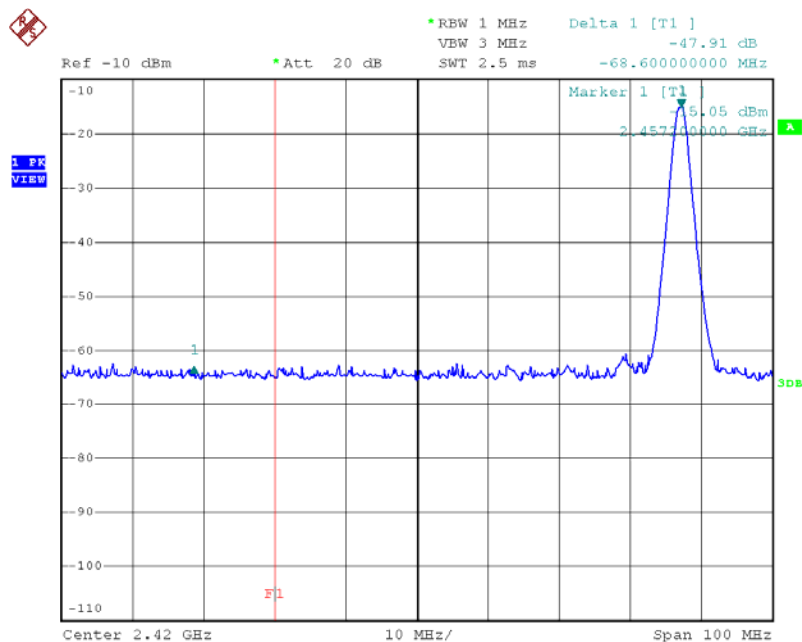


OATS = 93.0dBuV/m

Field strength (Peak)
 = 93.0 – 47.91 dBuV/m
 = 45.09 dBuV/m
 (Limit: 74 dBuV/m)

Field strength (Average)
 = 45.09 – AF dBuV/m
 = 45.09 – 54.2 dBuV/m
 = -9.15 dBuV/m
 (Limit: 54 dBuV/m)

Date: 4.JUN.2010 15:05:27

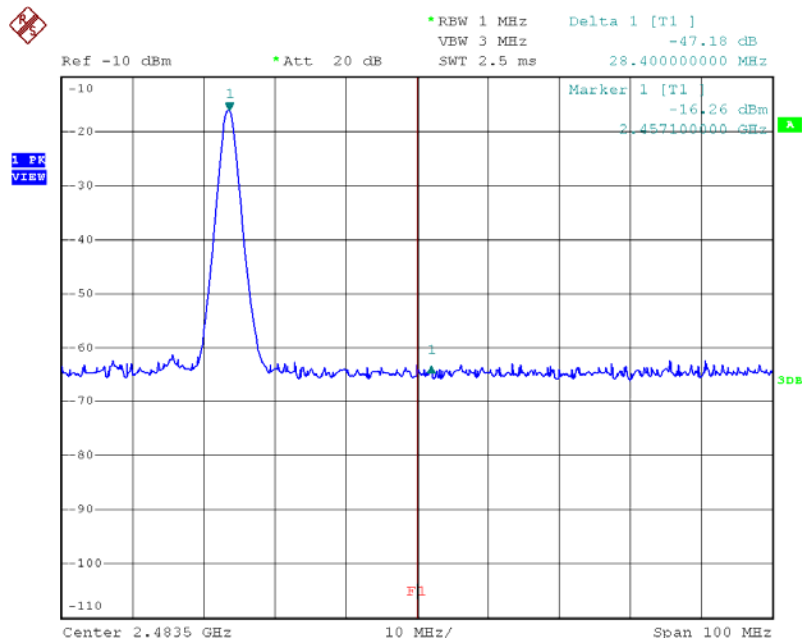

OATS = 93.0dBuV/m

Field strength (Peak)
 = 93.0 – 47.18 dBuV/m
 = 45.82 dBuV/m
 (Limit: 74 dBuV/m)

Field strength (Average)
 = 45.82 – AF dBuV/m
 = 45.82 – 54.2 dBuV/m
 = -8.38 dBuV/m
 (Limit: 54 dBuV/m)

Date: 4.JUN.2010 15:01:28

Bandwidth / Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement