




IDT Technology Limited

萬威科技有限公司

433MHz RF Data Encoding

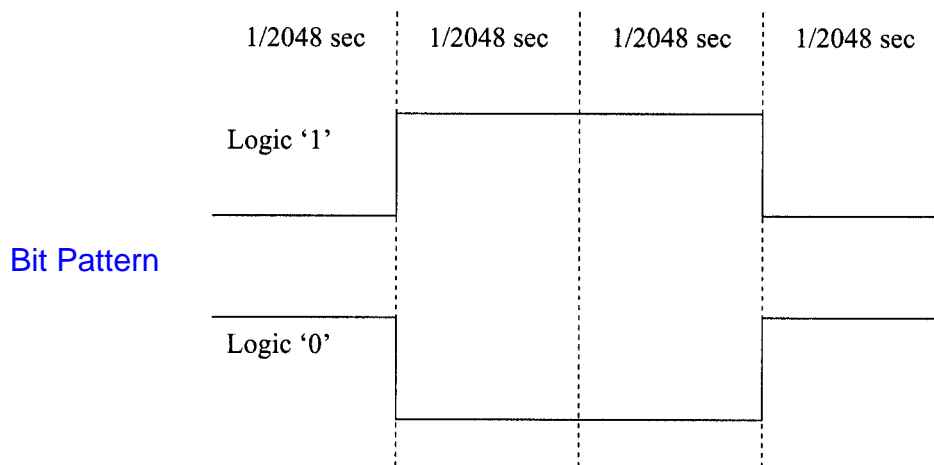

Duty Cycle = 0.5

Average Factor = $20 \log(0.5) = -6.0\text{dB}$

hp

REF 97.0 dB μ V

AT 10 dB


MKR 39.250 sec

.05 dB

Silent Period between transmissions

PEAK
LOG
10
dB/

VA SB
SC FC
CORR

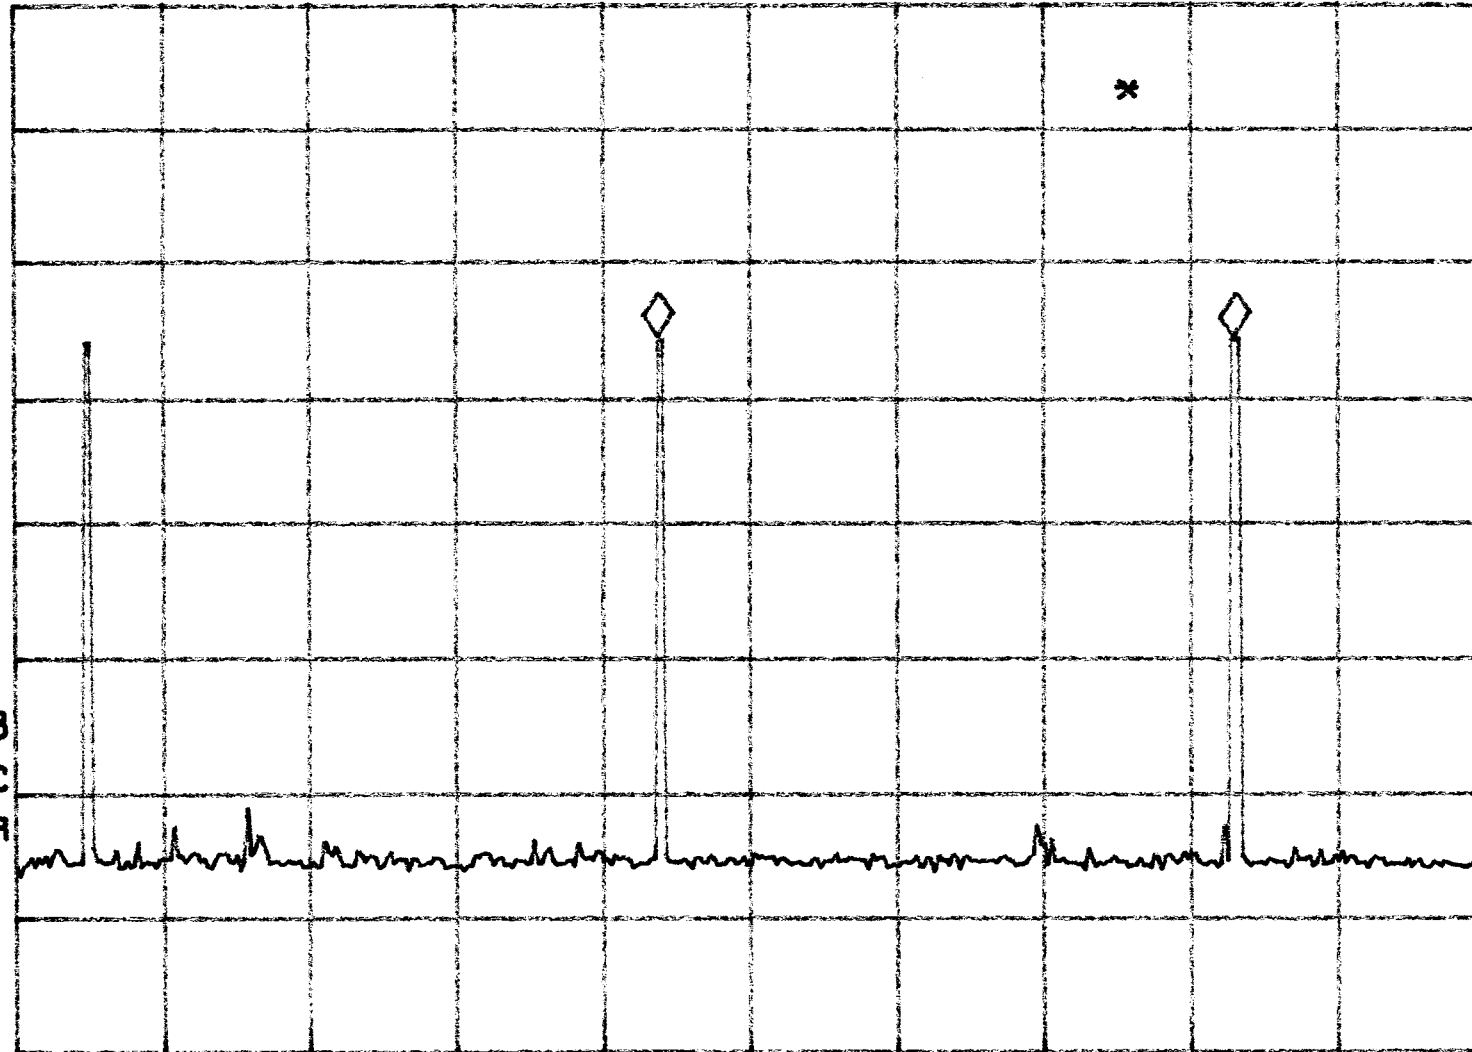

CENTER 433.955 MHz

SPAN 0 Hz

#RES BW 100 KHz

#VBW 100 KHz

#SWP 100 sec

hp

MKR 390.00 msec

REF 97.0 dB μ V


AT 10 dB

-.14 dB

PEAK
LOG
10
dB/

Transmission
Duration

VA SB
SC FC
CORR

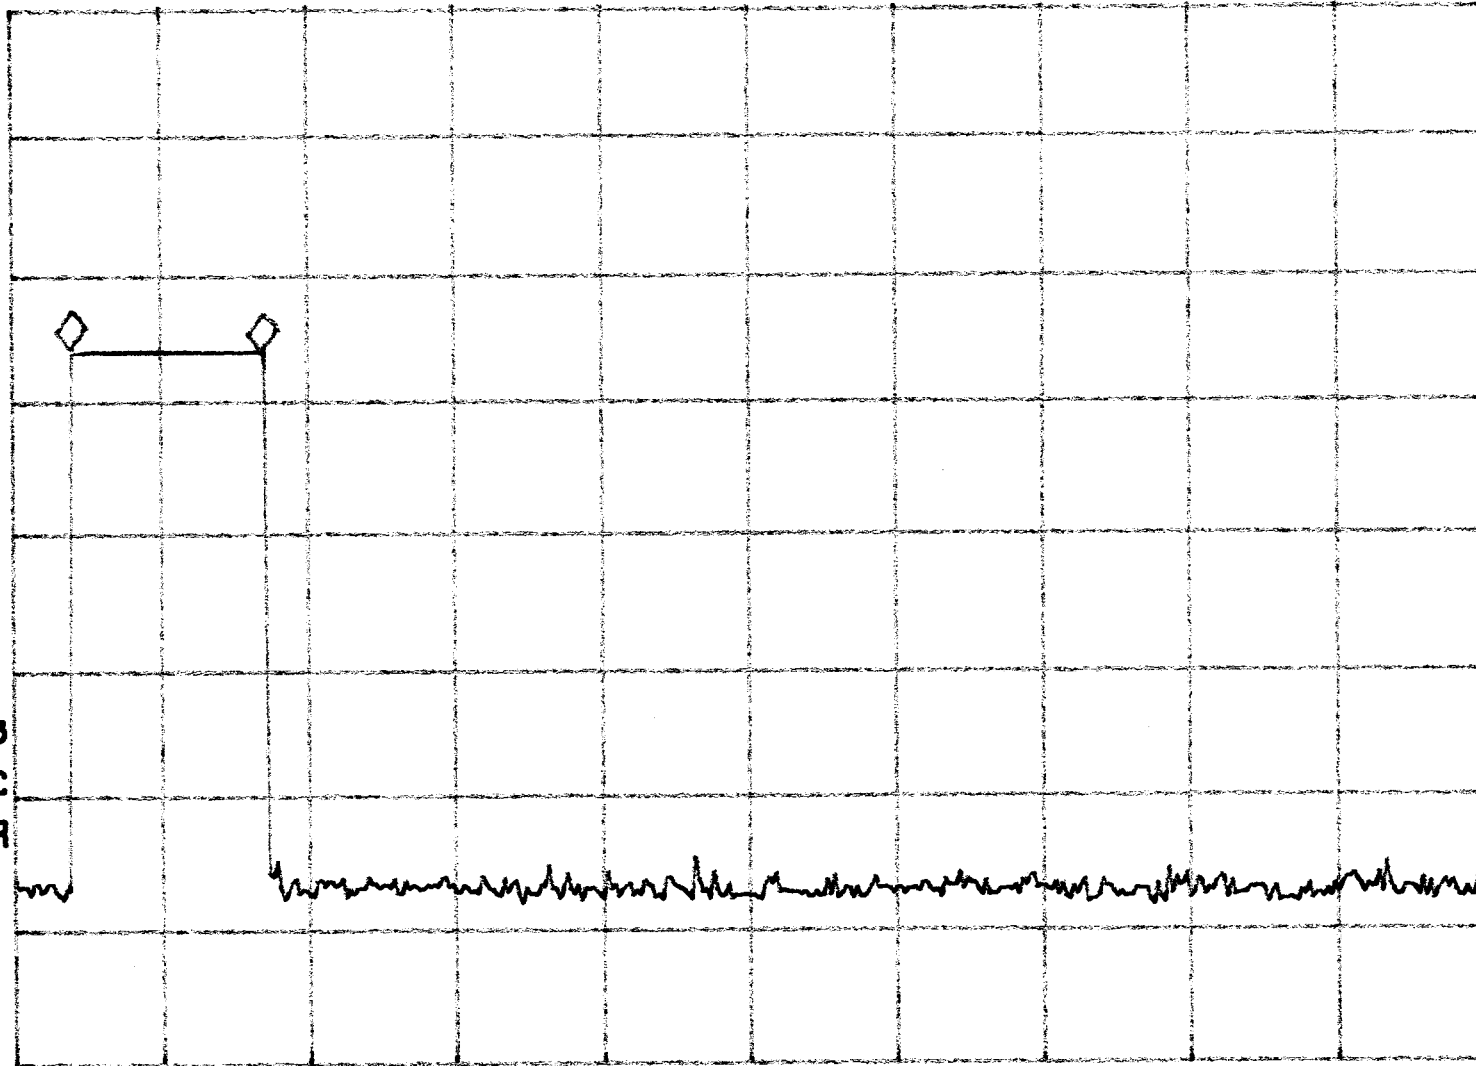

CENTER 493.955 MHz

SPAN 0 Hz

#RES BW 100 KHZ

#VBW 100 KHZ

#SWP 3.00 sec