

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM140700374801

Email: ee.shenzhen@sgs.com Page: 1 of 18

1 Cover Page

FCC REPORT

Application No.: SZEM1407003748RF

Applicant: iDT Technology Limited

Product Name: Remote Rain Gauge with Outdoor Thermometer

Model No.(EUT): THN802

Trade Mark: oregon scientific **FCC ID:** NMTTHN802-01

Standards: 47 CFR Part 15, Subpart C (2013)

Date of Receipt: 2014-07-18

Date of Test: 2014-07-21 to 2014-07-24

Date of Issue: 2014-08-05

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM140700374801

Page: 2 of 18

2 Version

Revision Record							
Version Chapter Date Modifier Remark							
00		2014-08-05		Original			

Authorized for issue by:		
Tested By	Frank. Hway	2014-07-24
	(Back Huang) /Project Engineer	Date
Prepared By	Medy Wen	2014-08-05
	(Hedy Wen) /Clerk	Date
Checked By	Emen-Li	2014-08-08
	(Emen Li) /Reviewer	Date

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140700374801

Page: 3 of 18

3 Test Summary

Test Item	Test Requirement	Test method	Result	
Antenna Requirement	47 CFR Part 15, Subpart C	ANCI C62 10(2000)	PASS	
Antenna nequirement	Section 15.203	ANSI C63.10(2009)	PA55	
Spurious Emissions	47 CFR Part 15, Subpart C	ANCI C62 10(2000)	PASS	
Spurious Ellissions	Section 15.231 (b)/15.209	ANSI C63.10(2009)	rass	
20dB Bandwidth	47 CFR Part 15, Subpart C	ANCI C62 10(2000)	DASS	
20dB Bandwidth	Section 15.231 (c)	ANSI C63.10(2009)	PASS	
Occupy Time	47 CFR Part 15, Subpart C	ANSI C62 10(2000)	DASS	
Occupy Time	Section 15.231 (e)	ANSI C63.10(2009)	PASS	



Report No.: SZEM140700374801

Page: 4 of 18

4 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	
5.3 TEST ENVIRONMENT AND MODE	5
5.4 DESCRIPTION OF SUPPORT UNITS	
5.6 TEST FACILITY	
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	6
5.10 EQUIPMENT LIST	
6 TEST RESULTS AND MEASUREMENT DATA	8
6.1 ANTENNA REQUIREMENT	
6.2.1 Spurious Emissions	<u>e</u>
6.3 20DB BANDWIDTH	



Report No.: SZEM140700374801

Page: 5 of 18

5 General Information

5.1 Client Information

Applicant:	iDT Technology Limited
Address of Applicant:	Block C, 9/F, Kaiser Estate, Phase I, 41 Man Yue St., Hunghom, Kowloon, HK

5.2 General Description of EUT

Product Name:	Remote Rain Gauge with Outdoor Thermometer
Model No.:	THN802
Trade Mark:	oregon scientific
Sample Type:	Fixed production
EUT Function:	Remote Rain Gauge with Outdoor Thermometer
Operation Frequency:	433.92MHz
Channel Numbers:	1
Modulation Type:	ASK
Antenna Type:	Integral
Antenna Gain:	0dBi
Power Supply:	DC 3.0V (1.5V x 2 "AA" Size Batteries)

5.3 Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1005 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM140700374801

Page: 6 of 18

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM140700374801

Page: 7 of 18

5.10 Equipment List

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10	
2	EMI Test Receiver	Rohde & Schwarz	z ESIB26 SELO		2015-05-16	
3	EMI Test software	AUDIX	E3	SEL0050	N/A	
4	Coaxial cable	SGS	N/A	SEL0027	2015-05-29	
5	Coaxial cable	SGS	N/A	SEL0189	2015-05-29	
6	Coaxial cable	SGS	N/A	SEL0121	2015-05-29	
7	Coaxial cable	SGS	N/A	SEL0178	2015-05-29	
8	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24	
9	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24	
10	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16	
11	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24	
12	Barometer	ChangChun	DYM3	SEL0088	2015-05-16	
13	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24	
14	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24	
15	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24	
16	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16	
17	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04	

Note: The calibration interval is one year, all the instruments are valid.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140700374801

Page: 8 of 18

6 Test results and Measurement Data


6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

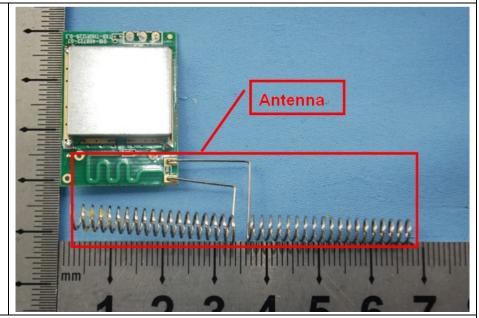

The antenna is fixed on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.





Report No.: SZEM140700374801

Page: 9 of 18

6.2 Spurious Emissions

6.2.1 Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.231(e) and 15.209					
Test Method:	ANSI C63.10: 2009					
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)					
Receiver Setup:	Frequency	Det	ector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Р	eak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Ave	erage	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quas	si-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Р	eak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Ave	erage	10kHz	30kHz	Average
	0.490MHz -30MHz	Quas	si-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quas	si-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Р	eak	1MHz	3MHz	Peak
	Above IGI12	Р	eak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency		strength olt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F	(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/	F(kHz)	-	-	30
	1.705MHz-30MHz	3	0	-	-	30
	30MHz-88MHz	10	00	40.0	Quasi- peak	3
	88MHz-216MHz	15	50	43.5	Quasi- peak	3
	216MHz-960MHz	20	00	46.0	Quasi- peak	3
	960MHz-1GHz	50	00	54.0	Quasi- peak	3
	Above 1GHz	50	00	54.0	Average	3
	Note: 15.35(b), Unless otherw emissions is 20dB abov applicable to the equipme emission level radiated by		the ma t under te	ximum perm est. This peak	itted average	e emission limit
Limit:	Frequency	/	Limit (d	dBuV/m @3m) Rei	mark
(Field strength of	400.001411	_	`	72.87	Averag	ge Value
the fundamental signal)	433.92MH	Z		92.87	Peak	Value
5 /						




Report No.: SZEM140700374801

Page: 10 of 18

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.		1 age. 10 01 10
 b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report. 	Test Procedure:	ground at a 3 meter semi-anechoic camber. The table was rotated 360
 c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report. 		b. The EUT was set 3 meters away from the interference-receiving antenna,
the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.		c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the
Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.		the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable
specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.		
g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.		specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be retested one by one using peak, quasi-peak or average method as specified and
Test Setup:		g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is
	Test Setup:	

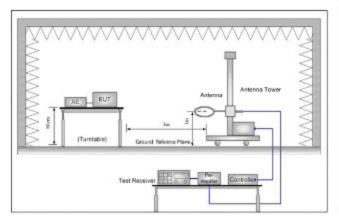



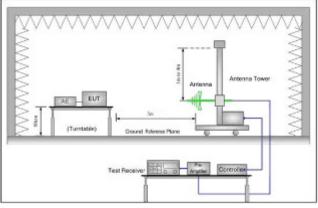


Figure 2. 30MHz to 1GHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140700374801

Page: 11 of 18

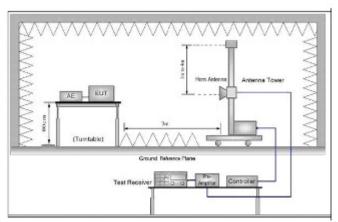


Figure 3. Above 1 GHz

Test Mode: Transmitting mode	
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

Measurement Data

6.2.1.1 Field Strength Of The Fundamental Signal

Peak value:							
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
433.920	2.35	12.10	72.86	59.98	92.87	-32.89	Horizontal
433.920	2.35	12.10	79.44	66.56	92.87	-26.31	Vertical

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM140700374801

Page: 12 of 18

6.2.1.2 Spurious Emissions

Below 1GHz

Vertical

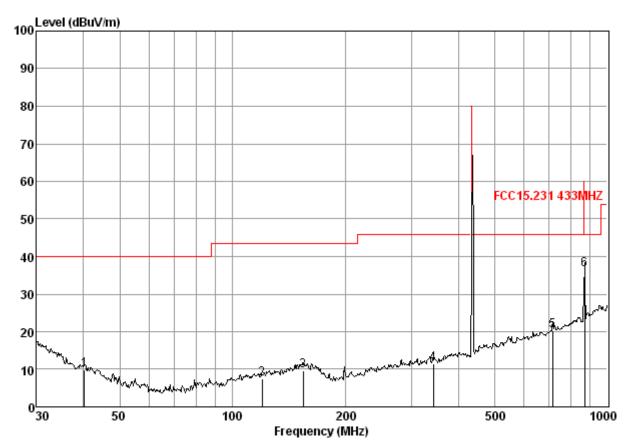

Condition: FCC15.231 433MHZ 3m 3142C VERTICAL

Job No. : 3748RF Mode : Tx mode


J 40	Freq			Preamp Factor			Limit Line	Over Limit
_	MHz	dB	dB/m	dB	dBu₹	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB
1 2 3 4 5	40. 28 119. 86 154. 28 343. 18 714. 17 869. 13	0.60 1.25 1.33 2.04 2.95 3.49	11.13 7.70 9.53 10.56 17.10 19.60	27. 32 27. 07 26. 89 26. 75 27. 39 26. 92	25. 62 25. 73 27. 65	9.59 11.58	43.50 43.50 46.00 46.00	-33.91 -34.42



Report No.: SZEM140700374801

Page: 13 of 18

Horizontal

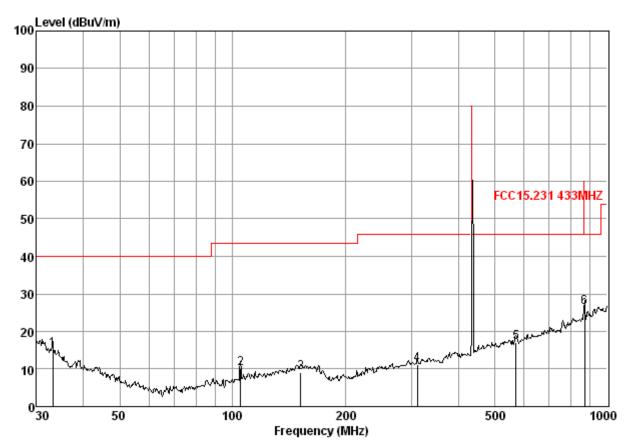

Condition: FCC15.231 433MHZ 3m 3142C HORIZONTAL

Job No. : 3748RF Mode : Tx mode

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	$\overline{\text{dBuV/m}}$	$\overline{\text{dBuV/m}}$	dB
1 2 3 4 5	33.09 104.90 152.13 311.09 570.61 869.13	0.60 1.21 1.32 1.94 2.67 3.49	15.50 6.90 9.43 9.90 14.80 19.60	27. 34 27. 17 26. 90 26. 48 27. 59 26. 92	26. 57 29. 16 25. 28 25. 74 27. 09 30. 23	9.13 11.10	43.50 43.50 46.00 46.00	-34.37 -34.90



Report No.: SZEM140700374801

Page: 14 of 18

Above 1GHz

Peak value:

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1288.775	2.38	27.73	39.26	46.01	36.86	74	-37.14	Vertical
1672.493	2.63	29.46	39.42	45.45	38.12	74	-35.88	Vertical
1848.045	2.74	30.69	39.51	46.62	40.54	74	-33.46	Vertical
2219.139	2.92	32.20	39.72	46.68	42.08	74	-31.92	Vertical
2713.209	3.16	33.00	40.09	45.44	41.51	74	-32.49	Vertical
3906.834	4.08	33.70	40.97	50.40	47.21	74	-26.79	Vertical
1367.935	2.43	27.88	39.29	46.57	37.59	74	-36.41	Horizontal
1717.131	2.65	29.70	39.45	46.81	39.71	74	-34.29	Horizontal
1886.876	2.77	30.94	39.52	51.56	45.75	74	-28.25	Horizontal
2418.311	2.99	32.54	39.88	46.44	42.09	74	-31.91	Horizontal
3472.561	3.72	33.21	40.65	51.16	47.44	74	-26.56	Horizontal
3906.834	4.08	33.70	40.97	56.40	53.21	74	-20.79	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



Report No.: SZEM140700374801

Page: 15 of 18

6.3 20dB Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.231 (c)				
Test Method:	ANSI C63.10:2009				
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane				
Test Mode:	Transmitting mode				
Instruments Used:	Refer to section 5.10 for details				
Test Results:	Pass				

Measurement Data

20dB bandwidth (MHz)	Limit (MHz)	Results
0.162	1.0848	Pass


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140700374801

Page: 16 of 18

Test plot as follows:

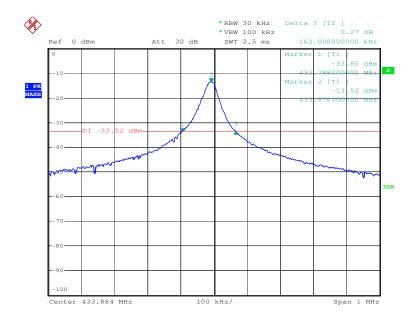




Report No.: SZEM140700374801

Page: 17 of 18

6.4 Occupy time

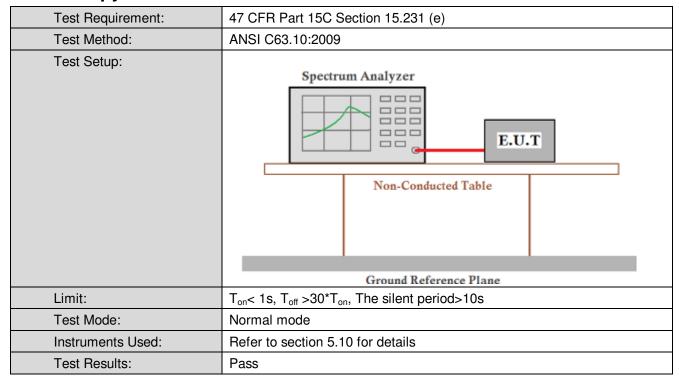

Measurement Data

Test item	Limit	Results	
Ton	1s	Pass	
The silent period	>10s	Pass	

Remark:

 $T_{on} = 0.872s < 1s$

 $T_{off} > 30 \text{*} Ton = 30 \text{*} 0.872 = 26.16 \text{s}$

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM140700374801

Page: 18 of 18

Test plot as follows:

