

## FCC 47 CFR PART 15 SUBPART C

Product Type : 802.11n Wireless 2T2R Router  
Applicant : Netronix, INC.  
Address : No. 945, Boai St. Jubei City. Hsinchu, Taiwan, 30265 R.O.C.  
Trade Name : Netronix  
Model Number : W242D  
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2010  
ANSI C63.4-2009  
Issue Date : Sep. 23, 2011

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.  
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

**Revision History**

<b>Rev.</b>	<b>Issue Date</b>	<b>Revisions</b>	<b>Revised By</b>
00	Aug. 25, 2011	Initial Issue	
01	Sep. 23, 2011	Revise trade name	Linda Su

## Verification of Compliance

Issued Date: 09/23/2011

Product Type : 802.11n Wireless 2T2R Router  
Applicant : Netronix, INC.  
Address : No. 945, Boai St. Jubei City. Hsinchu, Taiwan, 30265  
R.O.C.  
Trade Name : Netronix  
Model Number : W242D  
FCC ID : NOI-W242D  
EUT Rated Voltage : DC 5.0V, 0.6A  
Test Voltage : 120 Vac / 60 Hz  
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2010  
ANSI C63.4-2009

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade City,  
Taoyuan County 334, Taiwan R.O.C.


Tel : +86-3-2710188 / Fax : +86-3-2710190


Taiwan Accreditation Foundation accreditation number:  
1330



<http://www.atl-lab.com.tw/e-index.htm>

The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .  
The test results of this report relate only to the tested sample identified in this report.

Approved By :   
(Manager) (Miller Lee)

Reviewed By :   
(Testing Engineer) (Gary Wu)

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>6</b>
<b>2</b>	<b>EUT Description .....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>8</b>
	3.1. Mode of Operation .....	8
	3.2. EUT Exercise Software.....	8
	3.3. Configuration of Test System Details .....	9
	3.4. Test Site Environment.....	9
<b>4</b>	<b>Conducted Emission Measurement.....</b>	<b>10</b>
	4.1. Limit.....	10
	4.2. Test Instruments .....	10
	4.3. Test Setup.....	10
	4.4. Test Procedure .....	11
	4.5. Test Result.....	12
<b>5</b>	<b>Radiated Interference Measurement.....</b>	<b>14</b>
	5.1. Limit.....	14
	5.2. Test Instruments .....	14
	5.3. Setup .....	15
	5.4. Test Procedure .....	16
	5.5. Test Result.....	18
<b>6</b>	<b>Maximum Conducted Output Power Measurement.....</b>	<b>28</b>
	6.1. Limit.....	28
	6.2. Test Setup.....	28
	6.3. Test Instruments .....	28
	6.4. Test Procedure .....	28
	6.5. Test Result.....	29
<b>7</b>	<b>6dB RF Bandwidth Measurement .....</b>	<b>32</b>
	7.1. Limit.....	32
	7.2. Test Setup.....	32
	7.3. Test Instruments .....	32
	7.4. Test Procedure .....	32
	7.5. Test Result.....	33
	7.6. Test Graphs .....	35

<b>8</b>	<b>Maximum Power Density Measurement .....</b>	<b>45</b>
8.1.	Limit .....	45
8.2.	Test Setup.....	45
8.3.	Test Instruments .....	45
8.4.	Test Procedure .....	45
8.5.	Test Result.....	46
8.6.	Test Graphs .....	48
<b>9</b>	<b>Out of Band Conducted Emissions Measurement .....</b>	<b>58</b>
9.1.	Limit.....	58
9.2.	Test Setup.....	58
9.3.	Test Instruments .....	58
9.4.	Test Procedure .....	58
9.5.	Test Graphs .....	59
<b>10</b>	<b>Band Edges Measurement.....</b>	<b>69</b>
10.1.	Limit.....	69
10.2.	Test Setup.....	69
10.3.	Test Instruments .....	69
10.4.	Test Procedure .....	70
10.5.	Test Result.....	71
<b>11</b>	<b>99 % Occupied Bandwidth Measurement.....</b>	<b>87</b>
11.1.	Limit.....	87
11.2.	Test Setup.....	87
11.3.	Test Instruments .....	87
11.4.	Test Procedure .....	87
11.5.	Test Result.....	88
11.6.	Test Graphs .....	90
<b>12</b>	<b>Antenna Measurement .....</b>	<b>100</b>
12.1.	Limit.....	100
12.2.	Antenna Connector Construction.....	100

## 1 General Information

### 1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	-----
-----	6	Receiver Radiated Emissions	PASS	-----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	-----
15.247(b)(3)	A8.4	Max. Output Power	PASS	-----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	-----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	-----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	A8.5	Band Edge Measurement	PASS	-----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	-----
15.203	-	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

### 1.2 Measurement Uncertainty

#### Conducted Emission

The measurement uncertainty is evaluated as  $\pm 2.24$  dB.

#### Radiated Emission

The measurement uncertainty of 30 MHz - 1GHz is evaluated as  $\pm 3.072$ dB.

## 2 EUT Description

Product	:	802.11n Wireless 2T2R Router
Trade Name	:	Netronix
Model No.	:	W242D
Applicant	:	Netronix, INC. No. 945, Boai St. Jubei City. Hsinchu, Taiwan, 30265 R.O.C.
Manufacturer	:	Netronix (Dongguan) INC Heng Guang, Industrial Park, Huang Cao Lang 2nd Industrial Zone, Dalang Town, Dongguan City, Guangdong Province, China.
FCC ID	:	NOI-W242D
Frequency Range	:	2412 ~ 2462 MHz
Modulation Type	:	IEEE 802.11b:DSSS IEEE 802.11g:DSSS+ OFDM draft 802.11n Standard-20MHz channel mode: OFDM draft 802.11n Wide-40MHz channel mode: OFDM
Antenna Type	:	ANT1: Chip Antenna, ANT2: Exposed Antenna
Antenna Gain	:	ANT1: 0.93 dBi, ANT2: 2.51 dBi
RF Output Power	:	IEEE 802.11b: 0.027 W / 14.38 dBm IEEE 802.11g: 0.330 W / 25.18 dBm draft 802.11n Standard-20MHz: 0.574 W / 27.59 dBm draft 802.11n Wide-40MHz: 0.505 W / 27.03 dBm
<b>Component</b>		
Power Adapter	:	Logitech, DSA-5W-05 FJP 050060 Input:100-240Vac, 50/60Hz, 0.2A Output: 5Vdc, 0.6A Cable out: Shielded, 1.5 m

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: IDLE Mode
Mode 1: Normal Operation Mode
Mode 2: IEEE 802.11b Link Mode
Mode 3: IEEE 802.11g Link Mode
Mode 4: draft 802.11n Standard-20MHz Link Mode
Mode 5: draft 802.11n Wide-40MHz Link Mode
Mode 6: Receiver Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b (Chain B) mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g (Chain B) mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 36Mbps data rate were chosen for full testing.

draft 802.11n Standard-20 MHz (Chain A + Chain B) Channel mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 14.4Mbps data rate were chosen for full testing.

draft 802.11n Wide-40 MHz (Chain A + Chain B) Channel mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 120Mbps data rate were chosen for full testing.


#### 3.2. EUT Exercise Software

1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function, Notebook link to EUT.
4.	EUT run test program.




### 3.3. Configuration of Test System Details

#### Conducted Emission

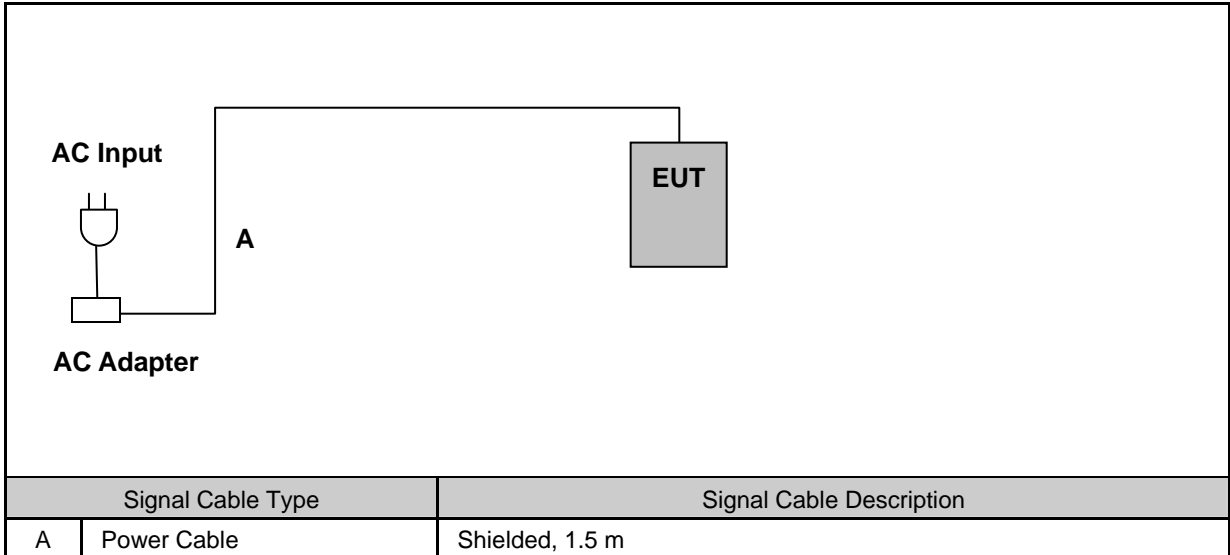

#### Radiated Emission

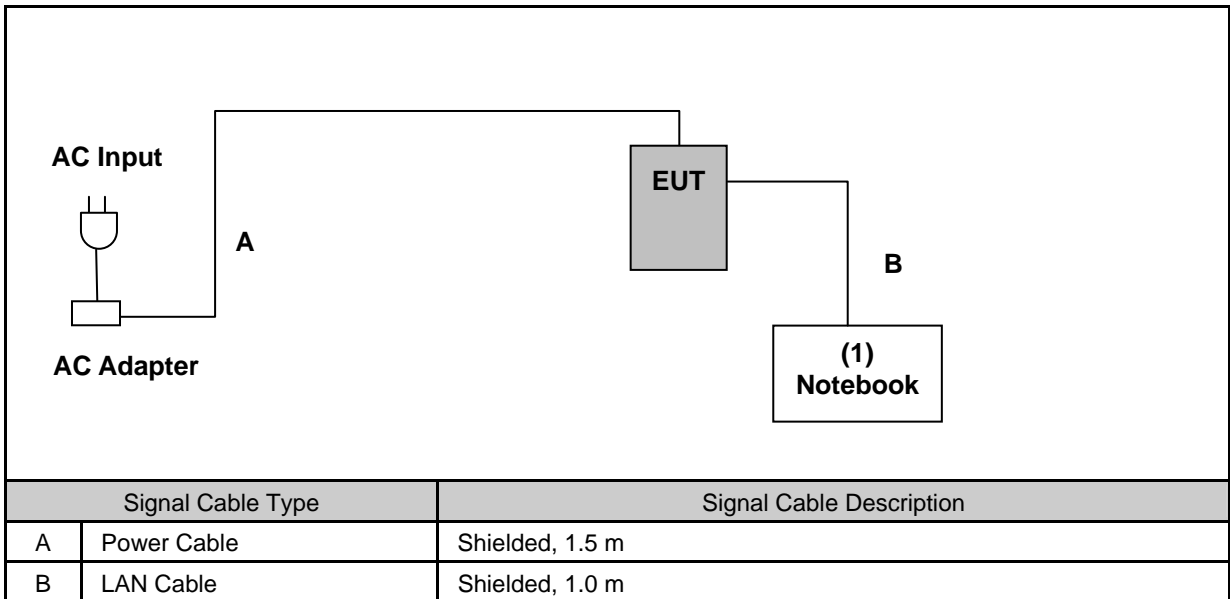

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	Notebook	DELL	D531	GCDCD-T6HYQ-3MQ8R-JCPD3-3G8G2	Non-Shielded, 2.0m

### 3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

## 4 Conducted Emission Measurement

### 4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


### 4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/30/2011	(1)
LISN	R&S	ENV216	101040	03/04/2011	(1)
LISN	R&S	ENV216	101041	03/04/2011	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 4.3. Test Setup

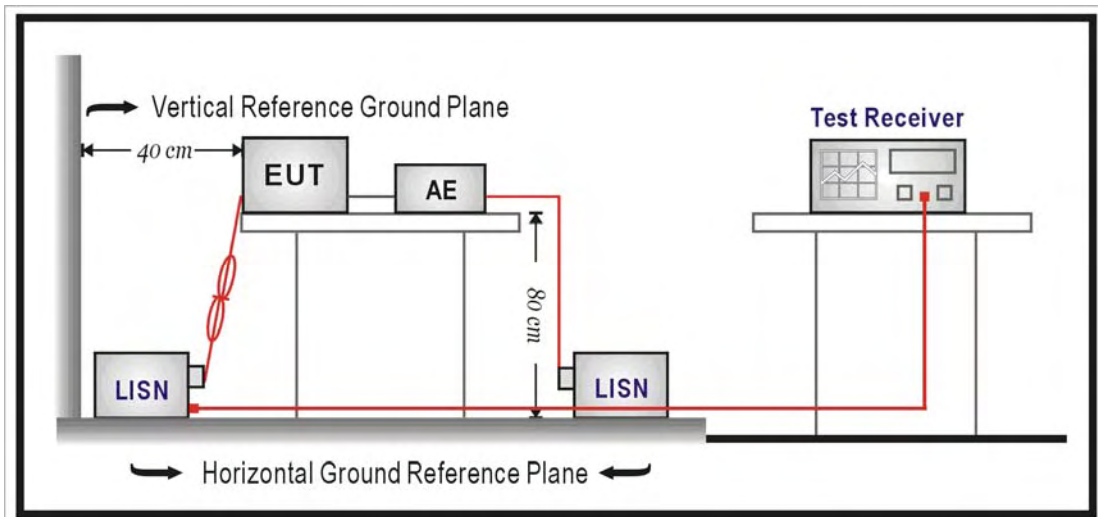

#### 4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.


#### 4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	08/02/2011
		Test By:	Gary Wu
Description:			

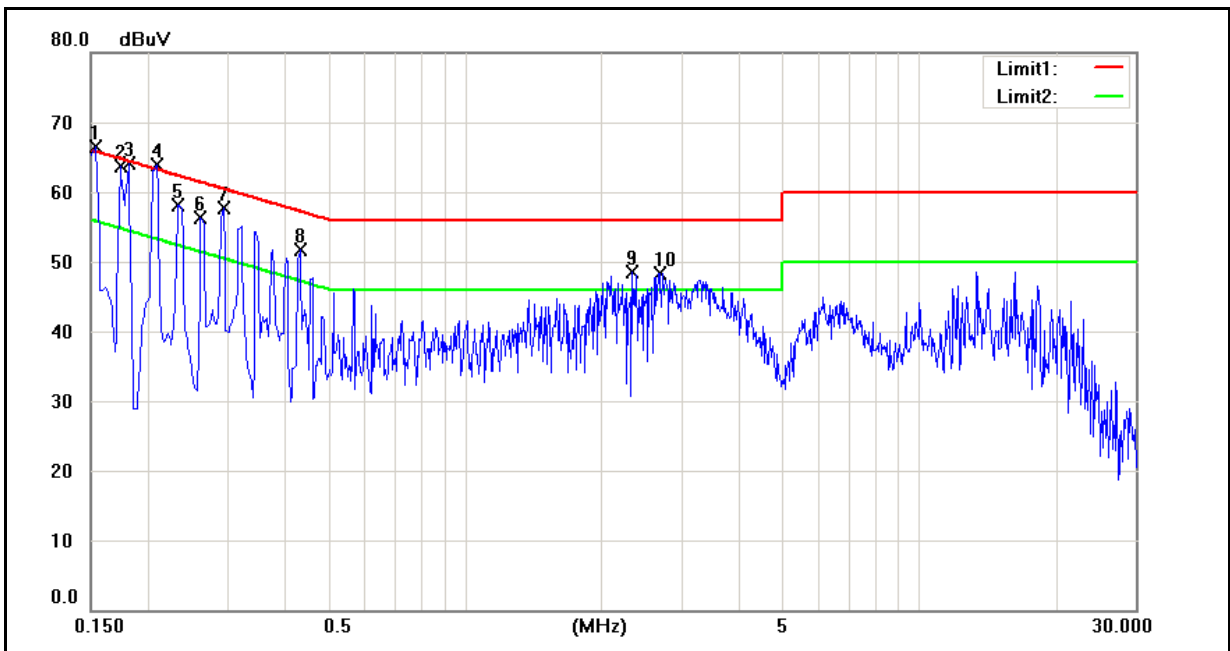

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	47.35	33.73	10.07	57.42	43.80	65.78	55.78	-8.36	-11.98	Pass
2	0.1740	47.36	18.40	10.06	57.42	28.46	64.77	54.77	-7.35	-26.31	Pass
3	0.1820	46.11	17.11	10.06	56.17	27.17	64.39	54.39	-8.22	-27.22	Pass
4	0.2100	43.64	20.27	10.05	53.69	30.32	63.21	53.21	-9.52	-22.89	Pass
5	0.2340	42.08	32.24	10.04	52.12	42.28	62.31	52.31	-10.19	-10.03	Pass
6	0.2620	39.93	15.59	10.03	49.96	25.62	61.37	51.37	-11.41	-25.75	Pass
7	0.2940	37.69	16.50	10.01	47.70	26.51	60.41	50.41	-12.71	-23.90	Pass
8	0.4340	29.88	22.98	9.96	39.84	32.94	57.18	47.18	-17.34	-14.24	Pass
9	2.3420	32.63	24.69	9.72	42.35	34.41	56.00	46.00	-13.65	-11.59	Pass
10	2.6860	30.74	17.80	9.76	40.50	27.56	56.00	46.00	-15.50	-18.44	Pass

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	08/02/2011
		Test By:	Gary Wu
Description:			

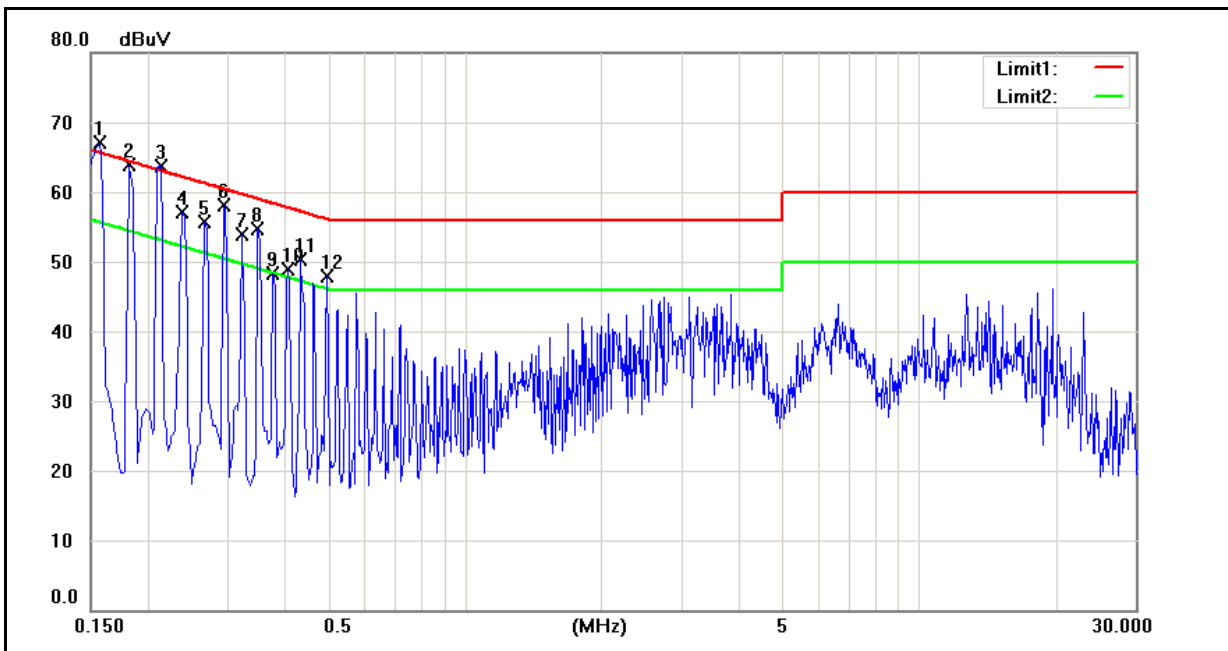

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	46.98	23.72	10.15	57.13	33.87	65.57	55.57	-8.44	-21.70	Pass
2	0.1820	45.94	15.54	10.14	56.08	25.68	64.39	54.39	-8.31	-28.71	Pass
3	0.2140	43.46	14.92	10.13	53.59	25.05	63.05	53.05	-9.46	-28.00	Pass
4	0.2380	40.89	17.65	10.12	51.01	27.77	62.17	52.17	-11.16	-24.40	Pass
5	0.2660	39.14	11.53	10.11	49.25	21.64	61.24	51.24	-11.99	-29.60	Pass
6	0.2940	37.80	11.02	10.09	47.89	21.11	60.41	50.41	-12.52	-29.30	Pass
7	0.3220	35.08	15.18	10.08	45.16	25.26	59.66	49.66	-14.50	-24.40	Pass
8	0.3500	34.26	17.25	10.07	44.33	27.32	58.96	48.96	-14.63	-21.64	Pass
9	0.3780	32.51	6.81	10.06	42.57	16.87	58.32	48.32	-15.75	-31.45	Pass
10	0.4100	31.38	7.91	10.05	41.43	17.96	57.65	47.65	-16.22	-29.69	Pass
11	0.4340	29.61	9.04	10.04	39.65	19.08	57.18	47.18	-17.53	-28.10	Pass
12	0.4980	27.85	3.05	10.01	37.86	13.06	56.03	46.03	-18.17	-32.97	Pass

## 5 Radiated Emission Measurement

### 5.1. Limit

Frequency Range (MHz)	Peak (dBuV)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

### 5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY46181986	06/16/2011	(1)
Amplifier	Mini-Circuits	ZKL-1R5+	N/A	05/30/2011	(1)
Amplifier	Mini-Circuits	ZVA-213-S+	N/A	05/30/2011	(1)
RF Pre-selector	Agilent	N9039A	MY46520255	05/16/2011	(1)
Double-Ridged Waveguide Horn	ETS-Lindgren	3117	00128055	08/24/2010	(1)
Trilog-Broadband Antenna	Schwarzbeck Mess-Elektronik	SB AC VULB	9168-419	05/10/2011	(1)
Test Site	ATL	TE09	TE09	05/13/2011	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.


NOTE: N.C.R. = No Calibration Request.

### 5.3. Setup

Below 1GHz

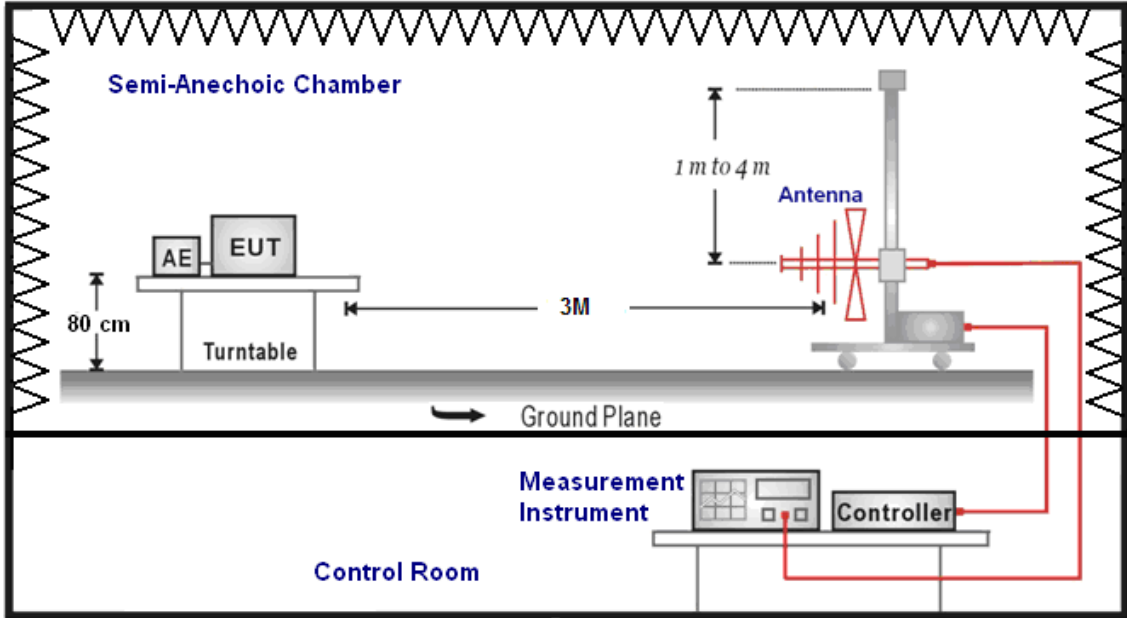

Above 1GHz

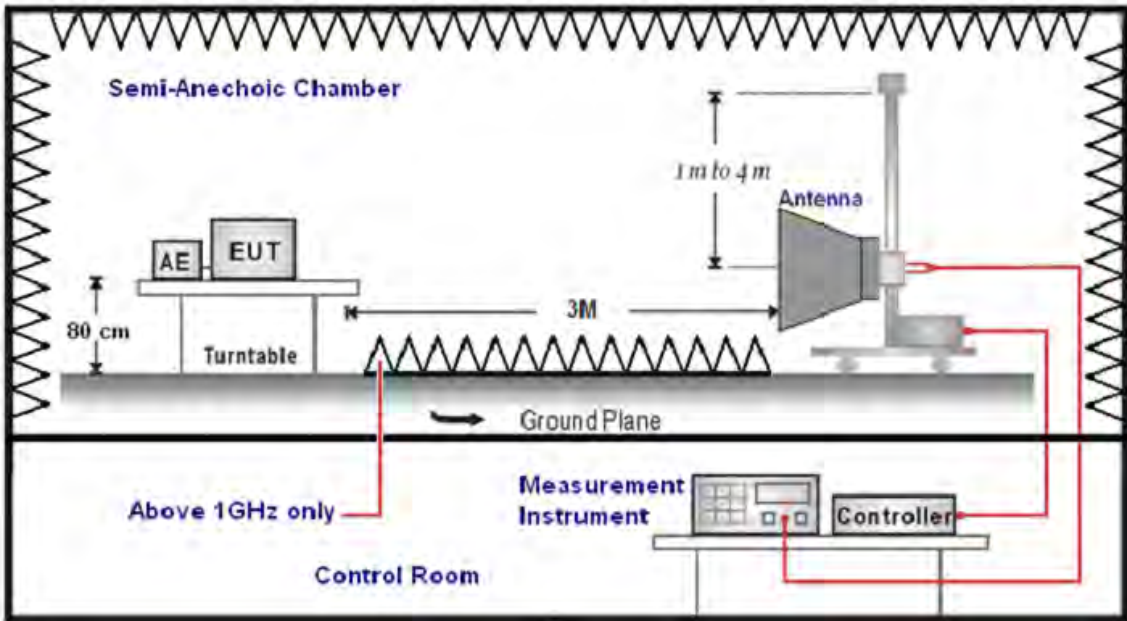

## 5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).



The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:


(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

## 5.5. Test Result


### Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	08/01/2011
Ant.Polar.:	Horizontal	Test By:	Gary Wu

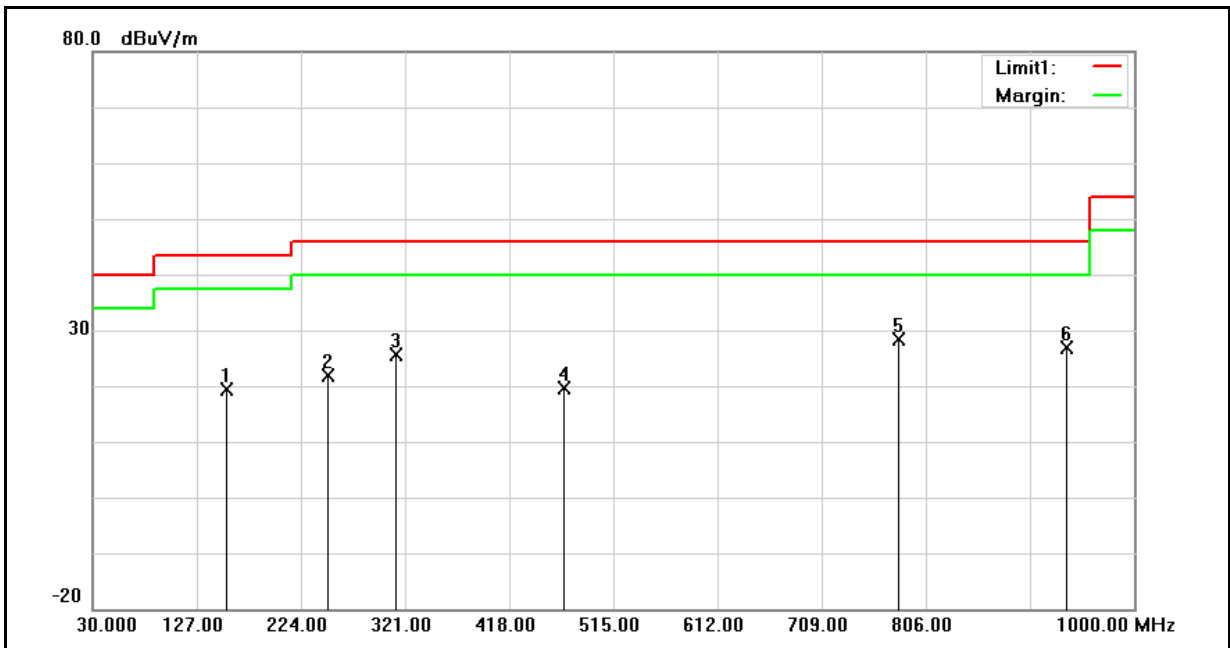

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	156.0000	43.63	-24.26	19.37	43.50	-24.13	QP
2	250.0000	46.77	-24.90	21.87	46.00	-24.13	QP
3	312.5000	48.50	-22.93	25.57	46.00	-20.43	QP
4	468.5000	38.09	-18.58	19.51	46.00	-26.49	QP
5	781.5000	41.26	-12.83	28.43	46.00	-17.57	QP
6	937.5000	37.85	-10.94	26.91	46.00	-19.09	QP

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 1	Date:	08/01/2011
Ant.Polar.:	Vertical	Test By:	Gary Wu

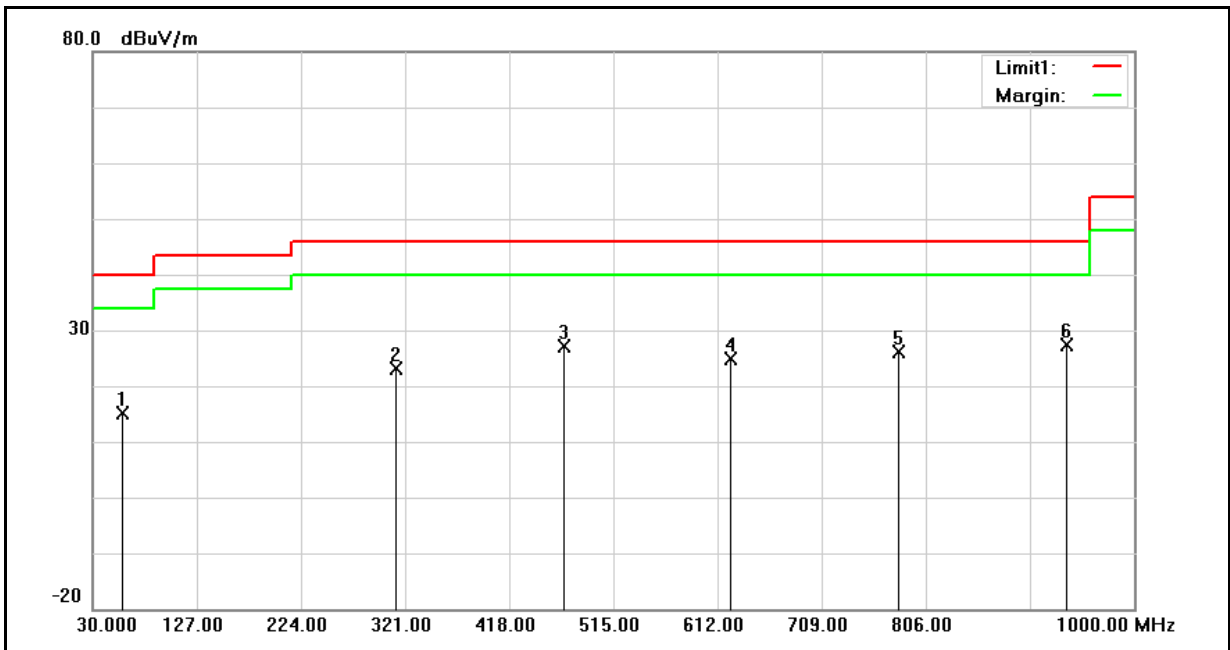

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	58.5000	40.98	-25.80	15.18	40.00	-24.82	QP
2	312.5000	45.98	-22.93	23.05	46.00	-22.95	QP
3	469.0000	45.61	-18.58	27.03	46.00	-18.97	QP
4	625.0000	40.14	-15.32	24.82	46.00	-21.18	QP
5	781.0000	38.89	-12.83	26.06	46.00	-19.94	QP
6	937.5000	38.31	-10.94	27.37	46.00	-18.63	QP

**Above 1GHz**

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	W242D			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	08/01/2011		
Frequency:	2412MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1204.000	73.64	-22.23	51.41	74.00	-22.59	peak	H
3448.000	61.67	-15.32	46.35	74.00	-27.65	peak	H
6049.000	58.00	-8.19	49.81	74.00	-24.19	peak	H
1204.000	74.10	-22.23	51.87	74.00	-22.13	peak	V
2071.000	68.14	-18.21	49.93	74.00	-24.07	peak	V
4824.000	72.93	-11.28	61.65	74.00	-12.35	peak	V
4824.000	63.46	-11.28	52.18	54.00	-1.82	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	W242D			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 2			Date:	08/01/2011		
Frequency:	2437MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1204.000	72.19	-22.23	49.96	74.00	-24.04	peak	H
1586.500	70.46	-20.56	49.90	74.00	-24.10	peak	H
4162.000	61.66	-13.13	48.53	74.00	-25.47	peak	H
1204.000	73.85	-22.23	51.62	74.00	-22.38	peak	V
2071.000	68.13	-18.21	49.92	74.00	-24.08	peak	V
4874.000	77.30	-11.19	66.11	74.00	-7.89	peak	V
4874.000	63.60	-11.19	52.41	54.00	-1.59	AVG	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	08/01/2011
Frequency:	2462MHz	Test By:	Gary Wu

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1204.000	71.03	-22.23	48.80	74.00	-25.20	peak	H
2632.000	64.29	-17.22	47.07	74.00	-26.93	peak	H
4924.000	62.27	-11.08	51.19	74.00	-22.81	peak	H
1204.000	74.10	-22.23	51.87	74.00	-22.13	peak	V
1994.500	67.24	-18.34	48.90	74.00	-25.10	peak	V
4924.000	64.20	-11.08	53.12	74.00	-20.88	peak	V
4924.000	62.97	-11.08	51.89	54.00	-2.11	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	W242D			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	08/01/2011		
Frequency:	2412MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1076.500	72.71	-22.76	49.95	74.00	-24.05	peak	H
3550.000	61.48	-15.08	46.40	74.00	-27.60	peak	H
5233.000	58.42	-10.38	48.04	74.00	-25.96	peak	H
1994.500	71.44	-18.34	53.10	74.00	-20.90	peak	V
4824.000	62.19	-11.28	50.91	74.00	-23.09	peak	V
6661.000	58.56	-7.09	51.47	74.00	-22.53	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	W242D			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 3			Date:	08/01/2011		
Frequency:	2437MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1204.000	70.29	-22.23	48.06	74.00	-25.94	peak	H
3014.500	61.22	-16.04	45.18	74.00	-28.82	peak	H
4874.000	60.36	-11.19	49.17	74.00	-24.83	peak	H
1994.500	68.74	-18.34	50.40	74.00	-23.60	peak	V
4874.000	61.81	-11.19	50.62	74.00	-23.38	peak	V
6482.500	58.37	-7.39	50.98	74.00	-23.02	peak	V

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	08/01/2011
Frequency:	2462MHz	Test By:	Gary Wu

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1586.500	71.59	-20.56	51.03	74.00	-22.97	peak	H
3499.000	61.64	-15.24	46.40	74.00	-27.60	peak	H
4924.000	62.84	-11.08	51.76	74.00	-22.24	peak	H
2071.000	68.37	-18.21	50.16	74.00	-23.84	peak	V
3983.500	62.80	-13.75	49.05	74.00	-24.95	peak	V
4924.000	65.39	-11.08	54.31	74.00	-19.69	peak	V
4924.000	54.14	-11.08	43.06	54.00	-10.94	AVG	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	W242D			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	08/01/2011		
Frequency:	2412MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1178.500	72.61	-22.34	50.27	74.00	-23.73	peak	H
3473.500	61.60	-15.28	46.32	74.00	-27.68	peak	H
5768.500	57.96	-8.96	49.00	74.00	-25.00	peak	H
1994.500	69.83	-18.34	51.49	74.00	-22.51	peak	V
4825.000	61.54	-11.27	50.27	74.00	-23.73	peak	V
6967.000	57.20	-6.56	50.64	74.00	-23.36	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	W242D			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 4			Date:	08/01/2011		
Frequency:	2437MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1051.000	73.52	-22.86	50.66	74.00	-23.34	peak	H
3397.000	61.12	-15.41	45.71	74.00	-28.29	peak	H
5539.000	58.02	-9.63	48.39	74.00	-25.61	peak	H
2071.000	67.69	-18.21	49.48	74.00	-24.52	peak	V
4874.000	61.95	-11.19	50.76	74.00	-23.24	peak	V
6737.500	58.35	-6.95	51.40	74.00	-22.60	peak	V



Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	08/01/2011
Frequency:	2462MHz	Test By:	Gary Wu

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1586.500	71.77	-20.56	51.21	74.00	-22.79	peak	H
3779.500	62.04	-14.38	47.66	74.00	-26.34	peak	H
4924.000	62.08	-11.08	51.00	74.00	-23.00	peak	H
2071.000	67.43	-18.21	49.22	74.00	-24.78	peak	V
3448.000	63.19	-15.32	47.87	74.00	-26.13	peak	V
4924.000	62.62	-11.08	51.54	74.00	-22.46	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	W242D			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	08/01/2011		
Frequency:	2422MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1204.000	72.09	-22.23	49.86	74.00	-24.14	peak	H
1586.500	69.54	-20.56	48.98	74.00	-25.02	peak	H
5258.500	58.99	-10.31	48.68	74.00	-25.32	peak	H
1586.500	72.30	-20.56	51.74	74.00	-22.26	peak	V
4844.000	61.55	-11.24	50.31	74.00	-23.69	peak	V
6941.500	57.43	-6.61	50.82	74.00	-23.18	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	W242D			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	08/01/2011		
Frequency:	2437MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1153.000	73.55	-22.44	51.11	74.00	-22.89	peak	H
2836.000	65.70	-16.59	49.11	74.00	-24.89	peak	H
4723.000	59.41	-11.49	47.92	74.00	-26.08	peak	H
1586.500	72.15	-20.56	51.59	74.00	-22.41	peak	V
3473.500	61.33	-15.28	46.05	74.00	-27.95	peak	V
4876.000	63.04	-11.17	51.87	74.00	-22.13	peak	V

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	W242D			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	Mode 5			Date:	08/01/2011		
Frequency:	2452MHz			Test By:	Gary Wu		
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1204.000	72.42	-22.23	50.19	74.00	-23.81	peak	H
1586.500	68.60	-20.56	48.04	74.00	-25.96	peak	H
4621.000	59.36	-11.71	47.65	74.00	-26.35	peak	H
1586.500	71.70	-20.56	51.14	74.00	-22.86	peak	V
1790.500	69.35	-19.46	49.89	74.00	-24.11	peak	V
4904.000	61.78	-11.12	50.66	74.00	-23.34	peak	V


Standard:	FCC Part 15C			Test Distance:	3m			
Test item:	Radiated Emission			Power:	AC 120V/60Hz			
Model Number:	W242D			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH			
Mode:	Mode 6			Date:	08/01/2011			
Modulation:	IEEE 802.11b			Test By:	Gary Wu			
Frequency:	2437MHz							
Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Peak Limit (dBuV/m)	AVG. Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
1688.500	66.38	-20.01	46.37	74.00	54.00	-27.63	peak	H
3601.000	61.40	-14.93	46.47	74.00	54.00	-27.53	peak	H
6125.500	57.43	-8.05	49.38	74.00	54.00	-24.62	peak	H
1127.500	73.59	-22.55	51.04	74.00	54.00	-22.96	peak	V
1994.500	68.11	-18.34	49.77	74.00	54.00	-24.23	peak	V
3473.500	63.38	-15.28	48.10	74.00	54.00	-25.90	peak	V

## 6 Maximum Conducted Output Power Measurement

### 6.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm.

### 6.2. Test Setup

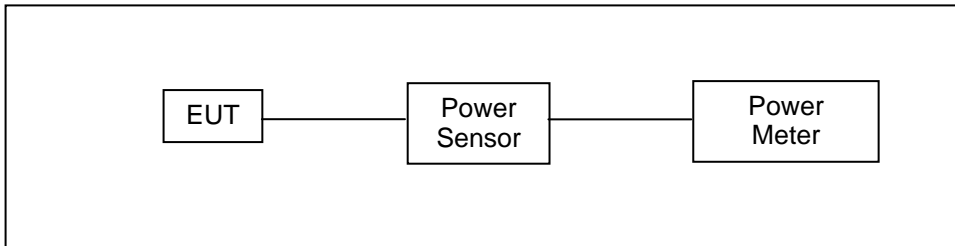

### 6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	07/19/2010	(2)
Wideband Power Meter	Agilent	N1921A	MY45241957	07/19/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to  $(\text{GAIN} - 6)/3$  dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

**6.5. Test Result**

Model Number	W242D									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 2: IEEE 802.11b Link Mode									
Date of Test	08/10/2011					Test Site		TE02		
Frequency (MHz)	Data Rate	Chain A				Chain B				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	1 M	10.45	0.0111	13.12	0.0205	11.76	0.0150	<b>14.38</b>	<b>0.0274</b>	< 30
2437		10.48	0.0112	13.08	0.0203	11.73	0.0149	14.34	0.0272	< 30
2462		10.69	0.0117	13.32	0.0215	11.49	0.0141	14.09	0.0256	< 30

Model Number	W242D									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 3: IEEE 802.11g Link Mode									
Date of Test	08/10/2011					Test Site		TE02		
Frequency (MHz)	Data Rate	Chain A				Chain B				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	36 M	15.08	0.0322	23.79	0.2393	16.72	0.0470	<b>25.18</b>	<b>0.3296</b>	< 30
2437		15.24	0.0334	23.75	0.2371	16.72	0.0470	24.93	0.3112	< 30
2462		15.40	0.0347	23.61	0.2296	16.58	0.0455	24.50	0.2818	< 30

Model Number	W242D									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 4: draft 802.11n Standard-20MHz Link Mode									
Date of Test	08/10/2011					Test Site		TE02		
Frequency (MHz)	Data Rate	Chain A				Chain B				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2412	65 M	15.09	0.0323	23.92	0.2466	16.71	0.0469	<b>25.20</b>	<b>0.3311</b>	< 30
2437		15.27	0.0337	23.86	0.2432	16.72	0.0470	24.97	0.3141	< 30
2462		15.43	0.0349	23.72	0.2355	16.52	0.0449	24.54	0.2844	< 30

Model Number	W242D									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 4: draft 802.11n Standard-20MHz (MIMO) Link Mode									
Date of Test	08/10/2011					Test Site		TE02		
Frequency (MHz)	Data Rate	Average Power				Peak Power				Limit (dBm)
		(dBm)		(W)		(dBm)		(W)		
2412	14.4 M	16.67		0.0465		<b>27.59</b>		<b>0.5741</b>		< 30
2437		16.73		0.0471		27.37		0.5458		< 30
2462		16.63		0.0460		27.17		0.5212		< 30

Model Number	W242D									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 5: draft 802.11n Wide-40MHz Link Mode									
Date of Test	08/10/2011					Test Site		TE02		
Frequency (MHz)	Data Rate	Chain A				Chain B				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
2422	15 M	14.84	0.0305	23.43	0.2203	16.48	0.0445	<b>24.85</b>	<b>0.3055</b>	< 30
2437		15.01	0.0317	23.51	0.2244	16.29	0.0426	24.48	0.2805	< 30
2452		15.09	0.0323	23.42	0.2198	16.31	0.0428	24.44	0.2780	< 30


Model Number	W242D									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 5: draft 802.11n Wide-40MHz (MIMO) Link Mode									
Date of Test	08/10/2011					Test Site		TE02		
Frequency (MHz)	Data Rate	Average Power		Peak Power		Limit (dBm)				
		(dBm)	(W)	(dBm)	(W)					
2422	120 M	14.80	0.0302	<b>27.03</b>	<b>0.5047</b>	< 30				
2437		15.06	0.0321	27.01	0.5023	< 30				
2452		15.02	0.0318	26.95	0.4955	< 30				

## 7 6dB RF Bandwidth Measurement

### 7.1. Limit

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

### 7.2. Test Setup

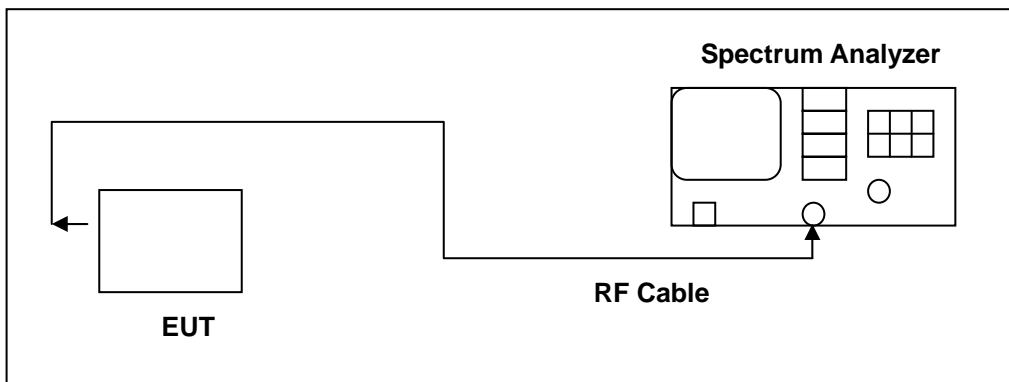

### 7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel 1, 6, 11)



**7.5. Test Result**

Model Number	W242D		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	08/10/2011	Test Site	TE02
Ant. Port	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Chain A	2412	10000	> 500
	2437	10170	> 500
	2462	10170	> 500
Chain B	2412	10170	> 500
	2437	10170	> 500
	2462	10250	> 500

Model Number	W242D		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	08/10/2011	Test Site	TE06
Ant. Port	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Chain A	2412	16670	> 500
	2437	16500	> 500
	2462	16580	> 500
Chain B	2412	16580	> 500
	2437	16670	> 500
	2462	16580	> 500

Model Number	W242D		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 4: draft 802.11n Standard-20MHz Link Mode		
Date of Test	08/10/2011	Test Site	TE02
Ant. Port	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Chain A	2412	17830	> 500
	2437	17830	> 500
	2462	17830	> 500
Chain B	2412	17830	> 500
	2437	17830	> 500
	2462	17830	> 500
Chain A + B	2412	17830	> 500
	2437	17670	> 500
	2462	17830	> 500


Model Number	W242D		
Test Item	6dB RF Bandwidth		
Test Mode	Mode 5: draft 802.11n Wide-40MHz Link Mode _ Chain A		
Date of Test	08/10/2011	Test Site	TE02
Ant. Port	Frequency (MHz)	Measurement (kHz)	Limit (kHz)
Chain A	2422	36500	> 500
	2437	36500	> 500
	2452	36500	> 500
Chain B	2422	36500	> 500
	2437	36500	> 500
	2452	36500	> 500
Chain A + B	2422	36500	> 500
	2437	36500	> 500
	2452	36500	> 500

**7.6. Test Graphs**

Mode 2: IEEE 802.11b Link Mode _ Chain A																					
2412	<p>Agilent R T Freq/Channel</p> <p>Ref 19 dBm Atten 10 dB Δ Mkr2 10.00 MHz -0.19 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>Res BW 100 kHz VBW 100 kHz Sweep 6.04 ms (601 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.413 00 GHz</td> <td>0.21 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.407 08 GHz</td> <td>-6.36 dBm</td> </tr> <tr> <td>2a</td> <td>(1)</td> <td>Freq</td> <td>10.00 MHz</td> <td>-0.19 dB</td> </tr> </tbody> </table> <p>Copyright 2000-2005 Agilent Technologies</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.413 00 GHz	0.21 dBm	2R	(1)	Freq	2.407 08 GHz	-6.36 dBm	2a	(1)	Freq	10.00 MHz	-0.19 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.413 00 GHz	0.21 dBm																	
2R	(1)	Freq	2.407 08 GHz	-6.36 dBm																	
2a	(1)	Freq	10.00 MHz	-0.19 dB																	
2437	<p>Agilent T Freq/Channel</p> <p>Ref 19 dBm Atten 10 dB Δ Mkr2 10.17 MHz -1.12 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>Res BW 100 kHz VBW 100 kHz Sweep 6.04 ms (601 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.436 50 GHz</td> <td>0.61 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.431 92 GHz</td> <td>-6.04 dBm</td> </tr> <tr> <td>2a</td> <td>(1)</td> <td>Freq</td> <td>10.17 MHz</td> <td>-1.12 dB</td> </tr> </tbody> </table> <p>Copyright 2000-2005 Agilent Technologies</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.436 50 GHz	0.61 dBm	2R	(1)	Freq	2.431 92 GHz	-6.04 dBm	2a	(1)	Freq	10.17 MHz	-1.12 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.436 50 GHz	0.61 dBm																	
2R	(1)	Freq	2.431 92 GHz	-6.04 dBm																	
2a	(1)	Freq	10.17 MHz	-1.12 dB																	
2462	<p>Agilent T Freq/Channel</p> <p>Ref 19 dBm Atten 10 dB Δ Mkr2 10.17 MHz 0.51 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>Res BW 100 kHz VBW 100 kHz Sweep 6.04 ms (601 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>2.462 50 GHz</td> <td>0.60 dBm</td> </tr> <tr> <td>2R</td> <td>(1)</td> <td>Freq</td> <td>2.456 92 GHz</td> <td>-7.00 dBm</td> </tr> <tr> <td>2a</td> <td>(1)</td> <td>Freq</td> <td>10.17 MHz</td> <td>0.51 dB</td> </tr> </tbody> </table> <p>Copyright 2000-2005 Agilent Technologies</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	2.462 50 GHz	0.60 dBm	2R	(1)	Freq	2.456 92 GHz	-7.00 dBm	2a	(1)	Freq	10.17 MHz	0.51 dB
Marker	Trace	Type	X Axis	Amplitude																	
1	(1)	Freq	2.462 50 GHz	0.60 dBm																	
2R	(1)	Freq	2.456 92 GHz	-7.00 dBm																	
2a	(1)	Freq	10.17 MHz	0.51 dB																	


Mode 2: IEEE 802.11b Link Mode \_ Chain B

2412

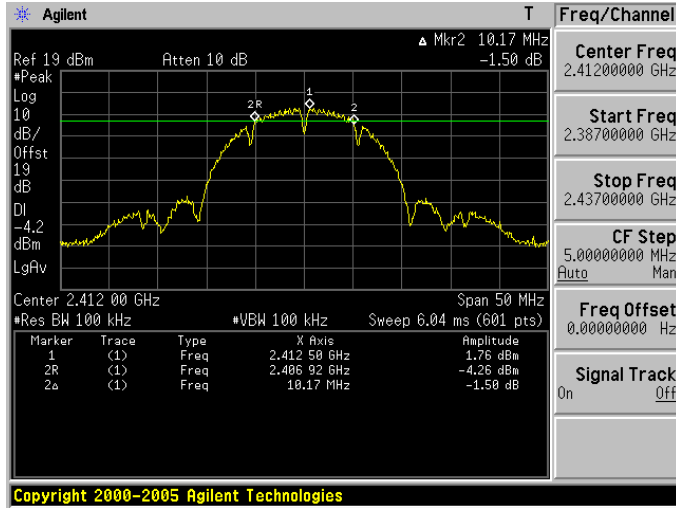


Copyright 2000-2005 Agilent Technologies

2437

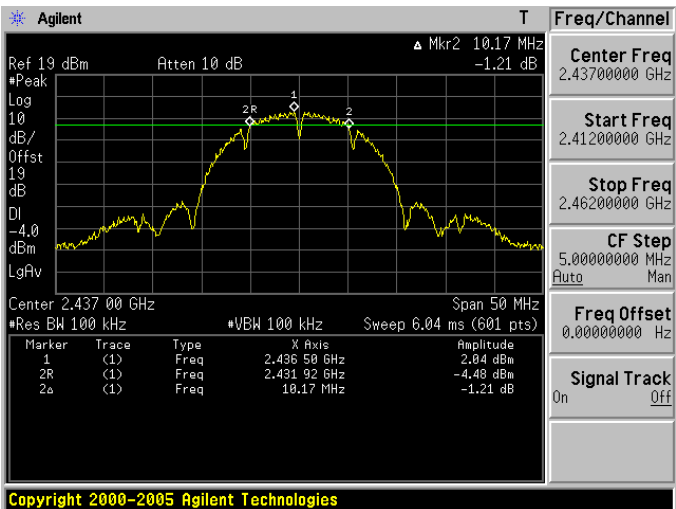

Copyright 2000-2005 Agilent Technologies


2462

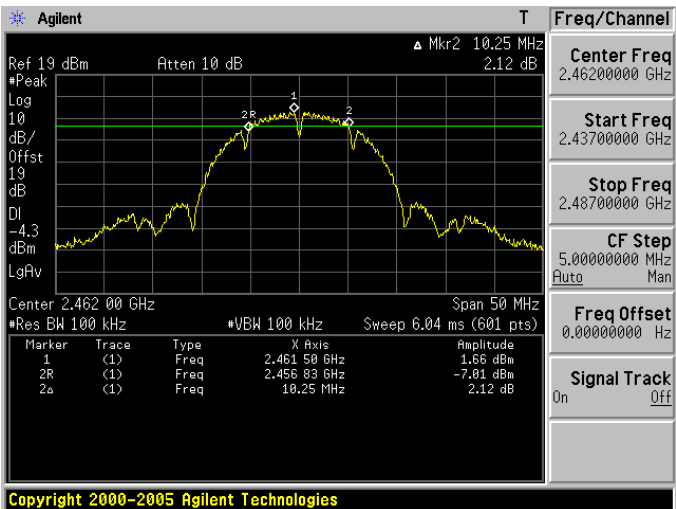


Copyright 2000-2005 Agilent Technologies

Mode 3: IEEE 802.11g Link Mode \_ Chain A


2412

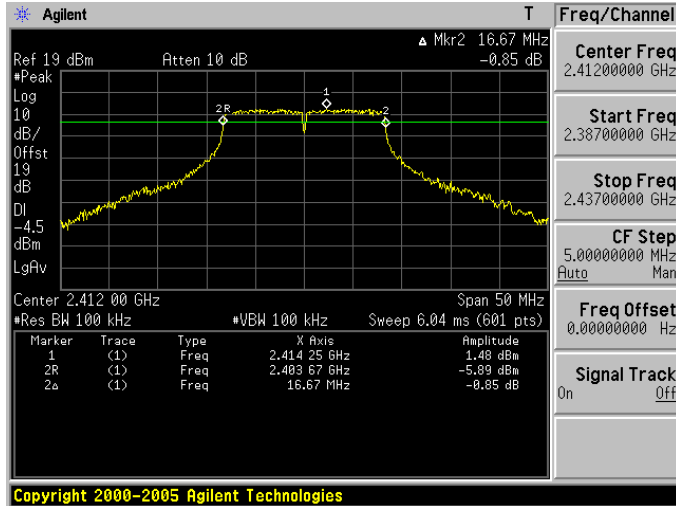

2437

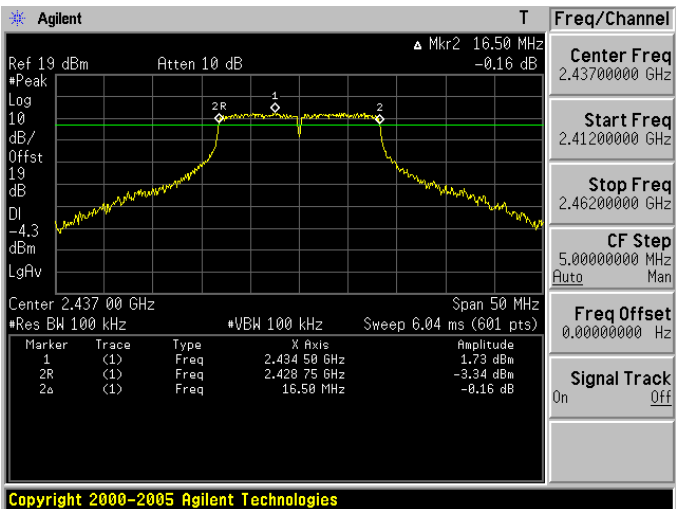


2462

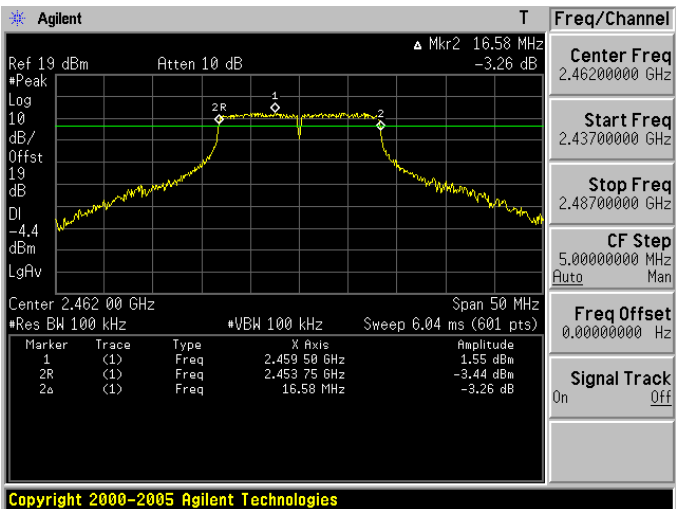


Mode 3: IEEE 802.11g Link Mode \_ Chain B


2412

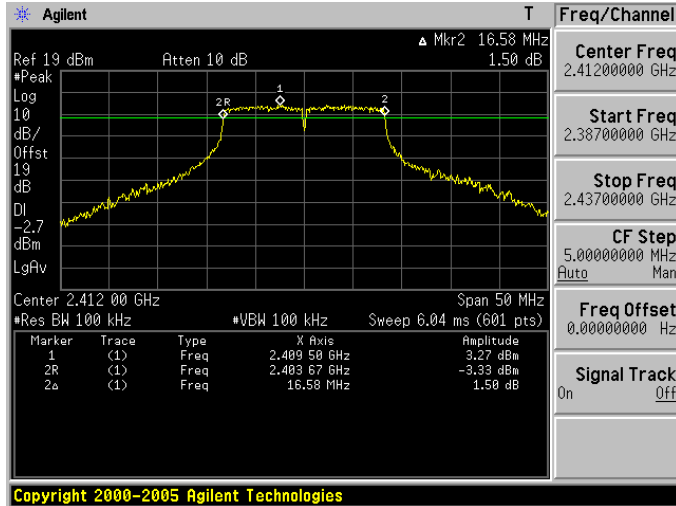

2437

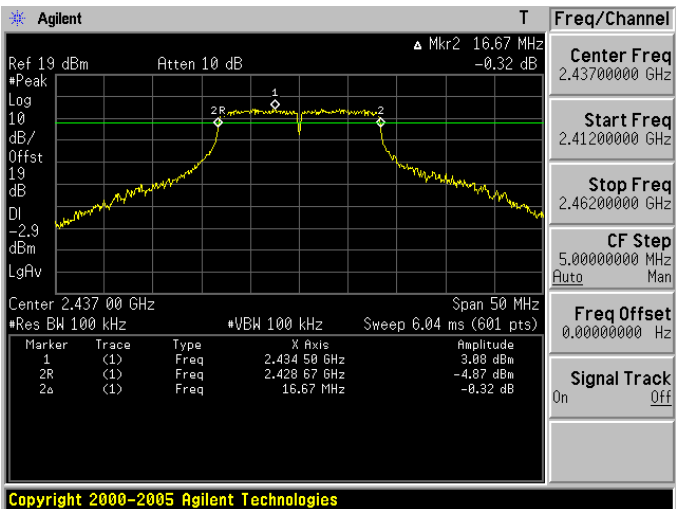


2462

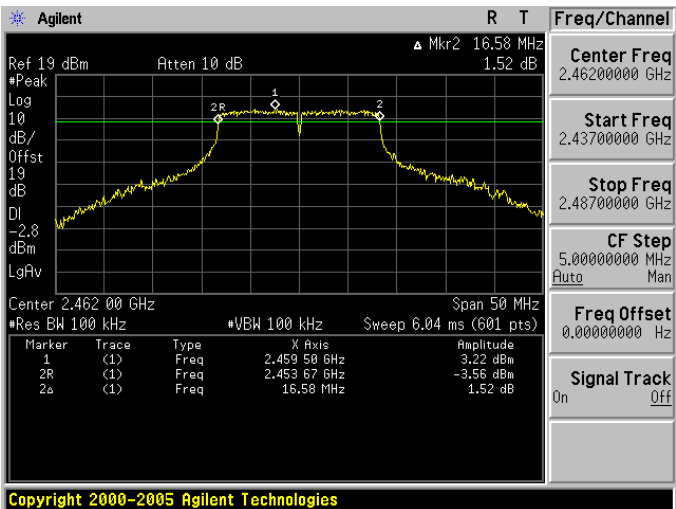


Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain A


2412

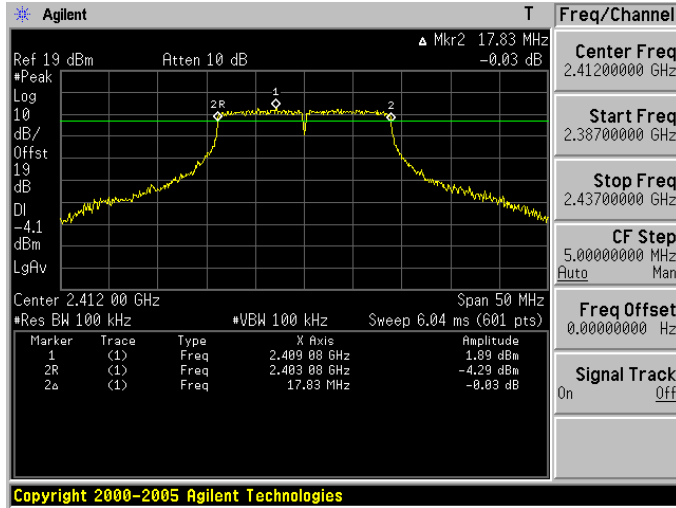

2437

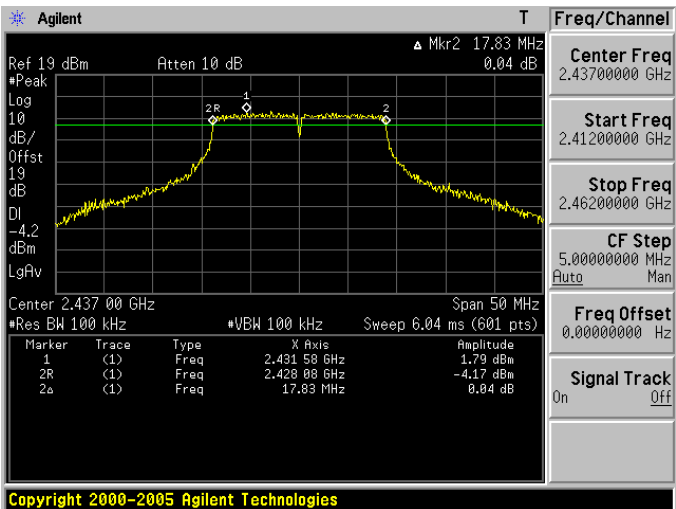


2462

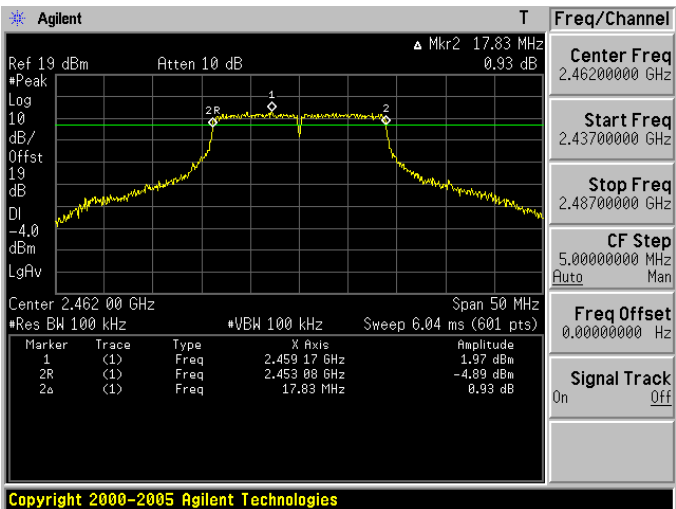


Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain B


2412

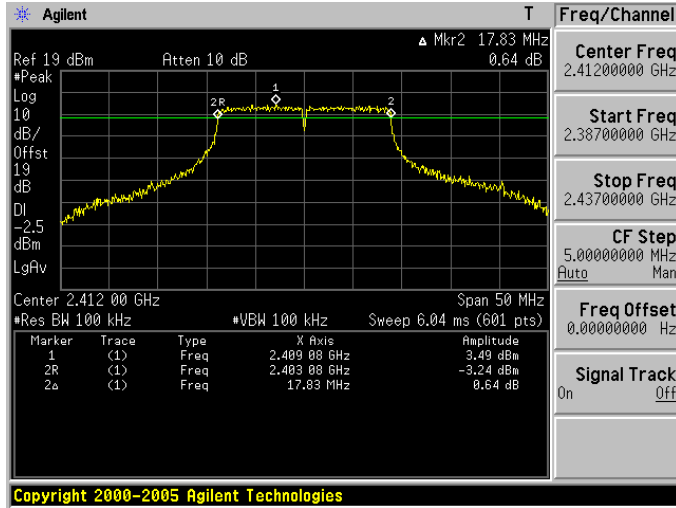

2437

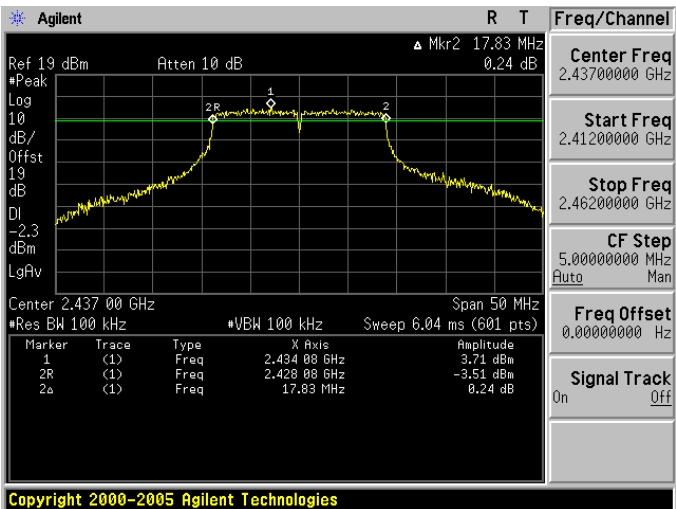


2462

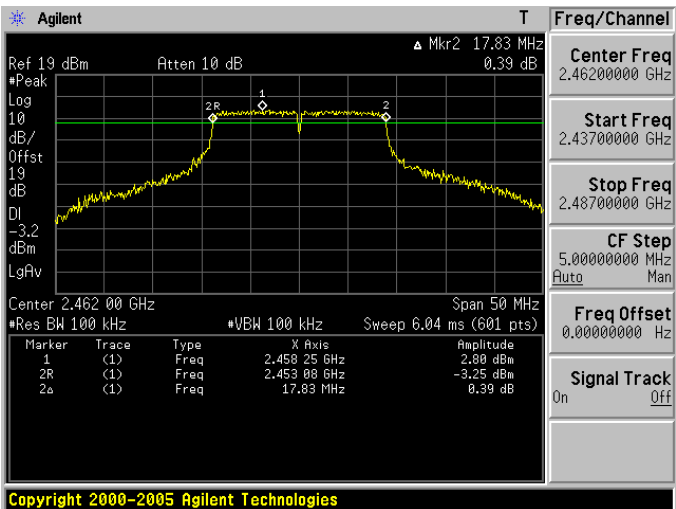




Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain A + Chain B


2412

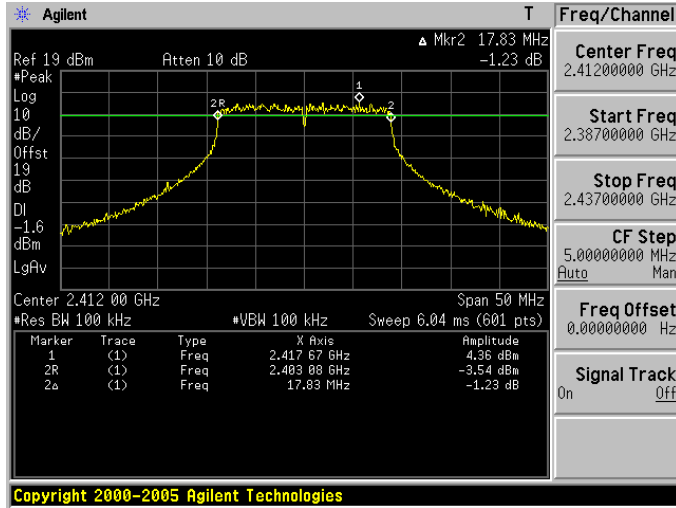

2437

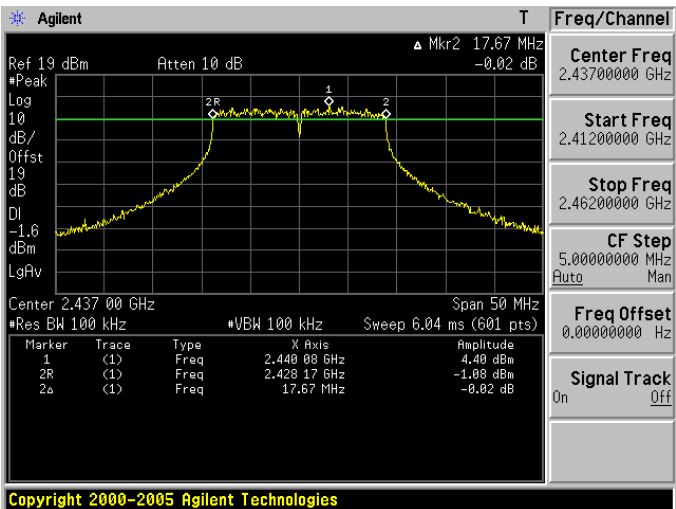


2462

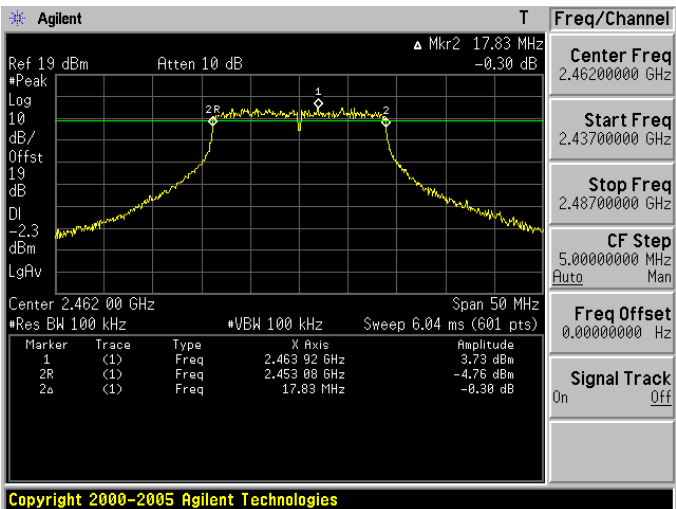


Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain A


2422

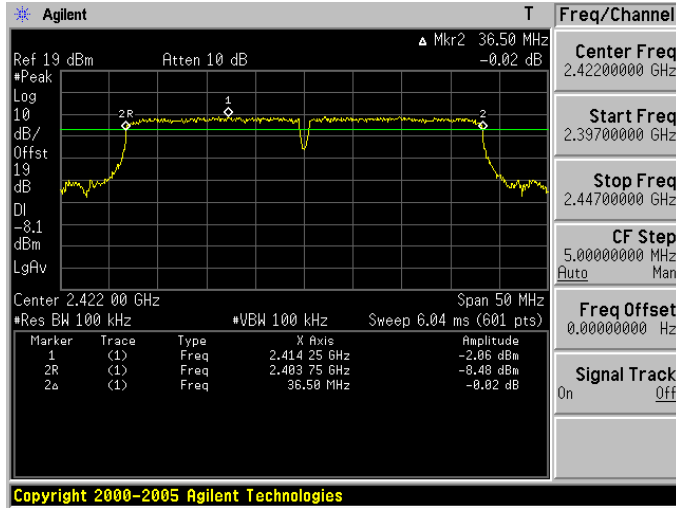

2437

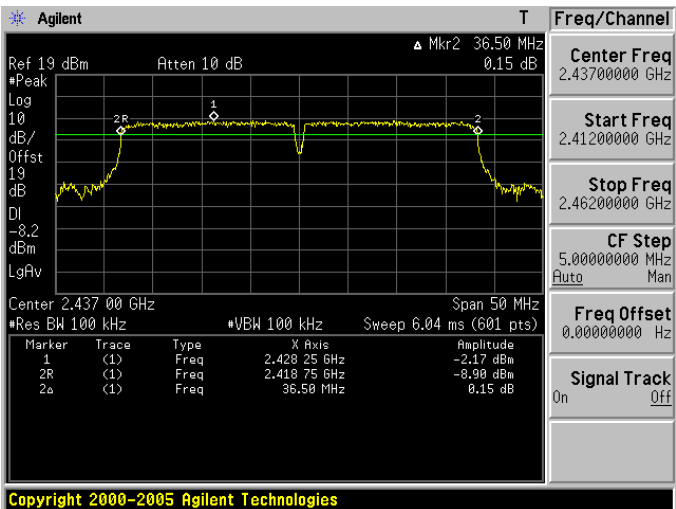


2452

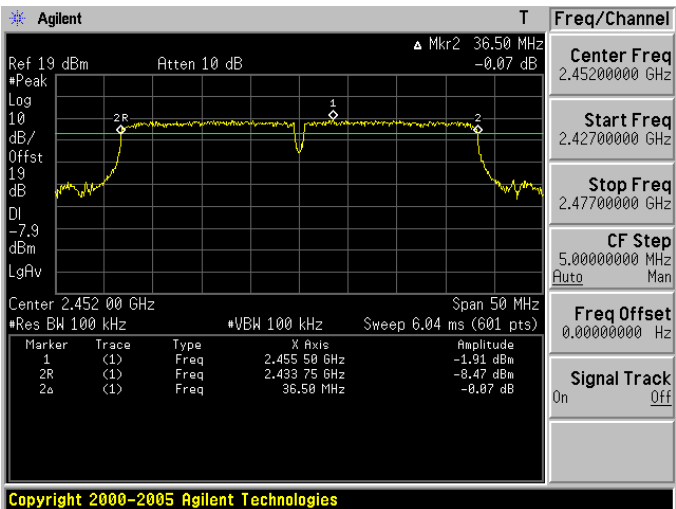


Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain B


2422

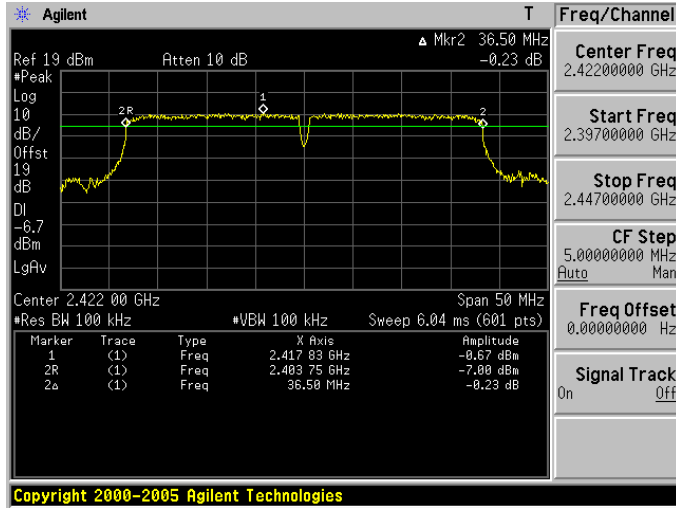

2437

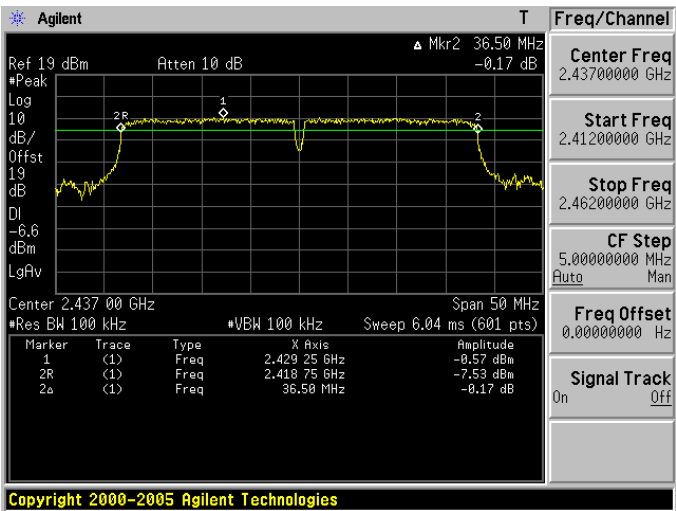


2452

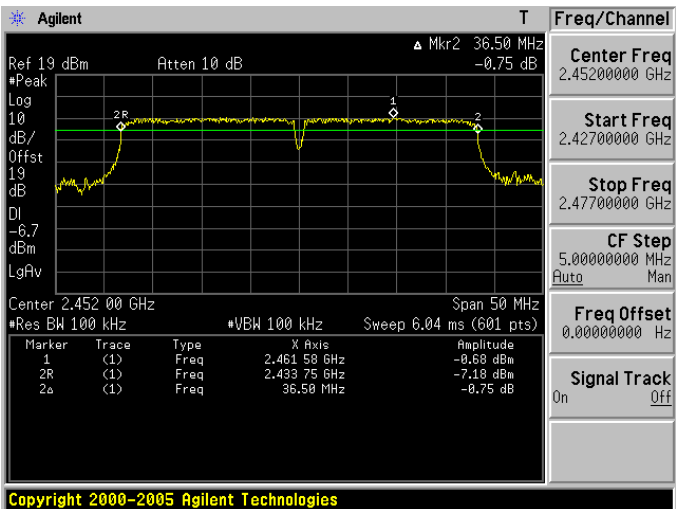


Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain A + Chain B


2422

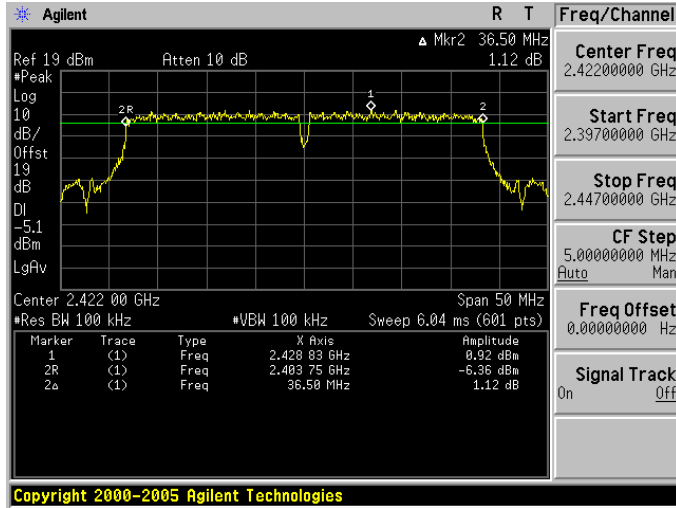

2437

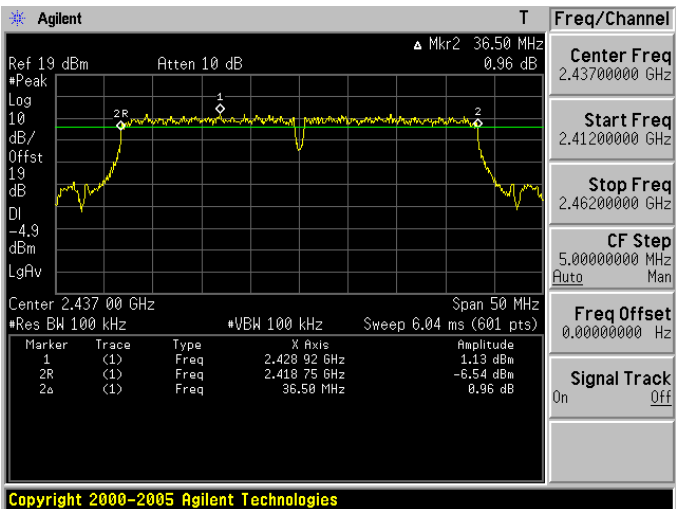

2452

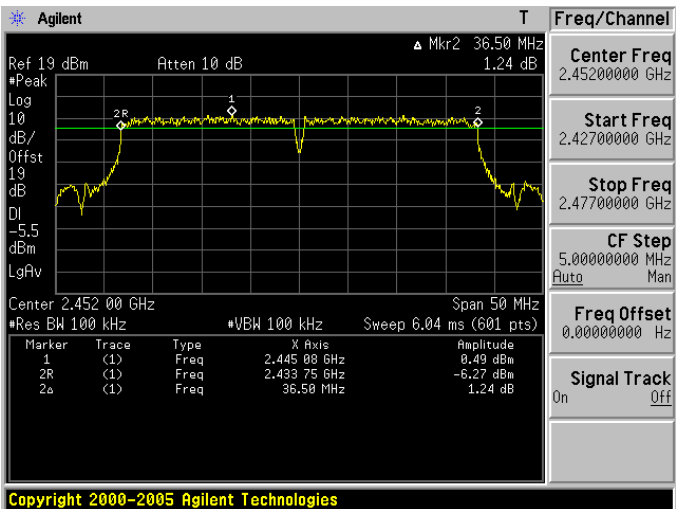


## 8 Maximum Power Density Measurement

### 8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.2. Test Setup

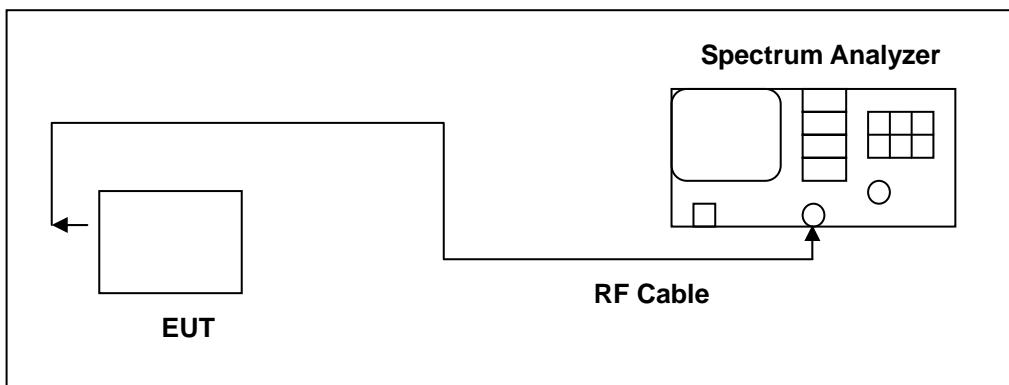

### 8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output pass band. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. The specification calls for a 1 second interval at each 3 kHz bandwidth; total SWEEP TIME is calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz}) / 3 \text{ kHz}$$

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

### 8.5. Test Result

Model Number	W242D		
Test Item	Maximum Power Density		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	08/11/2011	Test Site	TE02
Ant. Port	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
Chain A	2412	-5.32	< 8
	2437	-3.71	< 8
	2462	-7.94	< 8
Chain B	2412	-4.73	< 8
	2437	3.59	< 8
	2462	-2.58	< 8

Model Number	W242D		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	08/11/2011	Test Site	TE02
Ant. Port	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
Chain A	2412	-10.92	< 8
	2437	-10.39	< 8
	2462	-10.63	< 8
Chain B	2412	-9.96	< 8
	2437	-8.97	< 8
	2462	-8.68	< 8

Model Number	W242D		
Test Item	Maximum Power Density		
Test Mode	Mode 4: draft 802.11n Standard-20MHz Link Mode		
Date of Test	08/11/2011	Test Site	TE02
Ant. Port	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
Chain A	2412	-10.47	< 8
	2437	-12.86	< 8
	2462	-10.28	< 8
Chain B	2412	-8.41	< 8
	2437	-8.35	< 8
	2462	-8.54	< 8
Chain A + B	2412	-9.34	< 8
	2437	-9.44	< 8
	2462	-9.94	< 8




Model Number	W242D		
Test Item	Maximum Power Density		
Test Mode	Mode 5: draft 802.11n Wide-40MHz Link Mode		
Date of Test	08/11/2011	Test Site	TE02
Ant. Port	Frequency (MHz)	Measurement (dBm)	Limit (dBm)
Chain A	2422	-14.40	< 8
	2437	-13.34	< 8
	2452	-14.18	< 8
Chain B	2422	-11.46	< 8
	2437	-10.38	< 8
	2452	-10.63	< 8
Chain A + B	2422	-11.84	< 8
	2437	-11.79	< 8
	2452	-12.25	< 8

**8.6. Test Graphs**




Mode 2: IEEE 802.11b Link Mode _ Chain A	
2412	<p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.410 804 2 GHz -5.32 dBm</p> <p>Center 2.410 666 7 GHz Span 300 kHz</p> <p>*Res BW 3 kHz *VBW 10 kHz *Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	<p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.436 179 2 GHz -3.71 dBm</p> <p>Center 2.436 100 0 GHz Span 300 kHz</p> <p>*Res BW 3 kHz *VBW 10 kHz *Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	<p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.460 428 8 GHz -7.94 dBm</p> <p>Center 2.460 433 3 GHz Span 300 kHz</p> <p>*Res BW 3 kHz *VBW 10 kHz *Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>



Mode 2: IEEE 802.11b Link Mode \_ Chain B
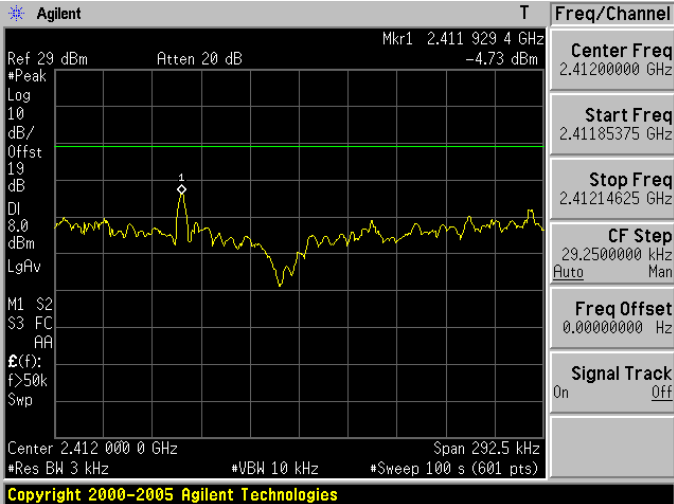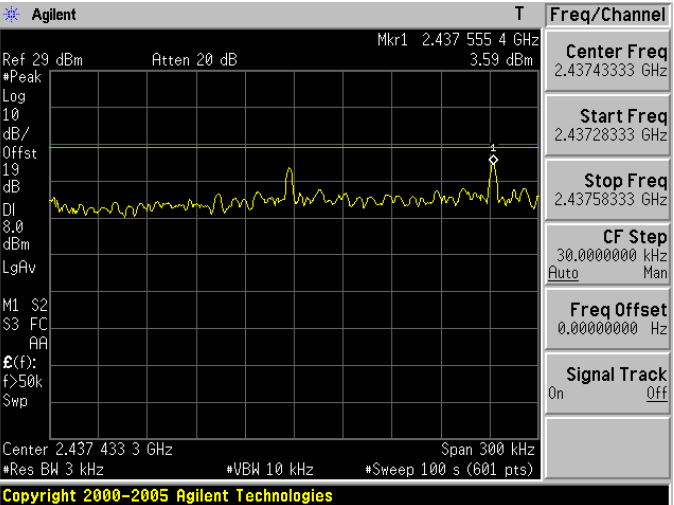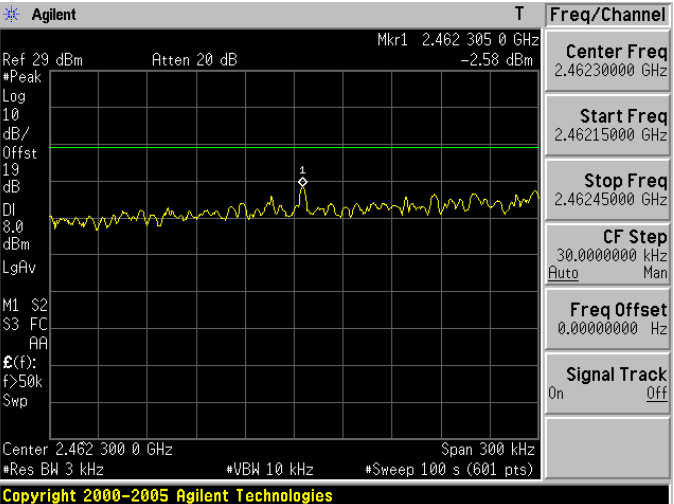
<p>2412</p>	 <p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.411 929 4 GHz -4.73 dBm</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>19</p> <p>dB</p> <p>DI</p> <p>8.0</p> <p>dBm</p> <p>LgAv</p> <p>M1 S2</p> <p>S3 FC</p> <p>AA</p> <p>Ⓔ(f):</p> <p>f&gt;50k</p> <p>Swp</p> <p>Center 2.412 000 0 GHz Span 292.5 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.41185375 GHz</p> <p>Stop Freq 2.41214625 GHz</p> <p>CF Step 29.2500000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	 <p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.437 555 4 GHz 3.59 dBm</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>19</p> <p>dB</p> <p>DI</p> <p>8.0</p> <p>dBm</p> <p>LgAv</p> <p>M1 S2</p> <p>S3 FC</p> <p>AA</p> <p>Ⓔ(f):</p> <p>f&gt;50k</p> <p>Swp</p> <p>Center 2.437 433 3 GHz Span 300 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.43743333 GHz</p> <p>Start Freq 2.43728333 GHz</p> <p>Stop Freq 2.43758333 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2462</p>	 <p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.462 305 0 GHz -2.58 dBm</p> <p>#Peak</p> <p>Log</p> <p>10</p> <p>dB/</p> <p>Offst</p> <p>19</p> <p>dB</p> <p>DI</p> <p>8.0</p> <p>dBm</p> <p>LgAv</p> <p>M1 S2</p> <p>S3 FC</p> <p>AA</p> <p>Ⓔ(f):</p> <p>f&gt;50k</p> <p>Swp</p> <p>Center 2.462 300 0 GHz Span 300 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p>Freq/Channel</p> <p>Center Freq 2.46230000 GHz</p> <p>Start Freq 2.46215000 GHz</p> <p>Stop Freq 2.46245000 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11g Link Mode \_ Chain A

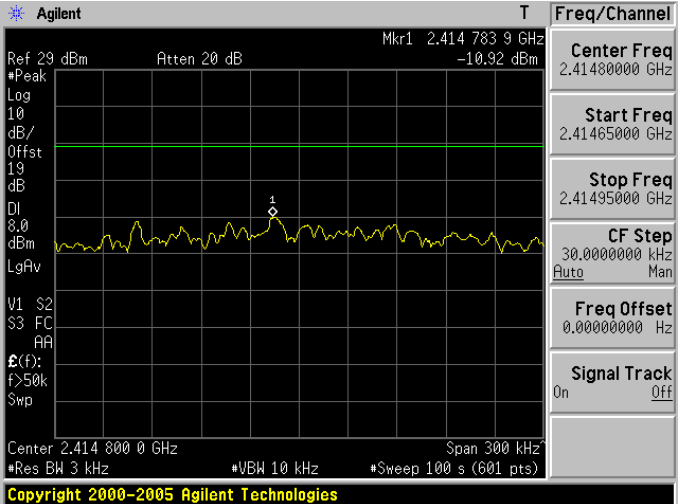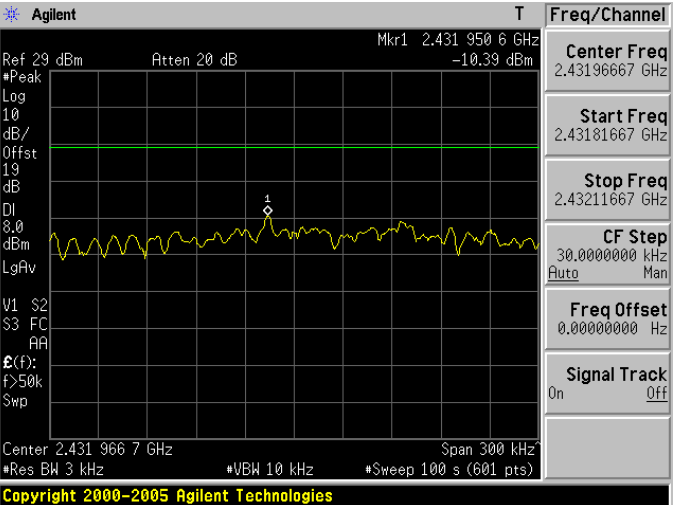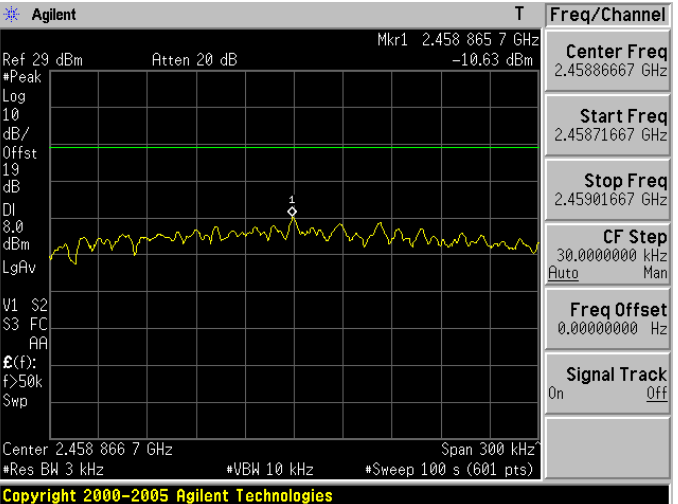
<p>2412</p>	 <p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.414 783 9 GHz -10.92 dBm</p> <p>Center 2.414 800 0 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.4148000 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.41465000 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.41495000 GHz</td> </tr> <tr> <td>CF Step</td> <td>30.0000000 kHz Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table>	Freq/Channel		Center Freq	2.4148000 GHz	Start Freq	2.41465000 GHz	Stop Freq	2.41495000 GHz	CF Step	30.0000000 kHz Auto Man	Freq Offset	0.00000000 Hz	Signal Track	On Off
Freq/Channel															
Center Freq	2.4148000 GHz														
Start Freq	2.41465000 GHz														
Stop Freq	2.41495000 GHz														
CF Step	30.0000000 kHz Auto Man														
Freq Offset	0.00000000 Hz														
Signal Track	On Off														
<p>2437</p>	 <p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.431 950 6 GHz -10.39 dBm</p> <p>Center 2.431 966 7 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.4319667 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.43181667 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.43211667 GHz</td> </tr> <tr> <td>CF Step</td> <td>30.0000000 kHz Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table>	Freq/Channel		Center Freq	2.4319667 GHz	Start Freq	2.43181667 GHz	Stop Freq	2.43211667 GHz	CF Step	30.0000000 kHz Auto Man	Freq Offset	0.00000000 Hz	Signal Track	On Off
Freq/Channel															
Center Freq	2.4319667 GHz														
Start Freq	2.43181667 GHz														
Stop Freq	2.43211667 GHz														
CF Step	30.0000000 kHz Auto Man														
Freq Offset	0.00000000 Hz														
Signal Track	On Off														
<p>2462</p>	 <p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.458 865 7 GHz -10.63 dBm</p> <p>Center 2.458 866 7 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <table border="1"> <thead> <tr> <th colspan="2">Freq/Channel</th> </tr> </thead> <tbody> <tr> <td>Center Freq</td> <td>2.4588667 GHz</td> </tr> <tr> <td>Start Freq</td> <td>2.45871667 GHz</td> </tr> <tr> <td>Stop Freq</td> <td>2.45901667 GHz</td> </tr> <tr> <td>CF Step</td> <td>30.0000000 kHz Auto Man</td> </tr> <tr> <td>Freq Offset</td> <td>0.00000000 Hz</td> </tr> <tr> <td>Signal Track</td> <td>On Off</td> </tr> </tbody> </table>	Freq/Channel		Center Freq	2.4588667 GHz	Start Freq	2.45871667 GHz	Stop Freq	2.45901667 GHz	CF Step	30.0000000 kHz Auto Man	Freq Offset	0.00000000 Hz	Signal Track	On Off
Freq/Channel															
Center Freq	2.4588667 GHz														
Start Freq	2.45871667 GHz														
Stop Freq	2.45901667 GHz														
CF Step	30.0000000 kHz Auto Man														
Freq Offset	0.00000000 Hz														
Signal Track	On Off														

Mode 3: IEEE 802.11g Link Mode \_ Chain B


<p>2412</p>	<p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.415 449 4 GHz -9.96 dBm</p> <p>Center 2.415 433 3 GHz Span 300 kHz</p> <p>*Res BW 3 kHz *VBW 10 kHz *Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>2437</p>	<p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.439 784 4 GHz -8.97 dBm</p> <p>Center 2.439 800 0 GHz Span 300 kHz</p> <p>*Res BW 3 kHz *VBW 10 kHz *Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>2462</p>	<p>Agilent R T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.456 951 6 GHz -8.68 dBm</p> <p>Center 2.456 966 7 GHz Span 300 kHz</p> <p>*Res BW 3 kHz *VBW 10 kHz *Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain A


2412

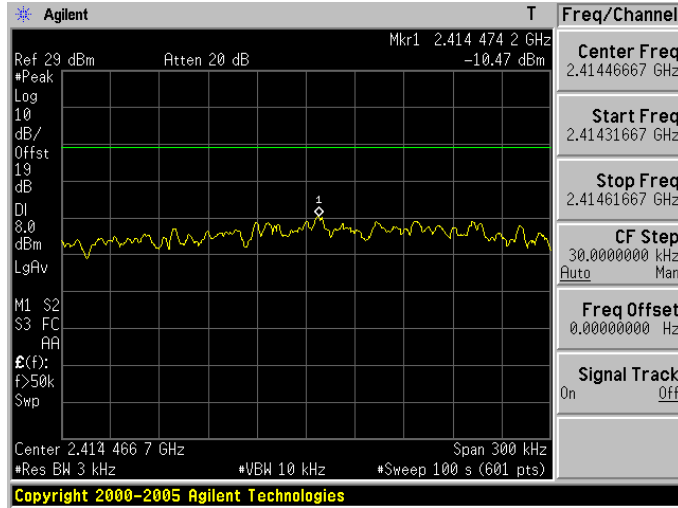

2437

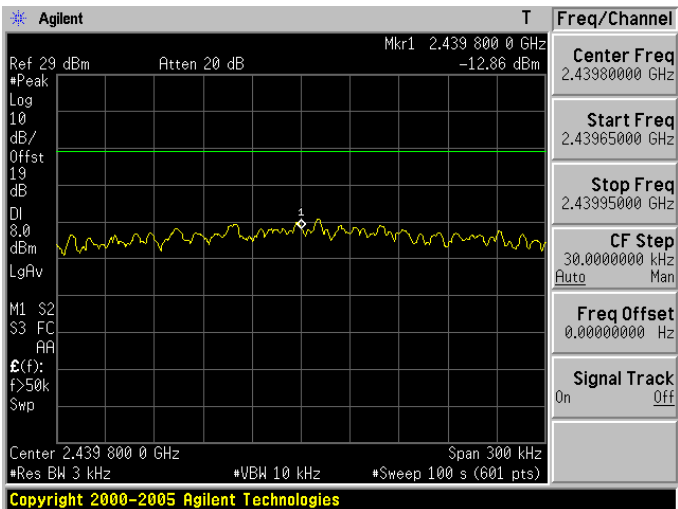




2462

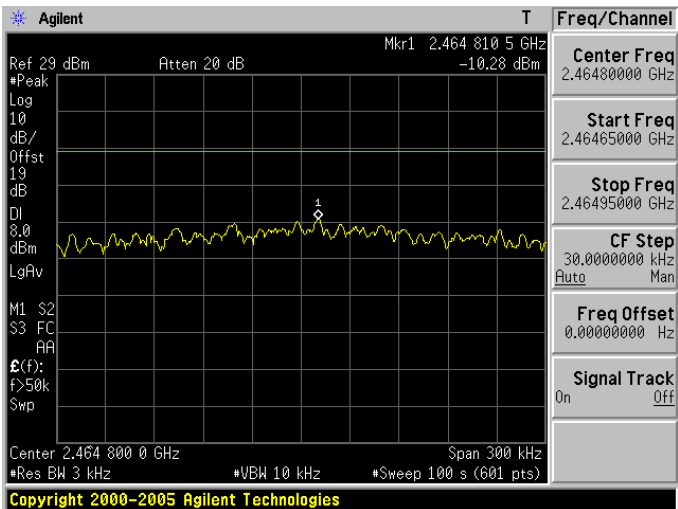

Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain B

<p>2412</p>	<p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.416 380 7 GHz -8.41 dBm</p> <p>Center 2.416 366 7 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p><b>Freq/Channel</b></p> <p>Center Freq 2.41636667 GHz</p> <p>Start Freq 2.41621667 GHz</p> <p>Stop Freq 2.41651667 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2437</p>	<p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.439 475 2 GHz -8.35 dBm</p> <p>Center 2.439 466 7 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p><b>Freq/Channel</b></p> <p>Center Freq 2.43946667 GHz</p> <p>Start Freq 2.43931667 GHz</p> <p>Stop Freq 2.43961667 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>2462</p>	<p>Agilent T</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.460 426 3 GHz -8.54 dBm</p> <p>Center 2.460 433 3 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p> <p><b>Freq/Channel</b></p> <p>Center Freq 2.46043333 GHz</p> <p>Start Freq 2.46028333 GHz</p> <p>Stop Freq 2.46058333 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain A + Chain B

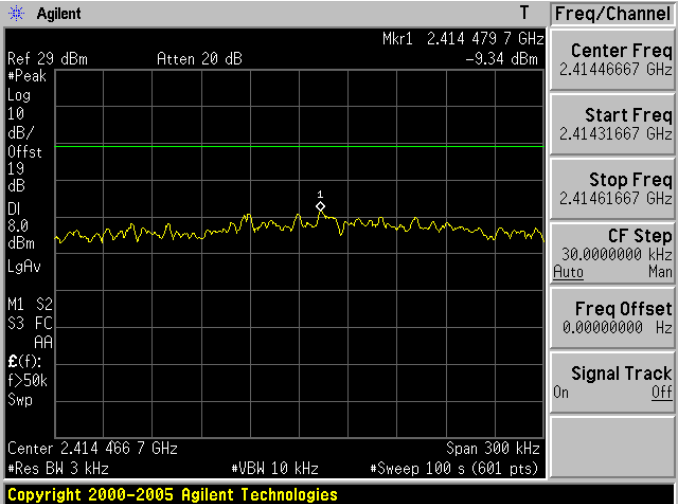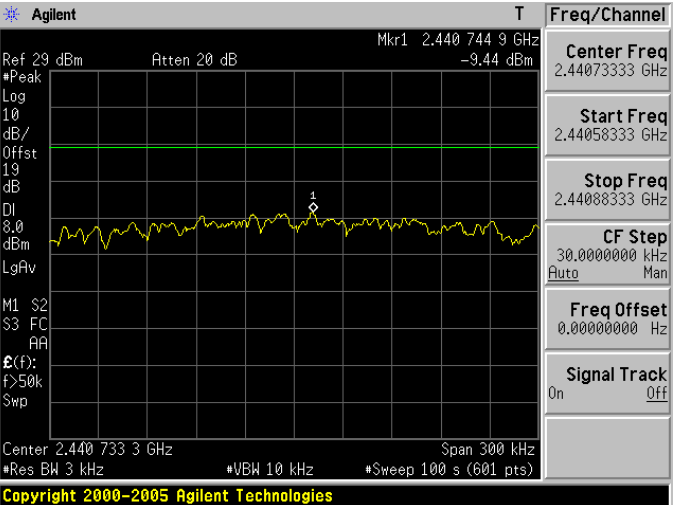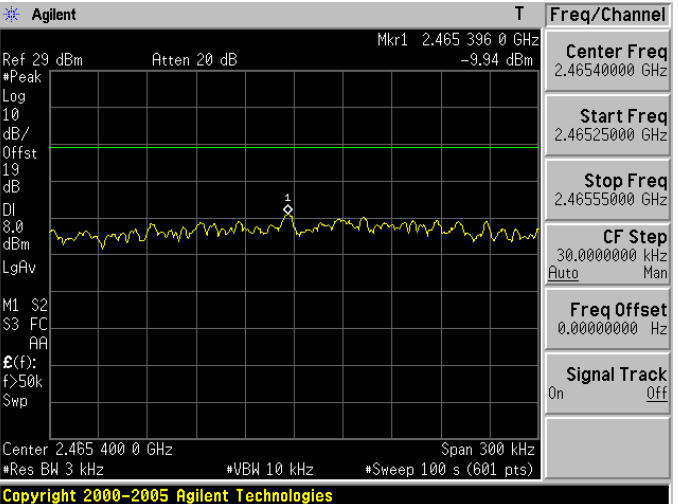2412	 <p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.414 479 7 GHz -9.34 dBm</p> <p>Center Freq 2.41446667 GHz</p> <p>Start Freq 2.41431667 GHz</p> <p>Stop Freq 2.41461667 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.414 466 7 GHz Span 300 kHz</p> <p>*Res BW 3 kHz *VBW 10 kHz *Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.440 744 9 GHz -9.44 dBm</p> <p>Center Freq 2.44073333 GHz</p> <p>Start Freq 2.44058333 GHz</p> <p>Stop Freq 2.44088333 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.440 733 3 GHz Span 300 kHz</p> <p>*Res BW 3 kHz *VBW 10 kHz *Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.465 396 0 GHz -9.94 dBm</p> <p>Center Freq 2.46540000 GHz</p> <p>Start Freq 2.46525000 GHz</p> <p>Stop Freq 2.46555000 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.465 400 0 GHz Span 300 kHz</p> <p>*Res BW 3 kHz *VBW 10 kHz *Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain A

2422	<p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.431 941 2 GHz -14.40 dBm</p> <p>Center Freq 2.43191667 GHz</p> <p>Start Freq 2.43176667 GHz</p> <p>Stop Freq 2.43206667 GHz</p> <p>CF Step 30.0000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.431 916 7 GHz Span 300 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	<p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.436 949 3 GHz -13.34 dBm</p> <p>Center Freq 2.43691667 GHz</p> <p>Start Freq 2.43676667 GHz</p> <p>Stop Freq 2.43706667 GHz</p> <p>CF Step 30.0000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.436 916 7 GHz Span 300 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2452	<p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.444 784 4 GHz -14.18 dBm</p> <p>Center Freq 2.44480000 GHz</p> <p>Start Freq 2.44465000 GHz</p> <p>Stop Freq 2.44495000 GHz</p> <p>CF Step 30.0000000 kHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.444 800 0 GHz Span 300 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain B

<p>2422</p>	<p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.417 621 5 GHz -11.46 dBm</p> <p>Center Freq 2.41758333 GHz</p> <p>Start Freq 2.41743333 GHz</p> <p>Stop Freq 2.41773333 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.417 583 3 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>2437</p>	<p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.429 441 2 GHz -10.38 dBm</p> <p>Center Freq 2.42941667 GHz</p> <p>Start Freq 2.42926667 GHz</p> <p>Stop Freq 2.42956667 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.429 416 7 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>2452</p>	<p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.449 441 7 GHz -10.63 dBm</p> <p>Center Freq 2.44941667 GHz</p> <p>Start Freq 2.44926667 GHz</p> <p>Stop Freq 2.44956667 GHz</p> <p>CF Step 30.0000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.449 416 7 GHz Span 300 kHz #Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>



Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain A + Chain B


<p>2422</p>	<p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.4306963 GHz -11.84 dBm</p> <p>Center Freq 2.4306667 GHz</p> <p>Start Freq 2.43051667 GHz</p> <p>Stop Freq 2.43081667 GHz</p> <p>CF Step 30.0000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.4306667 GHz Span 300 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>2437</p>	<p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.4432940 GHz -11.79 dBm</p> <p>Center Freq 2.4433000 GHz</p> <p>Start Freq 2.44315000 GHz</p> <p>Stop Freq 2.44345000 GHz</p> <p>CF Step 30.0000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.4433000 GHz Span 300 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>
<p>2452</p>	<p>Agilent T Freq/Channel</p> <p>Ref 29 dBm Atten 20 dB Mkr1 2.4548117 GHz -12.25 dBm</p> <p>Center Freq 2.4548333 GHz</p> <p>Start Freq 2.45468333 GHz</p> <p>Stop Freq 2.45498333 GHz</p> <p>CF Step 30.0000000 kHz</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Center 2.4548333 GHz Span 300 kHz</p> <p>#Res BW 3 kHz #VBW 10 kHz #Sweep 100 s (601 pts)</p> <p>Copyright 2000-2005 Agilent Technologies</p>

## 9 Out of Band Conducted Emissions Measurement

### 9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### 9.2. Test Setup

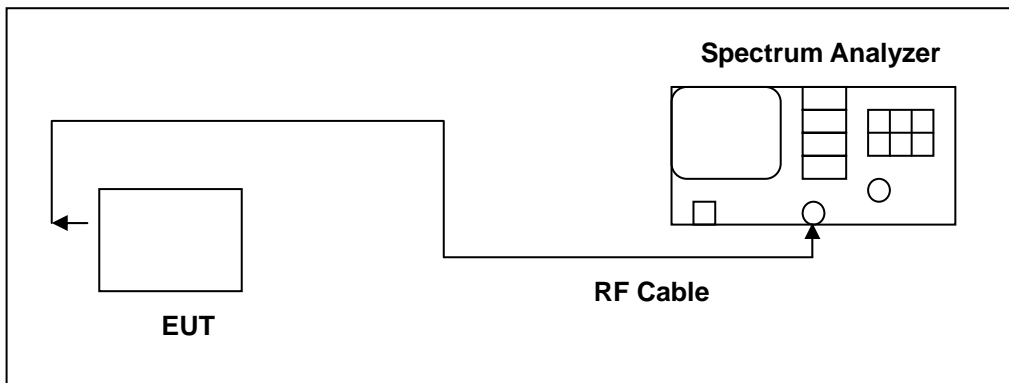

### 9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.


All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 1, 6, 11)

**9.5. Test Graphs**


Mode 2: IEEE 802.11b Link Mode _ Chain A	
2412	<p>Agilent R T            Ref 27.5 dBm Atten 20 dB Mkr1 2.41 GHz 0.005 dBm            Peak Log            dB/ Offst 17.5 dB            DI -20.0 dBm            V1 S2            S3 FC            AA            Start 30 MHz Stop 26.5 GHz            #Res BW 100 kHz #VBW 100 kHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel            Center Freq 13.2650000 GHz            Start Freq 30.0000000 MHz            Stop Freq 26.5000000 GHz            CF Step 2.64700000 GHz Auto Man            Freq Offset 0.00000000 Hz            Signal Track On Off</p>
2437	<p>Agilent R T            Ref 27.5 dBm Atten 20 dB Mkr1 2.44 GHz 0.068 dBm            Peak Log            dB/ Offst 17.5 dB            DI -20.1 dBm            V1 S2            S3 FC            AA            Start 30 MHz Stop 26.5 GHz            #Res BW 100 kHz #VBW 100 kHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel            Center Freq 13.2650000 GHz            Start Freq 30.0000000 MHz            Stop Freq 26.5000000 GHz            CF Step 2.64700000 GHz Auto Man            Freq Offset 0.00000000 Hz            Signal Track On Off</p>
2462	<p>Agilent R T            Ref 27.5 dBm Atten 20 dB Mkr1 2.46 GHz 0.214 dBm            Peak Log            dB/ Offst 17.5 dB            DI -19.8 dBm            V1 S2            S3 FC            AA            Start 30 MHz Stop 26.5 GHz            #Res BW 100 kHz #VBW 100 kHz Sweep 3.41 s (401 pts)</p> <p>Freq/Channel            Center Freq 13.2650000 GHz            Start Freq 30.0000000 MHz            Stop Freq 26.5000000 GHz            CF Step 2.64700000 GHz Auto Man            Freq Offset 0.00000000 Hz            Signal Track On Off</p>

Mode 2: IEEE 802.11b Link Mode \_ Chain B


2412

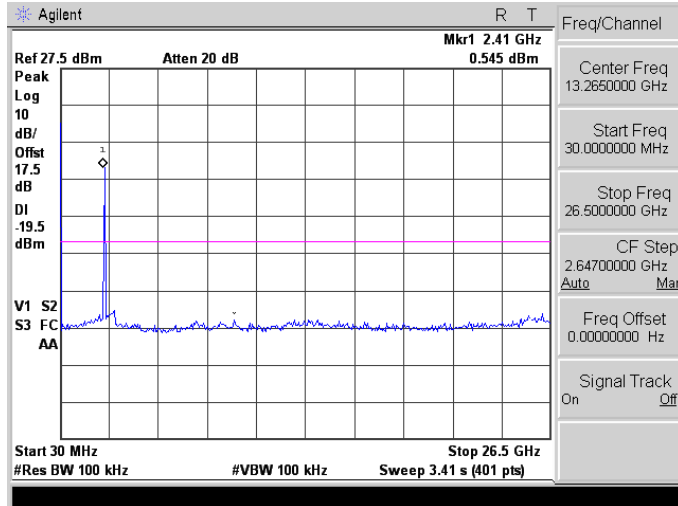




2437

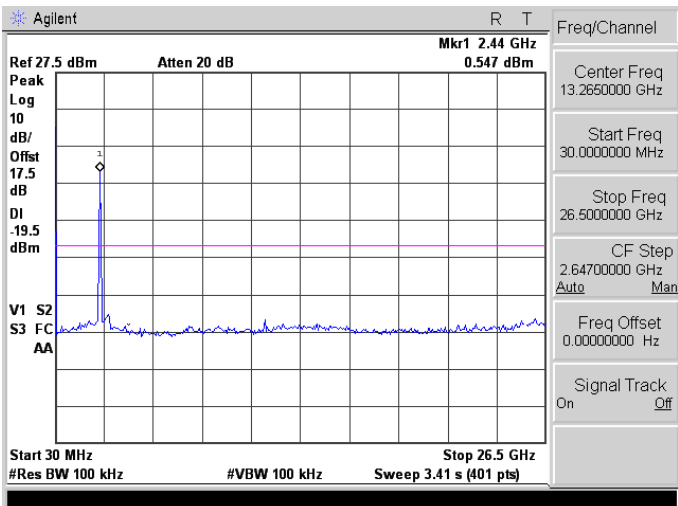




2462

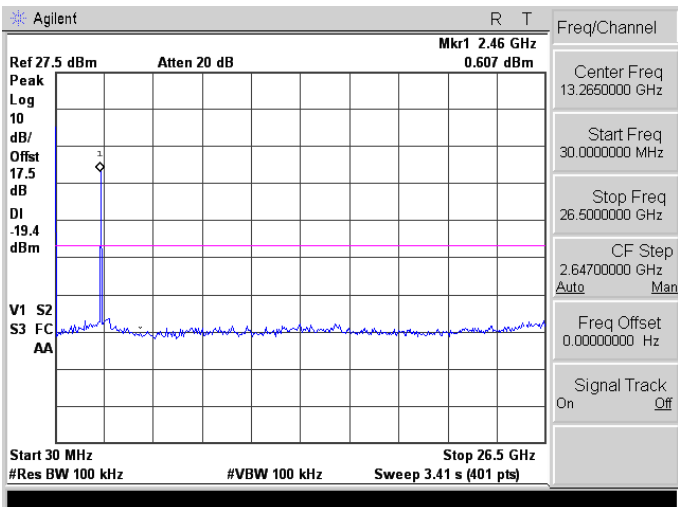

Mode 3: IEEE 802.11g Link Mode \_ Chain A

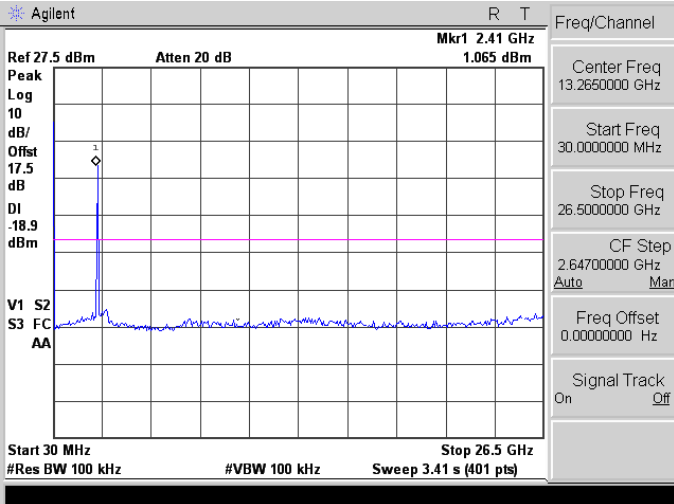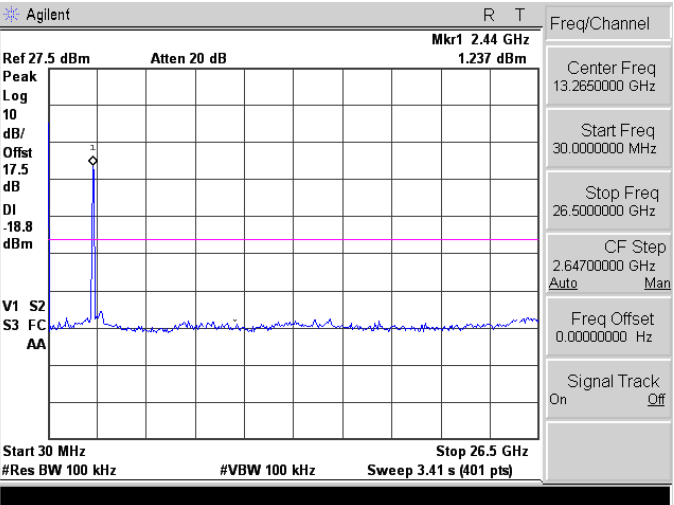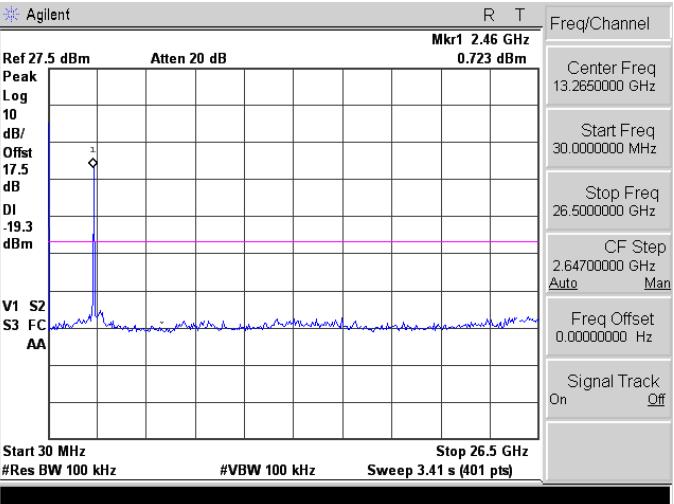
<p>2412</p>	
<p>2437</p>	
<p>2462</p>	

Mode 3: IEEE 802.11g Link Mode \_ Chain B

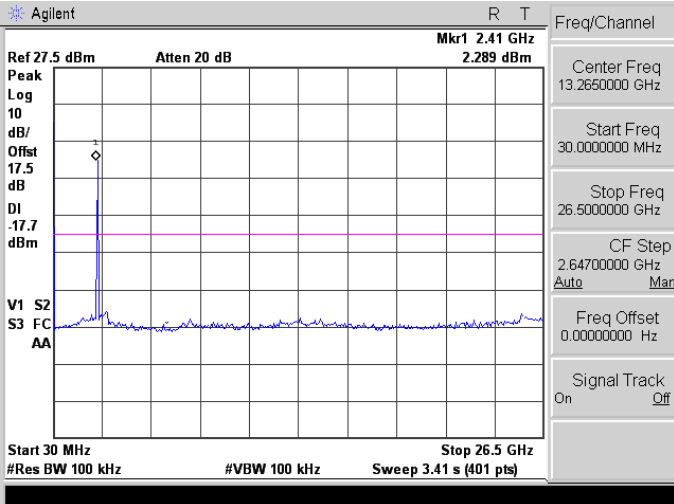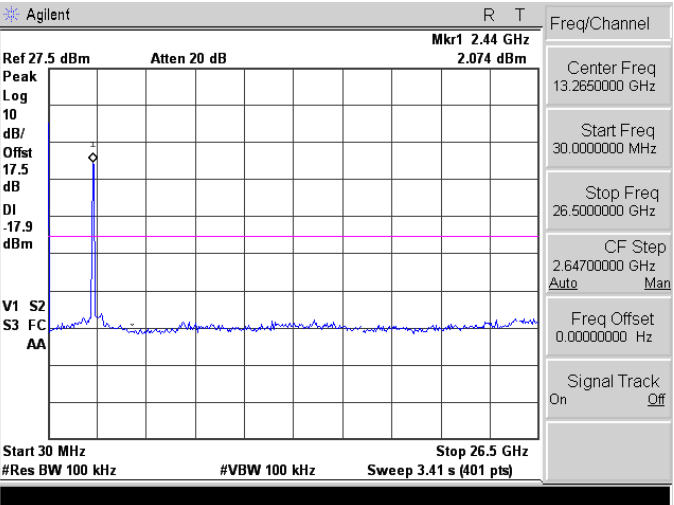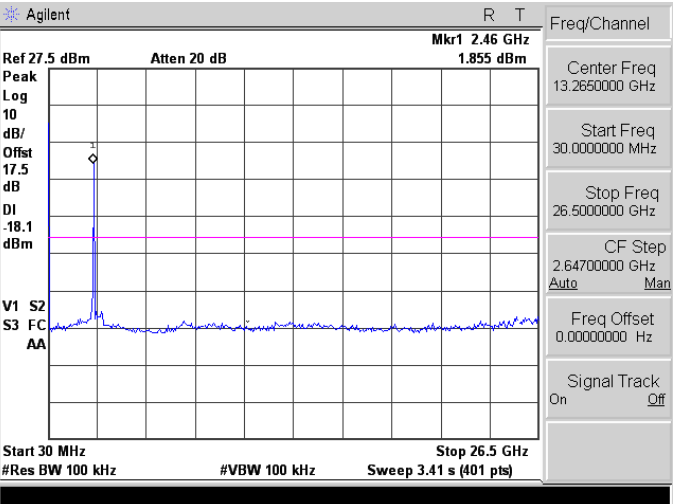
<p>2412</p>	
<p>2437</p>	
<p>2462</p>	

Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain A


2412

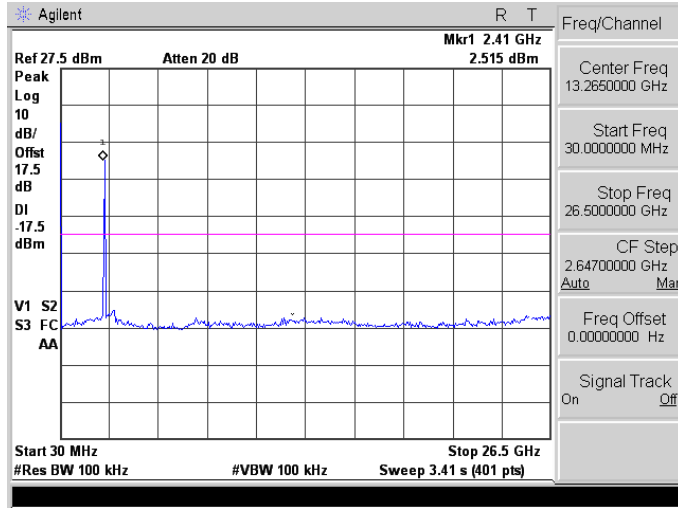

2437

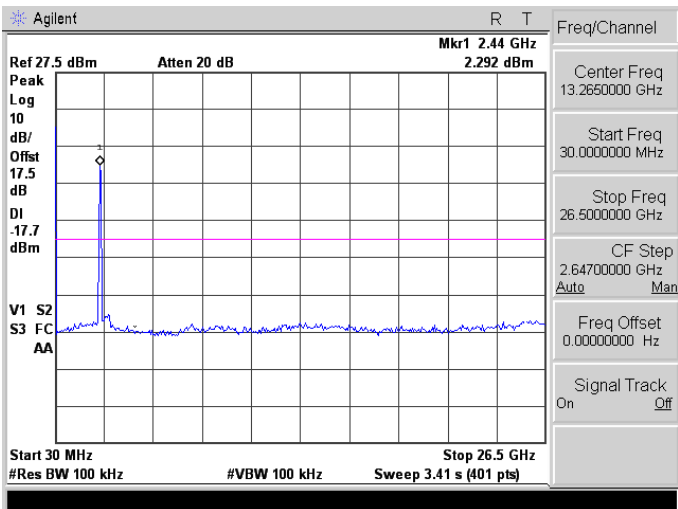


2462

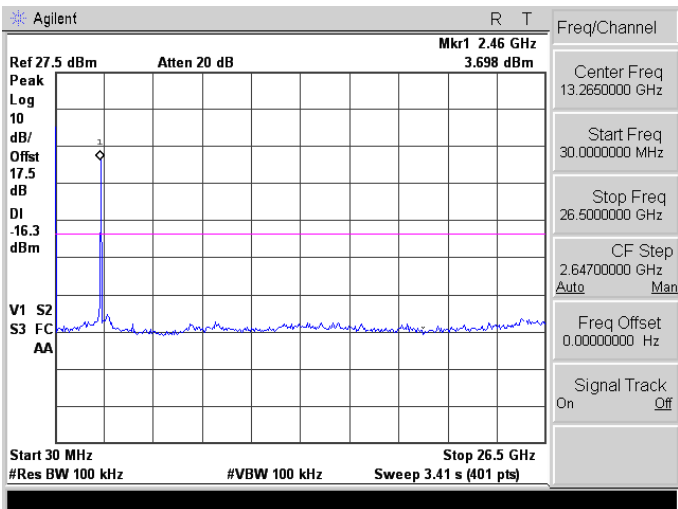


Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain B


2412

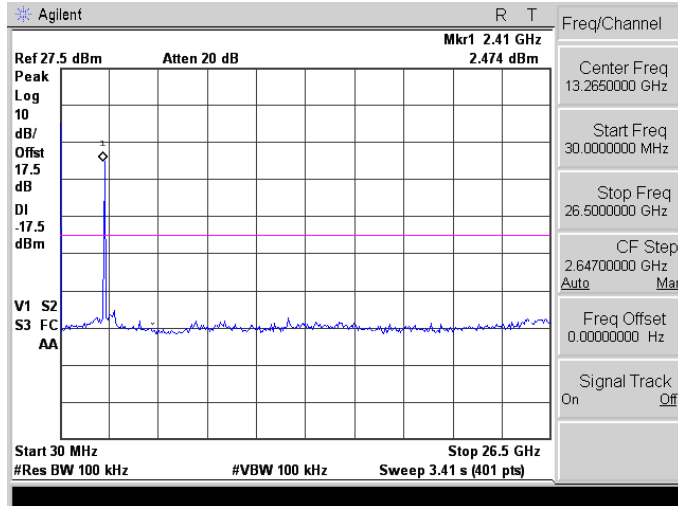

2437

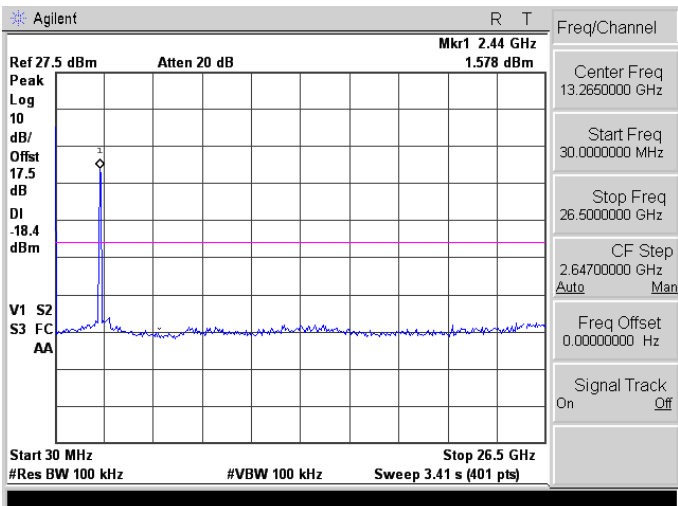


2462

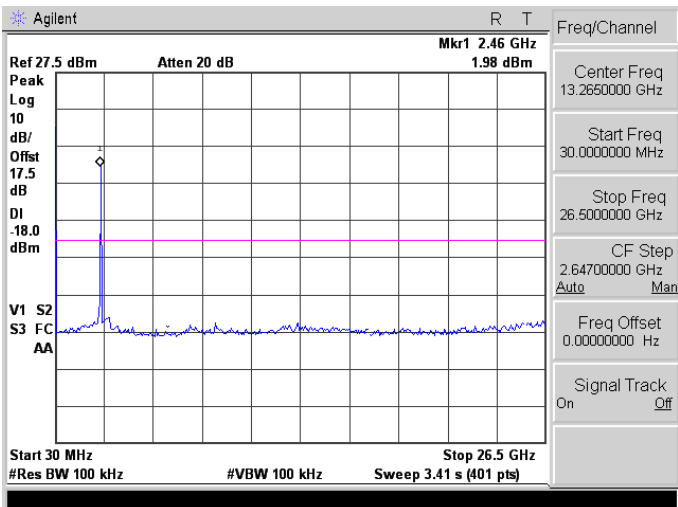




Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain A + Chain B


2412

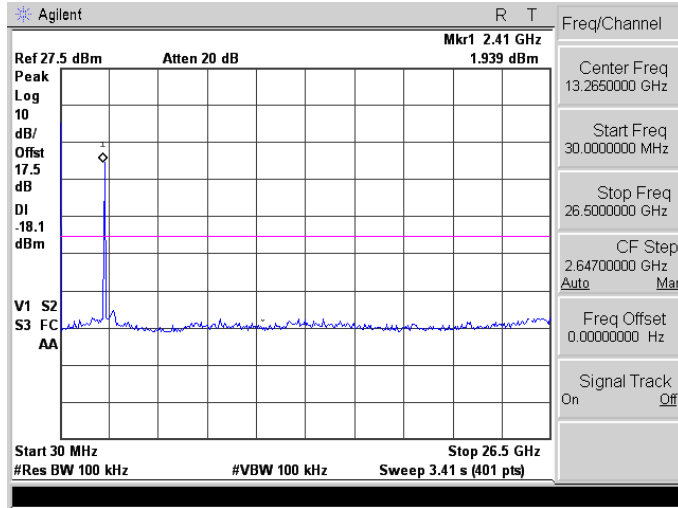

2437

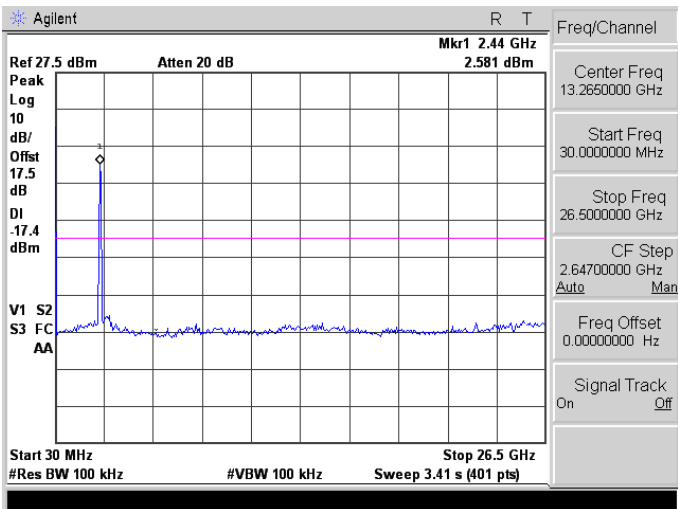


2462

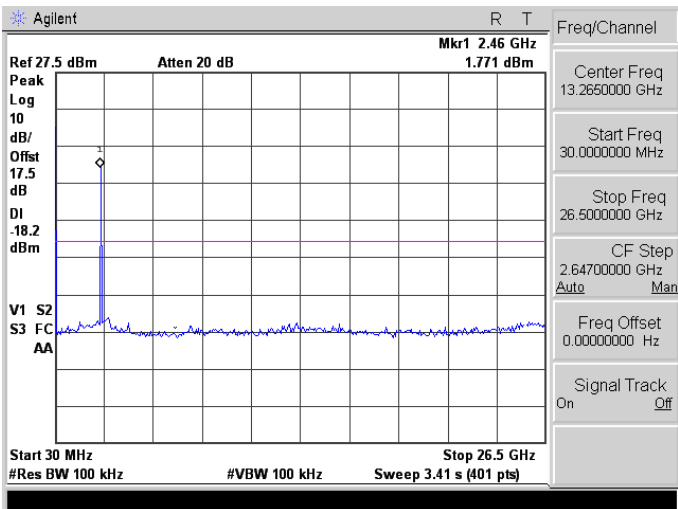


Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain A


2422

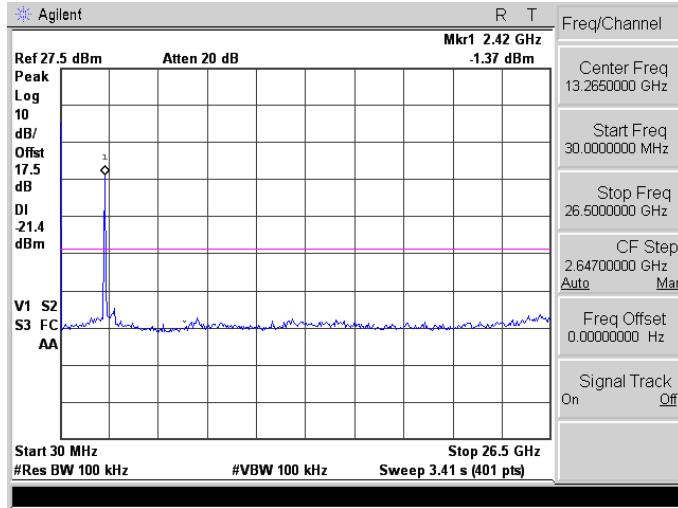

2437

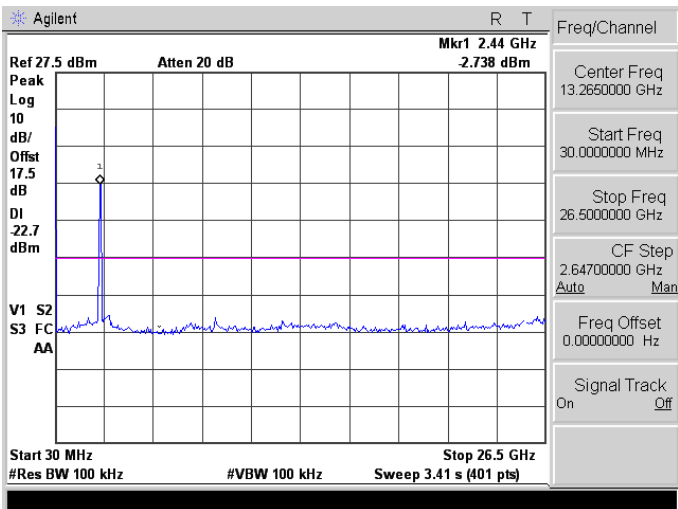


2452

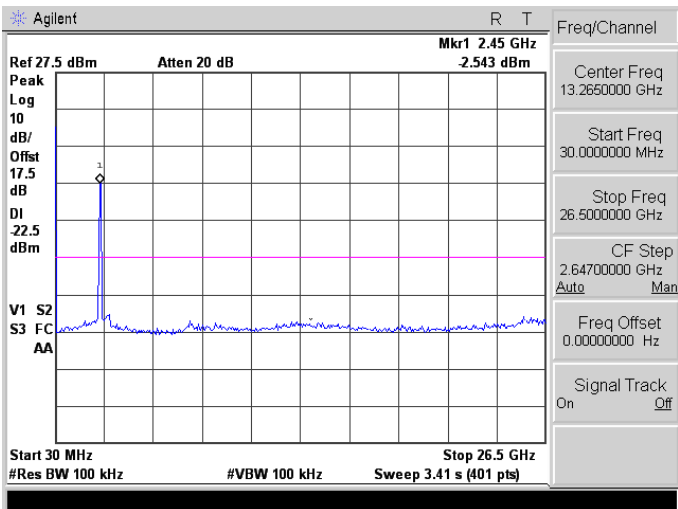


Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain B


2422

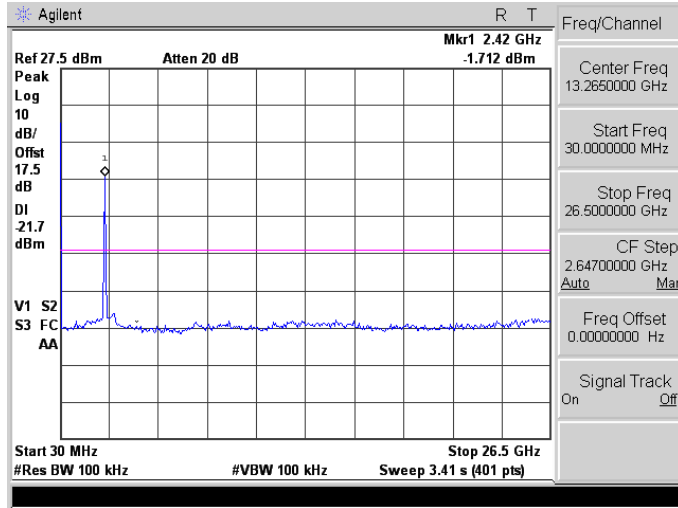

2437

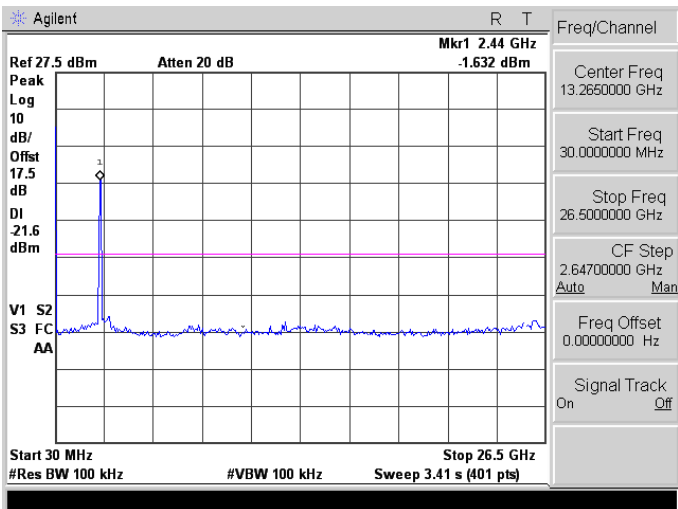

2452

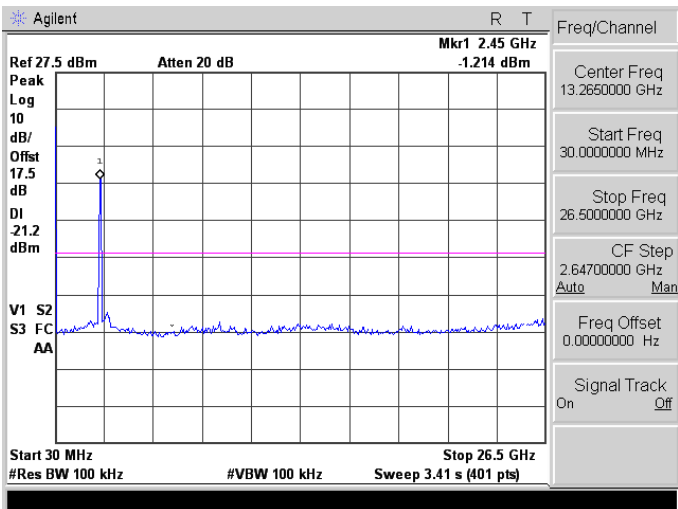

Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain A + Chain B


<p>2422</p>	
<p>2437</p>	
<p>2452</p>	

## 10 Band Edges Measurement

### 10.1.Limit

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### 10.2.Test Setup

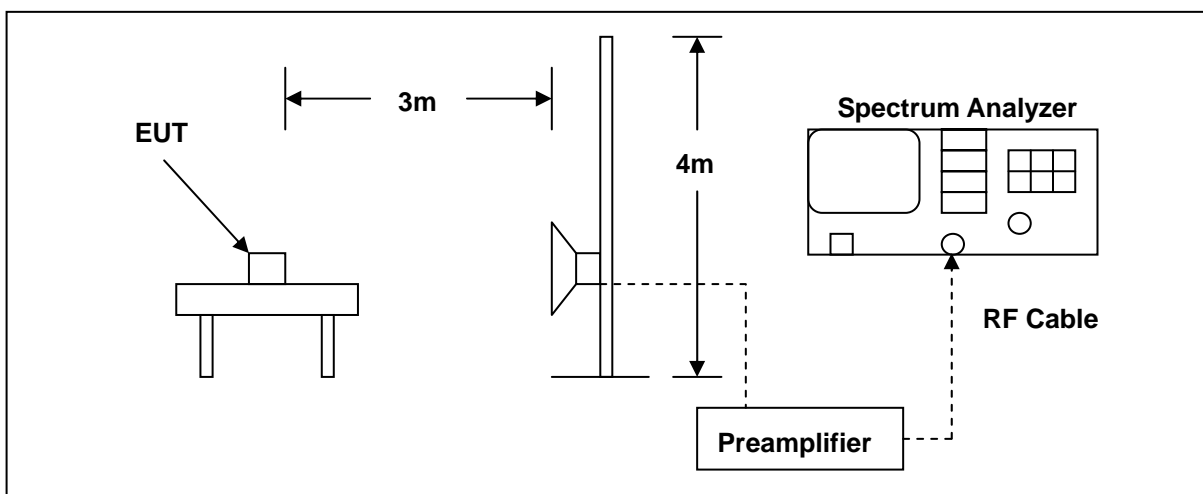

### 10.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/07/2011	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/23/2011	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/29/2011	(1)
Test Site	ATL	TE01	888001	12/24/2010	(1)

Remark: <sup>(1)</sup> Calibration period 1 year. <sup>(2)</sup> Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

#### **10.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.


The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


**10.5.Test Result**

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	08/02/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

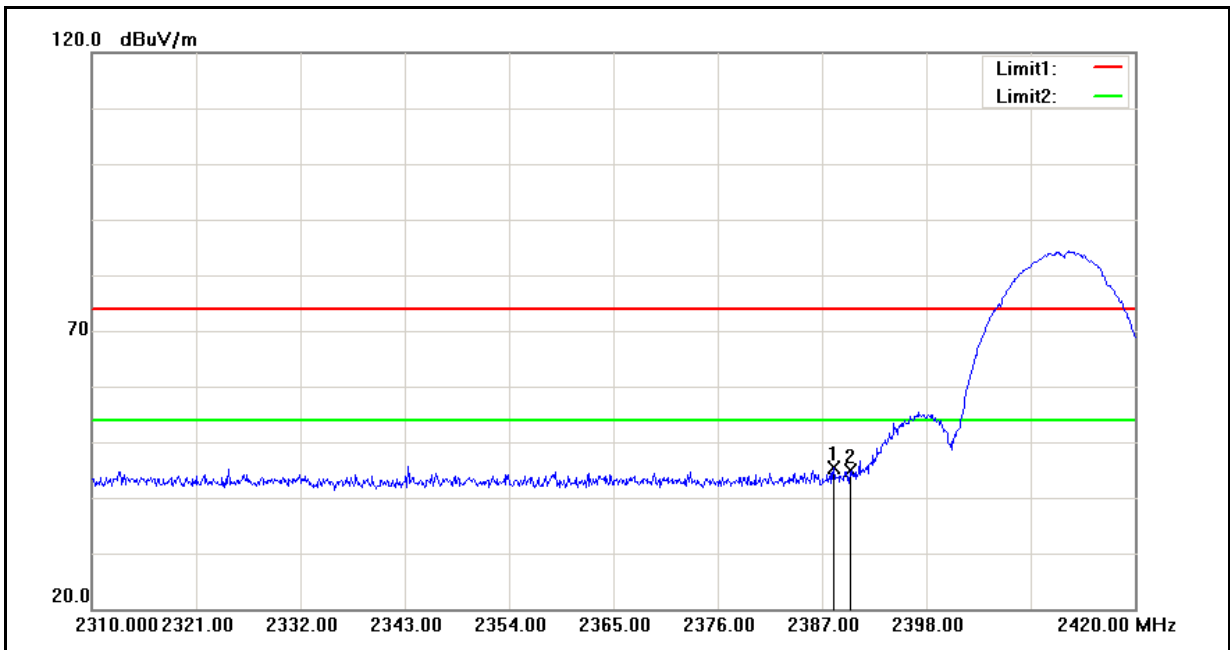

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.210	63.26	-17.78	45.48	74.00	-28.52	peak
2	2390.000	62.76	-17.78	44.98	74.00	-29.02	peak


Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	08/02/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

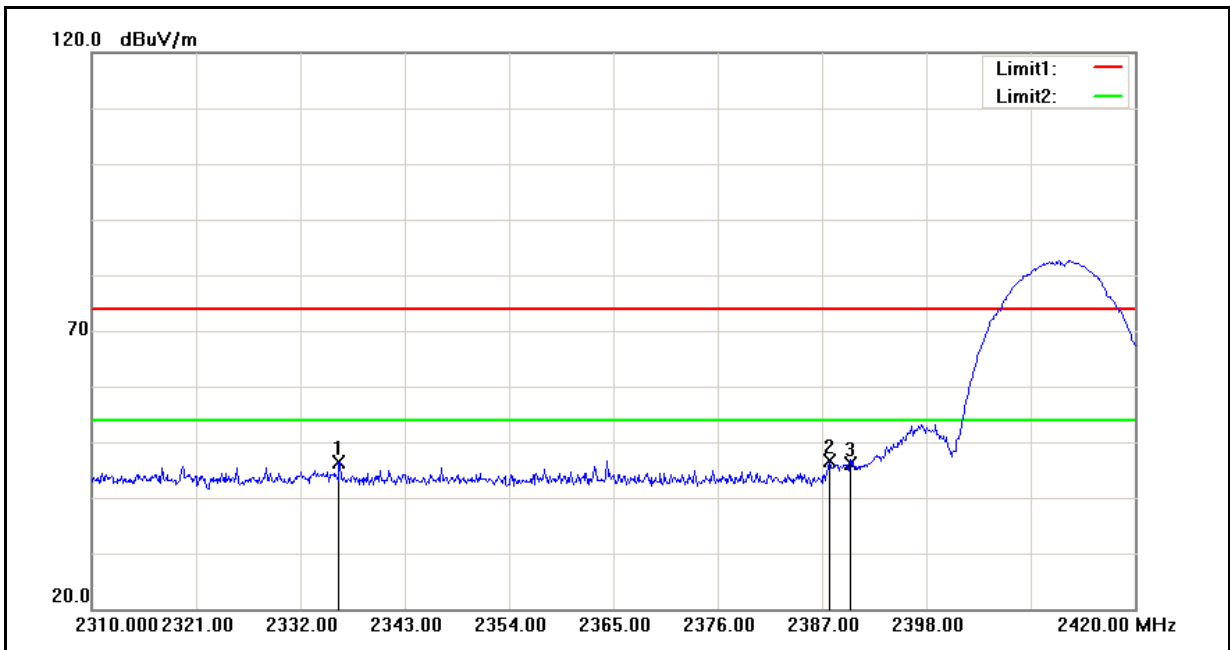

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2336.070	64.15	-17.86	46.29	74.00	-27.71	peak
2	2387.770	64.36	-17.78	46.58	74.00	-27.42	peak
3	2390.000	64.03	-17.78	46.25	74.00	-27.75	peak




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	08/02/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

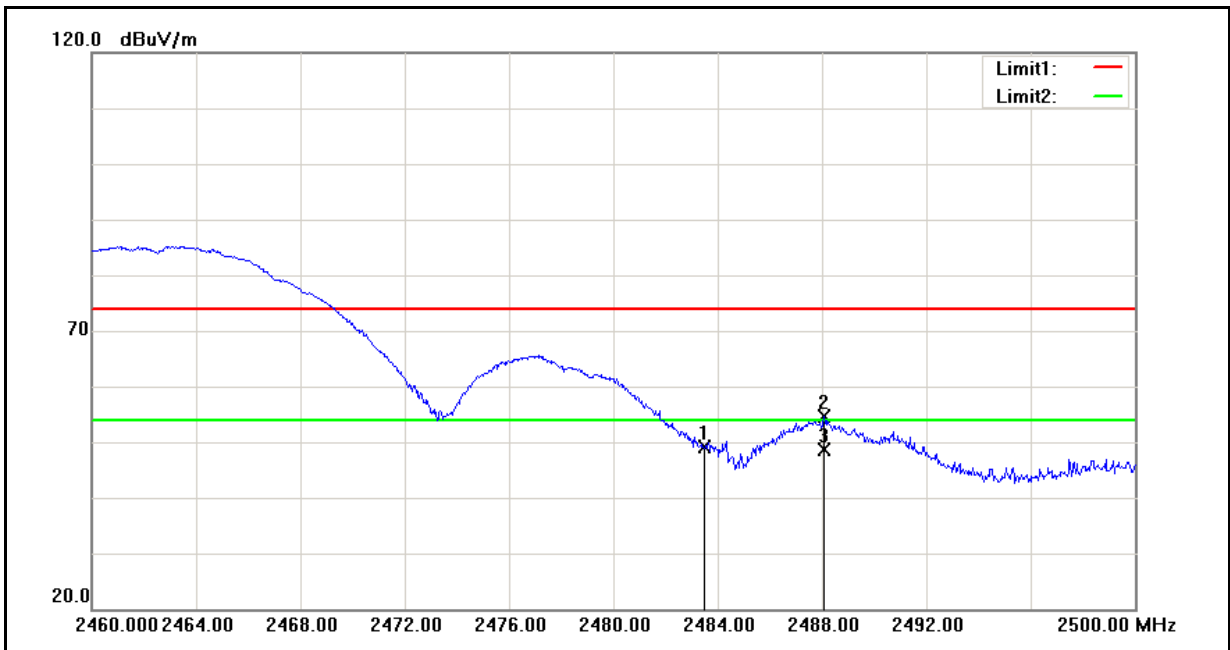


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	66.82	-17.65	49.17	74.00	-24.83	peak
2	2488.080	72.39	-17.65	54.74	74.00	-19.26	peak
3	2488.080	66.30	-17.65	48.65	54.00	-5.35	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	08/02/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

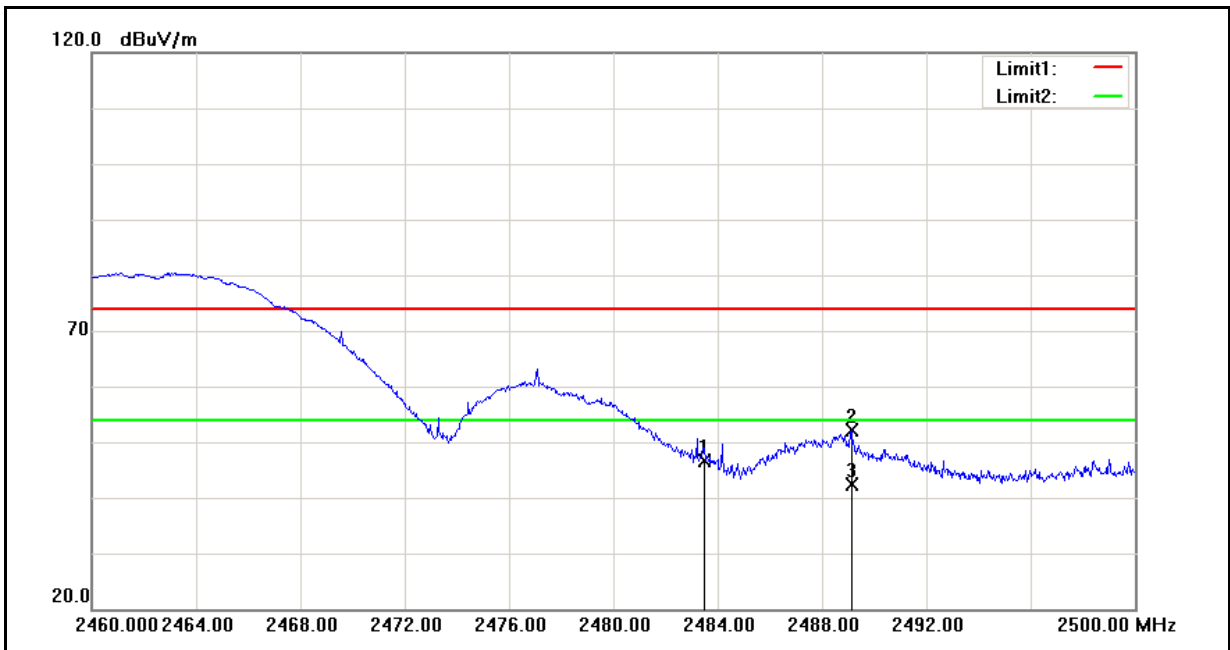


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	64.28	-17.65	46.63	74.00	-27.37	peak
2	2489.120	69.76	-17.65	52.11	74.00	-21.89	peak
3	2489.120	59.96	-17.65	42.31	54.00	-11.69	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	08/02/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

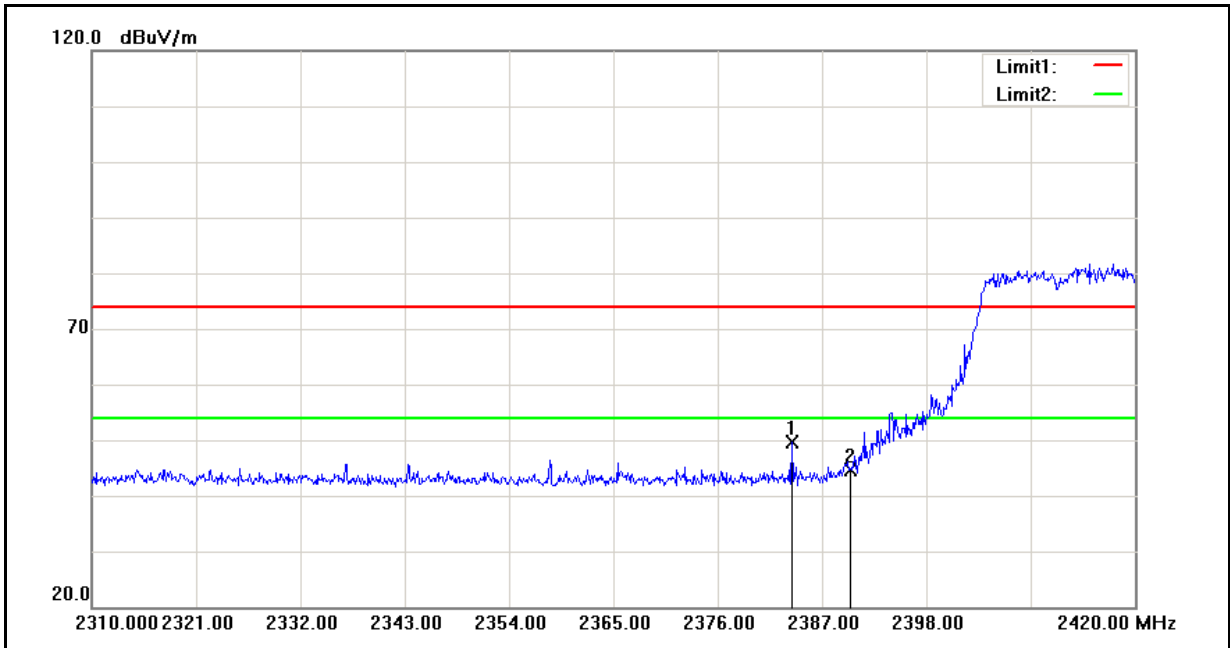


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.810	67.46	-17.79	49.67	74.00	-24.33	peak
2	2390.000	62.32	-17.78	44.54	74.00	-29.46	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	08/02/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

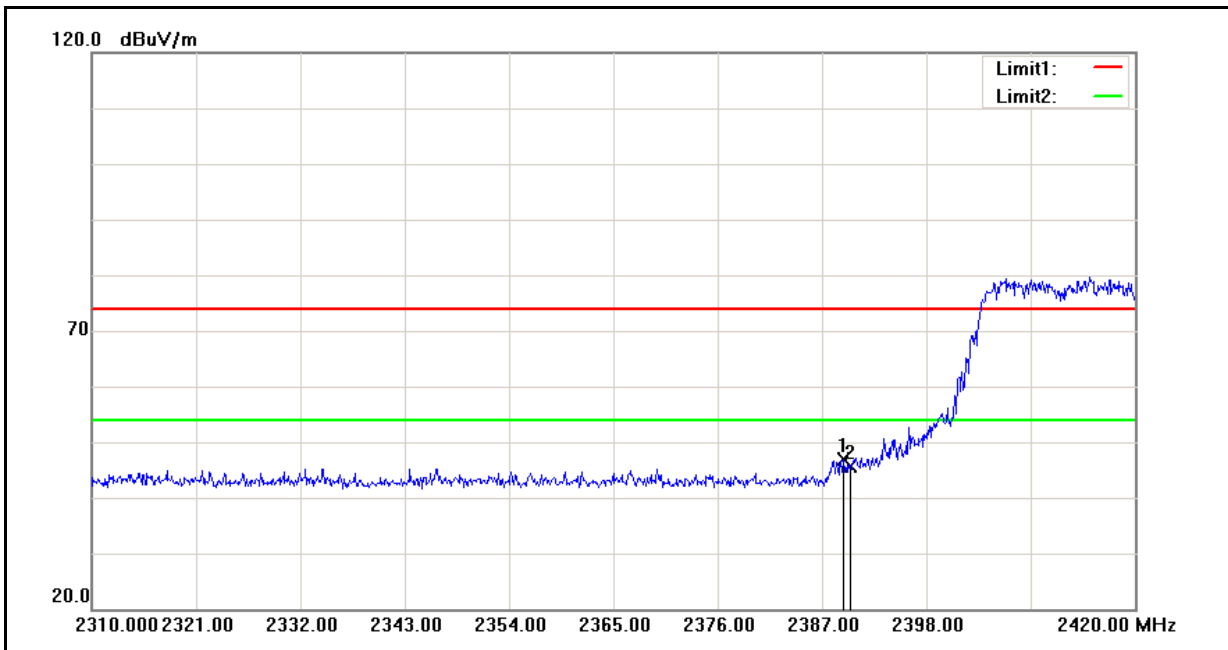


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.310	64.68	-17.78	46.90	74.00	-27.10	peak
2	2390.000	63.52	-17.78	45.74	74.00	-28.26	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	08/02/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

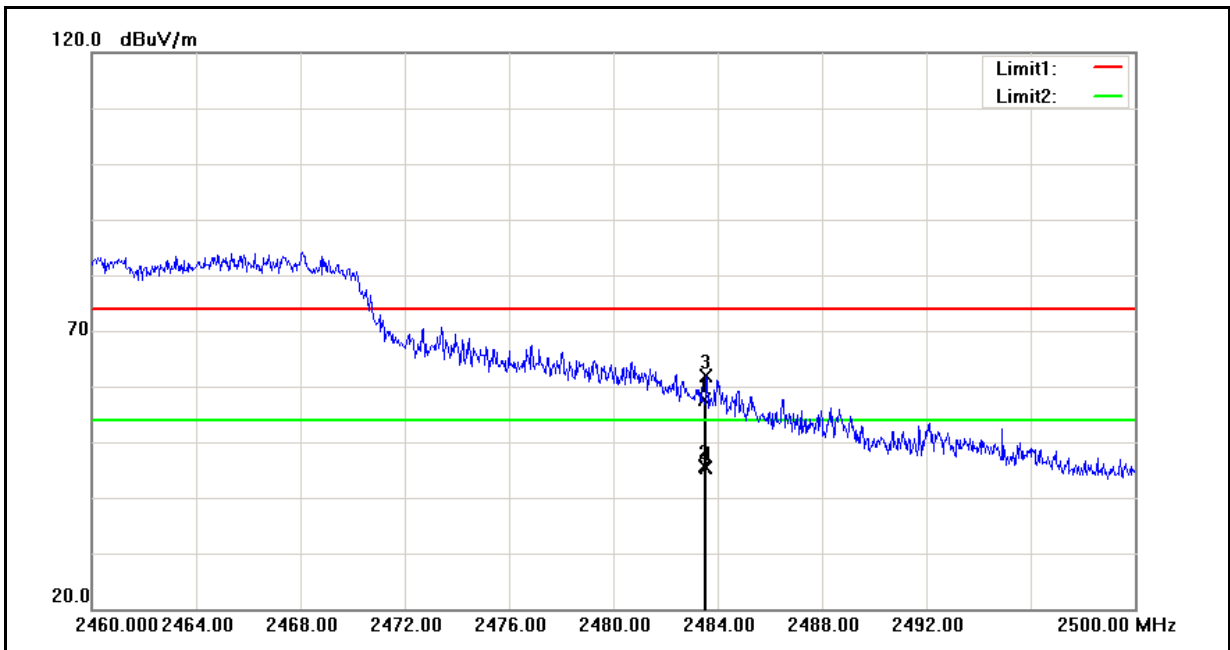


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	75.16	-17.65	57.51	74.00	-16.49	peak
2	2483.500	63.20	-17.65	45.55	54.00	-8.45	AVG
3	2483.560	79.50	-17.65	61.85	74.00	-12.15	peak
4	2483.560	63.04	-17.65	45.39	54.00	-8.61	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	08/02/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

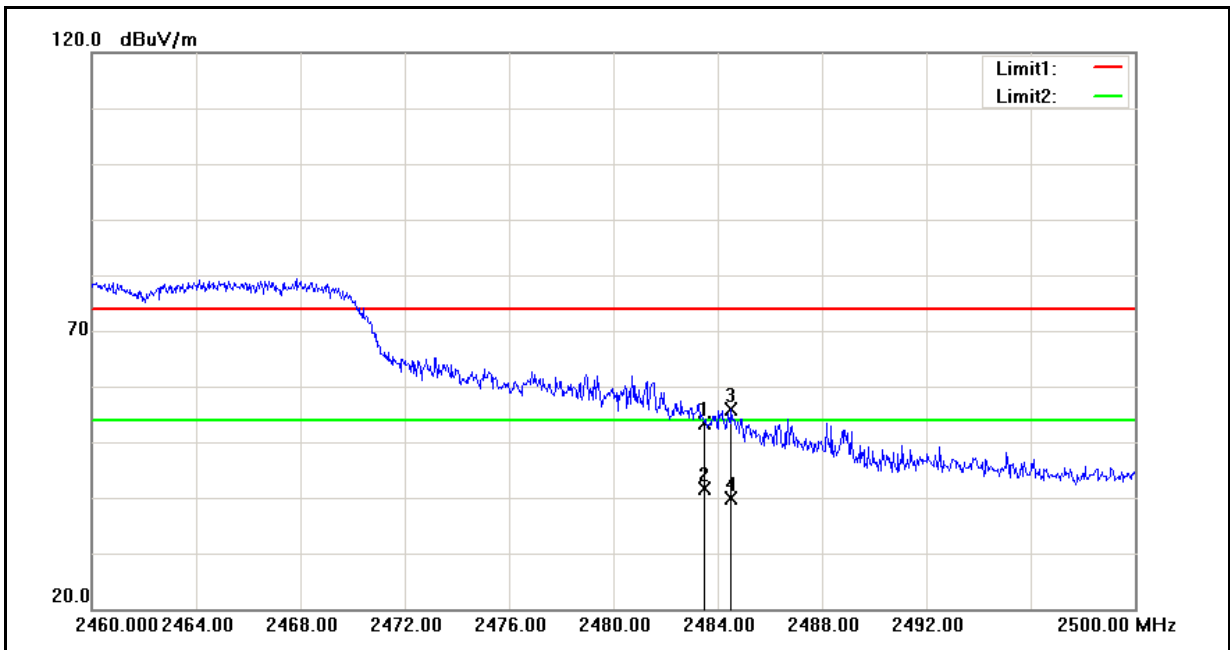


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	70.95	-17.65	53.30	74.00	-20.70	peak
2	2483.500	59.26	-17.65	41.61	54.00	-12.39	AVG
3	2484.520	73.45	-17.65	55.80	74.00	-18.20	peak
4	2484.520	57.61	-17.65	39.96	54.00	-14.04	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	08/02/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

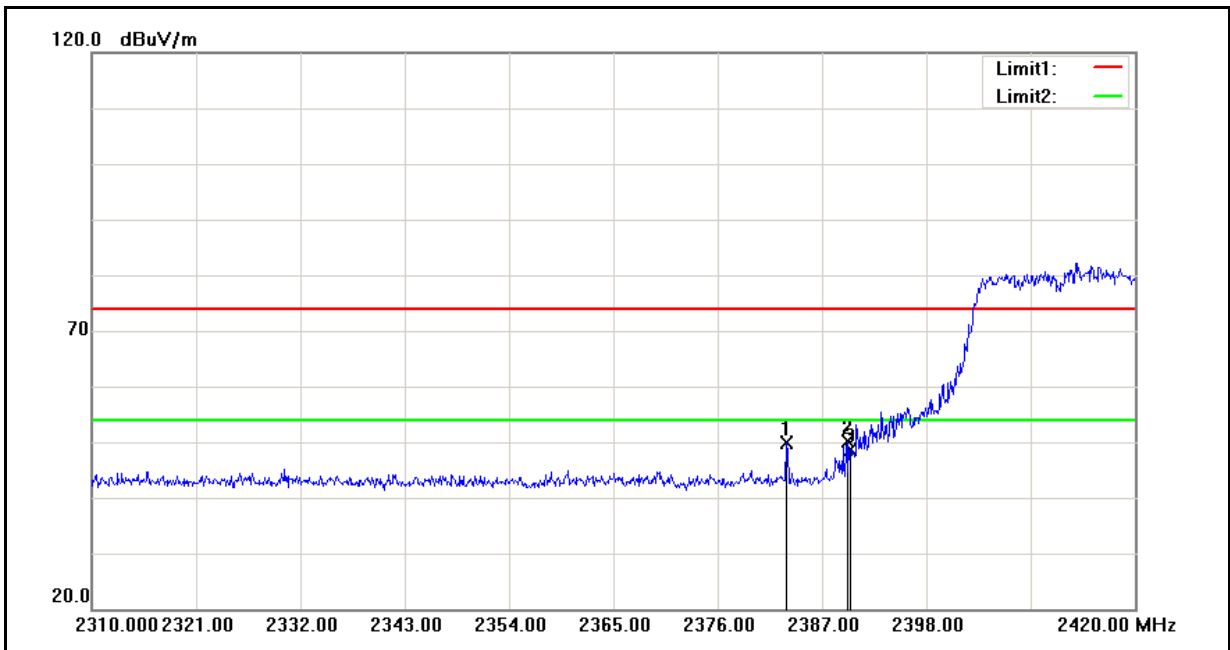

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.260	67.74	-17.79	49.95	74.00	-24.05	peak
2	2389.640	67.82	-17.78	50.04	74.00	-23.96	peak
3	2390.000	66.36	-17.78	48.58	74.00	-25.42	peak


Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	08/02/2011
Frequency:	2412 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

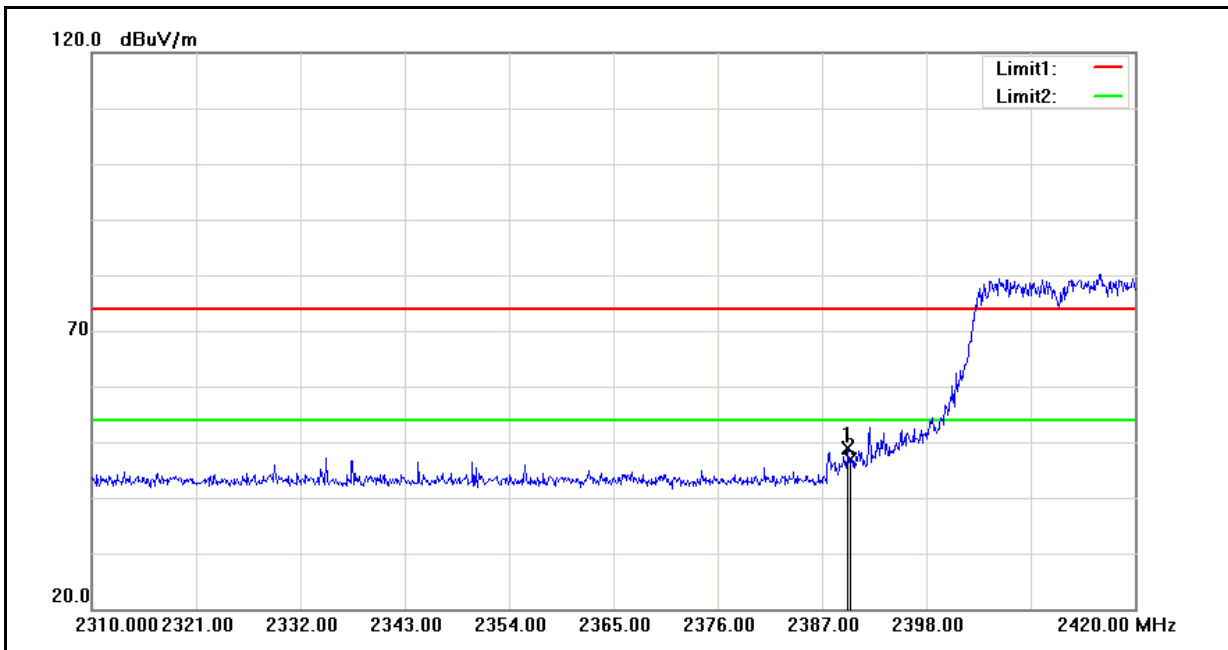

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.750	66.57	-17.78	48.79	74.00	-25.21	peak
2	2390.000	64.56	-17.78	46.78	74.00	-27.22	peak




Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	08/02/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

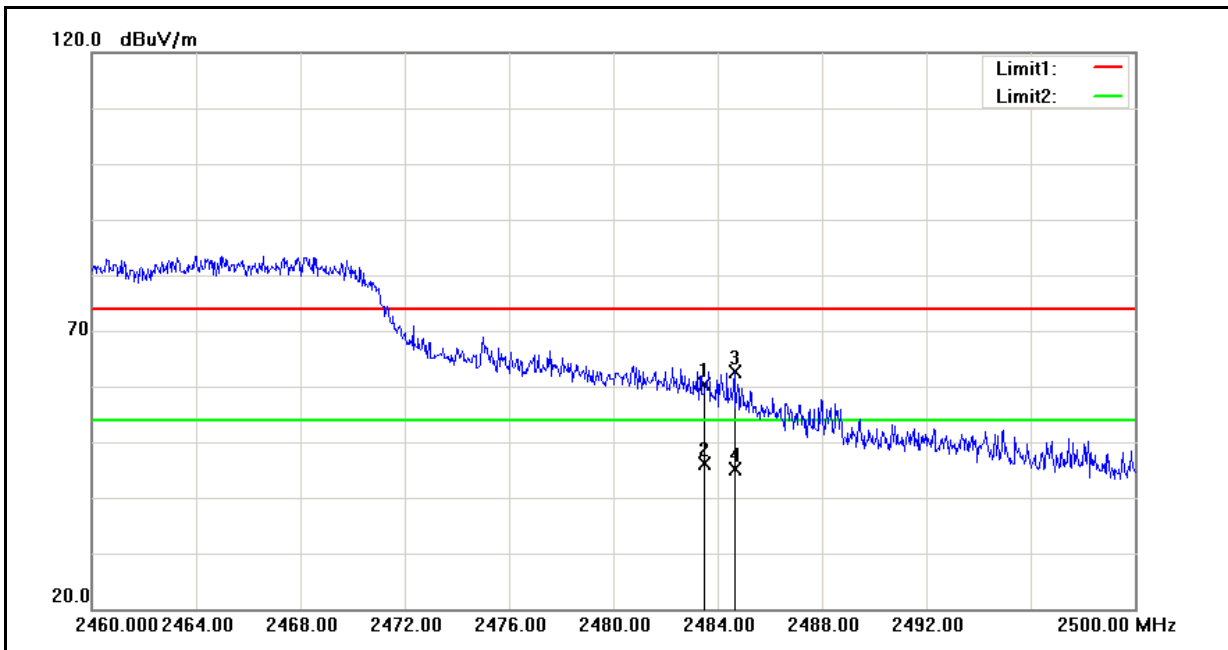


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	78.06	-17.65	60.41	74.00	-13.59	peak
2	2483.500	63.77	-17.65	46.12	54.00	-7.88	AVG
3	2484.640	80.34	-17.65	62.69	74.00	-11.31	peak
4	2484.640	62.66	-17.65	45.01	54.00	-8.99	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	08/02/2011
Frequency:	2462 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

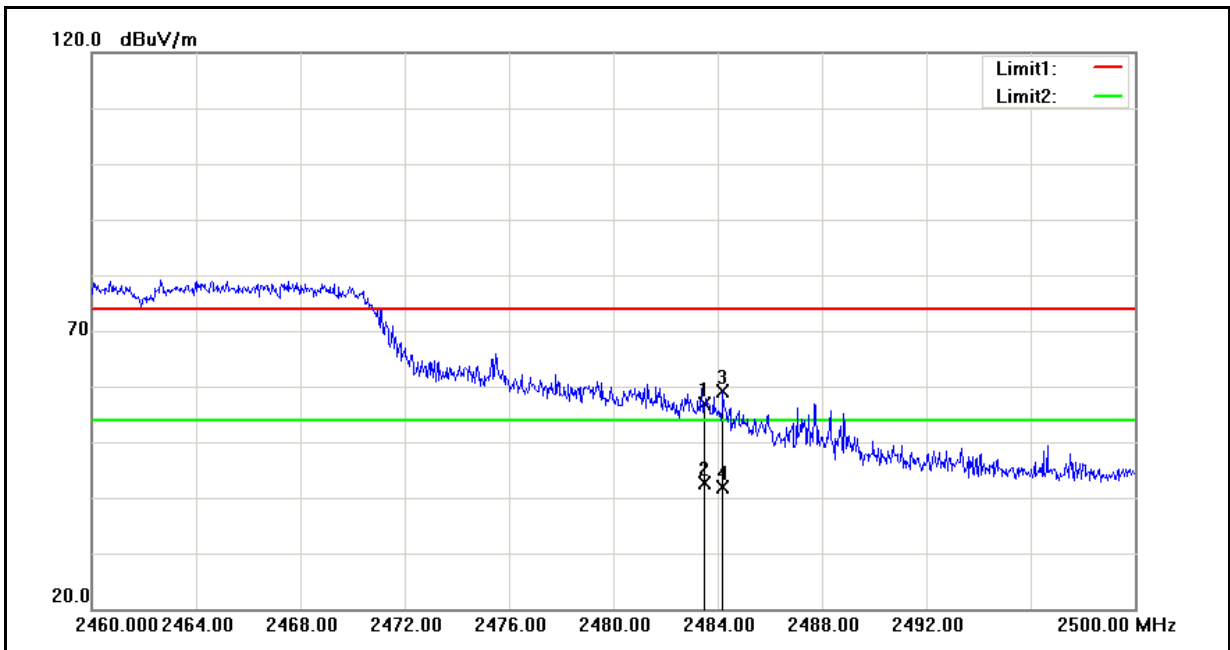


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	74.54	-17.65	56.89	74.00	-17.11	peak
2	2483.500	60.35	-17.65	42.70	54.00	-11.30	AVG
3	2484.200	76.73	-17.65	59.08	74.00	-14.92	peak
4	2484.200	59.44	-17.65	41.79	54.00	-12.21	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	08/02/2011
Frequency:	2422 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

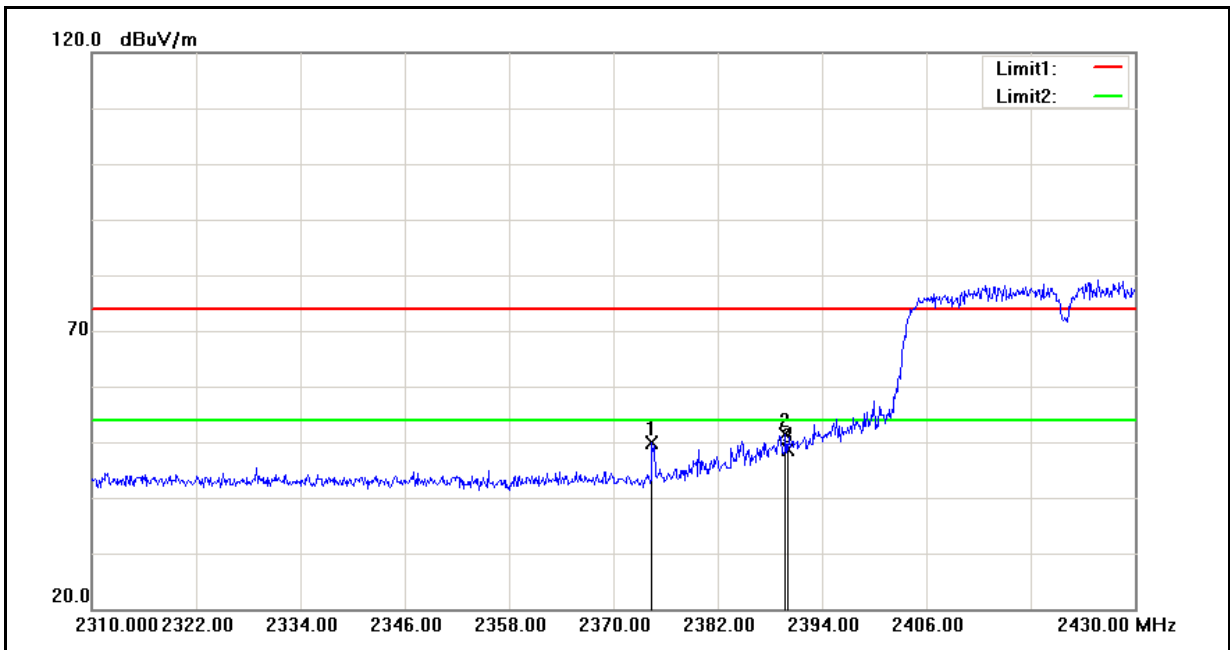


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2374.440	67.65	-17.80	49.85	74.00	-24.15	peak
2	2389.800	69.20	-17.78	51.42	74.00	-22.58	peak
3	2390.000	66.37	-17.78	48.59	74.00	-25.41	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	08/02/2011
Frequency:	2422 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

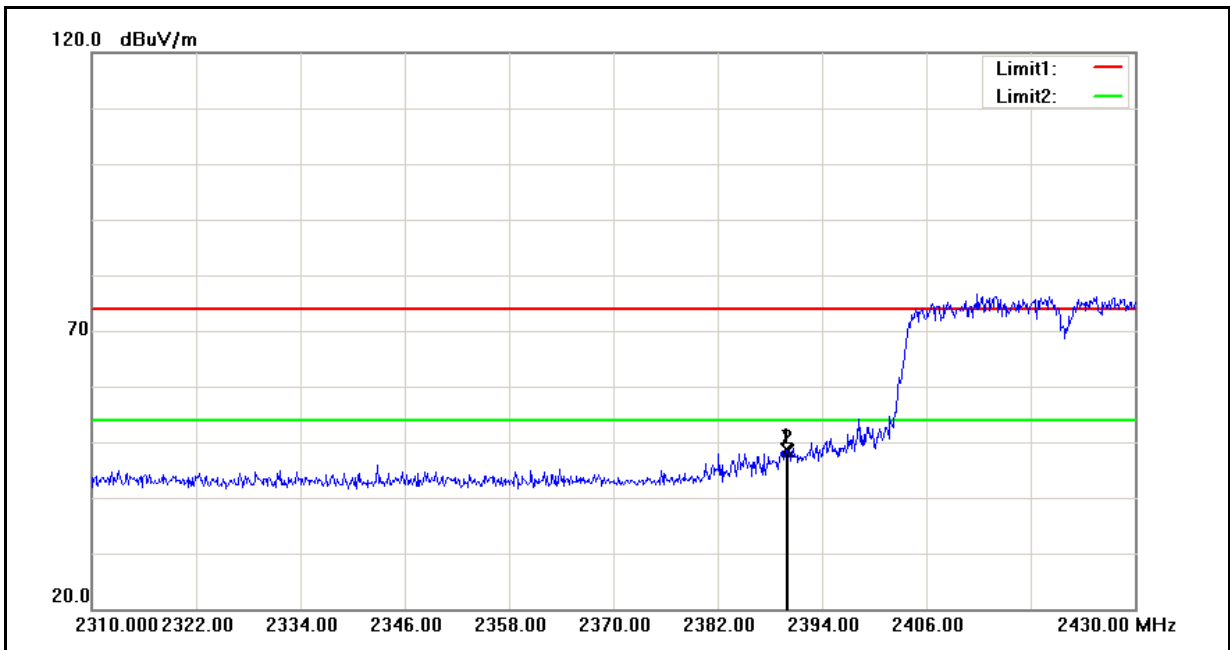


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.920	66.41	-17.78	48.63	74.00	-25.37	peak
2	2390.000	66.27	-17.78	48.49	74.00	-25.51	peak

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	08/02/2011
Frequency:	2452 MHz	Test By:	Gary Wu
Ant.Polar.:	Horizontal		

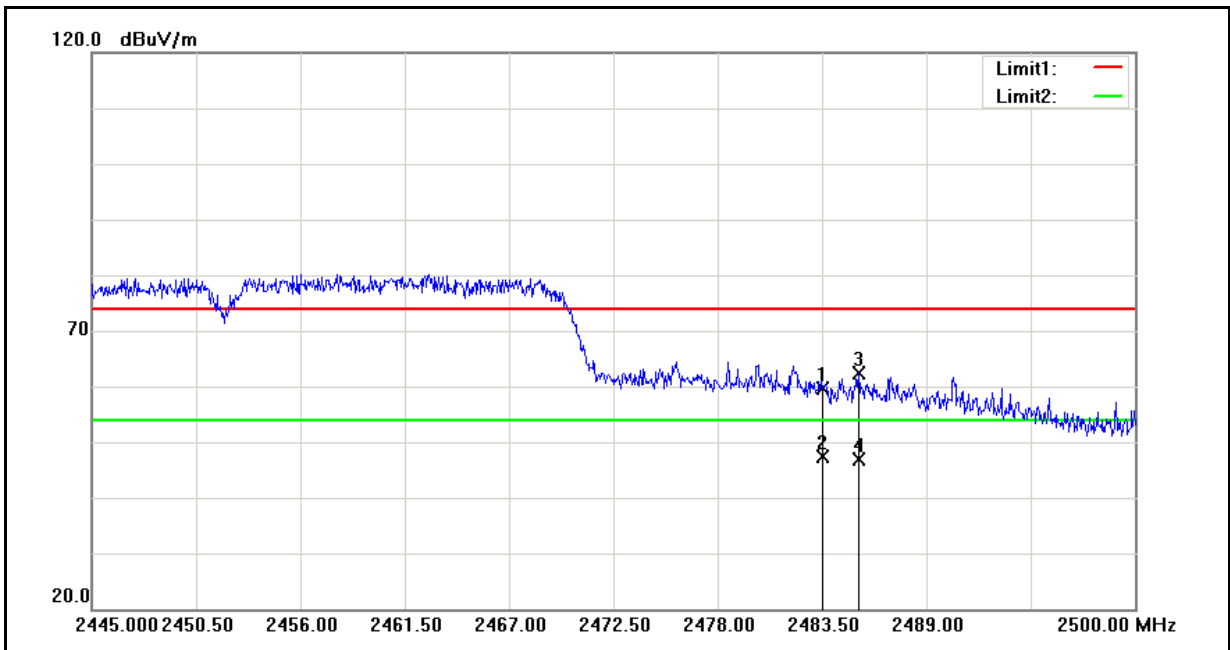

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	77.40	-17.65	59.75	74.00	-14.25	peak
2	2483.500	64.99	-17.65	47.34	54.00	-6.66	AVG
3	2485.425	80.12	-17.65	62.47	74.00	-11.53	peak
4	2485.425	64.65	-17.65	47.00	54.00	-7.00	AVG

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	W242D	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	08/02/2011
Frequency:	2452 MHz	Test By:	Gary Wu
Ant.Polar.:	Vertical		

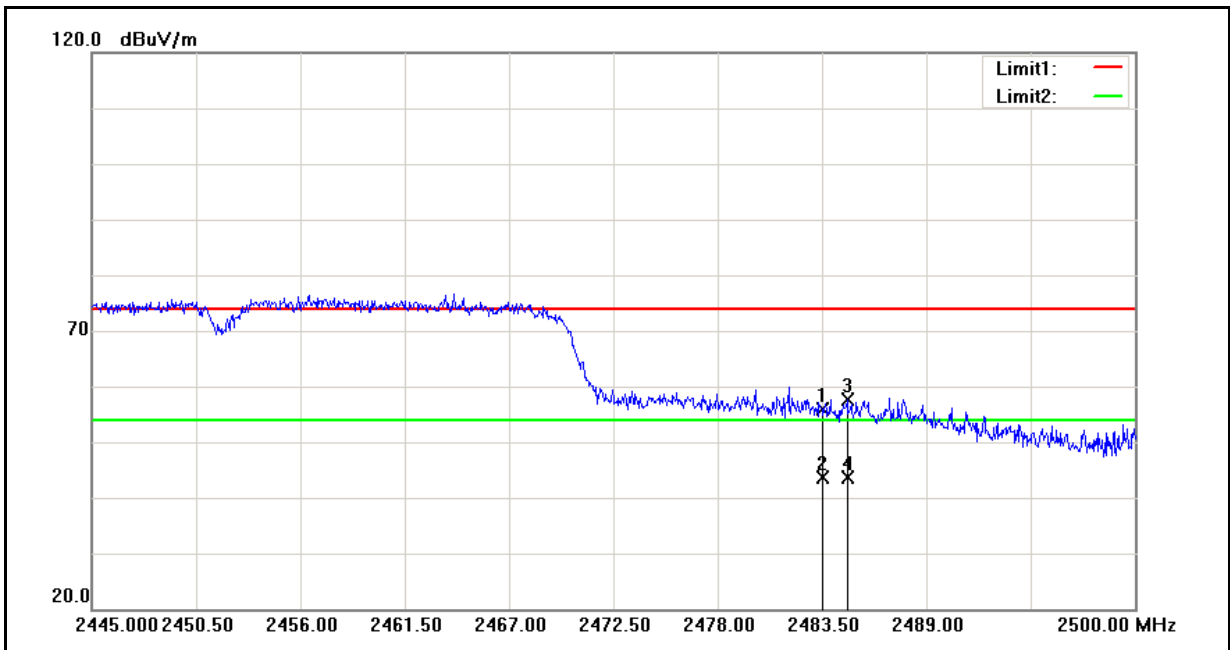


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	73.46	-17.65	55.81	74.00	-18.19	peak
2	2483.500	61.27	-17.65	43.62	54.00	-10.38	AVG
3	2484.820	75.38	-17.65	57.73	74.00	-16.27	peak
4	2484.820	61.23	-17.65	43.58	54.00	-10.42	AVG

## 11 99 % Occupied Bandwidth Measurement

### 11.1.Limit

N/A

### 11.2.Test Setup

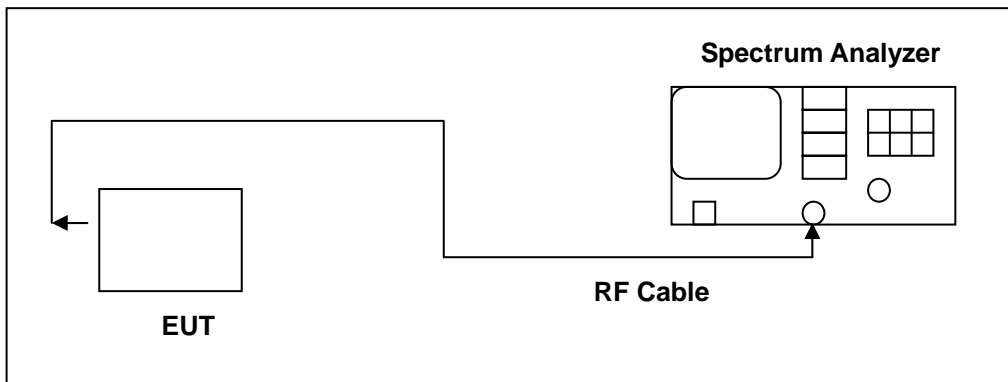

### 11.3.Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/28/2010	(2)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

### 11.4.Test Procedure

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

**11.5.Test Result**

Model Number	W242D		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 2: IEEE 802.11b Link Mode		
Date of Test	08/10/2011	Test Site	TE02
Ant. Port	Frequency (MHz)	Measurement (MHz)	Limit (MHz)
Chain A	2412	14.6979	-----
	2437	14.7061	-----
	2462	14.6898	-----
Chain B	2412	14.6766	-----
	2437	14.6749	-----
	2462	14.6844	-----




Model Number	W242D		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 3: IEEE 802.11g Link Mode		
Date of Test	08/10/2011	Test Site	TE02
Ant. Port	Frequency (MHz)	Measurement (MHz)	Limit (MHz)
Chain A	2412	16.7774	-----
	2437	16.7425	-----
	2462	16.7554	-----
Chain B	2412	16.7516	-----
	2437	16.8272	-----
	2462	16.7888	-----






Model Number	W242D		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 4: draft 802.11n Standard-20MHz Link Mode		
Date of Test	08/10/2011	Test Site	TE02
Ant. Port	Frequency (MHz)	Measurement (MHz)	Limit (MHz)
Chain A	2412	17.8854	-----
	2437	17.8769	-----
	2462	17.9351	-----
Chain B	2412	17.8517	-----
	2437	17.9023	-----
	2462	17.8930	-----
Chain A + B	2412	17.7146	-----
	2437	17.7237	-----
	2462	17.7306	-----

Model Number	W242D		
Test Item	99 % Occupied Bandwidth		
Test Mode	Mode 5: draft 802.11n Wide-40MHz Link Mode		
Date of Test	08/10/2011	Test Site	TE02
Ant. Port	Frequency (MHz)	Measurement (MHz)	Limit (MHz)
Chain A	2422	36.2466	-----
	2437	36.1985	-----
	2452	36.2869	-----
Chain B	2422	36.2019	-----
	2437	36.1877	-----
	2452	36.1388	-----
Chain A + B	2422	36.2414	-----
	2437	36.1325	-----
	2452	36.2742	-----

**11.6. Test Graphs**

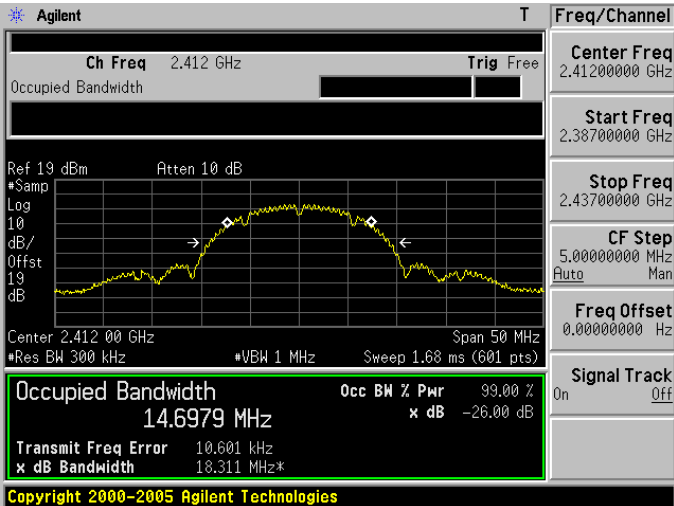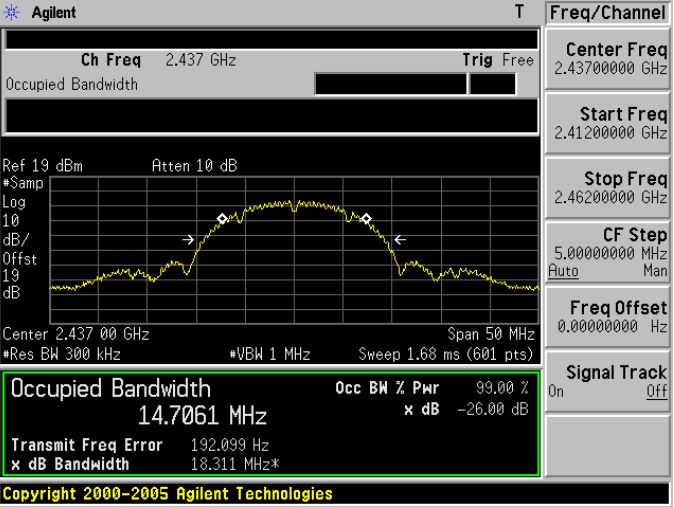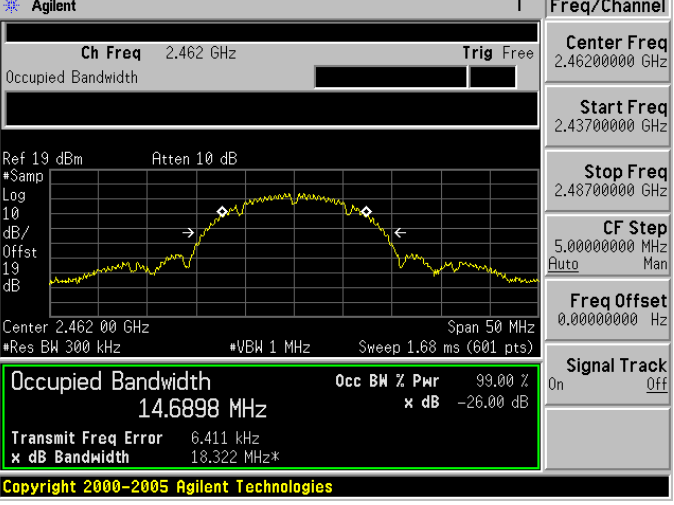Mode 2: IEEE 802.11b Link Mode _ Chain A	
2412	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>Res BW 300 kHz VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 14.6979 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 10.601 kHz</p> <p>x dB Bandwidth 18.311 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>Res BW 300 kHz VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 14.7061 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 192.099 Hz</p> <p>x dB Bandwidth 18.311 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>Res BW 300 kHz VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 14.6898 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 6.411 kHz</p> <p>x dB Bandwidth 18.322 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 2: IEEE 802.11b Link Mode \_ Chain B

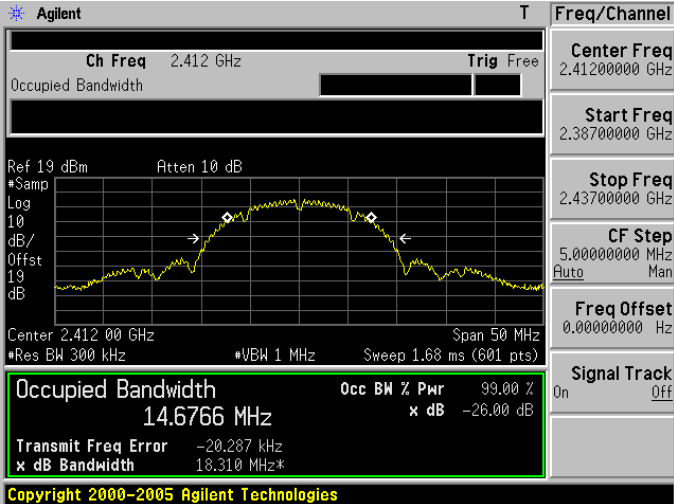
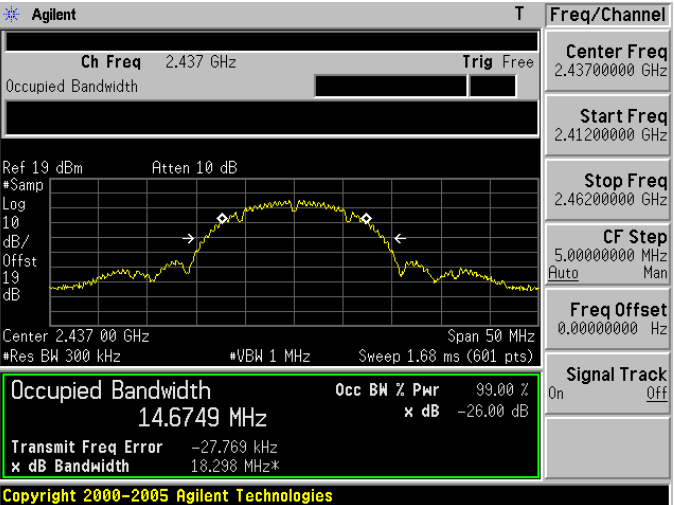
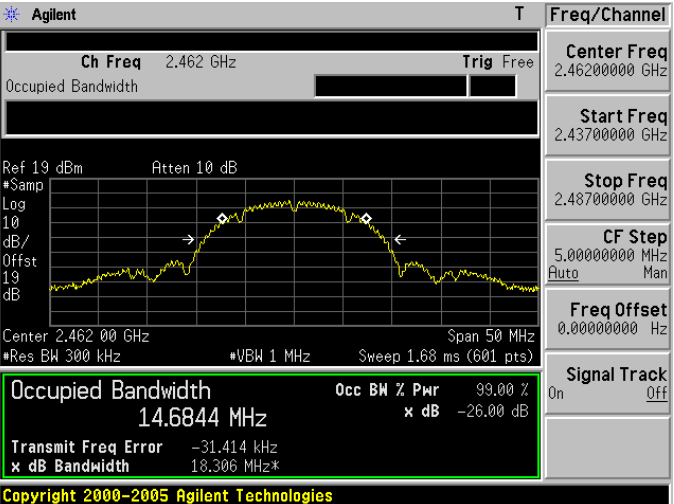
2412	 <p>Agilent T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 14.6766 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -20.287 kHz</p> <p>x dB Bandwidth 18.310 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 14.6749 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -27.769 kHz</p> <p>x dB Bandwidth 18.298 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 14.6844 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -31.414 kHz</p> <p>x dB Bandwidth 18.306 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 3: IEEE 802.11g Link Mode \_ Chain A




2412	<p>Agilent T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>Res BW 300 kHz VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 16.7774 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -57.225 kHz</p> <p>x dB Bandwidth 22.378 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	<p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>Res BW 300 kHz VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 16.7425 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -65.730 kHz</p> <p>x dB Bandwidth 21.788 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	<p>Agilent T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>Res BW 300 kHz VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p>Occupied Bandwidth 16.7554 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -50.198 kHz</p> <p>x dB Bandwidth 22.878 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 3: IEEE 802.11g Link Mode _ Chain B	
2412	<p>Agilent T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 16.7516 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -28.378 kHz</p> <p>x dB Bandwidth 21.941 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 16.8272 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -68.613 kHz</p> <p>x dB Bandwidth 22.185 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	<p>Agilent T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 16.7888 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -39.541 kHz</p> <p>x dB Bandwidth 22.976 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>




Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain A

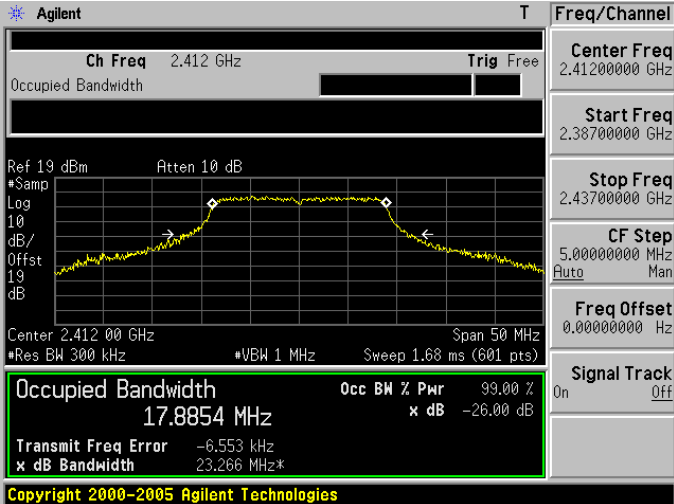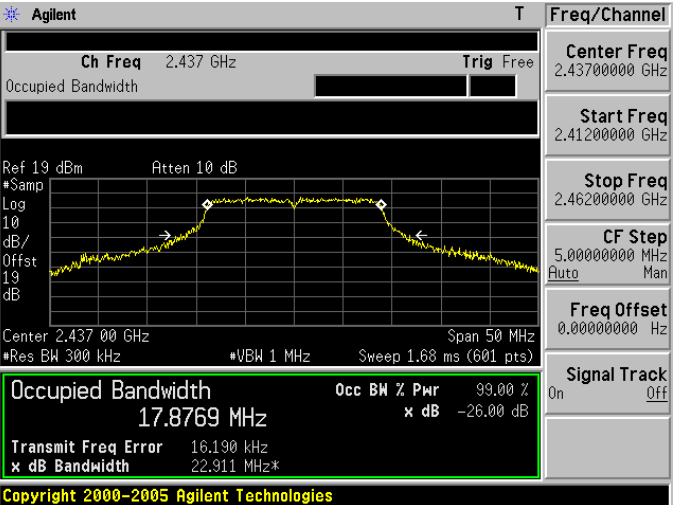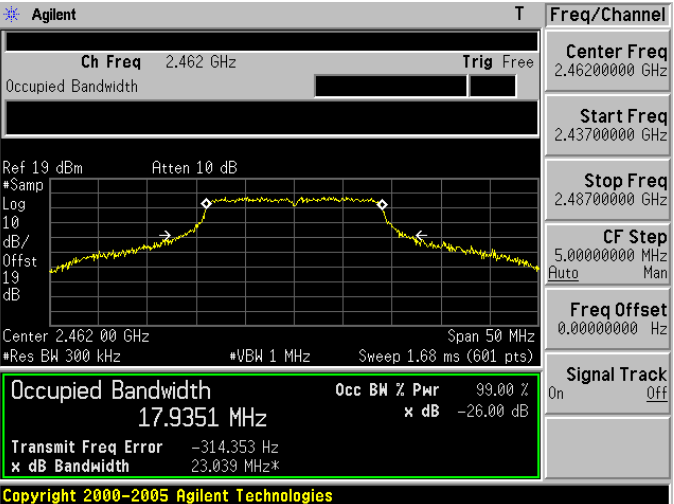2412	 <p>Agilent T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>#Samp Log 10 dB/ Offst 19 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 17.8854 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -6.553 kHz</p> <p>x dB Bandwidth 23.266 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>#Samp Log 10 dB/ Offst 19 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 17.8769 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 16.190 kHz</p> <p>x dB Bandwidth 22.911 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>#Samp Log 10 dB/ Offst 19 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 17.9351 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -314.353 Hz</p> <p>x dB Bandwidth 23.039 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain B

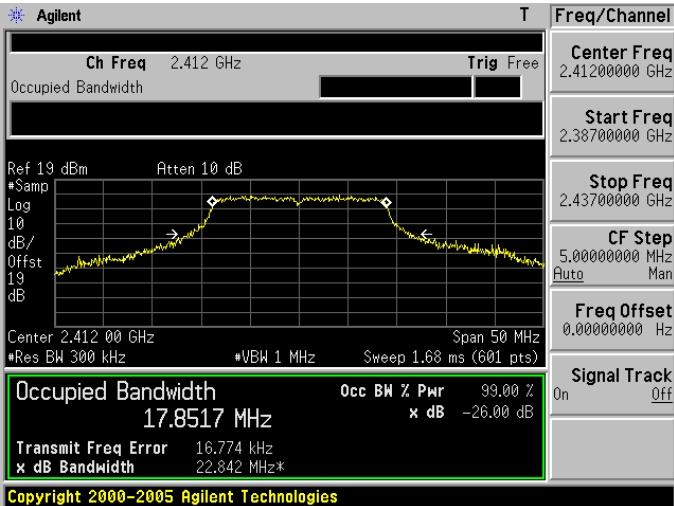
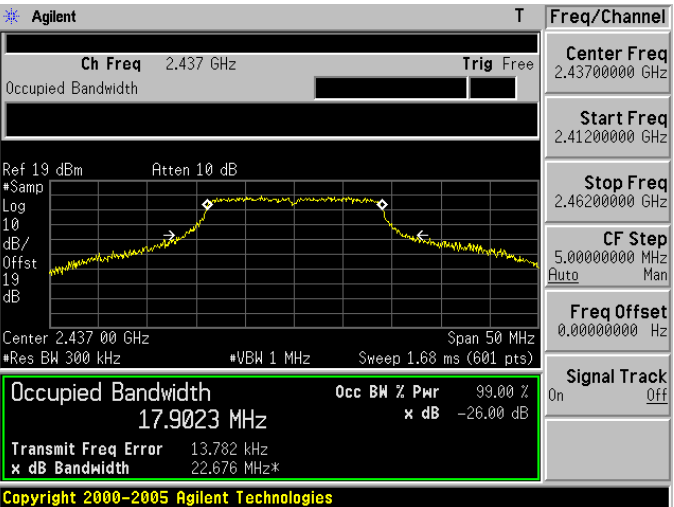
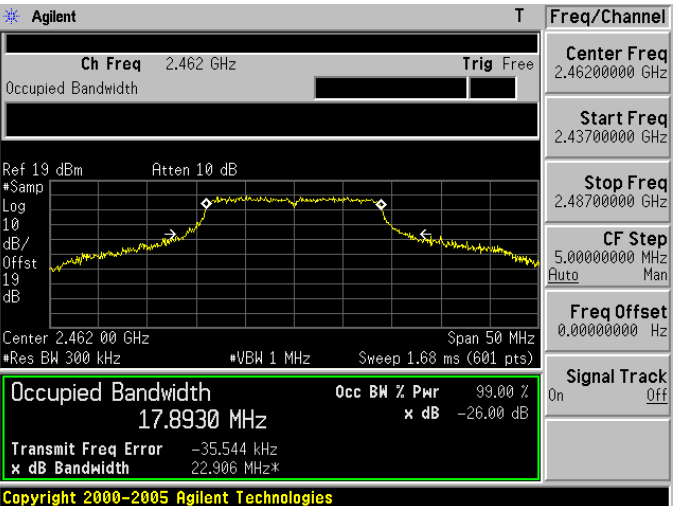
2412	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 17.8517 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 16.774 kHz</p> <p>x dB Bandwidth 22.842 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 17.9023 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error 13.782 kHz</p> <p>x dB Bandwidth 22.676 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 17.8930 MHz</b></p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB -26.00 dB</p> <p>Transmit Freq Error -35.544 kHz</p> <p>x dB Bandwidth 22.906 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 4: draft 802.11n Standard-20MHz Link Mode \_ Chain A + Chain B

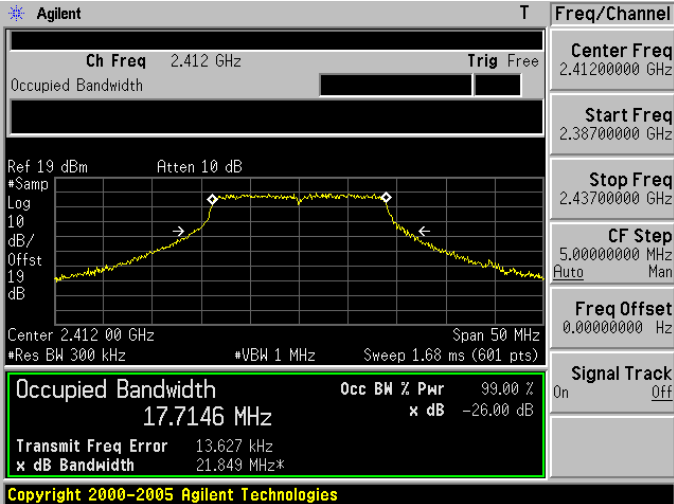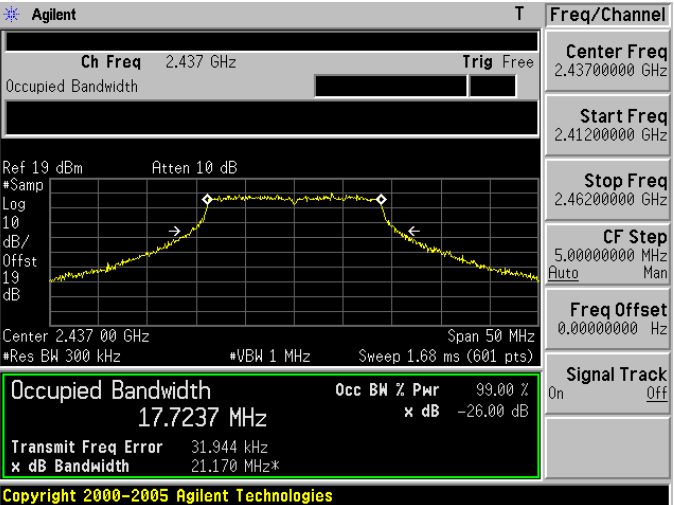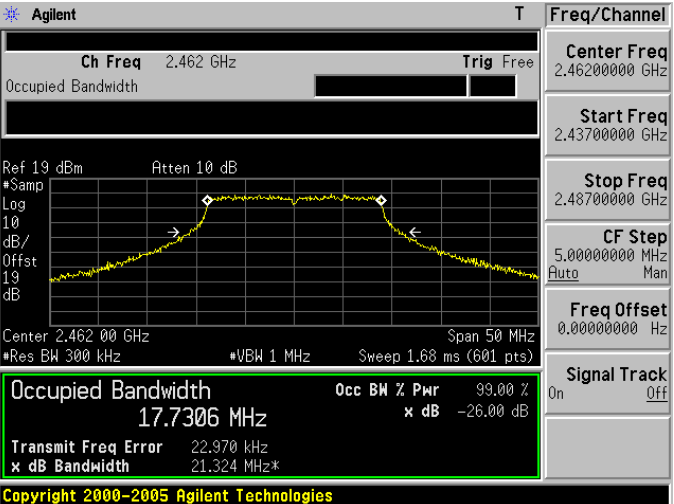2412	 <p>Agilent T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.38700000 GHz</p> <p>Stop Freq 2.43700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.412 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 17.7146 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 13.627 kHz</p> <p>x dB Bandwidth 21.849 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 17.7237 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 31.944 kHz</p> <p>x dB Bandwidth 21.170 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2462	 <p>Agilent T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.43700000 GHz</p> <p>Stop Freq 2.48700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.462 00 GHz Span 50 MHz</p> <p>*Res BW 300 kHz *VBW 1 MHz Sweep 1.68 ms (601 pts)</p> <p><b>Occupied Bandwidth 17.7306 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 22.970 kHz</p> <p>x dB Bandwidth 21.324 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>






Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain A

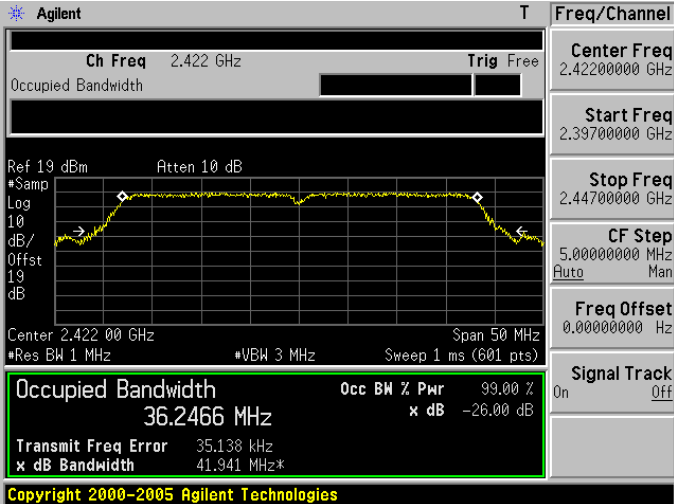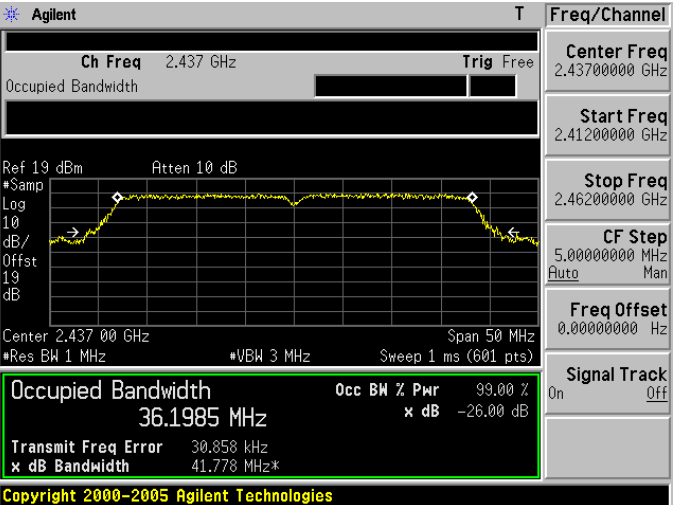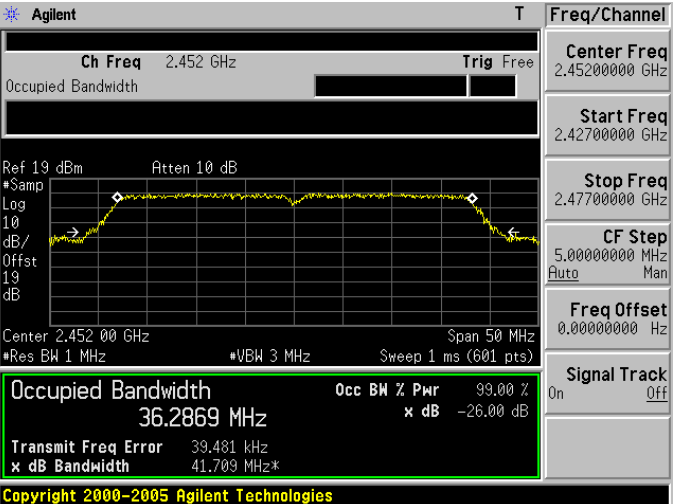2422	 <p><b>Agilent</b> T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.44700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.422 00 GHz Span 50 MHz</p> <p>*Res BW 1 MHz *VBW 3 MHz Sweep 1 ms (601 pts)</p> <p><b>Occupied Bandwidth</b> 36.2466 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB Bandwidth 41.941 MHz*</p> <p>Transmit Freq Error 35.138 kHz</p> <p>x dB Bandwidth 41.941 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p><b>Agilent</b> T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>*Res BW 1 MHz *VBW 3 MHz Sweep 1 ms (601 pts)</p> <p><b>Occupied Bandwidth</b> 36.1985 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB Bandwidth 41.778 MHz*</p> <p>Transmit Freq Error 30.858 kHz</p> <p>x dB Bandwidth 41.778 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2452	 <p><b>Agilent</b> T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 5.00000000 MHz</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>Center 2.452 00 GHz Span 50 MHz</p> <p>*Res BW 1 MHz *VBW 3 MHz Sweep 1 ms (601 pts)</p> <p><b>Occupied Bandwidth</b> 36.2869 MHz</p> <p>Occ BW % Pwr 99.00 %</p> <p>x dB Bandwidth 41.709 MHz*</p> <p>Transmit Freq Error 39.481 kHz</p> <p>x dB Bandwidth 41.709 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain B

2422	<p>Agilent T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.44700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>#Samp Log 10 dB/ Offst 19 dB</p> <p>Center 2.422 00 GHz Span 50 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 1 ms (601 pts)</p> <p><b>Occupied Bandwidth 36.2019 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -26.494 kHz</p> <p>x dB Bandwidth 41.216 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	<p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>#Samp Log 10 dB/ Offst 19 dB</p> <p>Center 2.437 00 GHz Span 50 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 1 ms (601 pts)</p> <p><b>Occupied Bandwidth 36.1877 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -26.238 kHz</p> <p>x dB Bandwidth 41.168 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2452	<p>Agilent T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Ref 19 dBm Atten 10 dB</p> <p>#Samp Log 10 dB/ Offst 19 dB</p> <p>Center 2.452 00 GHz Span 50 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 1 ms (601 pts)</p> <p><b>Occupied Bandwidth 36.1388 MHz</b></p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -22.551 kHz</p> <p>x dB Bandwidth 44.353 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>

Mode 5: draft 802.11n Wide-40MHz Link Mode \_ Chain A + Chain B

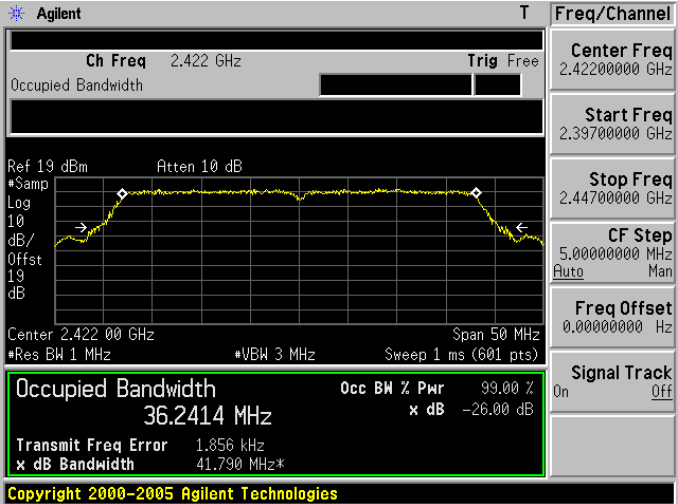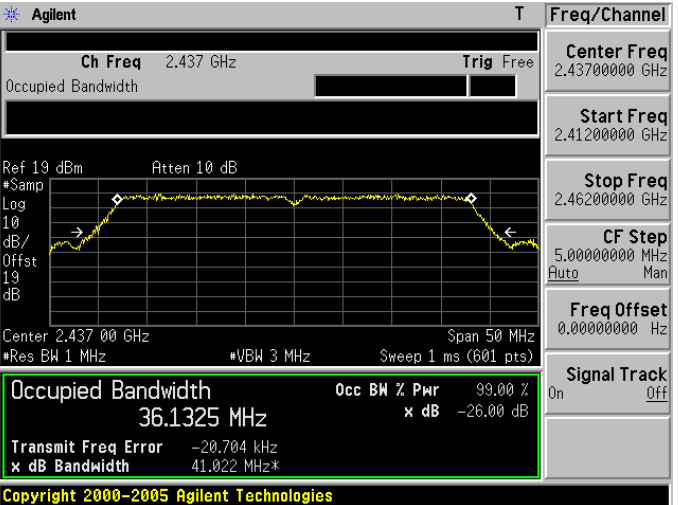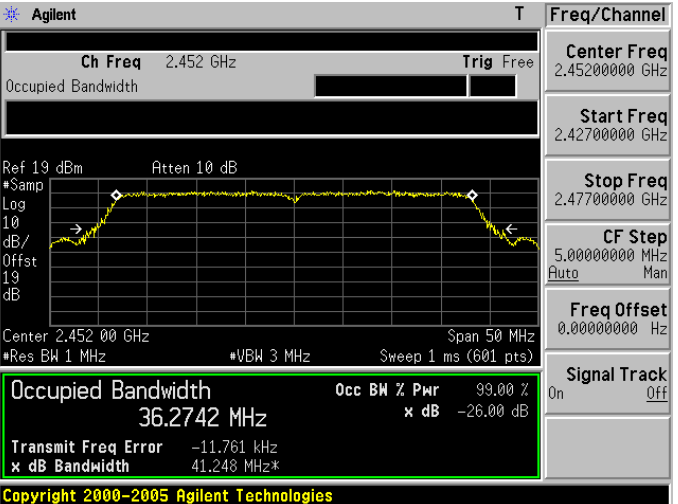2422	 <p>Agilent T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.44700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 36.2414 MHz</p> <p>Occ BM % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 1.856 kHz</p> <p>x dB Bandwidth 41.790 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2437	 <p>Agilent T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.41200000 GHz</p> <p>Stop Freq 2.46200000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 36.1325 MHz</p> <p>Occ BM % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -20.704 kHz</p> <p>x dB Bandwidth 41.022 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>
2452	 <p>Agilent T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 5.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Occupied Bandwidth 36.2742 MHz</p> <p>Occ BM % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -11.761 kHz</p> <p>x dB Bandwidth 41.248 MHz*</p> <p>Copyright 2000-2005 Agilent Technologies</p>

## **12 Antenna Measurement**

### **12.1.Limit**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **12.2.Antenna Connector Construction**

The antenna used in this product is **ANT1: Chip Antenna, ANT2: Exposed Antenna**). And the maximum Gain of this antenna is **ANT1: 0.93 dBi, ANT2: 2.51 dBi**.