

## System Performance Check-D2450V2-727

Frequency: 2450 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 22.5°C; Liquid Temperature: 22.8°C  
Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.874$  S/m;  $\epsilon_r = 38.279$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1260; Calibrated: 2021/9/20
- Probe: EX3DV4 - SN7642; ConvF(8.12, 8.12, 8.12) @ 2450 MHz; Calibrated: 2022/3/2
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

**Head/Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 21.6 W/kg

**Head/Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.8 V/m; Power Drift = -0.01 dB



Peak SAR (extrapolated) = 29.3 W/kg

**SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.5 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.3%

Maximum value of SAR (measured) = 21.7 W/kg

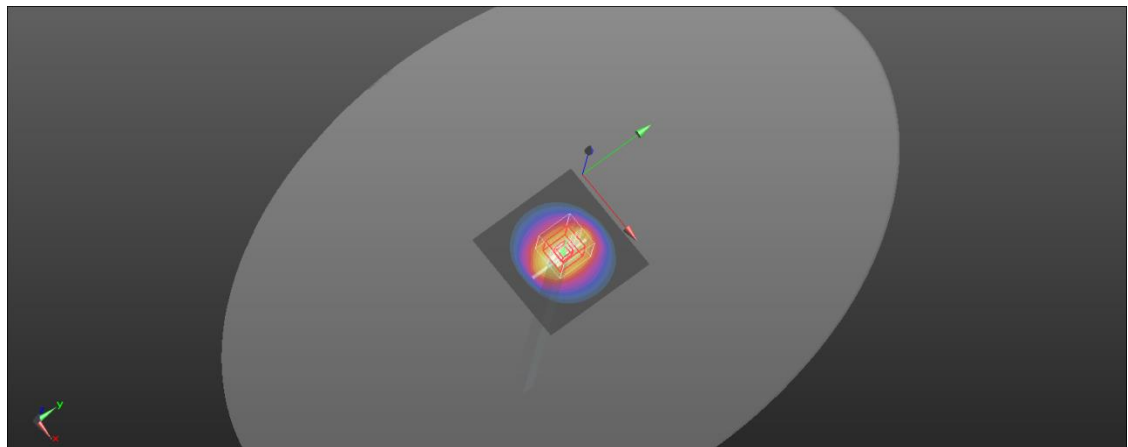

0 dB = 21.7 W/kg = 13.36 dBW/kg

## System Performance Check-D5GHzV2-1023-5250



Frequency: 5250 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C  
Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 4.701 \text{ S/m}$ ;  $\epsilon_r = 35.315$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2022/4/28
- Probe: EX3DV4 - SN3665; ConvF(5.45, 5.45, 5.45) @ 5250 MHz; Calibrated: 2022/8/28
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Phantom: ELI

**Head/Pin=100mW/Area Scan (91x91x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
Maximum value of SAR (interpolated) = 15.6 W/kg

**Head/Pin=100mW/Zoom Scan (7x7x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$   
Reference Value = 62.72 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 31.6 W/kg  
**SAR(1 g) = 7.84 W/kg; SAR(10 g) = 2.24 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.5 mm  
Ratio of SAR at M2 to SAR at M1 = 55.5%  
Maximum value of SAR (measured) = 16.3 W/kg

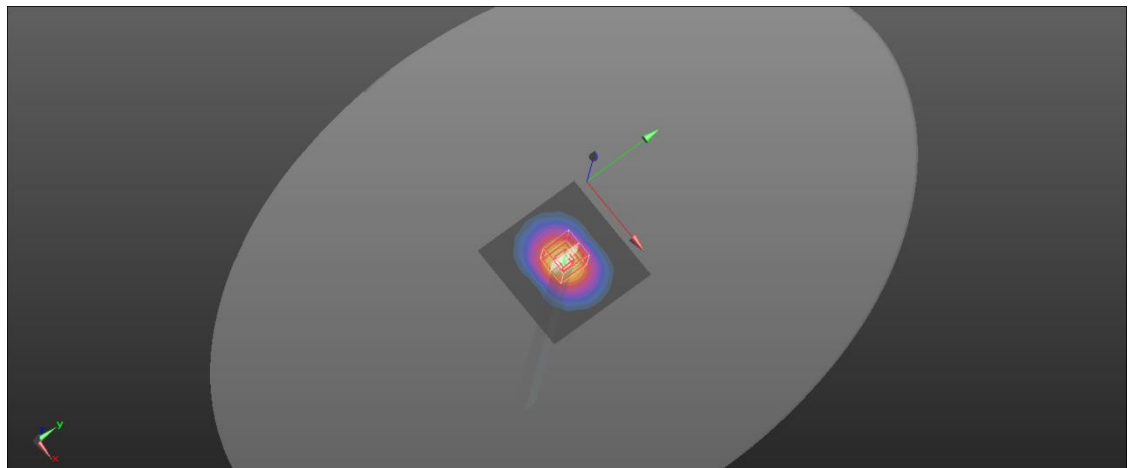

0 dB = 16.3 W/kg = 12.12 dBW/kg