



FCC TEST REPORT

REPORT NO.: RF130605E14

MODEL NO.: N514

FCC ID: NOIKBN514

RECEIVED: June 05, 2013

TESTED: June 06 to 11, 2013

ISSUED: June 27, 2013

APPLICANT: NETRONIX, INC.

ADDRESS: No. 945, Boai St., Jubei City, Hsin-Chu,302,Taiwan,
R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD.....	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 DESCRIPTION OF TEST MODES.....	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DESCRIPTION OF SUPPORT UNITS.....	15
3.5 CONFIGURATION OF SYSTEM UNDER TEST	16
4. TEST TYPES AND RESULTS.....	17
4.1 CONDUCTED EMISSION MEASUREMENT	17
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	17
4.1.2 TEST INSTRUMENTS	17
4.1.3 TEST PROCEDURES.....	18
4.1.4 DEVIATION FROM TEST STANDARD	18
4.1.5 TEST SETUP	18
4.1.6 EUT OPERATING CONDITIONS.....	19
4.1.7 TEST RESULTS.....	20
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	22
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT ...	22
4.2.2 TEST INSTRUMENTS	23
4.2.3 TEST PROCEDURES.....	24
4.2.4 DEVIATION FROM TEST STANDARD	24
4.2.5 TEST SETUP	25
4.2.6 EUT OPERATING CONDITIONS.....	25
4.2.7 TEST RESULTS.....	26
4.3 6dB BANDWIDTH MEASUREMENT	36
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	36
4.3.2 TEST INSTRUMENTS	36
4.3.3 TEST PROCEDURE	36
4.3.4 DEVIATION FROM TEST STANDARD	36
4.3.5 TEST SETUP	36
4.3.6 EUT OPERATING CONDITIONS.....	36
4.3.7 TEST RESULTS.....	37
4.4 CONDUCTED OUTPUT POWER MEASUREMENT	38



A D T

4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	38
4.4.2	INSTRUMENTS	38
4.4.3	TEST PROCEDURES.....	38
4.4.4	DEVIATION FROM TEST STANDARD	38
4.4.5	TEST SETUP	38
4.4.6	EUT OPERATING CONDITIONS.....	38
4.4.7	TEST RESULTS.....	39
4.5	AVERAGE OUTPUT POWER	40
4.5.1	FOR REFERENCE.....	40
4.5.2	TEST INSTRUMENTS	40
4.5.3	TEST PROCEDURES.....	40
4.5.4	TEST SETUP	40
4.5.5	EUT OPERATING CONDITIONS.....	40
4.5.6	TEST RESULTS.....	41
4.6	POWER SPECTRAL DENSITY MEASUREMENT.....	42
4.6.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	42
4.6.2	TEST INSTRUMENTS	42
4.6.3	TEST PROCEDURE	42
4.6.4	DEVIATION FROM TEST STANDARD	42
4.6.5	TEST SETUP	42
4.6.6	EUT OPERATING CONDITION	42
4.6.7	TEST RESULTS.....	43
4.7	CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	44
4.7.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	44
4.7.2	TEST INSTRUMENTS	44
4.7.3	TEST PROCEDURE	44
4.7.4	DEVIATION FROM TEST STANDARD	45
4.7.5	TEST SETUP	45
4.7.6	EUT OPERATING CONDITION	45
4.7.7	TEST RESULTS.....	45
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	49
6.	INFORMATION ON THE TESTING LABORATORIES	50
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	51



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130605E14	Original release	June 27, 2013



1. CERTIFICATION

PRODUCT: 6" EBOOK READER DEVICE
BRAND NAME: KOBO
MODEL NO.: N514
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: NETRONIX, INC.
TESTED: June 06 to 11, 2013
STANDARDS: FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2009

The above equipment (Model: N514) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** June 27, 2013
(Lori Chung, Specialist)

APPROVED BY :  , **DATE:** June 27, 2013
(May Chen, Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.57dB at 11.86719MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.5dB at 4874.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.46 dB
Radiated emissions (1GHz-6GHz)	3.54 dB
Radiated emissions (6GHz-18GHz)	4.08 dB
Radiated emissions (18GHz-40GHz)	4.11 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	6"EBOOK READER DEVICE
MODEL NO.	N514
POWER SUPPLY	DC 3.7 ~ 4.2V from battery or DC 5V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: Up to 11Mbps 802.11g: Up to 54Mbps 802.11n: Up to 72.2Mbps
OPERATING FREQUENCY	2.412 ~ 2.462GHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	802.11b: 76.384mW 802.11g: 200.447mW 802.11n (HT20): 172.187mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	USB cable (shielded, 1m) × 1
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Rechargeable battery x 1

NOTE:

1. There is one antenna provided to this EUT, please refer to the following table:

Brand	Model	Gain (dBi)	Antenna Type	Connecter Type
Cirocomm Technology Corp.	DCAK0014	2	Dielectric Chip Antenna	NA

2. The EUT must be supplied with a rechargeable battery as following table:

Brand	Model No.	Spec.
TCL	PR-285083	DC Output: 3.7~4.2V, 1500mAh

3. The EUT must be supplied with a flash as following table:

Brand	Model No.
SanDisk	SDIN7DP2-4G
Hynix	H26M31003GMR
Samsung	KLM4G1YE4C-B001

For the above flashes, the worse case is to find in **Mode A**. Therefore only the test data of the modes were recorded in this report.

4. The EUT incorporates a SISO function without beam forming.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (HT20)	1TX/1RX

5. The device WiFi function will be disable automatically when the device is connected to the PC through one USB cable.
6. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 7.
7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



A D T

3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

NOTE: 1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane** (for below 1GHz) and **Z-plane** (for above 1GHz).

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
USB Communication Mode	-	-	-	-	-

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6



RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	27deg. C, 55%RH	120Vac, 60 Hz (SYSTEM)	Jason Huang
RE<1G	25deg. C, 68%RH	DC 3.7V	Andy Ho
RE ³ 1G	25deg. C, 65%RH	DC 3.7V	Tim Ho
APCM	25deg. C, 60%RH	DC 3.7V	Robert Cheng
OB	25deg. C, 60%RH	DC 3.7V	Robert Cheng



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

558074 D01 DTS Meas Guidance v03r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

For Conducted test					
NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PERSONAL COMPUTER	DELL	DCSCMF	9KKB32S	FCC DoC
2	MONITOR	DELL	E2210Hc	CN-OG337R-64 180-97S-OQDS	FCC DoC
3	PRINTER	EPSON	LQ-300+II	G88Y074083	FCC DoC
4	MODEM	ACEEX	1414	0206026778	IFAXDM1414
5	KEYBOARD	DELL	SK-8115	MY-0DJ325-716 19-99B-0476	FCC DoC
6	MOUSE	DELL	MOC5UO	I1401LVG	FCC DoC
7	Micro SD card	PNY	1GB	NA	NA
For other test items					
NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Micro SD card	PNY	1GB	NA	NA

For Conducted test	
NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB cable, shielded, 1m
2	VGA cable, 1.8m with two cores
3	USB cable, shielded, 1.8m
4	RS232 cable, 1.1m
5	USB cable, shielded, 1.8m with one core
6	USB cable, shielded, 1.8m
7	NA
For other test items	
NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA


3.5 CONFIGURATION OF SYSTEM UNDER TEST

For Conducted test:

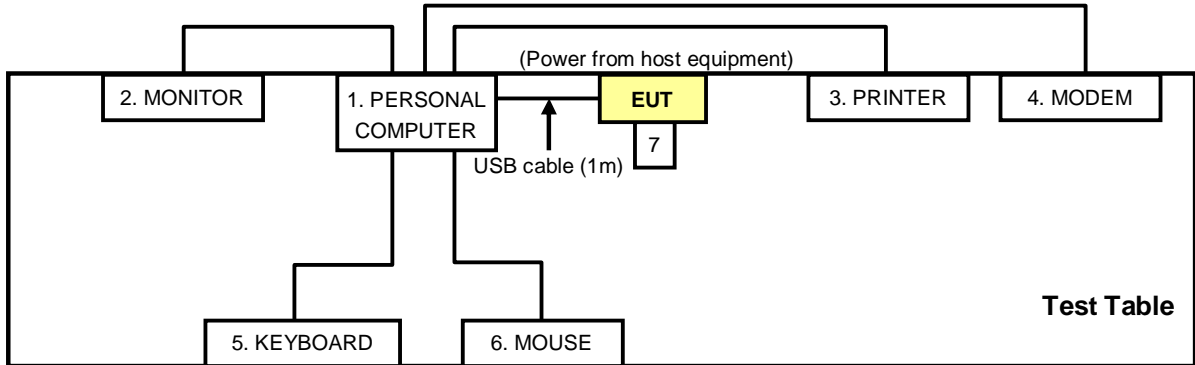

NOTE: Item 7 is the Micro SD card.

For other test items:

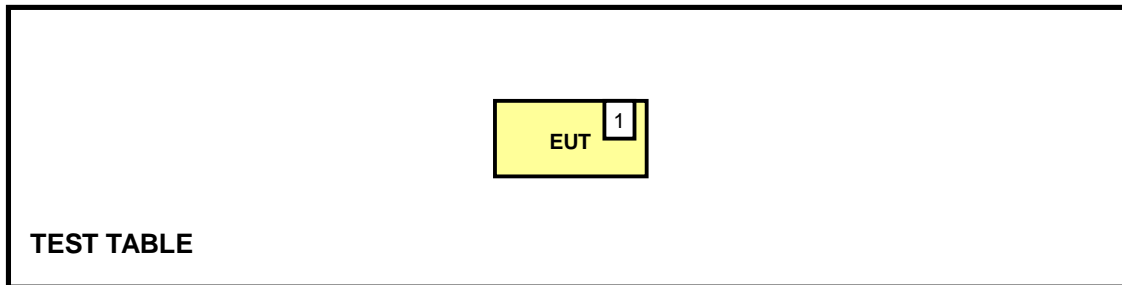

NOTE: Item 1 is the Micro SD card.



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100287	Feb. 28, 2013	Feb. 27, 2014
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK 8127	8127-523	Sep. 19, 2012	Sep. 20, 2013
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ESH3-Z5	848773/004	Oct. 29, 2012	Oct. 28, 2013
RF Cable (JYEBAO)	5DFB	COACAB-002	Aug. 05, 2012	Aug. 04, 2013
50 ohms Terminator	50	3	Oct. 23, 2012	Oct. 22, 2013
Software ADT	BV ADT_Cond_V7.3.7 .3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: June 06, 2013

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

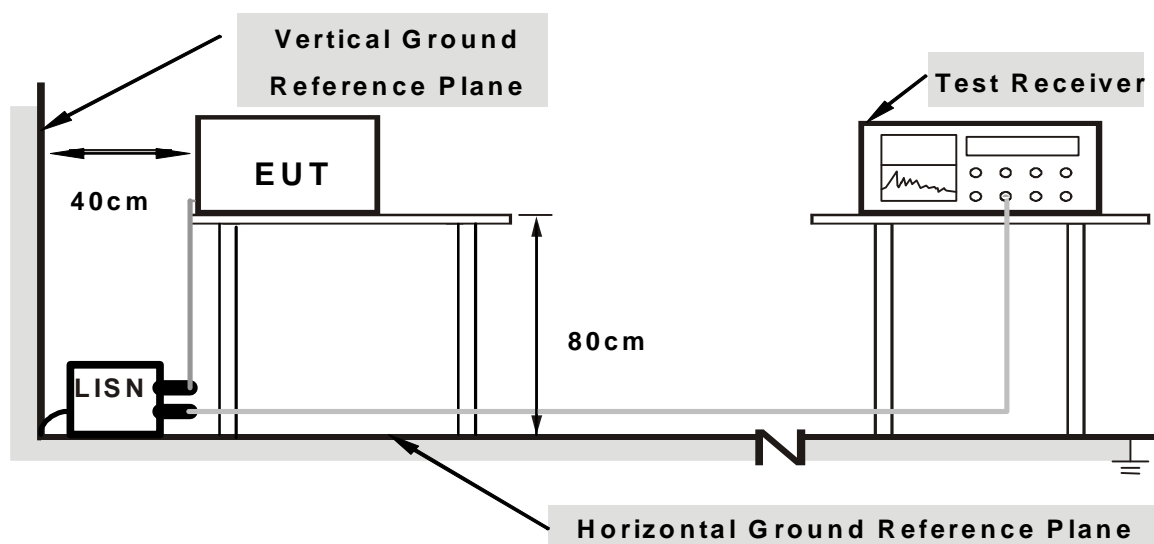

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



A D T

4.1.6 EUT OPERATING CONDITIONS

1. Turn on the power of all equipment.
2. Support unit 1 (PERSONAL COMPUTER) runs a test program “EMC.bat” to enable EUT under “Read – Write mode” continually via one USB cable.
3. Support unit 1 (PERSONAL COMPUTER) sends "H" messages to support unit 2 (MONITOR). And support unit 2 (MONITOR) displays "H" messages on its screen.
4. Support unit 1 (PERSONAL COMPUTER) sends "H" messages to modem.
5. Support unit 1 (PERSONAL COMPUTER) sends "H" messages to printer, and the printer prints them on paper.
6. The EUT is recharged from Support unit 1 (PERSONAL COMPUTER).


4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.09	41.93	40.23	42.02	40.32	65.38	55.38	-23.35	-15.05
2	0.56797	0.16	30.44	29.59	30.60	29.75	56.00	46.00	-25.40	-16.25
3	0.81016	0.16	22.91	20.01	23.07	20.17	56.00	46.00	-32.93	-25.83
4	10.24609	0.54	35.49	30.32	36.03	30.86	60.00	50.00	-23.97	-19.14
5	11.86719	0.62	39.67	36.81	40.29	37.43	60.00	50.00	-19.71	-12.57
6	23.15625	1.11	35.26	28.16	36.37	29.27	60.00	50.00	-23.63	-20.73

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

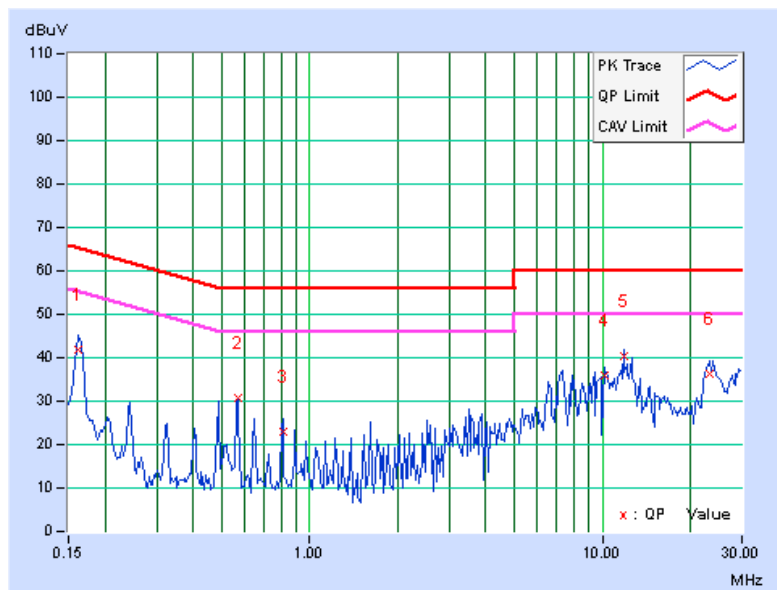


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.14	42.60	40.45	42.74	40.59	65.38	55.38	-22.64	-14.79
2	0.56797	0.19	30.06	29.47	30.25	29.66	56.00	46.00	-25.75	-16.34
3	7.22891	0.42	32.92	17.08	33.34	17.50	60.00	50.00	-26.66	-32.50
4	9.44141	0.48	35.22	32.13	35.70	32.61	60.00	50.00	-24.30	-17.39
5	12.67969	0.58	37.40	33.47	37.98	34.05	60.00	50.00	-22.02	-15.95
6	23.47656	0.85	35.81	28.91	36.66	29.76	60.00	50.00	-23.34	-20.24

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

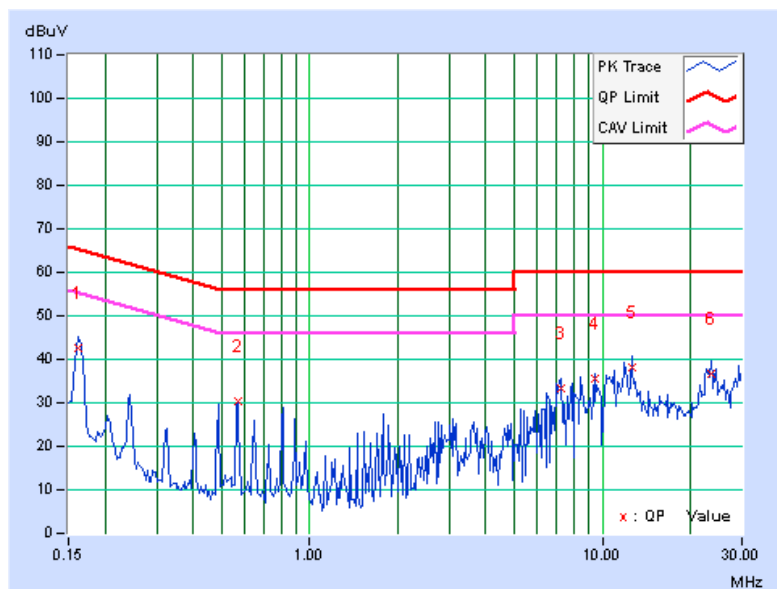

4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.



A D T

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 16, 2013	Jan. 15, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 30, 2012	Oct. 29, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Mar. 25, 2013	Mar. 24, 2014
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 27, 2012	Nov. 26, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 26, 2012	Dec. 25, 2013
RF Cable	NA	CHHCAB_001	Oct. 07, 2012	Oct. 06, 2013
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: June 10, 2013

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meters chamber room test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


NOTE:

2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

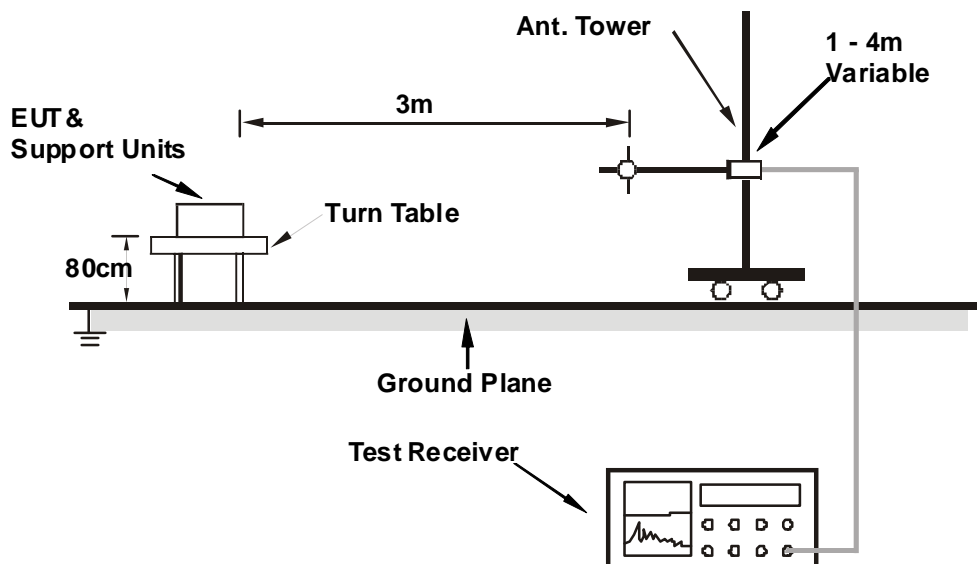

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Controlling software (HyperTerminal paste command) has been activated to set the EUT under transmission/receiving condition continuously.

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	104.20	22.0 QP	43.5	-21.5	2.00 H	53	38.91	-16.87
2	179.82	27.1 QP	43.5	-16.4	2.00 H	142	41.69	-14.56
3	252.42	25.6 QP	46.0	-20.4	2.00 H	108	39.73	-14.14
4	397.53	29.4 QP	46.0	-16.6	1.00 H	29	39.36	-9.94
5	805.51	28.3 QP	46.0	-17.7	1.00 H	360	30.31	-1.97
6	940.64	30.0 QP	46.0	-16.0	2.00 H	278	29.55	0.49
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.74	24.7 QP	40.0	-15.3	2.00 V	193	38.57	-13.87
2	275.51	38.0 QP	46.0	-8.0	1.50 V	198	51.13	-13.14
3	388.46	37.0 QP	46.0	-9.0	1.00 V	105	47.09	-10.08
4	412.86	39.8 QP	46.0	-6.2	1.00 V	303	49.40	-9.56
5	429.69	34.9 QP	46.0	-11.1	2.00 V	307	43.61	-8.74
6	902.37	33.1 QP	46.0	-12.9	1.00 V	108	33.30	-0.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.2 PK	74.0	-12.8	1.11 H	63	64.65	-3.45
2	2390.00	50.6 AV	54.0	-3.4	1.11 H	63	54.05	-3.45
3	*2412.00	104.1 PK			1.11 H	63	107.49	-3.39
4	*2412.00	102.0 AV			1.11 H	63	105.39	-3.39
5	4824.00	56.3 PK	74.0	-17.7	1.00 H	105	49.81	6.49
6	4824.00	53.1 AV	54.0	-0.9	1.00 H	105	46.61	6.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	1.11 V	221	59.55	-3.45
2	2390.00	45.4 AV	54.0	-8.6	1.11 V	221	48.85	-3.45
3	*2412.00	99.2 PK			1.23 V	15	102.59	-3.39
4	*2412.00	97.2 AV			1.23 V	15	100.59	-3.39
5	4824.00	50.6 PK	74.0	-23.4	1.02 V	32	44.11	6.49
6	4824.00	47.6 AV	54.0	-6.4	1.02 V	32	41.11	6.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.12 H	58	62.55	-3.45
2	2390.00	48.2 AV	54.0	-5.8	1.12 H	58	51.65	-3.45
3	*2437.00	104.7 PK			1.11 H	58	108.01	-3.31
4	*2437.00	101.9 AV			1.11 H	58	105.21	-3.31
5	2483.50	60.2 PK	74.0	-13.8	1.11 H	58	63.36	-3.16
6	2483.50	48.4 AV	54.0	-5.6	1.11 H	58	51.56	-3.16
7	4874.00	56.8 PK	74.0	-17.2	1.00 H	102	50.27	6.53
8	4874.00	53.5 AV	54.0	-0.5	1.00 H	102	46.97	6.53
9	7311.00	53.9 PK	74.0	-20.1	1.01 H	117	42.81	11.09
10	7311.00	42.9 AV	54.0	-11.1	1.01 H	117	31.81	11.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	1.12 V	69	62.65	-3.45
2	2390.00	48.5 AV	54.0	-5.5	1.12 V	69	51.95	-3.45
3	*2437.00	99.8 PK			1.17 V	1	103.11	-3.31
4	*2437.00	97.0 AV			1.17 V	1	100.31	-3.31
5	2483.50	58.2 PK	74.0	-15.8	1.16 V	55	61.36	-3.16
6	2483.50	46.5 AV	54.0	-7.5	1.16 V	55	49.66	-3.16
7	4874.00	50.4 PK	74.0	-23.6	1.04 V	29	43.87	6.53
8	4874.00	47.4 AV	54.0	-6.6	1.04 V	29	40.87	6.53
9	7311.00	54.2 PK	74.0	-19.8	1.00 V	111	43.11	11.09
10	7311.00	43.3 AV	54.0	-10.7	1.00 V	111	32.21	11.09

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.3 PK			1.35 H	58	112.53	-3.23
2	*2462.00	106.1 AV			1.35 H	58	109.33	-3.23
3	2491.00	61.7 PK	74.0	-12.3	1.35 H	58	64.84	-3.14
4	2491.00	51.7 AV	54.0	-2.3	1.35 H	58	54.84	-3.14
5	4924.00	56.3 PK	74.0	-17.7	1.00 H	29	49.76	6.54
6	4924.00	53.3 AV	54.0	-0.7	1.00 H	29	46.76	6.54
7	7386.00	54.0 PK	74.0	-20.0	1.00 H	117	42.59	11.41
8	7386.00	43.5 AV	54.0	-10.5	1.00 H	117	32.09	11.41

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.7 PK			1.21 V	4	107.93	-3.23
2	*2462.00	101.4 AV			1.21 V	4	104.63	-3.23
3	2491.00	51.2 PK	74.0	-22.8	1.05 V	222	54.34	-3.14
4	2491.00	48.5 AV	54.0	-5.5	1.05 V	222	51.64	-3.14
5	4924.00	50.9 PK	74.0	-23.1	1.09 V	31	44.36	6.54
6	4924.00	47.6 AV	54.0	-6.4	1.09 V	31	41.06	6.54
7	7386.00	54.3 PK	74.0	-19.7	1.05 V	103	42.89	11.41
8	7386.00	43.6 AV	54.0	-10.4	1.05 V	103	32.19	11.41

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.11 H	63	74.85	-3.45
2	2390.00	53.4 AV	54.0	-0.6	1.11 H	63	56.85	-3.45
3	*2412.00	107.7 PK			1.11 H	63	111.09	-3.39
4	*2412.00	97.3 AV			1.11 H	63	100.69	-3.39
5	4824.00	50.8 PK	74.0	-23.2	1.13 H	18	44.31	6.49
6	4824.00	47.7 AV	54.0	-6.3	1.13 H	18	41.21	6.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.4 PK	74.0	-22.6	1.06 V	210	54.85	-3.45
2	2390.00	48.6 AV	54.0	-5.4	1.06 V	210	52.05	-3.45
3	*2412.00	103.5 PK			1.22 V	14	106.89	-3.39
4	*2412.00	93.1 AV			1.22 V	14	96.49	-3.39
5	4824.00	50.8 PK	74.0	-23.2	1.09 V	37	44.31	6.49
6	4824.00	47.6 AV	54.0	-6.4	1.09 V	37	41.11	6.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.8 PK	74.0	-12.2	1.12 H	60	65.25	-3.45
2	2390.00	48.8 AV	54.0	-5.2	1.12 H	60	52.25	-3.45
3	*2437.00	111.3 PK			1.12 H	60	114.61	-3.31
4	*2437.00	102.4 AV			1.12 H	60	105.71	-3.31
5	2483.50	60.7 PK	74.0	-13.3	1.12 H	60	63.86	-3.16
6	2483.50	49.1 AV	54.0	-4.9	1.12 H	60	52.26	-3.16
7	4874.00	53.4 PK	74.0	-20.6	1.00 H	360	46.87	6.53
8	4874.00	42.4 AV	54.0	-11.6	1.00 H	360	35.87	6.53
9	7311.00	54.5 PK	74.0	-19.5	1.08 H	123	43.41	11.09
10	7311.00	43.9 AV	54.0	-10.1	1.08 H	123	32.81	11.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.5 PK	74.0	-11.5	1.15 V	63	65.95	-3.45
2	2390.00	49.3 AV	54.0	-4.7	1.15 V	63	52.75	-3.45
3	*2437.00	106.4 PK			1.18 V	5	109.71	-3.31
4	*2437.00	97.4 AV			1.18 V	5	100.71	-3.31
5	2483.50	60.9 PK	74.0	-13.1	1.13 V	61	64.06	-3.16
6	2483.50	49.2 AV	54.0	-4.8	1.13 V	61	52.36	-3.16
7	4874.00	53.3 PK	74.0	-20.7	1.00 V	360	46.77	6.53
8	4874.00	42.3 AV	54.0	-11.7	1.00 V	360	35.77	6.53
9	7311.00	54.5 PK	74.0	-19.5	1.08 V	107	43.41	11.09
10	7311.00	44.1 AV	54.0	-9.9	1.08 V	107	33.01	11.09

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.5 PK			1.12 H	58	109.73	-3.23
2	*2462.00	97.4 AV			1.12 H	58	100.63	-3.23
3	2483.50	69.1 PK	74.0	-4.9	1.12 H	58	72.26	-3.16
4	2483.50	53.3 AV	54.0	-0.7	1.12 H	58	56.46	-3.16
5	4924.00	59.3 PK	74.0	-14.7	1.01 H	108	52.76	6.54
6	4924.00	47.6 AV	54.0	-6.4	1.01 H	108	41.06	6.54
7	7386.00	54.1 PK	74.0	-19.9	1.02 H	113	42.69	11.41
8	7386.00	43.6 AV	54.0	-10.4	1.02 H	113	32.19	11.41

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.8 PK			1.21 V	16	105.03	-3.23
2	*2462.00	92.6 AV			1.21 V	16	95.83	-3.23
3	2483.50	67.8 PK	74.0	-6.2	1.12 V	55	70.96	-3.16
4	2483.50	50.1 AV	54.0	-3.9	1.12 V	55	53.26	-3.16
5	4924.00	58.5 PK	74.0	-15.5	1.00 V	97	51.96	6.54
6	4924.00	47.1 AV	54.0	-6.9	1.00 V	97	40.56	6.54
7	7386.00	53.6 PK	74.0	-20.4	1.00 V	108	42.19	11.41
8	7386.00	42.7 AV	54.0	-11.3	1.00 V	108	31.29	11.41

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.13 H	60	75.85	-3.45
2	2390.00	53.4 AV	54.0	-0.6	1.13 H	60	56.85	-3.45
3	*2412.00	106.1 PK			1.13 H	60	109.49	-3.39
4	*2412.00	96.0 AV			1.13 H	60	99.39	-3.39
5	4824.00	58.6 PK	74.0	-15.4	1.00 H	77	52.11	6.49
6	4824.00	47.0 AV	54.0	-7.0	1.00 H	77	40.51	6.49
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.4 PK	74.0	-6.6	1.13 V	65	70.85	-3.45
2	2390.00	49.9 AV	54.0	-4.1	1.13 V	65	53.35	-3.45
3	*2412.00	101.0 PK			1.20 V	16	104.39	-3.39
4	*2412.00	91.1 AV			1.20 V	16	94.49	-3.39
5	4824.00	58.5 PK	74.0	-15.5	1.00 V	90	52.01	6.49
6	4824.00	47.0 AV	54.0	-7.0	1.00 V	90	40.51	6.49

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.3 PK	74.0	-12.7	1.12 H	56	64.75	-3.45
2	2390.00	48.8 AV	54.0	-5.2	1.12 H	56	52.25	-3.45
3	*2437.00	110.8 PK			1.12 H	56	114.11	-3.31
4	*2437.00	102.1 AV			1.12 H	56	105.41	-3.31
5	2483.50	62.7 PK	74.0	-11.3	1.12 H	56	65.86	-3.16
6	2483.50	49.4 AV	54.0	-4.6	1.12 H	56	52.56	-3.16
7	4874.00	58.6 PK	74.0	-15.4	1.02 H	360	52.07	6.53
8	4874.00	47.5 AV	54.0	-6.5	1.02 H	360	40.97	6.53
9	7311.00	54.3 PK	74.0	-19.7	1.07 H	121	43.21	11.09
10	7311.00	43.6 AV	54.0	-10.4	1.07 H	121	32.51	11.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.1 PK	74.0	-12.9	1.18 V	65	64.55	-3.45
2	2390.00	48.7 AV	54.0	-5.3	1.18 V	65	52.15	-3.45
3	*2437.00	105.9 PK			1.25 V	10	109.21	-3.31
4	*2437.00	97.4 AV			1.25 V	10	100.71	-3.31
5	2483.50	62.4 PK	74.0	-11.6	1.08 V	60	65.56	-3.16
6	2483.50	49.0 AV	54.0	-5.0	1.08 V	60	52.16	-3.16
7	4874.00	58.6 PK	74.0	-15.4	1.00 V	101	52.07	6.53
8	4874.00	47.1 AV	54.0	-6.9	1.00 V	101	40.57	6.53
9	7311.00	53.9 PK	74.0	-20.1	1.05 V	109	42.81	11.09
10	7311.00	43.2 AV	54.0	-10.8	1.05 V	109	32.11	11.09

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.5 PK			1.13 H	55	107.73	-3.23
2	*2462.00	96.4 AV			1.13 H	55	99.63	-3.23
3	2483.50	69.1 PK	74.0	-4.9	1.13 H	55	72.26	-3.16
4	2483.50	53.0 AV	54.0	-1.0	1.13 H	55	56.16	-3.16
5	4924.00	58.7 PK	74.0	-15.3	1.00 H	87	52.16	6.54
6	4924.00	47.4 AV	54.0	-6.6	1.00 H	87	40.86	6.54
7	7386.00	54.1 PK	74.0	-19.9	1.07 H	103	42.69	11.41
8	7386.00	43.4 AV	54.0	-10.6	1.07 H	103	31.99	11.41

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.0 PK			1.21 V	80	103.23	-3.23
2	*2462.00	92.1 AV			1.21 V	80	95.33	-3.23
3	2483.50	67.2 PK	74.0	-6.8	1.26 V	67	70.36	-3.16
4	2483.50	50.1 AV	54.0	-3.9	1.26 V	67	53.26	-3.16
5	4924.00	58.8 PK	74.0	-15.2	1.05 V	105	52.26	6.54
6	4924.00	47.2 AV	54.0	-6.8	1.05 V	105	40.66	6.54
7	7386.00	54.0 PK	74.0	-20.0	1.05 V	125	42.59	11.41
8	7386.00	43.5 AV	54.0	-10.5	1.05 V	125	32.09	11.41

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100036	Jan. 21, 2013	Jan. 20, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 11, 2013


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

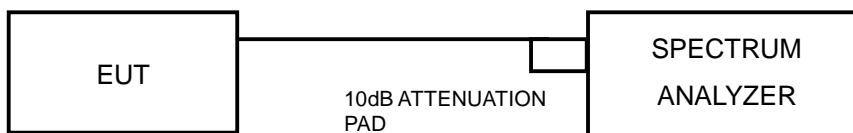

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	7.60	0.5	PASS
6	2437	7.95	0.5	PASS
11	2462	7.68	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	14.49	0.5	PASS
6	2437	15.19	0.5	PASS
11	2462	15.72	0.5	PASS

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.14	0.5	PASS
6	2437	15.22	0.5	PASS
11	2462	15.15	0.5	PASS

4.4 CONDUCTED OUTPUT POWER MEASUREMENT

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 20, 2013	May 19, 2014
Power Sensor	MA2411B	0738172	May 20, 2013	May 19, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 11, 2013


4.4.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

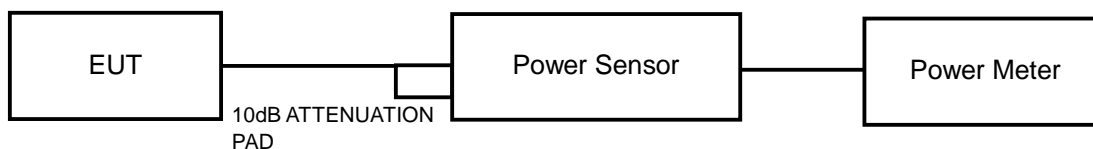

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.4.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	58.479	17.67	30	PASS
6	2437	54.576	17.37	30	PASS
11	2462	76.384	18.83	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	180.302	22.56	30	PASS
6	2437	200.447	23.02	30	PASS
11	2462	156.675	21.95	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	115.080	20.61	30	PASS
6	2437	172.187	22.36	30	PASS
11	2462	110.154	20.42	30	PASS

4.5 AVERAGE OUTPUT POWER

4.5.1 FOR REFERENCE.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 20, 2013	May 19, 2014
Power Sensor	MA2411B	0738172	May 20, 2013	May 19, 2014


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 11, 2013

4.5.3 TEST PROCEDURES

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.5.4 TEST SETUP

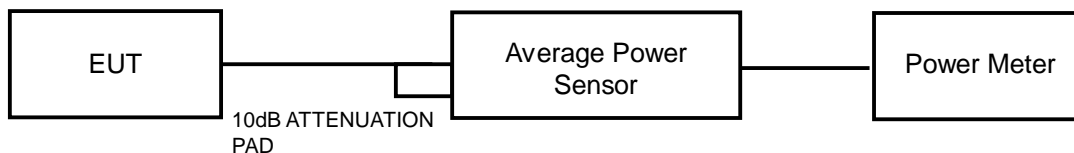

4.5.5 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.5.6 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	27.290	14.36
6	2437	26.242	14.19
11	2462	39.446	15.96

802.11g

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	21.677	13.36
6	2437	29.040	14.63
11	2462	18.793	12.74

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	16.293	12.12
6	2437	21.777	13.38
11	2462	14.622	11.65

4.6 POWER SPECTRAL DENSITY MEASUREMENT

4.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Jan. 21, 2013	Jan. 20, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 11, 2013


4.6.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW =10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

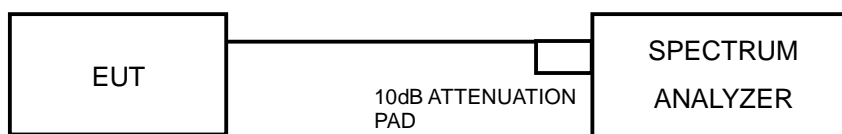

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.6.7 TEST RESULTS

802.11b

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-9.59	8	PASS
6	2437	-10.29	8	PASS
11	2462	-7.42	8	PASS

802.11g

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-11.92	8	PASS
6	2437	-10.51	8	PASS
11	2462	-14.36	8	PASS

802.11n (HT20)

Channel	FREQUENCY (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-14.10	8	PASS
6	2437	-11.90	8	PASS
11	2462	-13.20	8	PASS



A D T

4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.7.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Jan. 21, 2013	Jan. 20, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : June 11, 2013

4.7.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

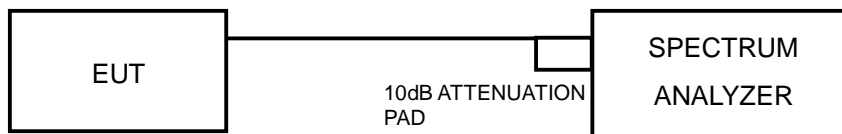

4.7.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.7.7 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b


CH 1

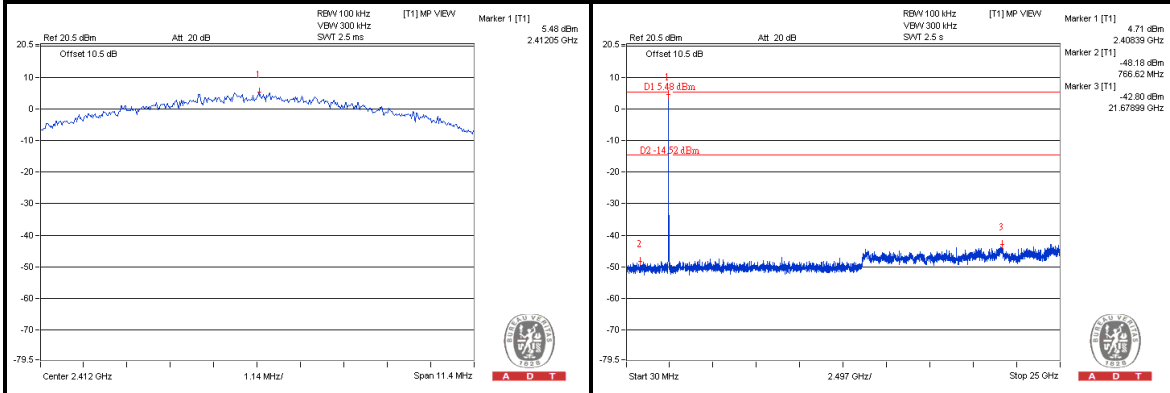

CH 6

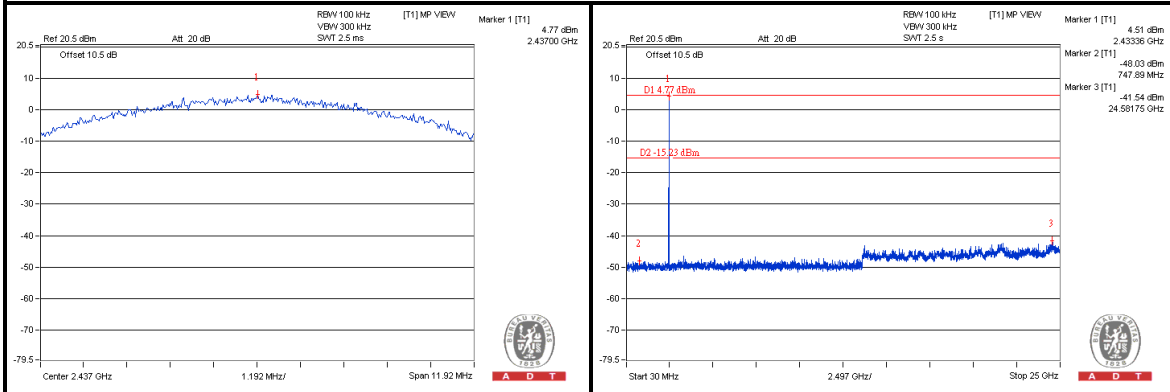

CH 11

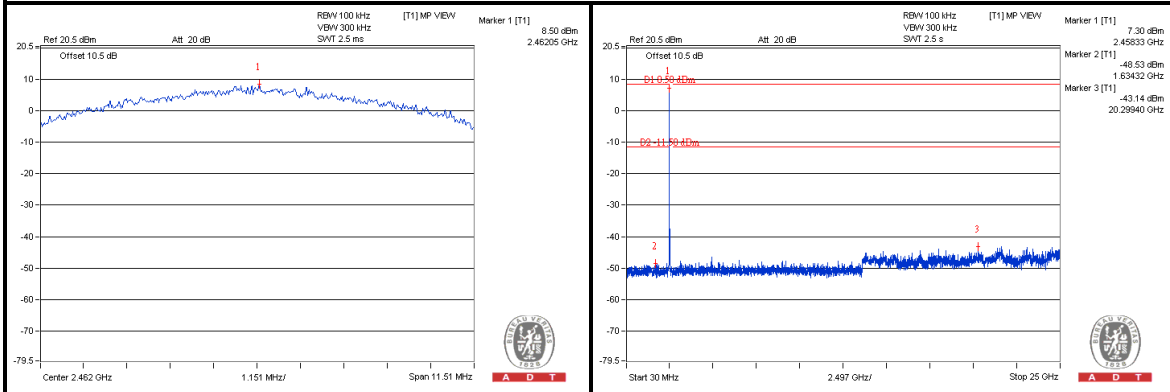





A D T

802.11g


CH 1

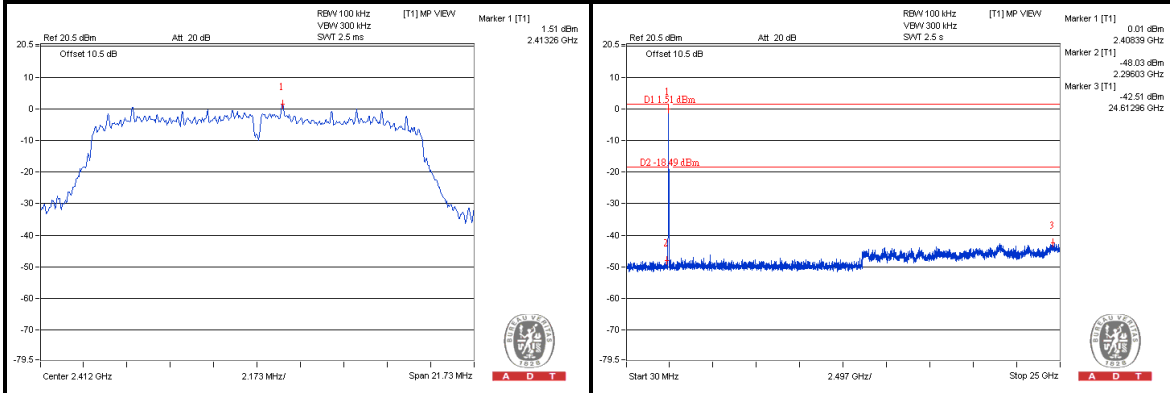

CH 6

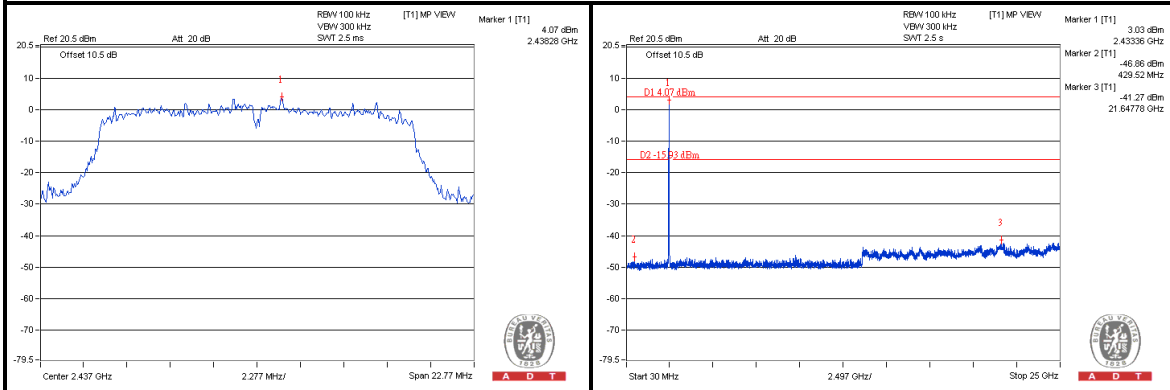

CH 11

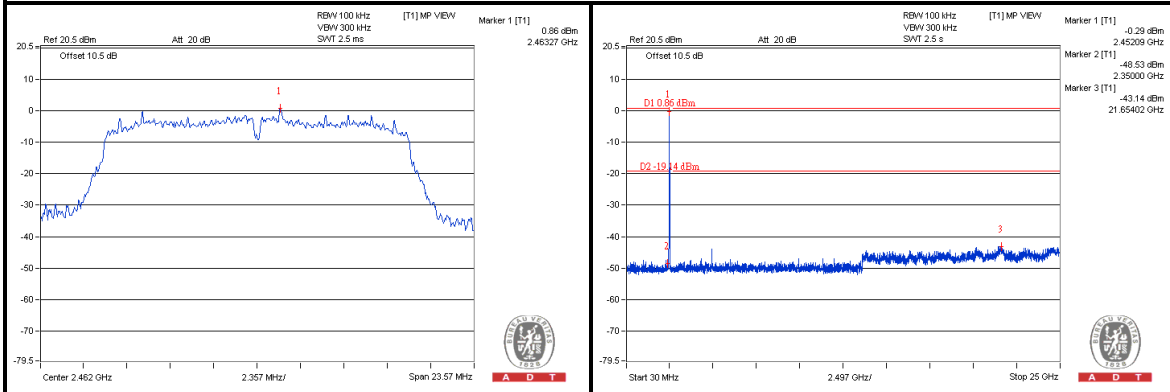





A D T

802.11n (HT20)


CH 1

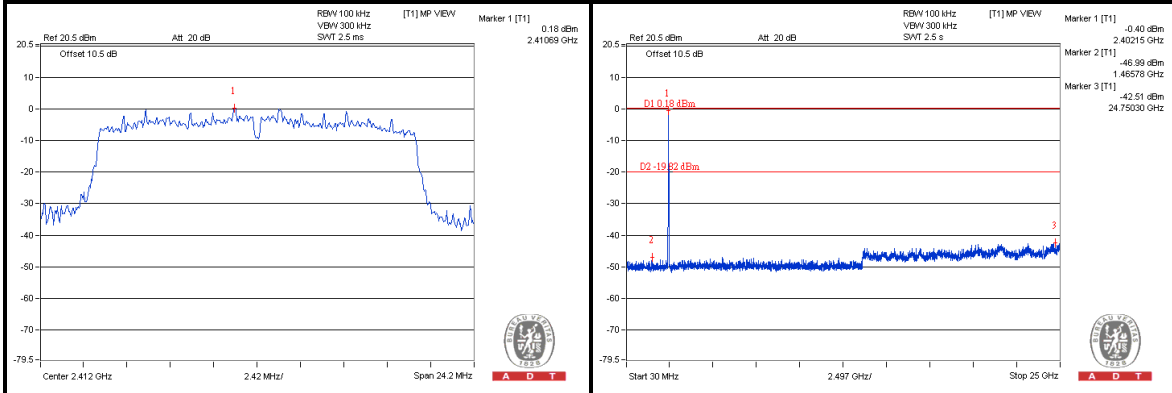

CH 6

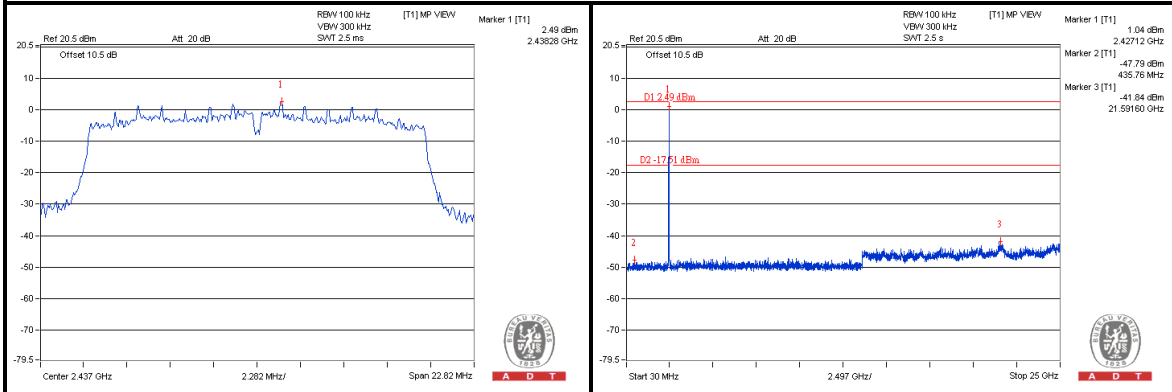

CH 11

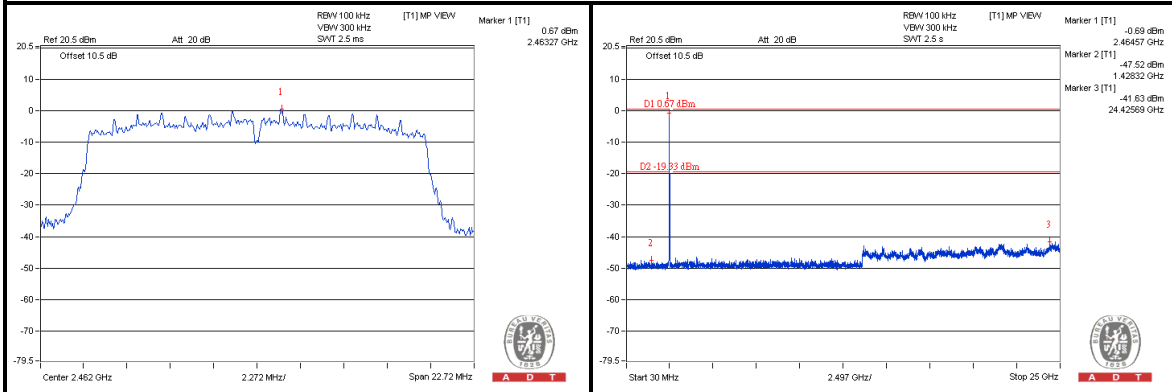




A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---