



FCC PART 22H/24E

TEST AND MEASUREMENT REPORT

For

ADC Telecommunications Inc.

P.O. Box 1101, Minneapolis, MN 55440, USA

FCC ID: NOO-F0691-312

Report Type: Original Report	Product Type: Remote Access Unit for InterReach Fusion System
Test Engineer: <u>Wei Sun</u> <i>Wei Sun</i>	
Report Number: <u>R1206146-2224</u>	
Report Date: <u>2012-07-18</u>	
Victor Zhang <i>Victor Zhang</i>	
Reviewed By: <u>EMC/RF Lead</u>	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" (Rev.3)

TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	MECHANICAL DESCRIPTION	5
1.3	OBJECTIVE.....	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY	5
1.6	MEASUREMENT UNCERTAINTY.....	6
1.7	TEST FACILITY.....	6
2	EUT TEST CONFIGURATION.....	7
2.1	JUSTIFICATION.....	7
2.2	EUT EXERCISE SOFTWARE.....	7
2.3	EQUIPMENT MODIFICATIONS	7
2.4	SPECIAL EQUIPMENT	7
2.5	LOCAL SUPPORT EQUIPMENT.....	7
2.6	INTERNAL CONFIGURATION.....	7
2.7	EXTERNAL I/O CABLING LIST AND DETAILS	7
3	SUMMARY OF TEST RESULTS.....	8
4	FCC §2.1046, §22.913 & §24.232 – RF OUTPUT POWER.....	9
4.1	APPLICABLE STANDARD	9
4.2	TEST PROCEDURE	9
4.3	TEST EQUIPMENT LIST AND DETAILS	9
4.4	TEST ENVIRONMENTAL CONDITIONS	9
4.5	TEST RESULTS	10
5	FCC §2.1049, §22.917 & §24.238 – OCCUPIED BANDWIDTH.....	13
5.1	APPLICABLE STANDARD	13
5.2	TEST PROCEDURE	13
5.3	TEST EQUIPMENT LIST AND DETAILS	13
5.4	TEST ENVIRONMENTAL CONDITIONS	13
5.5	TEST RESULTS	14
6	FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS.....	32
6.1	APPLICABLE STANDARD	32
6.2	TEST PROCEDURE	32
6.3	TEST EQUIPMENT LIST AND DETAILS	32
6.4	TEST ENVIRONMENTAL CONDITIONS	33
6.5	TEST RESULTS	33
7	FCC §2.1051, §22.917 & §24.238 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	34
7.1	APPLICABLE STANDARD	34
7.2	TEST PROCEDURE	34
7.3	TEST EQUIPMENT LIST AND DETAILS	34
7.4	TEST ENVIRONMENTAL CONDITIONS	34
7.5	TEST RESULTS	34
8	FCC §22.917 & §24.238 – BAND EDGE.....	58
8.1	APPLICABLE STANDARD	58
8.2	TEST PROCEDURE	58
8.3	TEST EQUIPMENT LIST AND DETAILS	58
8.4	TEST ENVIRONMENTAL CONDITIONS	58

8.5	TEST RESULTS	58
9	FCC §2.1055 – FREQUENCY STABILITY.....	75
9.1	APPLICABLE STANDARD	75
9.2	TEST PROCEDURE	75
9.3	TEST EQUIPMENT LIST AND DETAILS	75
9.4	TEST ENVIRONMENTAL CONDITIONS.....	75
9.5	TEST RESULTS	76
10	FCC §1.1307(B)(1) & §2.1091 – RF EXPOSURE INFORMATION.....	77
10.1	APPLICABLE STANDARD	77
10.2	MPE PREDICTION	77
11	EXHIBIT A - FCC ID LABELING REQUIREMENTS	79
11.1	FCC ID LABEL REQUIREMENTS.....	79
11.2	FCC ID LABEL CONTENTS AND LOCATION	79
12	EXHIBIT B - TEST SETUP PHOTOGRAPHS.....	80
12.1	RADIATED EMISSIONS - FRONT VIEW	80
12.2	RADIATED EMISSIONS - REAR VIEW (BELOW 1 GHz).....	80
12.3	RADIATED EMISSIONS - REAR VIEW (ABOVE 1 GHz).....	81
13	EXHIBIT C – EUT PHOTOGRAPHS.....	82
13.1	EUT - TOP VIEW.....	82
13.2	EUT - BOTTOM VIEW	82
13.3	EUT - FRONT VIEW	83
13.4	EUT – REAR VIEW	83
13.5	EUT - SIDE VIEW 1.....	84
13.6	EUT - SIDE VIEW 2.....	84
13.7	EUT – OPEN CASE VIEW	85
13.8	EUT – PCB BOARD VIEW 1.....	85
13.9	EUT – PCB BOARD VIEW 2.....	86

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1206146-2224	Original Report	2012-07-18

1 General Description

1.1 Product Description for Equipment under Test (EUT)

The *ADC Telecommunications Inc.* product, model: FSN-W2-088519-1, FCC ID: *NOO-F0691-312* or the “EUT” as referred to in this report, is a RAU for Indoor Wireless Repeater System. The system consists three modular components, the Main Hub (model number: FSN-W2-MH-1), Expansion Hub (model: FSN-W1-EH-2) and RAU-EUT (model: FSN-W2-808519-1). The downlink frequency bands are: Cellular Band: 869-894 MHz, PCS Band: 1930-1990 MHz and SMR band: 851-869 MHz. Modulation types are iDEN, FM, P25, C4FM, GSM/GPRS, EDGE, WCDMA/HSPA, CDMA/EVDO and LTE.

1.2 Mechanical Description

The EUT dimension is approximately 28.6cm (L) x 28.1cm (W) x 5.4cm (H) and weighs approximately 2.1 kg.

The test data gathered are from production sample. Serial number: M02001QT, provided by ADC Telecommunications Inc.

1.3 Objective

This type approval report is prepared on behalf of ADC Telecommunications Inc. in accordance with Part 22 Subpart H and Part 24 Subpart E, of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for RF output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, field strength of spurious radiation, frequency stability, band edge, and conducted and radiated spurious emissions.

1.4 Related Submittal(s)/Grant(s)

NA

1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part22 Subpart H and Part 24 Subpart E – Broadband PCS.

Applicable Standards: TIA/EIA 603-C

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2003, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2003, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for Laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionId=8430d44f1f47cf2996124343c704b367816b>

2 EUT Test Configuration

2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The final qualification test was performed with the EUT operating at normal mode.

2.2 EUT Exercise Software

N/A.

2.3 Equipment Modifications

No modifications were made to the EUT.

2.4 Special Equipment

No special equipment used during testing.

2.5 Local Support Equipment

Manufacturer	Description	Model	Serial Number
ADC Telecommunications Inc.	Main Hub	FSN-W2-MH-1	MR220TTA
ADC Telecommunications Inc.	Expansion Hub	FSN-W1-EH-2	FR2217V6

2.6 Internal Configuration

Manufacturer	Description	Model	Serial Number
ADC Telecommunications Inc.	Main PCB Board	FSN-W2-808519-1	M02001QT

2.7 External I/O Cabling List and Details

Cable Description	Length (m)	From	To
Shielded Detachable K/B Cable	150	Expansion Hub	RAU (EUT)
Fiber Cable	2.0	Main Hub	Expansion Hub

3 Summary of Test Results

FCC Rules	Description of Tests	Results
§2.1046 §22.913(a), §24.232	RF Output Power	Compliant
§2.1047	Modulation Characteristics	N/A*
§2.1049 §22.917, §24.238	Occupied Bandwidth / Out of Band Emissions	Compliant
§2.1053 §22.917, §24.238	Spurious Radiated Emissions	Compliant
§2.1051 §22.917, §24.238	Spurious Emissions at Antenna Terminals	Compliant
§24.238, §22.917	Band Edge	Compliant
§2.1055 §22.355, §24.235	Frequency Stability	Compliant
§2.1091	RF Exposure Information	Compliant

N/A: According to FCC §2.1047(d), Part 22H and Part 24E, there is no specific requirement for digital modulation and no oscillator circuit, therefore modulation characteristic is not presented.*

4 FCC §2.1046, §22.913 & §24.232 – RF Output Power

4.1 Applicable Standard


According to FCC §22.913 (a), the maximum effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts.

According to FCC §24.232, Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

4.2 Test Procedure

Conducted:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

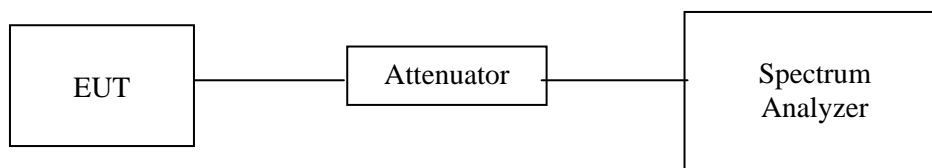

4.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09 ¹
Agilent	Signal Generator	E4438C	MY45091309	2012-05-03

Note 1: Based on a two year calibration cycle

Statement of Traceability: BA CL Corp. attests that all calibrations have been performed according to A2LA requirements, traceable to the NIST.

4.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	57 %
ATM Pressure:	101.4kPa

The testing was performed by Wei Sun on 2012-07-06 at RF Site.

4.5 Test Results

Maximum Output Power – Modulated Signal

GSM/GPRS

Mode		Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
GSM/GPRS	850 MHz Downlink	Low	869.2	13	25.24
		Middle	881.5	13	25.86
		High	893.8	13	25.29
	1900 MHz Downlink	Low	1930.2	14	26.05
		Middle	1960	14	26.13
		High	1989.8	17	26.02

EDGE

Mode		Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
EDGE	850 MHz Downlink	Low	869.2	5	21.58
		Middle	881.5	5	22.25
		High	893.8	5	21.64
	1900 MHz Downlink	Low	1930.2	9	23.43
		Middle	1960	9	23.62
		High	1989.8	9	23.03

CDMA/EVDO

Mode		Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
CDMA/EVDO	850 MHz Downlink	Low	869.8	5	18.34
		Middle	881.5	5	18.73
		High	893.2	5	18.26
	1900 MHz Downlink	Low	1930.8	8	18.45
		Middle	1960	8	18.60
		High	1989.2	9	18.47

WCDMA/HSPA

Mode		Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
WCDMA HSPA	850 MHz Downlink	Low	871.4	5	19.01
		Middle	881.5	5	18.96
		High	891.6	5	18.51
	1900 MHz Downlink	Low	1930.8	8	20.18
		Middle	1960	8	20.10
		High	1989.2	8	18.83

LTE – 850 MHz Downlink

Mode		Modulation	Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
LTE	850 MHz Downlink	QPSK (1.4 MHz)	Low	870	6	18.18
		QPSK (1.4 MHz)	Middle	881.5	6	18.52
		QPSK (1.4 MHz)	High	893	6	18.21
		16QAM (1.4 MHz)	Low	870	6	18.14
		16QAM (1.4 MHz)	Middle	881.5	6	18.49
		16QAM (1.4 MHz)	High	893	6	18.23
		64QAM (1.4 MHz)	Low	870	6	18.20
		64QAM (1.4 MHz)	Middle	881.5	6	18.53
		64QAM (1.4 MHz)	High	893	6	18.19
		QPSK (3 MHz)	Low	871	6	18.48
		QPSK (3 MHz)	Middle	881.5	6	18.58
		QPSK (3 MHz)	High	892	6	18.26
		16QAM (3 MHz)	Low	871	6	18.45
		16QAM (3 MHz)	Middle	881.5	6	18.51
		16QAM (3 MHz)	High	892	6	18.30
		64QAM (3 MHz)	Low	871	6	18.47
		64QAM (3 MHz)	Middle	881.5	6	18.55
		64QAM (3 MHz)	High	892	6	18.29
		QPSK (5 MHz)	Low	872	6	18.67
		QPSK (5 MHz)	Middle	881.5	6	18.59
		QPSK (5 MHz)	High	891	6	18.15
		16QAM (5 MHz)	Low	872	6	18.64
		16QAM (5 MHz)	Middle	881.5	6	18.58
		16QAM (5 MHz)	High	891	6	18.20
		64QAM (5 MHz)	Low	872	6	18.61
		64QAM (5 MHz)	Middle	881.5	6	18.60
		64QAM (5 MHz)	High	891	6	18.17
		QPSK (10 MHz)	Low	874	6	18.82
		QPSK (10 MHz)	Middle	881.5	6	18.59
		QPSK (10 MHz)	High	889	6	18.07
		16QAM (10 MHz)	Low	874	6	18.84
		16QAM (10 MHz)	Middle	881.5	6	18.53
		16QAM (10 MHz)	High	889	6	18.02
64QAM (10 MHz)	Low	874	6	18.80		
64QAM (10 MHz)	Middle	881.5	6	18.49		
64QAM (10 MHz)	High	889	6	18.00		

LTE – 1900 MHz Downlink

Mode		Modulation	Channel	Frequency (MHz)	Input Power (dBm)	Output Power (dBm)
LTE	1900 MHz Downlink	QPSK (1.4 MHz)	Low	1931	6	17.98
		QPSK (1.4 MHz)	Middle	1960	6	17.97
		QPSK (1.4 MHz)	High	1989	8	18.50
		16QAM (1.4 MHz)	Low	1931	6	17.96
		16QAM (1.4 MHz)	Middle	1960	6	17.99
		16QAM (1.4 MHz)	High	1989	8	18.47
		64QAM (1.4 MHz)	Low	1931	6	17.95
		64QAM (1.4 MHz)	Middle	1960	6	17.99
		64QAM (1.4 MHz)	High	1989	8	18.52
		QPSK (3 MHz)	Low	1932	6	18.01
		QPSK (3 MHz)	Middle	1960	6	18.11
		QPSK (3 MHz)	High	1988	8	18.74
		16QAM (3 MHz)	Low	1932	6	18.04
		16QAM (3 MHz)	Middle	1960	6	18.12
		16QAM (3 MHz)	High	1988	8	18.70
		64QAM (3 MHz)	Low	1932	6	18.04
		64QAM (3 MHz)	Middle	1960	6	18.17
		64QAM (3 MHz)	High	1988	8	18.69
		QPSK (5 MHz)	Low	1933	6	18.10
		QPSK (5 MHz)	Middle	1960	6	18.07
		QPSK (5 MHz)	High	1987	8	18.84
		16QAM (5 MHz)	Low	1933	6	18.14
		16QAM (5 MHz)	Middle	1960	6	18.04
		16QAM (5 MHz)	High	1987	8	18.81
		64QAM (5 MHz)	Low	1933	6	18.15
		64QAM (5 MHz)	Middle	1960	6	18.11
		64QAM (5 MHz)	High	1987	8	18.79
		QPSK (10 MHz)	Low	1935	6	18.60
		QPSK (10 MHz)	Middle	1960	6	18.37
		QPSK (10 MHz)	High	1985	8	19.37
		16QAM (10 MHz)	Low	1935	6	18.49
		16QAM (10 MHz)	Middle	1960	6	18.32
16QAM (10 MHz)	High	1985	8	19.31		
64QAM (10 MHz)	Low	1935	6	18.58		
64QAM (10 MHz)	Middle	1960	6	18.39		
64QAM (10 MHz)	High	1985	8	19.40		

5 FCC §2.1049, §22.917 & §24.238 – Occupied Bandwidth


5.1 Applicable Standard

Requirements: FCC §2.1049, §22.917 and §24.238.

5.2 Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 30 kHz (Cellular/PCS) and the 26 dB & 99% bandwidth was recorded.

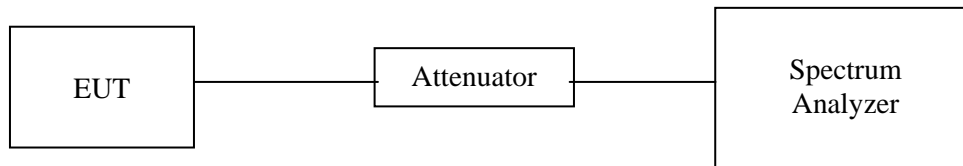

5.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09 ¹
Agilent	Signal Generator	E4438C	MY45091309	2012-05-03

Note 1: Based on a two year calibration cycle.

Statement of Traceability: BACL Corp. attests that all calibrations have been performed according to A2LA requirements, traceable to the NIST.

5.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	57 %
ATM Pressure:	101.4kPa

The testing was performed by Wei Sun on 2012-07-06 at RF Site.

5.5 Test Results

Mode		Channel	Frequency (MHz)	Emission Bandwidth Input (kHz)	Emission Bandwidth Output (kHz)
GSM GPRS	850 MHz Downlink	Middle	881.5	242.8854	244.2642
	1900 MHz Downlink	Middle	1960	243.3453	244.4588

Mode		Channel	Frequency (MHz)	Emission Bandwidth Input (kHz)	Emission Bandwidth Output (kHz)
EDGE	850 MHz Downlink	Middle	881.5	242.1712	248.0134
	1900 MHz Downlink	Middle	1960	245.6983	248.4641

Mode		Channel	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
CDMA EVDO	850 MHz Downlink	Middle	881.5	1.2638	1.2654
	1900 MHz Downlink	Middle	1960	1.2646	1.2628

Mode		Channel	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
WCDMA HSPA	850 MHz Downlink	Middle	881.5	4.2897	4.2881
	1900 MHz Downlink	Middle	1960	4.2857	4.2953

Mode		Modulation	Channel	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
LTE	850 MHz Downlink	QPSK (1.4 MHz)	Middle	881.5	1.0918	1.0899
		16QAM (1.4 MHz)	Middle	881.5	1.0911	1.0913
		64QAM (1.4 MHz)	Middle	881.5	1.0931	1.0928
		QPSK (3 MHz)	Middle	881.5	2.6909	2.6951
		16QAM (3 MHz)	Middle	881.5	2.6914	2.6942
		64QAM (3 MHz)	Middle	881.5	2.6902	2.6911
		QPSK (5 MHz)	Middle	881.5	4.4866	4.4904
		16QAM (5 MHz)	Middle	881.5	4.4775	4.4754
		64QAM (5 MHz)	Middle	881.5	4.4795	4.4826
		QPSK (10 MHz)	Middle	881.5	8.9477	8.9409
		16QAM (10 MHz)	Middle	881.5	8.9524	8.9347
		64QAM (10 MHz)	Middle	881.5	8.9447	8.9382


Mode		Modulation	Channel	Frequency (MHz)	Emission Bandwidth Input (MHz)	Emission Bandwidth Output (MHz)
LTE	1900 MHz Downlink	QPSK (1.4 MHz)	Middle	1960	1.0913	1.0927
		16QAM (1.4 MHz)	Middle	1960	1.0913	1.0918
		64QAM (1.4 MHz)	Middle	1960	1.0896	1.0916
		QPSK (3 MHz)	Middle	1960	2.6934	2.6938
		16QAM (3 MHz)	Middle	1960	2.6910	2.6940
		64QAM (3 MHz)	Middle	1960	2.6914	2.6936
		QPSK (5 MHz)	Middle	1960	4.4894	4.4779
		16QAM (5 MHz)	Middle	1960	4.4734	4.4851
		64QAM (5 MHz)	Middle	1960	4.4846	4.4835
		QPSK (10 MHz)	Middle	1960	8.9465	8.9456
		16QAM (10 MHz)	Middle	1960	8.9409	8.9543
		64QAM (10 MHz)	Middle	1960	8.9474	8.9468

Please refer to the following plots.


Cellular Band, Downlink

GSM/GPRS (Middle Channel)

Input

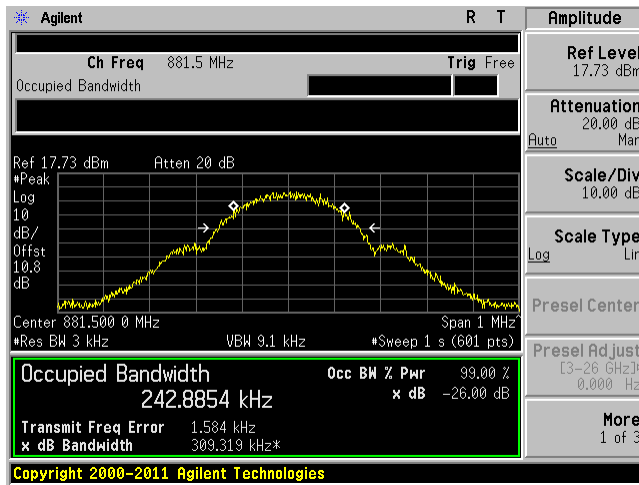


Output

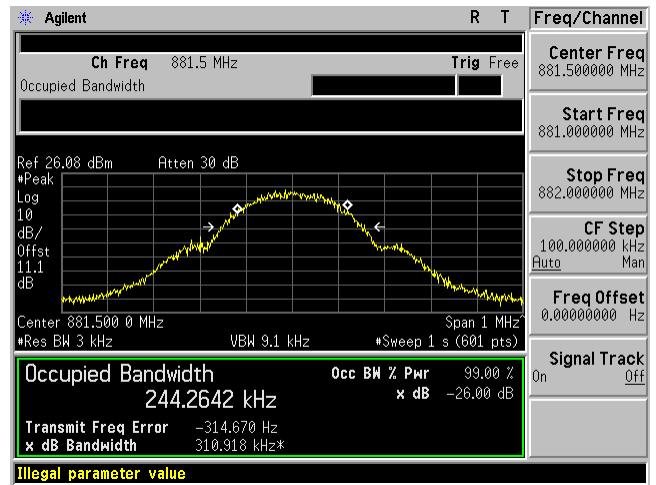


EDGE (Middle Channel)

Input

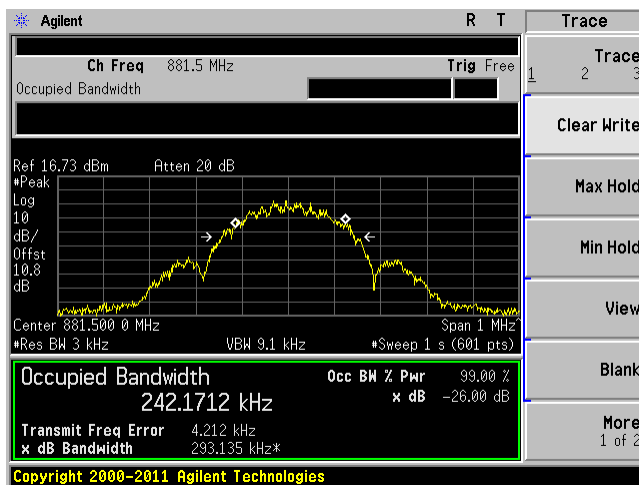


Output

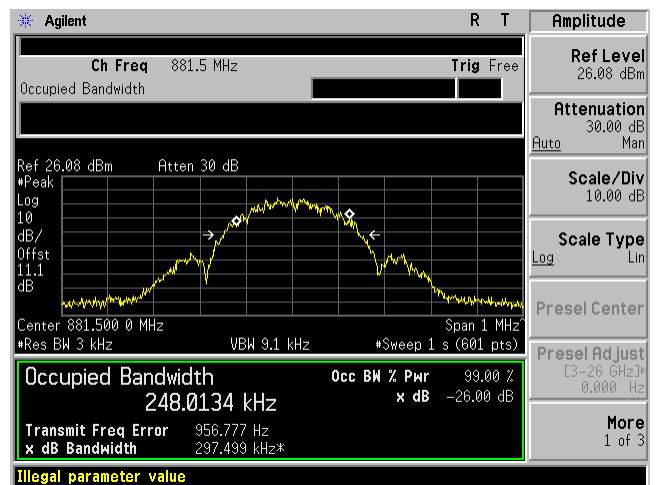


CDMA/EVDO (Middle Channel)

Input

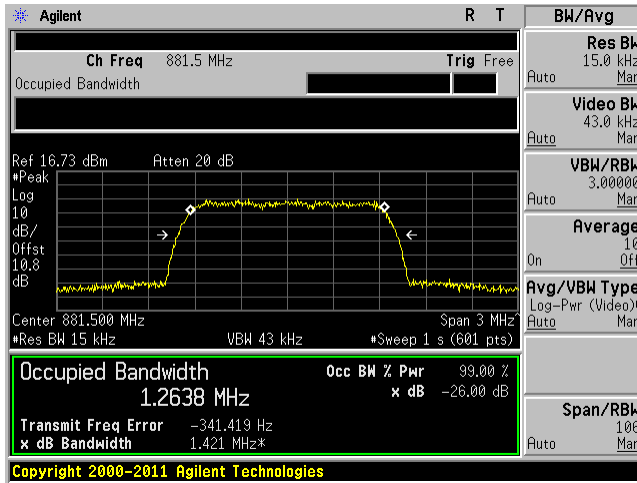


Output

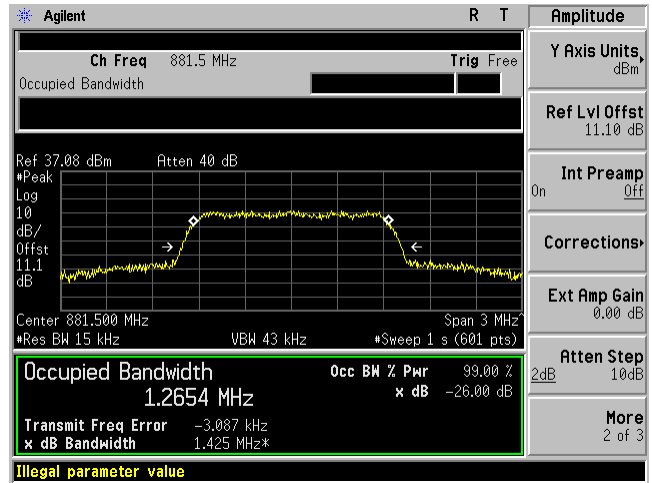


WCDMA/HSPA (Middle Channel)

Input

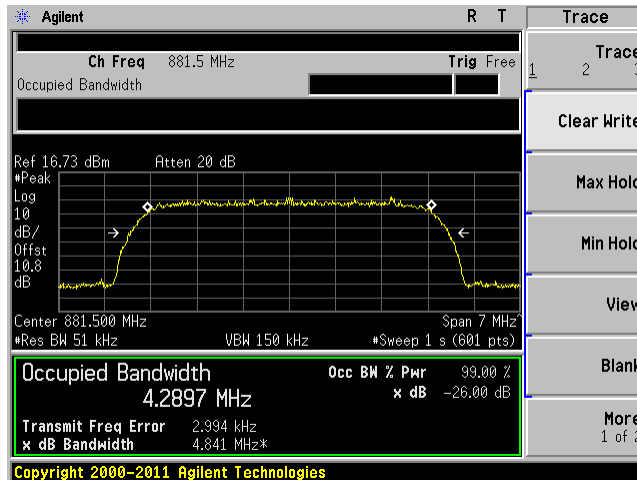


Output

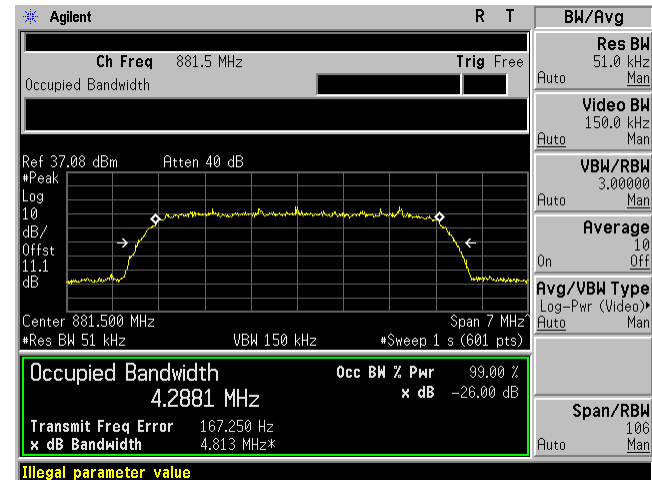


QPSK 1.4 MHz (Middle Channel)

Input

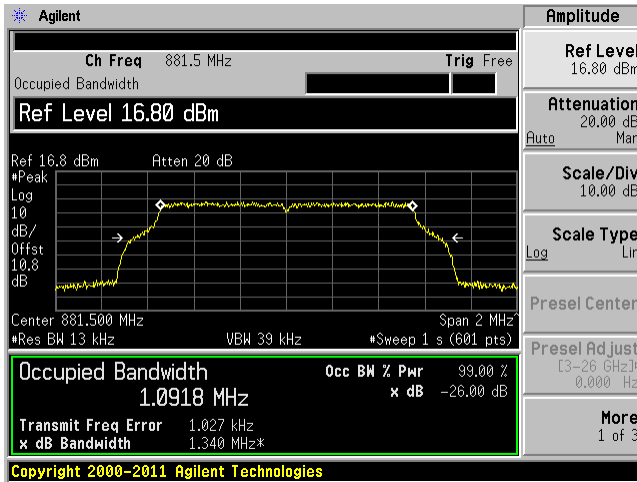


Output

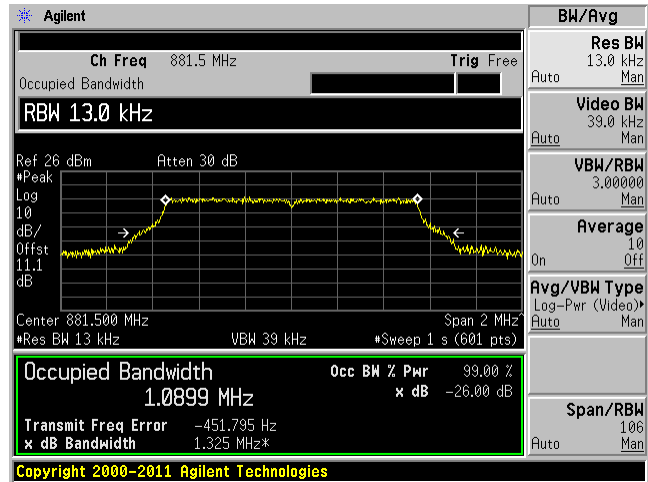


16QAM 1.4 MHz (Middle Channel)

Input

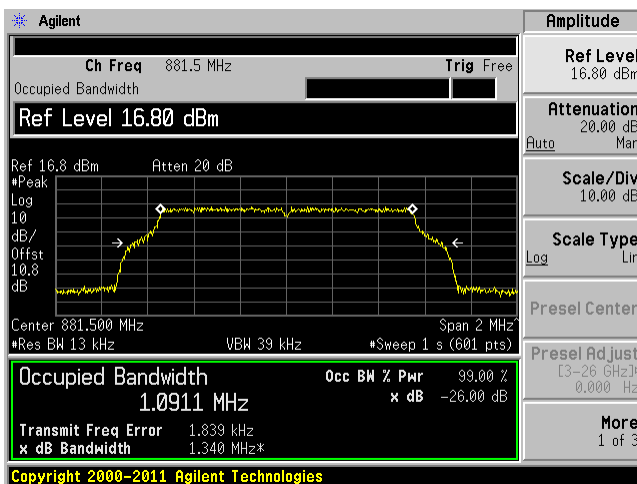


Output

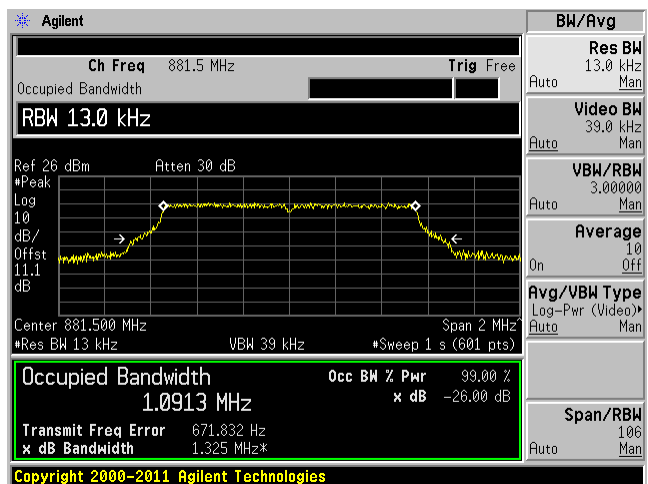


64QAM 1.4 MHz (Middle Channel)

Input

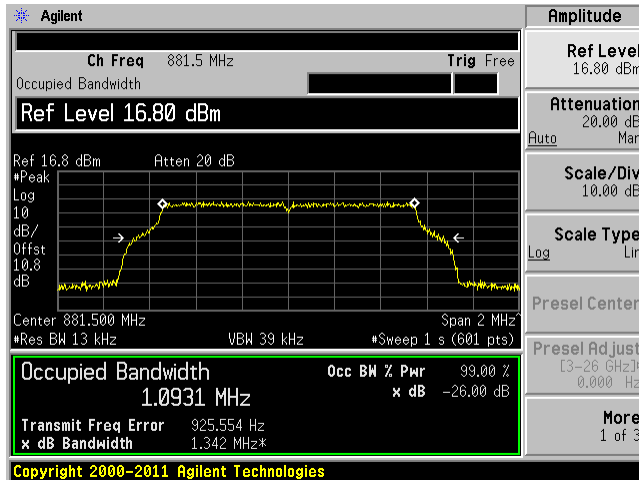


Output

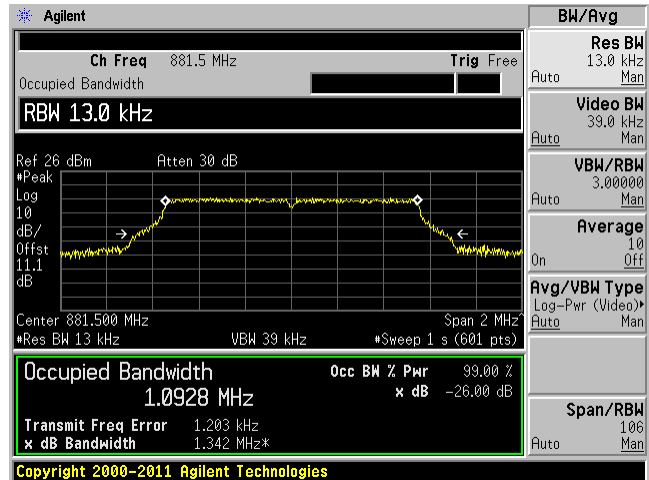


QPSK 3 MHz (Middle Channel)

Input

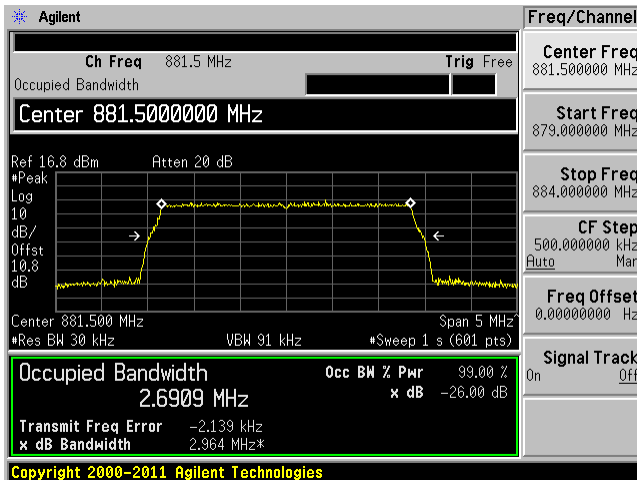


Output

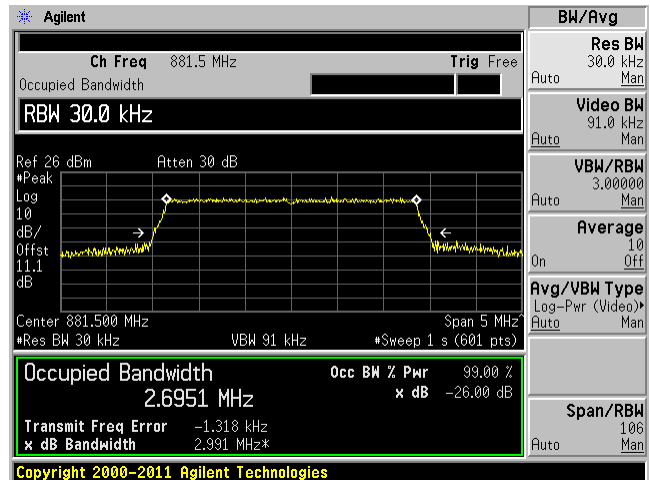


16QAM 3 MHz (Middle Channel)

Input

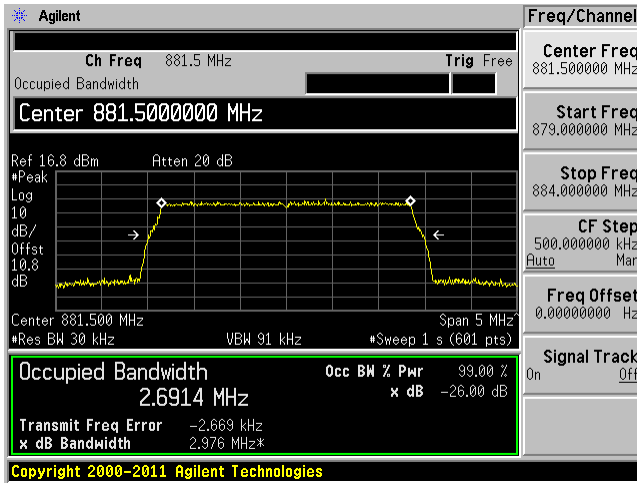


Output

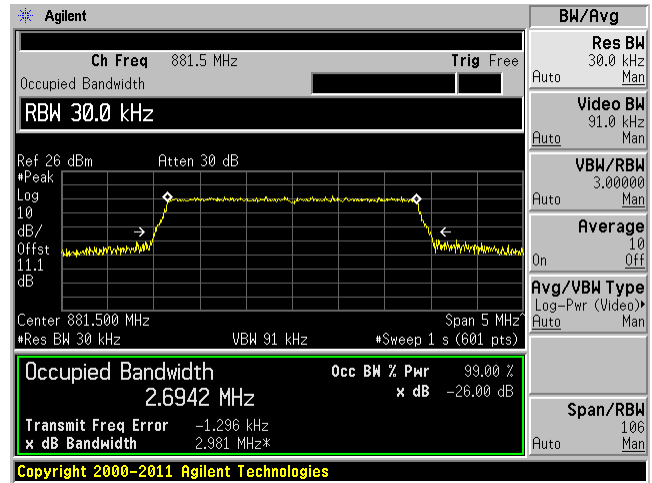


64QAM 3 MHz (Middle Channel)

Input

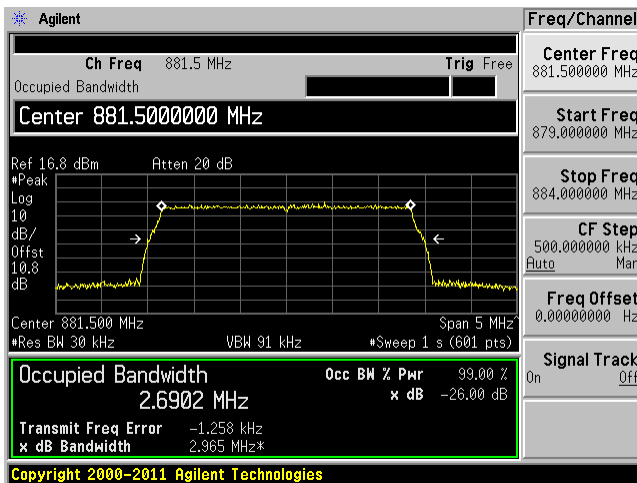


Output

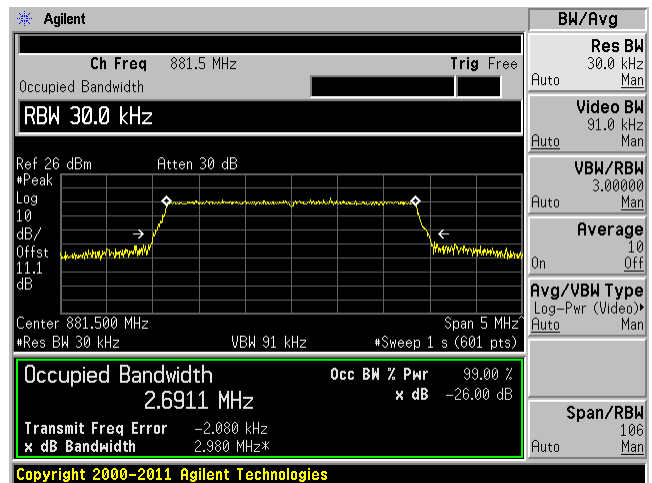


QPSK 5 MHz (Middle Channel)

Input

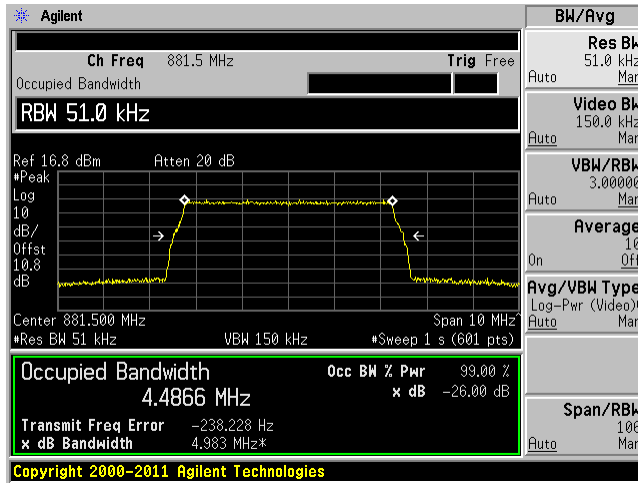


Output

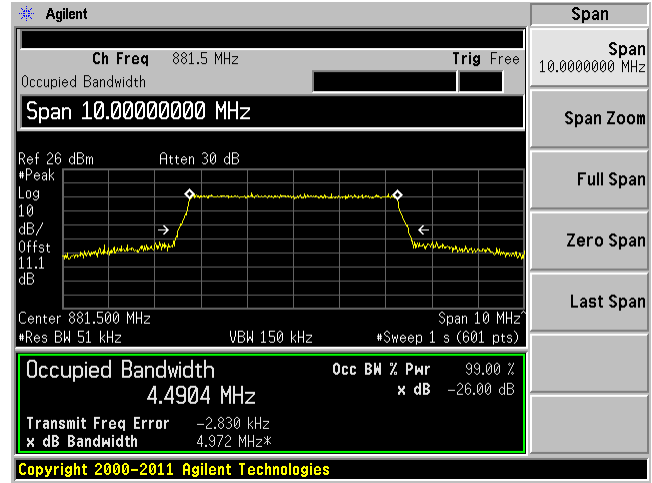


16QAM 5 MHz (Middle Channel)

Input

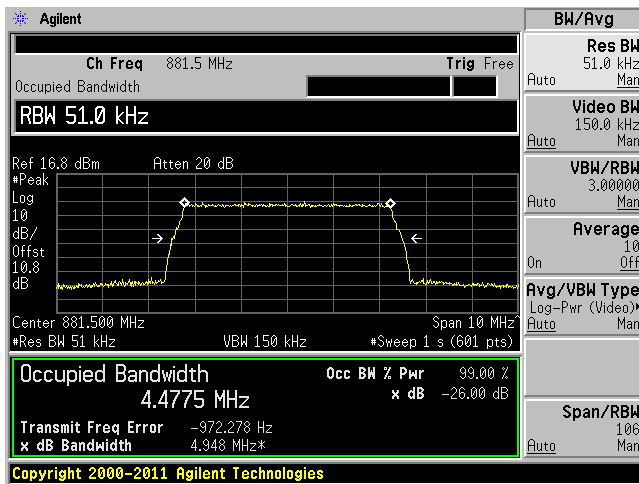



Output

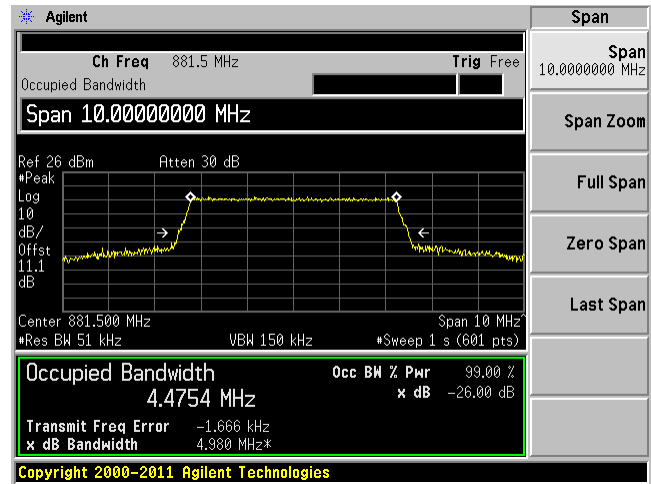

64QAM 5 MHz (Middle Channel)

Input



Output

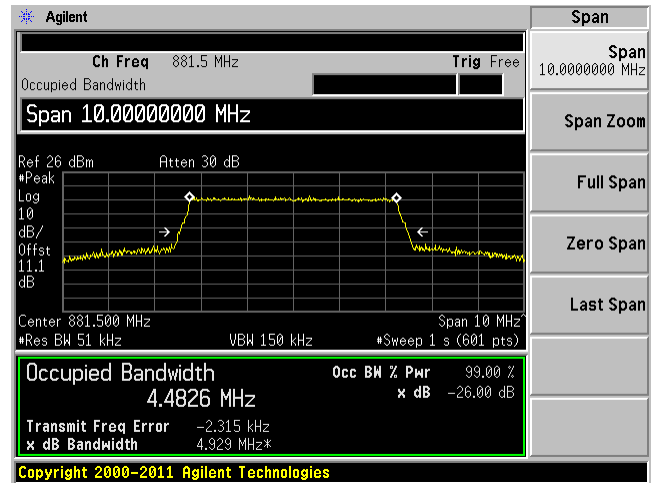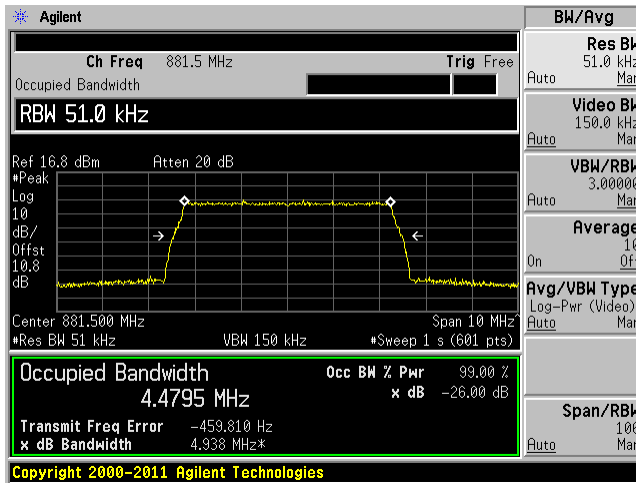

QPSK 10 MHz (Middle Channel)


Input

Output

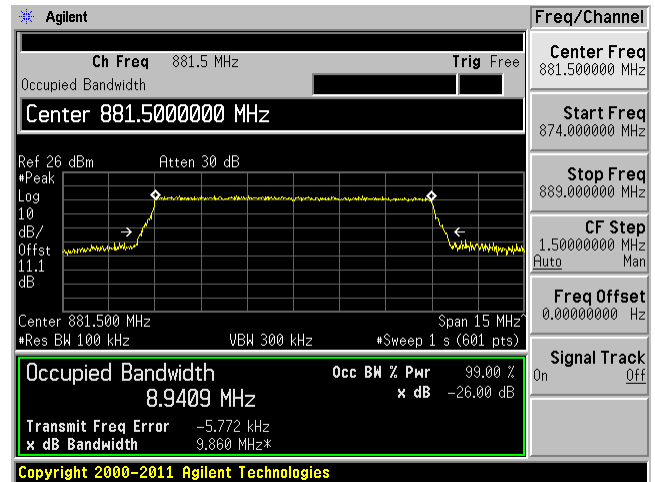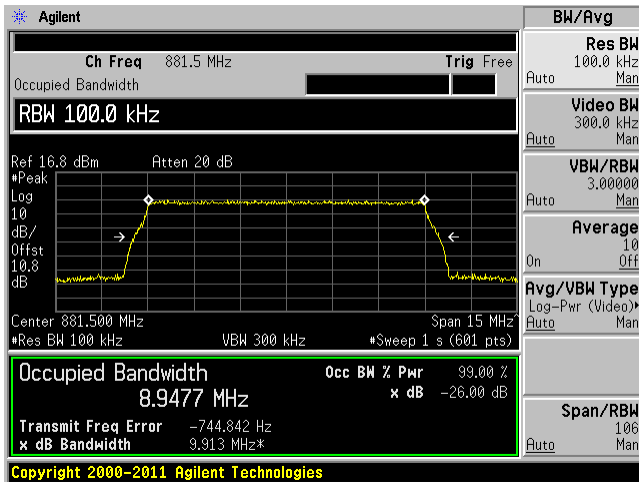


16QAM 10 MHz (Middle Channel)

Input

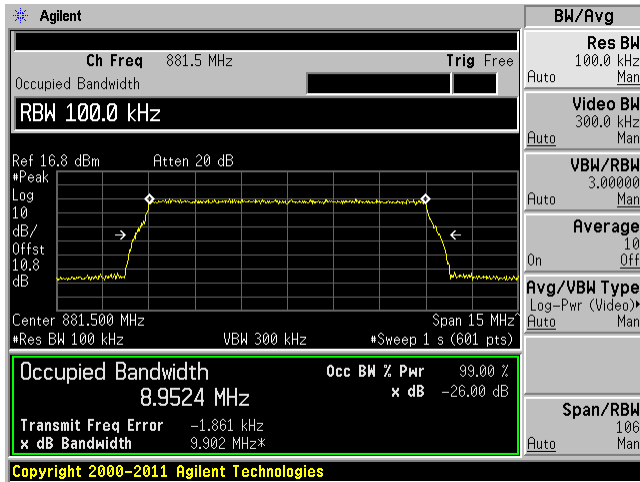


Output

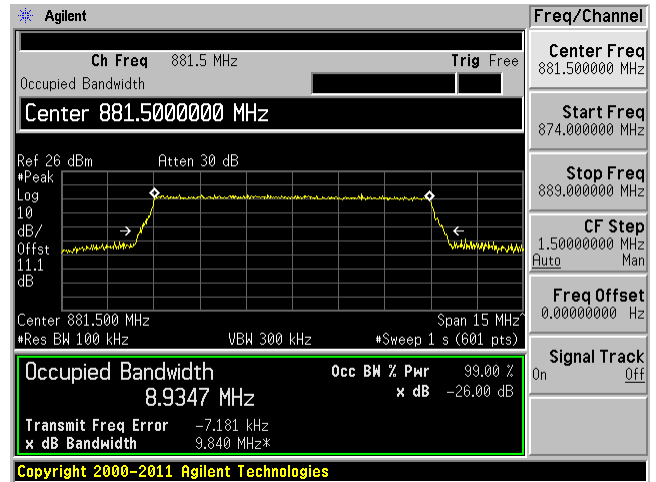


64QAM 10 MHz (Middle Channel)

Input

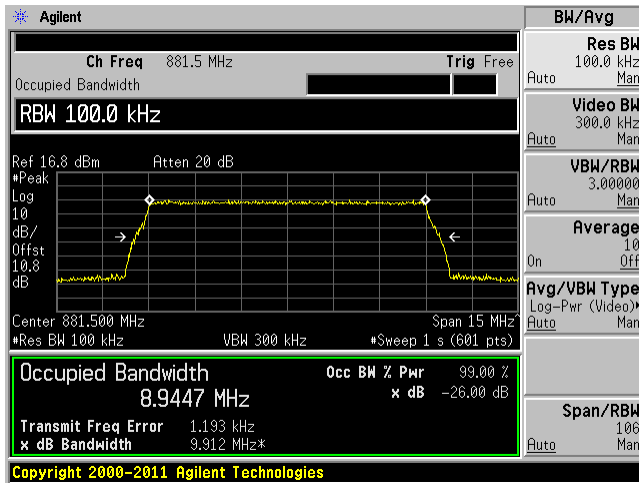


Output

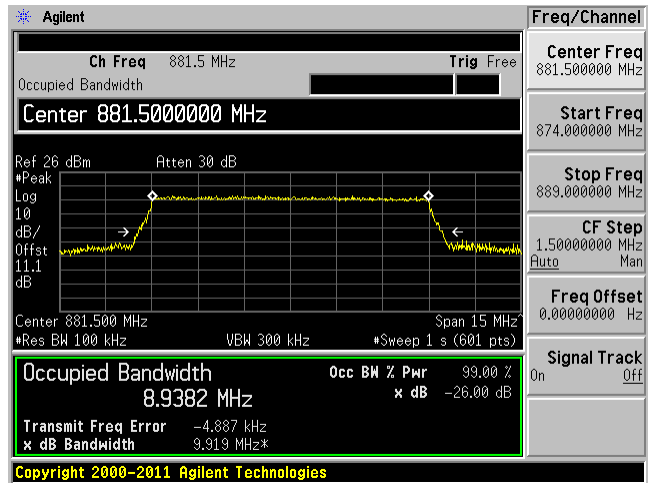


PCS Band, Downlink

GSM/GPRS (Middle Channel)

Input

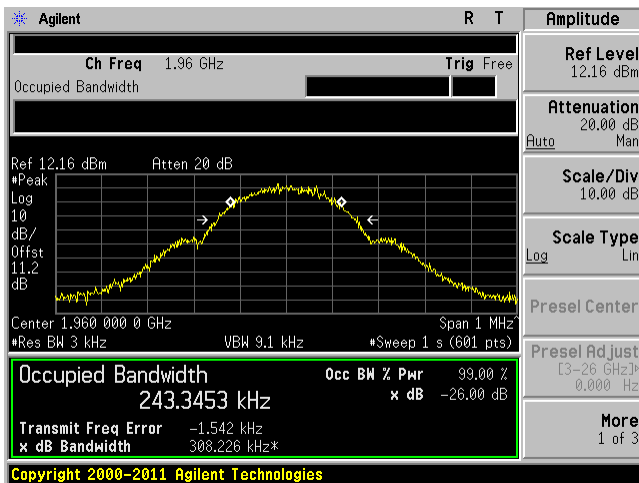


Output

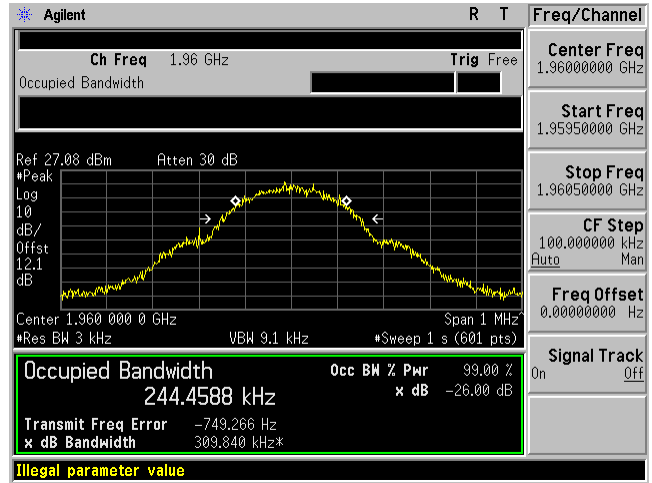


EDGE (Middle Channel)

Input

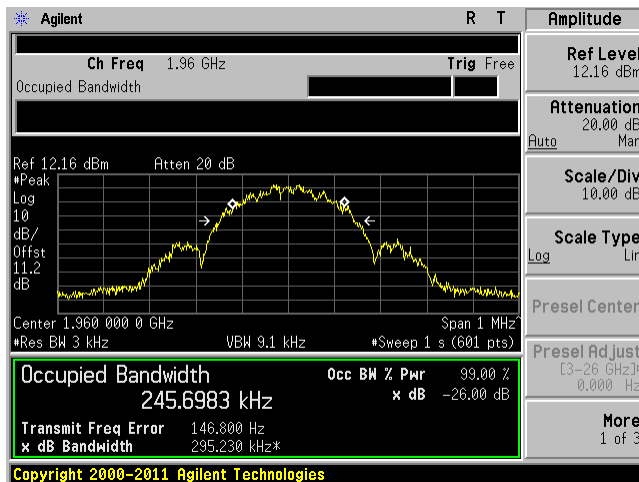


Output

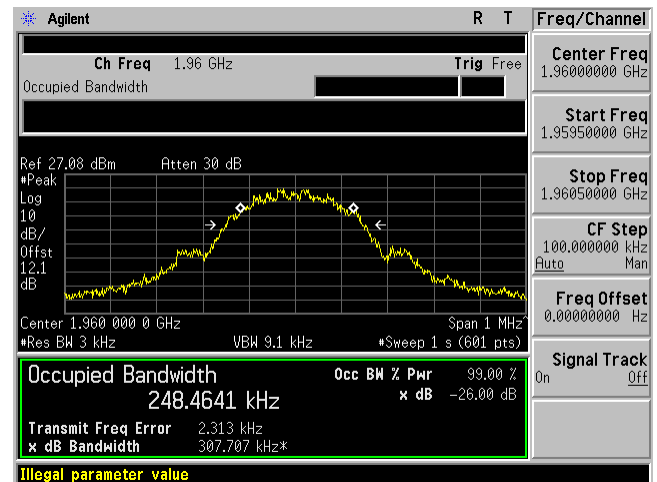


CDMA/EVDO (Middle Channel)

Input

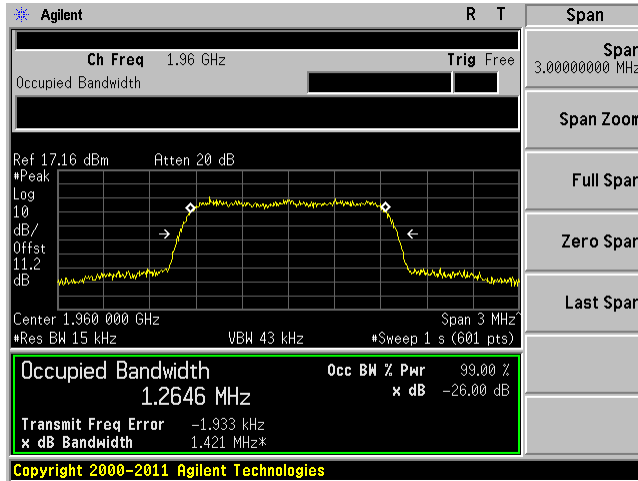


Output

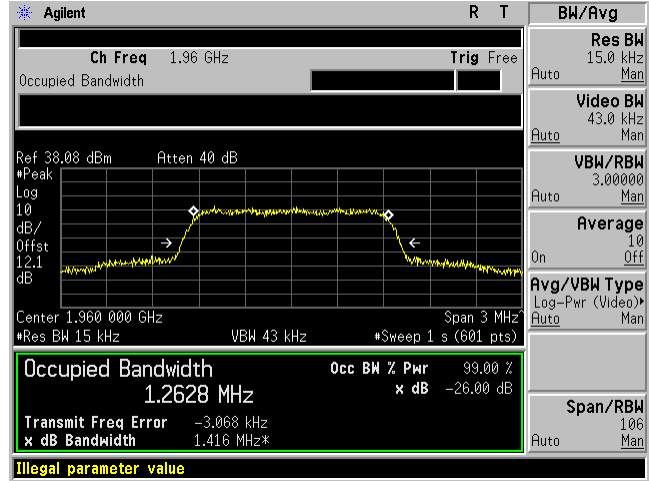


WCDMA/HSPA (Middle Channel)

Input

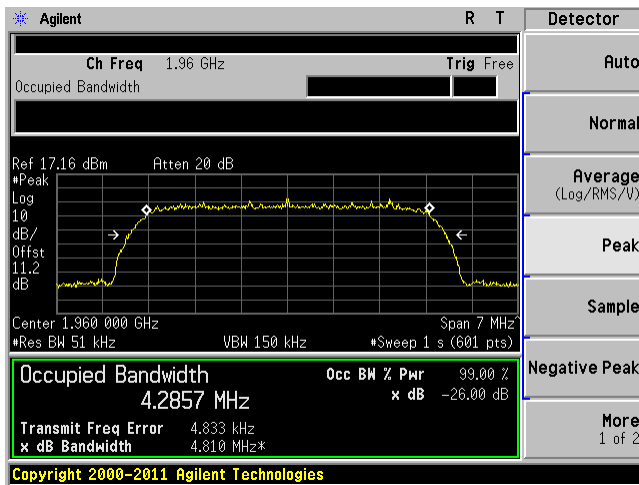


Output

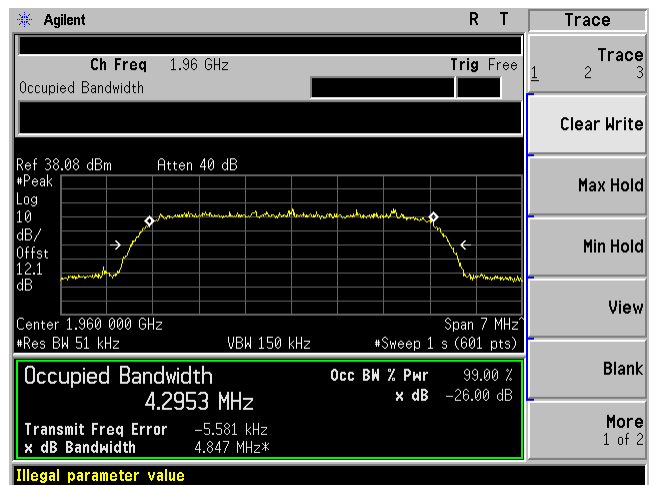


QPSK 1.4 MHz (Middle Channel)

Input

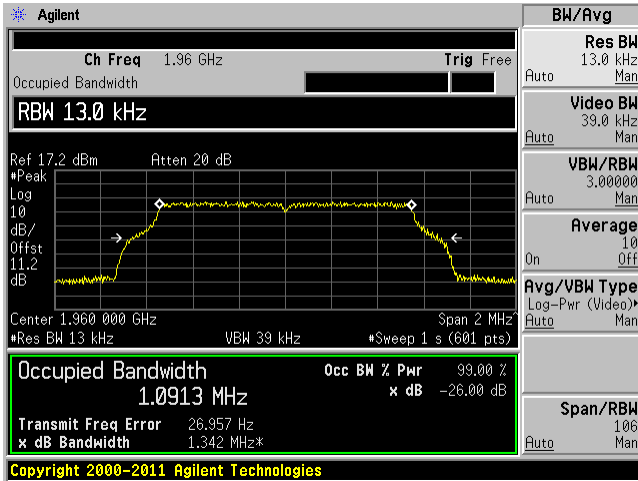


Output

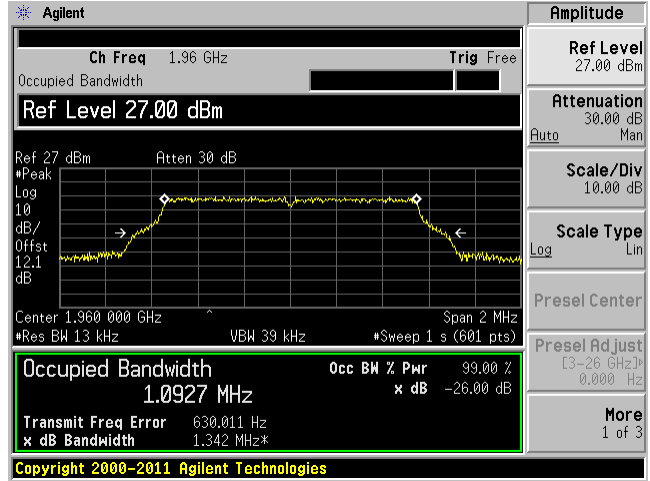


16QAM 1.4 MHz (Middle Channel)

Input

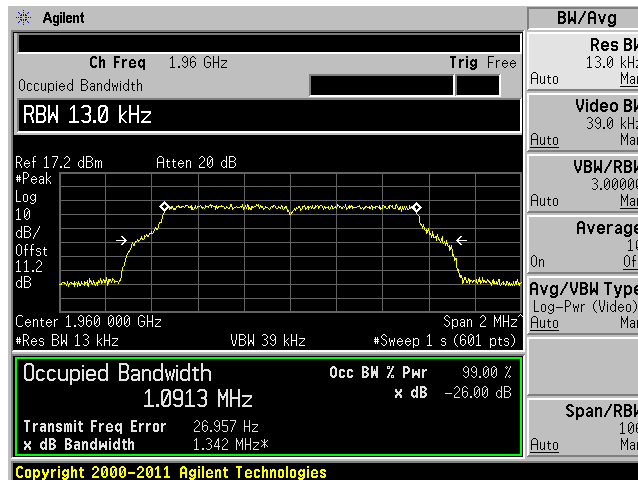


Output

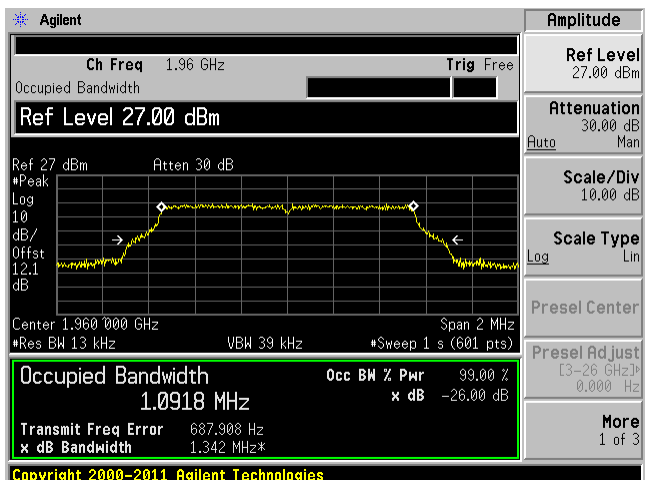


64QAM 1.4 MHz (Middle Channel)

Input

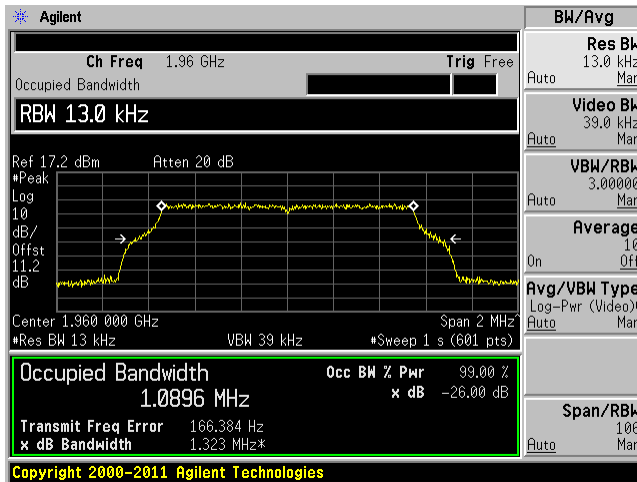


Output

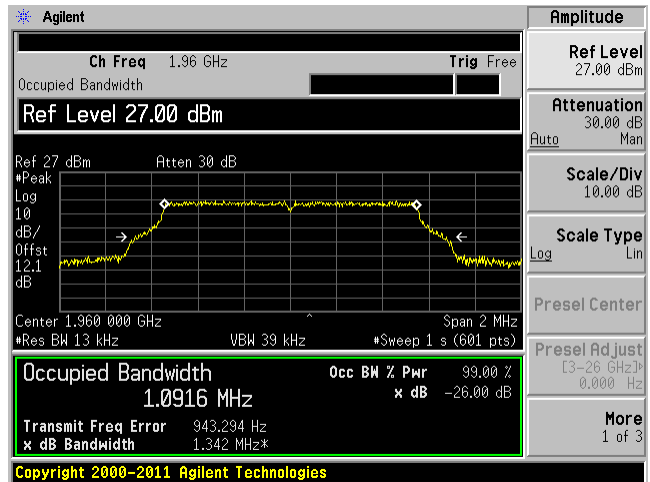


QPSK 3 MHz (Middle Channel)

Input

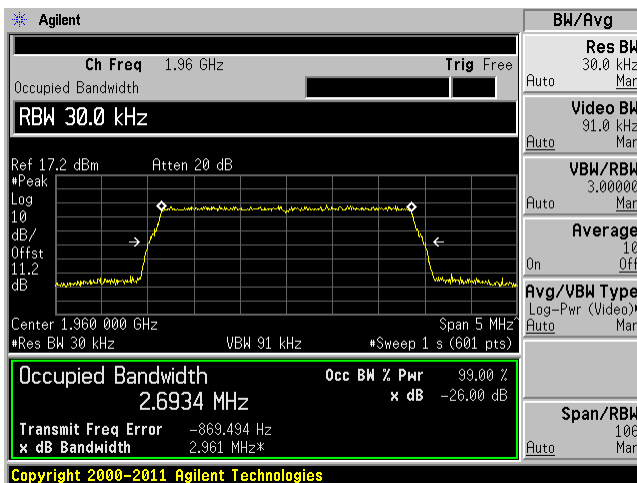


Output

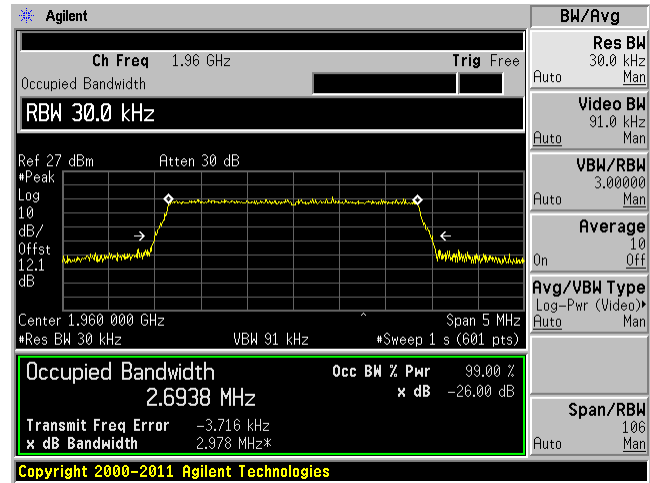


16QAM 3 MHz (Middle Channel)

Input

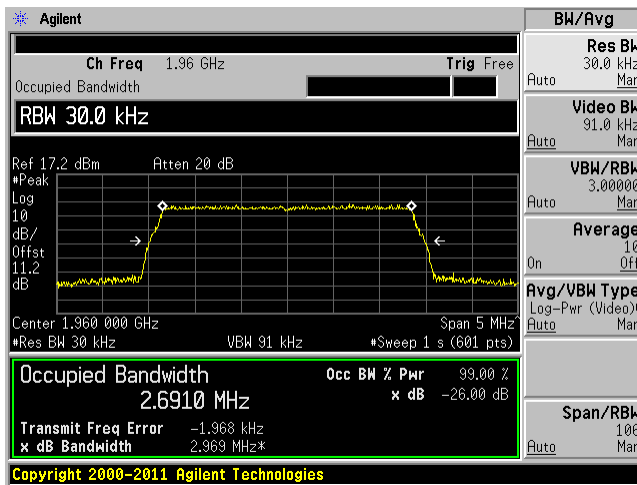


Output

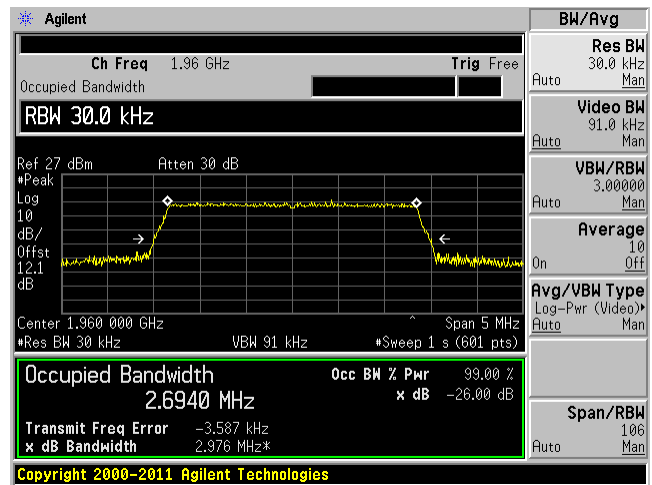


64QAM 3 MHz (Middle Channel)

Input

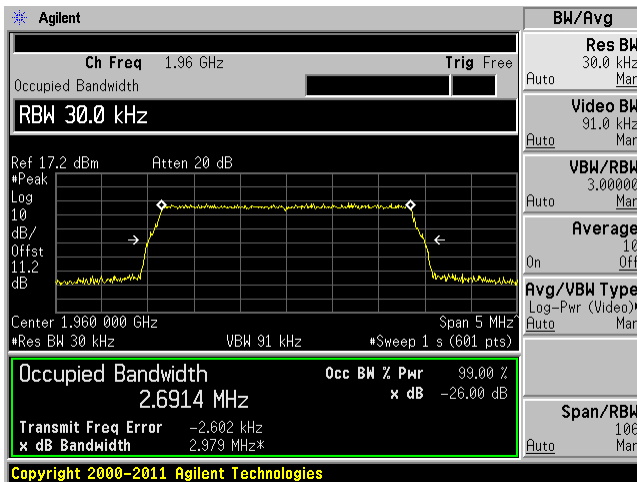


Output

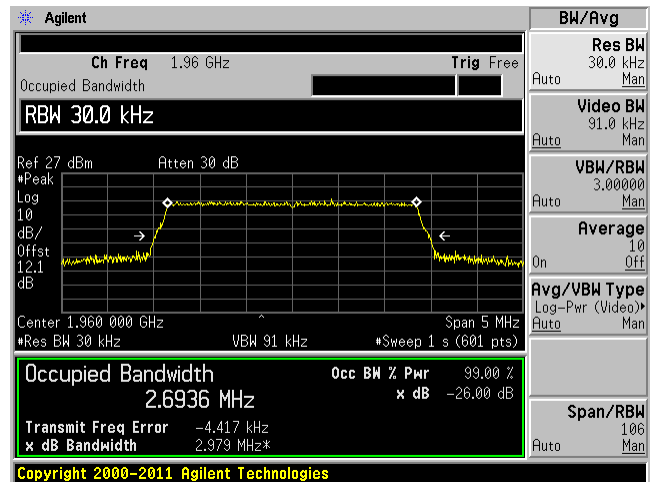


QPSK 5 MHz (Middle Channel)

Input

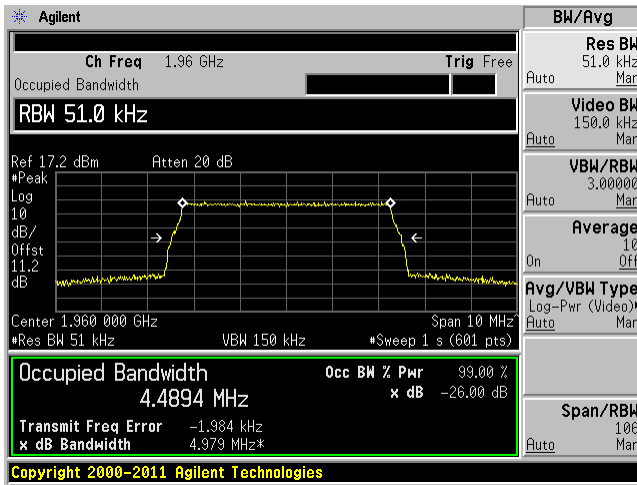


Output

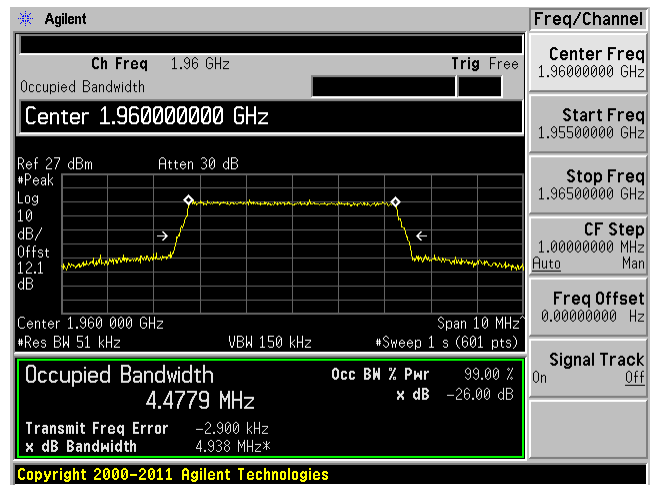


16QAM 5 MHz (Middle Channel)

Input

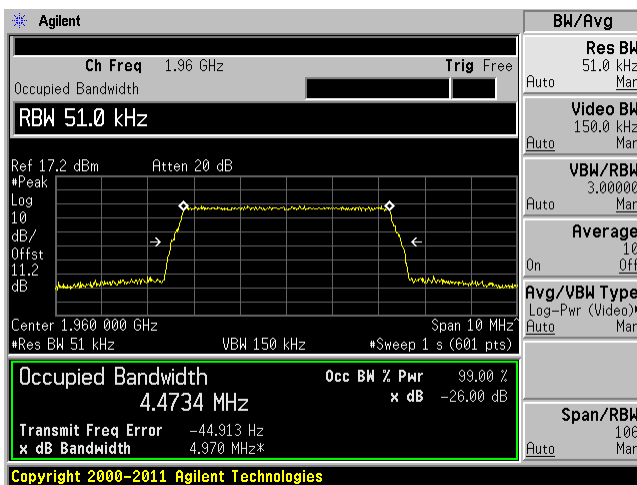


Output

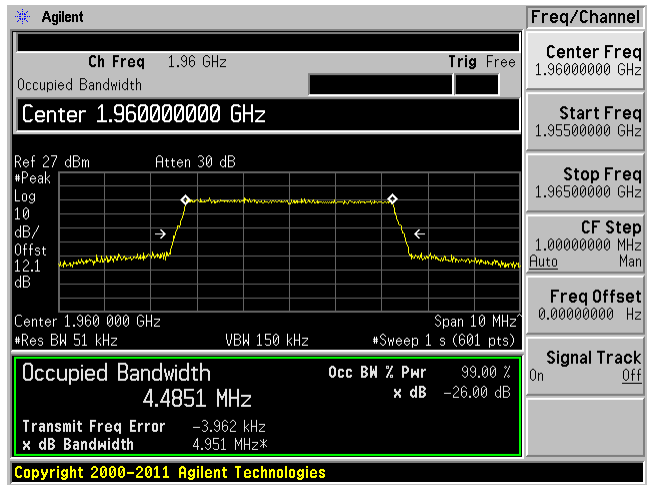


64QAM 5 MHz (Middle Channel)

Input

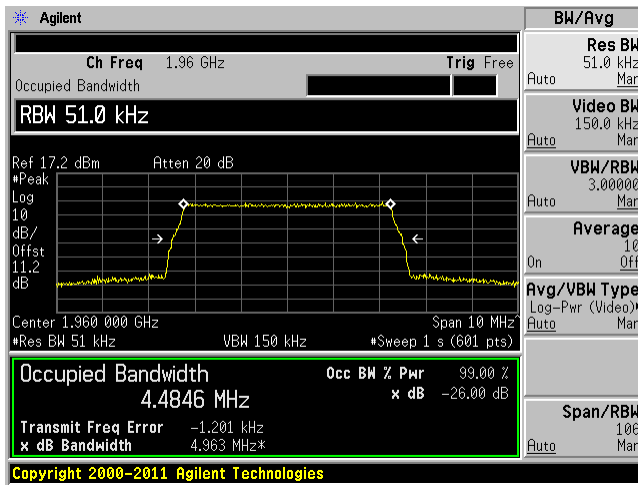


Output

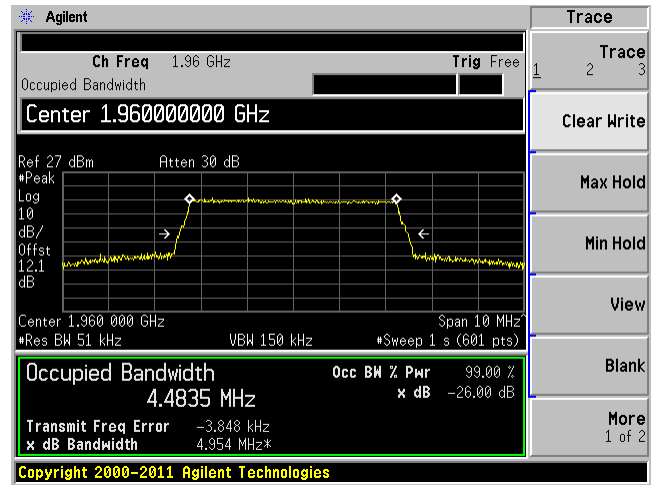


QPSK 10 MHz (Middle Channel)

Input

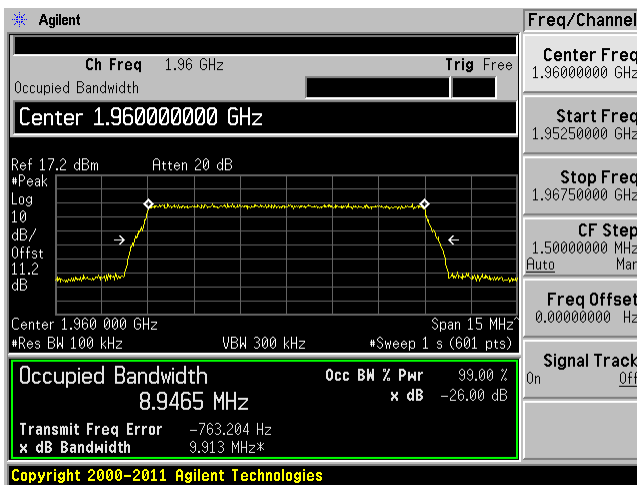



Output

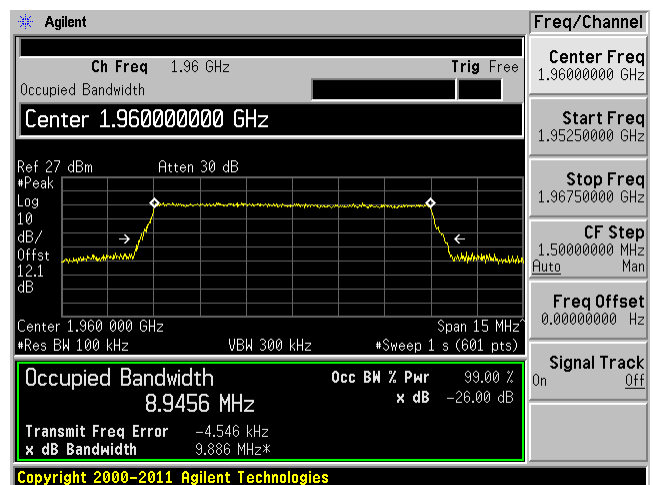

16QAM 10 MHz (Middle Channel)

Input



Output

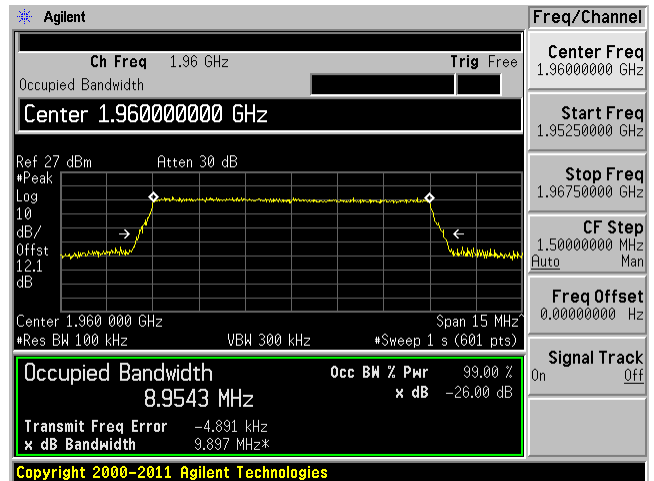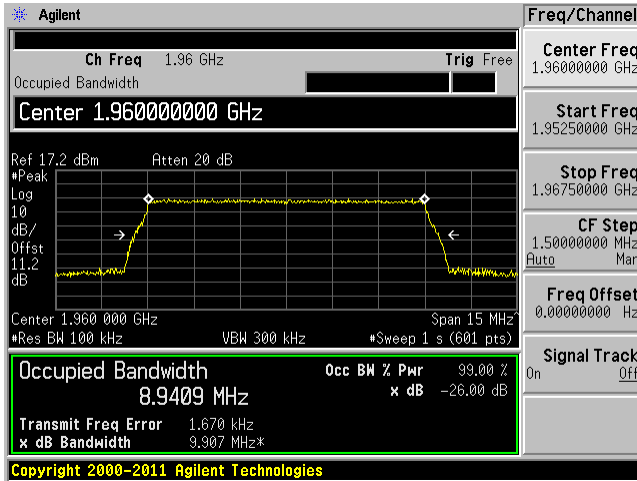

64QAM 10 MHz (Middle Channel)

Input

Output

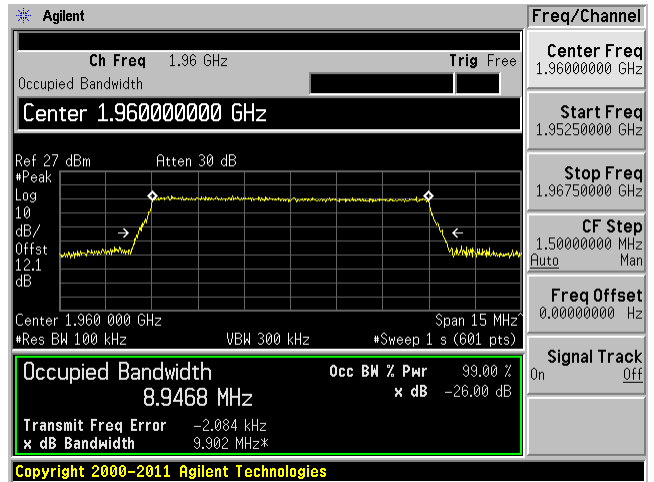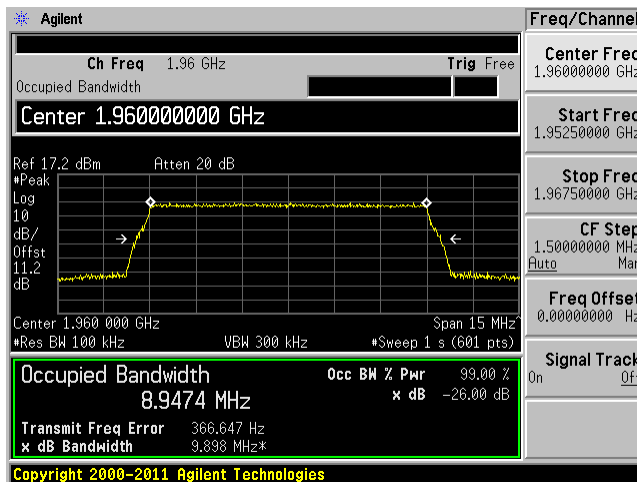

6 FCC §2.1053, §22.917 & §24.238 - Spurious Radiated Emissions

6.1 Applicable Standard

Requirements: FCC §2.1053, §22.917 and §24.238.

6.2 Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 log (TX Power in Watts/0.001) – the absolute level

Spurious attenuation limit in dB = 43 + 10 Log10 (power out in Watts)

6.3 Test Equipment List and Details

Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09 ¹
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
Sunol Science Corp	Combination Antenna	JB3	A020106-2	2011-08-10
Hewlett Packard	Pre-amplifier	8447D	2944A10187	2012-03-08
Eaton	Horn antenna	96001	Mar-07	2011-10-03
A.H. Systems	Horn antenna	SAS-200/571	261	2012-01-18
Mini-Circuits	Pre-amplifier	ZVA-183-S	667400960	2012-05-08
HP	Signal Generator	8648C	3426A00417	2011-08-18
HP	Signal Generator	83650B	3614A00276	2010-06-21 ¹

Note 1: Based on a two year calibration cycle.

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

6.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	101.79kPa

The testing was performed by Wei Sun from 2012-06-25 in 5 meters Chamber 3.

6.5 Test Results

PCS Band, Middle Channel 1960 MHz

Indicated		Turntable Azimuth Degrees	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
3940	64.01	340	155	V	860	-36.78	11.18	4.08	-29.68	-13	-16.68
3940	60.95	125	155	H	860	-40.31	11.18	4.08	-33.21	-13	-20.21

Cellular Band, Middle Channel 881.5 MHz

Indicated		Turntable Azimuth Degrees	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dB)	Cable Loss (dB)	Absolute Level (dBm)		
-	-	-	-	-	-	-	-	-	-	-	- ¹
-	-	-	-	-	-	-	-	-	-	-	- ¹

¹ Note: all emissions are in the level of noise floor and/or 20 dB below the limit.

7 FCC §2.1051, §22.917 & §24.238 - Spurious Emissions at Antenna Terminals


7.1 Applicable Standard

Requirements: FCC §2.1051, §22.917 and §24.238.

The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1057.

7.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

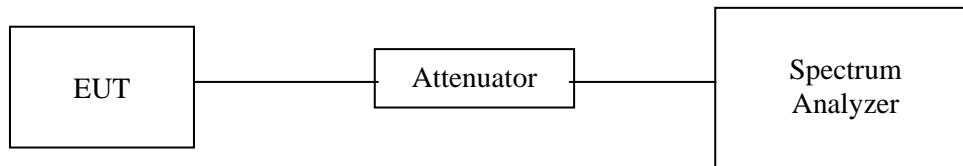

7.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09 ¹
Agilent	Signal Generator	E4438C	MY45091309	2012-05-03

Note 1: Based on a two year calibration cycle.

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed according to A2LA requirements, traceable to the NIST.

7.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	57 %
ATM Pressure:	101.4kPa

The testing was performed by Wei Sun on 2012-07-07 at RF Site.



7.5 Test Results

Please refer to the following plots.

Cellular Band Downlink, Middle Channel: 881.5 MHz

Plot 1: 30 MHz to 1 GHz



Plot 2: Above 1 GHz

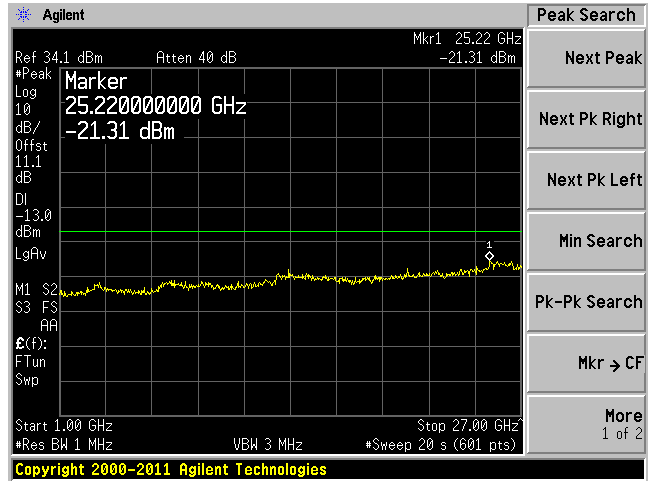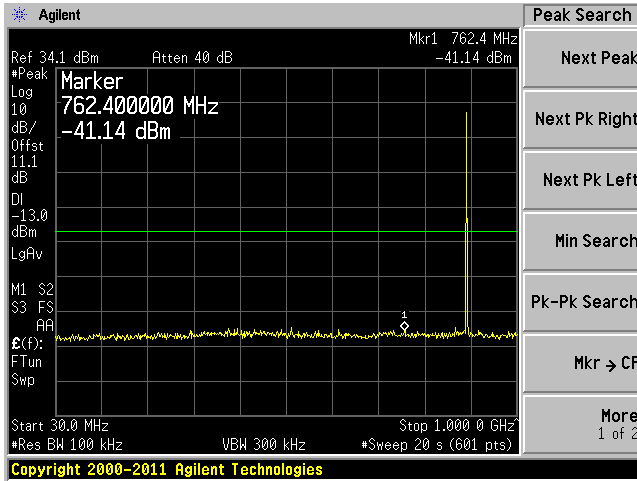

PCS Band Downlink, Middle Channel: 1960 MHz

Plot 1: 30 MHz to 1 GHz


Plot 2: Above 1 GHz

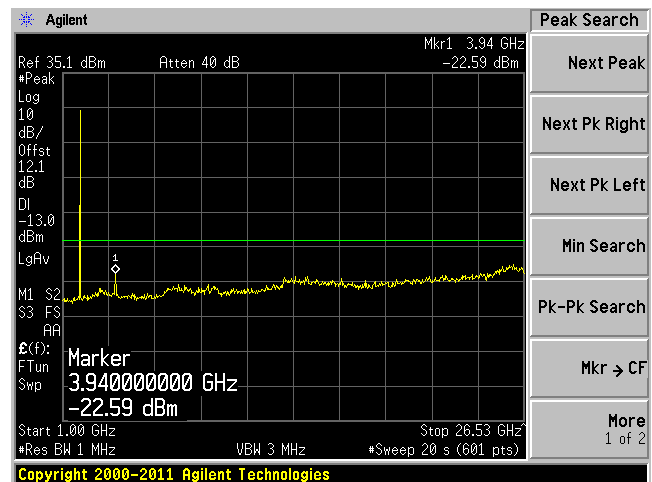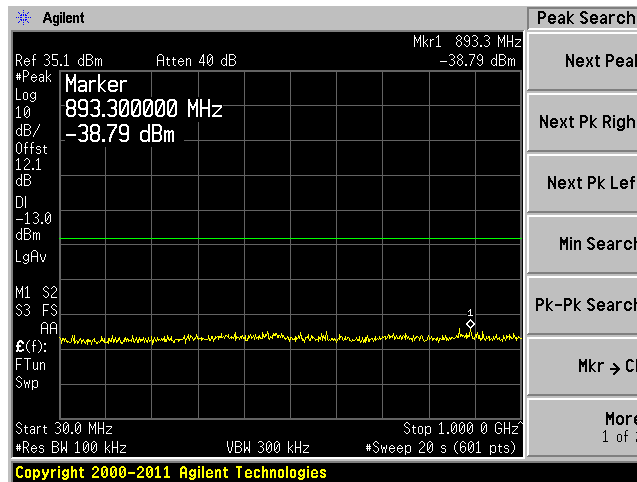


Inter-modulation Cellular Band Downlink

Worst Case between GSM/GPRS and EDGE Modulations


Low Channel, Input

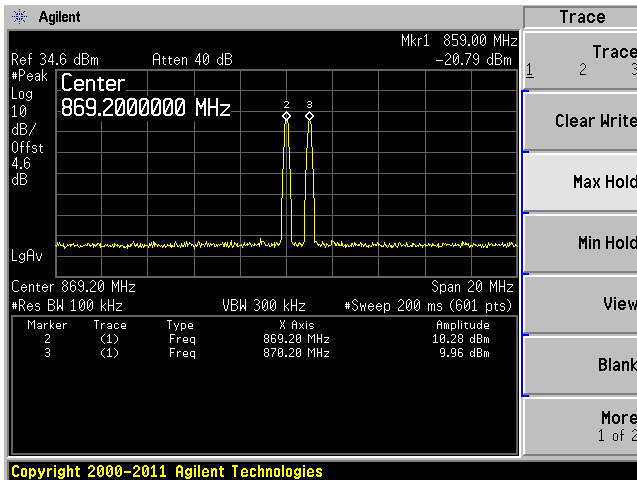


Low Channel, Output

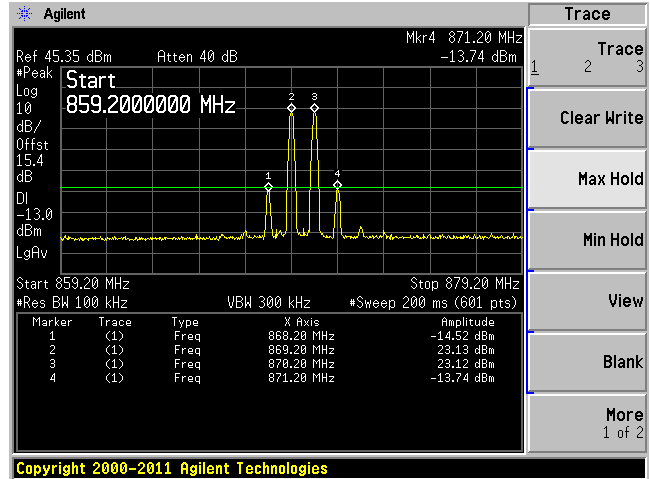


Middle Channel, Input

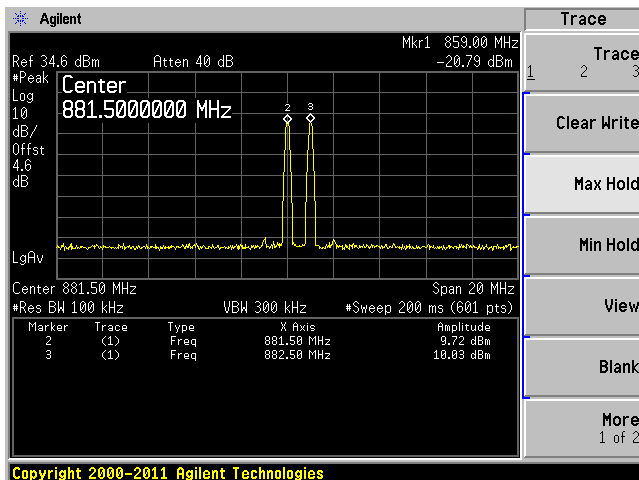


Middle Channel, Output

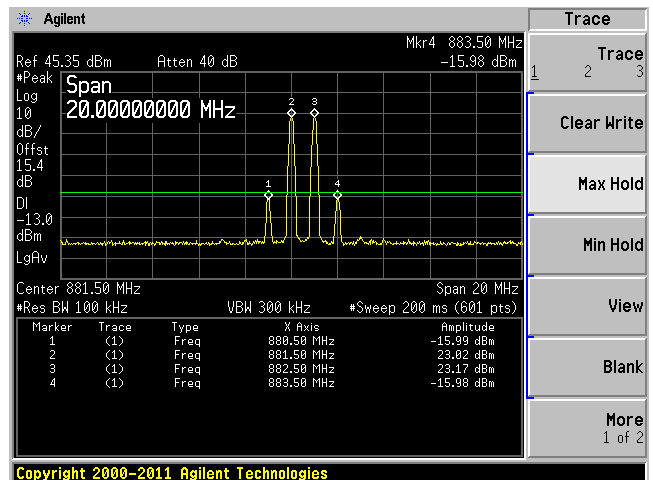

High Channel, Input

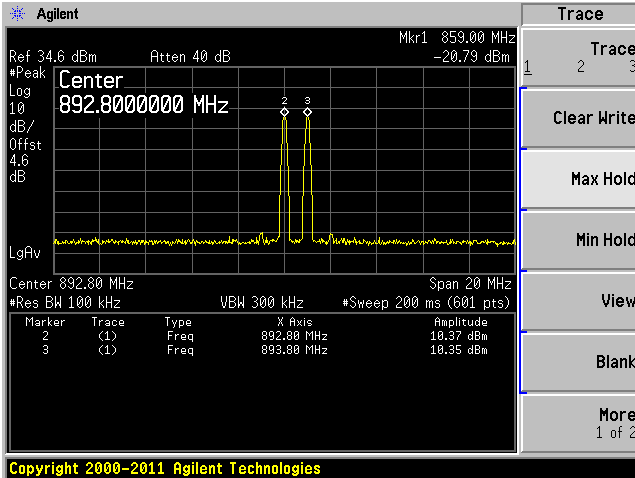


High Channel, Output

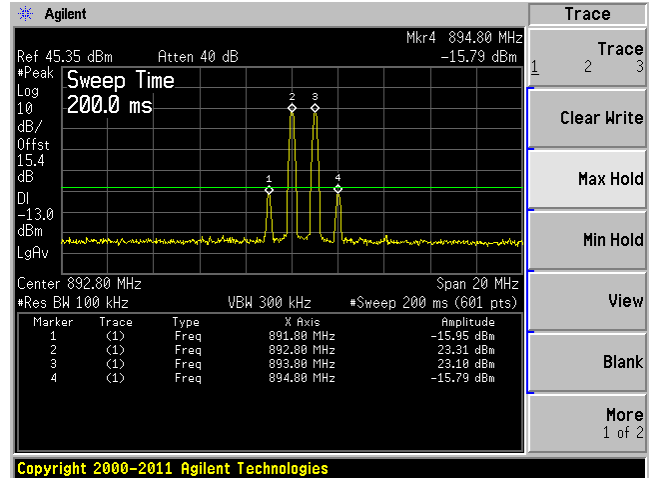


CDMA/EVDO Modulation


Low Channel, Input

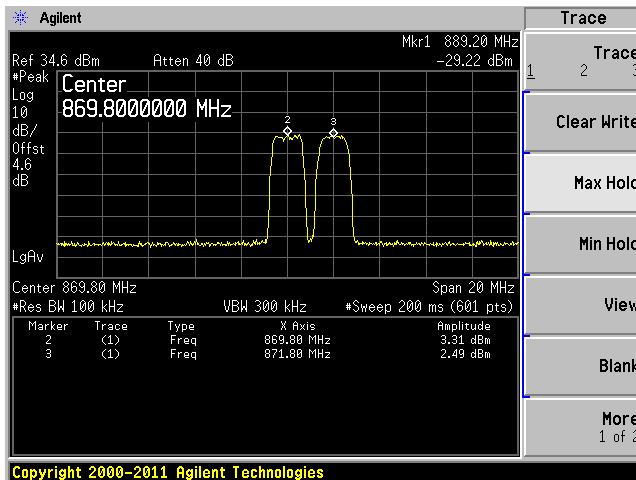


Low Channel, Output

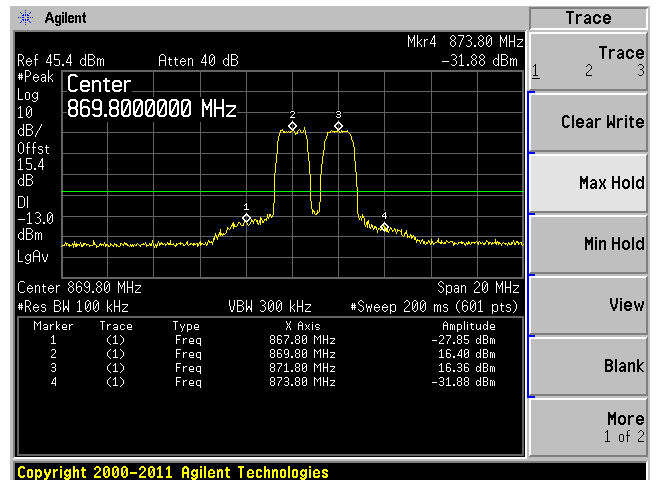


Middle Channel, Input

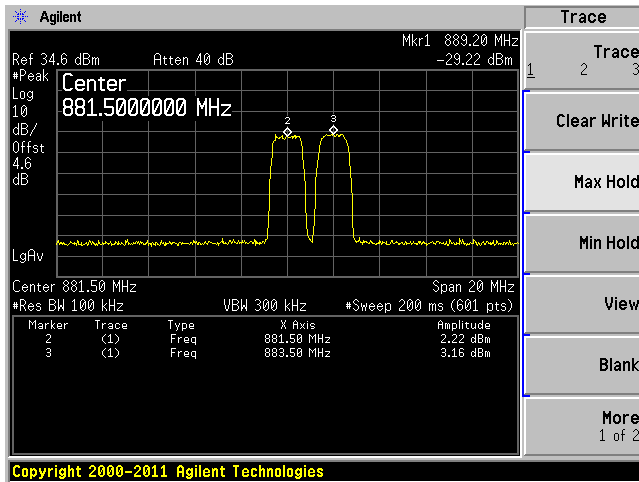


Middle Channel, Output

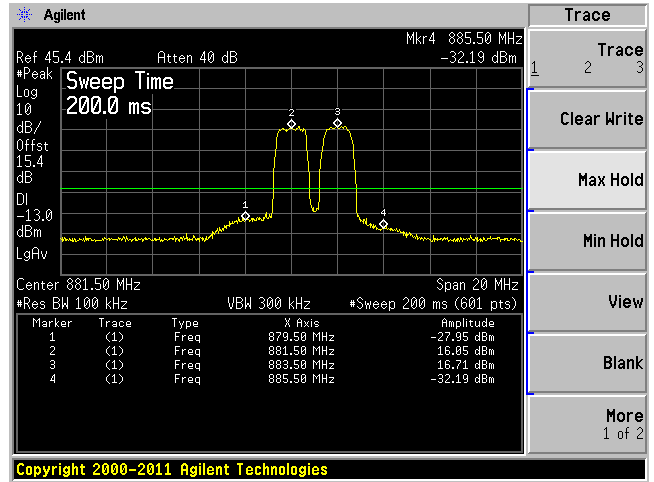

High Channel, Input

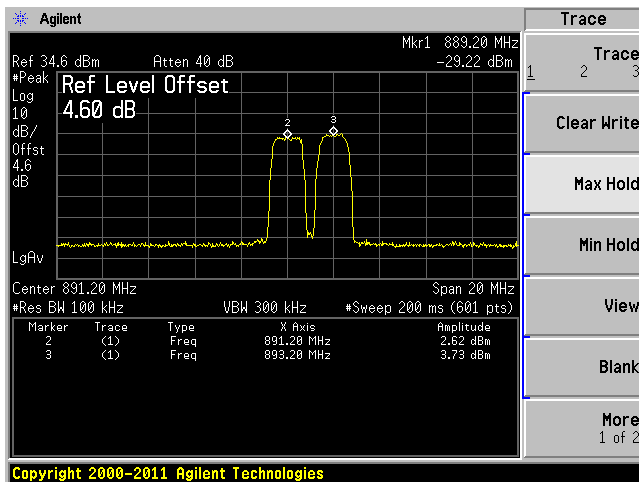


High Channel, Output

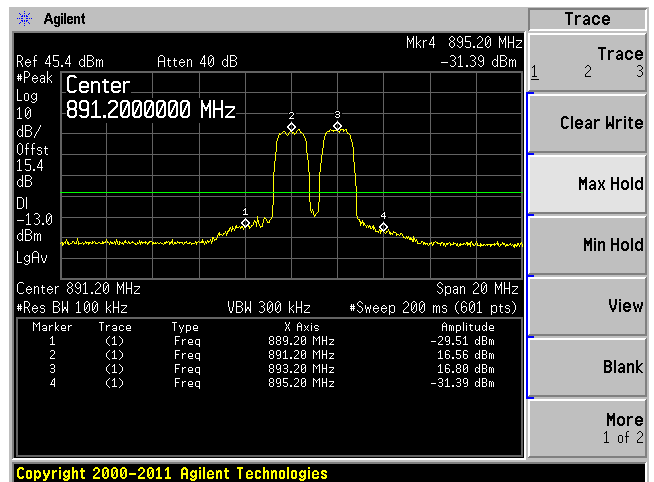


WCDMA/HSPA Modulation


Low Channel, Input

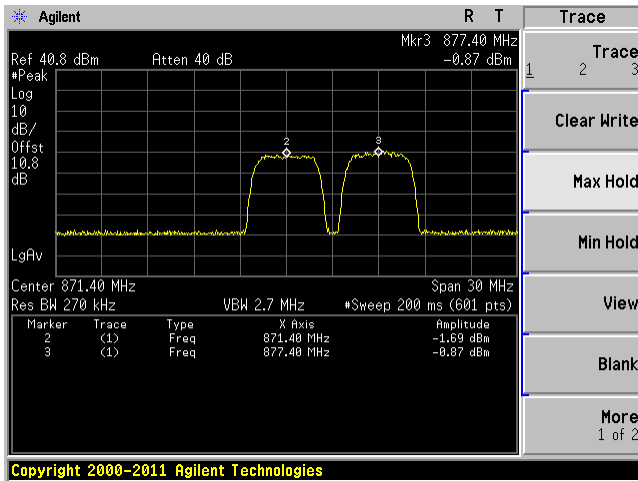


Low Channel, Output

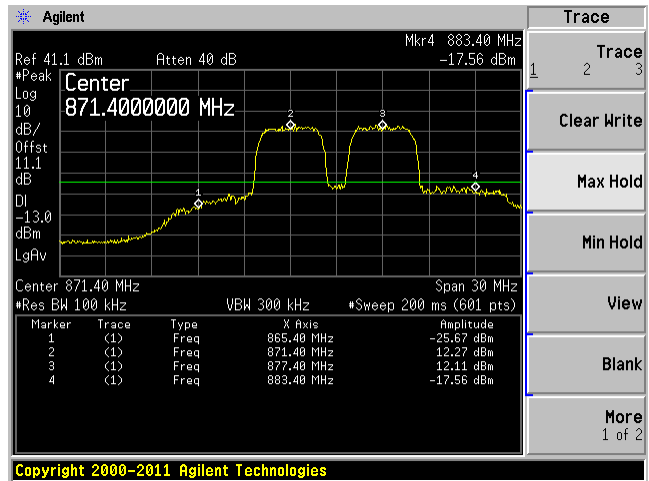


Middle Channel, Input

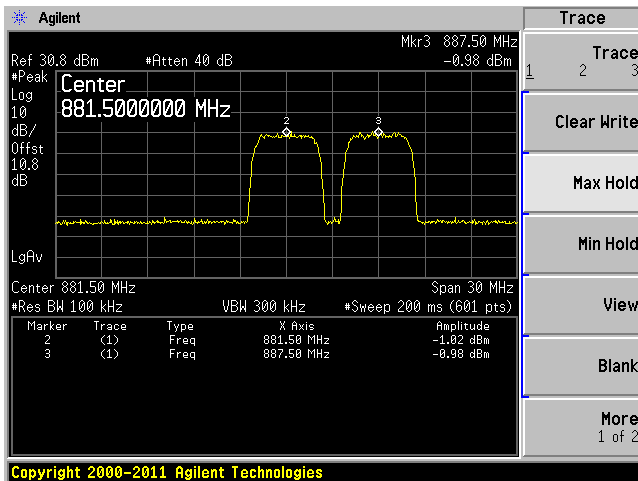


Middle Channel, Output

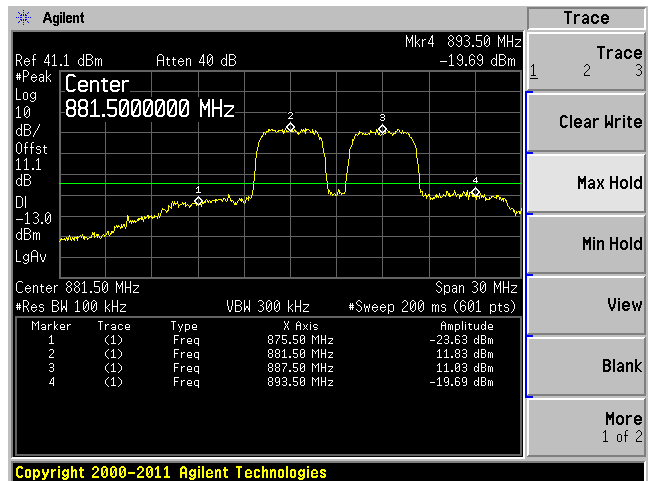

High Channel, Input

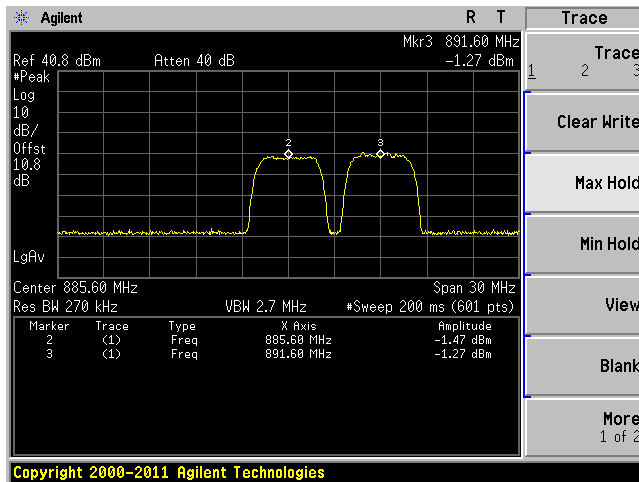


High Channel, Output

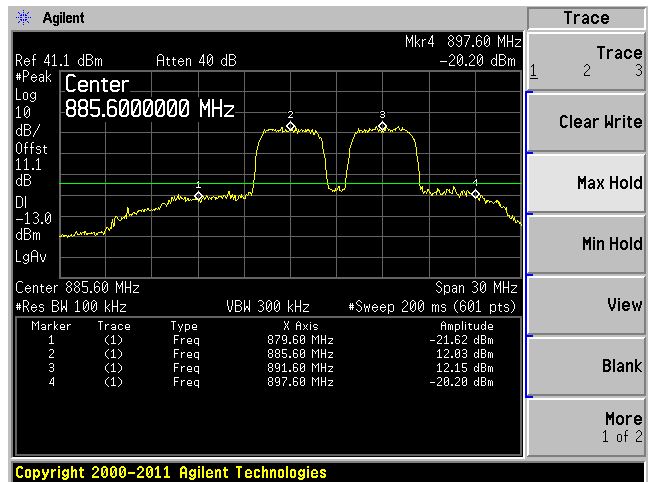


QPSK 1.4 MHz Modulation


Low Channel, Input

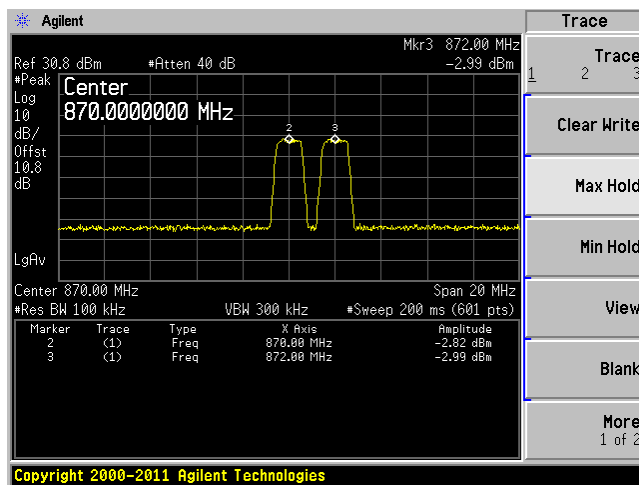


Low Channel, Output

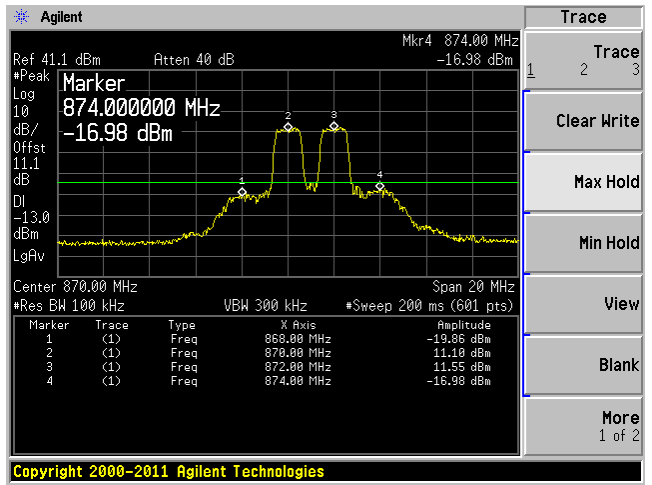


Middle Channel, Input

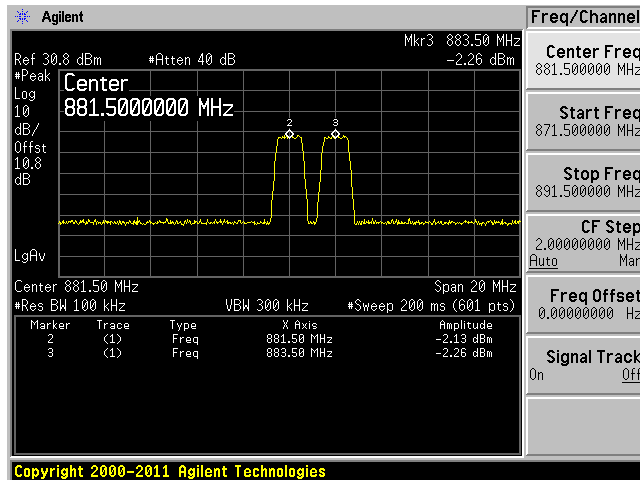


Middle Channel, Output

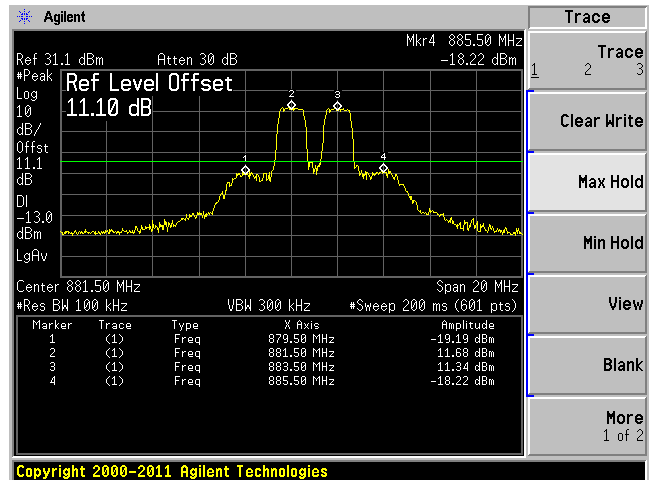

High Channel, Input

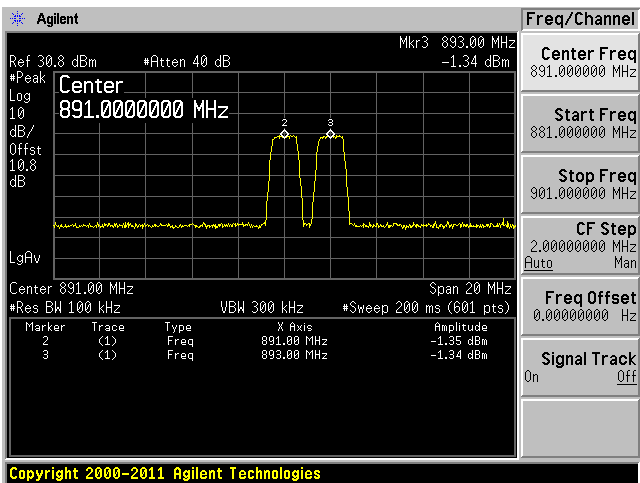


High Channel, Output

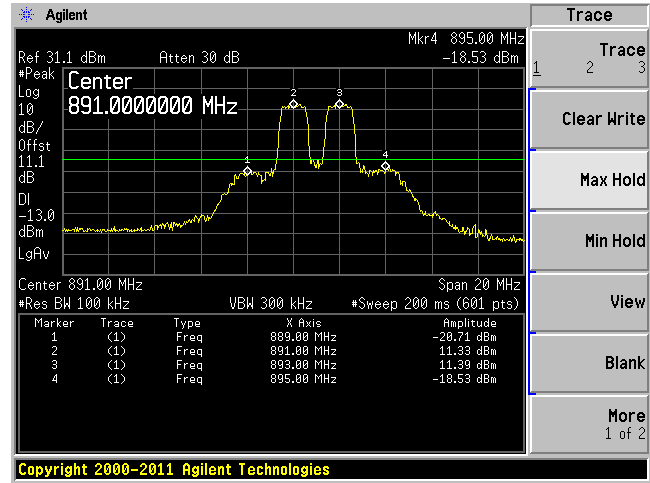


QPSK 3 MHz Modulation


Low Channel, Input

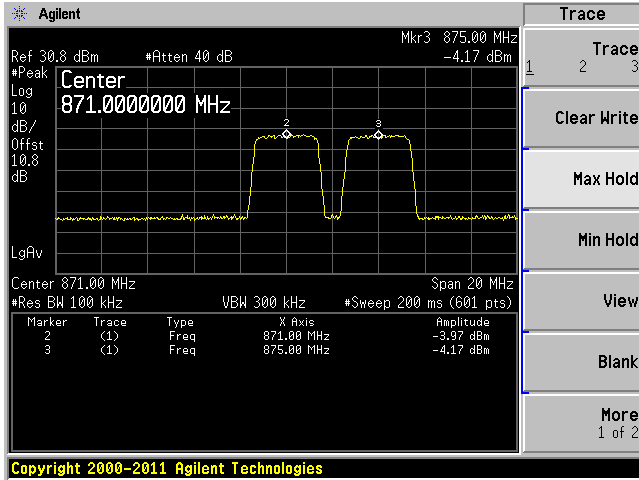


Low Channel, Output

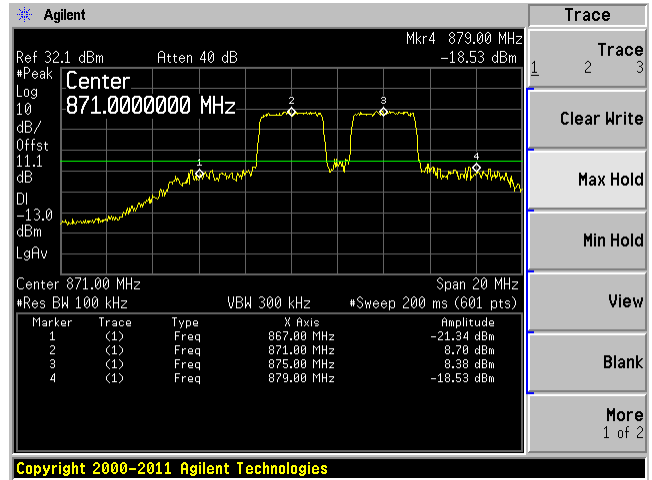


Middle Channel, Input

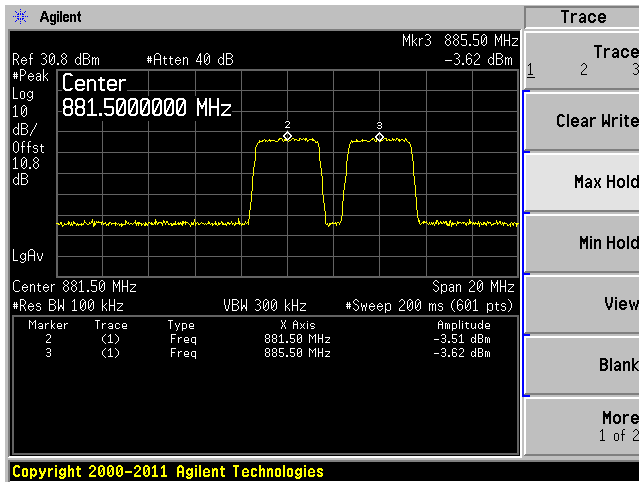


Middle Channel, Output

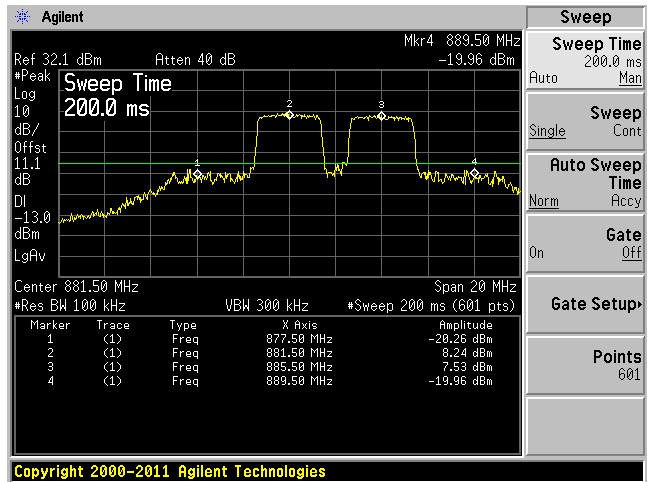

High Channel, Input

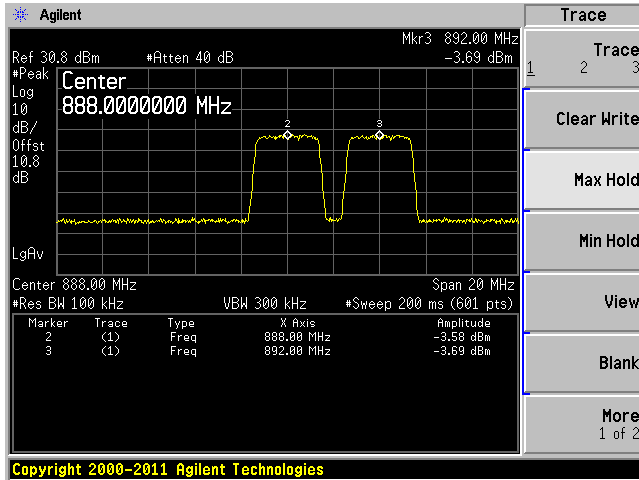


High Channel, Output

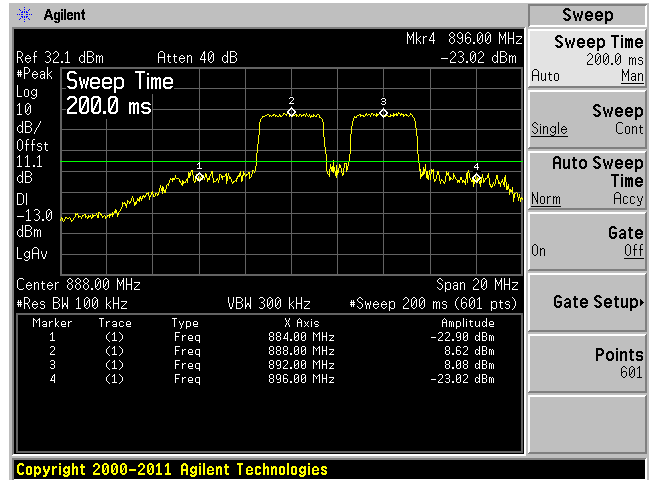


QPSK 5 MHz Modulation


Low Channel, Input

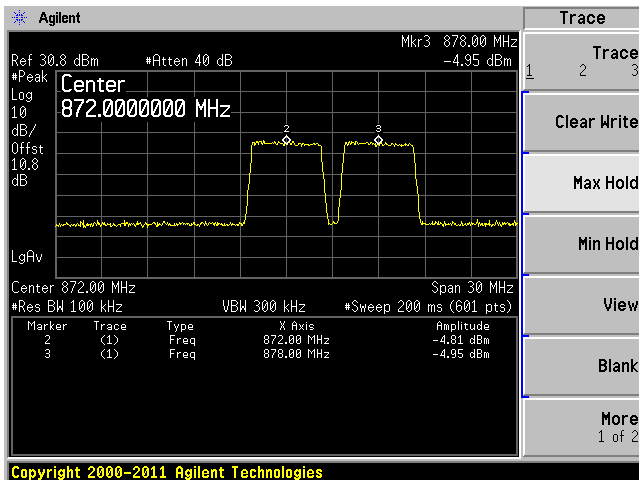


Low Channel, Output

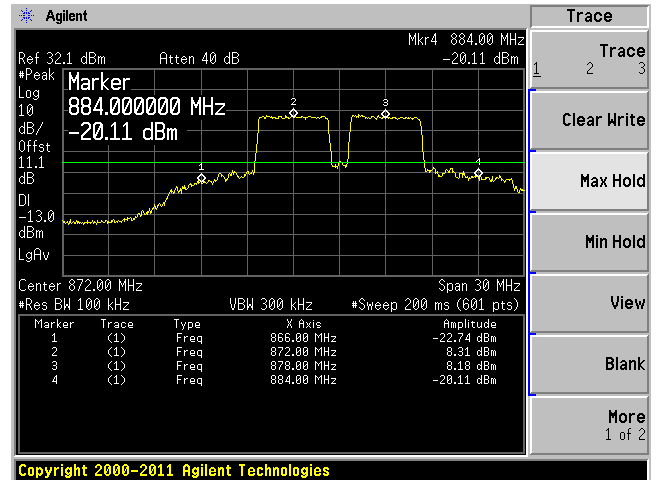


Middle Channel, Input

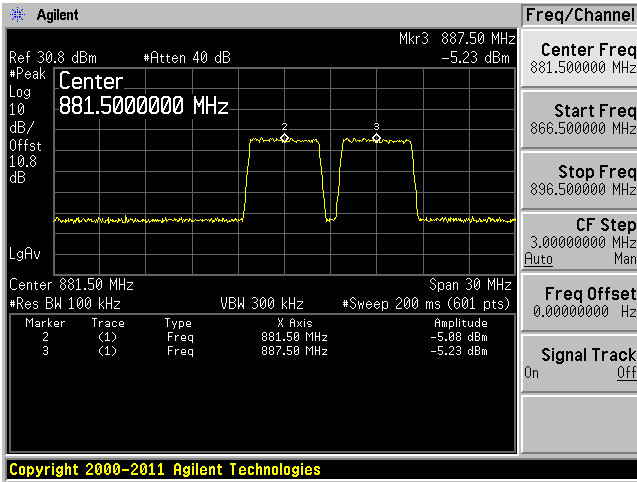


Middle Channel, Output

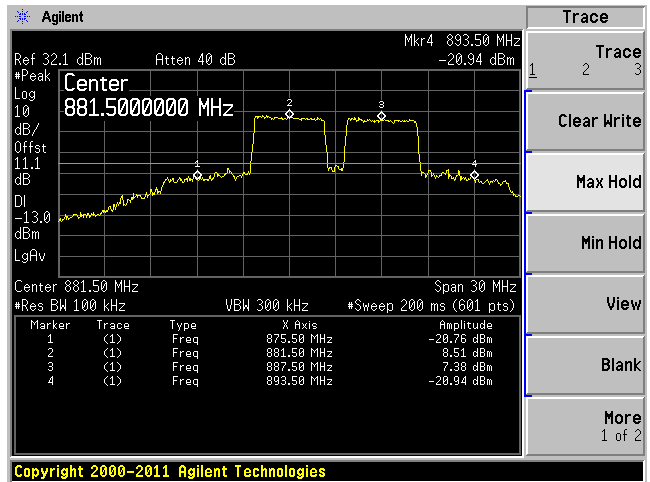

High Channel, Input

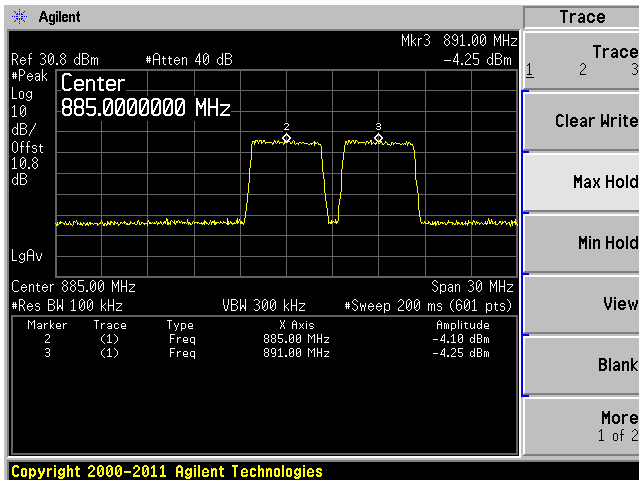


High Channel, Output

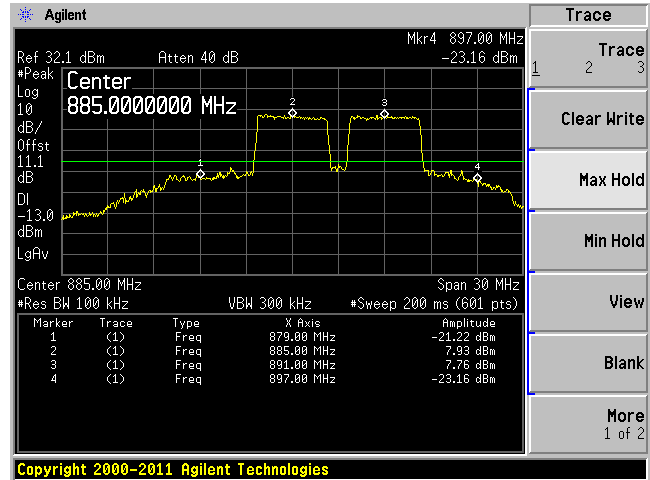


QPSK 10 MHz Modulation


Low Channel, Input

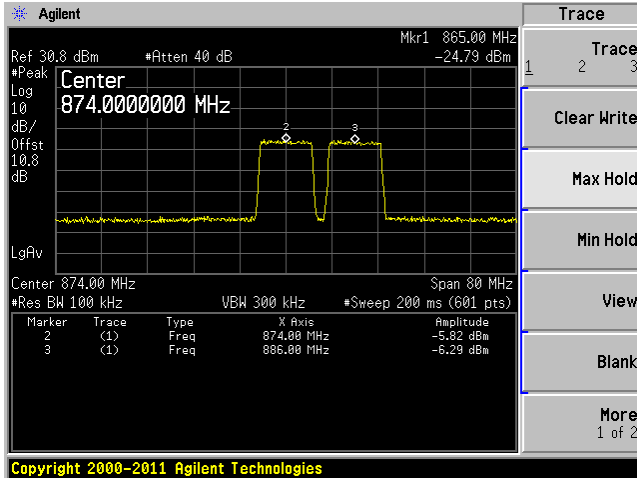


Low Channel, Output

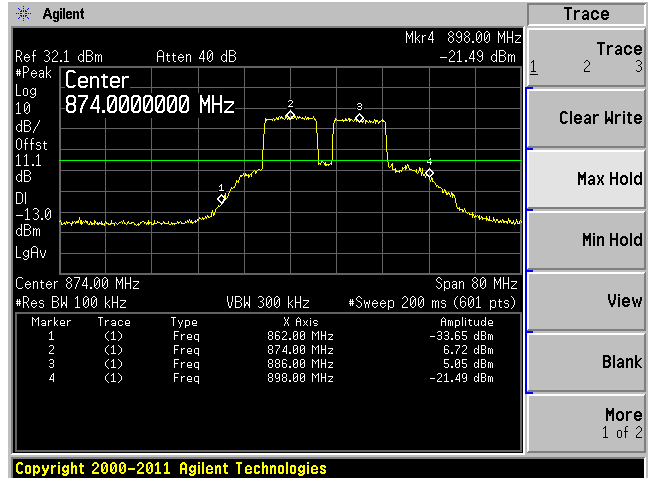


Middle Channel, Input

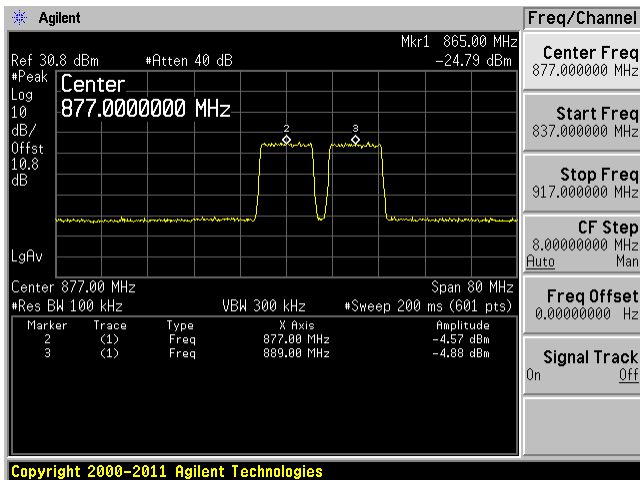


Middle Channel, Output

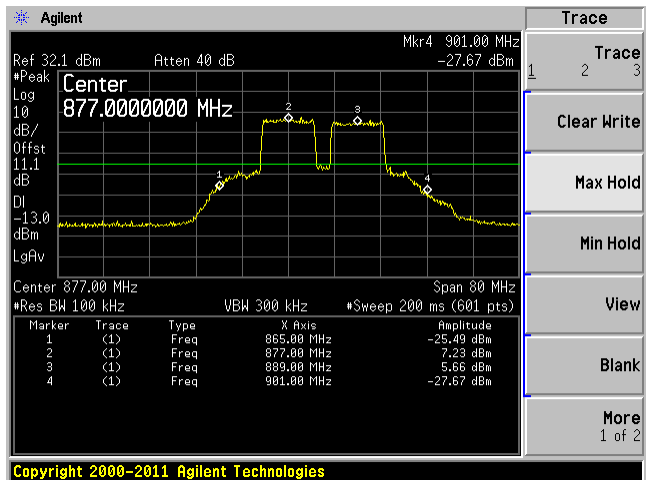

High Channel, Input

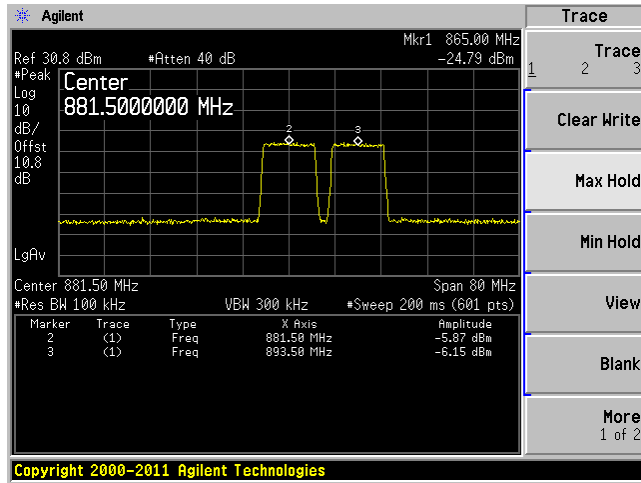


High Channel, Output

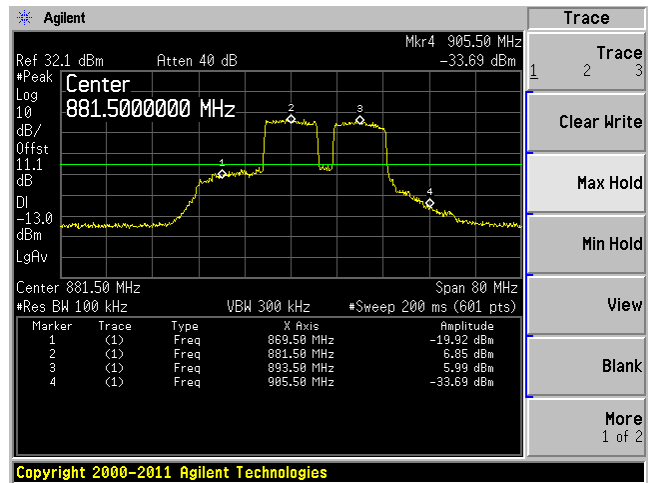


PCS Band Downlink

Worst Case between GSM/GPRS and EDGE Modulations


Low Channel, Input

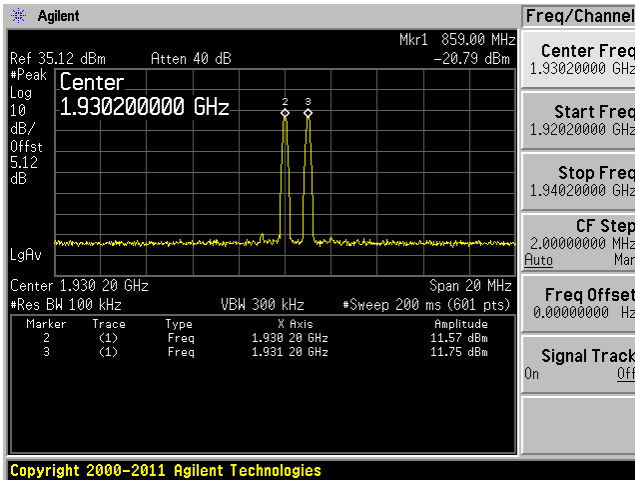


Low Channel, Output

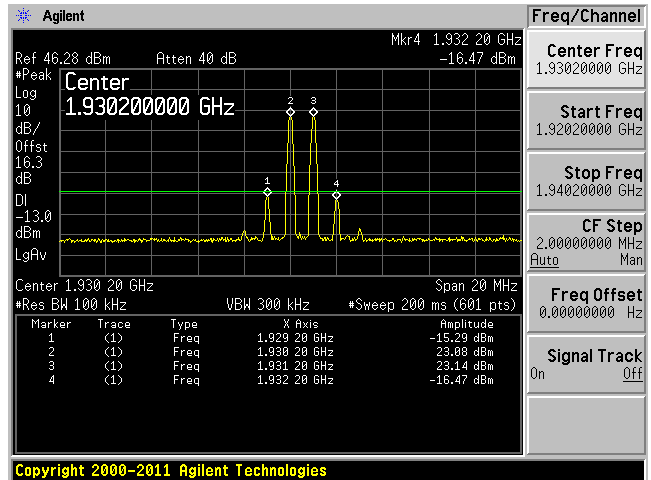


Middle Channel, Input

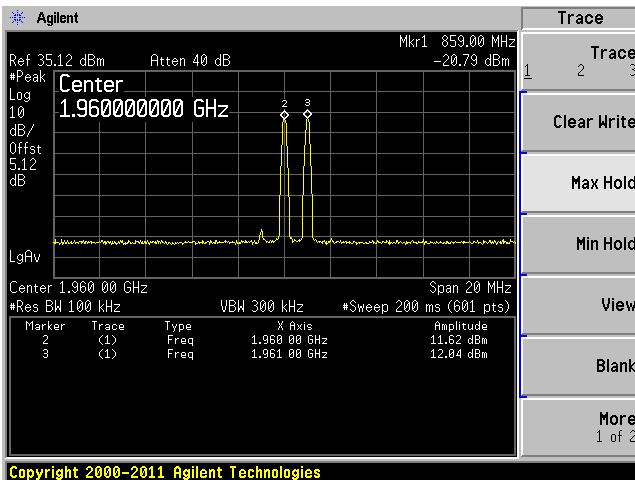


Middle Channel, Output

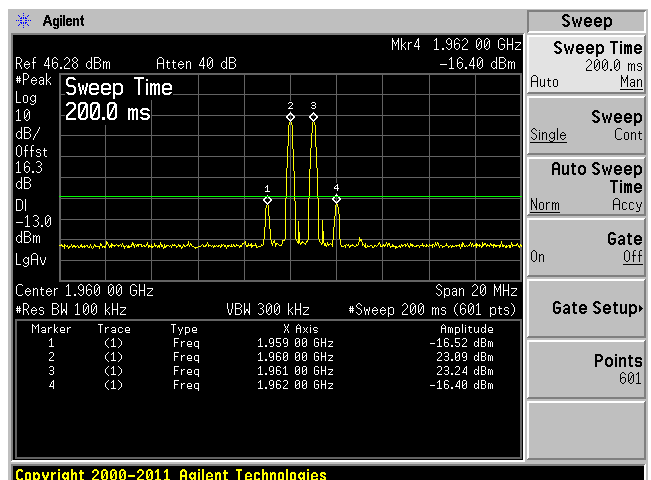

High Channel, Input

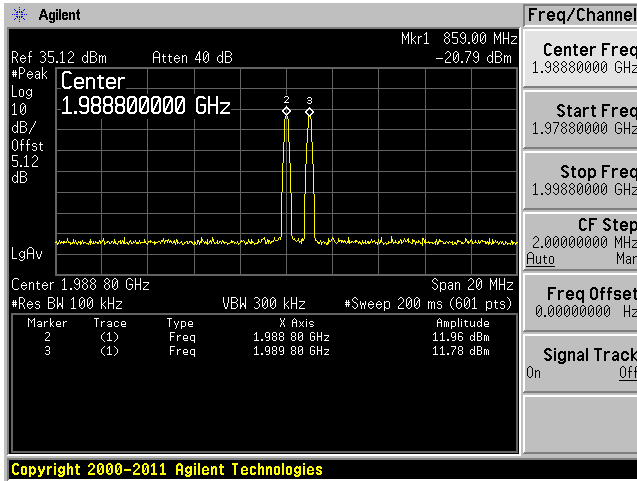


High Channel, Output

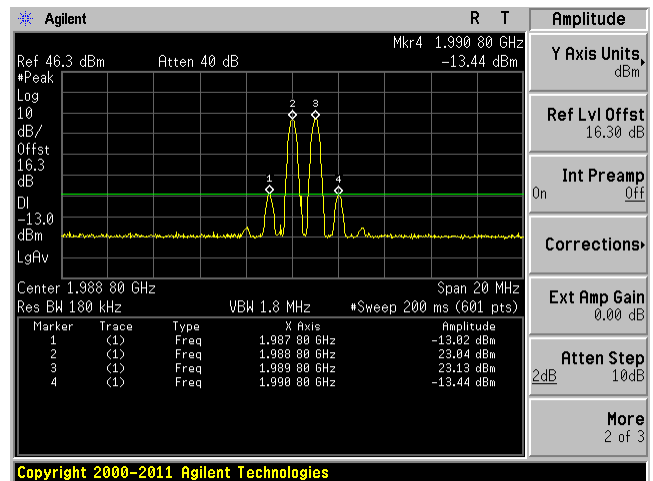


CDMA/EVDO Modulation


Low Channel, Input

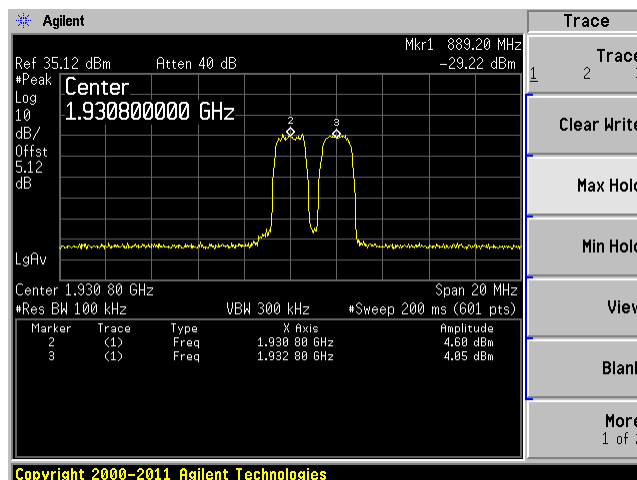


Low Channel, Output

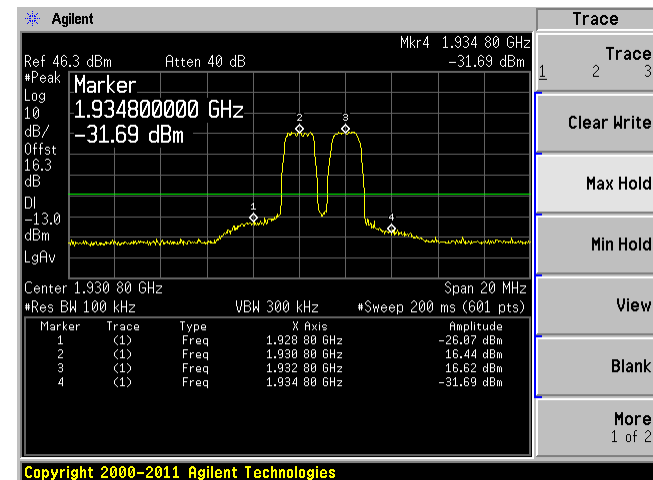


Middle Channel, Input

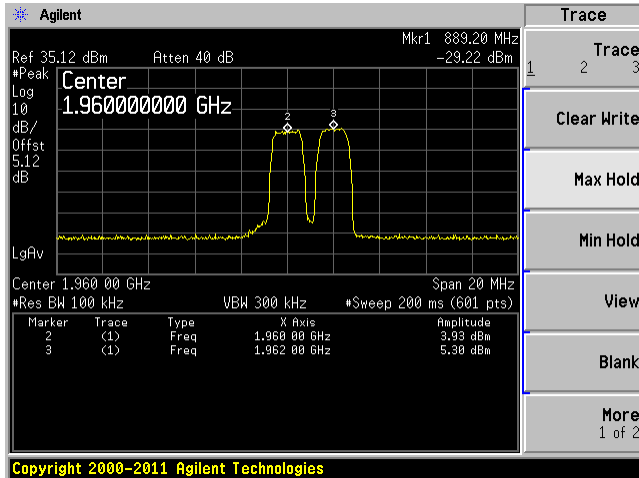


Middle Channel, Output

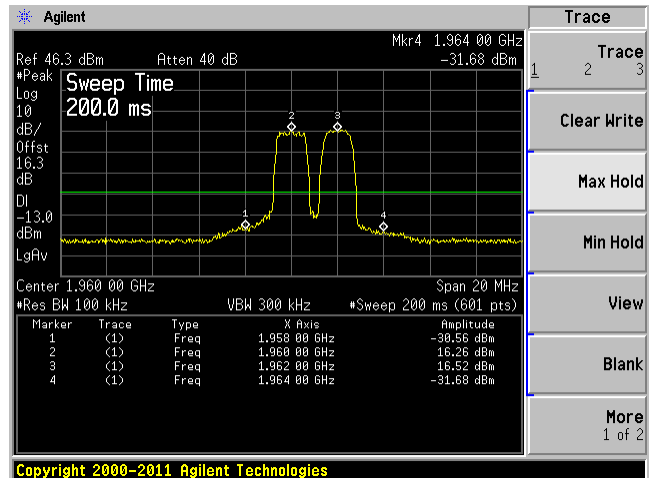

High Channel, Input

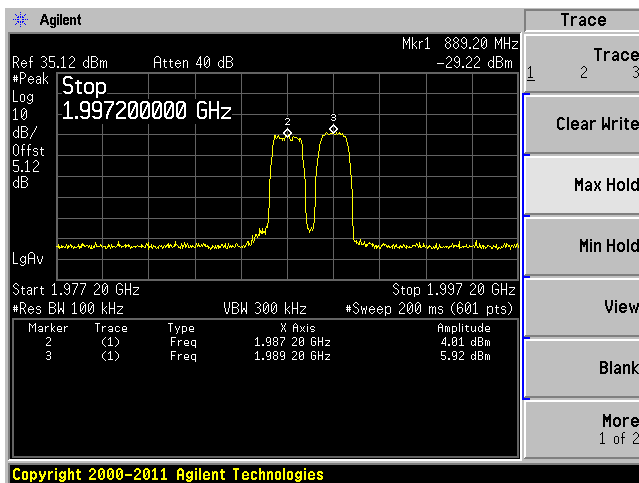


High Channel, Output

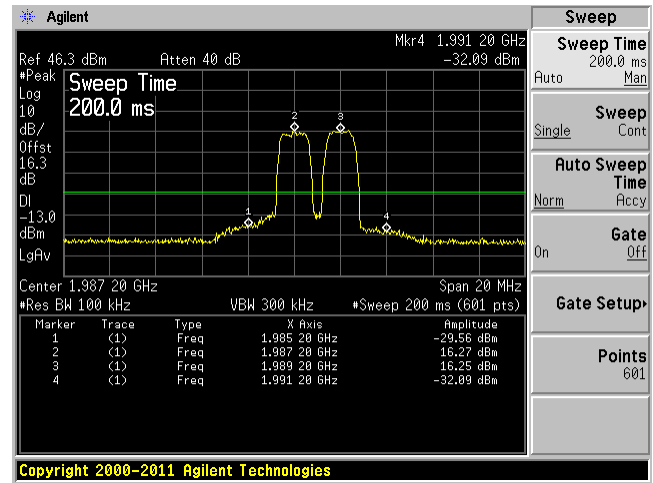


WCDMA/HSPA Modulation


Low Channel, Input

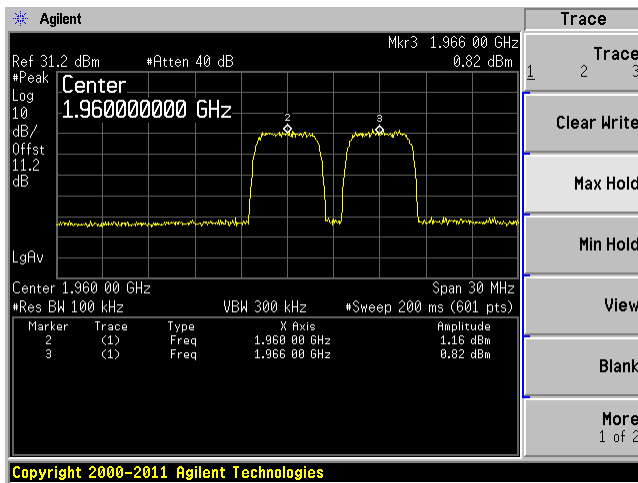


Low Channel, Output

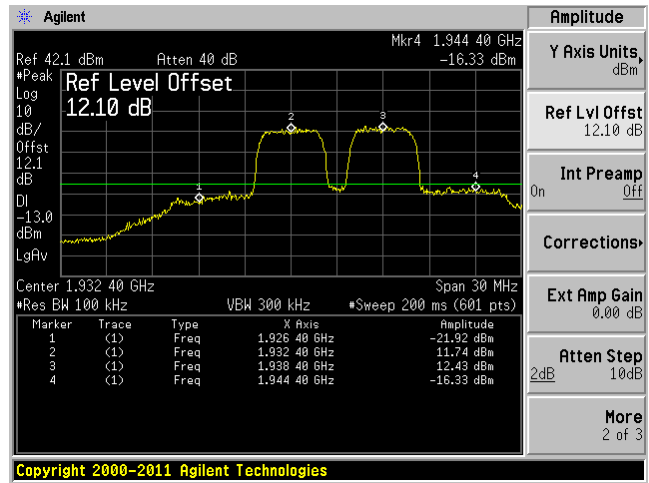


Middle Channel, Input

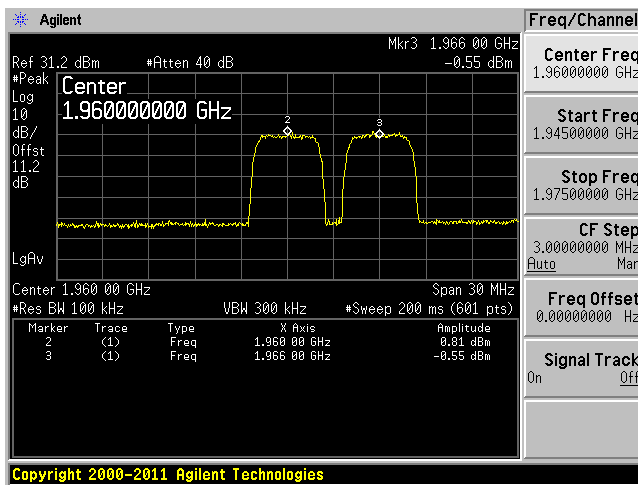


Middle Channel, Output

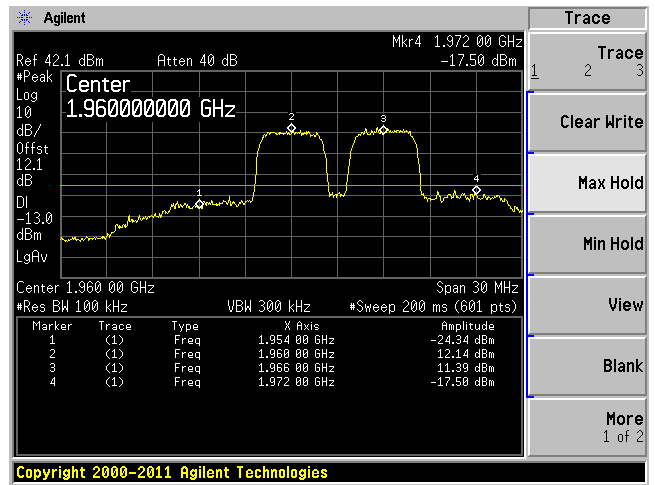

High Channel, Input

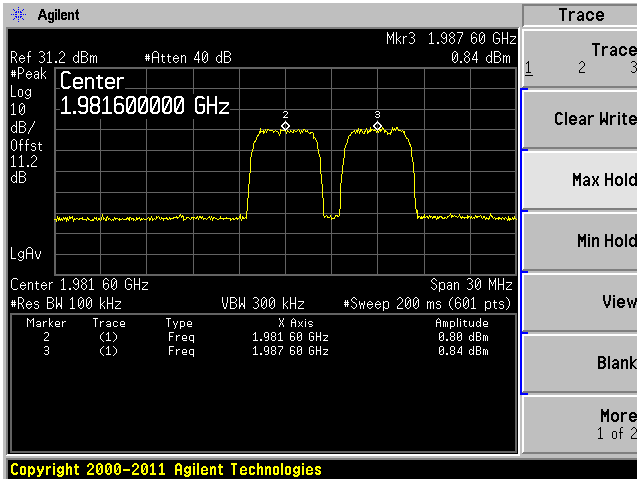


High Channel, Output

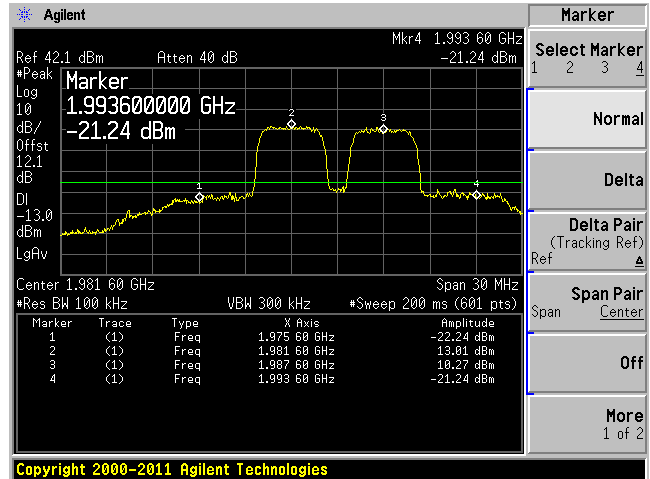


QPSK 1.4 MHz Modulation


Low Channel, Input

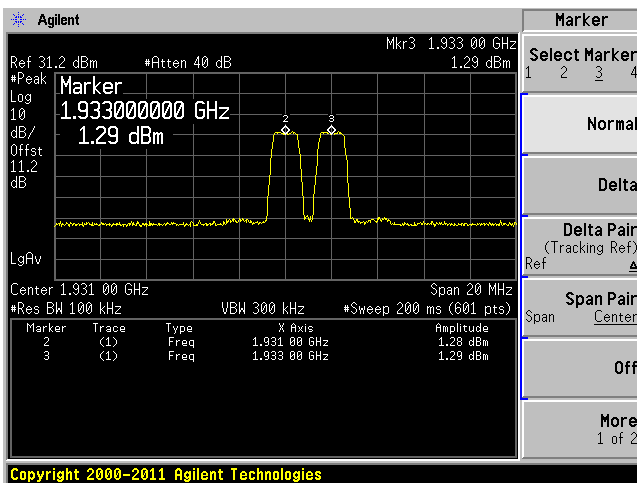


Low Channel, Output

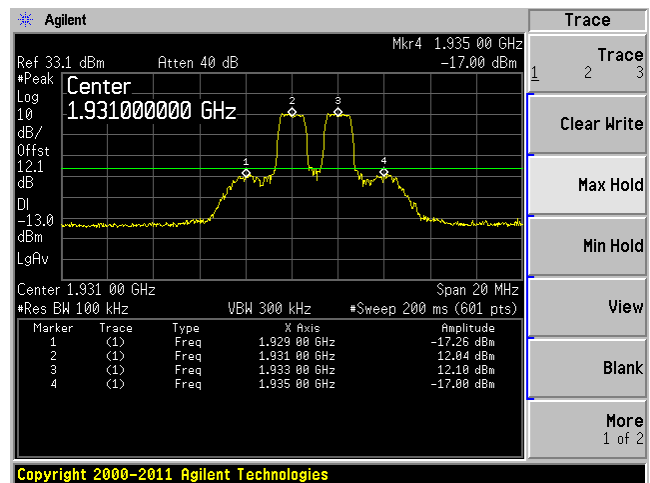


Middle Channel, Input

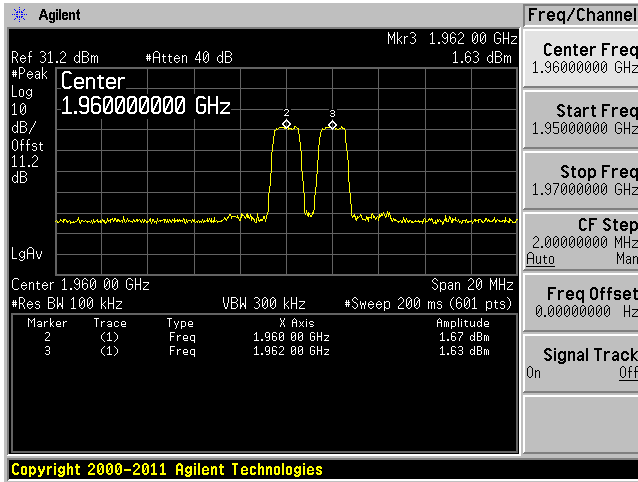


Middle Channel, Output

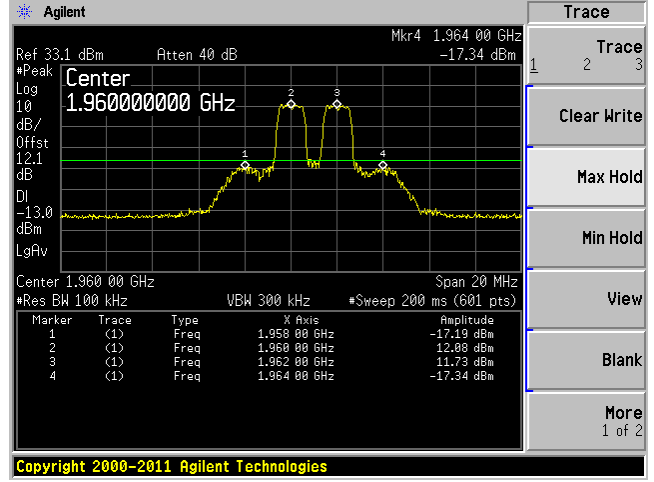

High Channel, Input

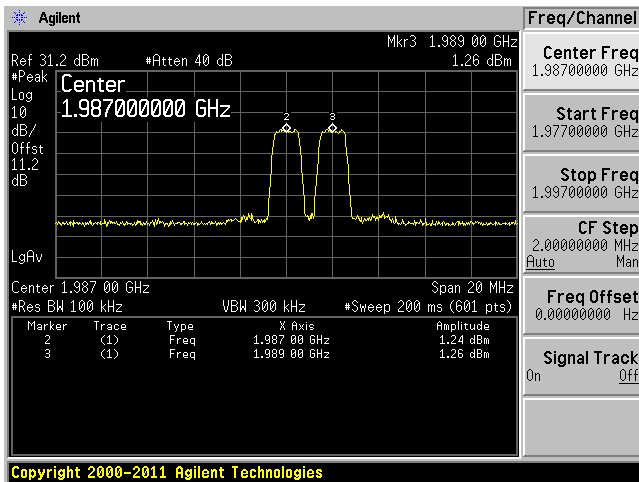


High Channel, Output

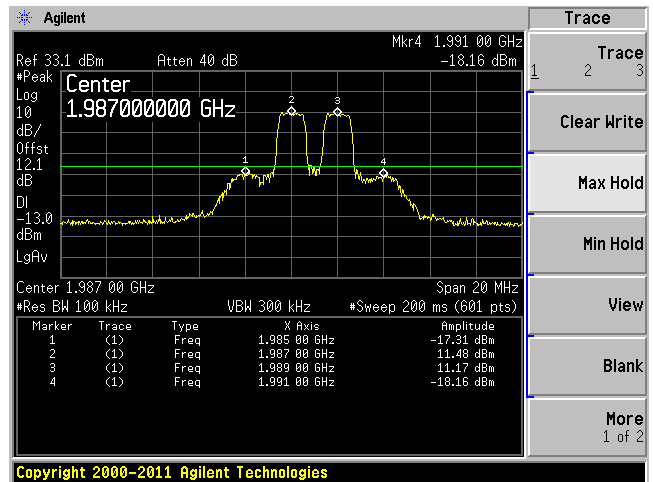


QPSK 3 MHz Modulation


Low Channel, Input

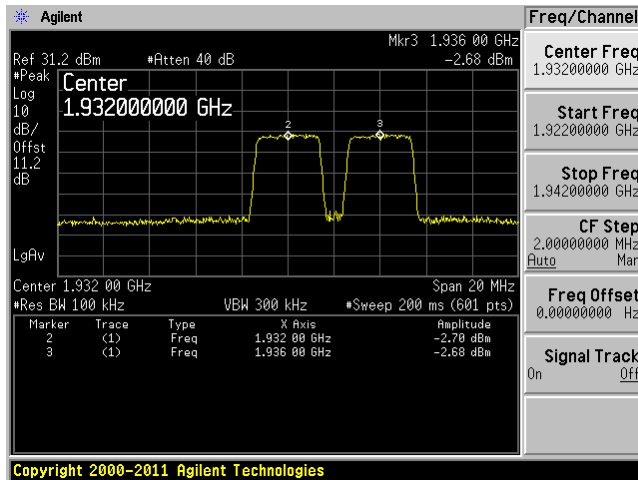


Low Channel, Output

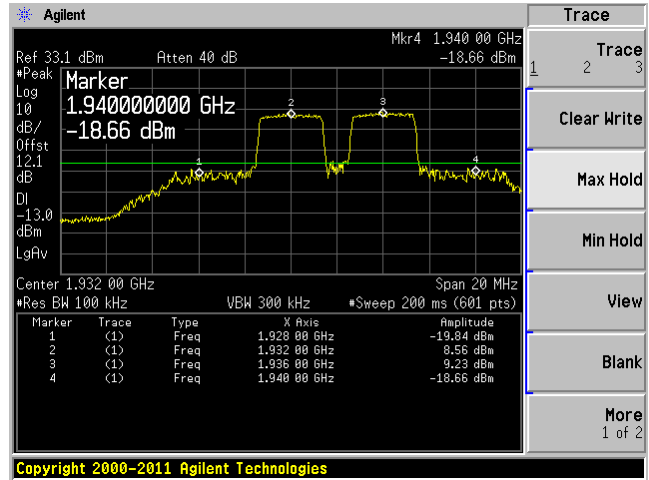


Middle Channel, Input

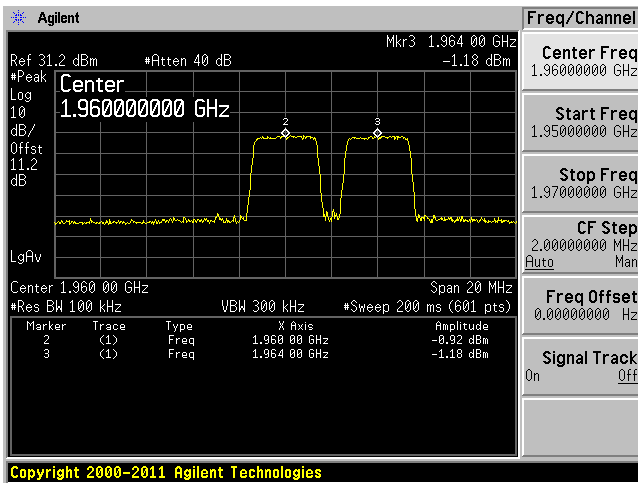


Middle Channel, Output

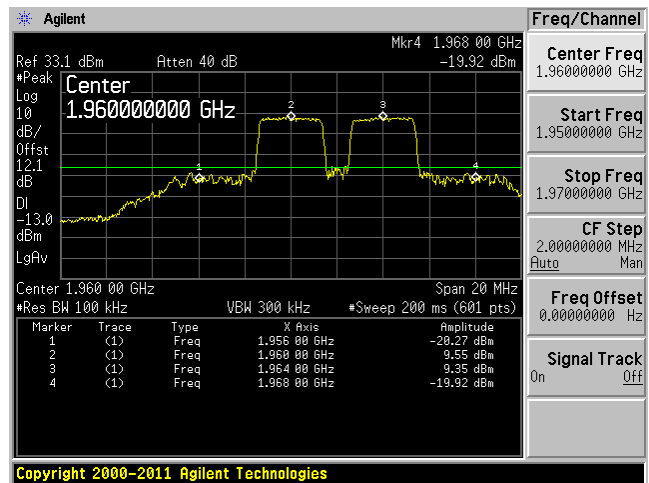

High Channel, Input

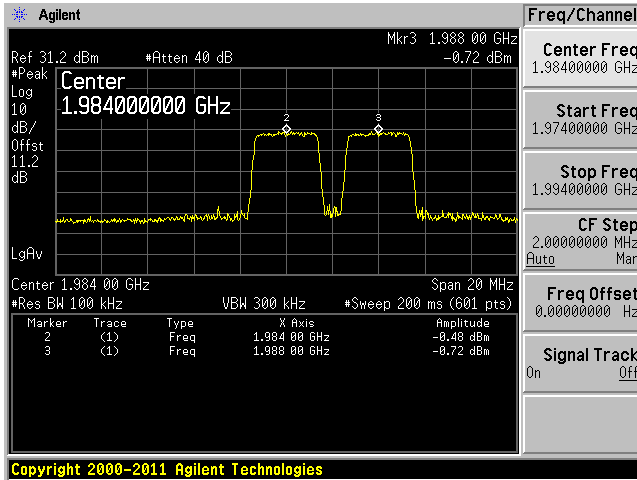


High Channel, Output

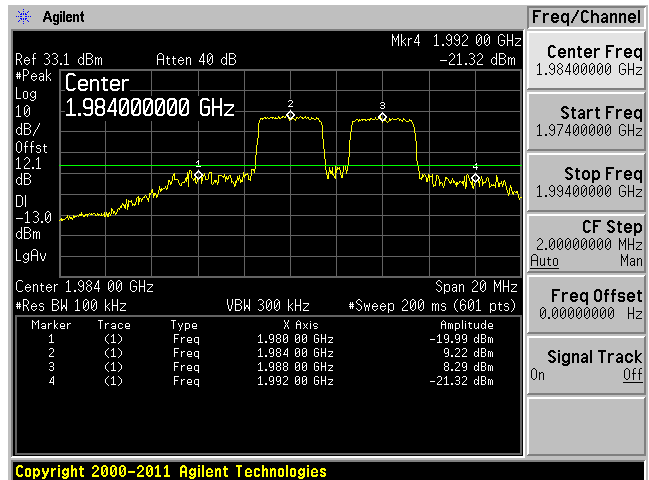


QPSK 5 MHz Modulation


Low Channel, Input

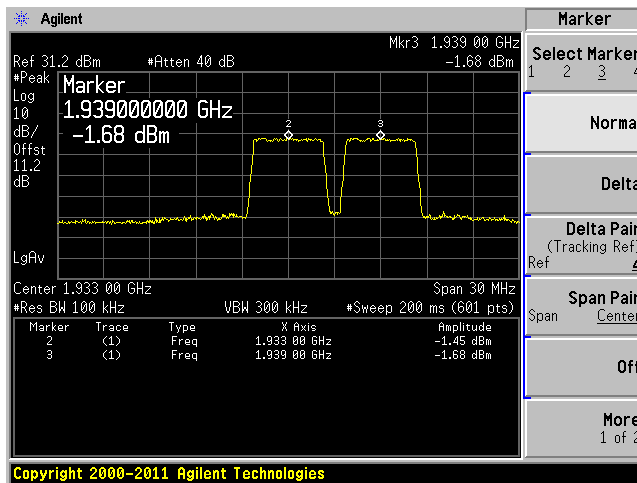


Low Channel, Output

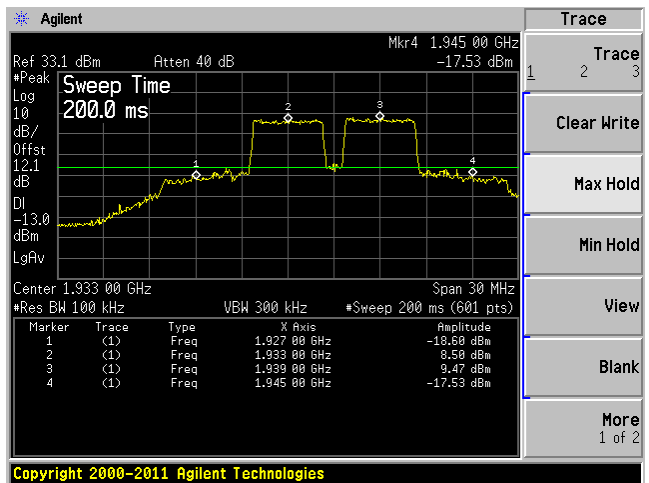


Middle Channel, Input

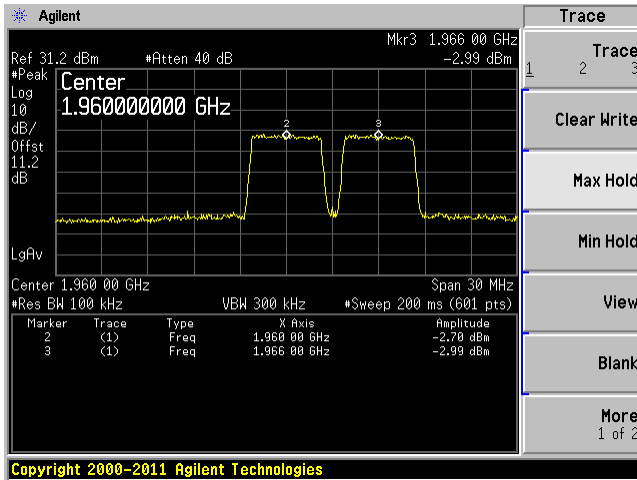


Middle Channel, Output

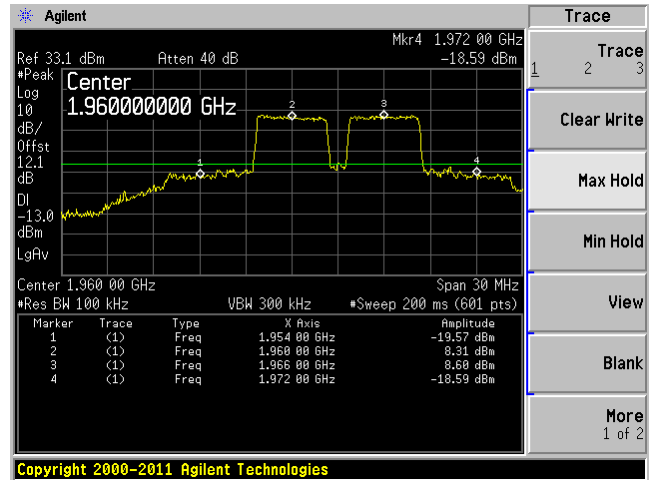

High Channel, Input

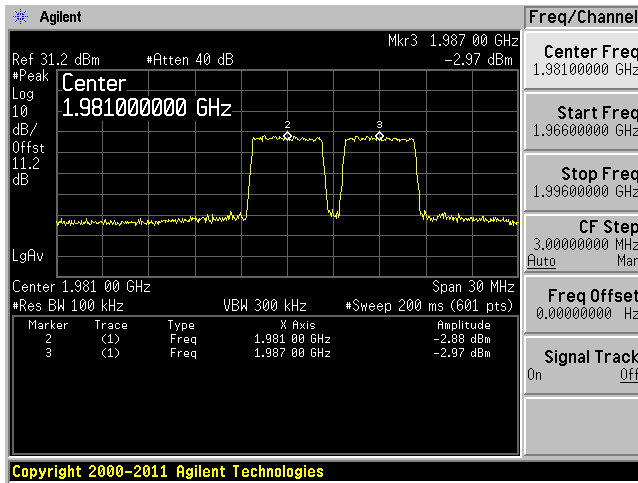


High Channel, Output

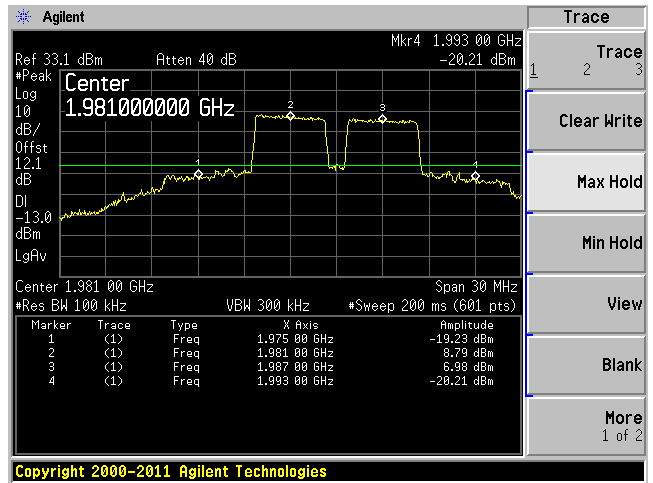


QPSK 10 MHz Modulation


Low Channel, Input

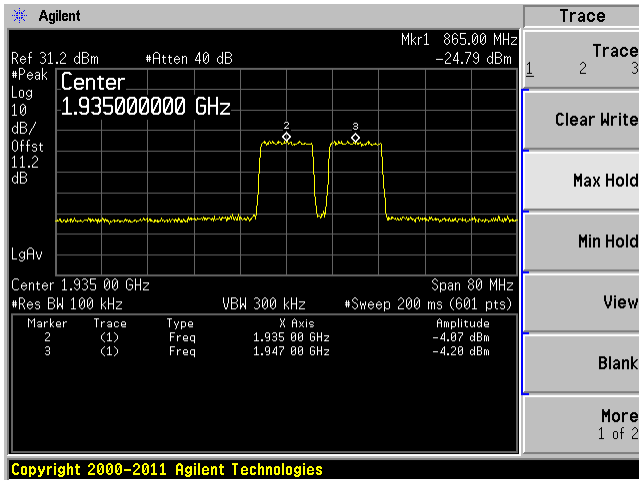


Low Channel, Output

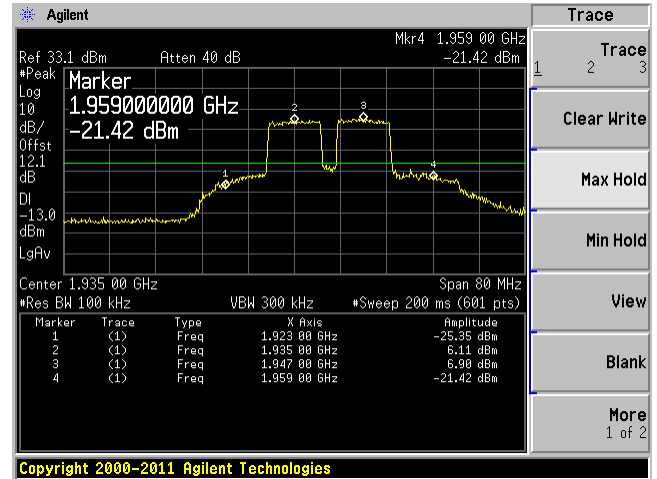

Middle Channel, Input


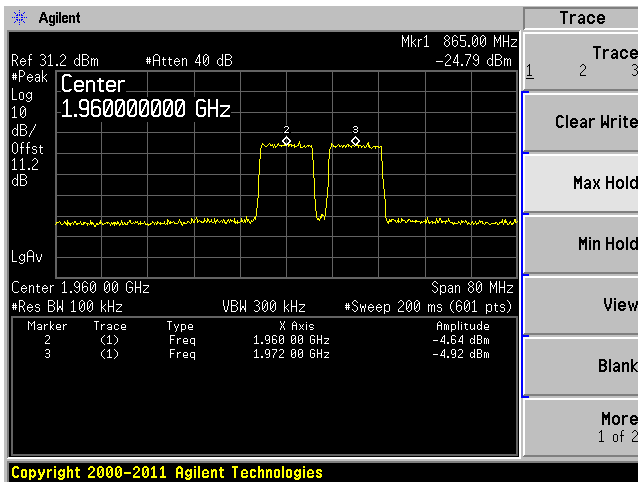


Middle Channel, Output

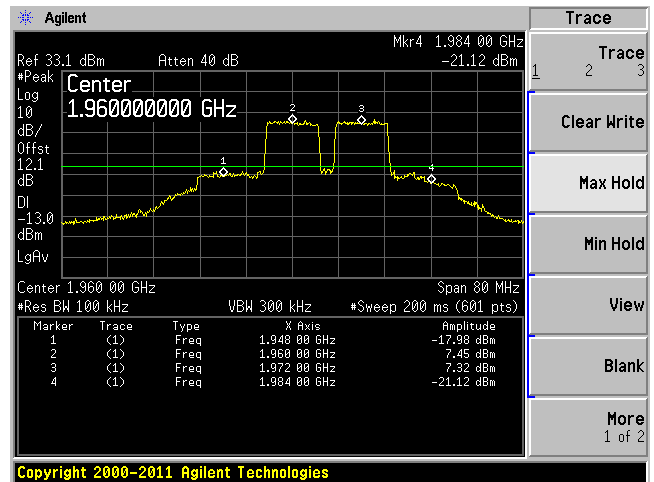

High Channel, Input

High Channel, Output

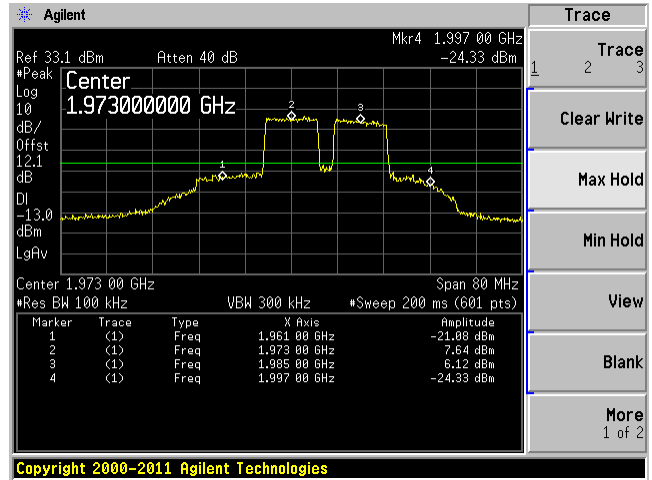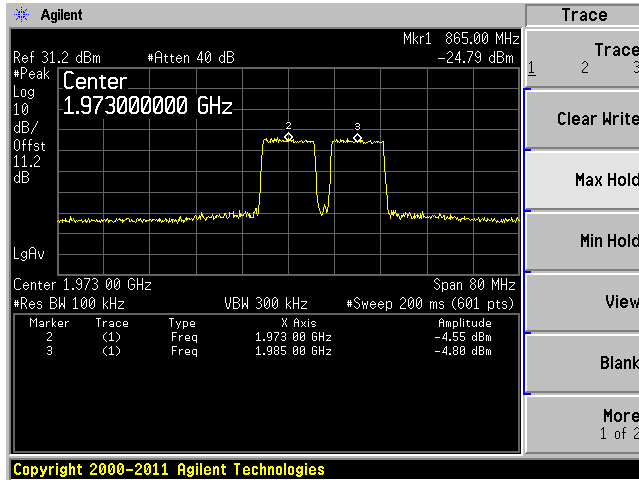

8 FCC §22.917 & §24.238 – Band Edge

8.1 Applicable Standard


According to FCC §22.917, the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

8.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

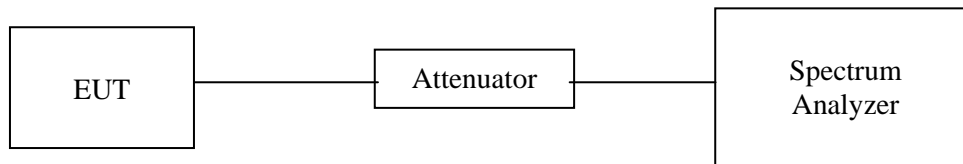

8.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09 ¹
Agilent	Signal Generator	E4438C	MY45091309	2012-05-03

Note 1: Based on a two year calibration cycle.

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed according to A2LA requirements, traceable to the NIST.

8.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	57 %
ATM Pressure:	101.4kPa


The testing was performed by Wei Sun on 2012-07-07 at RF Site.

8.5 Test Results


Please refer to the following plots.

Cellular Band Downlink


GSM/GPRS - Low Channel

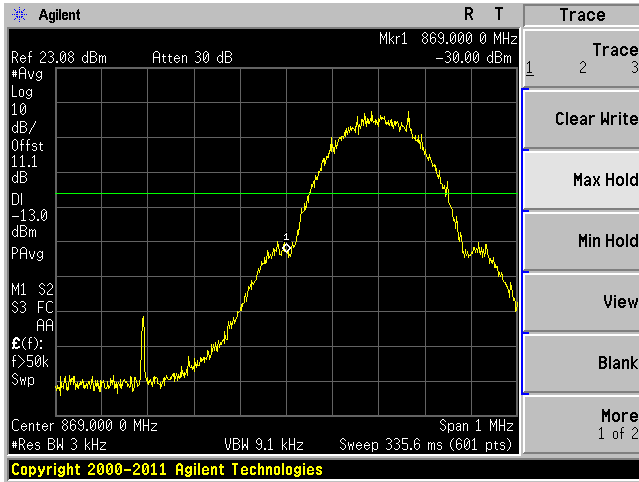


GSM/GPRS - High Channel

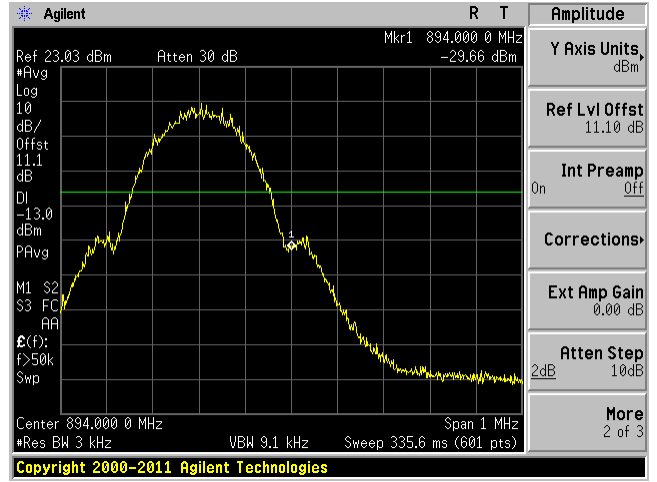


EDGE - Low Channel

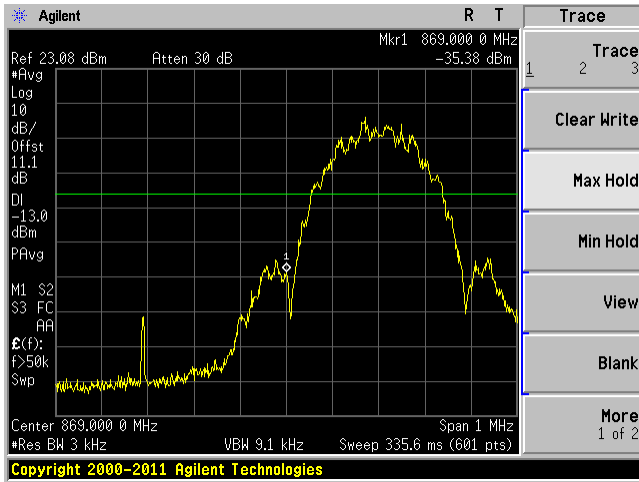


EDGE - High Channel

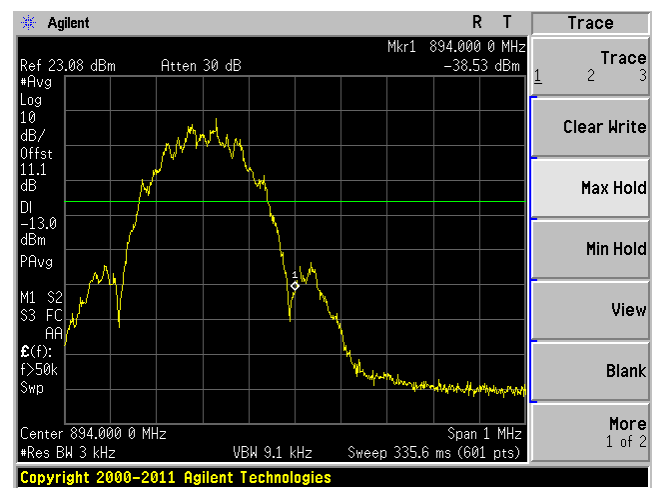


CDMA/EVDO - Low Channel

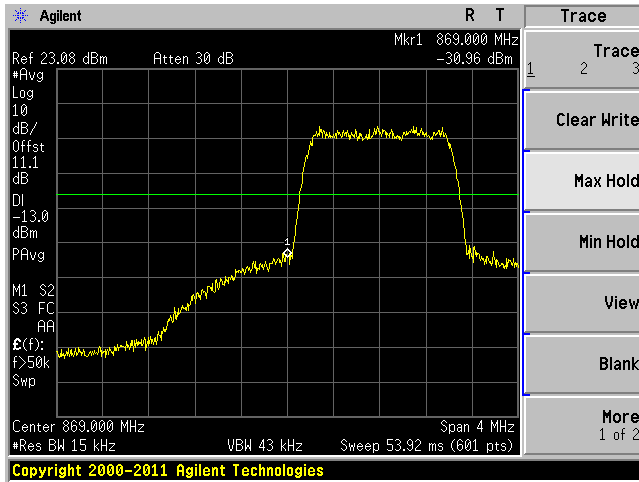


CDMA/EVDO - High Channel

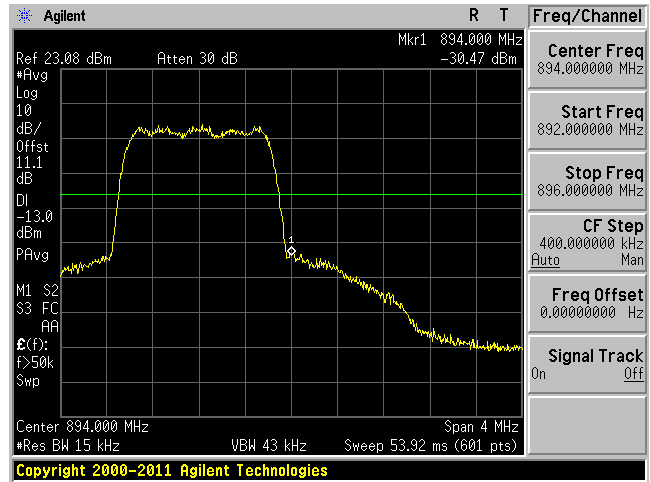

WCDMA/HSPA - Low Channel


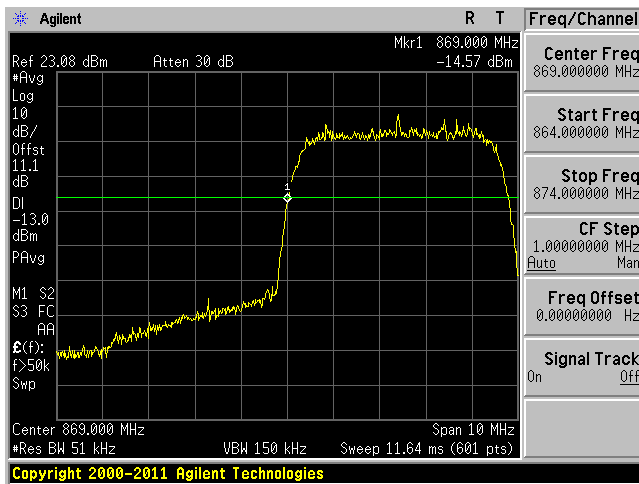


WCDMA/HSPA - High Channel

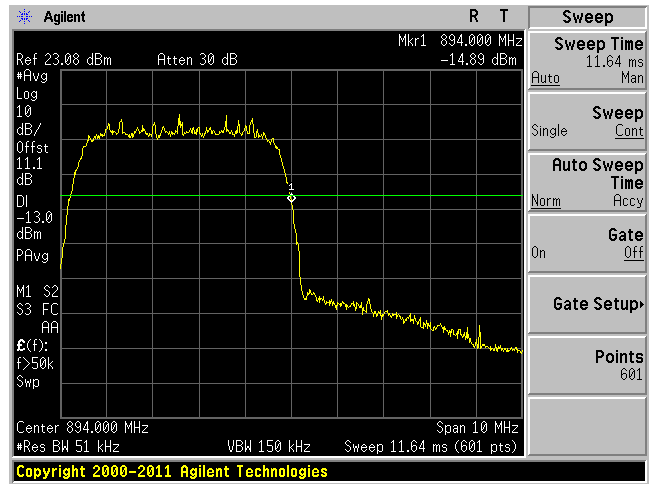



QPSK 1.4 MHz - Low Channel

QPSK 1.4 MHz - High Channel

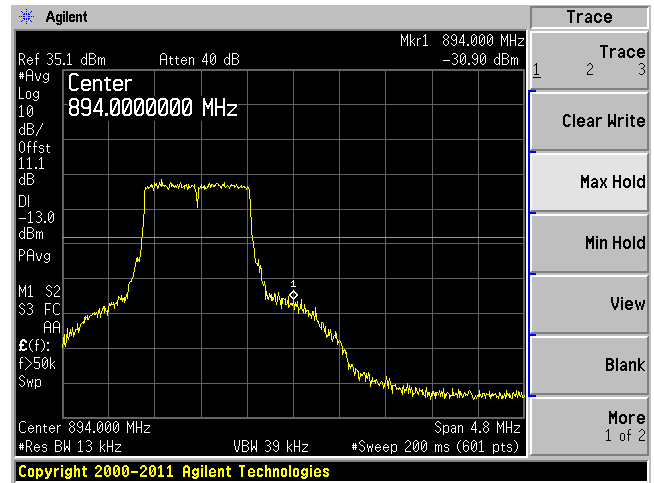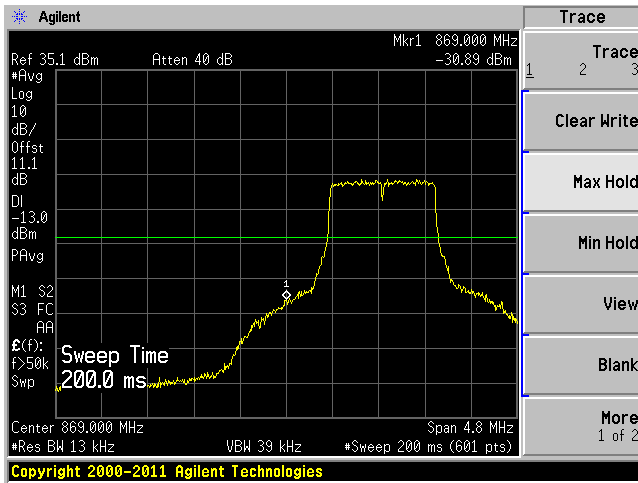



16QAM 1.4 MHz - Low Channel

16QAM 1.4 MHz - High Channel

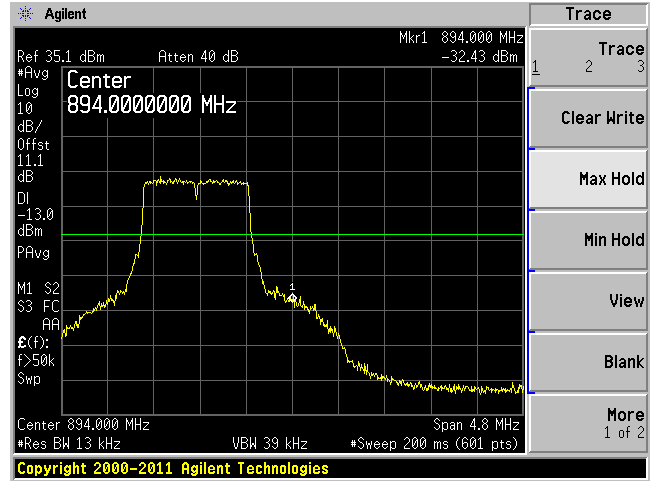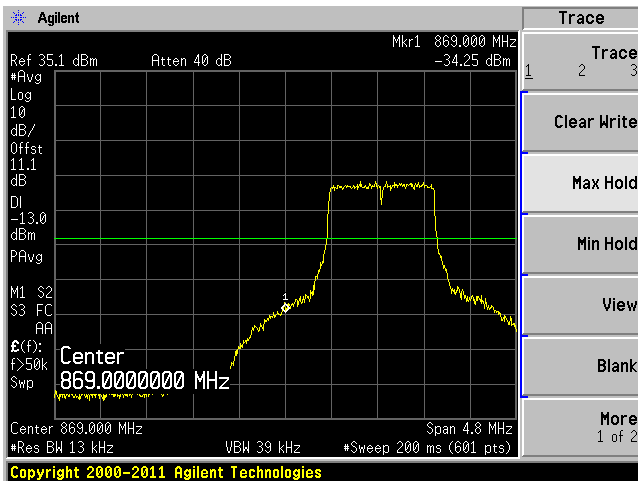



64QAM 1.4 MHz - Low Channel

64QAM 1.4 MHz - High Channel

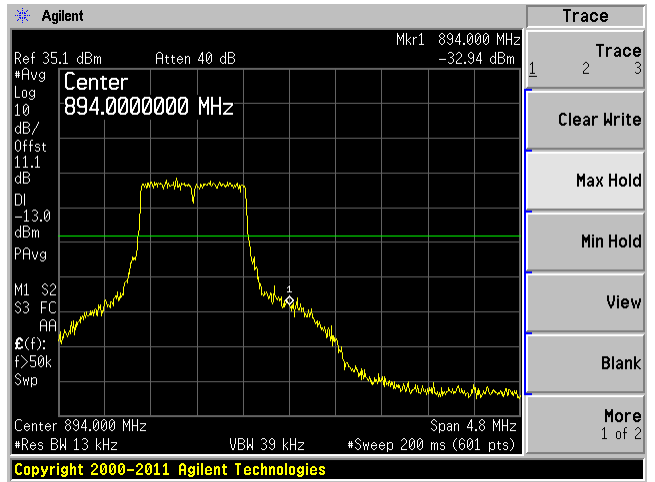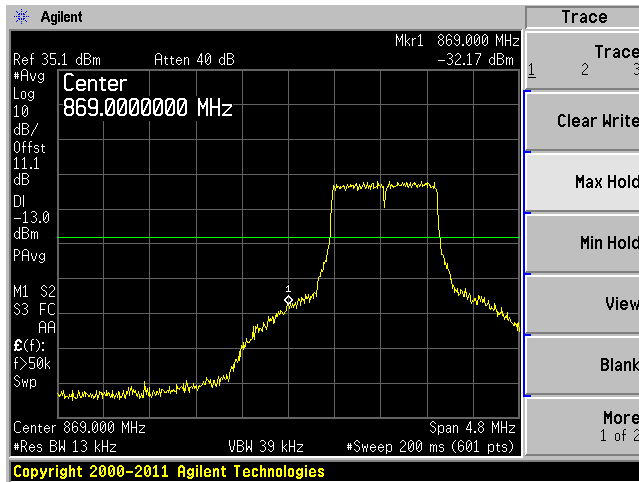


QPSK 3 MHz - Low Channel


QPSK 3 MHz - High Channel

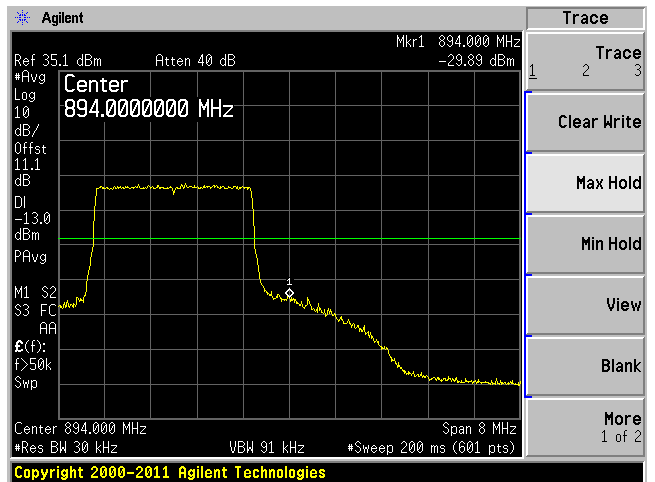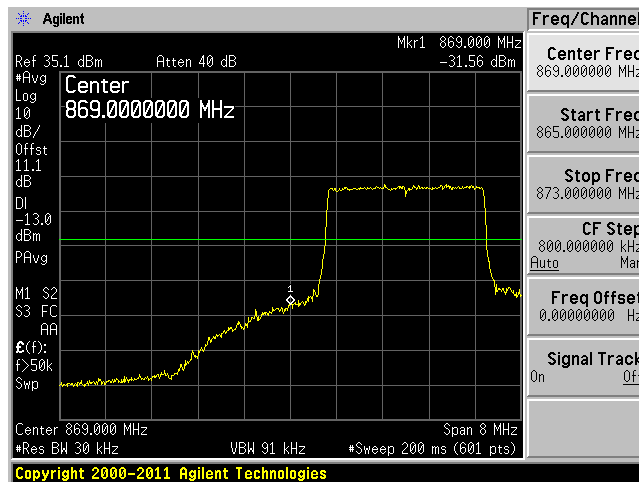


16QAM 3 MHz - Low

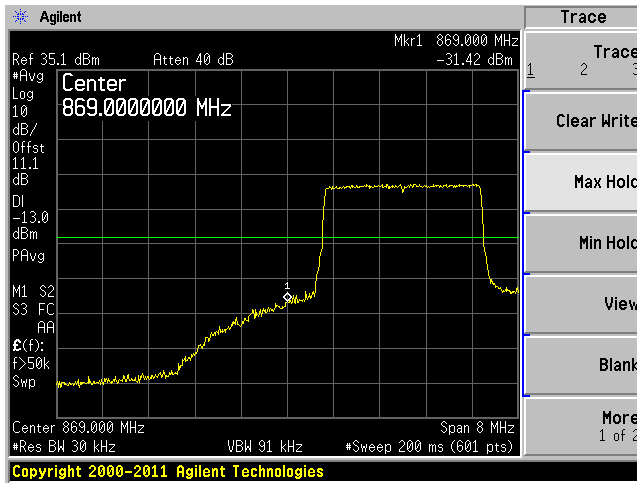


16QAM 3 MHz - High Channel

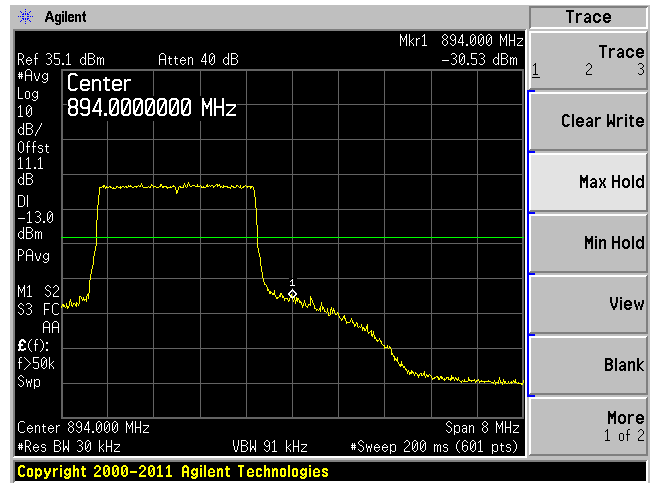

64QAM 3 MHz - Low Channel


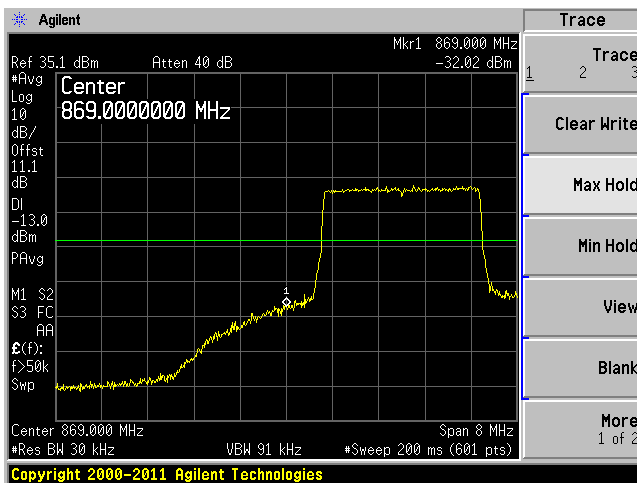


64QAM 3 MHz - High Channel

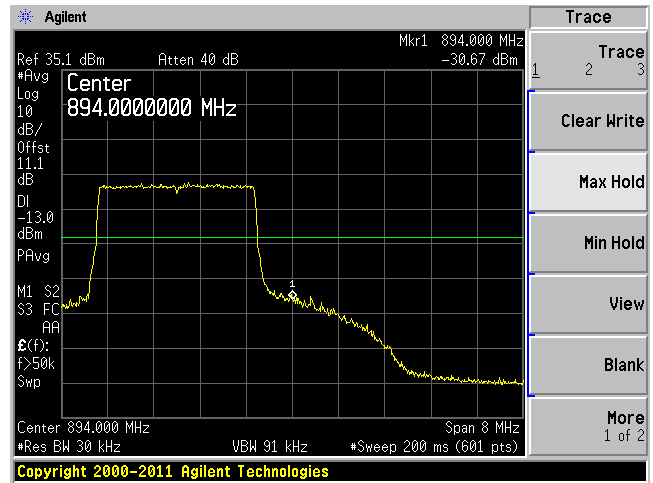



QPSK 5 MHz - Low Channel

QPSK 5 MHz - High Channel

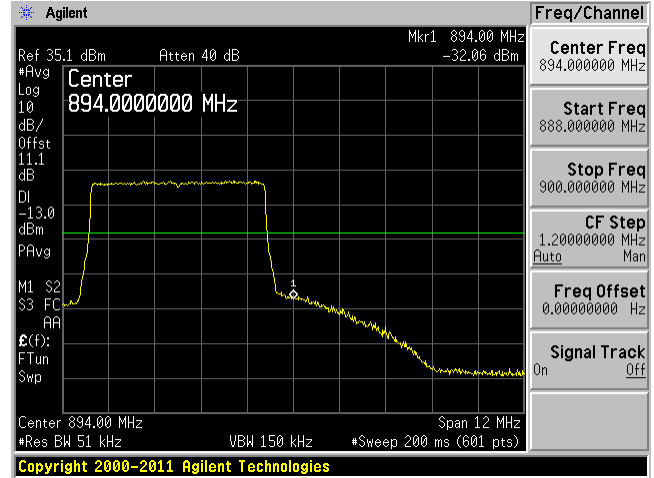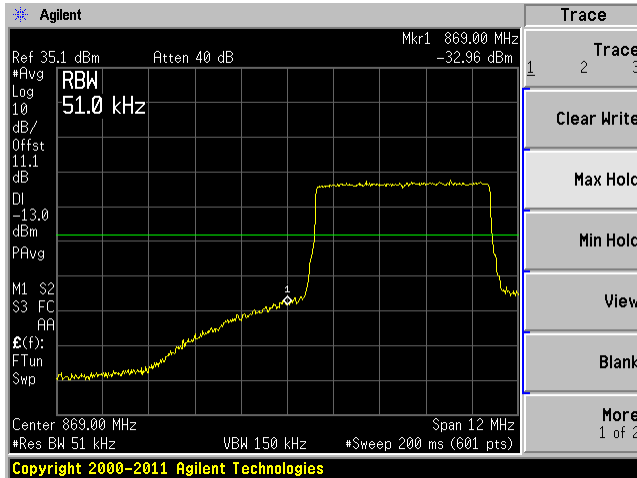



16QAM 5 MHz - Low Channel

16QAM 5 MHz - High Channel

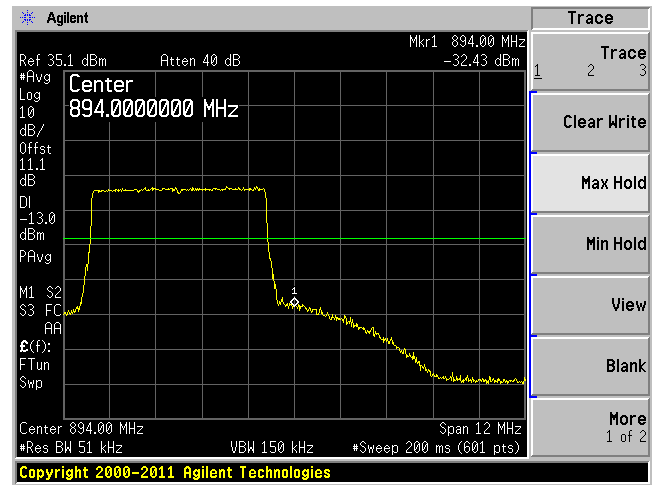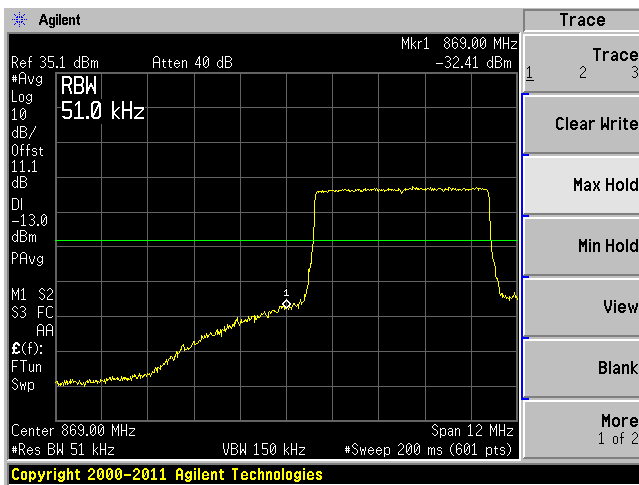



64QAM 5 MHz - Low Channel

64QAM 5 MHz - High Channel

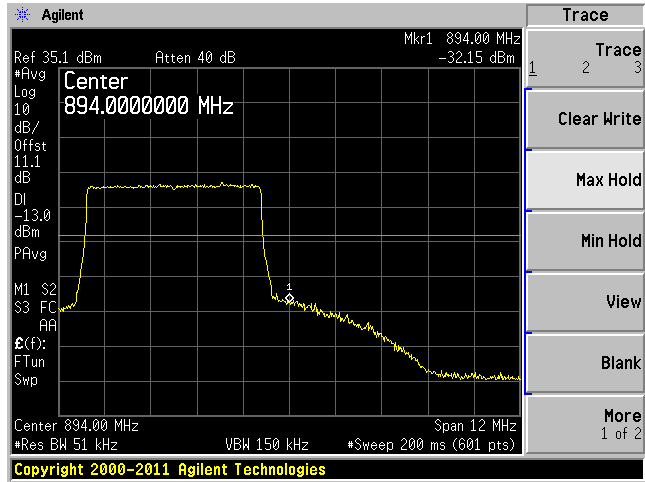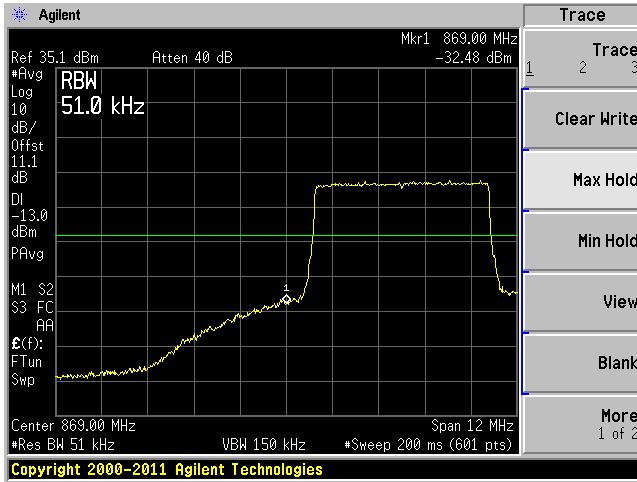


QPSK 10 MHz - Low Channel


QPSK 10 MHz - High Channel

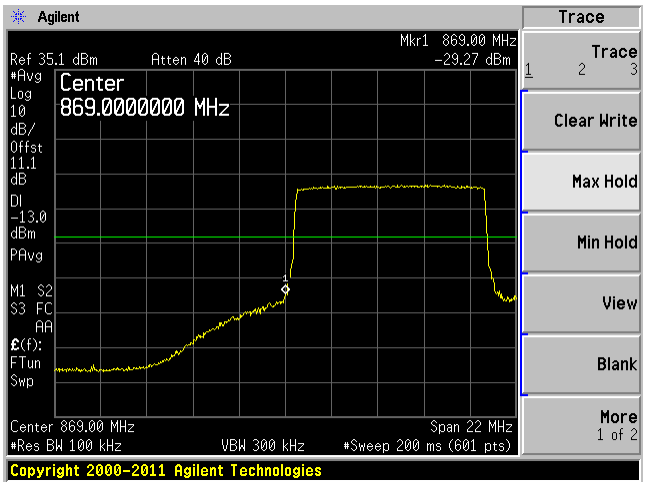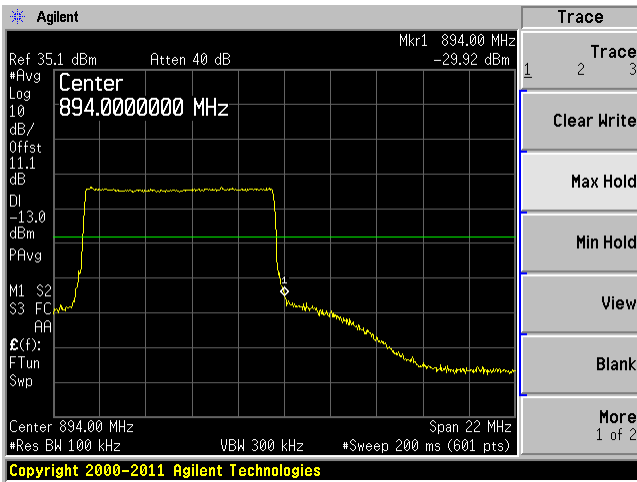


16QAM 10 MHz - Low Channel

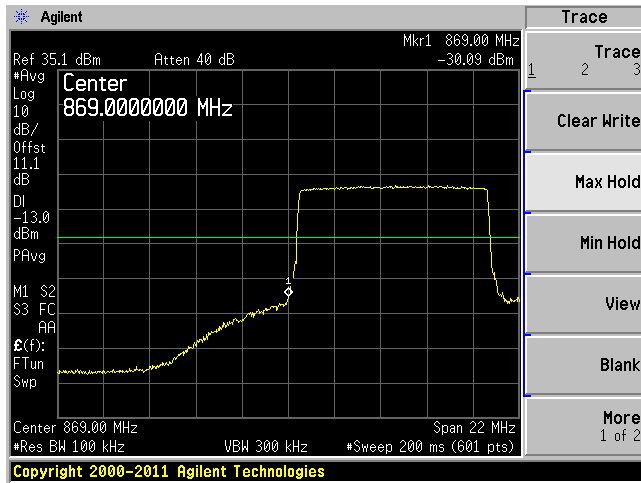


16QAM 10 MHz - High Channel

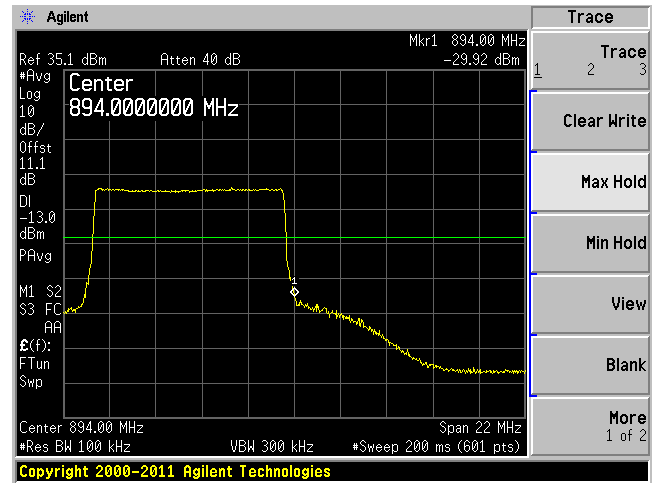

64QAM 10MHz - Low Channel

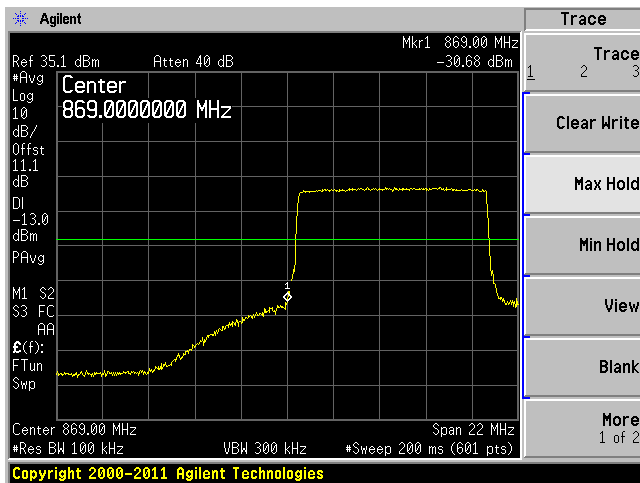


64QAM 10MHz - High Channel

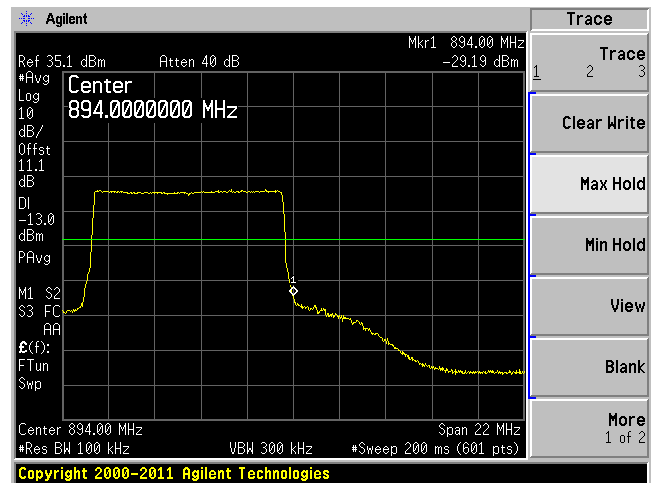


PCS Band Downlink

GSM/GPRS - Low Channel

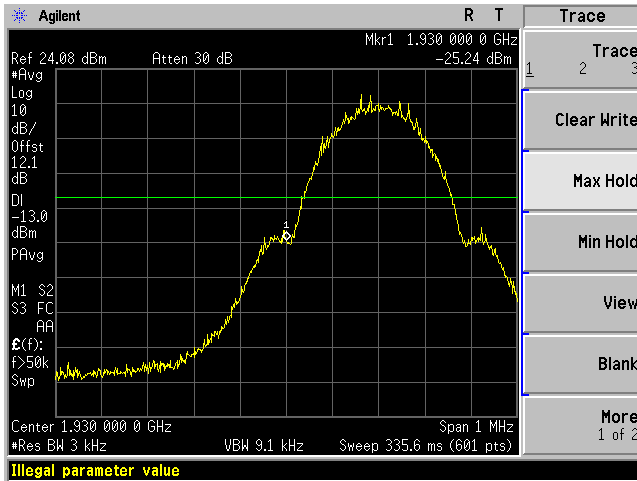


GSM/GPRS - High Channel

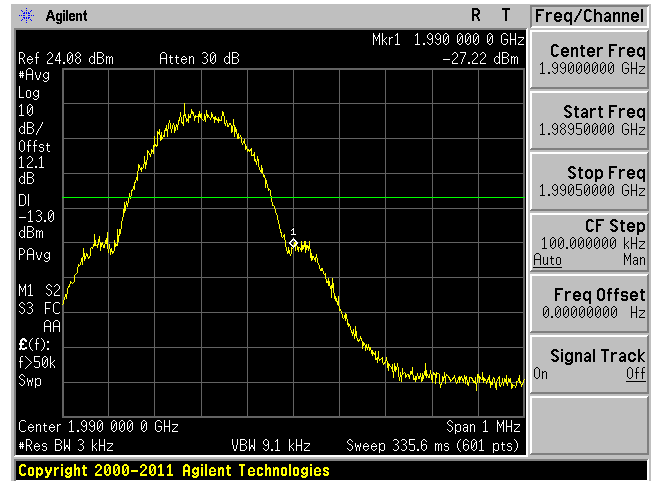

EDGE - Low Channel





EDGE - High Channel

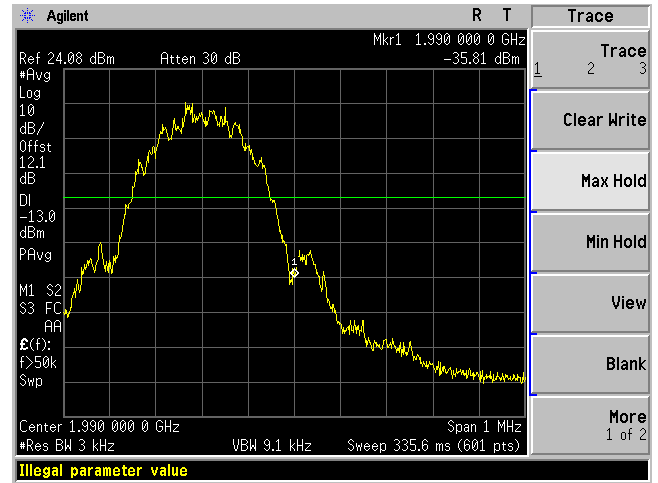



CDMA/EVDO - Low Channel

CDMA/EVDO - High Channel

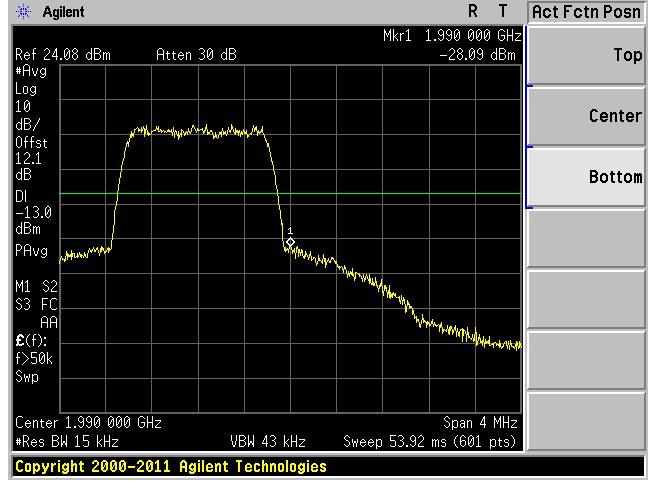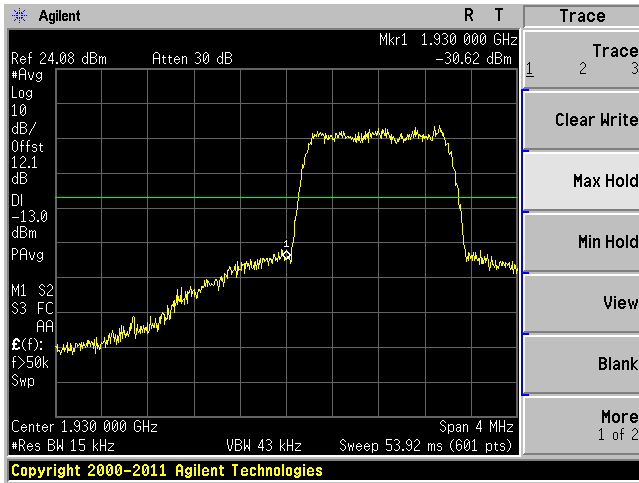



WCDMA/HSPA - Low Channel

WCDMA/HSPA - High Channel

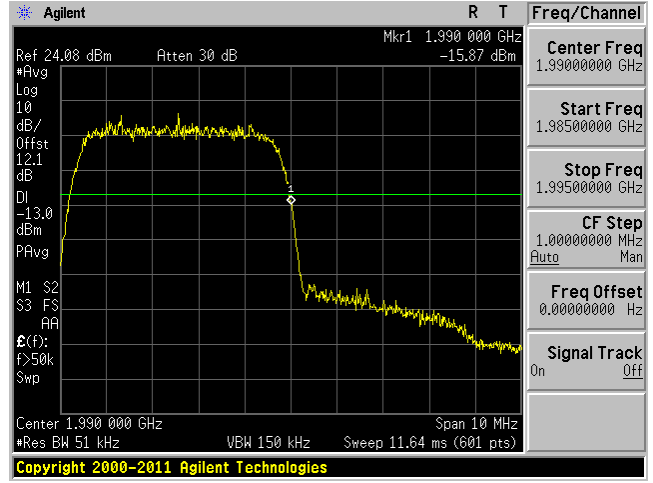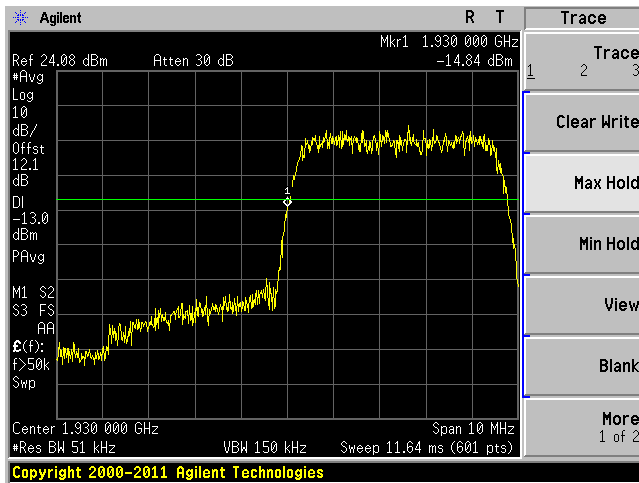



QPSK 1.4 MHz - Low Channel

QPSK 1.4 MHz - High Channel

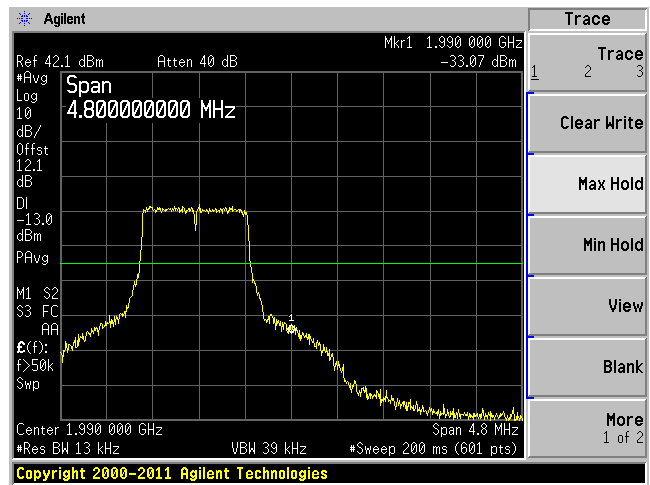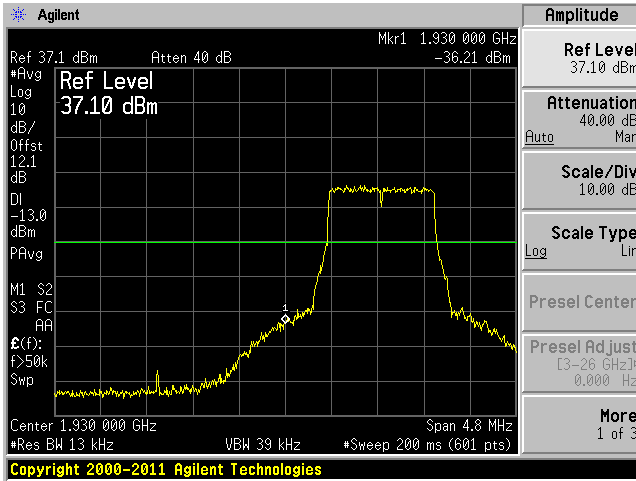


16QAM 1.4 MHz - Low Channel


16QAM 1.4 MHz - High Channel

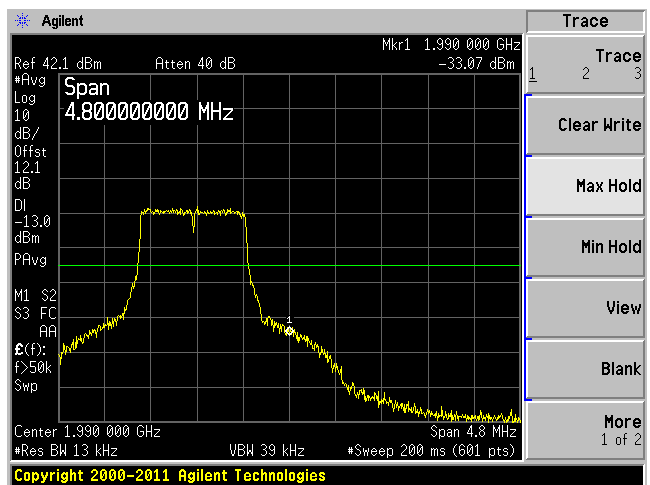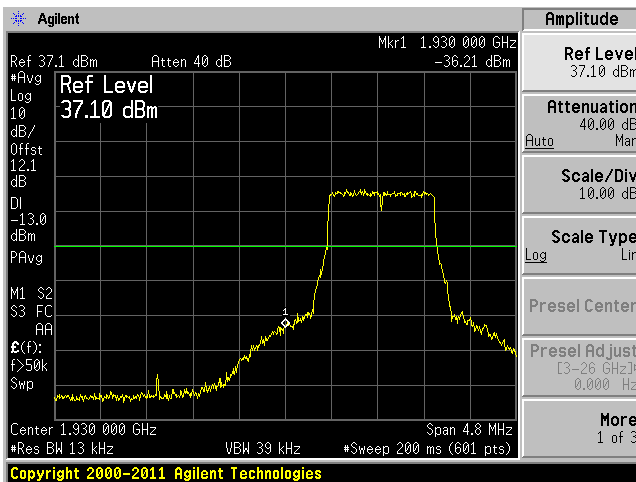


64QAM 1.4 MHz - Low Channel

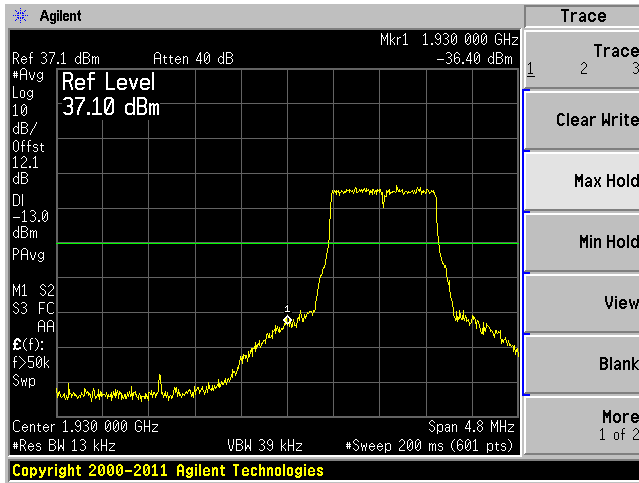


64QAM 1.4 MHz - High Channel

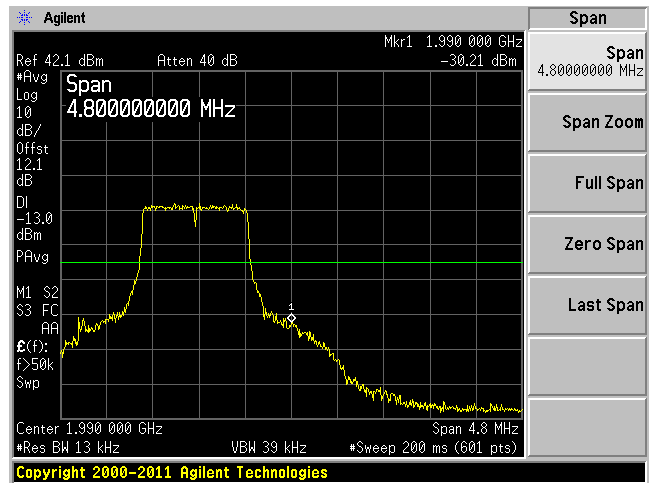

QPSK 3 MHz - Low Channel


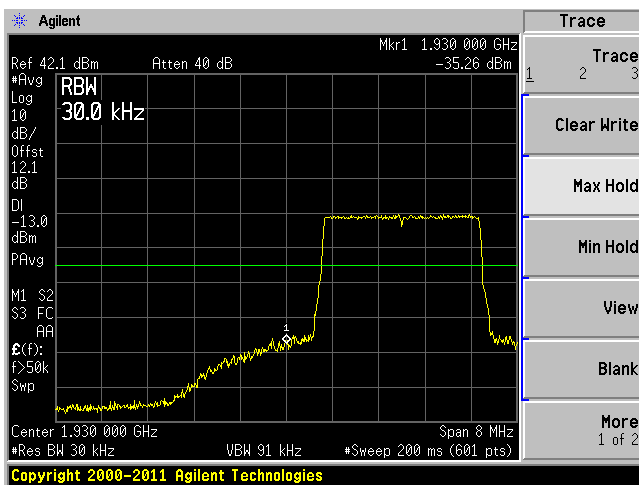


QPSK 3 MHz - High Channel

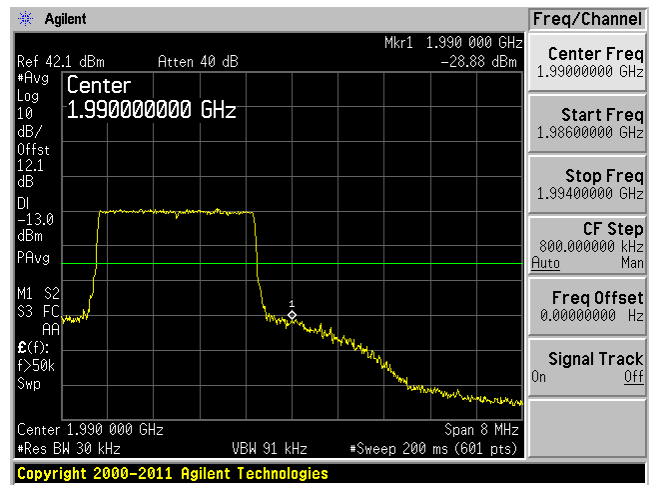



16QAM 3 MHz - Low Channel

16QAM 3 MHz - High Channel

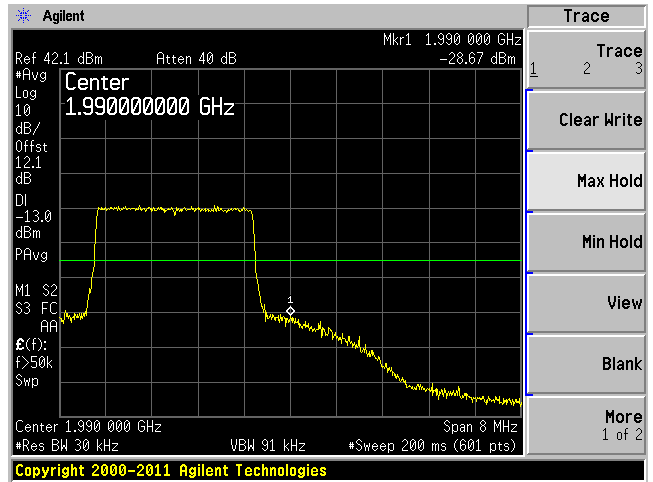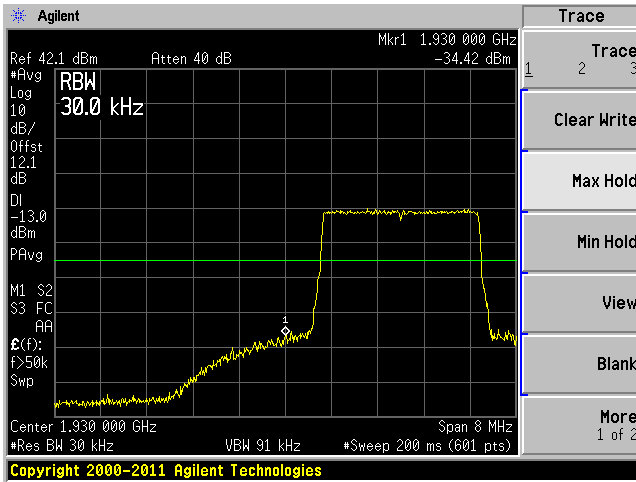


64QAM 3 MHz - Low Channel


64QAM 3 MHz - High Channel

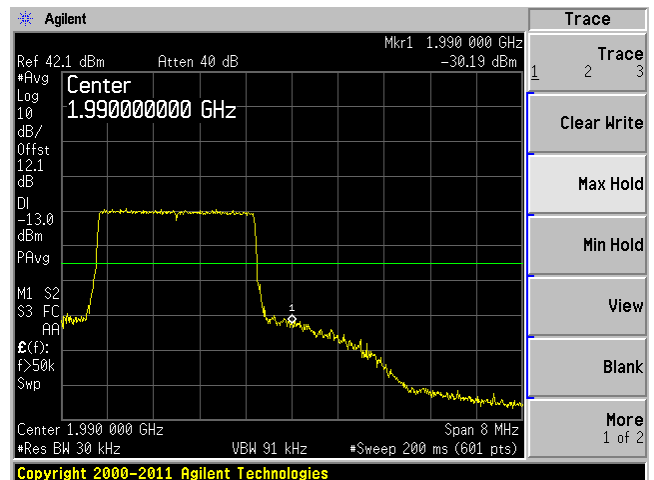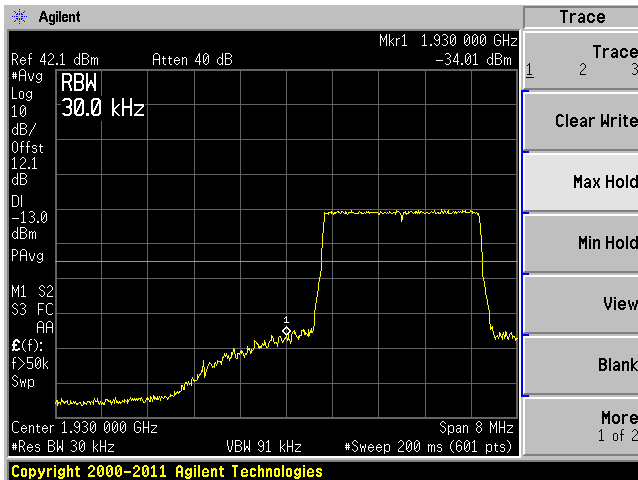


QPSK 5 MHz - Low Channel

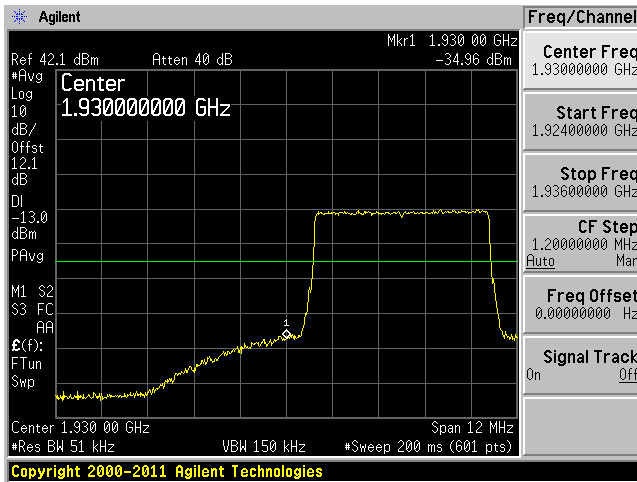


QPSK 5 MHz - High Channel

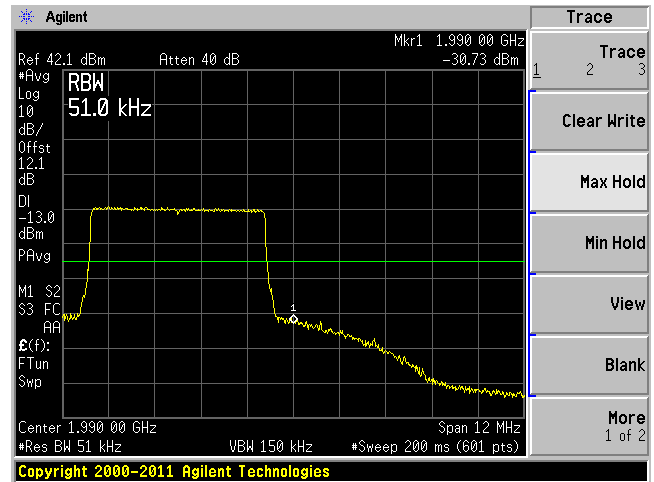

16QAM 5 MHz - Low Channel


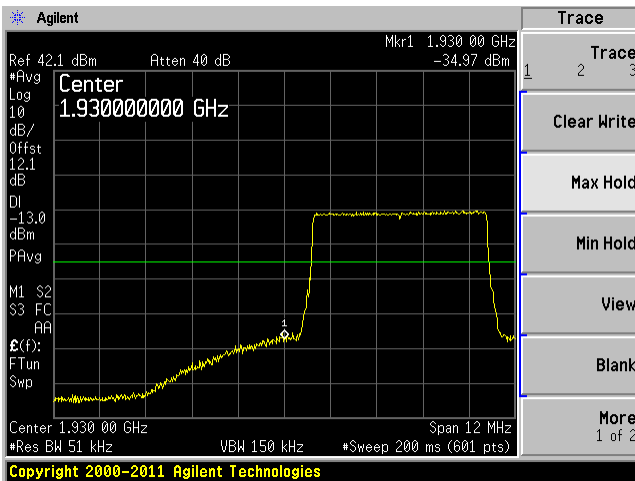


16QAM 5 MHz - High Channel

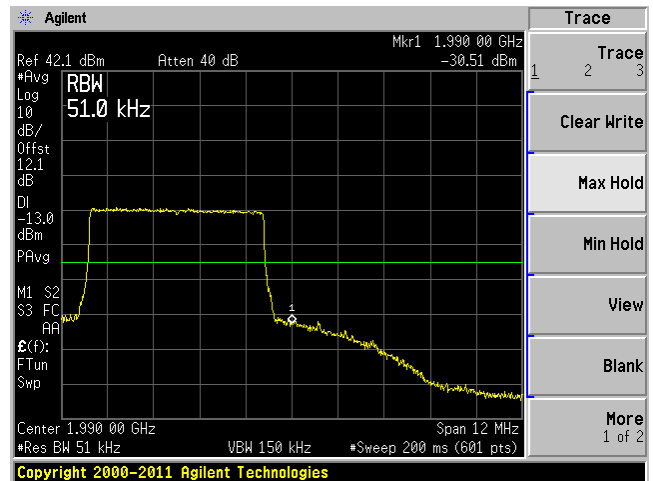



64QAM 5 MHz - Low Channel

64QAM 5 MHz - High Channel

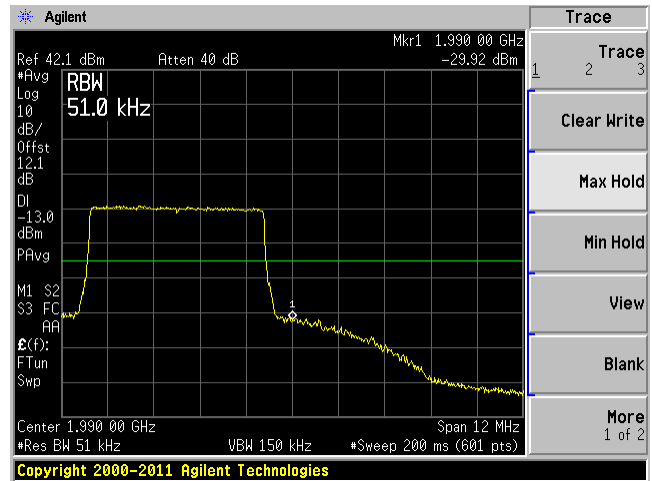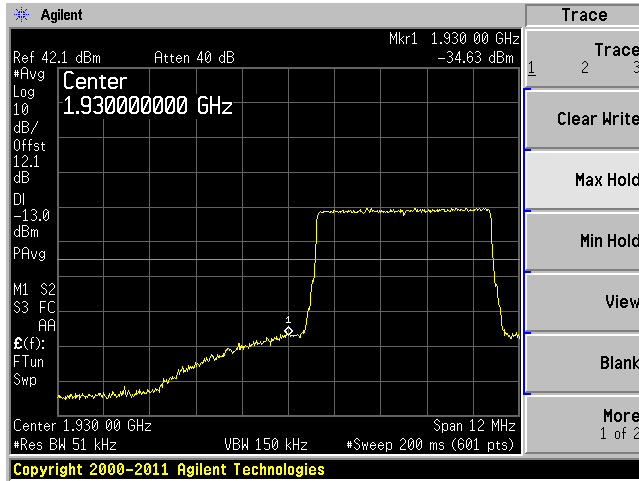



QPSK 10 MHz - Low Channel

QPSK 10 MHz - High Channel

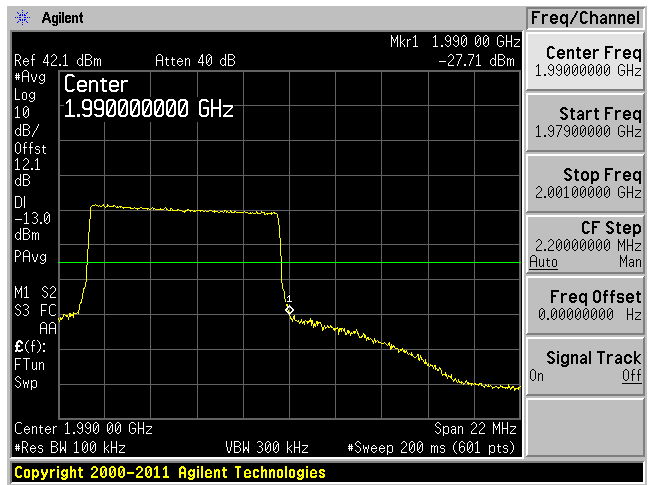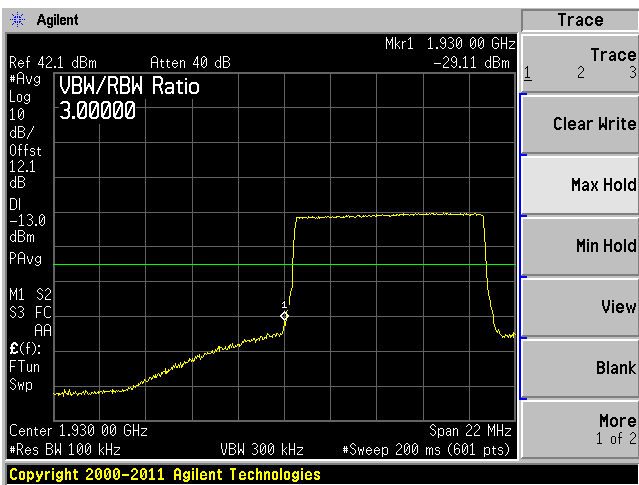



16QAM 10 MHz - Low Channel

16QAM 10 MHz - High Channel

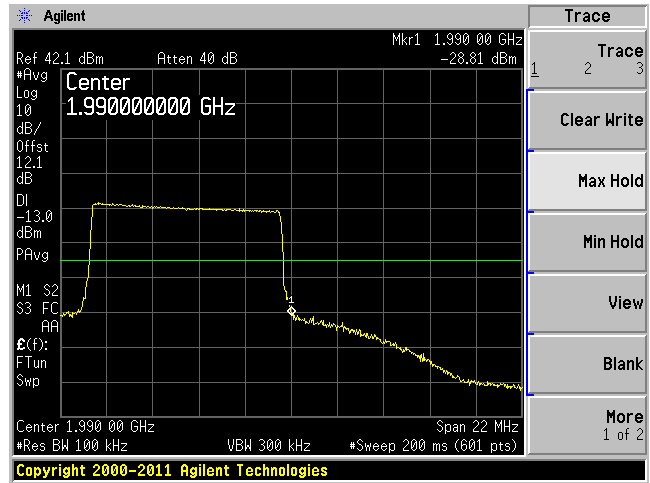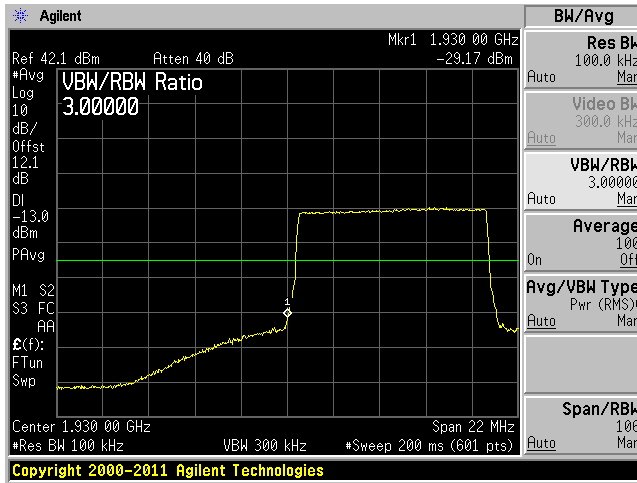

64QAM 10 MHz - Low Channel

64QAM 10 MHz - High Channel

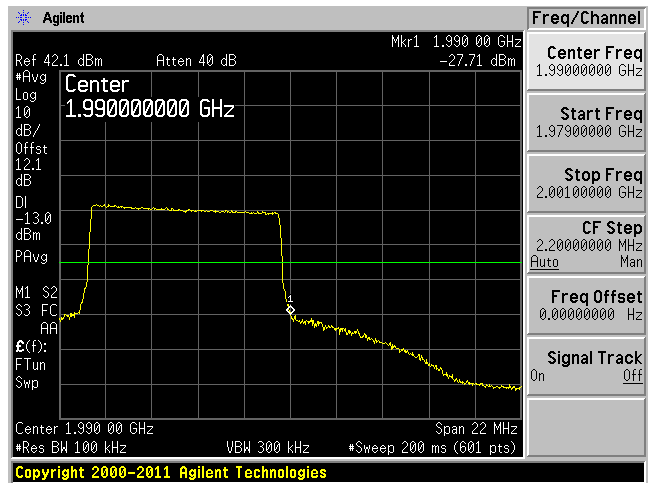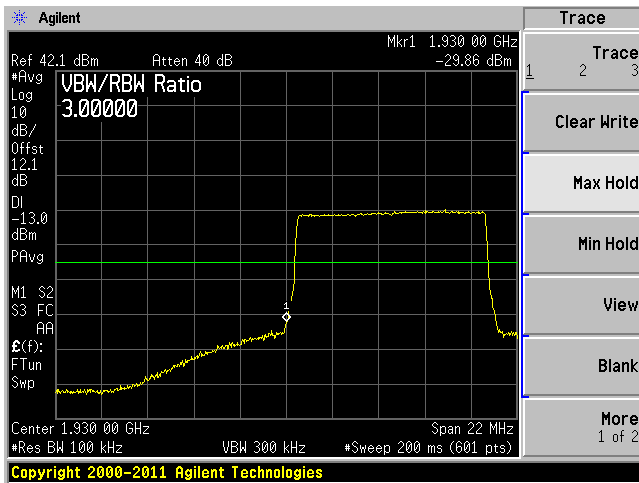

9 FCC §2.1055 – Frequency Stability

9.1 Applicable Standard


According to FCC §2.1055 the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

9.2 Test Procedure

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification-the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

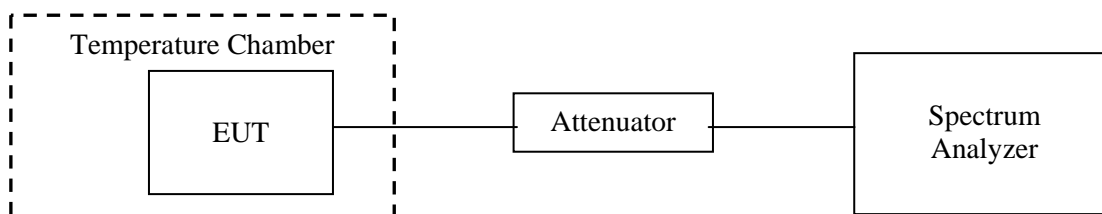

9.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09 ¹
Agilent	Signal Generator	E4438C	MY45091309	2012-05-03
Espec	Temp/Humidity Chamber	ESL-4CA	18010	2012-02-10

Note 1: Based on a two year calibration cycle.

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed according to A2LA requirements, traceable to the NIST.

9.4 Test Environmental Conditions

Temperature:	21 °C
Relative Humidity:	57 %
ATM Pressure:	101.4kPa

The testing was performed by Wei Sun on 2012-06-21 at RF Site.

9.5 Test Results

Cellular Band Downlink Middle Channel

Test Condition		Reference Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (PPM)	Limit (PPM)
Voltage (Vac)	Temperature (°C)				
Frequency vs. Temperature					
120	45	881.5	881.5000185	0.021	± 2.5
120	35	881.5	881.5000235	0.0267	± 2.5
120	25	881.5	881.5000156	0.0177	± 2.5
120	15	881.5	881.5000135	0.0150	± 2.5
120	5	881.5	881.500021	0.0238	± 2.5
120	-5	881.5	881.5000156	0.0177	± 2.5
120	-15	881.5	881.5000283	0.0321	± 2.5
120	-25	881.5	881.5000191	0.02167	± 2.5
Frequency vs. Voltage					
108	25	881.5	881.500021	0.0238	± 2.5
132	25	881.5	881.5000155	0.0176	± 2.5

PCS Band Downlink Middle Channel

Test Condition		Reference Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (PPM)	Limit (PPM)
Voltage (Vac)	Temperature (°C)				
Frequency vs. Temperature					
120	45	1960	1960.000025	0.0128	± 2.5
120	35	1960	1960.000038	0.0194	± 2.5
120	25	1960	1960.000045	0.0230	± 2.5
120	15	1960	1960.000021	0.0107	± 2.5
120	5	1960	1960.000075	0.0383	± 2.5
120	-5	1960	1960.000046	0.0235	± 2.5
120	-15	1960	1960.000074	0.0378	± 2.5
120	-25	1960	1960.000067	0.0342	± 2.5
Frequency vs. Voltage					
108	25	1960	1960.000095	0.0485	± 2.5
132	25	1960	1960.000091	0.0463	± 2.5

10 FCC §1.1307(b)(1) & §2.1091 – RF Exposure Information

10.1 Applicable Standard

According to FCC §1.1310 and §2.1091 (Mobile Devices) RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

Note: f = frequency in MHz

* = Plane-wave equivalent power density

10.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Cellular Band

Maximum peak output power at antenna input terminal (dBm):	<u>25.86</u>
Maximum peak output power at antenna input terminal (mW):	<u>385.48</u>
Prediction distance (cm):	<u>20</u>
Prediction frequency (MHz):	<u>881.5</u>
Antenna Gain, typical (dBi):	<u>15</u>
Cable Loss (dB):	<u>7.0</u>
Maximum Net Gain (numeric):	<u>6.31</u>
Power density at predication frequency and distance (mW/cm ²):	<u>0.4839</u>
MPE limit for uncontrolled exposure at predication frequency (mW/cm ²):	<u>0.5877</u>

PCS Band

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>26.13</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>410.20</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>1960</u>
<u>Antenna Gain, typical (dBi):</u>	<u>15</u>
<u>Cable Loss (dB):</u>	<u>9</u>
<u>Maximum Net Gain (numeric):</u>	<u>3.98</u>
<u>Power density at predication frequency and distance (mW/cm²):</u>	<u>0.3248</u>
<u>MPE limit for uncontrolled exposure at predication frequency (mW/cm²):</u>	<u>1.0</u>

Note: In order to keep 2 Watt EIRP, the net gain with antenna and cable loss should be less than 6 dBi for PCS band.

Results

For Downlink; the highest power density level at 20 cm is below the MPE uncontrolled exposure limit.