

NORTHWEST EMC

TE Connectivity / ADC Telecommunications

InterReach Fusion TDD - 2.5 GHz -RAU

FCC 27:2015

Report # TECO0025



NVLAP Lab Code: 200881-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report may only be duplicated in its entirety

CERTIFICATE OF TEST



Last Date of Test: March 6, 2015
TE Connectivity / ADC Telecommunications
Model: InterReach Fusion TDD - 2.5 GHz -RAU

Radio Equipment Testing

Standards

Specification	Method
FCC 27:2015, FCC 2.1046	ANSI/TIA/EIA-603-C-2004
FCC 27:2015, FCC 2.1049	
FCC 27:2015, FCC 2.1051	
FCC 27:2015, FCC 2.1053	
FCC 27:2015, FCC 2.1055	

Results

Test Description	Applied	Results	Comments
Equivalent Isotropic Radiated Power (EIRP)	Yes	Pass	
Emissions Bandwidth	Yes	Pass	
Spurious Conducted Emissions	Yes	Pass	
Band Edge Compliance	Yes	Pass	
Intermodulation	Yes	Pass	
Frequency Stability	Yes	Pass	
Field Strength of Spurious Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:

Tim O'Shea, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test.

REVISION HISTORY

Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

IC - Recognized by Industry Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with IC.

European Union

European Commission – Validated by the European Commission as a Conformity Assessment Body (CAB) under the EMC directive and as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) for each test is on each data sheet. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.




The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	4.7 dB	-4.7 dB
AC Powerline Conducted Emissions (dB)	2.9 dB	-2.9 dB

FACILITIES



California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 9801 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Industry Canada					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRR, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

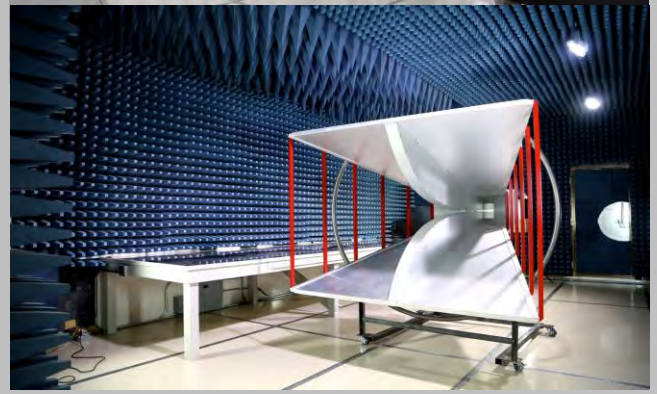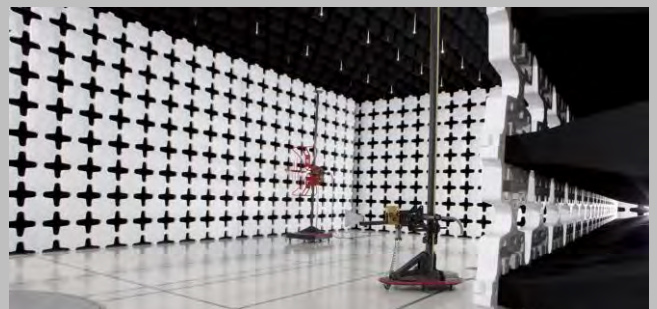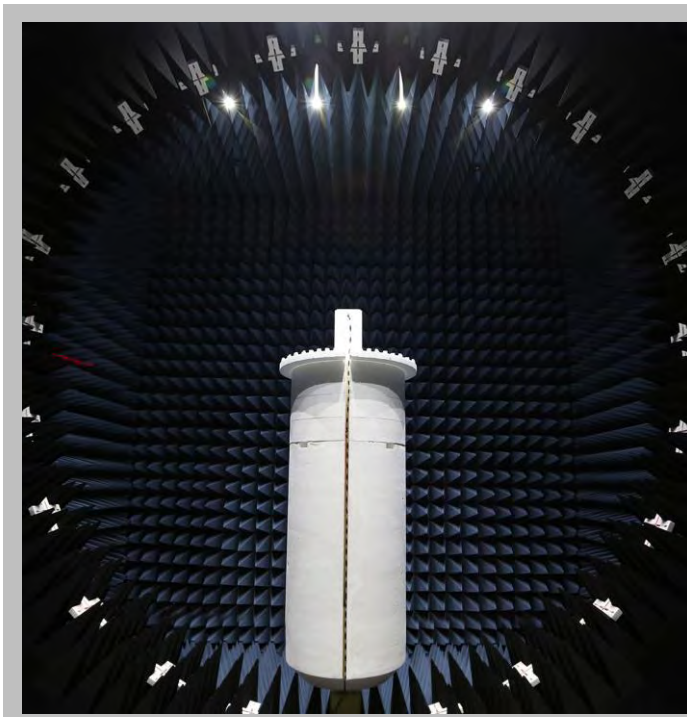

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	TE Connectivity / ADC Telecommunications
Address:	1187 Park Place
City, State, Zip:	Shakopee, MN 55379
Test Requested By:	Joshua Wittman
Model:	InterReach Fusion TDD - 2.5 GHz -RAU
First Date of Test:	March 03, 2015
Last Date of Test:	March 06, 2015
Receipt Date of Samples:	March 03, 2015
Equipment Design Stage:	Production
Equipment Condition:	No Damage

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
In-Building Wireless Networking System utilizing LTE 20 MHz channel bandwidth 2x2 MIMO in Band 41, 2500 MHz (2496 – 2690 MHz).
Testing Objective:
To demonstrate compliance to FCC Part 27.

CONFIGURATIONS

Configuration TECO0025- 1

Software/Firmware Running during test	
Description	Version
Remote Firmware	01-06-3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
InterReach Fusion TDD - 2.5 GHz -RAU	TE Connectivity / ADC Telecommunications	FSN-2525-1-TDD	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
RF Signal Generator	Agilent	E4438C	MC60053
Laptop	Lenovo	T400	L3-A9994 08/09
Laptop Supply	Lenovo	42T4418	11S42T4418Z1ZGWWG19659N
InterReach Fusion Main Hub	TE Connectivity / ADC Telecommunications	FSN-1-MH-2	MR2210U4
InterReach Fusion Expansion Hub	TE Connectivity / ADC Telecommunications	FSN-W1-EH-2	GR221U7W
Attenuator	Not Listed	None	A1164
Attenuator	Not Listed	None	A1153

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	1.8m	No	RF Signal Generator	AC Mains
AC Power	No	1.8m	No	InterReach Fusion Main Hub	AC Mains
AC Power	No	1.8m	No	InterReach Fusion Expansion Hub	AC Mains
AC Power	No	1.8m	No	Laptop Supply	AC Mains
DC Power	No	1.8m	Yes	Laptop	Laptop Supply
Ethernet	No	1.8m	No	InterReach Fusion Main Hub	Laptop
Coax	Yes	2.0m	No	InterReach Fusion Expansion Hub	InterReach Fusion TDD - 2.5 GHz -RAU
Coax x2 to Coax via combiner	Yes	2.7m	No	InterReach Fusion Main Hub	RF Signal Generator
Fiber x2	No	1.8m	No	InterReach Fusion Main Hub	IO Control Device

CONFIGURATIONS

Configuration TECO0025- 2

Software/Firmware Running during test	
Description	Version
Remote Firmware	01-06-3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
InterReach Fusion TDD - 2.5 GHz -RAU	TE Connectivity / ADC Telecommunications	FSN-2525-1-TDD	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Attenuator	Not Listed	None	A1164
Attenuator	Not Listed	None	A1153

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
RF Signal Generator	Agilent	E4438C	MC60053
Laptop	Lenovo	T400	L3-A9994 08/09
Laptop Supply	Lenovo	42T4418	11S42T4418Z1ZGWWG19659N
InterReach Fusion Main Hub	TE Connectivity / ADC Telecommunications	FSN-1-MH-2	MR2210U4
InterReach Fusion Expansion Hub	TE Connectivity / ADC Telecommunications	FSN-W1-EH-2	GR221U7W

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	1.8m	No	RF Signal Generator	AC Mains
AC Power	No	1.8m	No	InterReach Fusion Main Hub	AC Mains
AC Power	No	1.8m	No	InterReach Fusion Expansion Hub	AC Mains
AC Power	No	1.8m	No	Laptop Supply	AC Mains
DC Power	No	1.8m	Yes	Laptop	Laptop Supply
Ethernet	No	1.8m	No	InterReach Fusion Main Hub	Laptop
Coax x2 to Coax via combiner	Yes	2.7m	No	InterReach Fusion Main Hub	RF Signal Generator
Fiber x2	No	1.8m	No	InterReach Fusion Main Hub	IO Control Device
Coax	No	>3.0m	No	InterReach Fusion Expansion Hub	InterReach Fusion TDD - 2.5 GHz -RAU

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	3/3/2015	Intermodulation	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	3/3/2015	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	3/3/2015	Equivalent Isotropic Radiated Power (EIRP)	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	3/3/2015	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	3/3/2015	Emissions Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	3/4/2015	Frequency Stability	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
7	3/6/2015	Field Strength of Spurious Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMit 2015.01.14

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
EMPower USB RF Power Sensor	ETS	7002-006	SRE	8/8/2014	12
EMPower USB RF Power Sensors	ETS	7002-006	SRA	4/17/2014	12
Attenuator - 26dB SMA	Fairview Microwave	18B5W-26	RFY	7/22/2014	12
MN08 Direct Connect Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC Block	Fairview Microwave	SD3379	AMI	10/2/2014	12
Signal Generator MXG	Agilent	N5183A	TIK	10/17/2014	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12

TEST DESCRIPTION

The RF output power was measured with the EUT set to the frequencies listed in the datasheet.

The power measurement was made using a direct connection between the RF output of the EUT and an RF Power Sensor which only measures across the high time of the burst of the carrier.

The observed duty cycle was noted but not needed to calculate the EirP.

$EiRP = \text{Max Measured Power} + \text{Antenna gain (dBi)}$

The measurements from port 1 and port 2 were summed in linear terms to determine the total average power in EIRP.

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




XMR 2015.01.14


EUT: InterReach Fusion TDD - 2.5 GHz -RAU		Work Order: TECO0025						
Serial Number: None		Date: 03/03/15						
Customer: TE Connectivity / ADC Telecommunications		Temperature: 22.5°C						
Attendees: Josh Wittman		Humidity: 16%						
Project: None		Barometric Pres.: 1007.7						
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08						
TEST SPECIFICATIONS								
FCC 27:2015		Test Method: ANSI/TIA/EIA-603-C-2004						
COMMENTS								
Antenna gain is assumed to be 0, per customer the antenna gain will be reevaluated during installation. System is rated at 158mW (+22 dBm) per port. Limit is 33 dBW + 10log(Maximum Bandwidth/6 MHz) dBW. Conversion from dBW to dBm is dBW + 30 dB = dBm. 33 dBW + 10log(20 MHz/6 MHz) dBW +30dB = 68.6 dBm								
DEVIATIONS FROM TEST STANDARD								
None								
Configuration #	1	Signature <i>Trevor Buls</i>						
		Avg Pwr Port 2 (dBm)	Avg Pwr Port 1 (dBm)	Duty Cycle (%)	Avg Pwr Sum (dBm)	EIRP (dBm)	Limit (dBm)	Results
LTE 20 MHz								
	Low Channel 2506 MHz	22.05	22.25	45.594	25.133	25.1	68.6	Pass
	Mid Channel 2593 MHz	21.95	22.46	45.59	25.21	25.2	68.6	Pass
	High Channel 2680 MHz	21.17	22.98	45.594	25.176	25.2	68.6	Pass

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)

LTE 20 MHz, Low Channel 2506 MHz						
Avg Pwr Port 2 (dBm)	Avg Pwr Port 1 (dBm)	Duty Cycle (%)	Avg Pwr Sum (dBm)	EIRP (dBm)	Limit (dBm)	Results
22.05	22.25	45.594	25.133	25.1	68.6	Pass

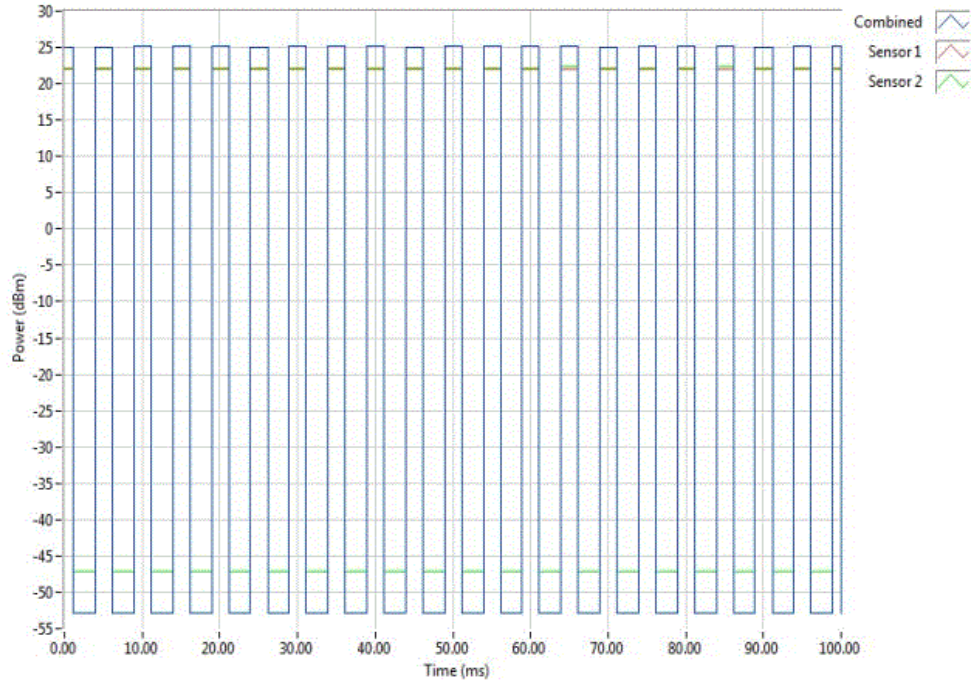


LTE 20 MHz, Mid Channel 2593 MHz						
Avg Pwr Port 2 (dBm)	Avg Pwr Port 1 (dBm)	Duty Cycle (%)	Avg Pwr Sum (dBm)	EIRP (dBm)	Limit (dBm)	Results
21.95	22.46	45.59	25.21	25.2	68.6	Pass

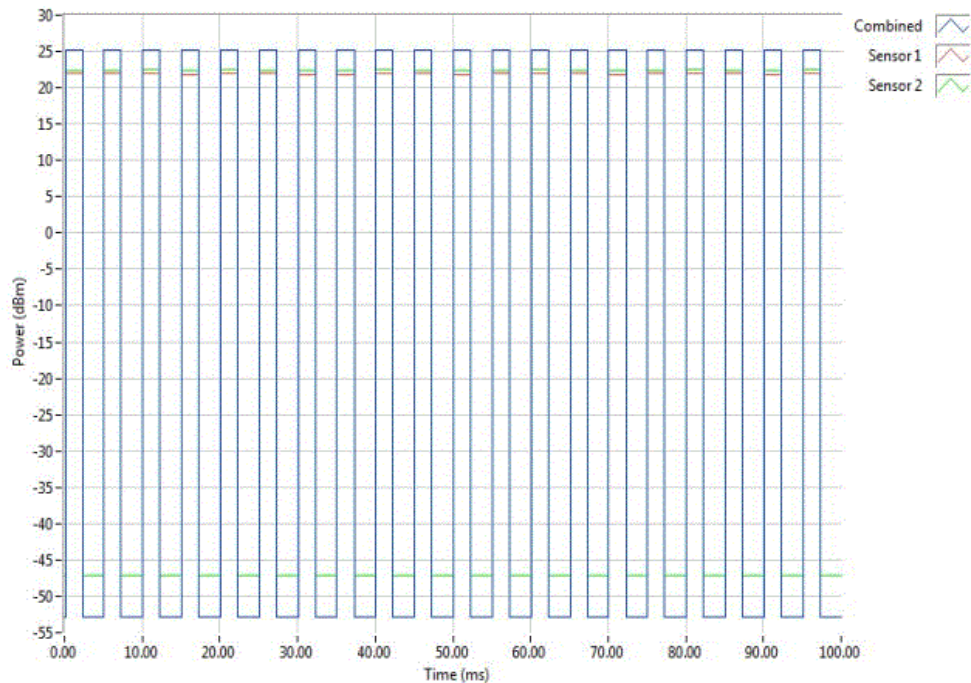

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)

LTE 20 MHz, High Channel 2680 MHz						
Avg Pwr Port 2 (dBm)	Avg Pwr Port 1 (dBm)	Duty Cycle (%)	Avg Pwr Sum (dBm)	EIRP (dBm)	Limit (dBm)	Results
21.17	22.98	45.594	25.176	25.2	68.6	Pass

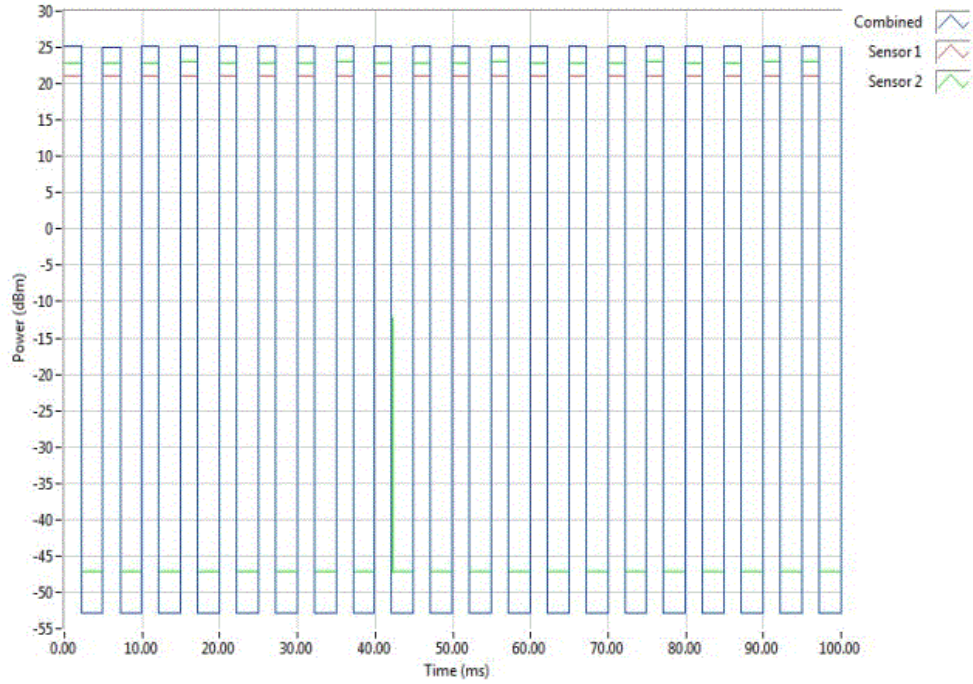

EMISSIONS BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
MN08 Direct Connect Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC Block	Fairview Microwave	SD3379	AMI	10/2/2014	12
Signal Generator MXG	Agilent	N5183A	TIK	10/17/2014	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12

TEST DESCRIPTION

A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

The spectrum analyzer settings were as follows:

- RBW = Approx. 1% of the emission bandwidth (B). This was an iterative process to determine the RBW based on the emissions bandwidth (B).
- VBW = > RBW
- A peak detector was used
- Trace max hold.

The spectrum analyzer occupied bandwidth measurement function was then used to measure 26 dB emission bandwidth.

There is no required limit to be met in the rule part for this test. The purpose of the test is to both report the results and to utilize the emission bandwidth for setting the channel power integration bandwidth during conducted output power testing.

EMISSIONS BANDWIDTH




XMR 2015.01.14


EUT: InterReach Fusion TDD - 2.5 GHz -RAU		Work Order: TECO0025	
Serial Number: None		Date: 03/03/15	
Customer: TE Connectivity / ADC Telecommunications		Temperature: 22.5°C	
Attendees: None		Humidity: 16%	
Project: None		Barometric Pres.: 1007.7	
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08	
TEST SPECIFICATIONS			
FCC 27:2015		Test Method: ANSI/TIA/EIA-603-C-2004	
COMMENTS			
Port 1 was determined to be worst case.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature <i>Trevor Buls</i>	
		Value	Limit
LTE 20 MHz			Result
Low Channel 2506 MHz		19.57 MHz	N/A
Mid Channel 2593 MHz		19.888 MHz	N/A
High Channel 2680 MHz		19.639 MHz	N/A
Sig Gen Input - Mid Channel 2593 MHz		19.865 MHz	N/A

EMISSIONS BANDWIDTH

LTE 20 MHz, Low Channel 2506 MHz			
	Value	Limit	Result
	19.57 MHz	N/A	N/A

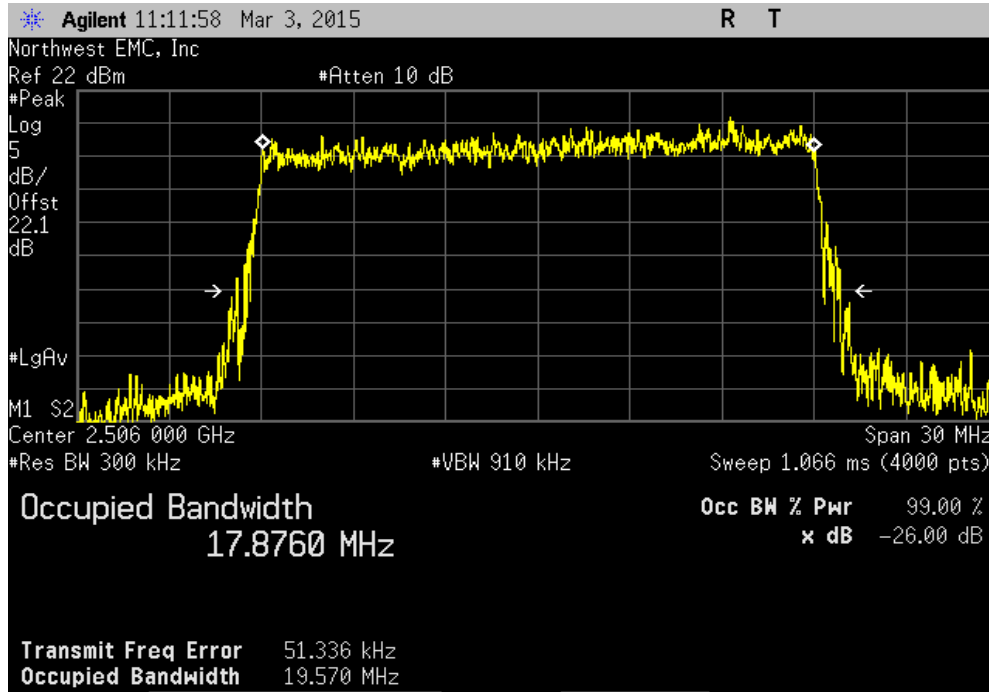


LTE 20 MHz, Mid Channel 2593 MHz			
	Value	Limit	Result
	19.888 MHz	N/A	N/A

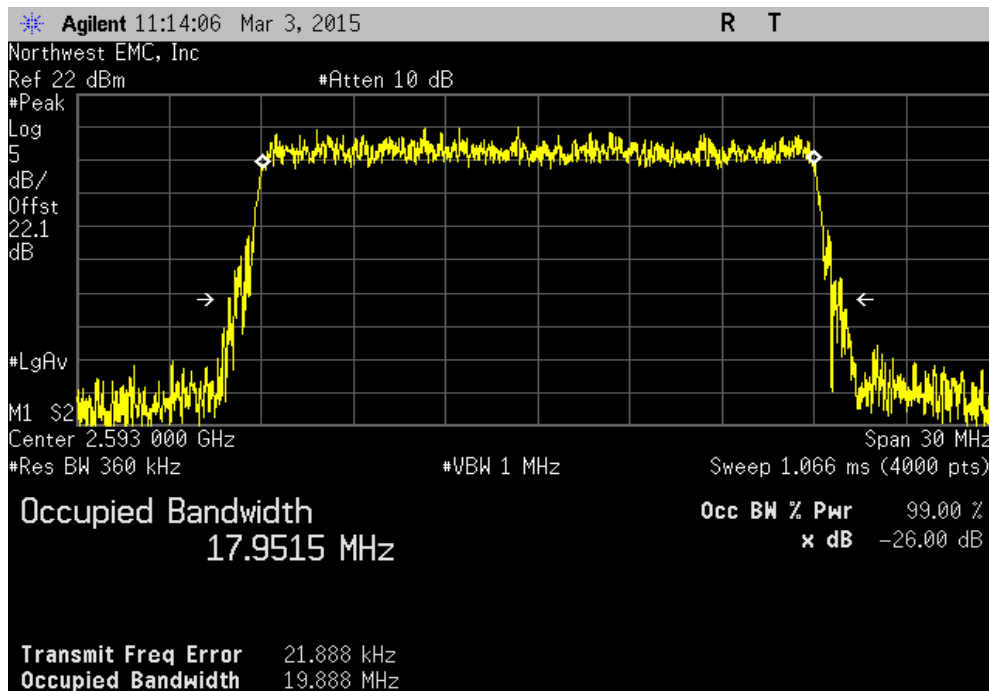


EMISSIONS BANDWIDTH

LTE 20 MHz, High Channel 2680 MHz			
	Value	Limit	Result
	19.639 MHz	N/A	N/A

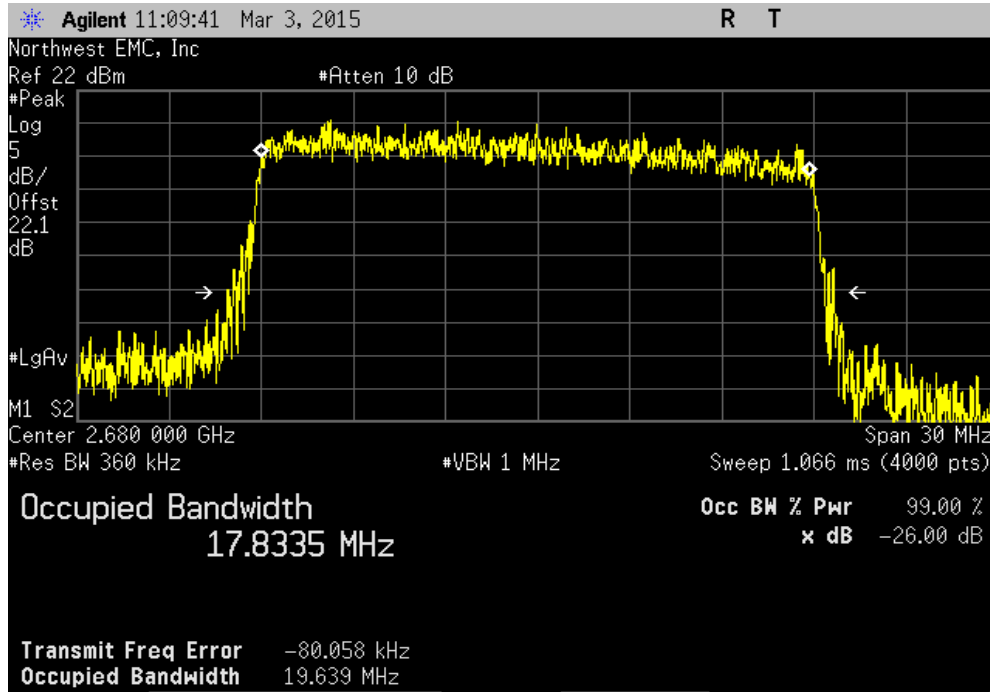

LTE 20 MHz, Sig Gen Input - Mid Channel 2593 MHz			
	Value	Limit	Result
	19.865 MHz	N/A	N/A

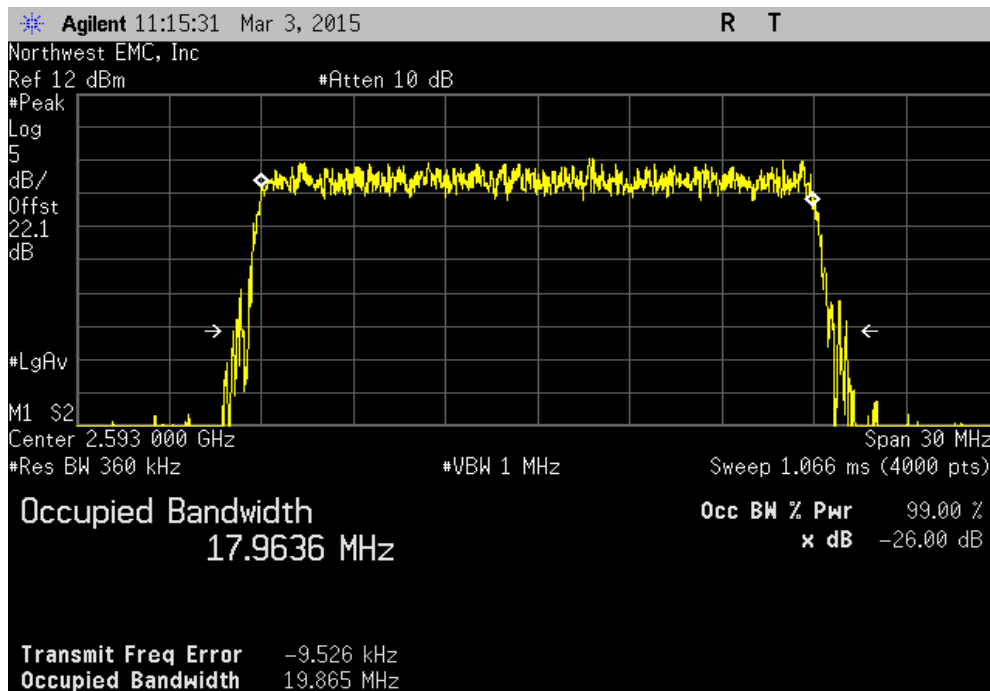

SPURIOUS CONDUCTED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Spectrum Analyzer	Agilent	N9010A	AFI	1/27/2015	12
MN08 Direct Connect Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC Block	Fairview Microwave	SD3379	AMI	10/2/2014	12
Signal Generator MXG	Agilent	N5183A	TIK	10/17/2014	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12

TEST DESCRIPTION

The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS




XMR 2015.01.14


EUT: InterReach Fusion TDD - 2.5 GHz -RAU		Work Order: TECO0025			
Serial Number: None		Date: 03/03/15			
Customer: TE Connectivity / ADC Telecommunications		Temperature: 22.5°C			
Attendees: None		Humidity: 16%			
Project: None		Barometric Pres.: 1007.7			
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08			
TEST SPECIFICATIONS					
FCC 27:2015		Test Method: ANSITIA/EIA-603-C-2004			
COMMENTS					
Port 1 was determined to be worst case.					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature <i>Trevor Buls</i>			
		Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result
LTE 20 MHz		30 MHz - 12.5 GHz	-35.33	-13	Pass
	Low Channel 2506 MHz	12.5 GHz - 27 GHz	-31.52	-13	Pass
	Mid Channel 2593 MHz	30 MHz - 12.5 GHz	-34.4	-13	Pass
	Mid Channel 2593 MHz	12.5 GHz - 27 GHz	-32.05	-13	Pass
	High Channel 2680 MHz	30 MHz - 12.5 GHz	-33.99	-13	Pass
	High Channel 2680 MHz	12.5 GHz - 27 GHz	-30.07	-13	Pass

SPURIOUS CONDUCTED EMISSIONS

LTE 20 MHz, Low Channel 2506 MHz				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz	-35.33	-13	Pass	

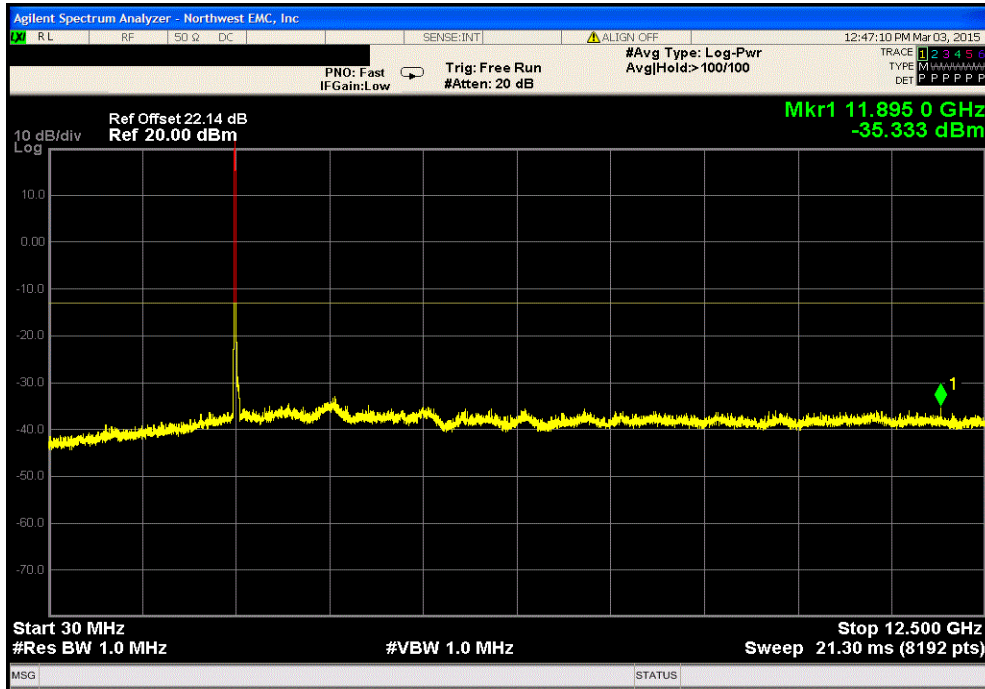


LTE 20 MHz, Low Channel 2506 MHz				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 27 GHz	-31.52	-13	Pass	

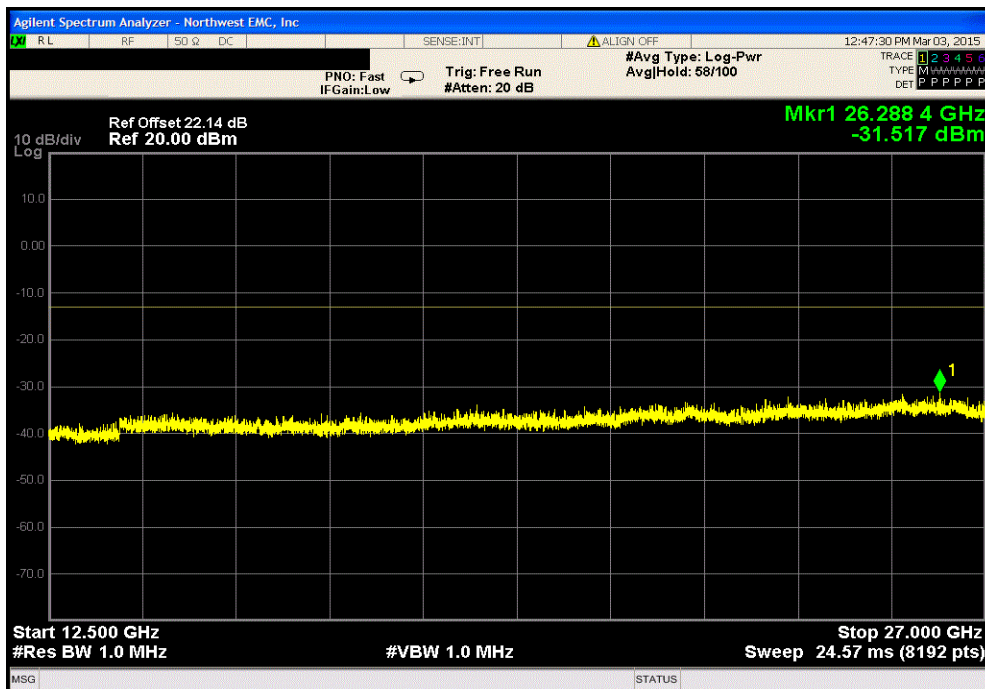


SPURIOUS CONDUCTED EMISSIONS

LTE 20 MHz, Mid Channel 2593 MHz				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz	-34.4	-13	Pass	

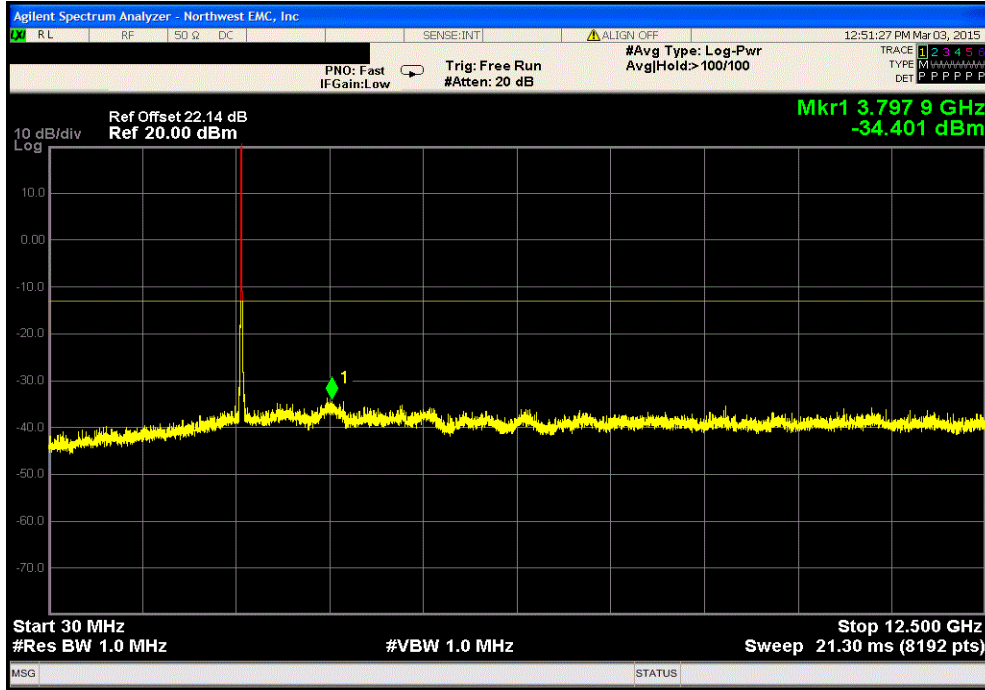


LTE 20 MHz, Mid Channel 2593 MHz				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 27 GHz	-32.05	-13	Pass	

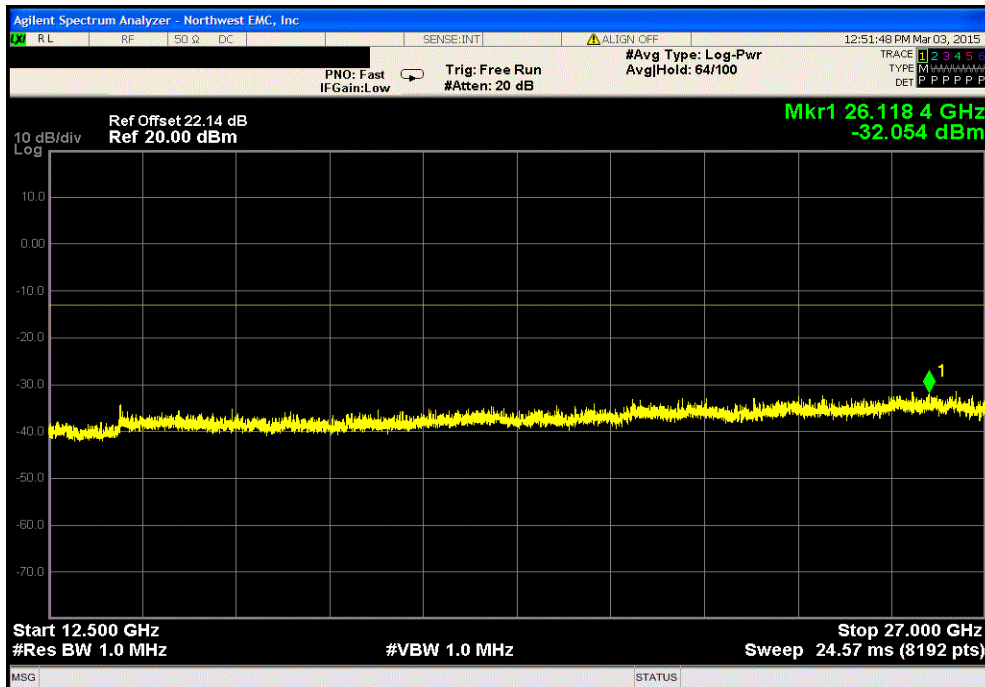


SPURIOUS CONDUCTED EMISSIONS

LTE 20 MHz, High Channel 2680 MHz				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz	-33.99	-13	Pass	

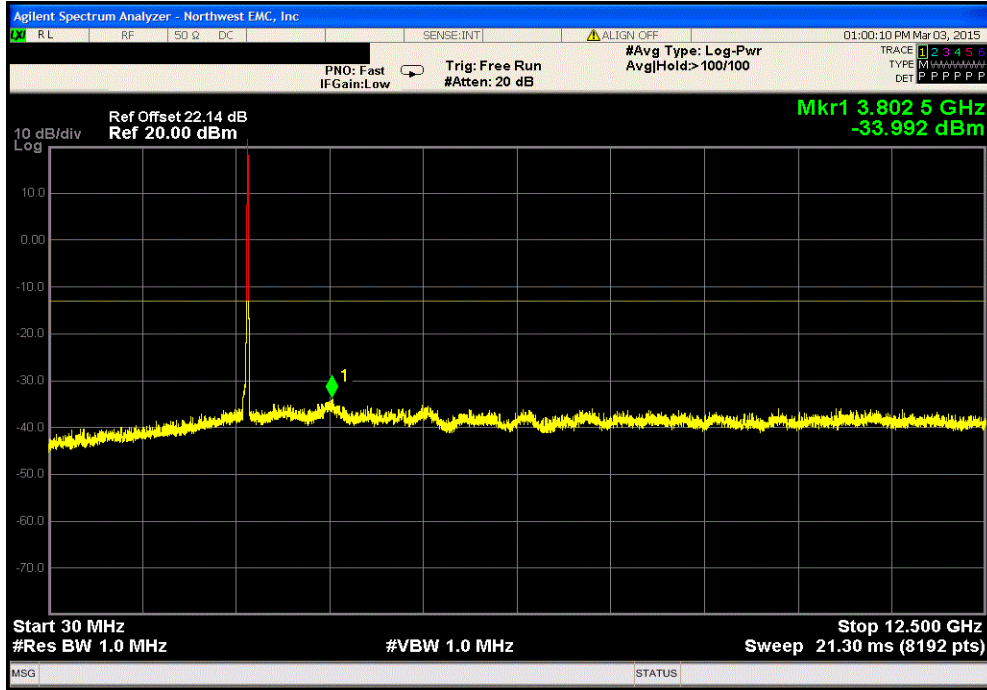

LTE 20 MHz, High Channel 2680 MHz				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 27 GHz	-30.07	-13	Pass	

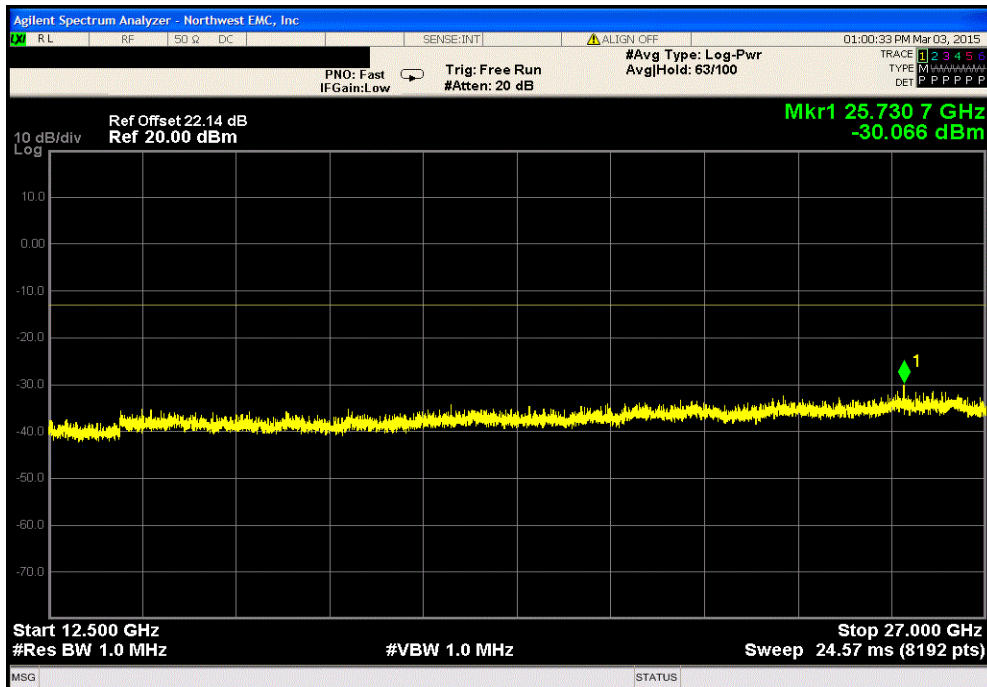

BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
MN08 Direct Connect Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC Block	Fairview Microwave	SD3379	AMI	10/2/2014	12
Signal Generator MXG	Agilent	N5183A	TIK	10/17/2014	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12

TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in the available band. The channels closest to the band edges were selected. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge. The resolution bandwidth was set to approximately 1% of the measured emissions bandwidth within the first 1 MHz block adjacent to the transmit band. An average RMS detector was used to match the method used during Output Power. The screen capture shows the margin between the measured value and the limit at the band edge.

BAND EDGE COMPLIANCE




XMR 2015.01.14


EUT: InterReach Fusion TDD - 2.5 GHz -RAU		Work Order: TECO0025	
Serial Number: None		Date: 03/03/15	
Customer: TE Connectivity / ADC Telecommunications		Temperature: 22.5°C	
Attendees: None		Humidity: 16%	
Project: None		Barometric Pres.: 1007.7	
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08	
TEST SPECIFICATIONS			
FCC 27:2015		Test Method: ANSI/TIA/EIA-603-C-2004	
COMMENTS			
Port 1 was determined to be worst case.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature <i>Trevor Buls</i>	
		Value (dBm)	Limit (dBm) Result
LTE 20 MHz	Low Channel 2506 MHz	-28.98	-13 Pass
	High Channel 2680 MHz	-26.9	-13 Pass

BAND EDGE COMPLIANCE

LTE 20 MHz, Low Channel 2506 MHz						
				Value (dBm)	Limit (dBm)	Result
				-28.98	-13	Pass

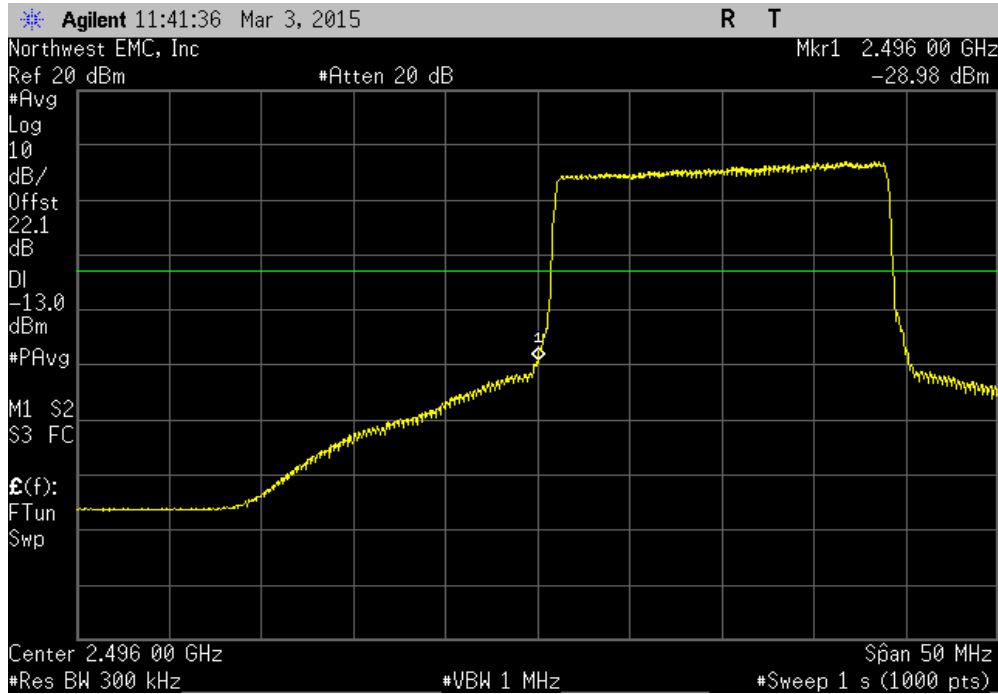

LTE 20 MHz, High Channel 2680 MHz						
				Value (dBm)	Limit (dBm)	Result
				-26.9	-13	Pass

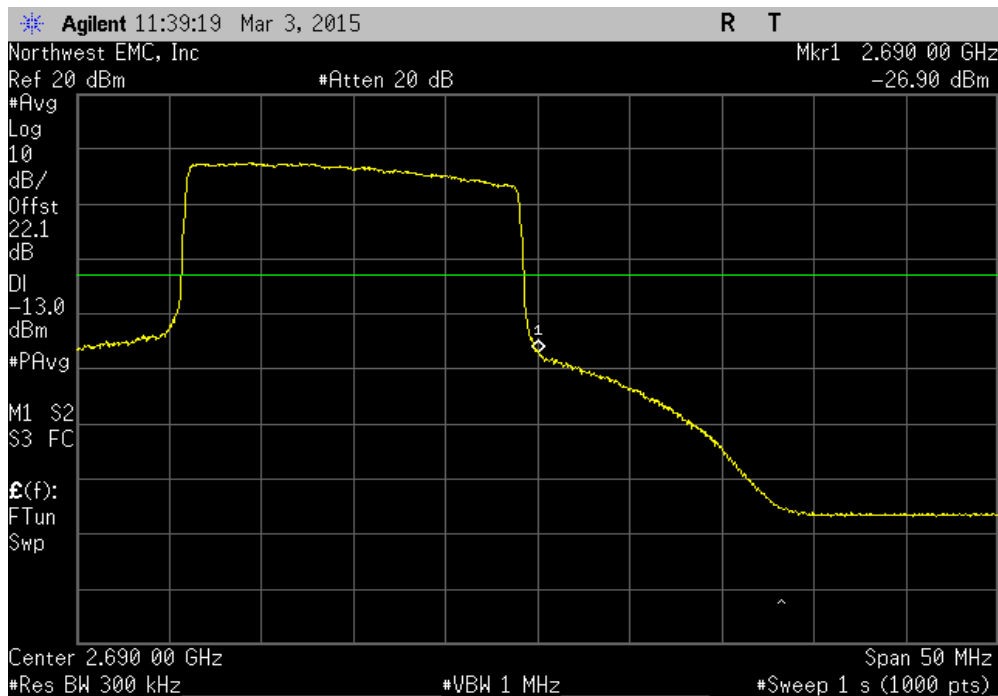

INTERMODULATION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Signal Generator	Rohde & Schwarz	SML03	TII	3/28/2012	36
Power Divider/Combiner	Fairview Microwave	MP0208-2	IAF	NCR	0
Power Divider/Combiner	Fairview Microwave	MP0208-2	IAE	NCR	0
Spectrum Analyzer	Agilent	N9010A	AFI	1/27/2015	12
MN08 Direct Connect Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC Block	Fairview Microwave	SD3379	AMI	10/2/2014	12
Signal Generator MXG	Agilent	N5183A	TIK	10/17/2014	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12

TEST DESCRIPTION

The EUT was configured with an input of a CW pulse at the top of the band, a CW pulse at the bottom of the band, and a modulated pulse near the edge of the band.


The antenna port spurious emissions were measured at the RF output terminal of the EUT with external attenuation on the RF input of the spectrum analyzer. Analyzer plots utilizing a 1MHz resolution bandwidth and no video filtering were made for each modulation type from 30 MHz to 27 GHz. The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to -13 dBm.

INTERMODULATION


EUT: InterReach Fusion TDD - 2.5 GHz -RAU		Work Order: TECO0025			
Serial Number: None		Date: 03/03/15			
Customer: TE Connectivity / ADC Telecommunications		Temperature: 22.5°C			
Attendees: None		Humidity: 16%			
Project: None		Barometric Pres.: 1007.7			
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08			
TEST SPECIFICATIONS					
FCC 27:2015		Test Method			
		ANSI/TIA/EIA-603-C-2004			
COMMENTS					
Port 1 was determined to be worst case.					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	<i>Trevor Buls</i>		
		Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result
LTE 20 MHz					
	Low Band	30 MHz - 1 GHz	-39.41	-13	Pass
	Low Band	1 GHz - 3 GHz	-35.45	-13	Pass
	Low Band	3 GHz - 12.5 GHz	-34.05	-13	Pass
	Low Band	12.5 GHz - 27 GHz	-31.31	-13	Pass
	Mid Band	30 MHz - 1 GHz	-39.04	-13	Pass
	Mid Band	1 GHz - 3 GHz	-35.5	-13	Pass
	Mid Band	3 GHz - 12.5 GHz	-34.33	-13	Pass
	Mid Band	12.5 GHz - 27 GHz	-31.16	-13	Pass
	High Band	30 MHz - 1 GHz	-38.62	-13	Pass
	High Band	1 GHz - 3 GHz	-32.07	-13	Pass
	High Band	3 GHz - 12.5 GHz	-33.84	-13	Pass
	High Band	12.5 GHz - 27 GHz	-31.35	-13	Pass

INTERMODULATION

LTE 20 MHz, Low Band					
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result		
30 MHz - 1 GHz	-39.41	-13	Pass		

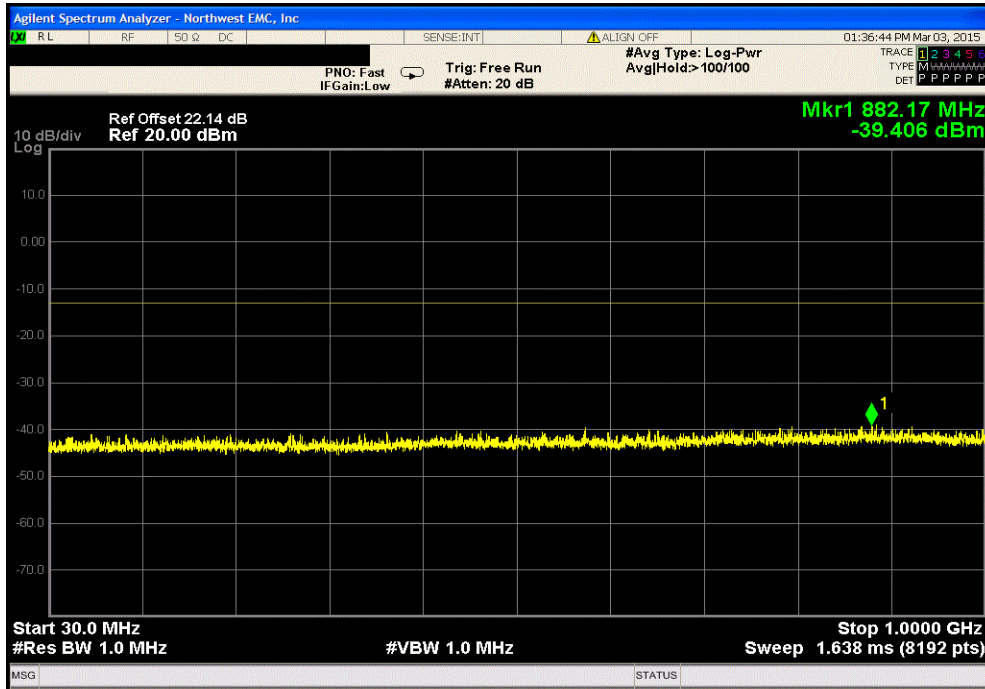


LTE 20 MHz, Low Band					
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result		
1 GHz - 3 GHz	-35.45	-13	Pass		

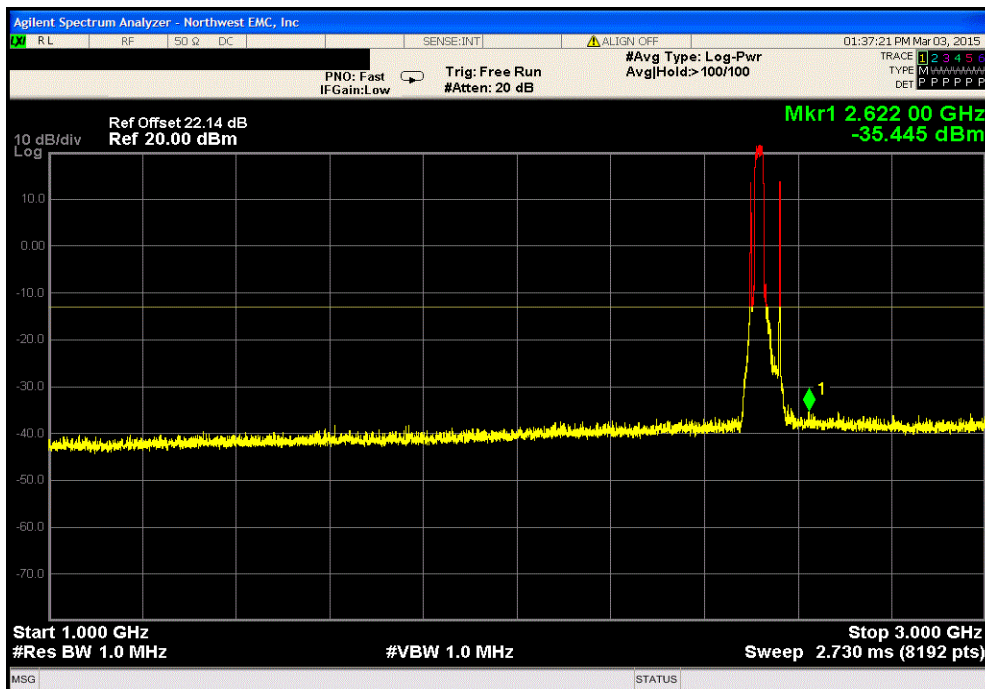


INTERMODULATION

LTE 20 MHz, Low Band				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
3 GHz - 12.5 GHz	-34.05	-13	Pass	

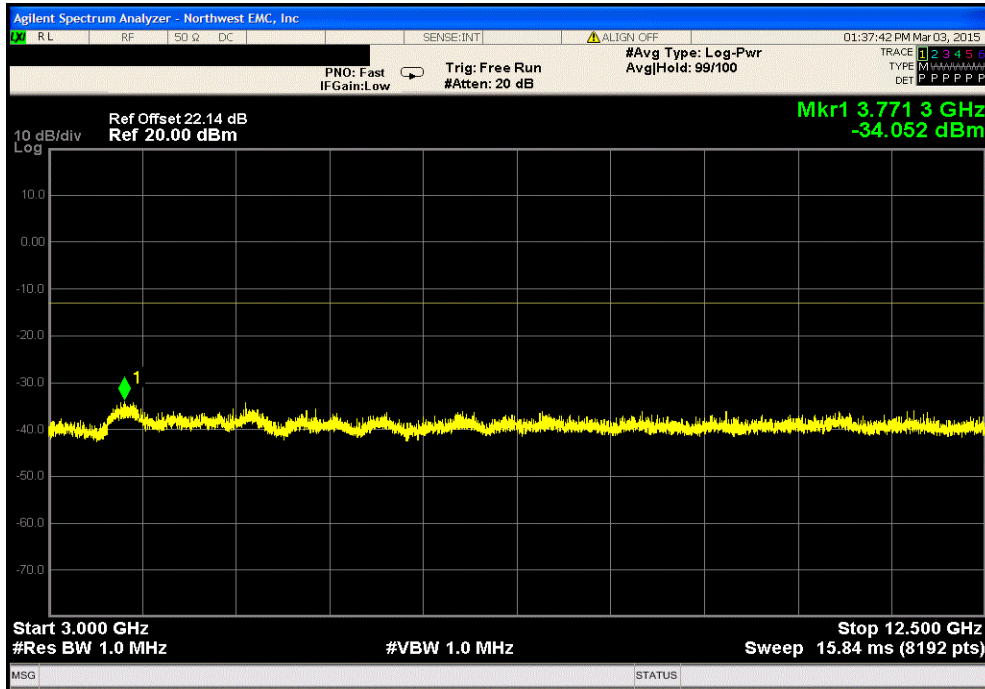


LTE 20 MHz, Low Band				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 27 GHz	-31.31	-13	Pass	

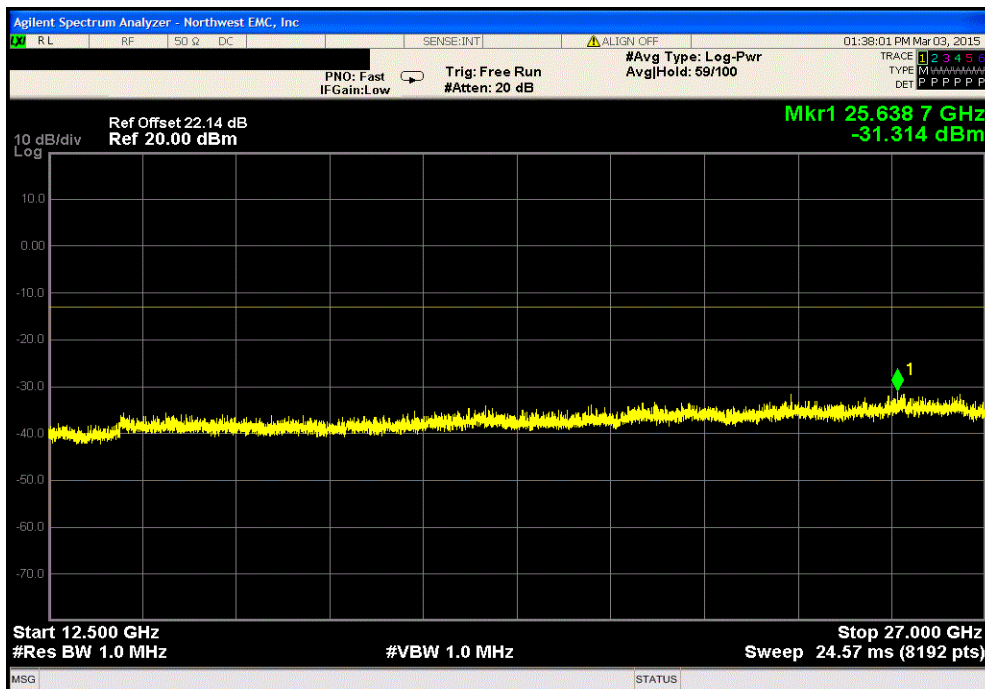


INTERMODULATION

LTE 20 MHz, Mid Band					
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result		
30 MHz - 1 GHz	-39.04	-13	Pass		

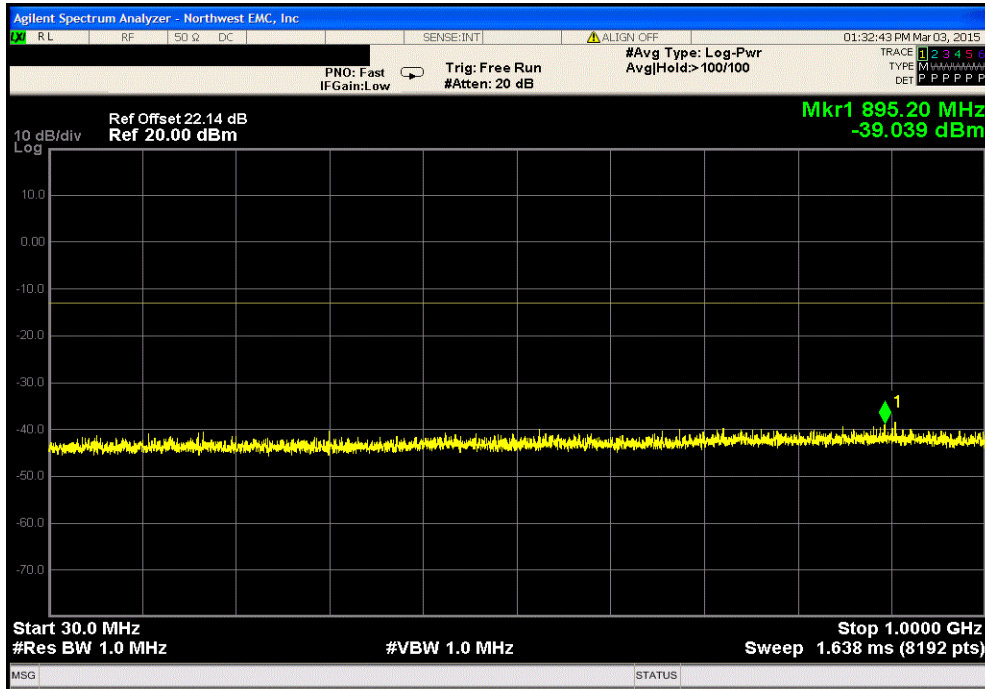


LTE 20 MHz, Mid Band					
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result		
1 GHz - 3 GHz	-35.5	-13	Pass		

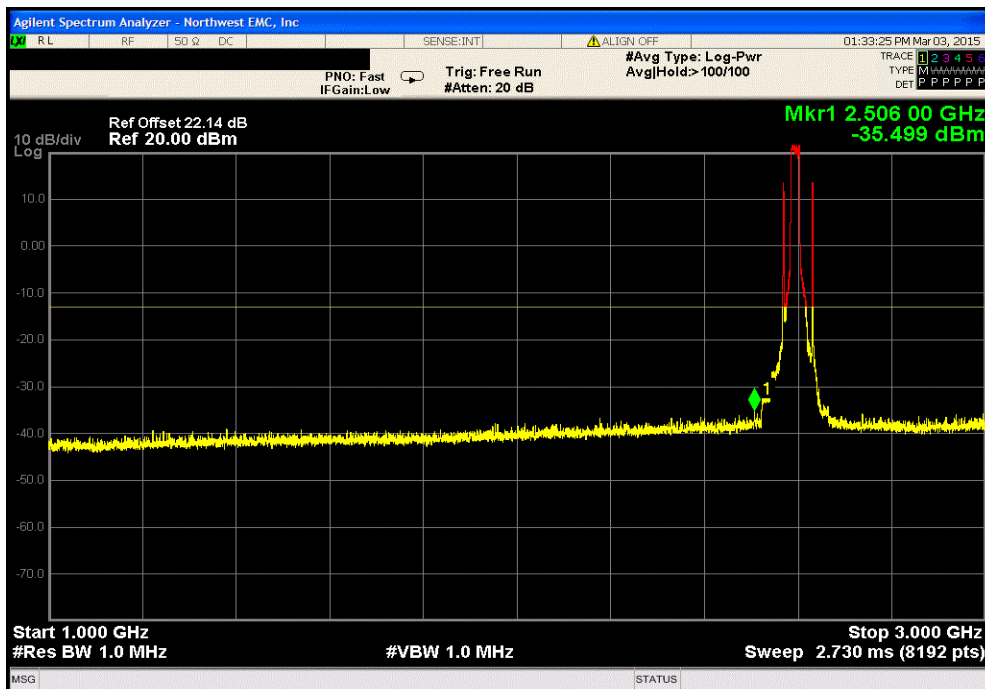


INTERMODULATION

LTE 20 MHz, Mid Band				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
3 GHz - 12.5 GHz	-34.33	-13	Pass	

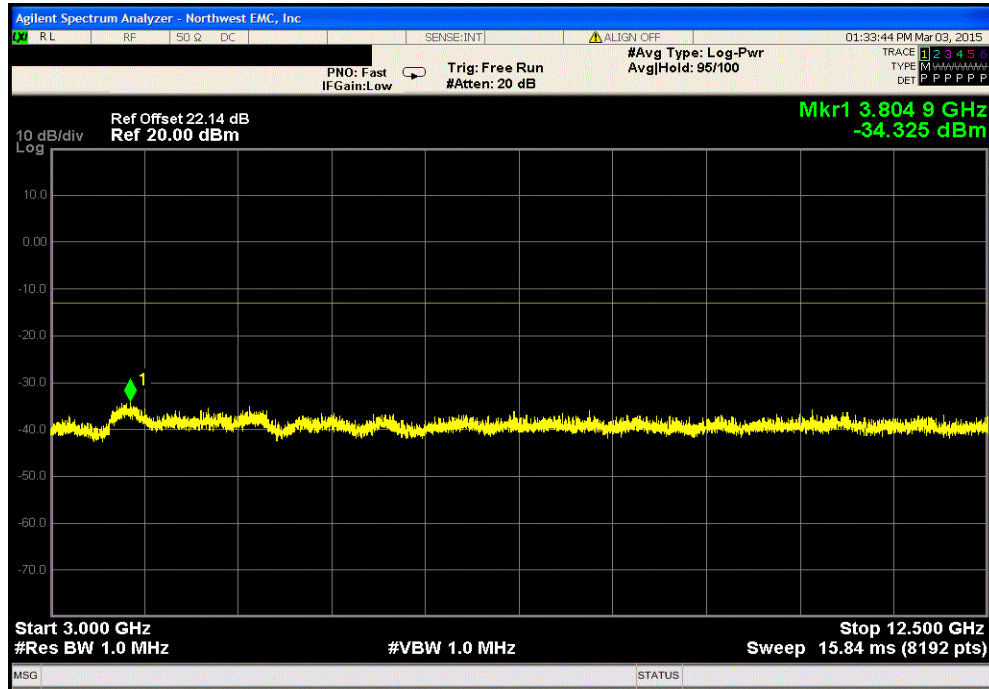


LTE 20 MHz, Mid Band				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 27 GHz	-31.16	-13	Pass	

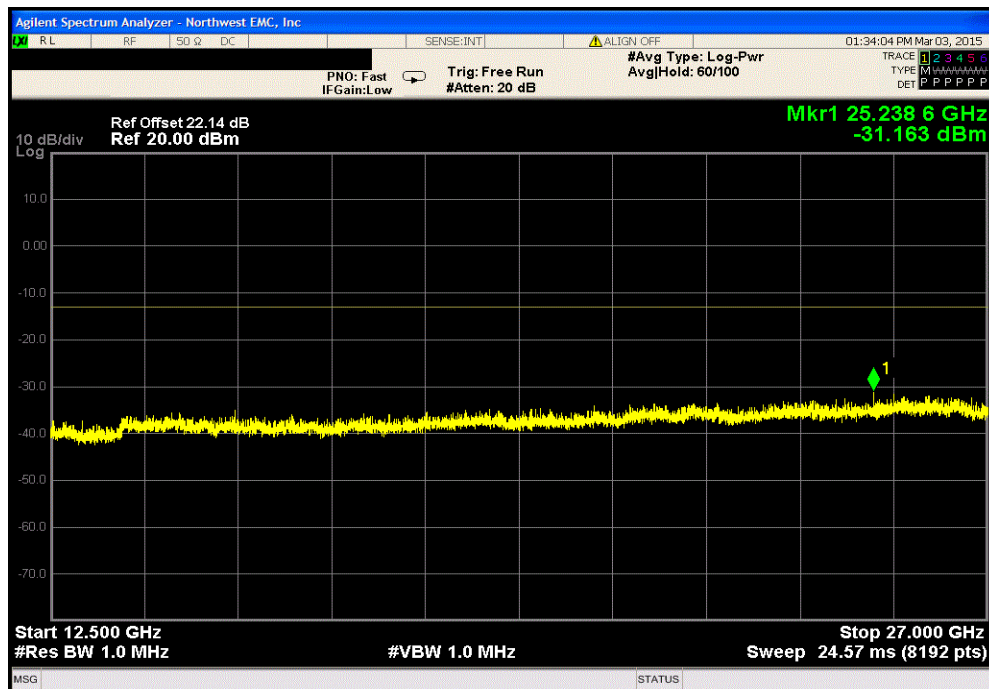


INTERMODULATION

LTE 20 MHz, High Band				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 1 GHz	-38.62	-13	Pass	

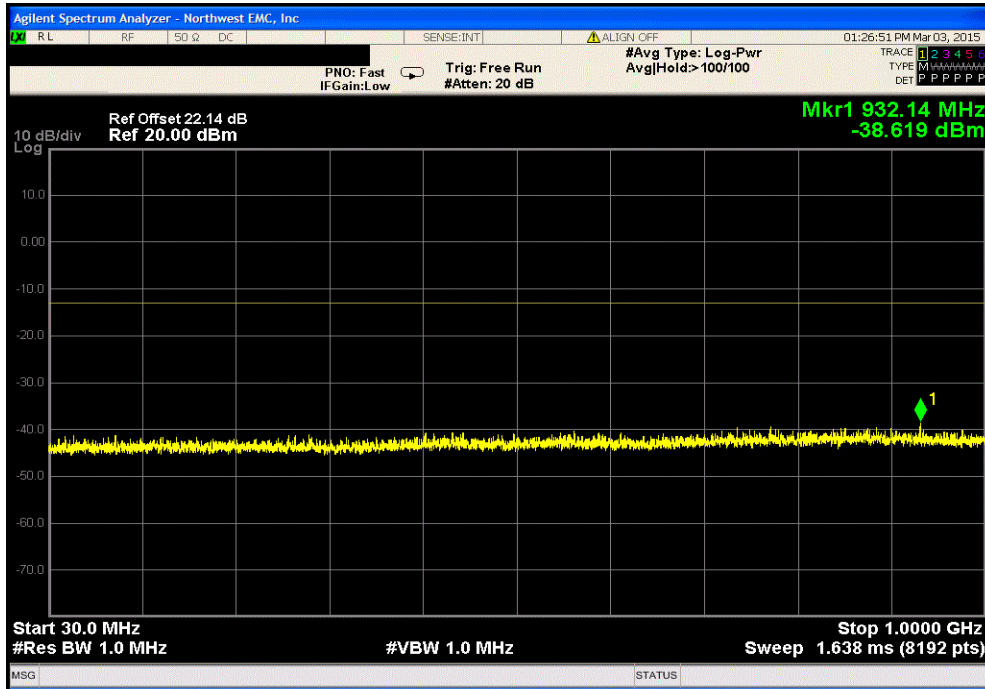


LTE 20 MHz, High Band				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 3 GHz	-32.07	-13	Pass	

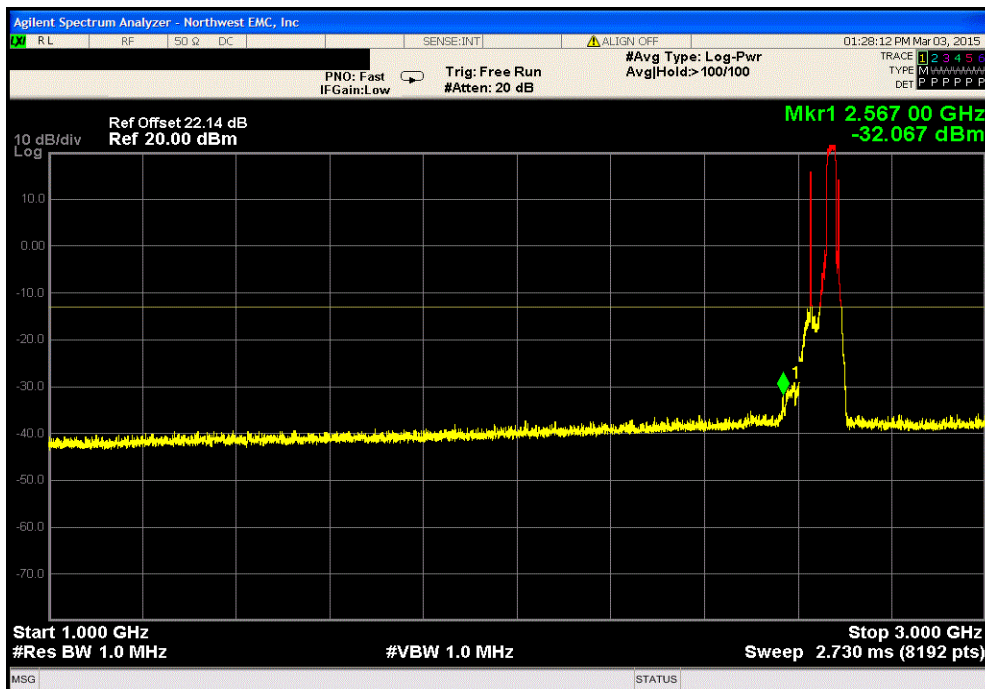


INTERMODULATION

LTE 20 MHz, High Band				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
3 GHz - 12.5 GHz	-33.84	-13	Pass	

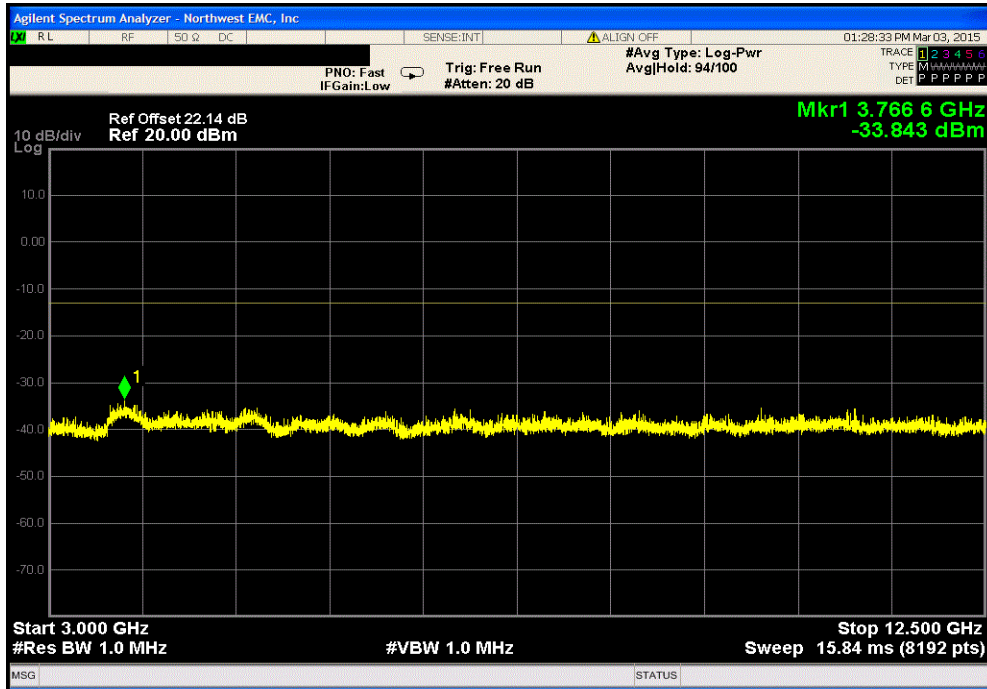

LTE 20 MHz, High Band				
Frequency Range	Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 27 GHz	-31.35	-13	Pass	

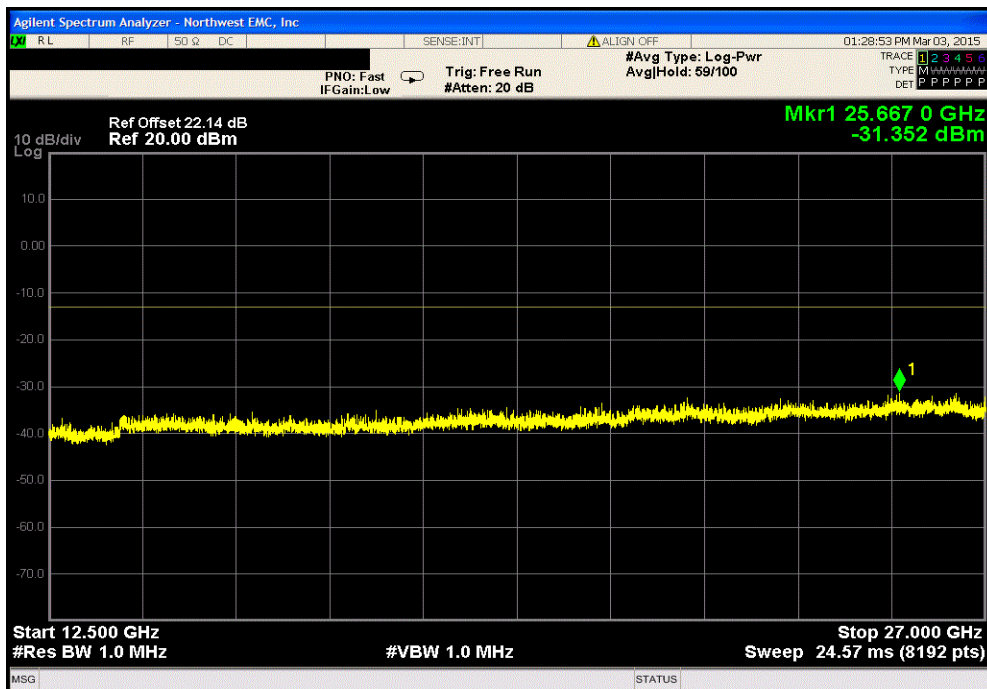

FREQUENCY STABILITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval (mo)
Thermometer	Omega Engineering, Inc.	HH311	DUB	11/3/2014	36
Humidity Temperature Chamber	Cincinnati Sub Zero (CSZ)	ZPH-32-3.5-SCT/AC	TBF	NCR	0
Multimeter	Fluke	117	MLS	1/20/2014	36
Variable Transformer	Powerstat	246	XFR	NCR	0
MN08 Direct Connect Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC Block	Fairview Microwave	SD3379	AMI	10/2/2014	12
Signal Generator MXG	Agilent	N5183A	TIK	10/17/2014	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12

TEST DESCRIPTION

A direct connect measurement was made between the EUT's antenna cable and a spectrum analyzer. The spectrum analyzer is equipped with a precision frequency reference that exceeds the stability requirement of the EUT.

Measurements were made at the edges of the main transmit bands as called out on the data sheets. Testing was done with an absence of modulation in a CW mode of operation.

The primary supply voltage was varied from 85 % to 115% of the nominal voltage Using a temperature chamber, the transmit frequency was recorded at the extremes of the specified temperature range (-30 ° to +50° C) and at 10°C intervals.

Per the requirements of FCC Part 27.54:

"The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation."

No specific limits are provided in either FCC 27.54, the product specific rule part, or FCC 2.1055, the equipment authorization procedure for testing frequency stability. While there are no limits called out, any results less than 1ppm will still allow the radio to be operating within the band.

FREQUENCY STABILITY




XMR 2015.01.14


EUT: InterReach Fusion TDD - 2.5 GHz -RAU		Work Order: TECO0025				
Serial Number: None		Date: 03/04/15				
Customer: TE Connectivity / ADC Telecommunications		Temperature: 22.4°C				
Attendees: None		Humidity: 13%				
Project: None		Barometric Pres.: 1026.7				
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08				
TEST SPECIFICATIONS						
FCC 27:2015		Test Method: ANSI/TIA/EIA-603-C-2004				
COMMENTS						
Port 1 was determined to be worst case. Voltage varied from 126.5VAC to 93.5VAC.						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	2	Signature <i>Trevor Buls</i>				
		Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
Voltage: 115%						
	Low Channel, 2506 MHz	2506.000075	2506	0	1	Pass
	Mid Channel, 2593 MHz	2593.000089	2593	0	1	Pass
	High Channel, 2680 MHz	2680.000086	2680	0	1	Pass
Voltage: 100%						
	Low Channel, 2506 MHz	2506.000075	2506	0	1	Pass
	Mid Channel, 2593 MHz	2593.000009	2593	0	1	Pass
	High Channel, 2680 MHz	2680.000086	2680	0	1	Pass
Voltage: 85%						
	Low Channel, 2506 MHz	2506.000078	2506	0	1	Pass
	Mid Channel, 2593 MHz	2593.000073	2593	0	1	Pass
	High Channel, 2680 MHz	2680.000086	2680	0	1	Pass
Temperature: +50°						
	Low Channel, 2506 MHz	2506.000091	2506	0	1	Pass
	Mid Channel, 2593 MHz	2593.000089	2593	0	1	Pass
	High Channel, 2680 MHz	2680.000102	2680	0	1	Pass
Temperature: +40°						
	Low Channel, 2506 MHz	2506.000075	2506	0	1	Pass
	Mid Channel, 2593 MHz	2593.000009	2593	0	1	Pass
	High Channel, 2680 MHz	2680.000004	2680	0	1	Pass
Temperature: +30°						
	Low Channel, 2506 MHz	2506.000133	2506	0.1	1	Pass
	Mid Channel, 2593 MHz	2593.000126	2593	0.1	1	Pass
	High Channel, 2680 MHz	2680.000036	2680	0	1	Pass
Temperature: +20°						
	Low Channel, 2506 MHz	2506.000075	2506	0	1	Pass
	Mid Channel, 2593 MHz	2593.000073	2593	0	1	Pass
	High Channel, 2680 MHz	2680.000085	2680	0	1	Pass
Temperature: +10°						
	Low Channel, 2506 MHz	2506.000092	2506	0	1	Pass
	Mid Channel, 2593 MHz	2593.000009	2593	0	1	Pass
	High Channel, 2680 MHz	2680.000136	2680	0.1	1	Pass
Temperature: 0°						
	Low Channel, 2506 MHz	2506.000062	2506	0	1	Pass
	Mid Channel, 2593 MHz	2593.000127	2593	0.1	1	Pass
	High Channel, 2680 MHz	2680.000087	2680	0	1	Pass
Temperature: -10°						
	Low Channel, 2506 MHz	2506.000068	2506	0	1	Pass
	Mid Channel, 2593 MHz	2593.000024	2593	0	1	Pass
	High Channel, 2680 MHz	2680.000137	2680	0.1	1	Pass
Temperature: -20°						
	Low Channel, 2506 MHz	2506.000129	2506	0.1	1	Pass
	Mid Channel, 2593 MHz	2593.000079	2593	0	1	Pass
	High Channel, 2680 MHz	2680.000104	2680	0	1	Pass
Temperature: -30°						
	Low Channel, 2506 MHz	2506.000113	2506	0.1	1	Pass
	Mid Channel, 2593 MHz	2593.000059	2593	0	1	Pass
	High Channel, 2680 MHz	2680.000069	2680	0	1	Pass

FREQUENCY STABILITY

Voltage: 115%, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000075	2506	0	1	Pass	

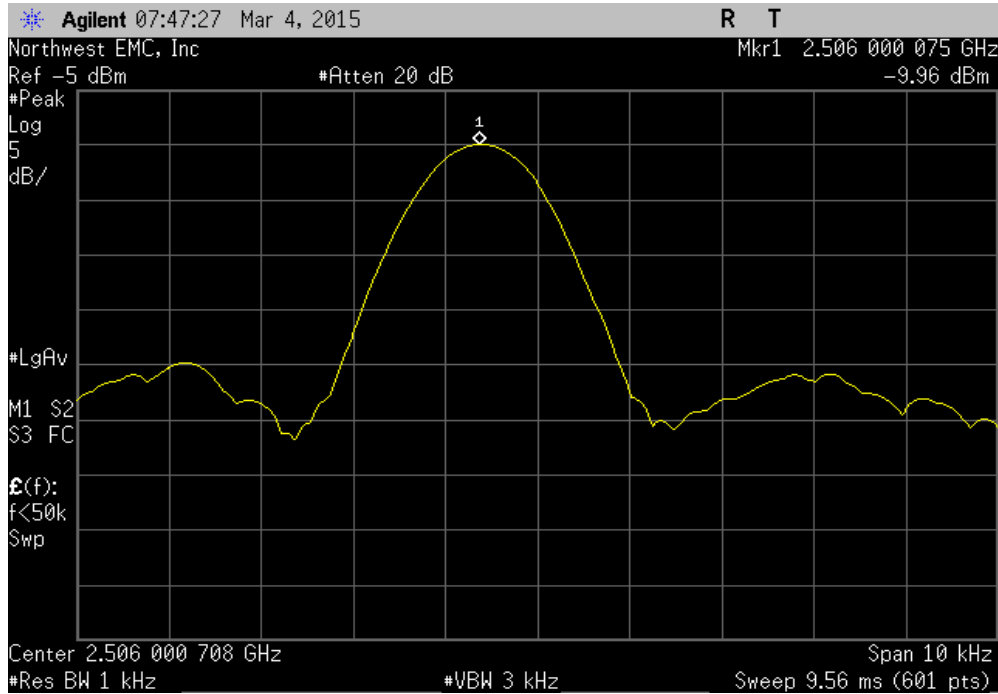


Voltage: 115%, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.000089	2593	0	1	Pass	

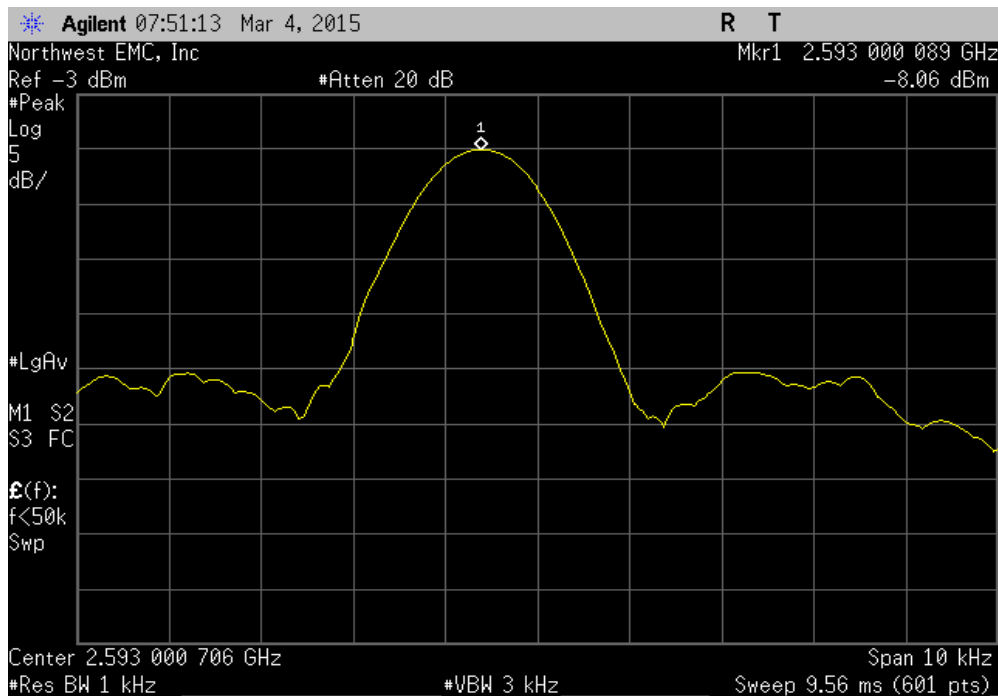


FREQUENCY STABILITY

Voltage: 115%, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000086	2680	0	1	Pass	

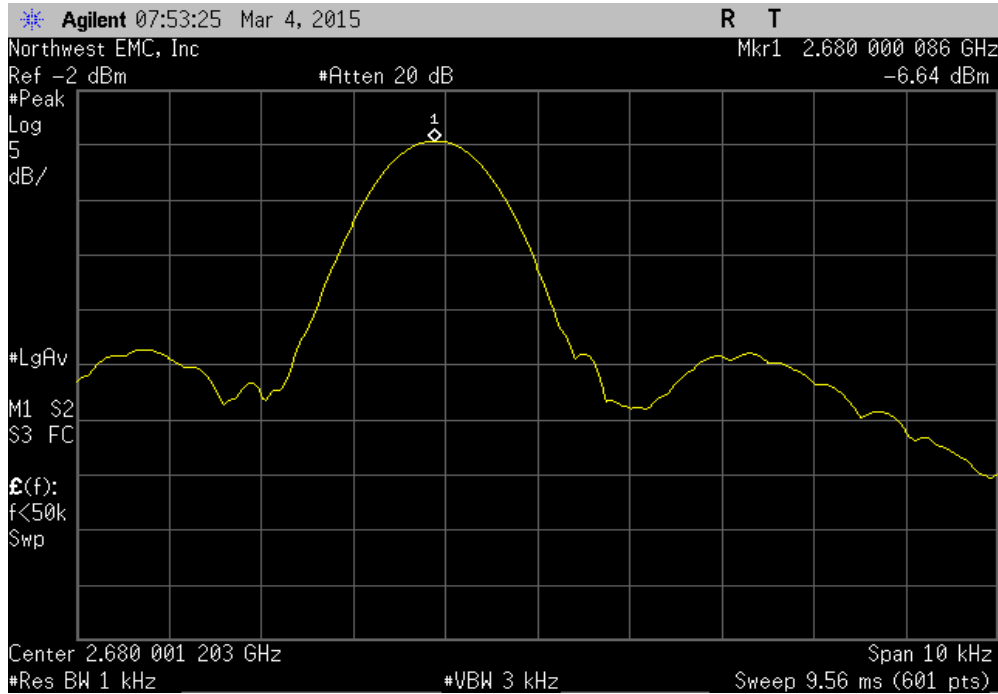


Voltage: 100%, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000075	2506	0	1	Pass	

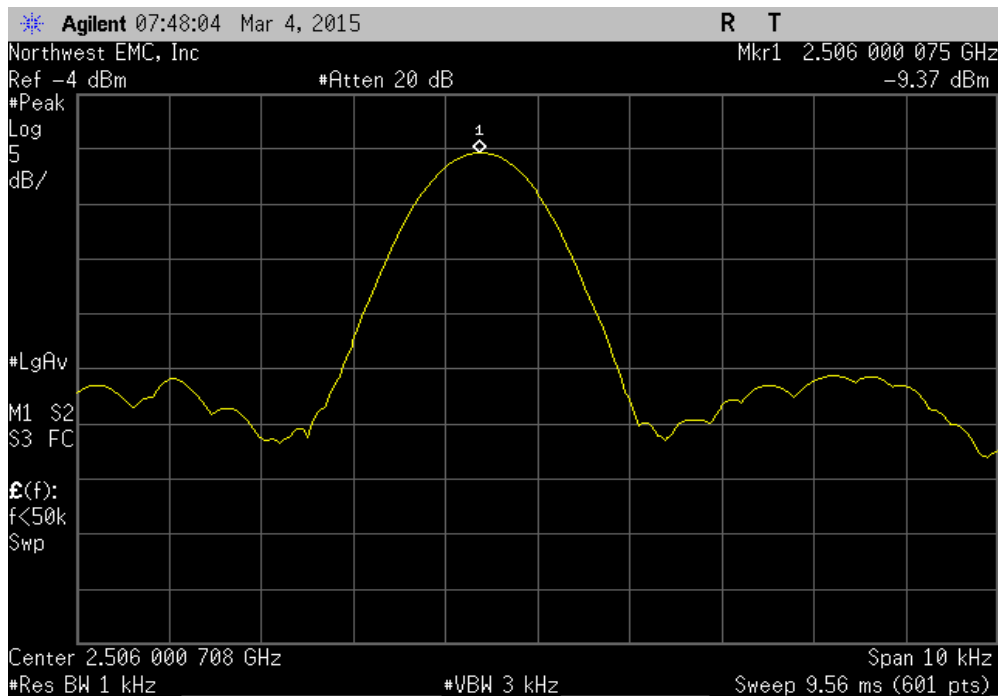


FREQUENCY STABILITY

Voltage: 100%, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.00009	2593	0	1	Pass	

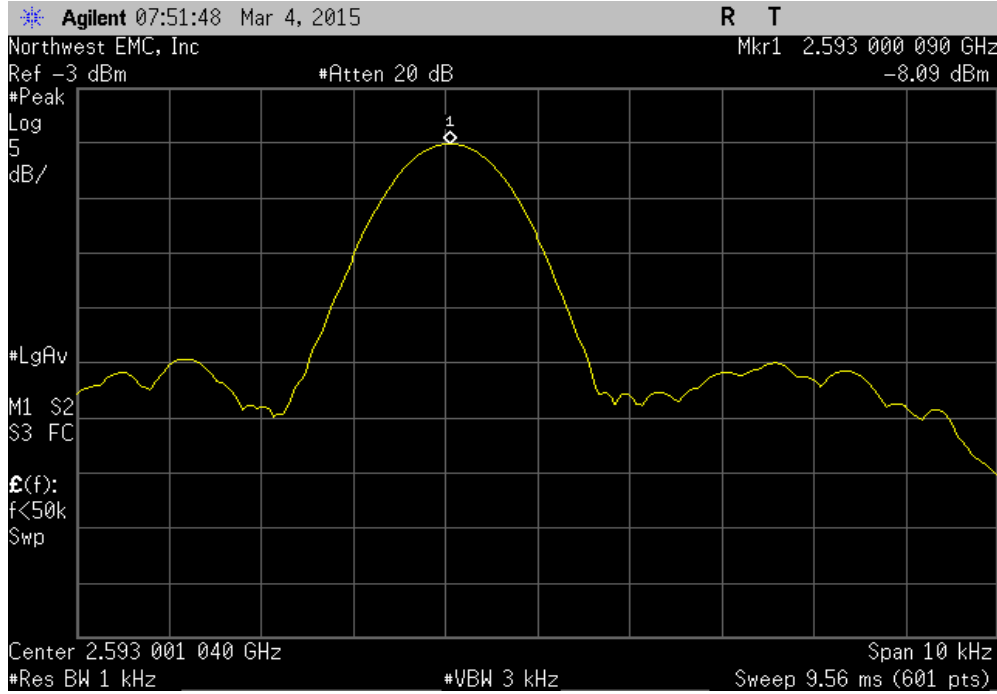


Voltage: 100%, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000086	2680	0	1	Pass	

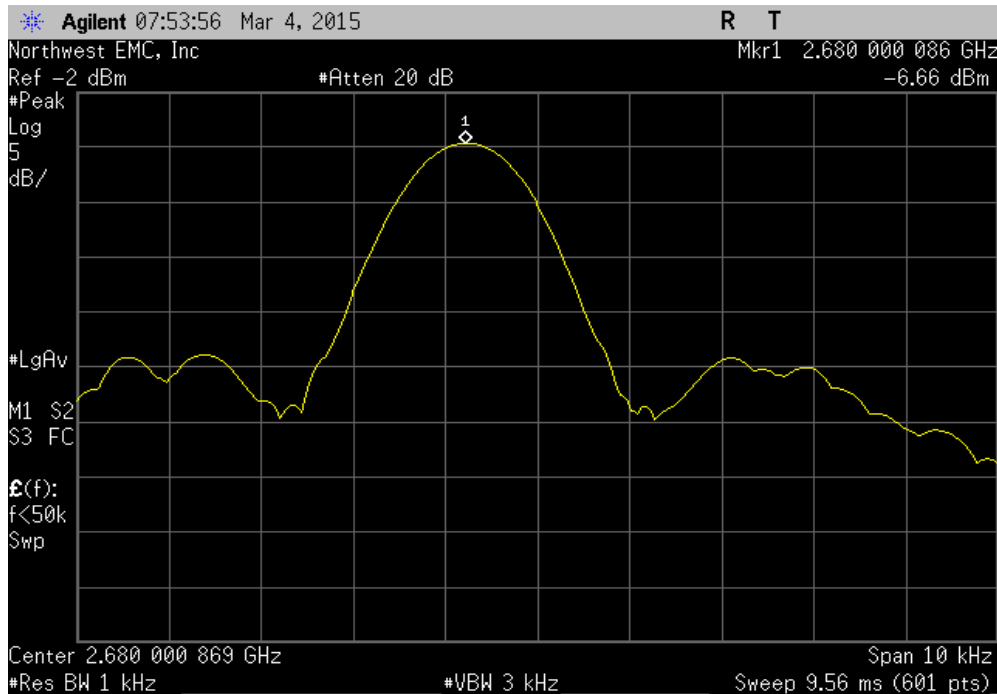


FREQUENCY STABILITY

Voltage: 85%, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000078	2506	0	1	Pass	

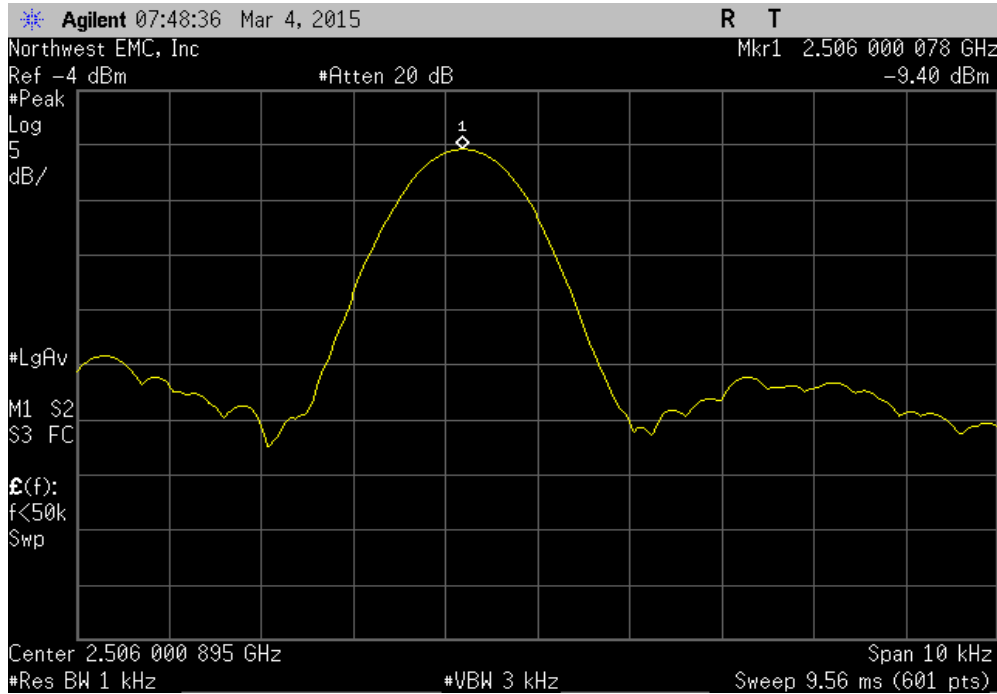


Voltage: 85%, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.000073	2593	0	1	Pass	

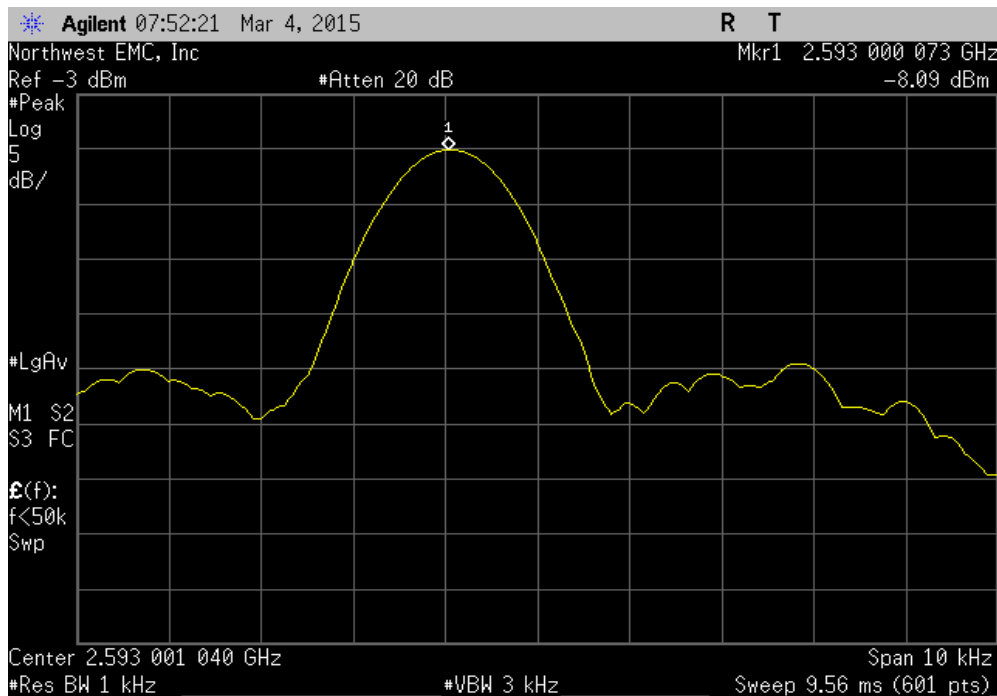


FREQUENCY STABILITY

Voltage: 85%, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000086	2680	0	1	Pass	

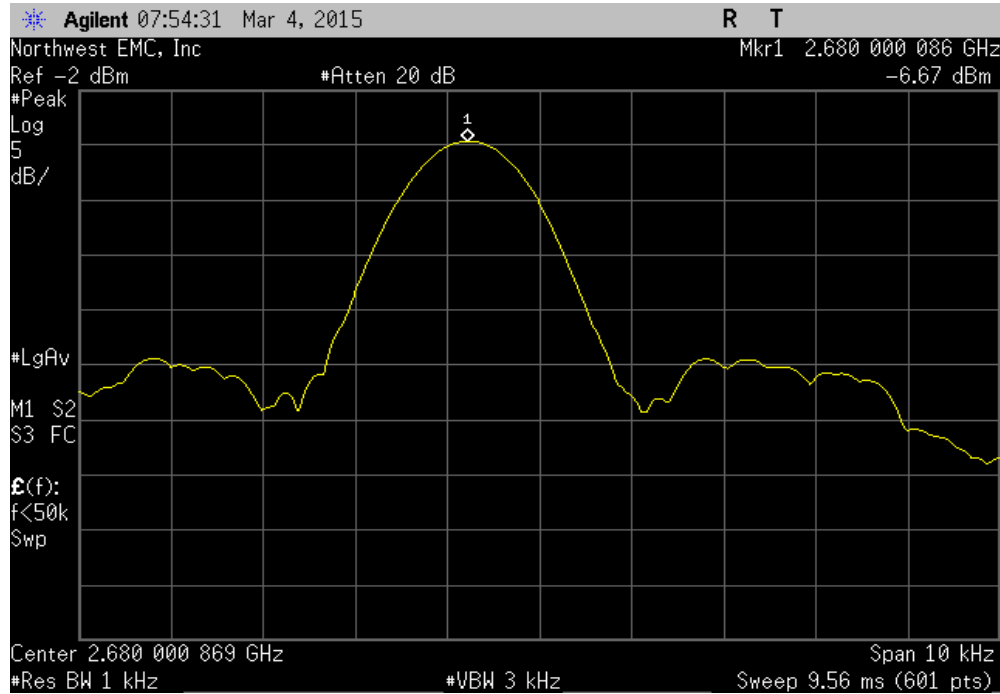


Temperature: +50°, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000091	2506	0	1	Pass	

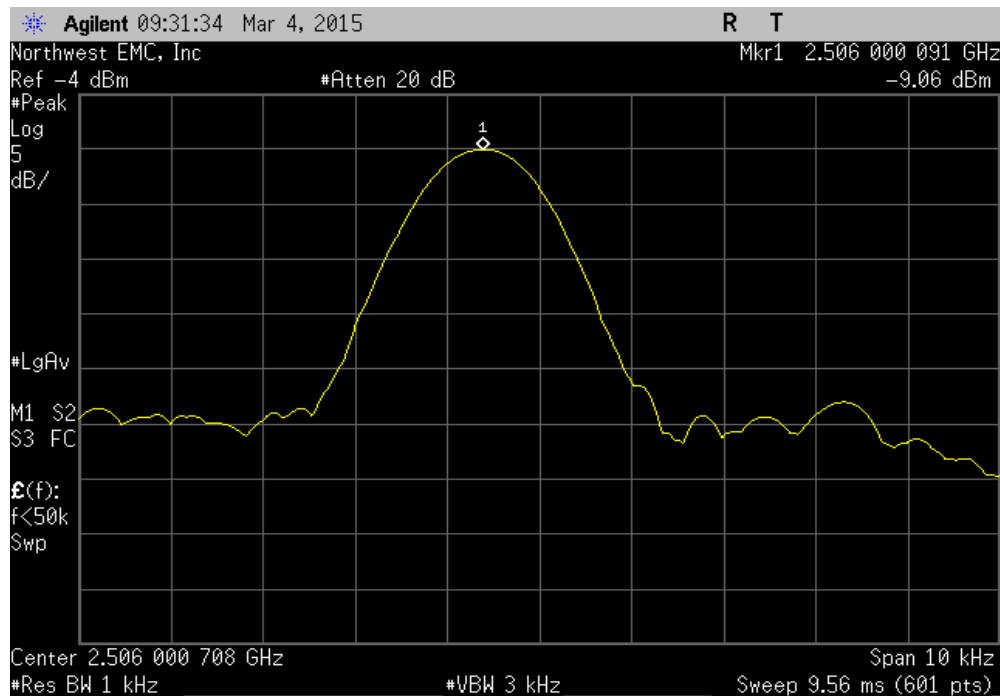


FREQUENCY STABILITY

Temperature: +50°, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.000089	2593	0	1	Pass	

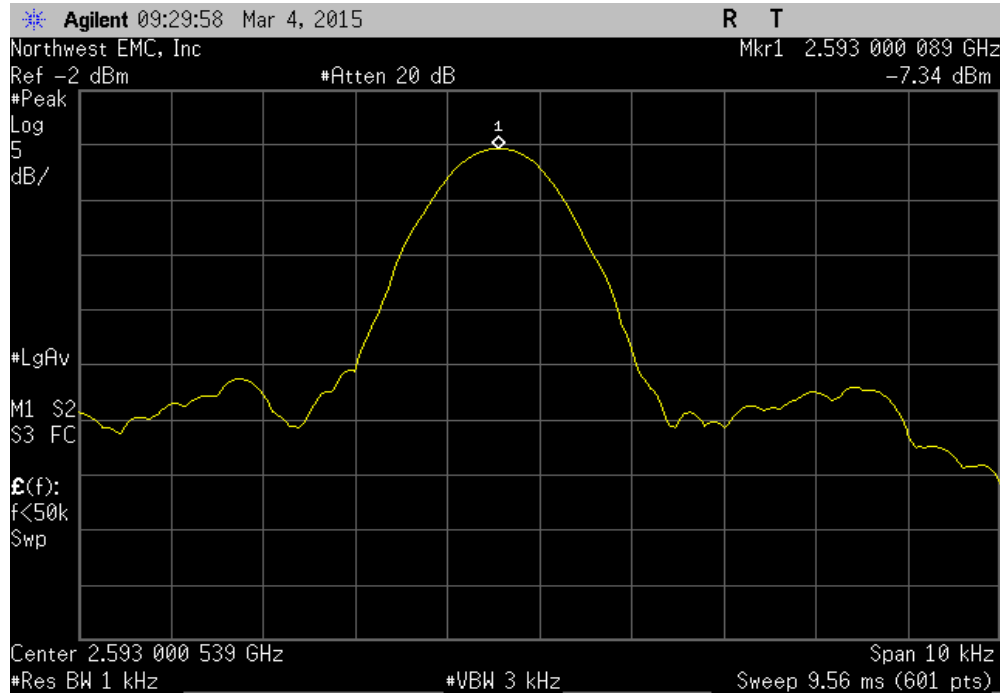


Temperature: +50°, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000102	2680	0	1	Pass	

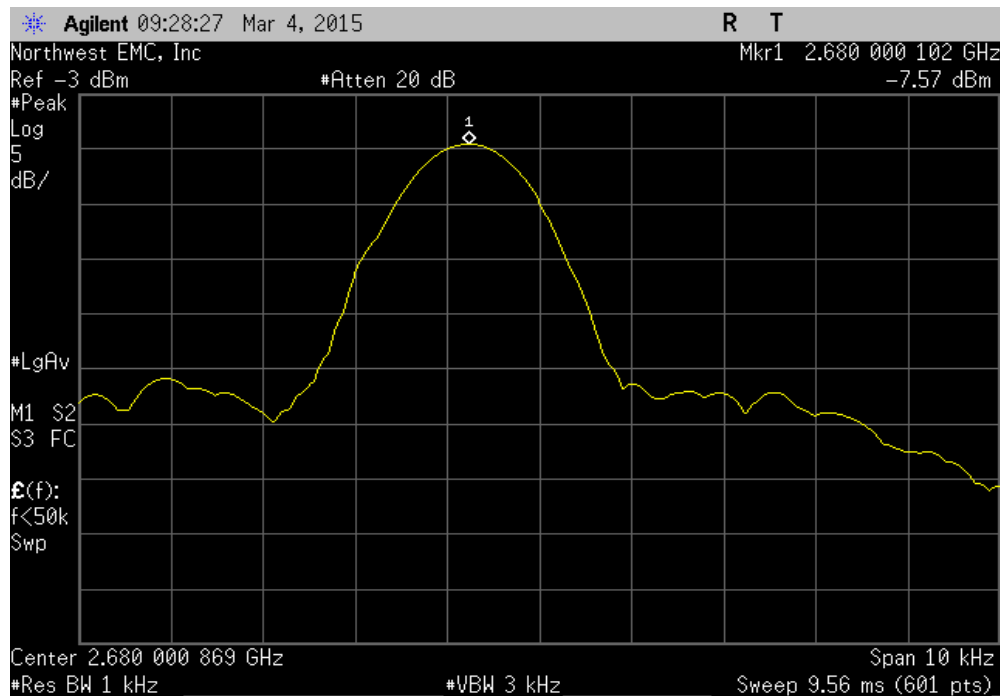


FREQUENCY STABILITY

Temperature: +40°, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000075	2506	0	1	Pass	

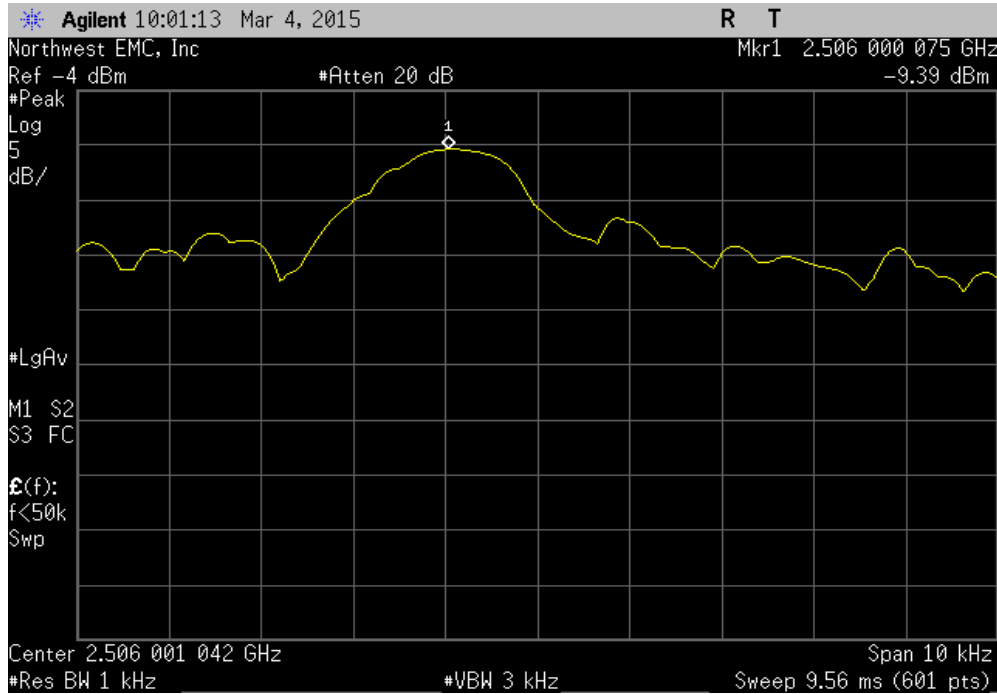


Temperature: +40°, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.00009	2593	0	1	Pass	

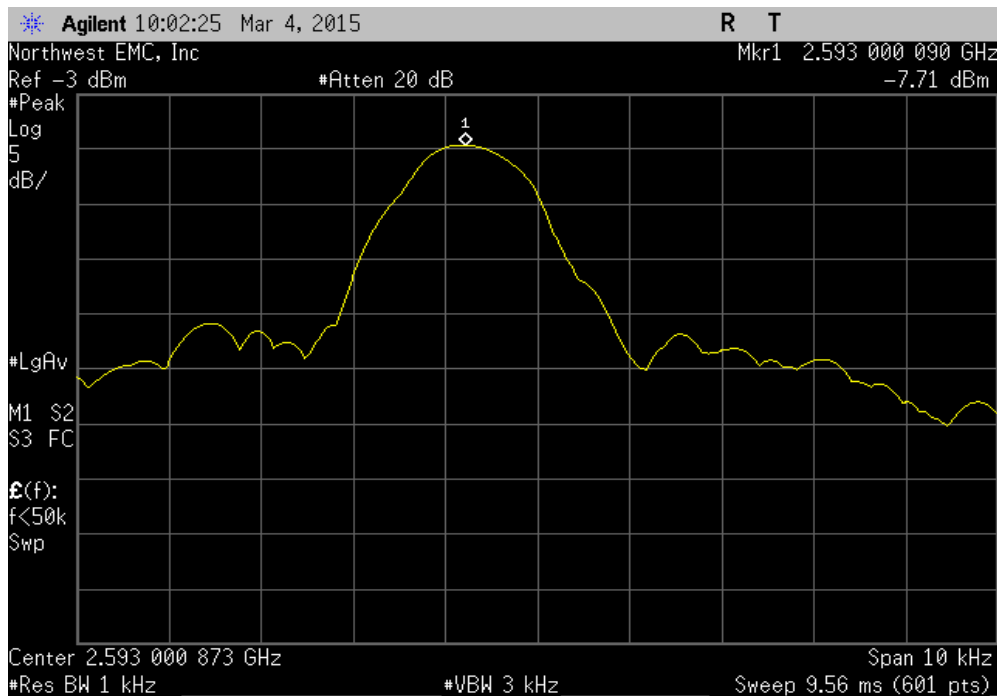


FREQUENCY STABILITY

Temperature: +40°, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000004	2680	0	1	Pass	

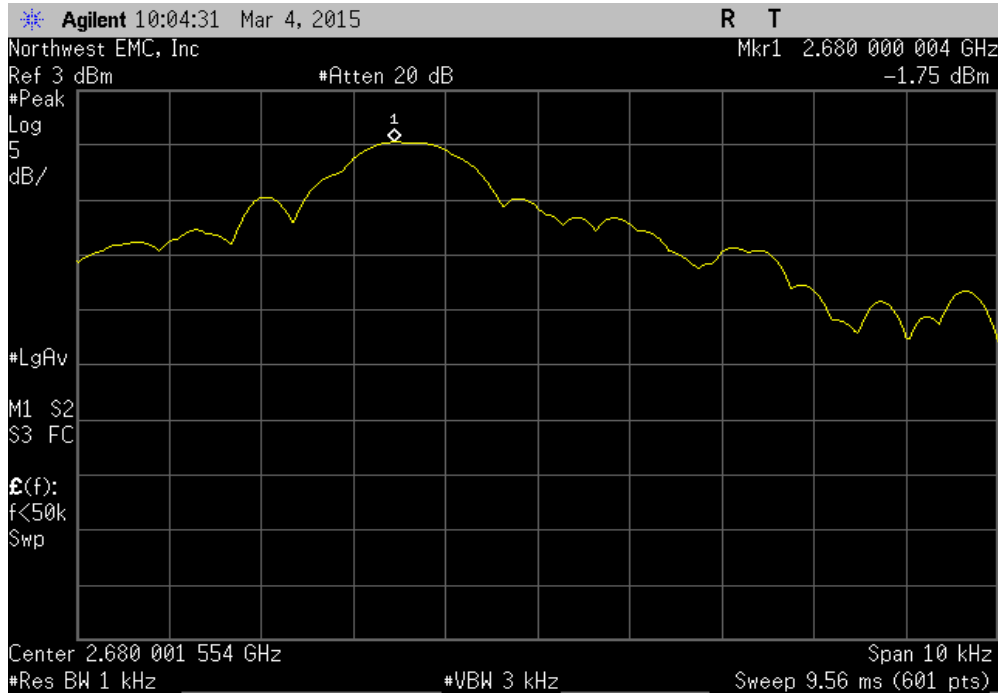


Temperature: +30°, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000133	2506	0.1	1	Pass	

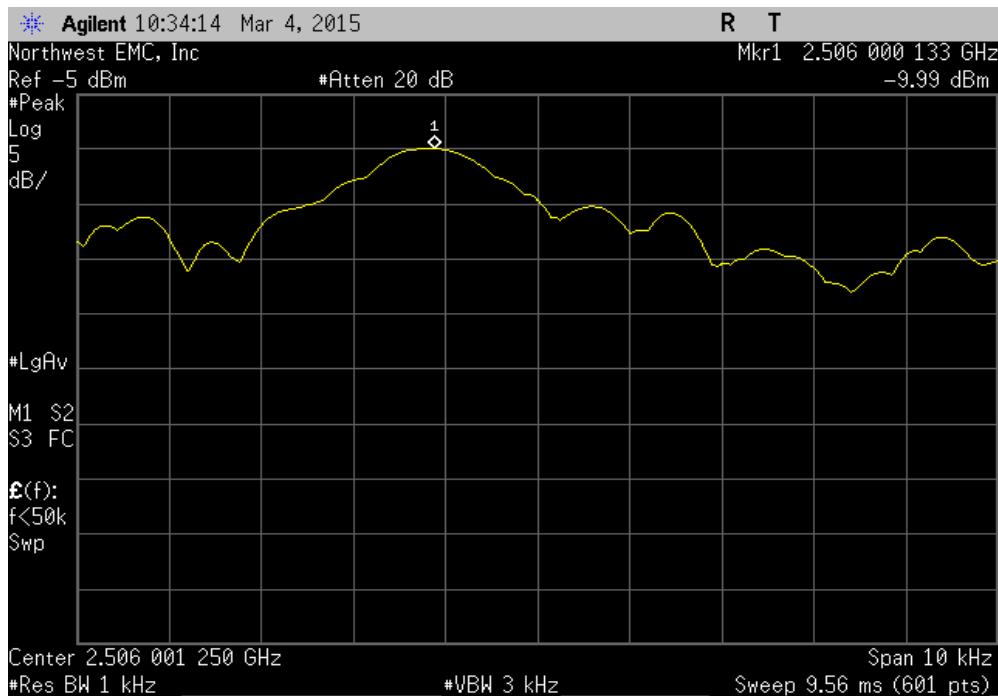


FREQUENCY STABILITY

Temperature: +30°, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.000126	2593	0.1	1	Pass	

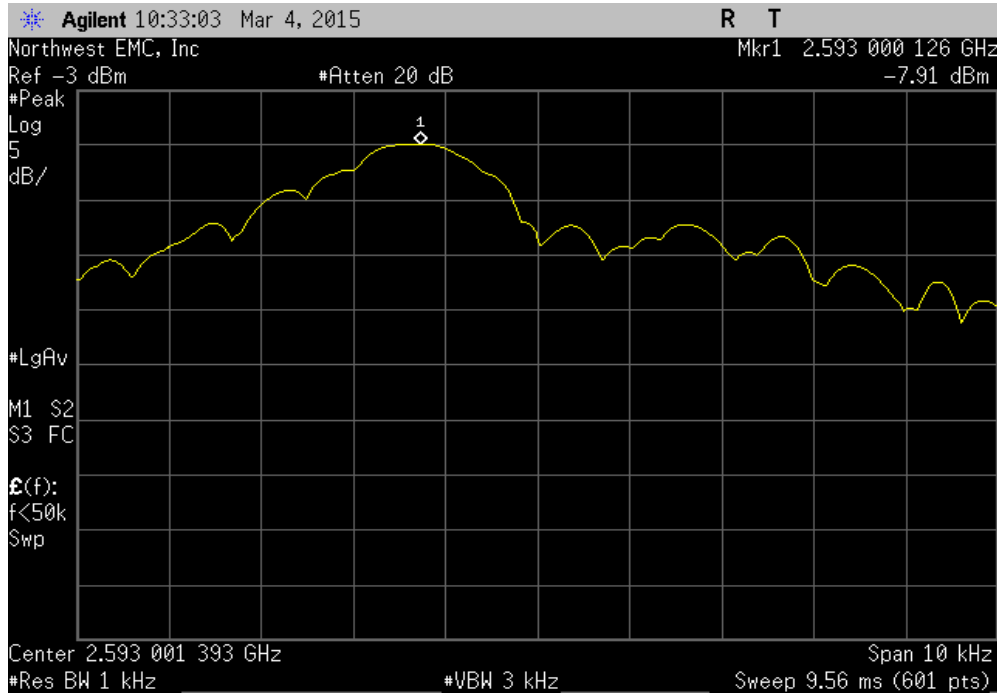


Temperature: +30°, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000036	2680	0	1	Pass	

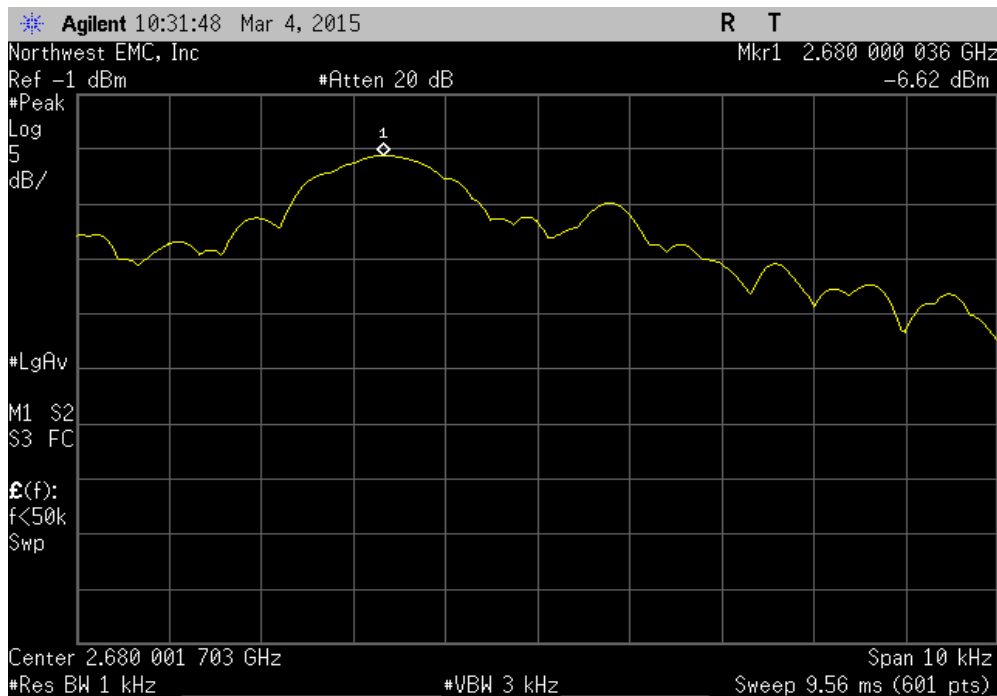


FREQUENCY STABILITY

Temperature: +20°, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000075	2506	0	1	Pass	

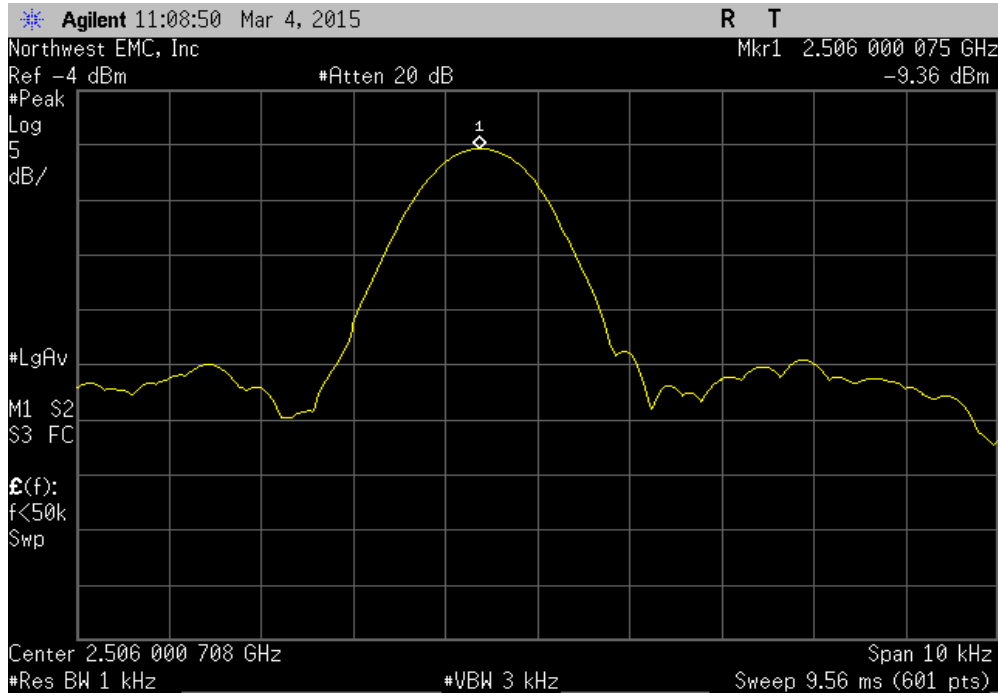


Temperature: +20°, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.000073	2593	0	1	Pass	

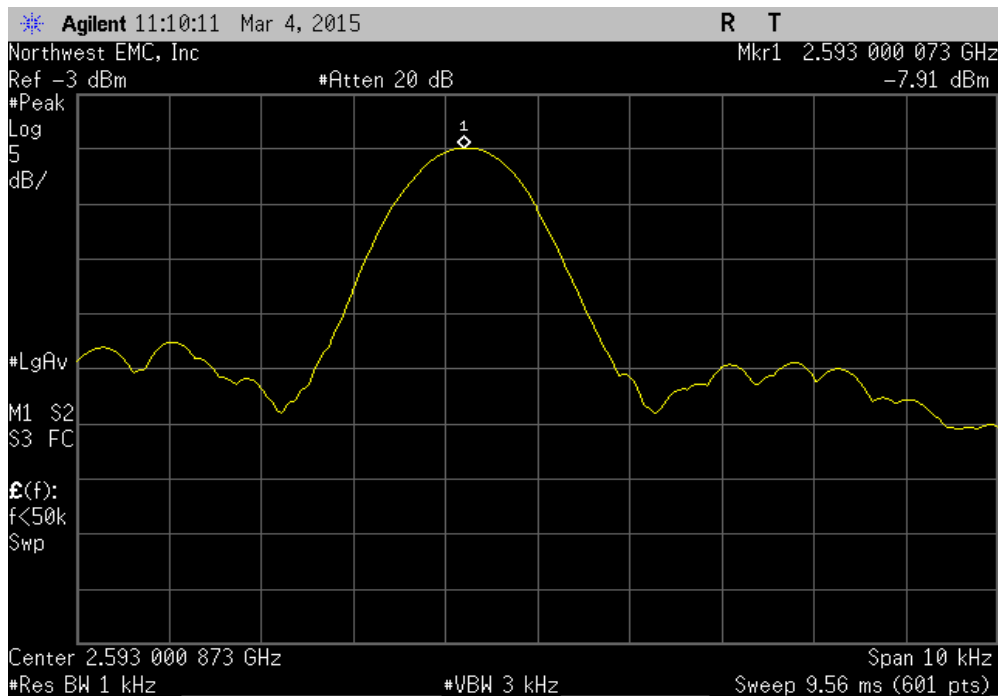


FREQUENCY STABILITY

Temperature: +20°, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000085	2680	0	1	Pass	

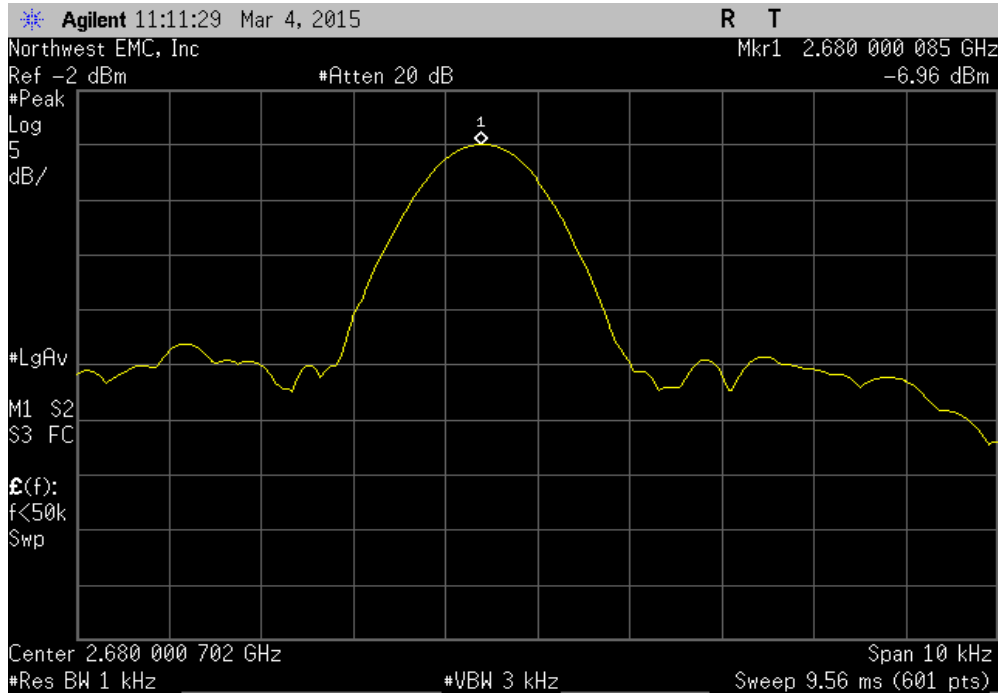


Temperature: +10°, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000092	2506	0	1	Pass	

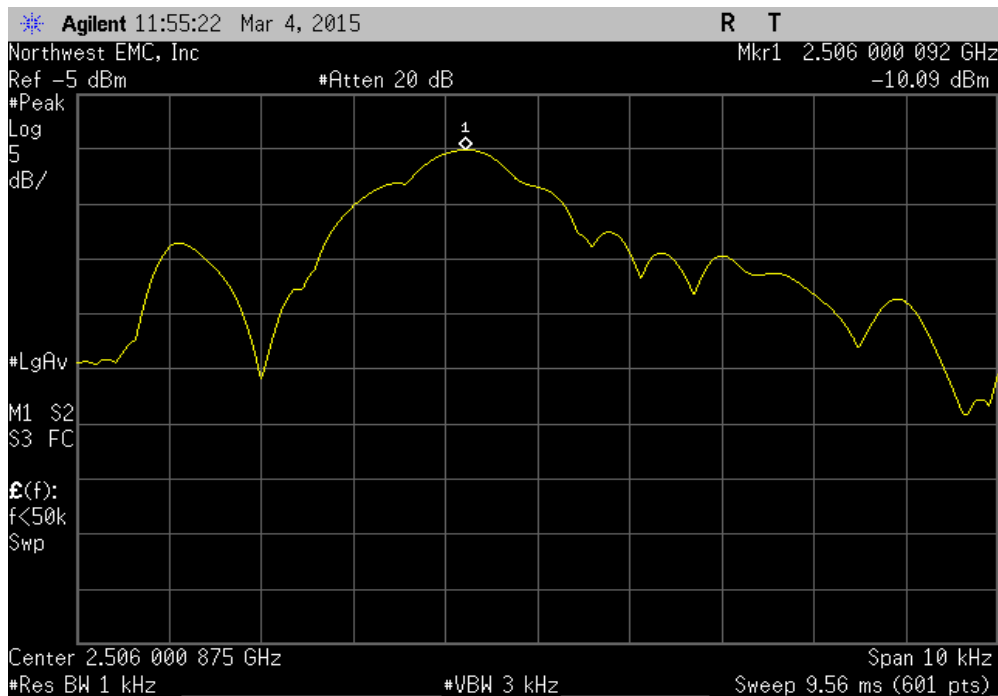


FREQUENCY STABILITY

Temperature: +10°, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.00009	2593	0	1	Pass	

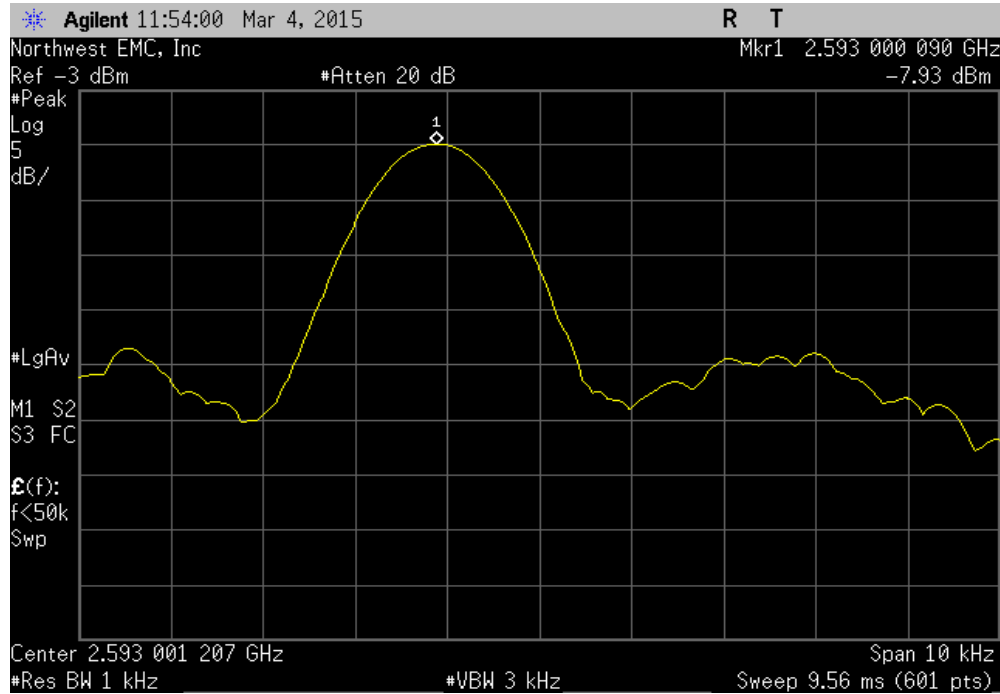


Temperature: +10°, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000136	2680	0.1	1	Pass	

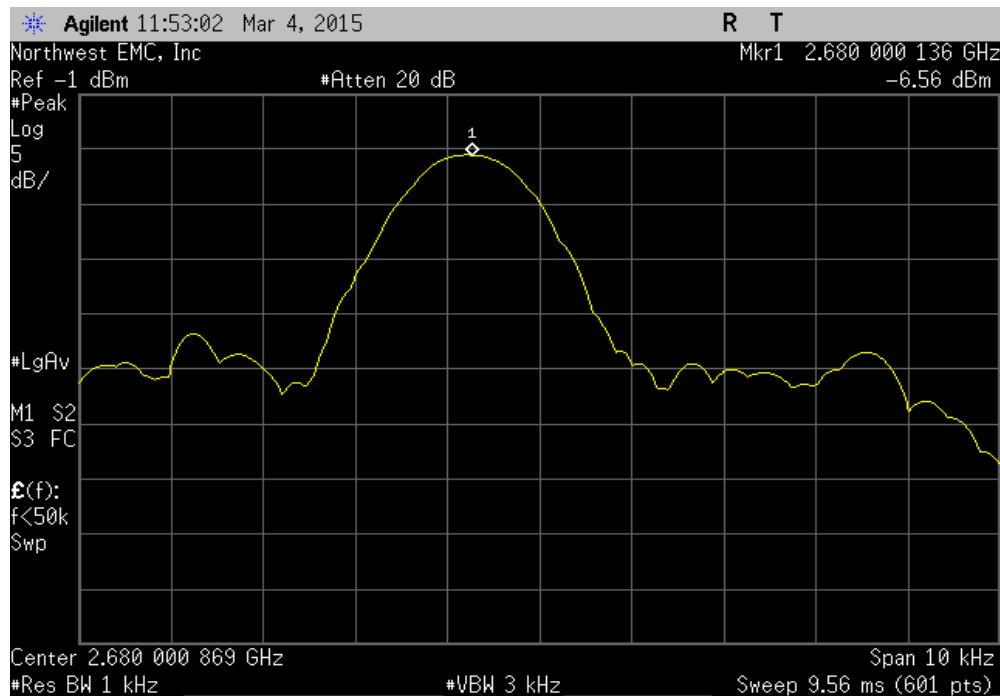


FREQUENCY STABILITY

Temperature: 0°, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000062	2506	0	1	Pass	

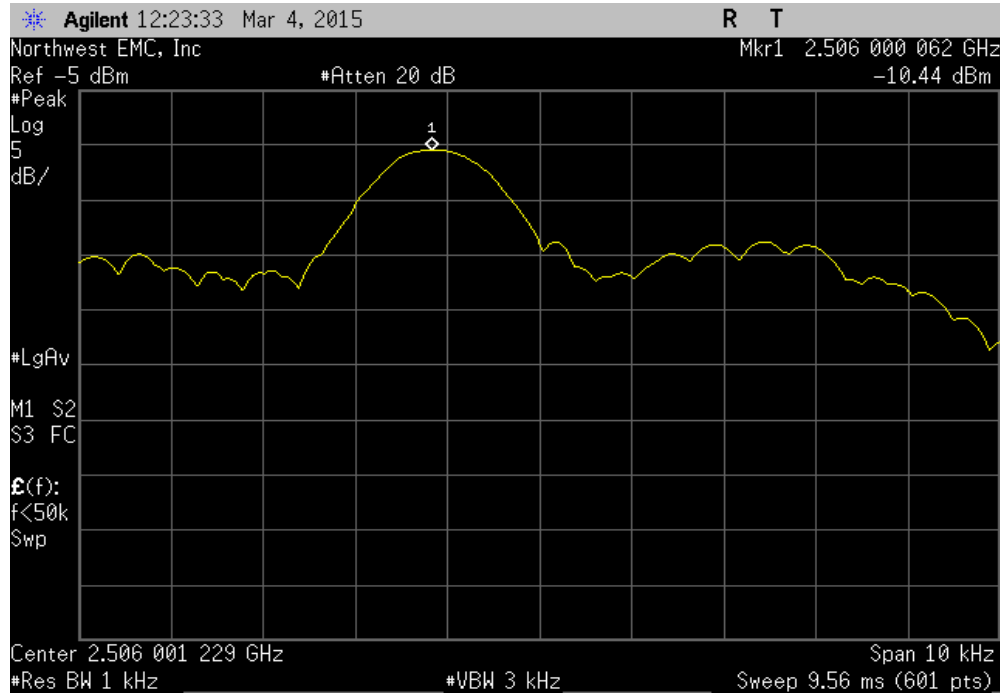


Temperature: 0°, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.000127	2593	0.1	1	Pass	

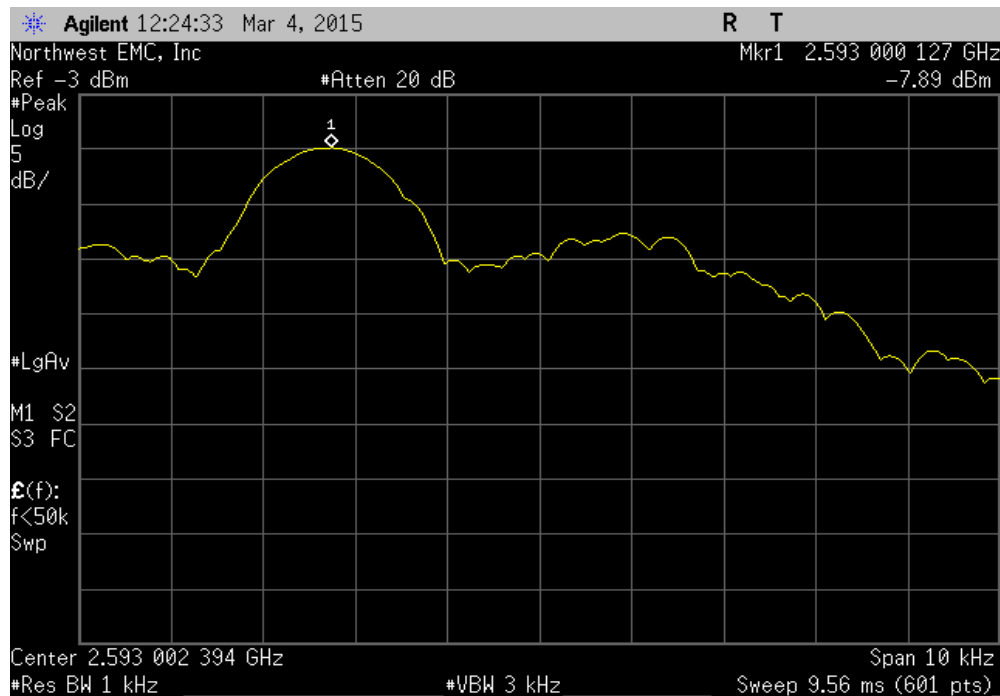


FREQUENCY STABILITY

Temperature: 0°, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000087	2680	0	1	Pass	

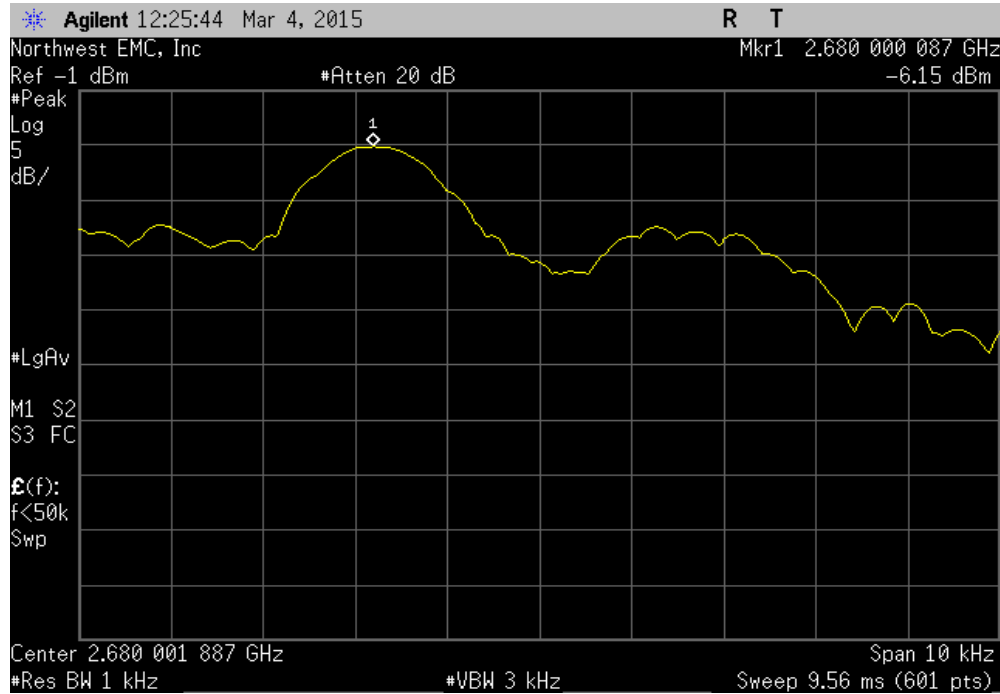


Temperature: -10°, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000068	2506	0	1	Pass	

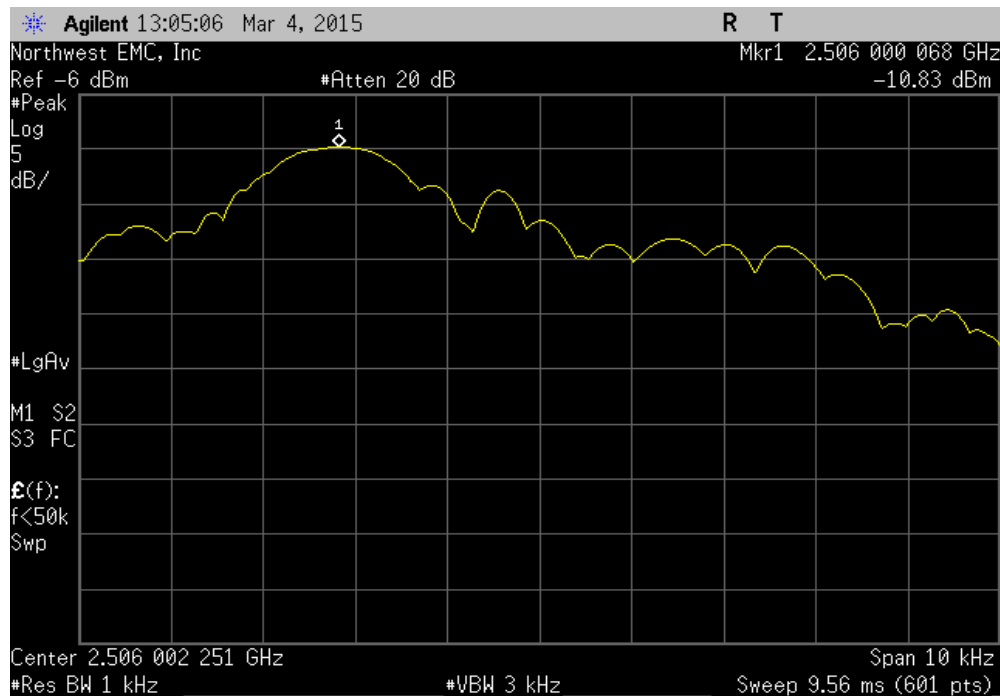


FREQUENCY STABILITY

Temperature: -10°, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.000024	2593	0	1	Pass	

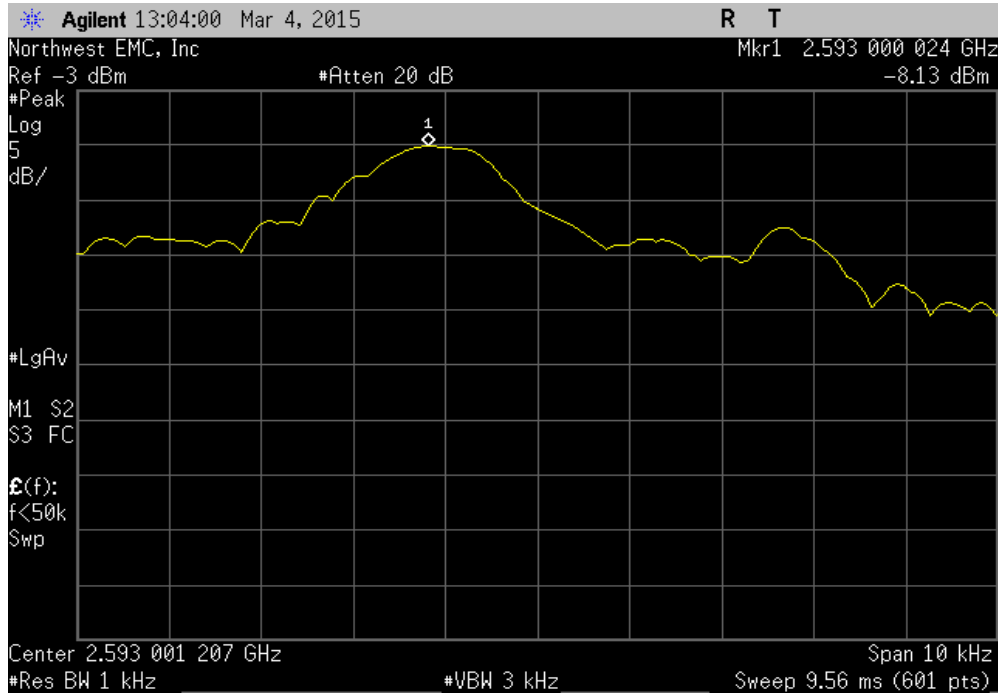


Temperature: -10°, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000137	2680	0.1	1	Pass	

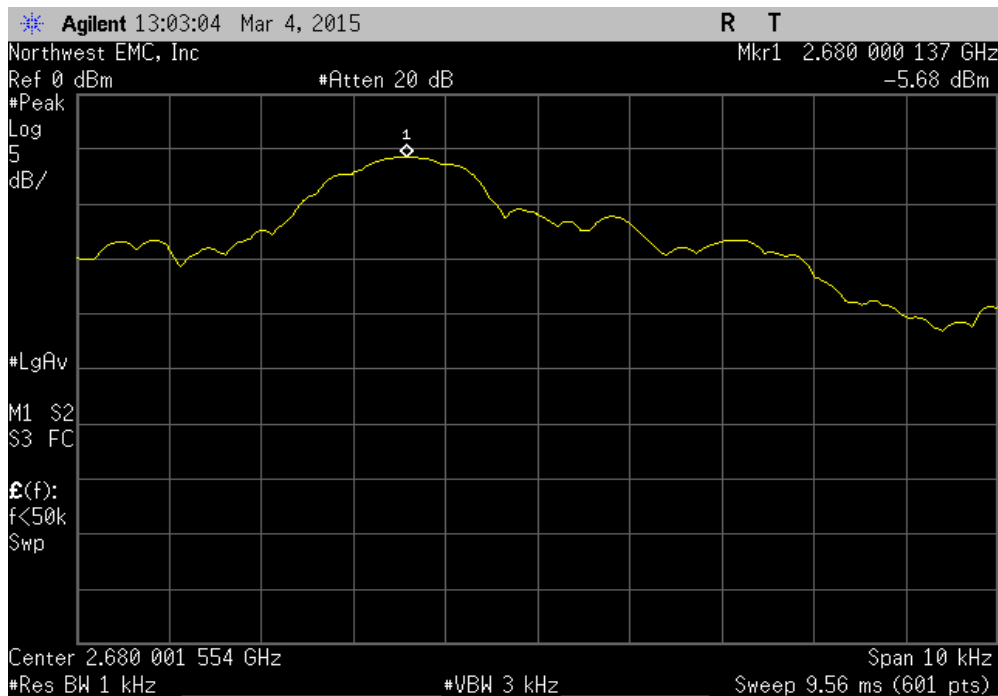


FREQUENCY STABILITY

Temperature: -20°, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000129	2506	0.1	1	Pass	

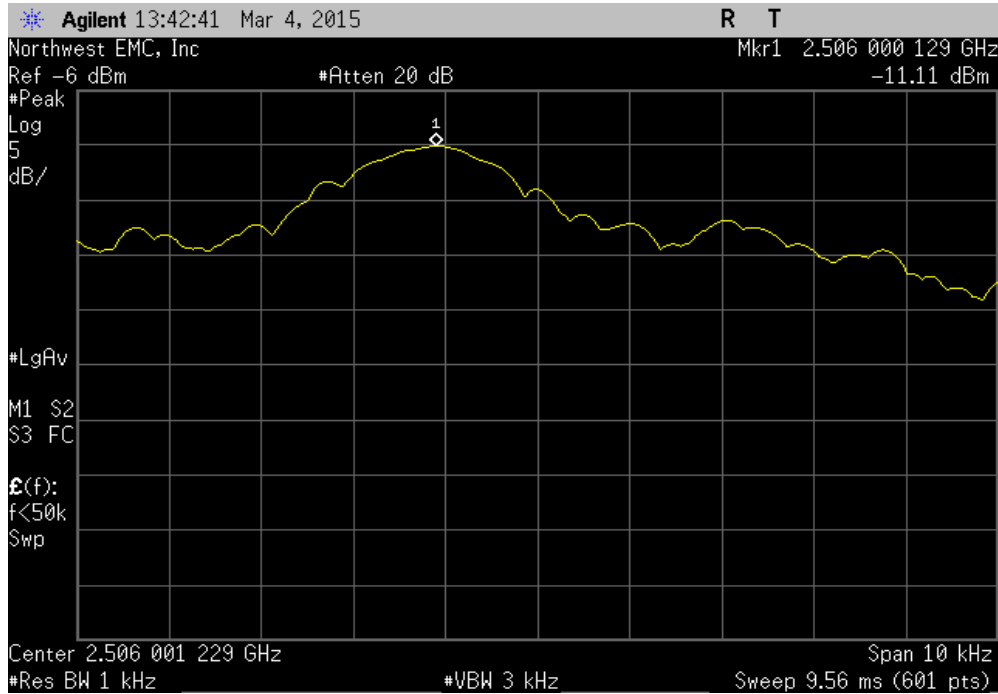


Temperature: -20°, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.000079	2593	0	1	Pass	

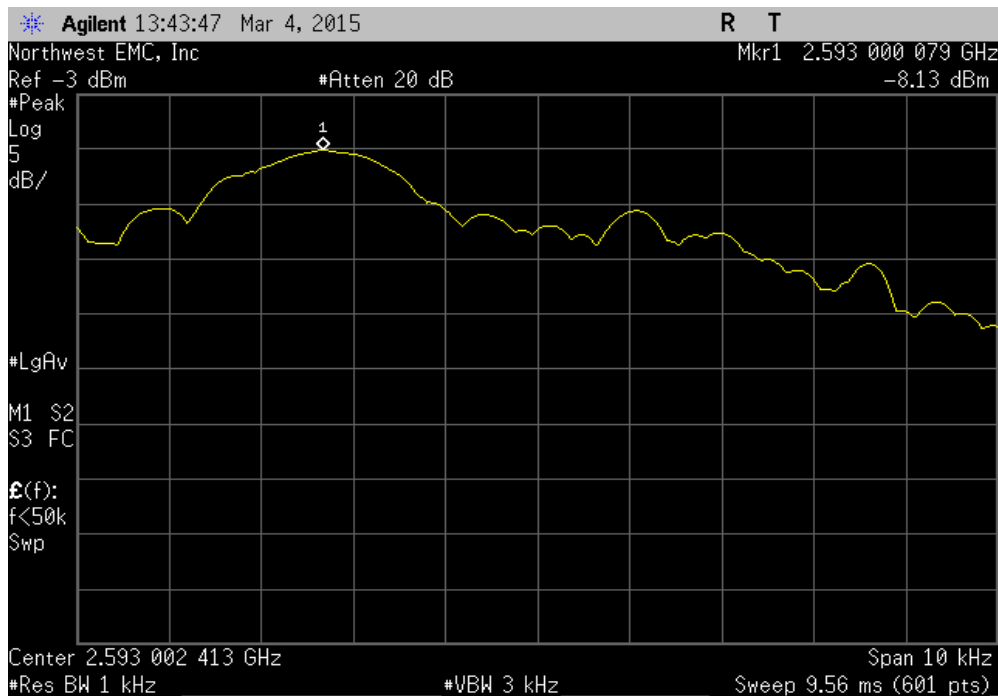


FREQUENCY STABILITY

Temperature: -20°, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000104	2680	0	1	Pass	

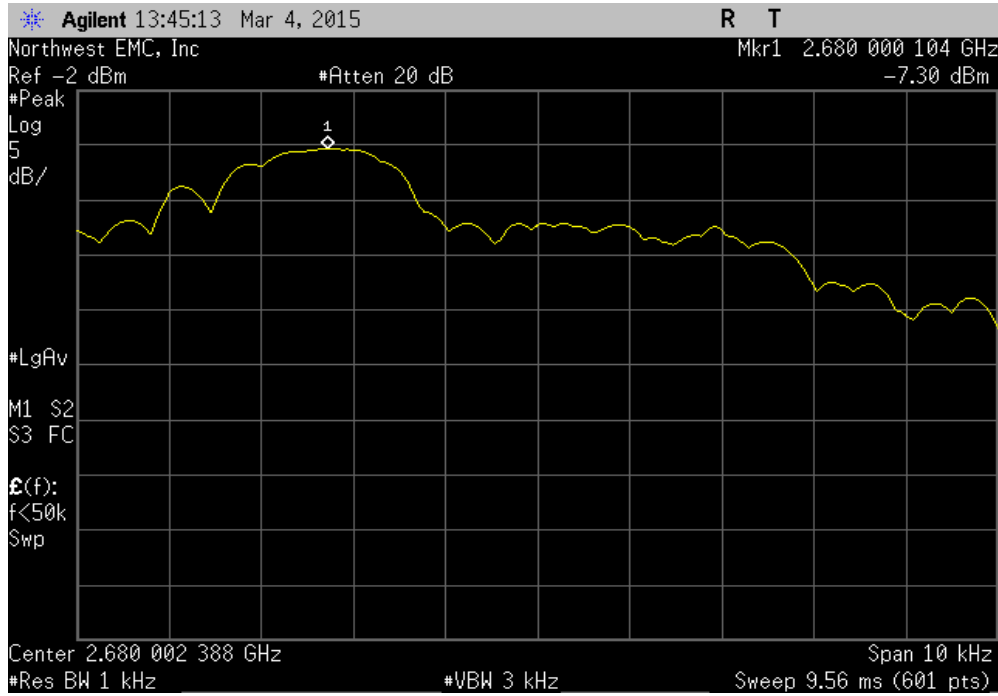


Temperature: -30°, Low Channel, 2506 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2506.000113	2506	0.1	1	Pass	

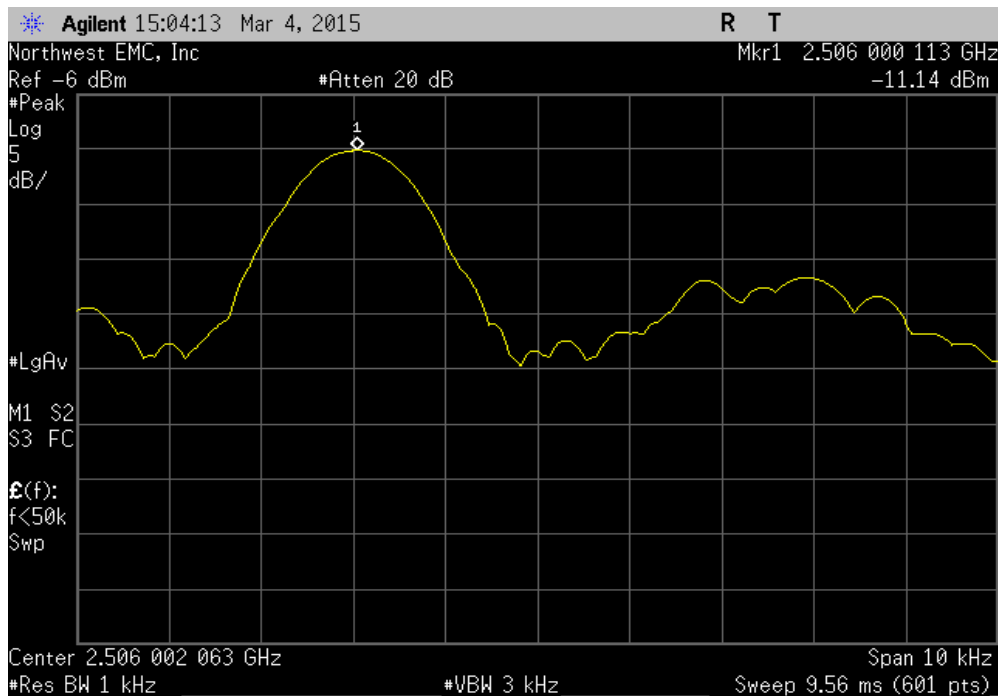


FREQUENCY STABILITY

Temperature: -30°, Mid Channel, 2593 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2593.000059	2593	0	1	Pass	

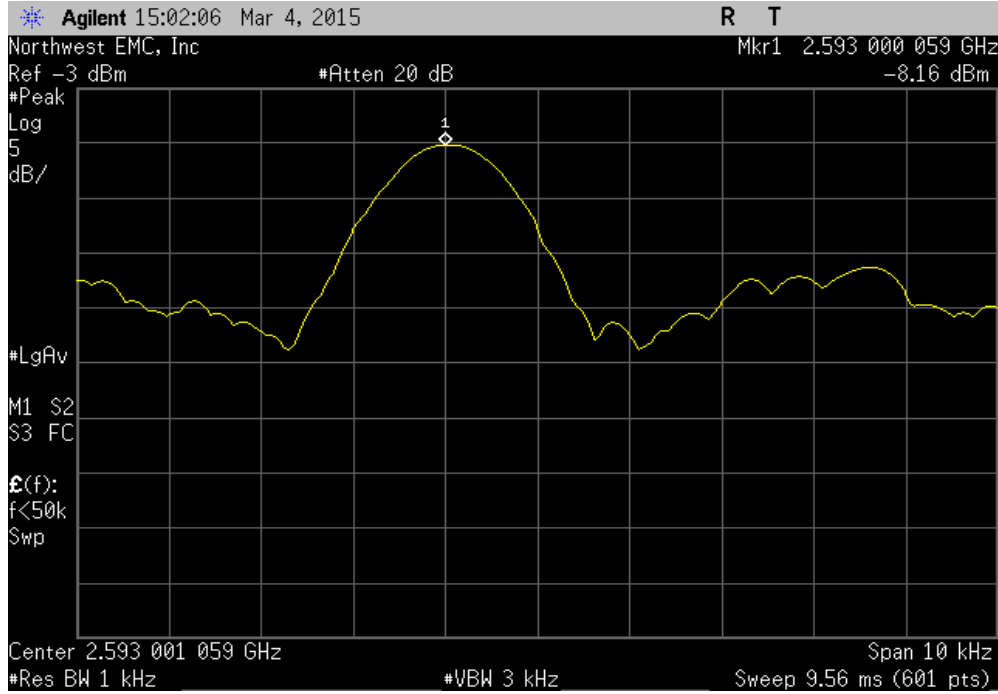

Temperature: -30°, High Channel, 2680 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2680.000069	2680	0	1	Pass	

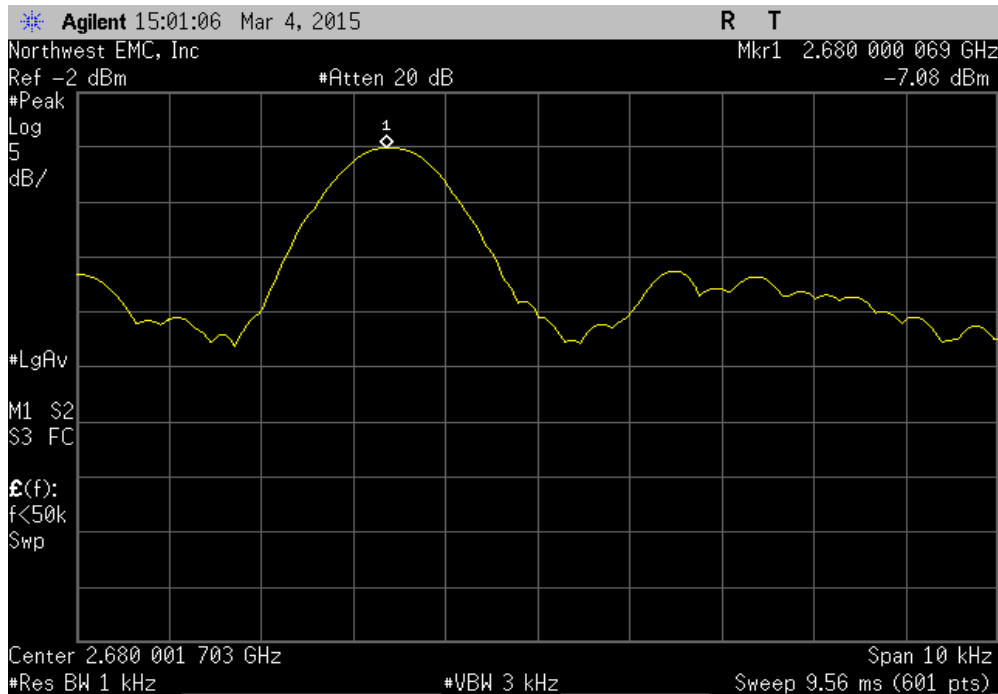

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting LTE 20MHz low channel (2506 MHz), mid channel (2593 MHz), and high channel (2680 MHz).

POWER SETTINGS INVESTIGATED

110VAC/60Hz

CONFIGURATIONS INVESTIGATED

TECO0025 - 2

FREQUENCY RANGE INVESTIGATED

Start Frequency 30 MHz Stop Frequency 40000 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Low Pass Filter, 0 - 1000 MHz	Micro-Tronics	LPM50004	HGK	3/2/2015	12 mo
High Pass Filter, 2.8 - 18 GHz	Micro-Tronics	HPM50111	HGQ	3/2/2015	12 mo
Attenuator, 20 dB, 'SMA'	SM Electronics	SA6-20	REO	3/2/2015	12 mo
Pre-Amplifier	Miteq	JSW45-26004000-40-5P	AVN	10/3/2014	12 mo
26-40GHz Cable	N/A	TTBJ141-KMKM-72	MNQ	10/3/2014	12 mo
Antenna, Horn	ETS	3160-10	AIC	NCR	0 mo
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/3/2014	12 mo
MN05 Cable	N/A	18-26GHz Standard Gain Horn Cable	MNP	10/3/2014	12 mo
Antenna, Horn	ETS	3160-09	AHG	NCR	0 mo
Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	3/2/2015	12 mo
Antenna, Horn	ETS Lindgren	3160-08	AIQ	NCR	0 mo
MN05 Cables	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	3/2/2015	12 mo
Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	3/2/2015	12 mo
Antenna, Horn	ETS	3160-07	AXP	NCR	0 mo
Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVX	3/2/2015	12 mo
MN05 Cables	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	3/2/2015	12 mo
Antenna, Horn	ETS	3115	AJA	6/3/2014	24 mo
Pre-Amplifier	Miteq	AM-1616-1000	PAD	3/2/2015	12 mo
MN05 Cables	ESM Cable Corp.	Bilog Cables	MNH	3/2/2015	12 mo
Antenna, Biconilog	Teseq	CBL 6141B	AYD	12/17/2013	24 mo
Spectrum Analyzer	Agilent	N9010A	AFI	1/27/2015	12 mo

MEASUREMENT BANDWIDTHS


Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The highest gain antenna to be used with the EUT was tested for final measurements. The EUT was configured for the lowest, a middle, and the highest transmit frequency in each operational band. For each configuration, the spectrum was scanned throughout the specified range. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10:2009). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.


For licensed transmitters, the FCC references TIA/EIA-603 as the measurement procedure standard. TIA/EIA-603 Section 2.2.12 describes a method for measuring radiated spurious emissions that utilizes an antenna substitution method:

At an approved test site, the transmitter is placed on a remotely controlled turntable, and the measurement antenna is placed 3 meters from the transmitter. The turntable azimuth is varied to maximize the level of spurious emissions. The height of the measurement antenna is also varied from 1 to 4 meters. The amplitude and frequency of the highest emissions are noted. The transmitter is then replaced with a horn antenna for emissions above 1 GHz. A signal generator is connected to the horn antenna, and its output is adjusted to match the level previously noted for each frequency. The output of the signal generator is recorded, and by factoring in the cable loss to the antenna and its gain; the power (dBm) into an ideal horn antenna is determined for each radiated spurious emission.

Work Order:	TECO0025	Date:	03/06/15	
Project:	None	Temperature:	21.3 °C	
Job Site:	MN05	Humidity:	12.8% RH	
Serial Number:	None	Barometric Pres.:	1020.1 mbar	
EUT: InterReach Fusion TDD - 2.5 GHz -RAU				
Configuration:	2			
Customer:	TE Connectivity / ADC Telecommunications			
Attendees:	None			
EUT Power:	110VAC/60Hz			
Operating Mode:	Transmitting LTE 20MHz low channel (2506 MHz), mid channel (2593 MHz), and high channel (2680 MHz).			
Deviations:	None			
Comments:	Antenna ports terminated			

Test Specifications	Test Method
FCC 27:2015	ANSI/TIA/EIA-603-C:2004

Run #	14	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass
-------	----	-------------------	---	-------------------	-----------	---------	------

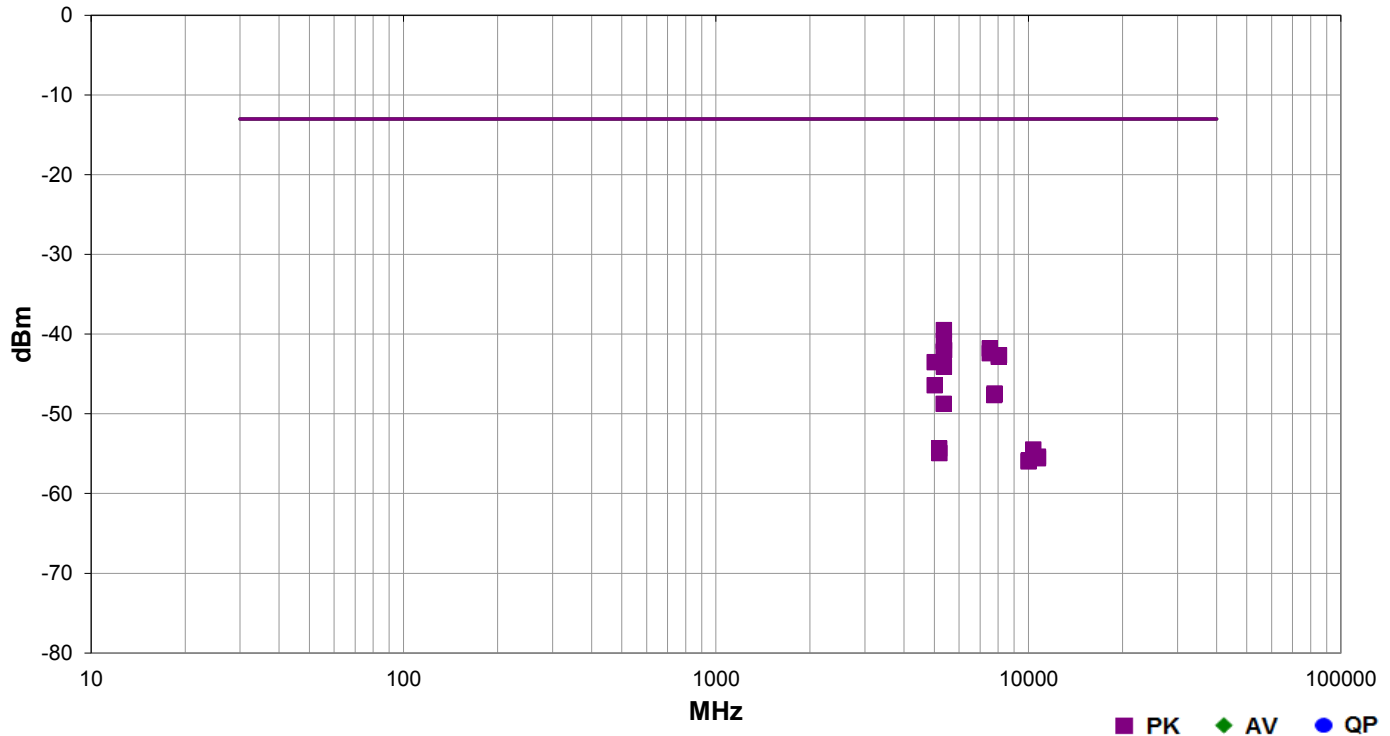

Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
5360.633	1.0	289.9	Horz	PK	1.12E-07	-39.5	-13.0	-26.5	LTE 20MHz, high ch, EUT on side
5364.867	1.0	283.9	Vert	PK	8.23E-08	-40.8	-13.0	-27.8	LTE 20MHz, high ch, EUT on side
7526.333	1.0	358.9	Horz	PK	6.59E-08	-41.8	-13.0	-28.8	LTE 20MHz, low ch, EUT on side
5369.867	1.0	19.1	Vert	PK	6.32E-08	-42.0	-13.0	-29.0	LTE 20MHz, high ch, EUT horz
5358.600	1.0	13.0	Horz	PK	6.01E-08	-42.2	-13.0	-29.2	LTE 20MHz, high ch, EUT horz
7521.200	1.0	275.0	Vert	PK	5.78E-08	-42.4	-13.0	-29.4	LTE 20MHz, low ch, EUT on side
8049.433	1.4	271.0	Vert	PK	5.42E-08	-42.7	-13.0	-29.7	LTE 20MHz, high ch, EUT on side
8041.533	1.0	311.9	Horz	PK	5.19E-08	-42.8	-13.0	-29.8	LTE 20MHz, high ch, EUT on side

	Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
	5011.800	1.2	297.9	Vert	PK	4.45E-08	-43.5	-13.0	-30.5	LTE 20MHz, low ch, EUT on side
	5362.400	1.0	45.0	Vert	PK	3.92E-08	-44.1	-13.0	-31.1	LTE 20MHz, high ch, EUT vert
	5011.067	1.5	283.9	Horz	PK	2.28E-08	-46.4	-13.0	-33.4	LTE 20MHz, low ch, EUT on side
	7788.867	3.0	117.0	Vert	PK	1.80E-08	-47.4	-13.0	-34.4	LTE 20MHz, mid ch, EUT on side
	7772.733	2.3	219.0	Horz	PK	1.72E-08	-47.7	-13.0	-34.7	LTE 20MHz, mid ch, EUT on side
	5356.000	1.0	297.9	Horz	PK	1.34E-08	-48.7	-13.0	-35.7	LTE 20MHz, high ch, EUT vert
	5179.367	1.0	222.0	Horz	PK	3.68E-09	-54.3	-13.0	-41.3	LTE 20MHz, mid ch, EUT on side
	10364.270	1.7	162.0	Vert	PK	3.56E-09	-54.5	-13.0	-41.5	LTE 20MHz, mid ch, EUT on side
	5190.500	3.7	123.1	Vert	PK	3.23E-09	-54.9	-13.0	-41.9	LTE 20MHz, mid ch, EUT on side
	10727.200	1.0	106.1	Horz	PK	2.90E-09	-55.4	-13.0	-42.4	LTE 20MHz, high ch, EUT on side
	10363.130	1.0	52.1	Horz	PK	2.83E-09	-55.5	-13.0	-42.5	LTE 20MHz, mid ch, EUT on side
	10721.600	1.0	249.0	Vert	PK	2.77E-09	-55.6	-13.0	-42.6	LTE 20MHz, high ch, EUT on side
	10023.400	1.4	12.1	Vert	PK	2.59E-09	-55.9	-13.0	-42.9	LTE 20MHz, low ch, EUT on side
	10015.100	1.0	288.0	Horz	PK	2.54E-09	-56.0	-13.0	-43.0	LTE 20MHz, low ch, EUT on side