



TEST REPORT

Report Number: 100790013MIN-001

Project Number: G100790013

Testing performed on the
Spectrum 700p2/AWSp2 SRAU

to

47 CFR, Part 27:2010, Enclosure Spurious Radiated Emissions

For

ADC Telecommunications Inc. - a TE Connectivity Company

Test Performed by:
Intertek Testing Services NA, Inc.
7250 Hudson Blvd., Suite 100
Oakdale, MN 55128 USA

Test Authorized by:
ADC Telecommunications Inc.- a TE Connectivity
Company
541 E Trimble Road
San Jose, CA 95131 USA

Prepared by: Richard Blonigen
Richard Blonigen

Date: July 23, 2012

Reviewed by: Norman Shpilsher
Norman Shpilsher

Date: July 23, 2012

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.



TABLE OF CONTENTS

1.0 DESCRIPTION OF THE SAMPLE (EUT)..... 3

2.0 TEST SUMMARY..... 4

2.1 Statement of the Measurement Uncertainty..... 4

3.0 EQUIPMENT UNDER TEST 5

3.1 Power Configuration 5

3.2 EUT Configuration..... 5

3.3 Environmental conditions..... 6

4.0 TEST CONDITIONS AND RESULTS..... 7

4.1 Enclosure Spurious Radiated Emissions..... 7

5.0 TEST EQUIPMENT..... 27

1.0 DESCRIPTION OF THE SAMPLE (EUT)

Model:	Spectrum 700p2/AWSp2 SRAU: SPT-S2-70AWS-22-SISO
Type of EUT:	Repeater / Booster
Operating Frequency Range:	728 – 757MHz (700 band) 2110 – 2155 MHz (AWS band)
Company:	ADC Telecommunications Inc. - a TE Connectivity Company
Customer:	Sue Cyr
Address:	541 E. Trimble Road San Jose, CA 95131 USA
Phone:	408-952-2445
Fax:	408-952-2645
e-mail:	sue.cyr@te.com
Test Standards:	☐ EN 55022:2006 +A1:2007, Class T ☐ EN 55011:2007 +A2:2007, Group T , Class T ☒ 47 CFR, Part 27:2010, Enclosure Spurious Radiated Emissions ☐ ICES-003, Issue 4:2004 ☐ EN 55014-1:2006 ☐ EN 61326-1:2006 ☐ Class T for Radiated and Conducted Emissions ☐ Basic Immunity Test Requirements ☐ Immunity Test Requirements for Industrial Locations ☐ EN 60601-1-2:2001 +A1:2006 ☐ EN 61000-6-3:2007 ☐ EN 61000-6-4:2007 ☐ EN 61000-3-2:2006 ☐ EN 61000-3-3:1995 +A1:2001 +A2:2006 ☐ EN 61000-6-1:2007 ☐ EN 61000-6-2:2005 ☐ EN 55024:1998 + A1:2001 + A2:2003
Date Sample Submitted:	July 16, 2012
Test Work Started:	July 16, 2012
Test Work Completed:	July 20, 2012
Test Sample Conditions:	☐ Damaged ☐ Poor (Usable) ☒ Good ☐ Prototype ☒ Production ☐ Used

2.0 TEST SUMMARY

Referring to the performance criteria and the operating mode during the tests specified in this report, the equipment complies with the requirements according to the following standards.

TEST STANDARD	TEST	RESULT
Part 27	Enclosure Spurious Radiated Emissions	Pass

2.1 Statement of the Measurement Uncertainty

Note: The measured result in this report is within the specification limits by more than the measurement uncertainty; the measured result indicates that the product tested complies with the specification limit.

The expanded uncertainty ($k = 2$) for radiated emissions from 30 to 1000 MHz has been determined to be: ± 4 dB at 10m and ± 5.4 dB at 3m

The expanded uncertainty ($k = 2$) for conducted emissions from 150 kHz to 30 MHz has been determined to be:
 ± 2.6 dB

3.0 EQUIPMENT UNDER TEST

3.1 Power Configuration

Rated voltage:	☐ 120VAC ☐ 230VAC ☐ 400VAC ☒ 54VDC from external support Power
Rated current:	Amp.
Rated frequency:	☐ 50Hz ☒ 60Hz
Number of phases:	☒ 1 Phase ☐ 3 Phases

3.2 EUT Configuration

The equipment under test was operated during the measurement under the following conditions:

- ☐ - Standby
- ☐ - Test program (H - Pattern)
- ☒ - Continuous Operation (see details below)
- ☐ - Specific test program
- ☐ -

Operating modes of the EUT:

No.	Description
1	Continuous transmitting at 729MHz, 742MHz, and 756MHz at 20dBm output power
2	Continuous transmitting at 2111MHz, 2132MHz, and 2154MHz at 20dBm output power

Cables:

No.	Type	Length	Designation	Note
1	Two RF coax	10m each	RF signal cables to the Support Equipment	

Support equipment/Services:

No.	Item	Description
1	Aeroflex IRF 3413	Signal Generator
2	Prism Host Unit p/n 1449226	Host Unit
3	IFEU p/n MR2216G7	54 V Power Supply
4	Prism DRU unit	DRU
5	Spectrum IFEU Unit	IFEU
6	Spectrum Main RAU	Remote Antenna

General notes: None

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 °C</u>
---------------------	-----------------

Humidity:	<u>30-60 %</u>
------------------	----------------

Atmospheric pressure:	<u>86-106 kPa</u>
------------------------------	-------------------

4.0 TEST CONDITIONS AND RESULTS

4.1 Enclosure Spurious Radiated Emissions

Description of the test location

Test location: ☐ OATS ☒ Anechoic Chamber



Test distance: ☐ 10 meters ☒ 3 meters

Test result: **Pass**



Frequency range: 30MHz-10GHz (700 Band)
30MHz-22GHz (AWS Band)

Max. Emissions margin: 25.3 dB below the Reference Limits

- Notes:**
1. The Radiated Emissions testing was performed in the Anechoic chamber at 3m measurement distance (see Table 1 & 2 and Graphs 1-30)
 2. The Spurious Radiated Power limits of -13dBm was correlated with field strength Reference Limit of 82.2dB μ V/m during field strength measurements at 3m measurement distance
 3. No spurious or harmonic emissions with margin less than 20dB below the Reference Limits were detected; therefore, no emissions were measured with substitution method
 4. Emissions at operating frequencies were excluded from the Table
-

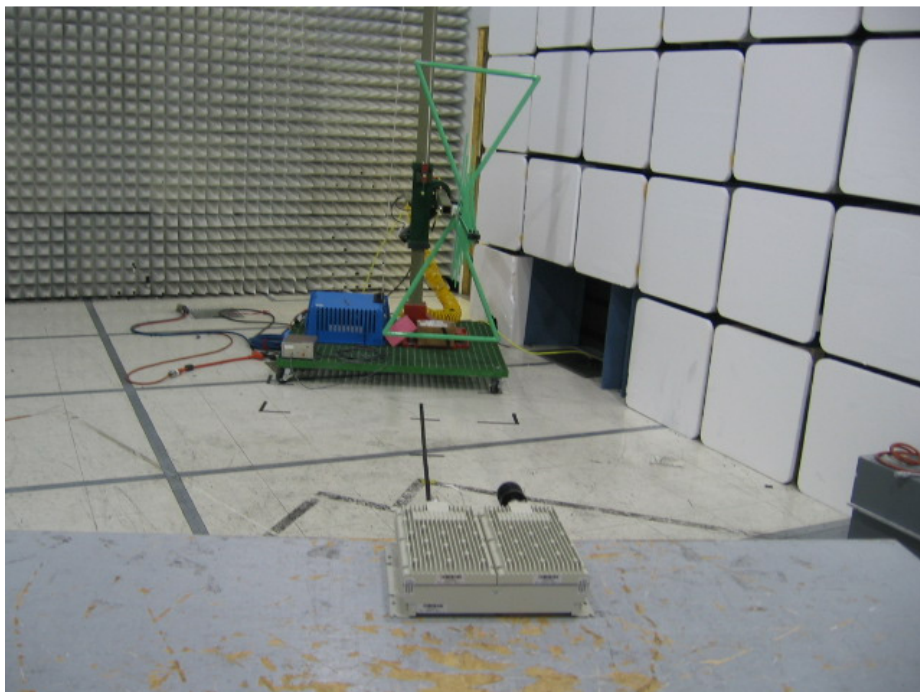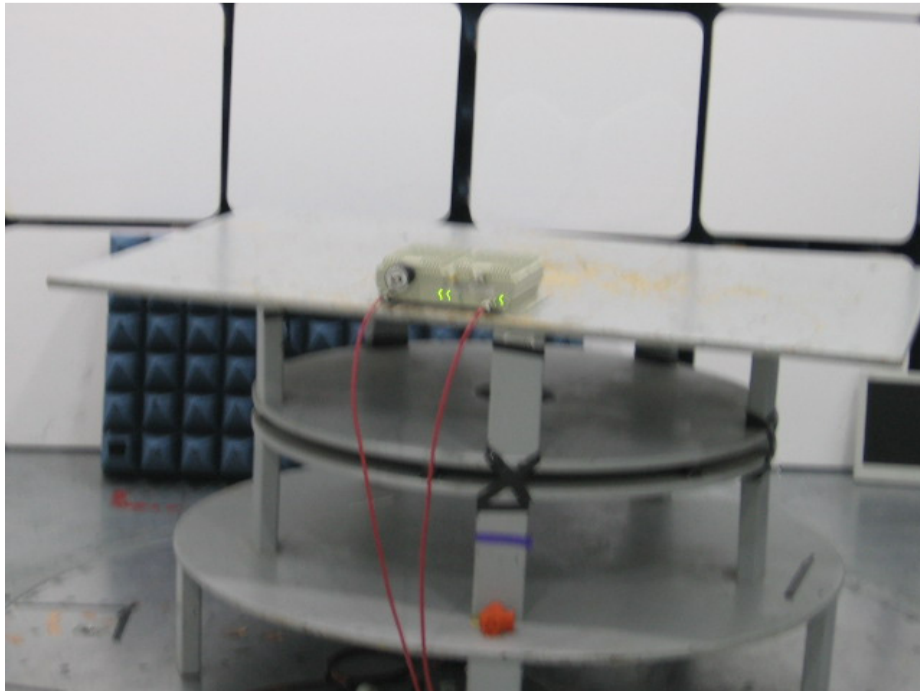

Test Setup Photos

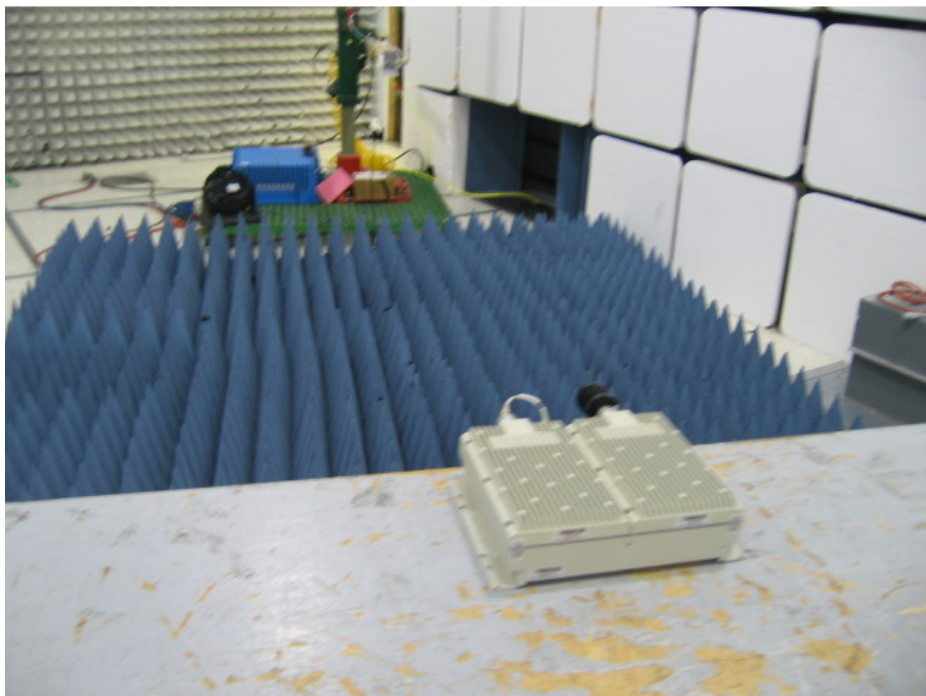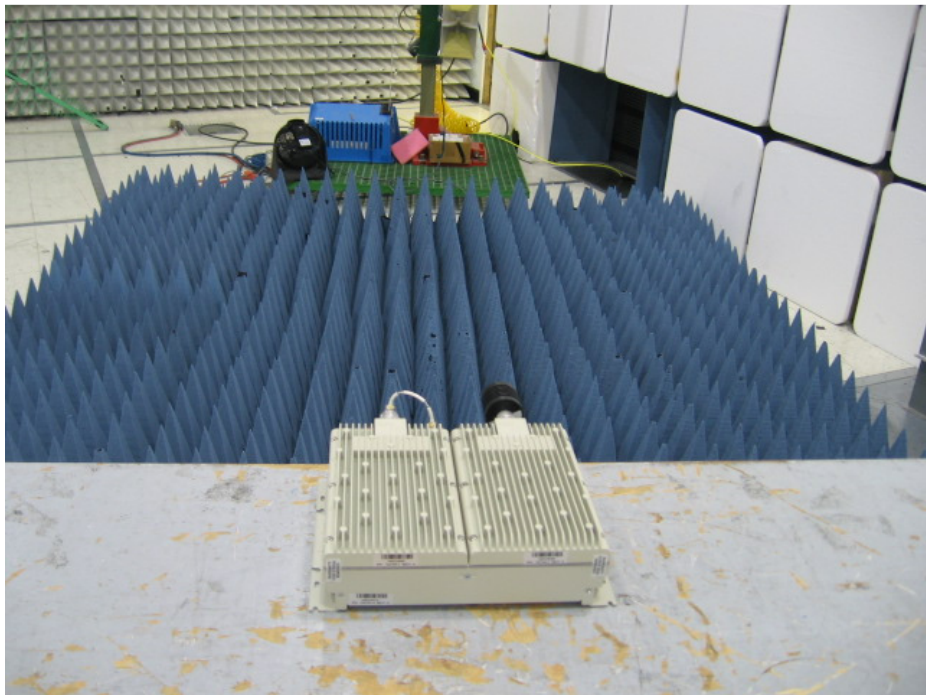


Test Setup Photos


Date:	July 16-20, 2012	Result: Pass
Tested by:	Richard Blonigen	
Standard:	FCC Part 27	
Test Point:	Enclosure	
Operation mode:	See page 5	
Note:	Channels 728-756MHz Frequency Range 30MHz-10GHz	

Table 1


Frequency MHz	Antenna Polarity	Peak Reading dBμV	Total C.F. dB1/m	Pre-Amp. Gain (dB)	Total at 3m dBμV/m	Limit dBμV/m	Margin dB
Channel 729MHz							
32.424 MHz	V	19.3	19.0	0.0	38.3	82.2	-43.9
82.988 MHz	V	28.6	9.1	0.0	37.7	82.2	-44.5
996.11 MHz	V	10.9	26.4	0.0	37.3	82.2	-44.9
1.459 GHz	V	56.6	27.5	43.0	41.1	82.2	-41.1
1.675 GHz	V	55.9	28.5	43.2	41.2	82.2	-41.0
82.988 MHz	H	26.7	9.1	0.0	35.9	82.2	-46.3
114.85 MHz	H	14.3	13.7	0.0	28.0	82.2	-54.3
136.26 MHz	H	15.9	13.6	0.0	29.5	82.2	-52.7
981.61 MHz	H	10.5	26.1	0.0	36.6	82.2	-45.6
1.459 GHz	H	53.7	27.4	43.0	38.1	82.2	-44.1
Channel 742MHz							
33.229 MHz	V	20.6	18.5	0.0	39.1	82.2	-43.1
83.026 MHz	V	31.0	9.2	0.0	40.1	82.2	-42.1
86.552 MHz	V	28.8	9.6	0.0	38.4	82.2	-43.8
1.483 GHz	V	64.9	27.6	43.0	49.4	82.2	-32.8
1.675 GHz	V	56.3	28.5	43.2	41.6	82.2	-40.6
33.211 MHz	H	18.1	18.6	0.0	36.7	82.2	-45.5
82.938 MHz	H	22.8	9.1	0.0	32.0	82.2	-50.2
136.2 MHz	H	18.9	13.6	0.0	32.6	82.2	-49.7
998.03 MHz	H	10.4	26.4	0.0	36.8	82.2	-45.4
1.483 GHz	H	60.2	27.5	43.0	44.7	82.2	-37.5
Channel 756MHz							
33.229 MHz	V	20.6	18.5	0.0	39.1	82.2	-43.1
83.026 MHz	V	31.0	9.2	0.0	40.1	82.2	-42.1
86.552 MHz	V	28.8	9.6	0.0	38.4	82.2	-43.8
1.513 GHz	V	65.7	27.7	43.0	50.4	82.2	-31.9
1.675 GHz	V	55.9	28.5	43.2	41.1	82.2	-41.1
33.211 MHz	H	18.1	18.6	0.0	36.7	82.2	-45.5
82.938 MHz	H	22.8	9.1	0.0	32.0	82.2	-50.2
136.2 MHz	H	18.9	13.6	0.0	32.6	82.2	-49.7
998.03 MHz	H	10.4	26.4	0.0	36.8	82.2	-45.4
1.513 GHz	H	59.6	27.6	43.0	44.2	82.2	-38.0

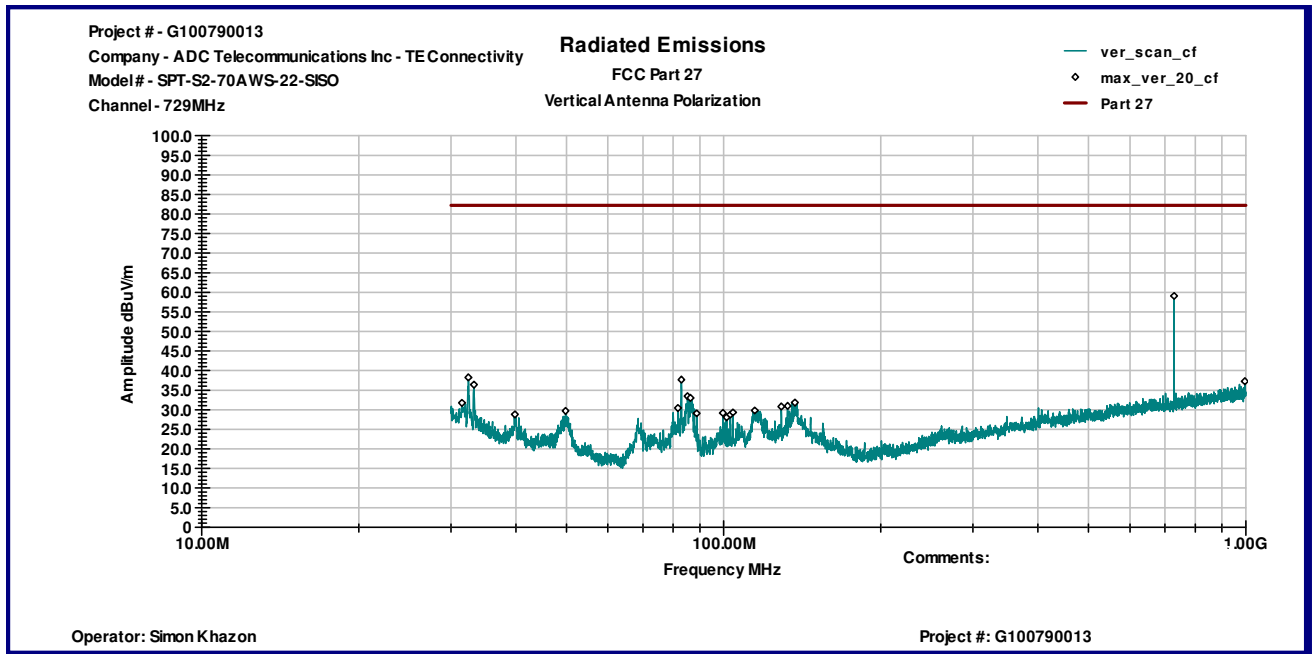


Graph 1

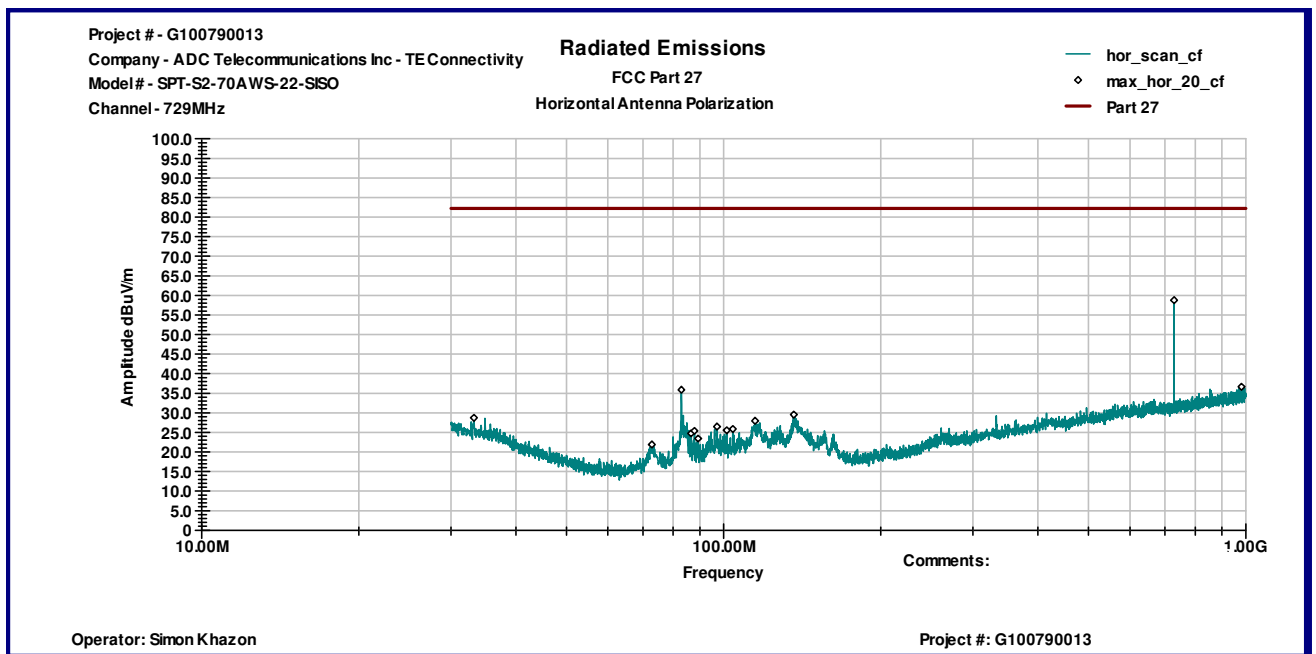


Graph 2

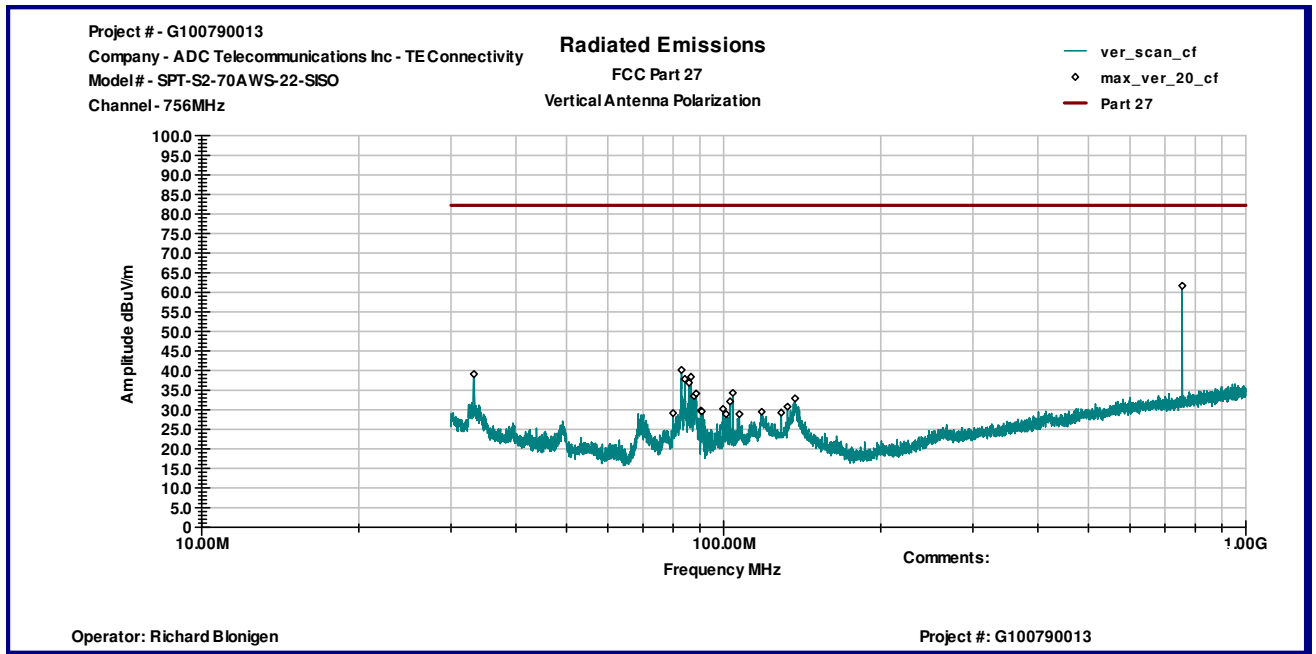


Graph 3

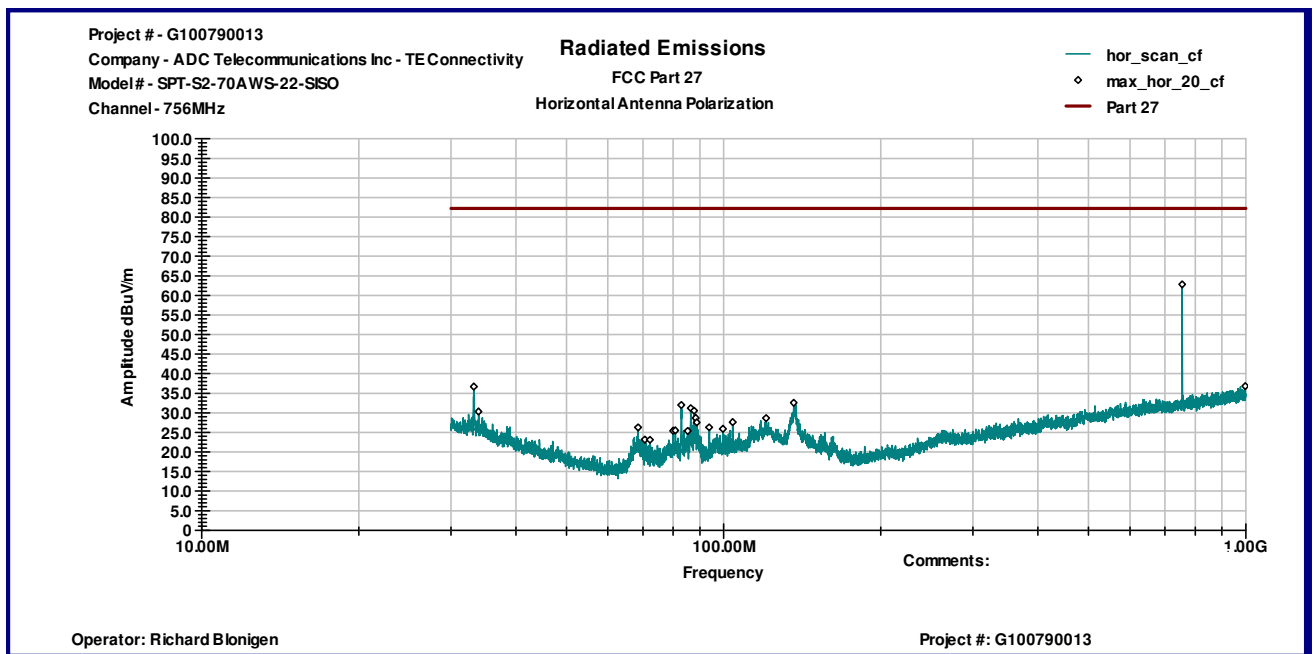


Graph 4

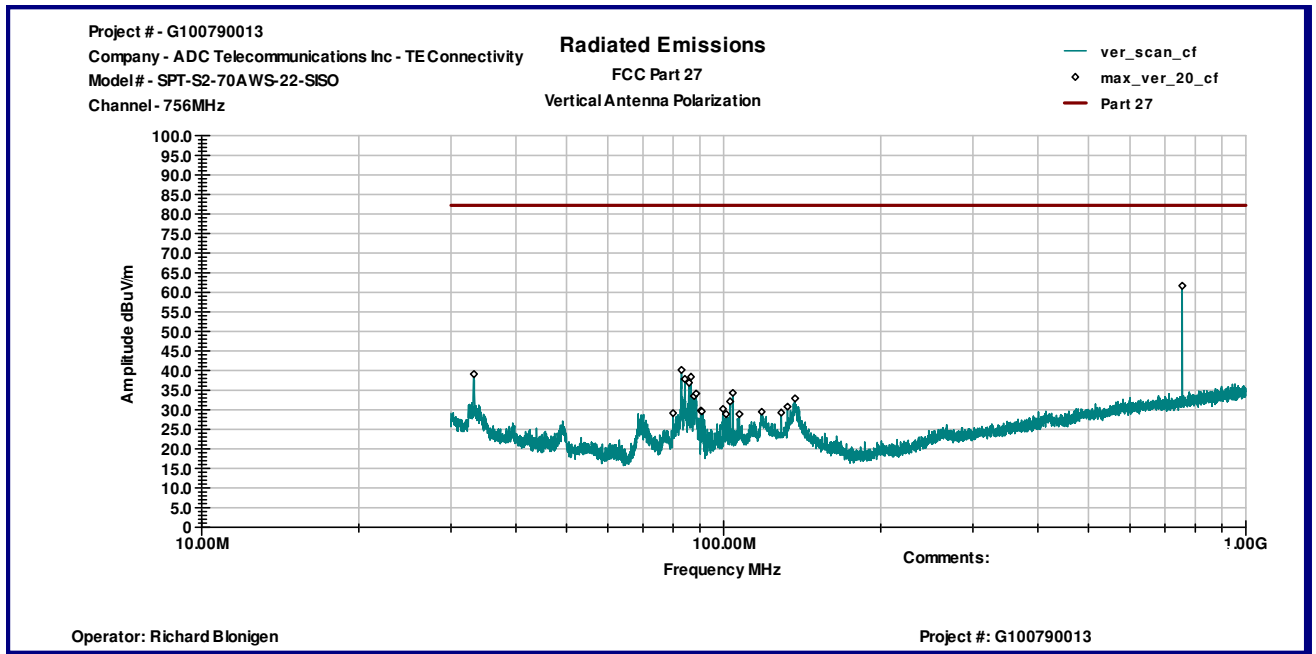


Graph 5

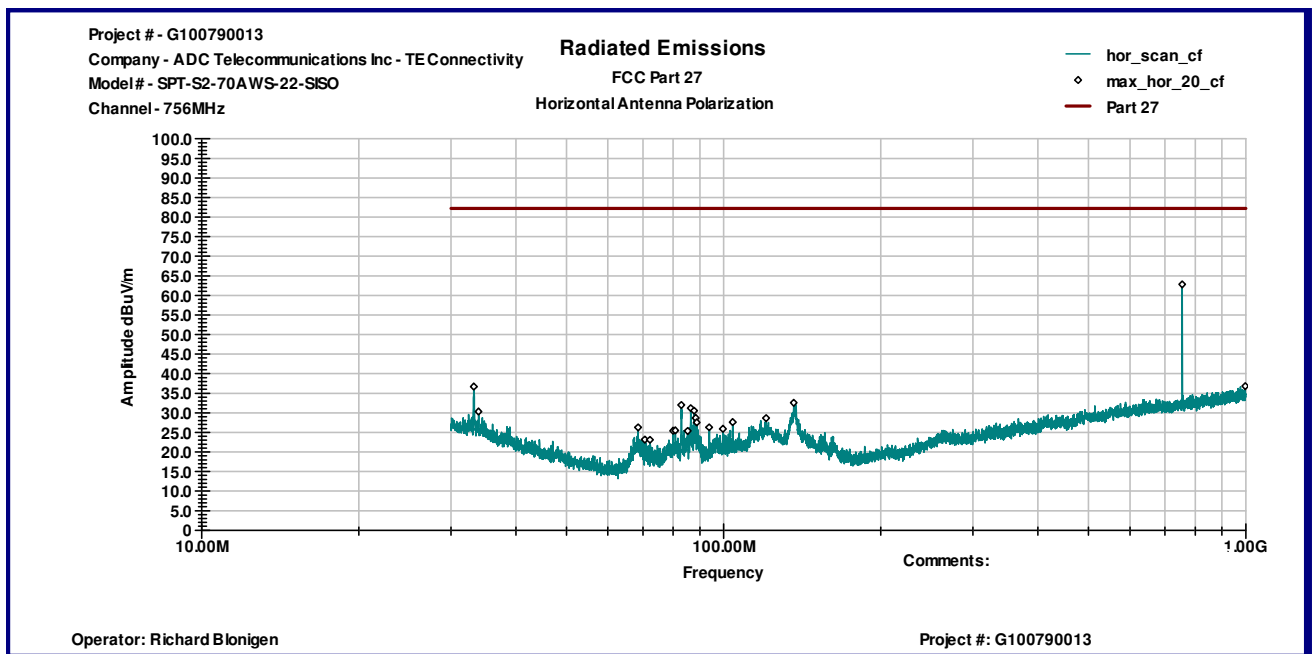


Graph 6

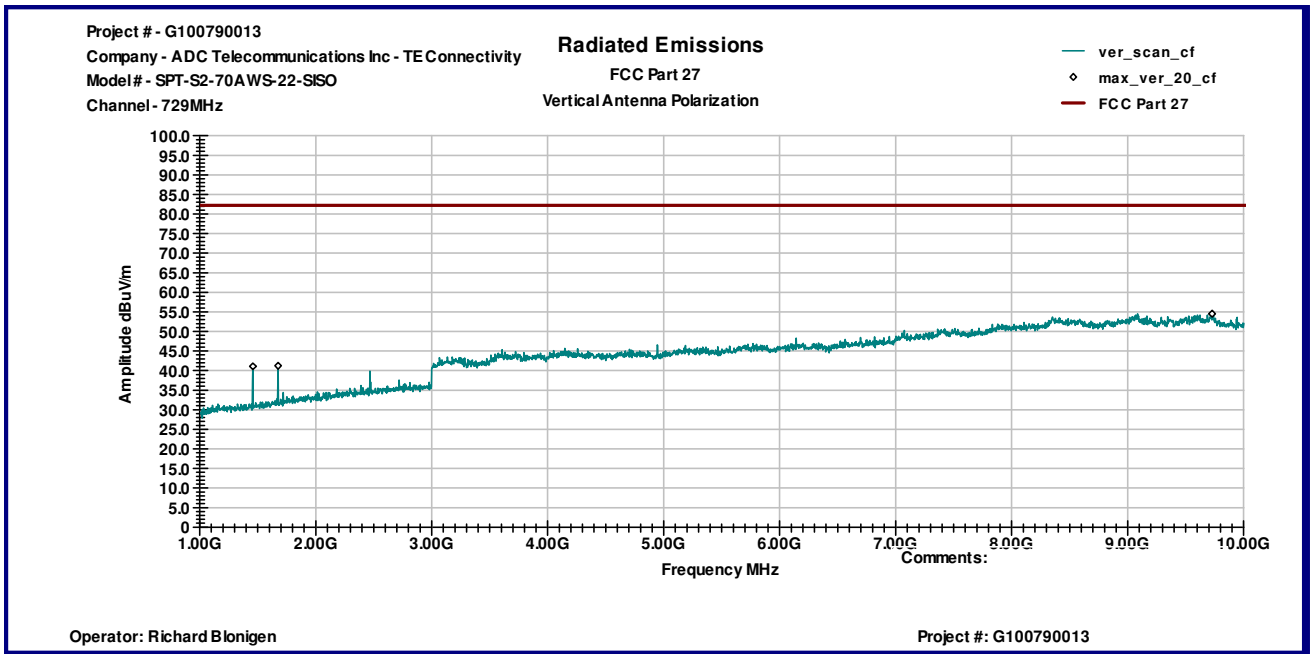


Graph 7

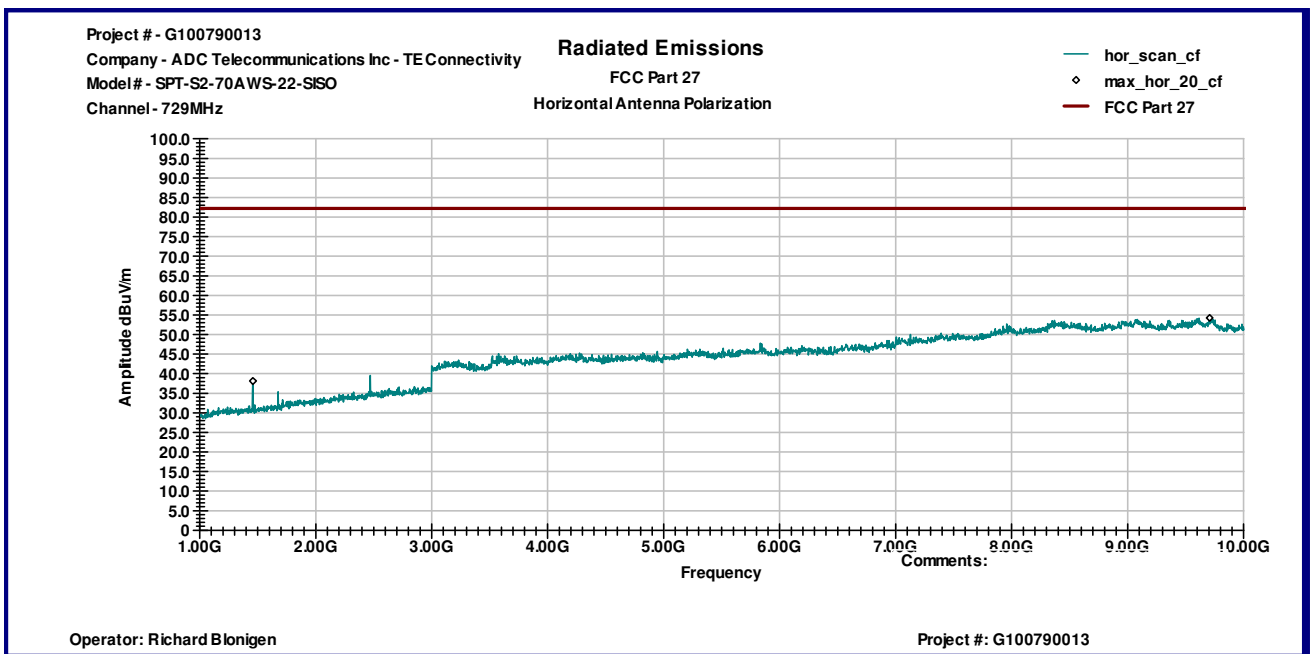


Graph 8

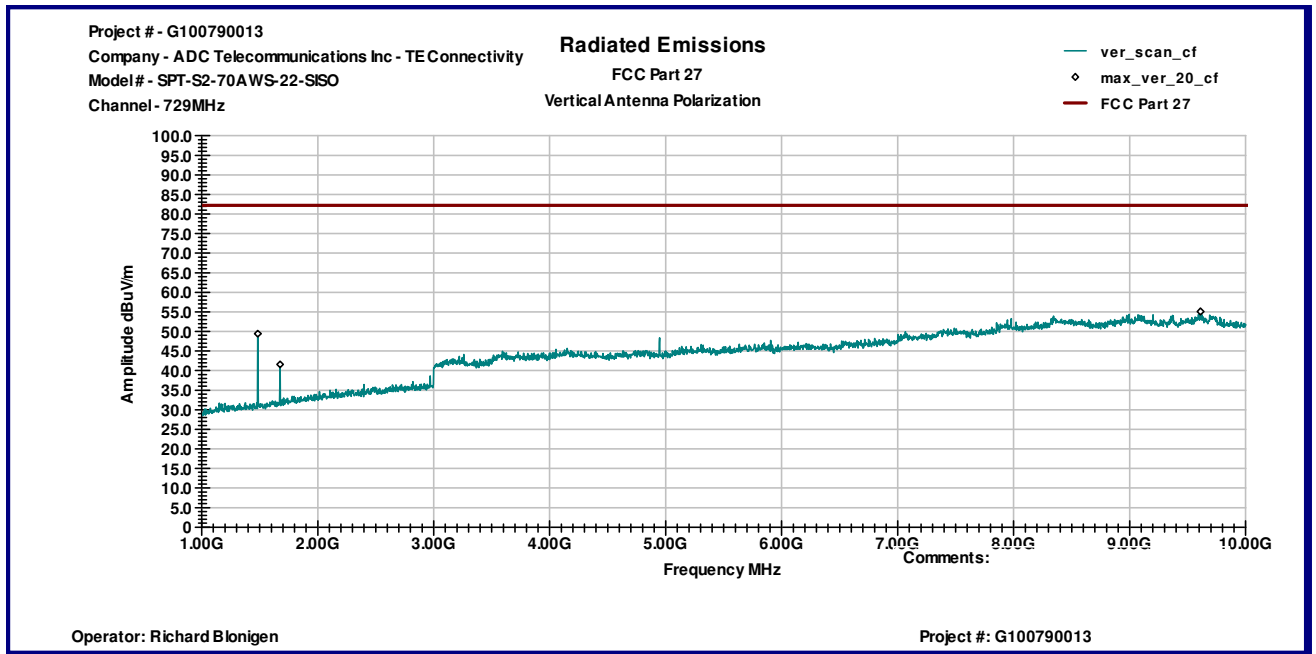


Graph 9

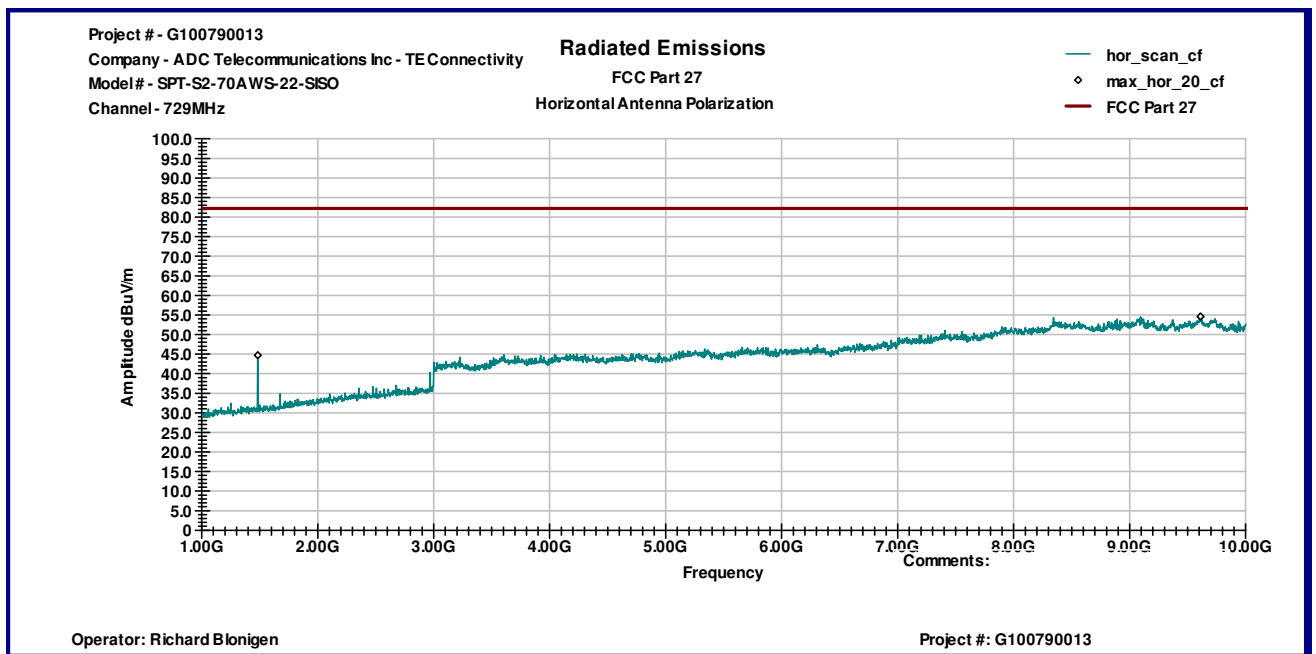

Graph 10

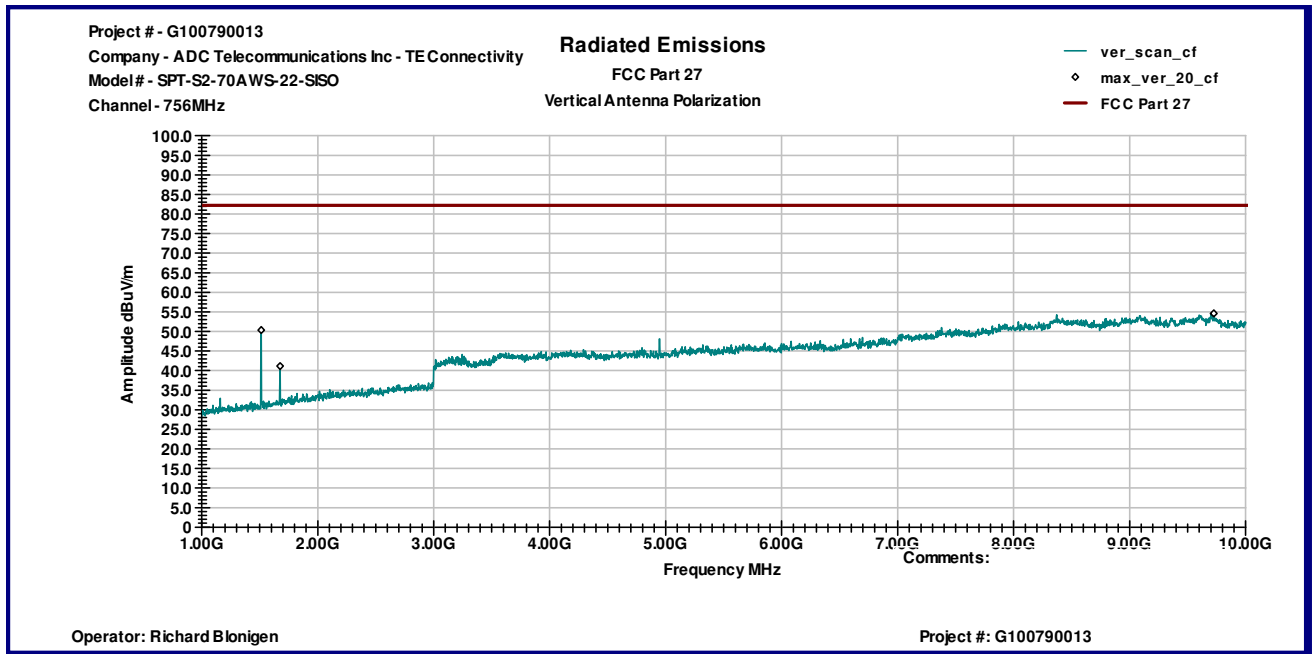

Graph 11

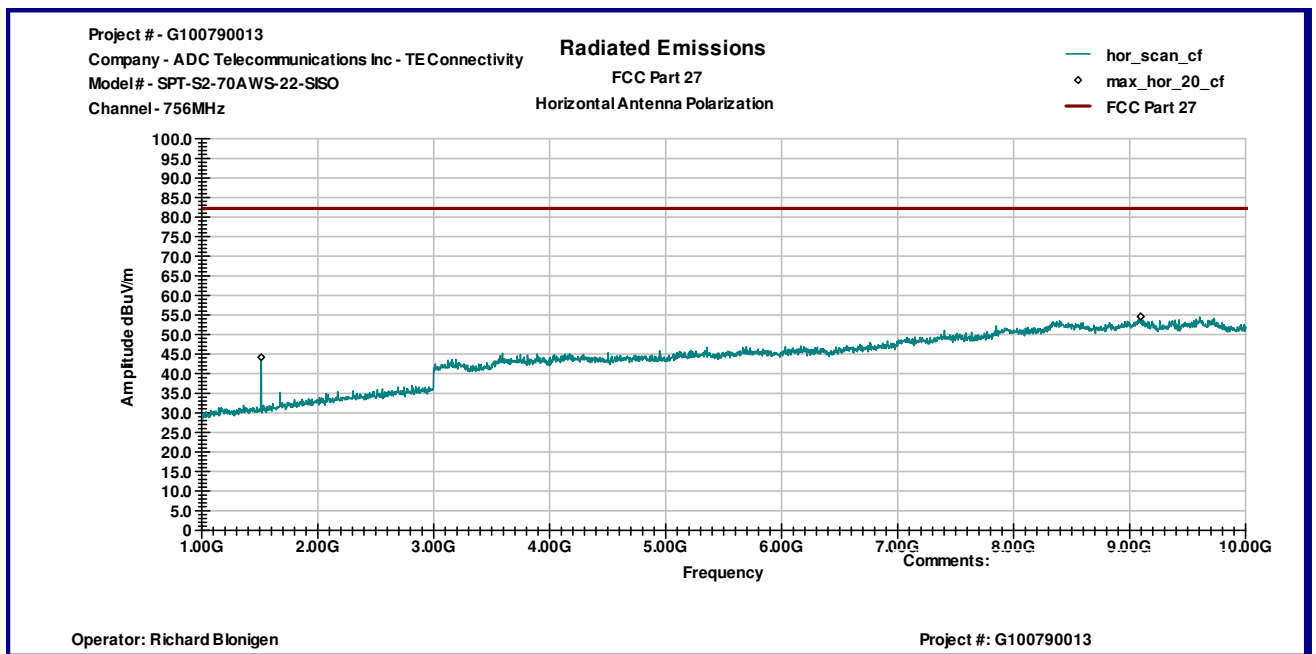


Graph 12


Date:	July 16-20, 2012	Result: Pass
Tested by:	Richard Blonigen	
Standard:	FCC Part 27	
Test Point:	Enclosure	
Operation mode:	See page 5	
Note:	Channels 2110 – 2155 MHz Frequency Range 30MHz-22GHz	

Table 2


Frequency MHz	Antenna Polarity	Peak Reading dBμV	Total C.F. dB1/m	Pre-Amp. Gain (dB)	Total at 3m dBμV/m	Limit dBμV/m	Margin dB
Channel 2111MHz							
83.063 MHz	V	26.1	9.2	0.0	35.3	82.2	-47.0
85.451 MHz	V	23.8	9.5	0.0	33.3	82.2	-48.9
86.719 MHz	V	25.6	9.7	0.0	35.2	82.2	-47.0
999.65 MHz	V	10.2	26.4	0.0	36.6	82.2	-45.6
1.6732 GHz	V	57.1	28.5	43.2	42.4	82.2	-39.8
83.063 MHz	H	20.9	9.2	0.0	30.1	82.2	-52.1
83.958 MHz	H	19.6	9.3	0.0	28.8	82.2	-53.4
86.57 MHz	H	18.8	9.6	0.0	28.4	82.2	-53.8
154.2 MHz	H	15.6	12.4	0.0	28.0	82.2	-54.2
956.85 MHz	H	10.8	25.9	0.0	36.7	82.2	-45.6
Channel 2132MHz							
990.45 MHz	V	10.0	26.3	0.0	36.3	82.2	-45.9
1.6154 GHz	V	54.8	28.2	43.2	39.8	82.2	-42.4
1.6256 GHz	V	52.9	28.3	43.2	38.0	82.2	-44.2
1.6732 GHz	V	56.6	28.5	43.2	41.9	82.2	-40.3
1.782 GHz	V	55.2	29.0	43.3	40.9	82.2	-41.3
33.221 MHz	H	13.8	18.5	0.0	32.4	82.2	-49.8
83.063 MHz	H	28.2	9.2	0.0	37.3	82.2	-44.9
84.182 MHz	H	21.3	9.3	0.0	30.6	82.2	-51.6
155.81 MHz	H	16.2	12.3	0.0	28.5	82.2	-53.7
996.11 MHz	H	10.4	26.4	0.0	36.8	82.2	-45.4
Channel 2154MHz							
32.459 MHz	V	16.8	19.0	0.0	35.8	82.2	-46.4
82.988 MHz	V	25.7	9.1	0.0	34.8	82.2	-47.4
992.93 MHz	V	10.6	26.4	0.0	37.0	82.2	-45.2
1.6732 GHz	V	57.6	28.5	43.2	42.9	82.2	-39.4
4.3082 GHz	V	62.7	36.7	42.5	56.9	82.2	-25.3
32.494 MHz	H	13.8	19.0	0.0	32.7	82.2	-49.5
33.186 MHz	H	13.9	18.6	0.0	32.5	82.2	-49.7
155.16 MHz	H	18.6	12.3	0.0	30.9	82.2	-51.3
989.04 MHz	H	10.0	26.3	0.0	36.2	82.2	-46.0
4.3082 GHz	H	57.8	36.5	42.5	51.7	82.2	-30.5

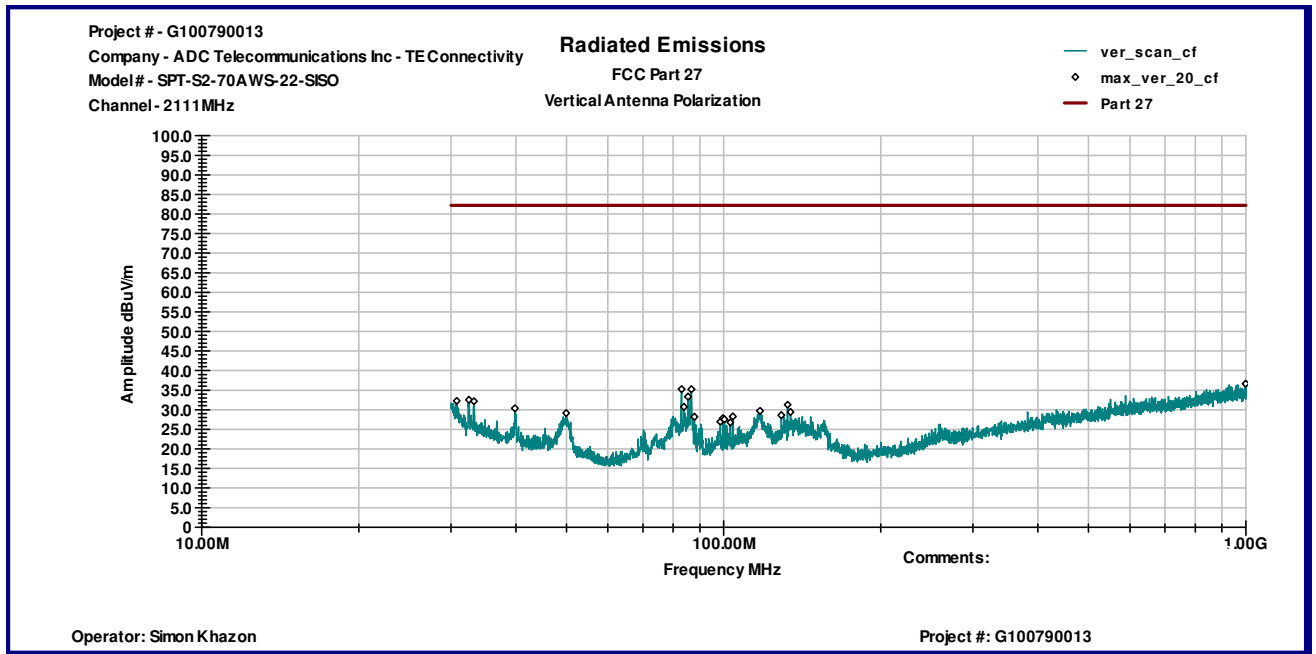


Graph 13

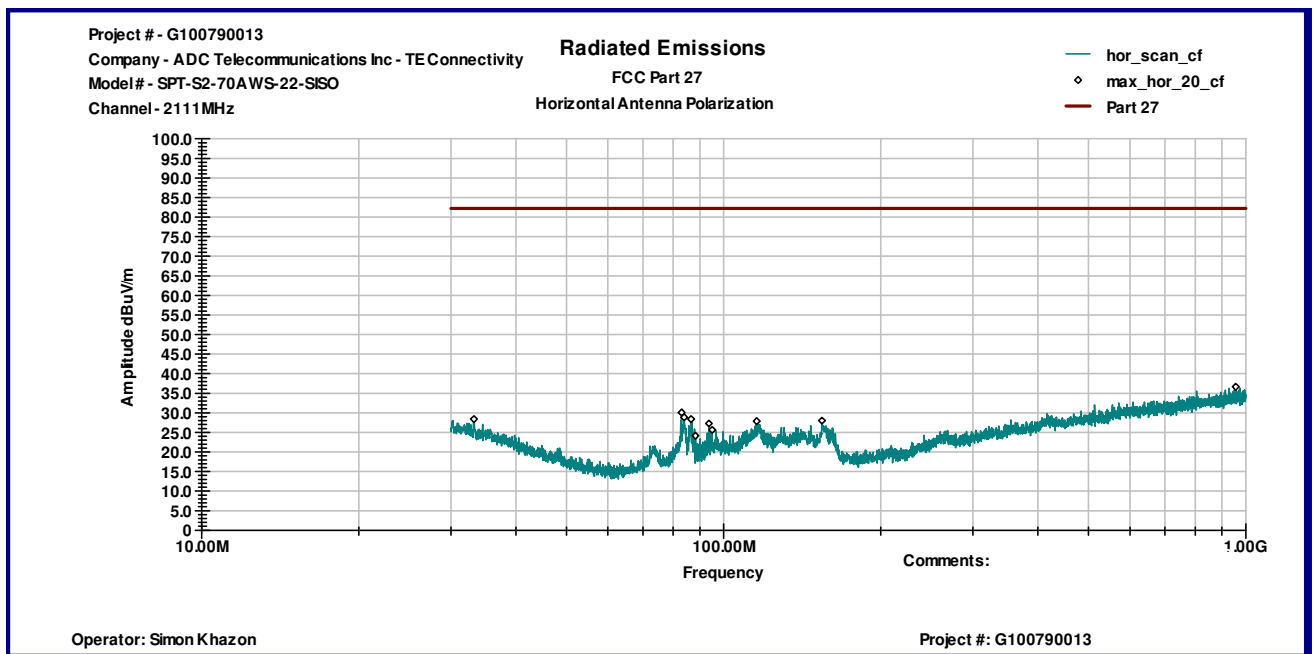


Graph 14

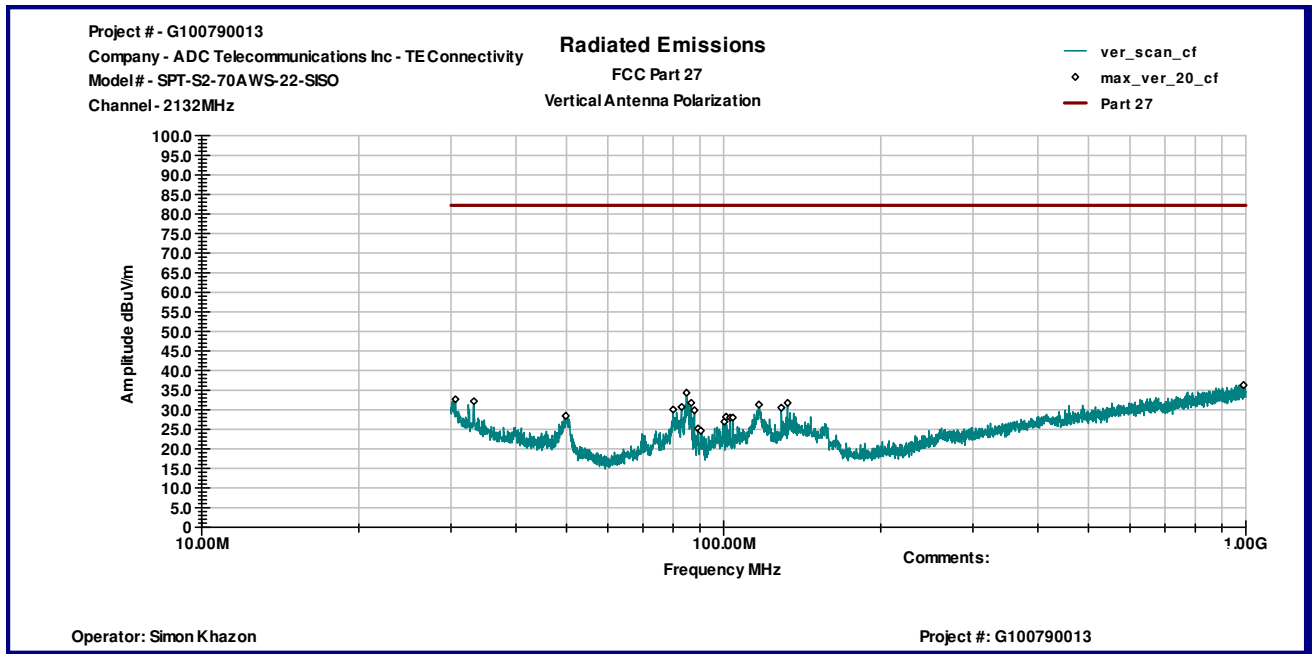


Graph 15

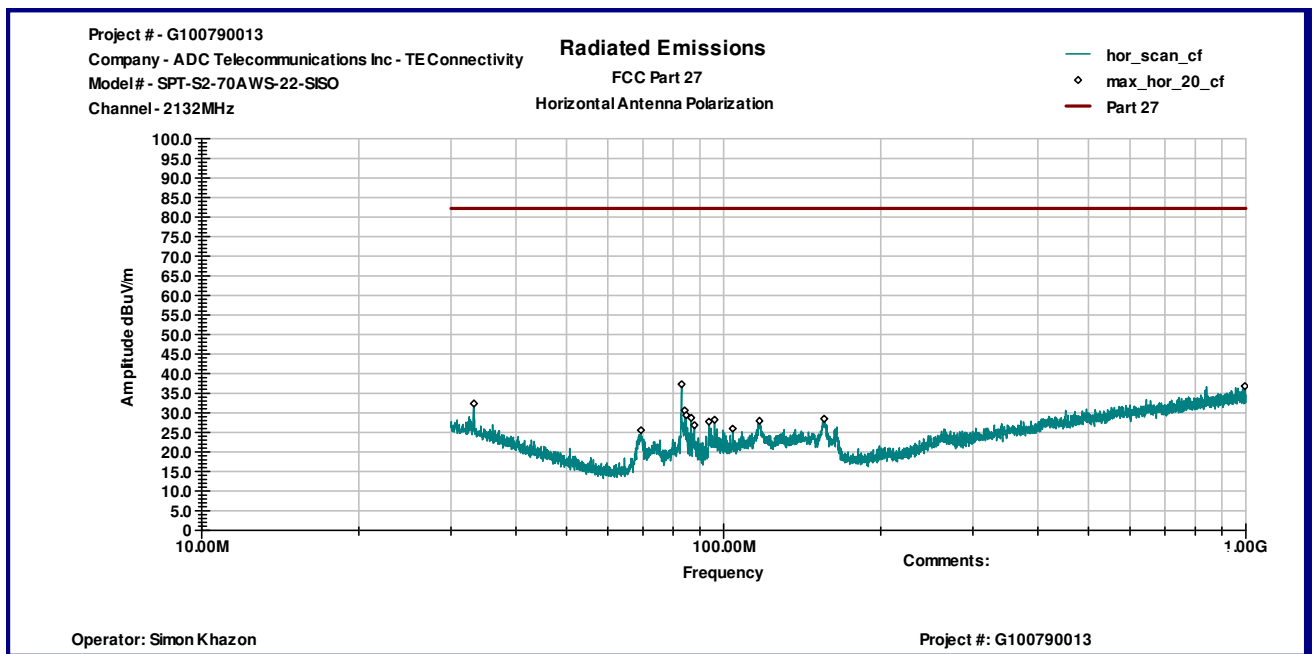


Graph 16

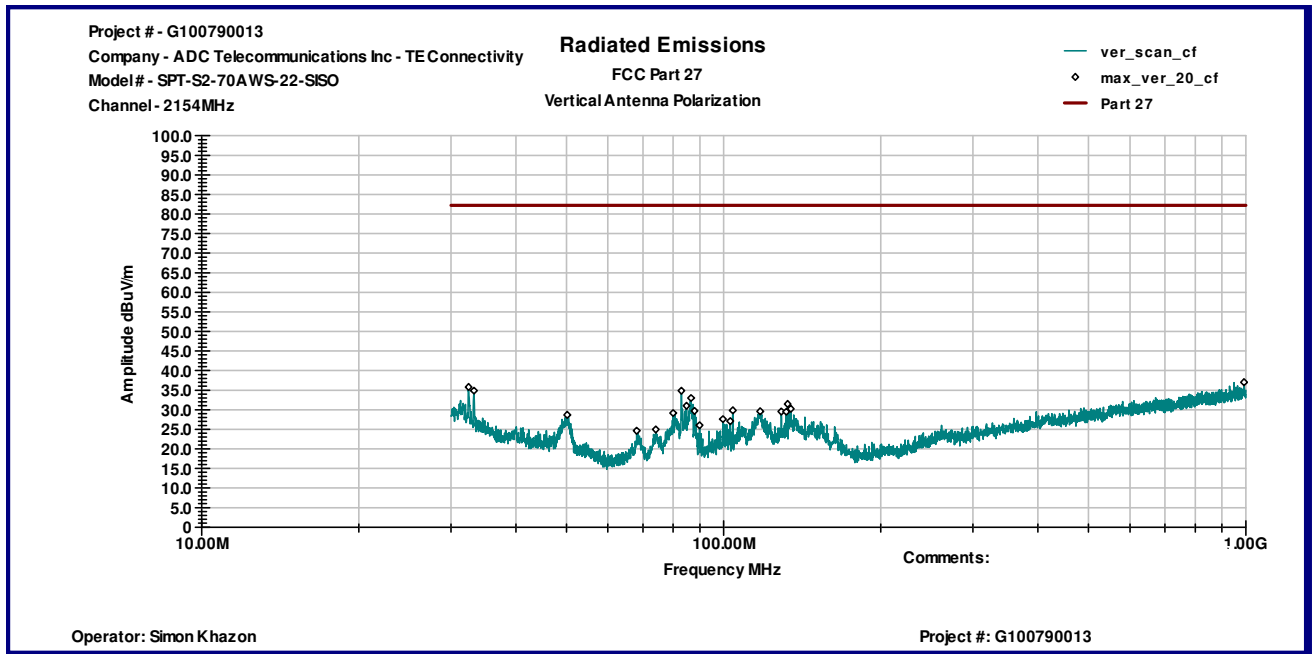


Graph 17

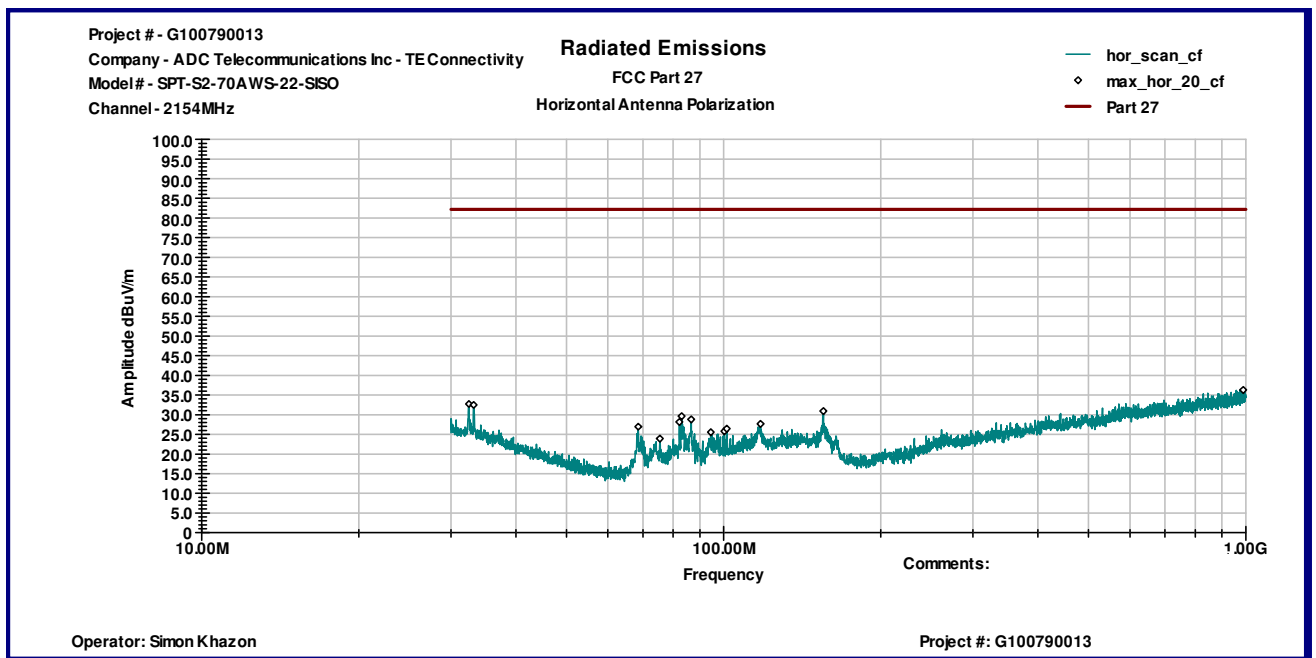


Graph 18

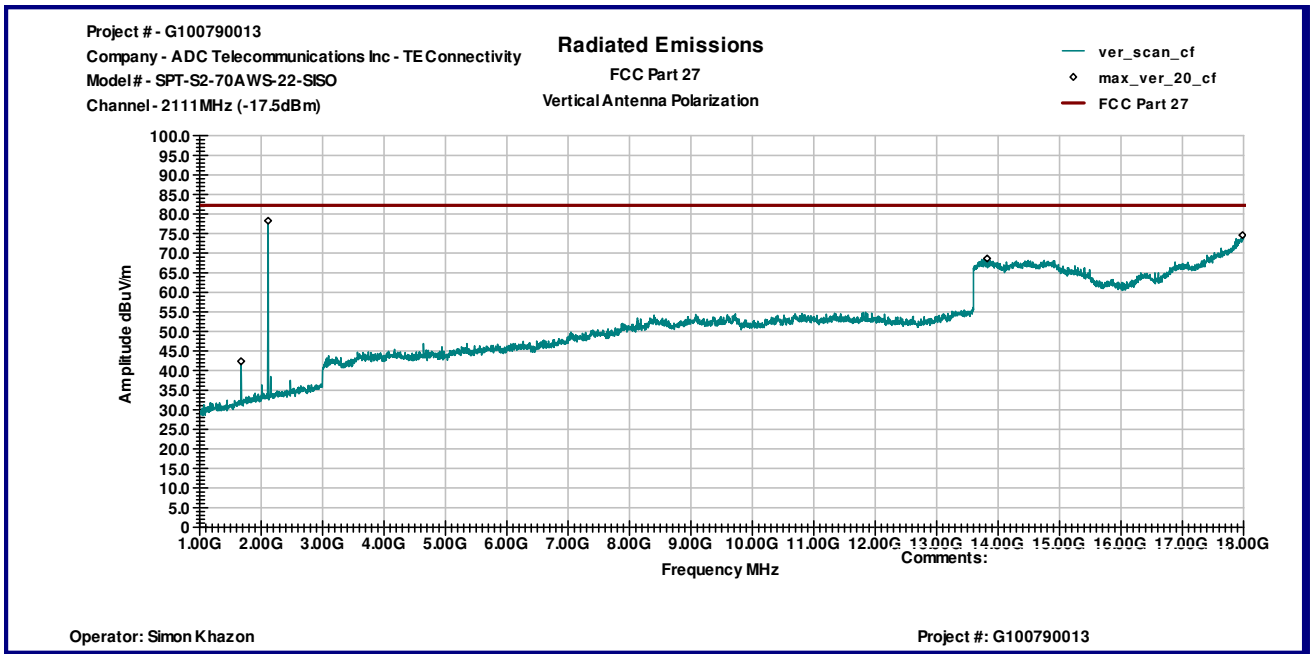


Graph 19

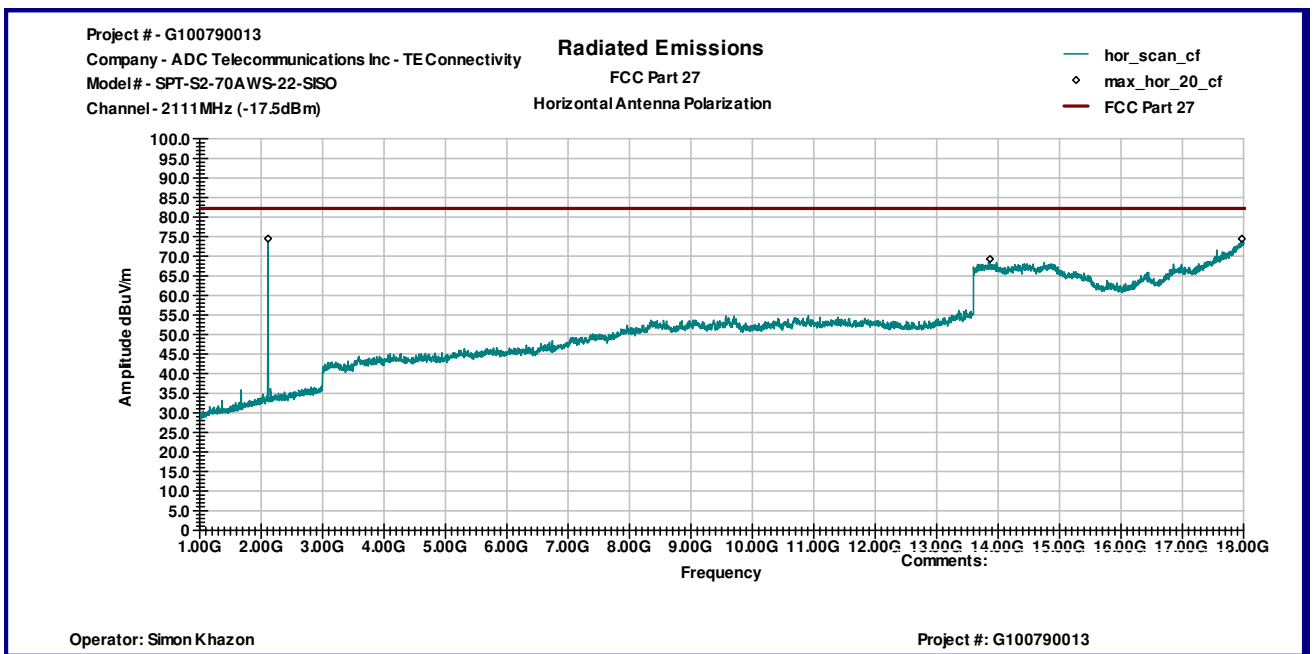

Graph 20

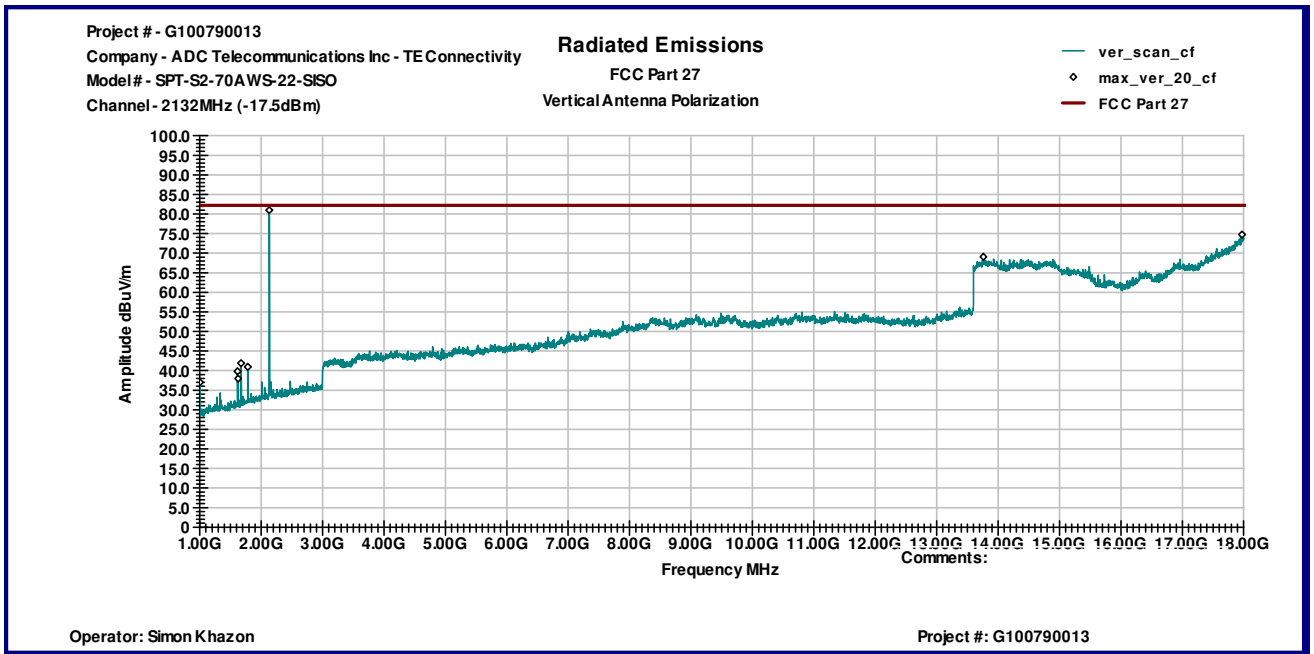

Graph 21

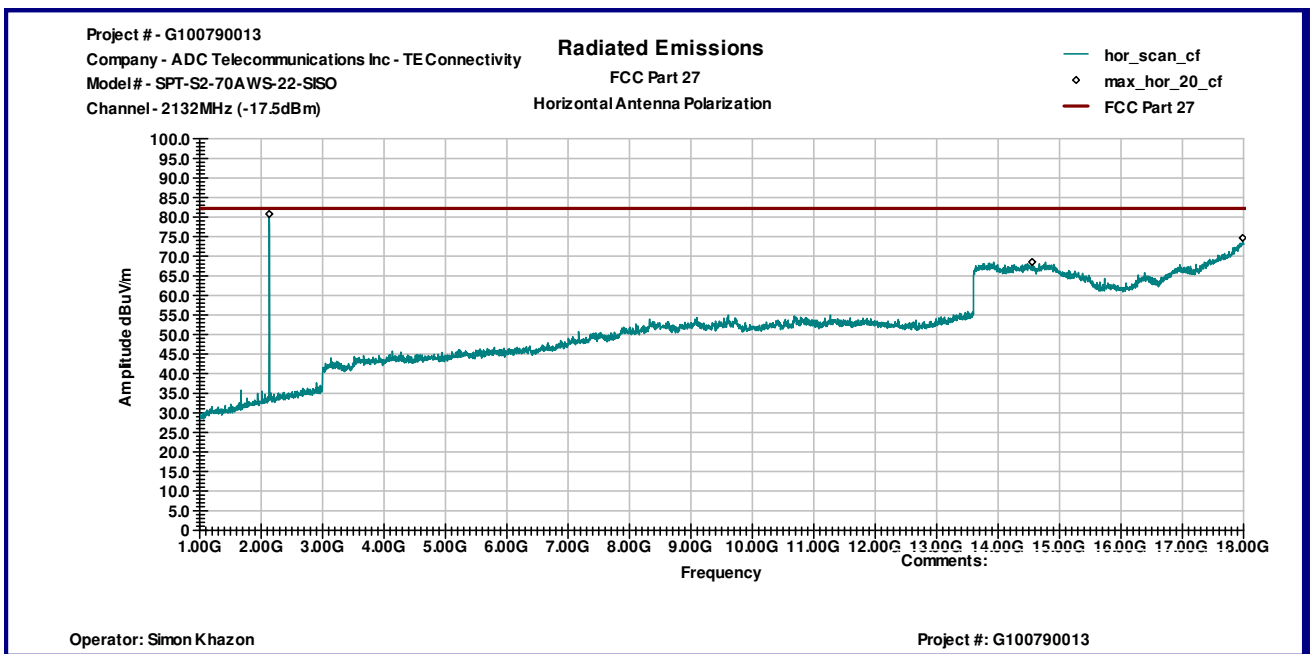

Graph 22

Project # - G100790013

Company - ADC Telecommunications Inc - TE Connectivity

Model# - SPT-S2-70AWS-22-SISO


Channel - 2154MHz (-17.5dBm)

Radiated Emissions

FCC Part 27

Vertical Antenna Polarization

ver_scan_cf
max_ver_20_cf
FCC Part 27

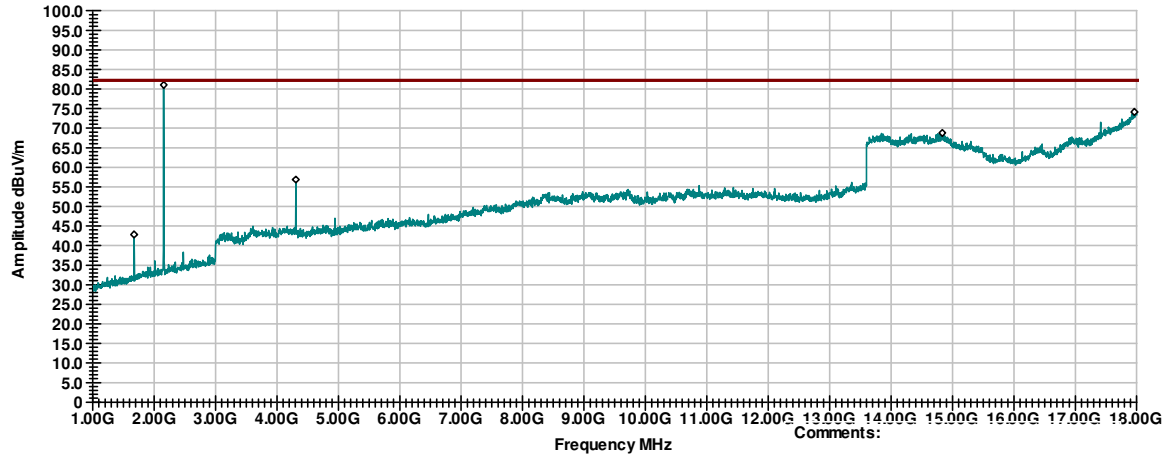

Operator: Simon Khazon

Project #: G100790013

Graph 23

Project # - G100790013

Company - ADC Telecommunications Inc - TE Connectivity

Model# - SPT-S2-70AWS-22-SISO


Channel - 2154MHz (-17.5dBm)

Radiated Emissions

FCC Part 27

Horizontal Antenna Polarization


hor_scan_cf
max_hor_20_cf
FCC Part 27

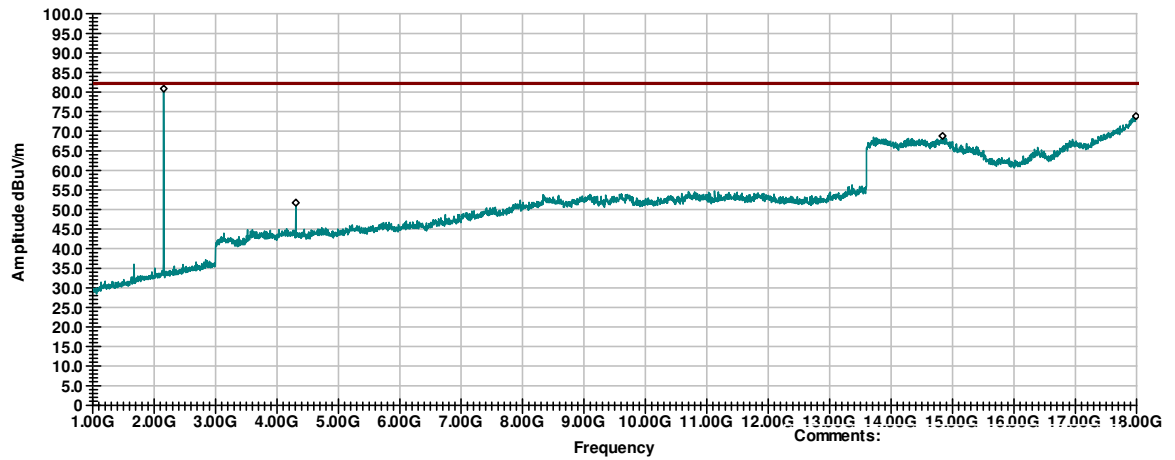


Operator: Simon Khazon

Project #: G100790013


Graph 24

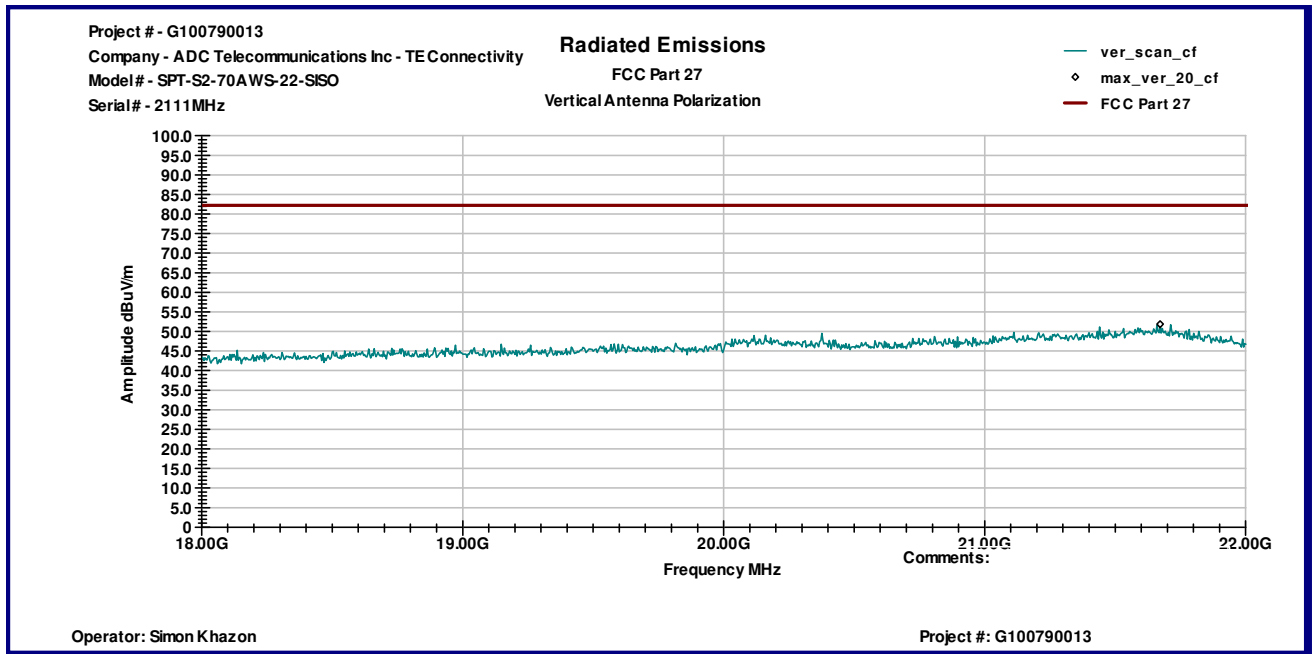


Graph 25

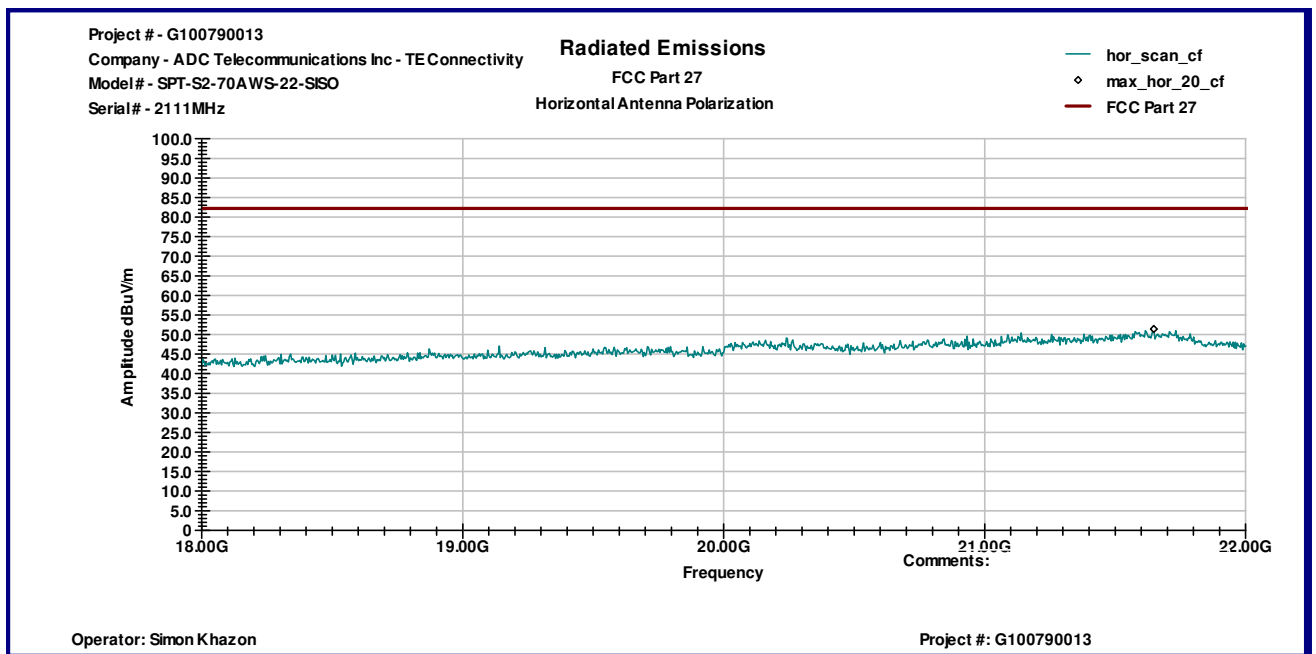


Graph 26

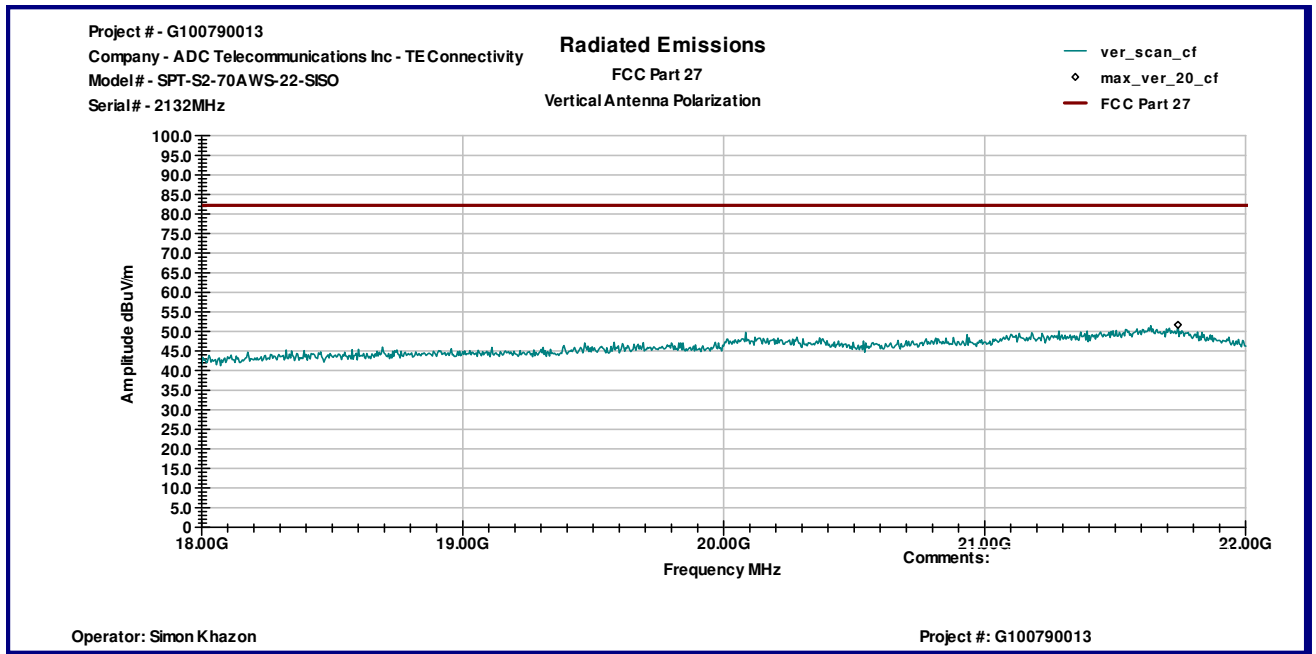


Graph 27

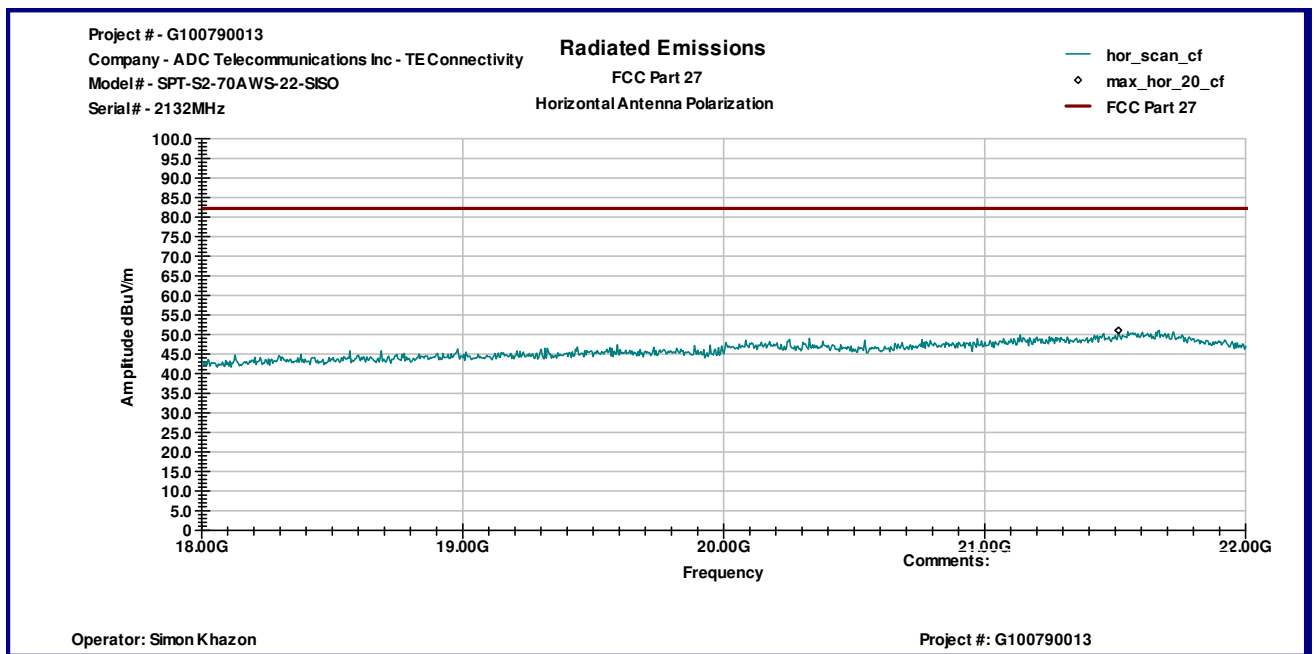

Graph 28

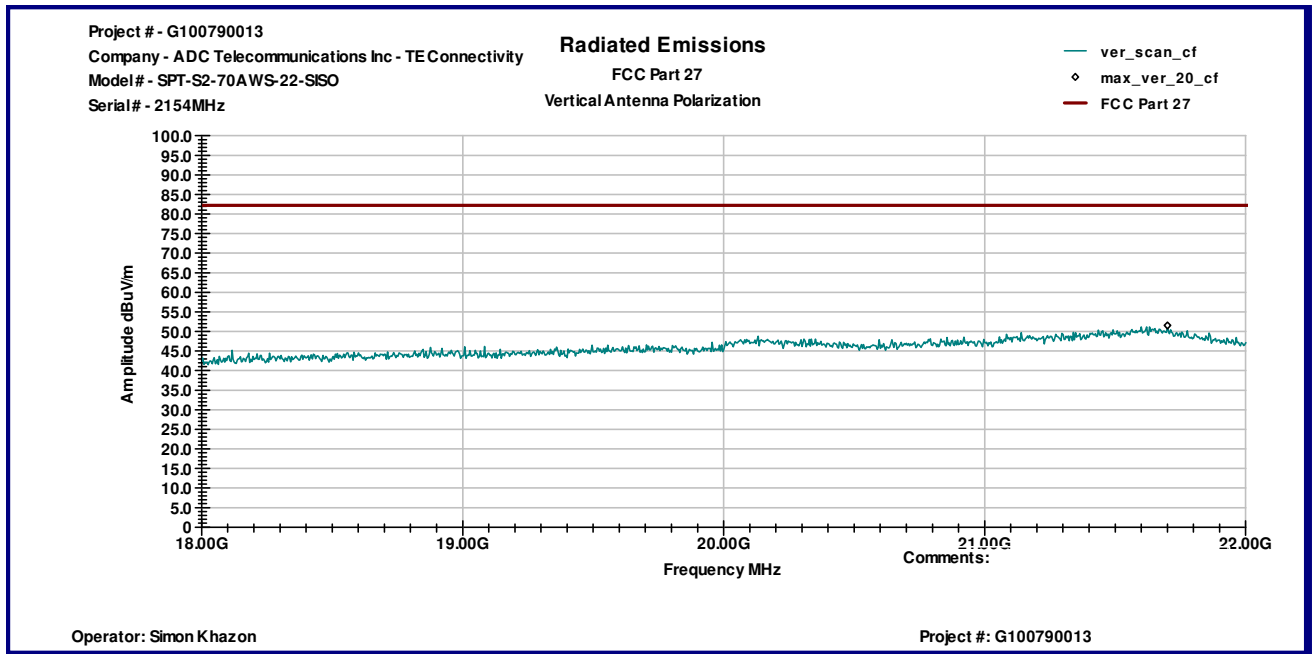

Graph 29

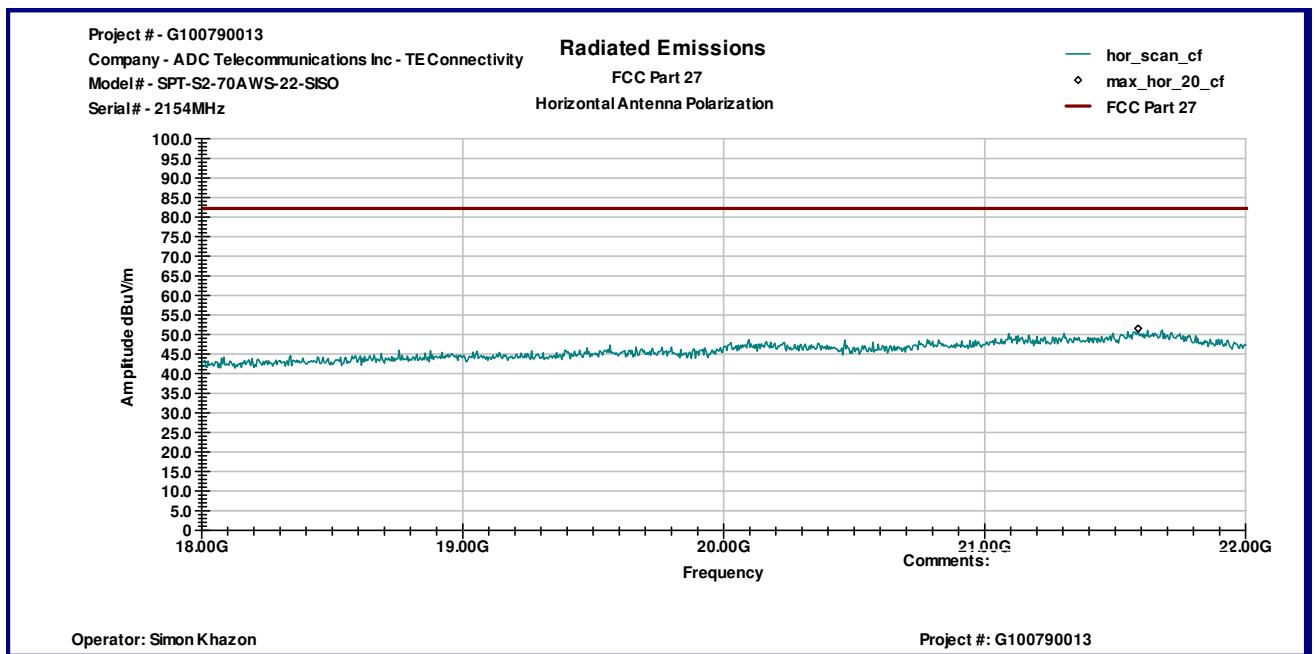

Graph 30

5.0 TEST EQUIPMENT

DESCRIPTION	MANUFACTURER	MODEL	SERIAL NO.	INTERTEK ID	CAL DUE	USED
Spectrum Analyzer	R & S	FSP 40	100024	12559	11/17/2012	☒
Spectrum Analyzer	R & S	ESU	100398	25283	12/09/2012	☒
Bicono-Log Antenna	Schaffner-Chase	CBL 6112 B	2468	9734	11/08/2012	☒
Horn Antenna	EMCO	3115	9507-4513	9936	05/16/2013	☒
Waveguide Horn Antenna	EMCO	3116	9904-2423	9705	10/31/2012	☒
Pre-Amplifier	MITEQ	AMF-5D-00501800-28-13P	1402232	172081	10/31/2012	☒
System	Quantum Change	TILE! Instrument Control	Ver. 3.4.K.29	15259	VBU	☒

