



683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080  
 Tel: +82-31-321-2664 Fax: +82-31-321-1664  
<http://www.digitalemc.com>

**CERTIFICATE OF COMPLIANCE**  
**FCC Part 22 & 24 Certification**

Dates of Tests: February 1~12, 2007  
 Test Report S/N:DR50110702E  
 Test Site : DIGITAL EMC CO., LTD.

FCC ID.

**NPQMGQ7180**

APPLICANT

**Telian Corporation**

<b>Classification</b>	<b>:</b>	<b>Licensed Portable Transmitter Held to Ear (PCE)</b>
<b>FCC Rule Part(s)</b>	<b>:</b>	<b>§22(H), §24(E), §2</b>
<b>EUT Type</b>	<b>:</b>	<b>GSM850 / PCS1900 Dual Band GPRS Terminal with Bluetooth Equipment</b>
<b>Model name</b>	<b>:</b>	<b>MGQ-7180</b>
<b>Add model name</b>	<b>:</b>	<b>i500</b>
<b>Brand name</b>	<b>:</b>	<b>Very KooL</b>
<b>Serial number</b>	<b>:</b>	<b>Identical prototype</b>
<b>TX Frequency Range</b>	<b>:</b>	<b>824.2 ~ 848.8 MHz (GSM850) / 1850.2 ~ 1909.8 MHz (PCS1900)</b>
<b>RX Frequency Range</b>	<b>:</b>	<b>869.2 ~ 893.8 MHz (GSM850) / 1930.2 ~ 1989.8 MHz (PCS1900)</b>
<b>Max. RF Output Power</b>	<b>:</b>	<b>0.745 W ERP GSM850</b>
	<b>:</b>	<b>0.763 W EIRP PCS1900</b>
<b>Max. SAR Measurement</b>	<b>:</b>	<b>0.613 mW/g GSM850 Head SAR // 0.741 mW/g GSM850 Body SAR</b>
	<b>:</b>	<b>0.724 mW/g PCS1900 Head SAR // 0.762 mW/g PCS1900 Body SAR</b>
<b>Date of Issue</b>	<b>:</b>	<b>February 16, 2007</b>

---

## TABLE OF CONTENTS

---

<b>ATTACHMENT</b>	<b>CONFIDENTIALITY LETTER</b>
<b>ATTACHMENT</b>	<b>AUTHORIZATION LETTER</b>
<b>ATTACHMENT</b>	<b>TEST REPORT</b>
<b>1 SCOPE</b>	
<b>2 INTRODUCTION</b>	
<b>3 TEST REPORT</b>	
<b>3.1 SUMMARY OF TEST</b>	
<b>3.2 POWER OUTPUT</b>	
<b>3.3 OCCUPIED BANDWIDTH</b>	
<b>3.4 OCCUPIED BANDWIDTH EMISSION LIMIT</b>	
<b>3.5 SPURIOUS EMISSION AT ANT. TERMINAL</b>	
<b>3.6 FIELD STRENGTH OF SPURIOUS RADIATION</b>	
<b>3.7 FREQUENCY STABILITY</b>	
<b>4 TEST EQUIPMENT</b>	
<b>5 EMISSION DESIGNATOR</b>	
<b>6 CONCLUSION</b>	
<b>ATTACHMENT</b> : PART LOCATION	
<b>ATTACHMENT</b> : FCC ID LABEL & LOCATION	
<b>ATTACHMENT</b> : TEST SETUP PHOTOGRAPHS	
<b>ATTACHMENT</b> : EXTERNAL PHOTOGRAPHS	
<b>ATTACHMENT</b> : INTERNAL PHOTOGRAPHS	
<b>ATTACHMENT</b> : BLOCK DIAGRAM(S)	
<b>ATTACHMENT</b> : SCHEMATIC DIAGRAM(S)	
<b>ATTACHMENT</b> : OPERATIONAL DESCRIPTION	
<b>ATTACHMENT</b> : PARTS LIST	
<b>ATTACHMENT</b> : USER'S MANUAL	
<b>ATTACHMENT</b> : SAR TEST REPORT	
<b>ATTACHMENT</b> : SAR VALIDATION PLOTS	
<b>ATTACHMENT</b> : SAR TEST PLOTS	
<b>ATTACHMENT</b> : SAR TEST SETUP PHOTOGRAPHS	
<b>ATTACHMENT</b> : PROBE CALIBRATION	
<b>ATTACHMENT</b> : DIPOLE CALIBRATION	

# MEASUREMENT REPORT

## 1. Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

## §2.1033 General Information

**Applicant: Telian Corporation**

**Address: 5<sup>th</sup> FL. Namjeun Bldg, 53-3 Haan-Dong, Kwangmyung-Si, Kyunggi-Do, Korea**

**Attention: Wayne Hwang (Senior Manager)**

- FCC ID: **NPQMGQ7180**
- Quantity: The mass product
- Tx Freq. Range: 824.2 ~ 848.8 MHz (GSM850) / 1850.2 ~ 1909.8 MHz (PCS1900)
- Rx Freq. Range: 869.2 ~ 893.8 MHz (GSM850) / 1930.2 ~ 1989.8 MHz (PCS1900)
- Max. Power Rating: 0.745W ERP GSM850  
0.763W EIRP PCS1900
- FCC Classification(s): Licensed Portable Transmitter Held to Ear (PCE)
- Equipment (EUT) Type: GSM850 / PCS1900 Dual Band Terminal Equipment
- Modulation(s): GMSK
- Frequency Tolerance: ± 0.00025 % (2.5ppm)
- FCC Rule Part(s): §22(H), §24(E), §2
- Dates of Tests: February 1~12, 2007
- Place of Tests: DIGITAL EMC
- Test Report S/N: DR50110702E

## 2. General Information

---

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Yongin-Si, Kyunggi-Do, Korea. 449-080

<http://www.digitalemc.com> E-mail : demc@unitel.co.kr

Tel: +82-31-321-2664 Fax: +82-31-321-1664

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the  
“General requirements for the competents of calibration and testing laboratory”.

This laboratory is accredited by NVLAP for NVLAP Lab. Code : 200559-0.

**Test operator: engineer**



February 16, 2007	Won-Jung LEE
Data	Name

Signature

**Report Reviewed By: manager**



February 16, 2007	Harvey Sung
Data	Name

Signature

Ordering party:

Company name	:	Telian Corporation
Address	:	5th FL, Namjeun Bldg , 53-3 , Haan-Dong,
Zipcode	:	423-060
City/town	:	Kwangmyung-Si City, Kyonggi do
Country	:	KOREA
Date of order	:	January 26, 2007

### 3. Test Report

#### 3.1 Summary of test

FCC Part Section(s)	Parameter	Status (note 1)
22.913(a) / 24.232(b), 2.1046	Power Output	C
22.917 / 24.238, 2.1049(h)(i)	Occupied Bandwidth	C
22.917(b) / 24.238(b)	Emission Bandwidth	C
22.917 / 24.238 2.1051	Emission Limits Transmitter	C
2.1053 (a)	Field Strength of Spurious Radiation	C
2.1055	Frequency Stability	C

Note 1: C= Complies    NC=Not Complies    NT=Not Tested    NA=Not Applicable

The sample was tested according to the following specification:

FCC Parts §22(H), §24(E), §2; ANSI C-63.4-2003

### 3.2 Power Output

FCC ID	: NPQMGQ7180
Specification	: 47 CFR 2.1046 (a)
Tested Frequency	: 824.2MHz, 836.6MHz and 848.8MHz for GSM850 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

#### Measurement Procedure:

- During the process of testing, the EUT was controlled via Radio Communication tester to ensure max. Power transmission and proper modulation.
- Power output was measured at the RF output terminals when the transmitter is adjusted in accordance with Communication tester (or the tune-up procedure).

#### Measurement Data:


##### GSM850

Channel	Frequency (MHz)	TEST CONDITIONS	Power Step: 5
		(dBm)	
128	824.2		<b>29.13</b>
190	836.6		<b>29.25</b>
251	848.8		<b>29.20</b>


##### PCS1900

Channel	Frequency (MHz)	TEST CONDITIONS	Power Step: 0
		(dBm)	
512	1850.2		<b>28.93</b>
661	1880.0		<b>28.91</b>
810	1909.8		<b>28.88</b>


## POWER OUT. GSM850 Ch.128

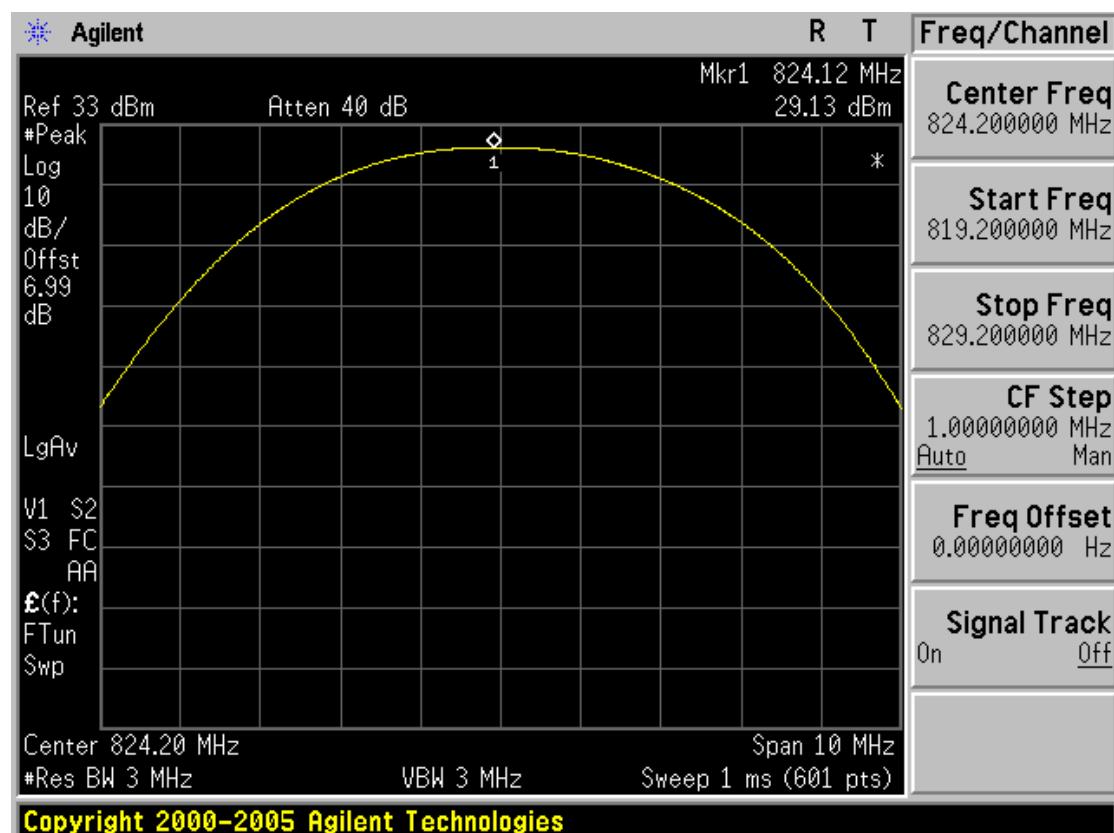


## POWER OUT. GSM850 Ch.190

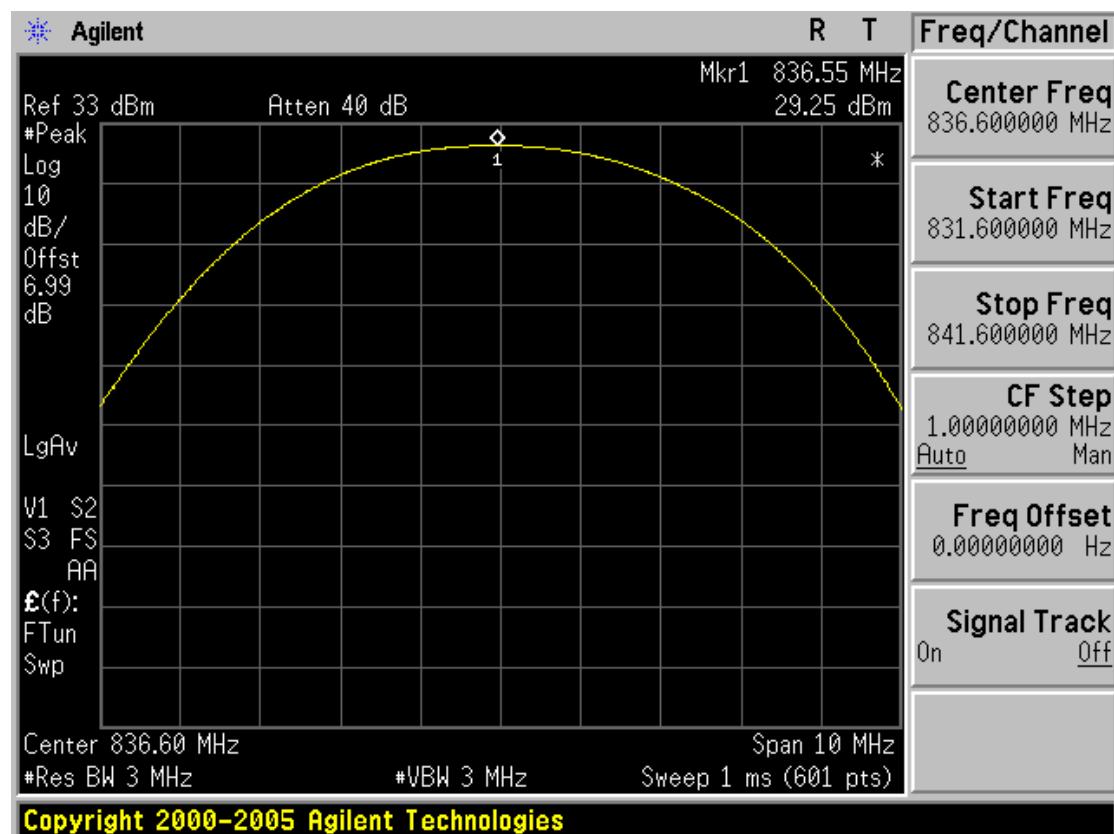


POWER OUT. GSM850 Ch.251

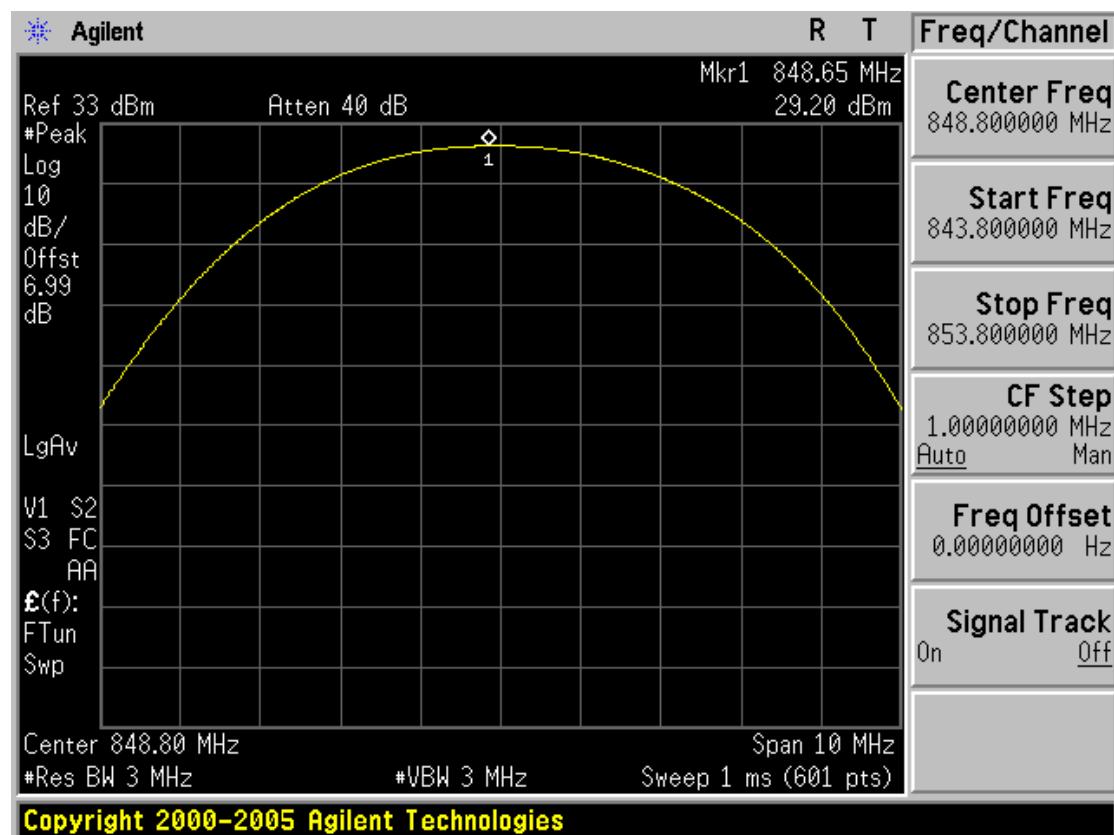


## POWER OUT. PCS1900 Ch.512

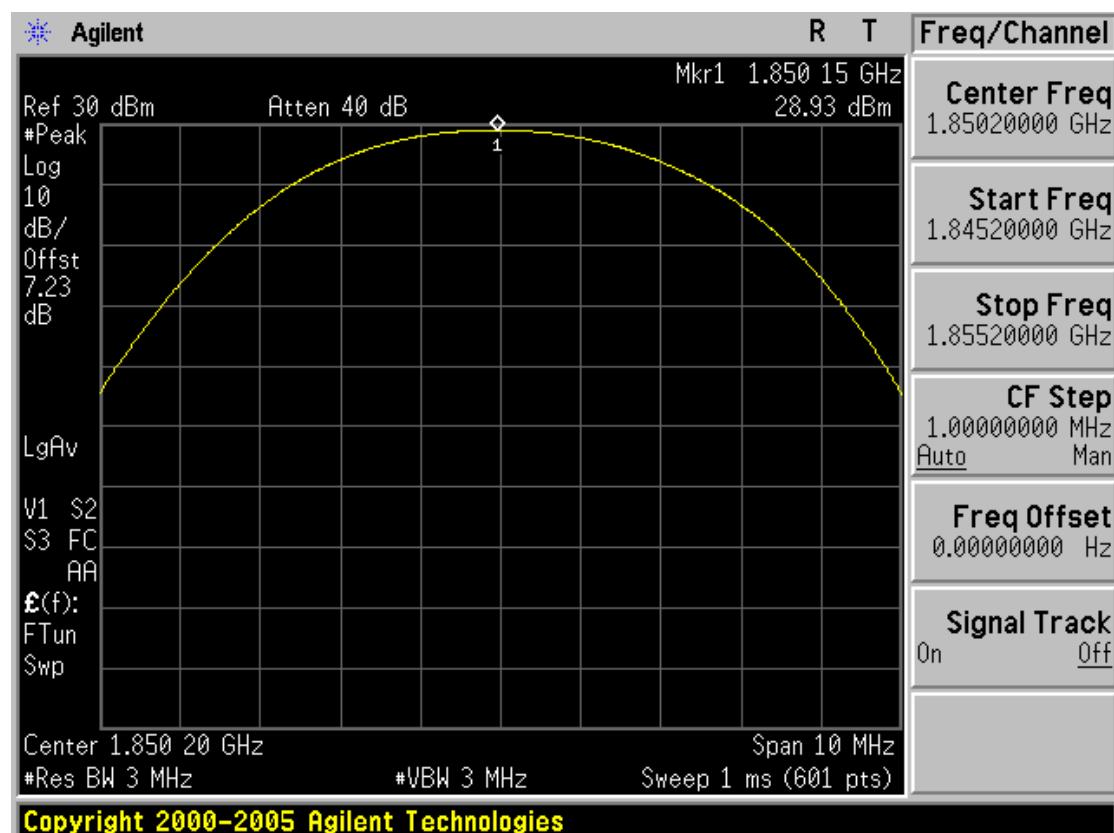

## POWER OUT. PCS1900 Ch.661

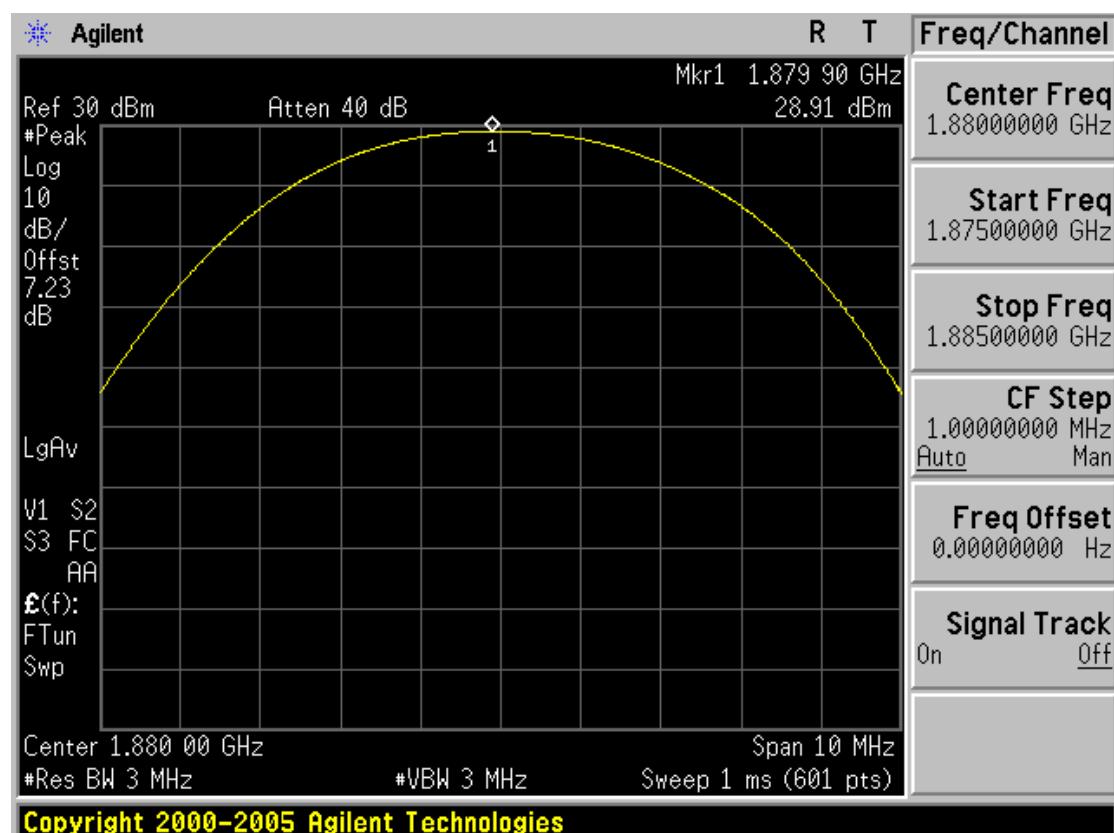

## POWER OUT. PCS1900 Ch.810

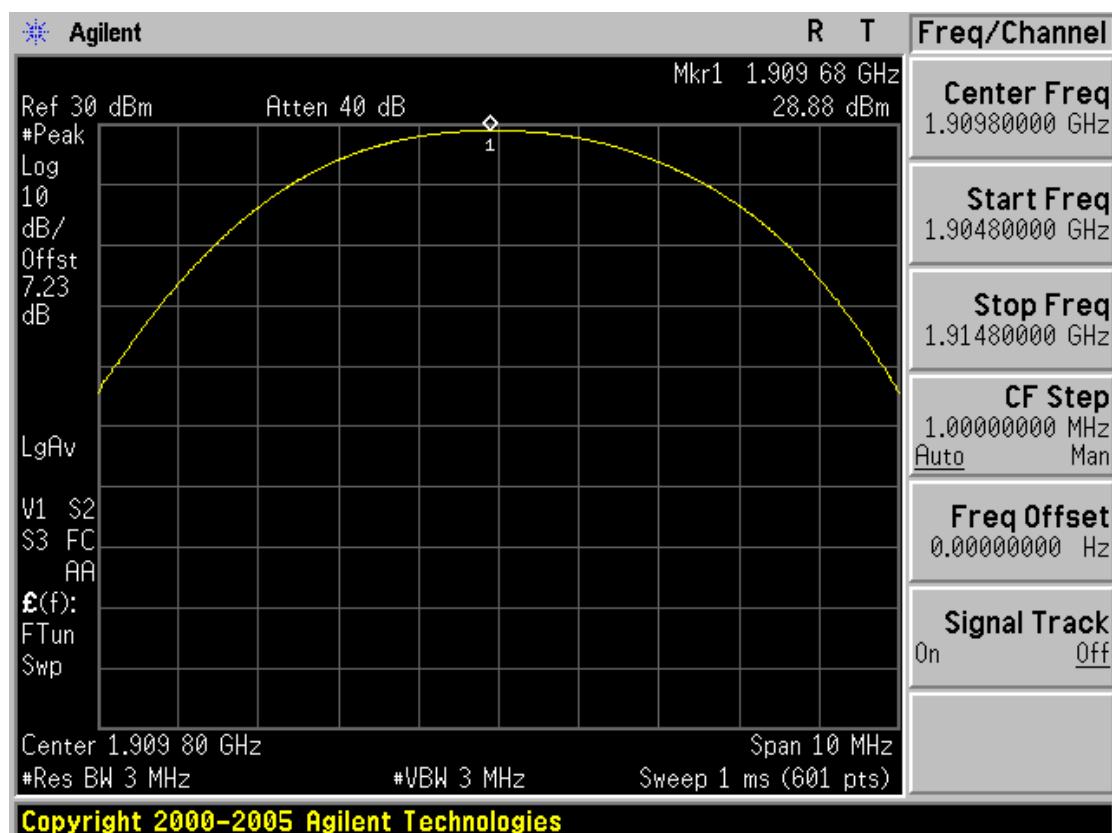

**ERP (GSM850)**

FCC ID	:	<b>NPQMGQ7180</b>
Specification	:	47 CFR 22.913(a)
Tested Frequency	:	824.2MHz, 836.6MHz and 848.8MHz for GSM850
RBW=VBW	:	3MHz

**Measurement Procedure:**

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C 2004

The EUT was placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

**Measurement Data:**

Channel	Frequency (MHz)	TEST CONDITIONS			Power Step: 5	
		Ref. level (dBm)	Pol. (H/V)	ERP (dBm)	ERP (W)	Power Supply
128	824.2	-9.96	H	27.39	0.548	Battery
190	836.6	-9.75	H	27.35	0.543	Battery
<b>251</b>	<b>848.8</b>	<b>-9.13</b>	<b>H</b>	<b>28.72</b>	<b>0.745</b>	<b>Battery</b>

**EIRP (PCS1900)**

FCC ID : **NPQMGQ7180**  
 Specification : 47 CFR 24.232(b)  
 Tested Frequency : 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900  
 RBW=VBW : 3MHz

**Measurement Procedure:**Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C 2004

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

**Measurement Data:**

Channel	Frequency (MHz)	TEST CONDITIONS				Power Step: 0	
		Ref. level (dBm)	Pol. (H/V)	ANT GAIN	EIRP (dBm)	EIRP (W)	Battery
512	1850.2	-9.47	H	8.42	28.23	0.665	Battery
<b>661</b>	<b>1880.0</b>	<b>-9.88</b>	<b>H</b>	<b>8.50</b>	<b>28.83</b>	<b>0.763</b>	<b>Battery</b>
810	1909.8	-11.59	H	8.57	26.31	0.428	Battery

### 3.3 Occupied Bandwidth

FCC ID	:	<b>NPQMGQ7180</b>
Specification	:	47 CFR 2.1049 (h)(i)
Tested Frequency	:	824.2MHz, 836.6MHz and 848.8MHz for GSM850 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

#### Measurement Procedure:

- The 99% power bandwidth was measured with a calibrated spectrum analyzer.
- Spectrum analyzer plots are included on the following pages.

#### Measurement Data:

##### GSM850


Channel	Frequency (MHz)	99% Bandwidth	
		(kHz)	
128	824.2		<b>249.15</b>
190	836.6		<b>248.19</b>
251	848.8		<b>243.64</b>

##### PCS1900

Channel	Frequency (MHz)	99% Bandwidth	
		(kHz)	
512	1850.2		<b>246.30</b>
661	1880.0		<b>250.94</b>
810	1909.8		<b>251.82</b>


## GSM850

## 99 % Bandwidth Ch. 128

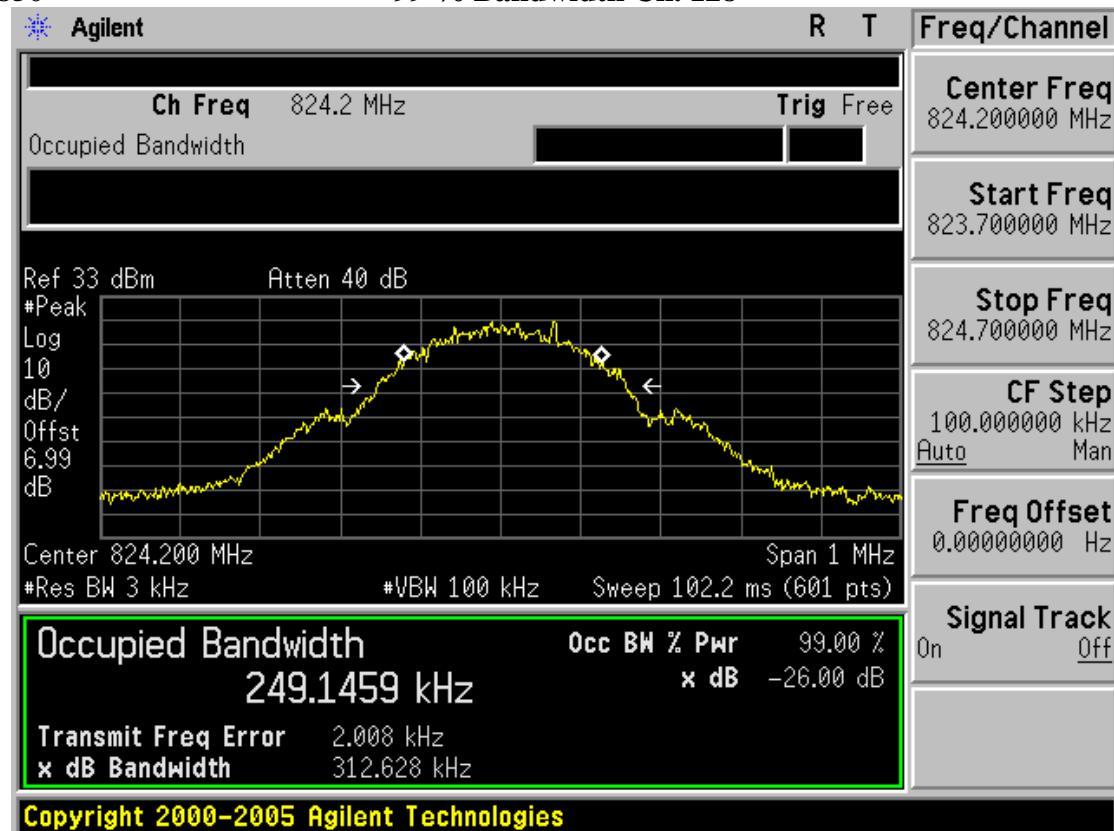


## GSM850

## 99 % Bandwidth Ch. 190

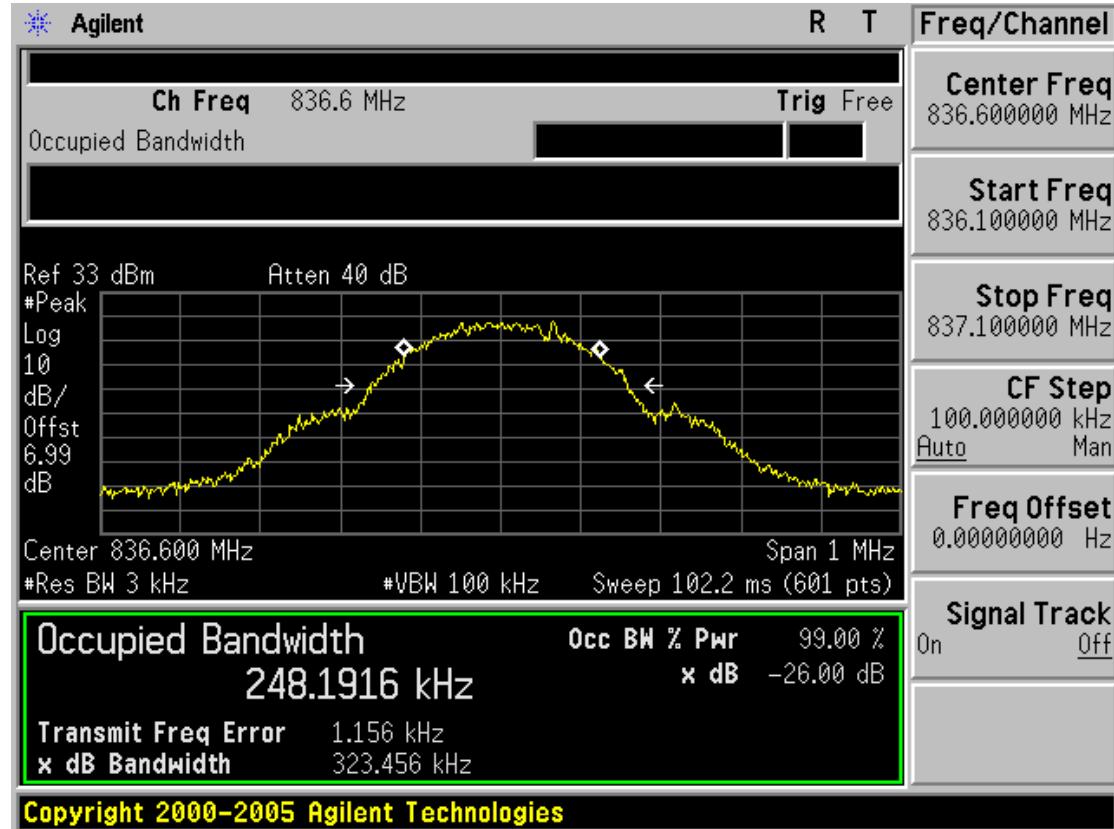


GSM850

99 % Bandwidth Ch. 251

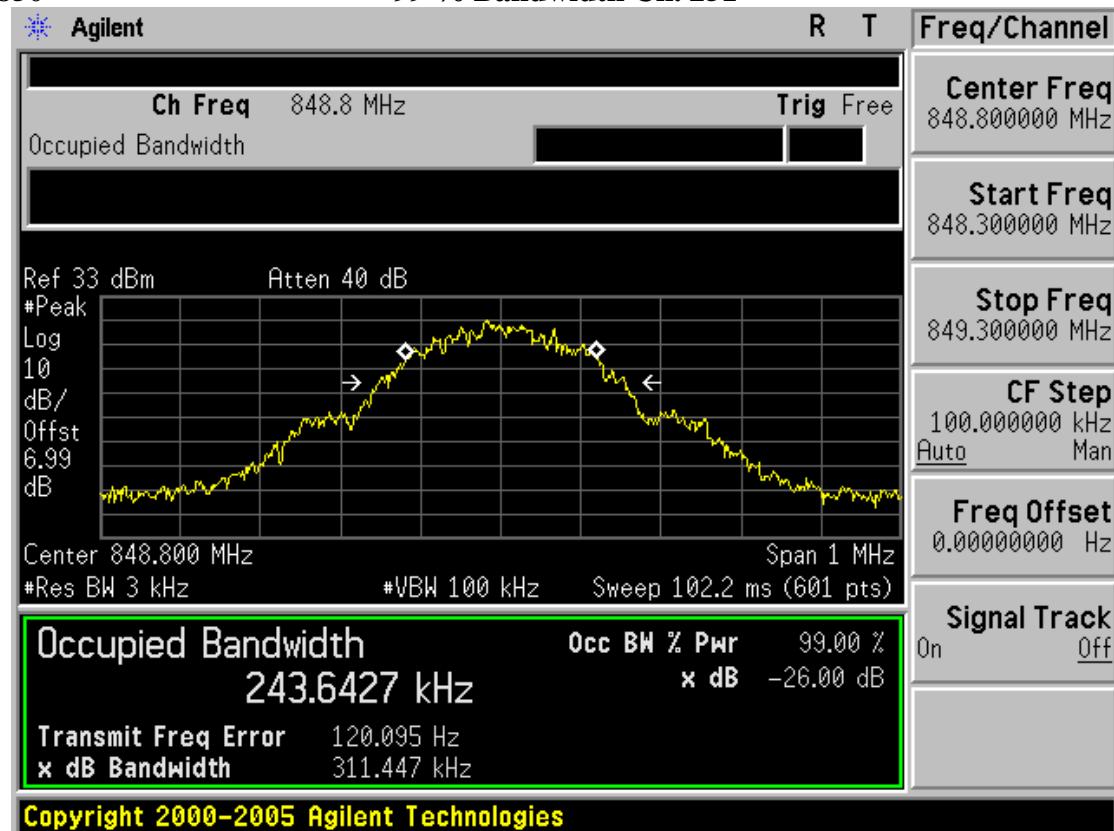


PCS1900

99 % Bandwidth Ch. 512

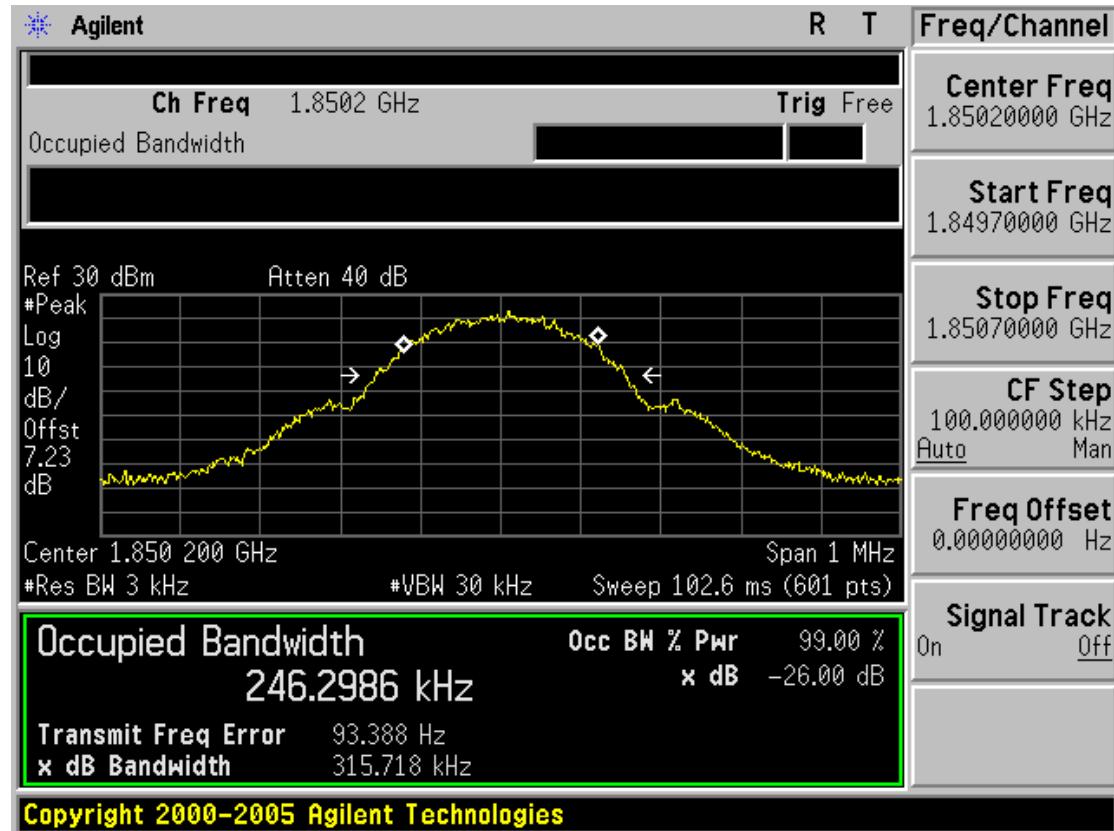

## PCS1900

## 99 % Bandwidth Ch. 661

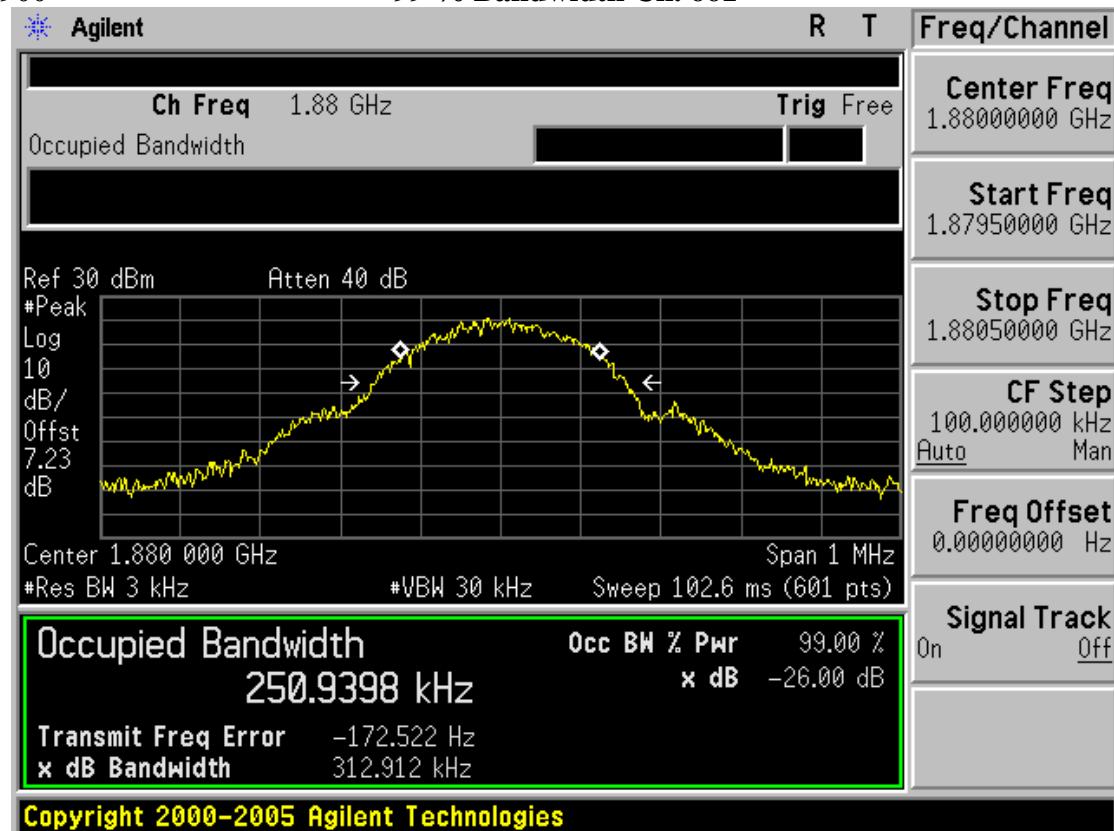

## PCS1900

## 99 % Bandwidth Ch. 810



### 3.4 Occupied Bandwidth Emission Limit

FCC ID : **NPQMGQ7180**  
Specification : 47 CFR 24.238(b)  
Tested Frequency : 824.2MHz, 836.6MHz and 848.8MHz for GSM850  
1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

### **Measurement Procedure:**

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43+10\log(P)$  dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of  $1\text{MHz}$  or greater. However, in the  $1\text{MHz}$  bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.
- Spectrum analyzer plots are included on the following pages.

## Measurement Data:

## GSM850


Channel	Frequency (MHz)	-26dBc Bandwidth	
		(kHz)	
128	824.2		<b>315</b>
190	836.6		<b>315</b>
251	848.8		<b>321</b>

**PCS1900**

Channel	Frequency (MHz)	-26dBc Bandwidth	
		(kHz)	
512	1850.2		<b>317</b>
661	1880.0		<b>317</b>
810	1909.8		<b>321</b>


## GSM850

## -26dBc Bandwidth Ch. 128

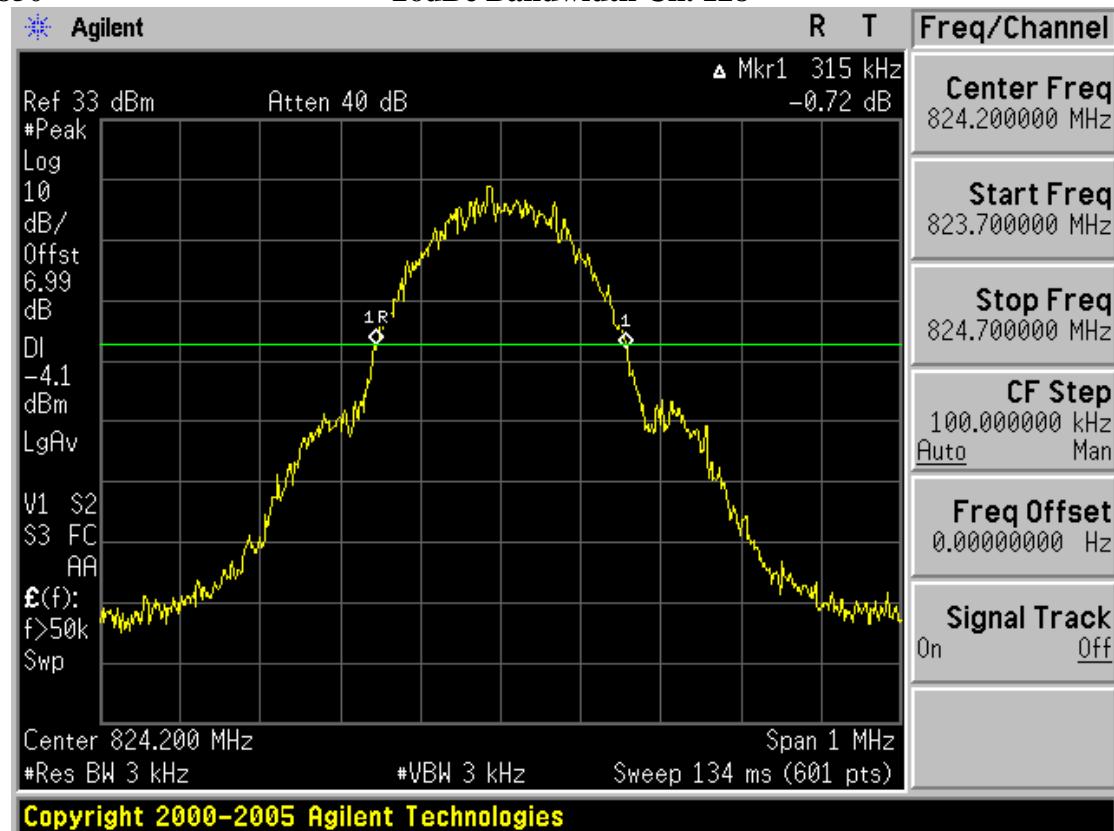


## GSM850

## -26dBc Bandwidth Ch. 190

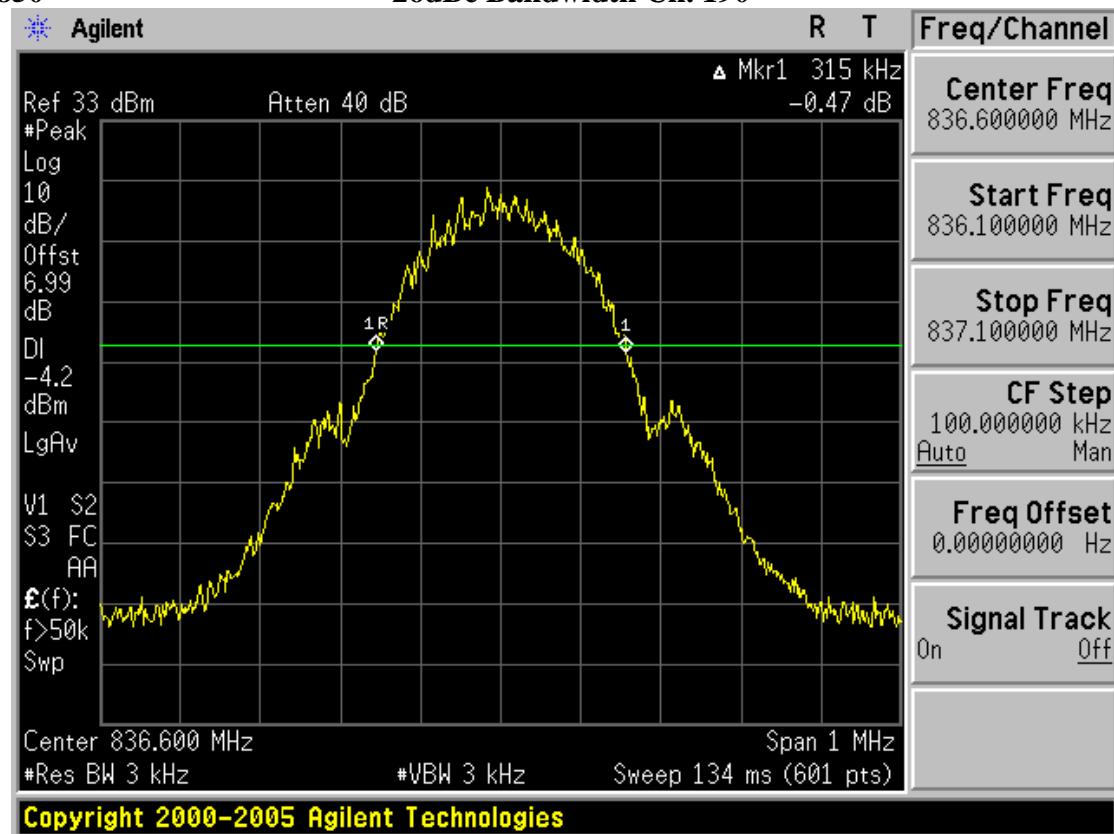


## GSM850

## -26dBc Bandwidth Ch. 251

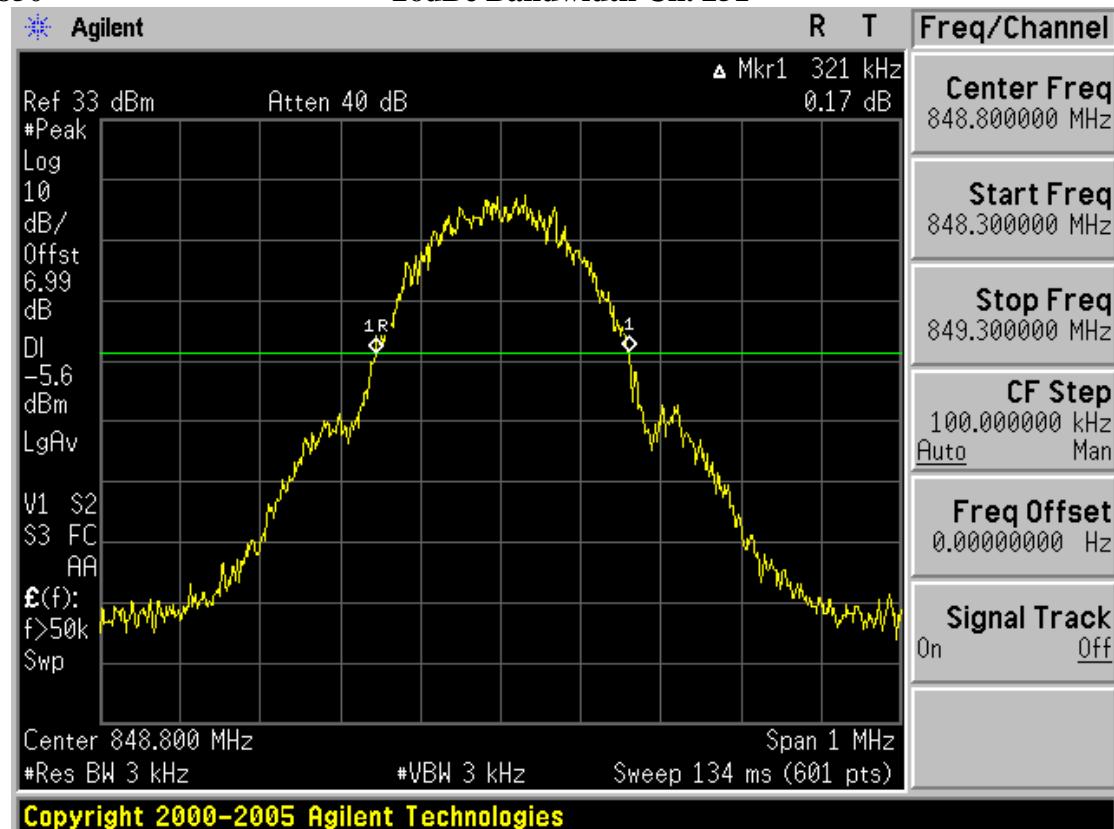


## PCS1900

## -26dBc Bandwidth Ch. 512

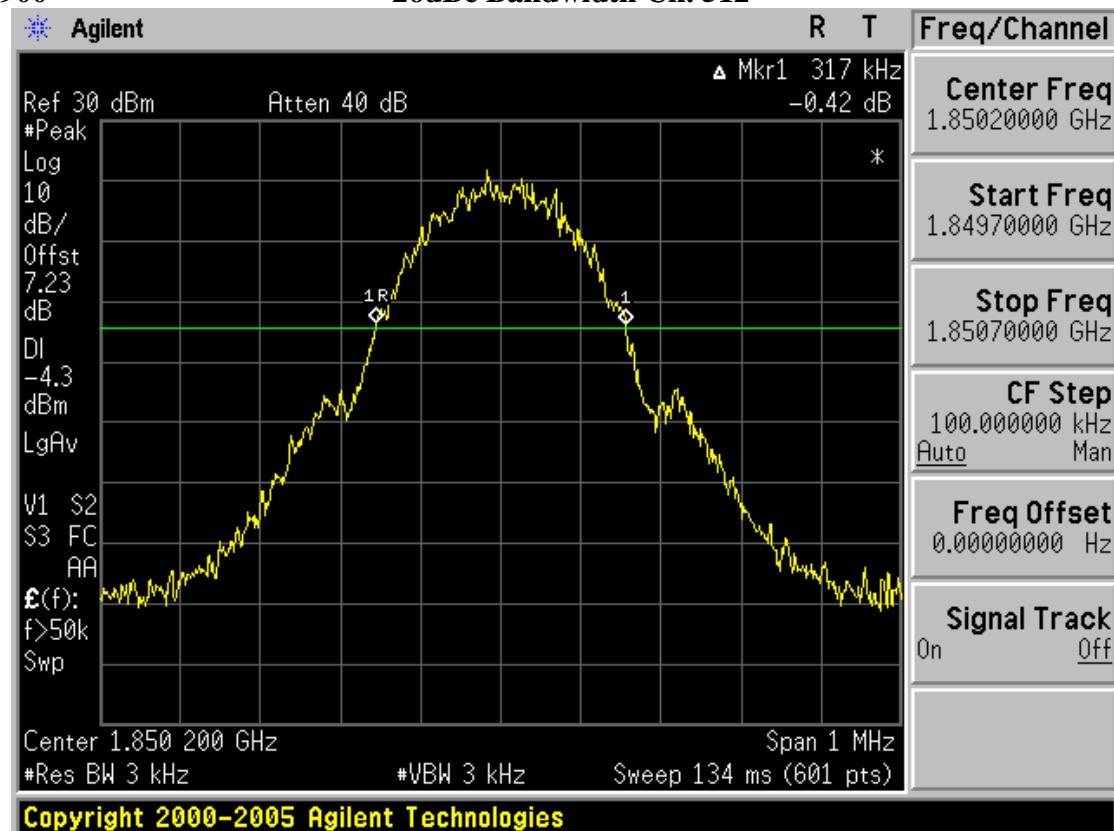


## PCS1900

## -26dBc Bandwidth Ch. 661

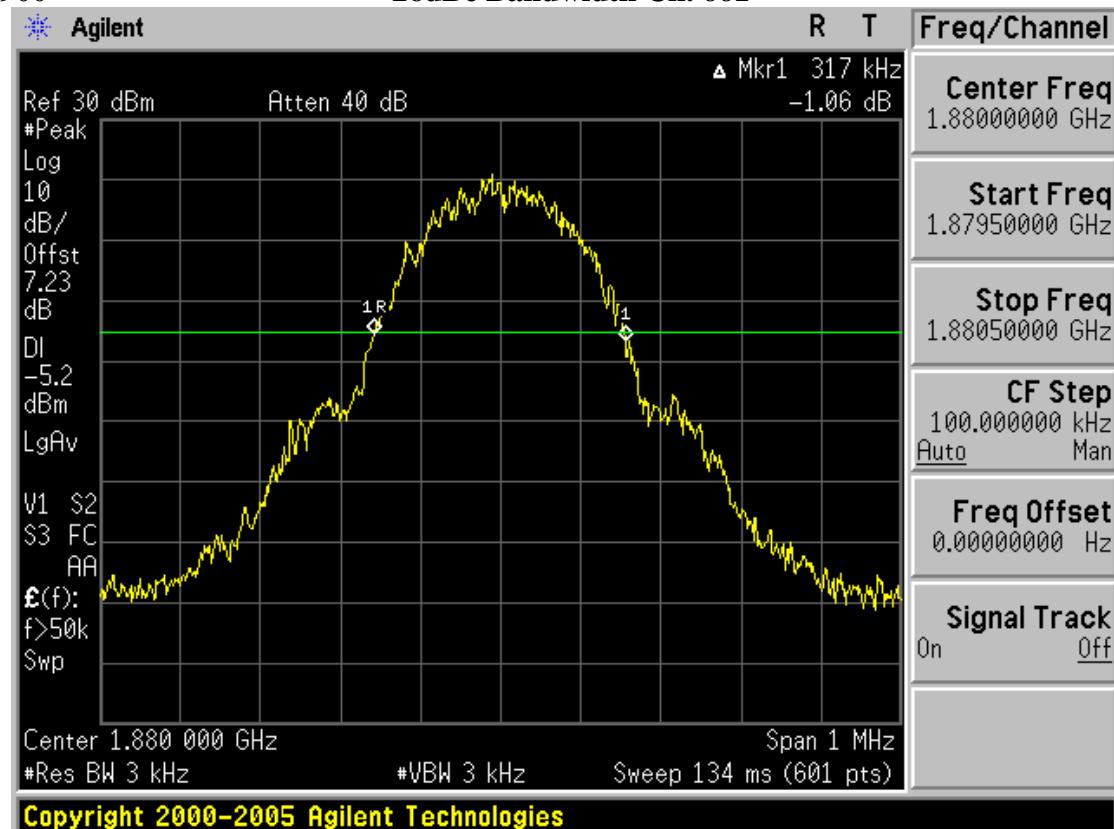


## PCS1900

## -26dBc Bandwidth Ch. 810

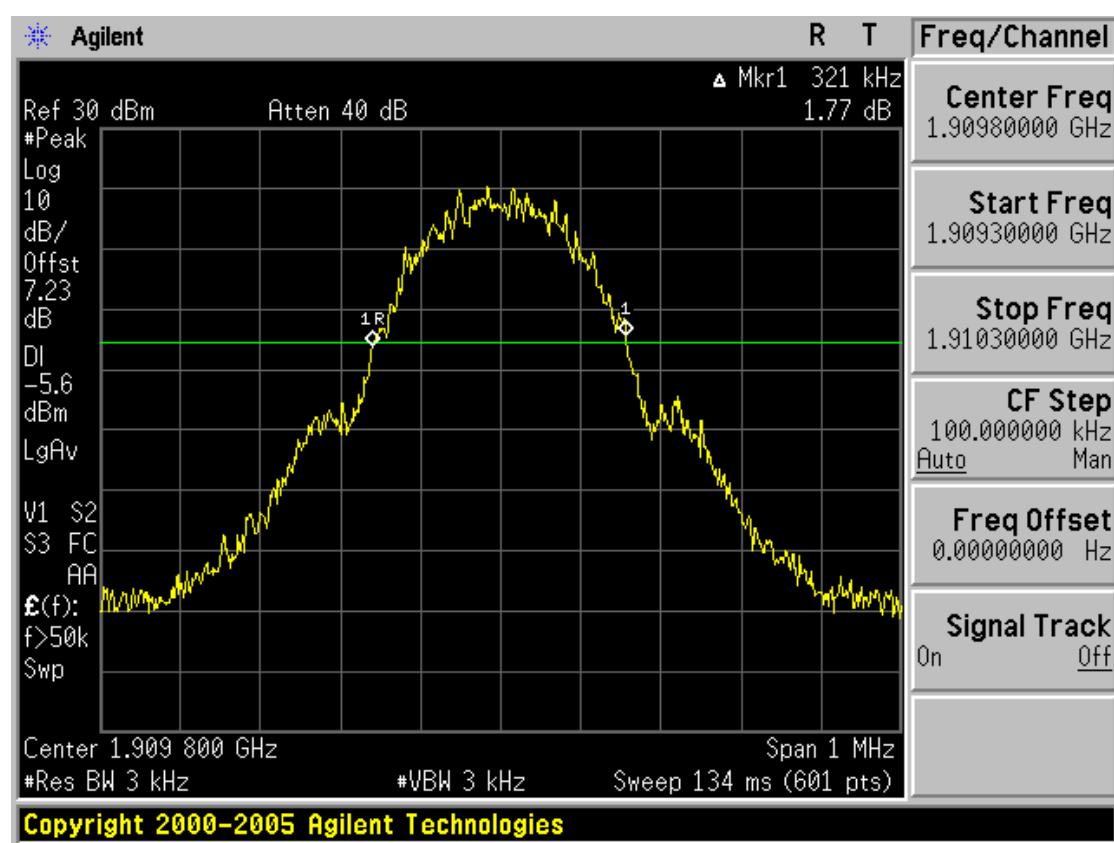


## GSM850

## Band Edge Ch. 128

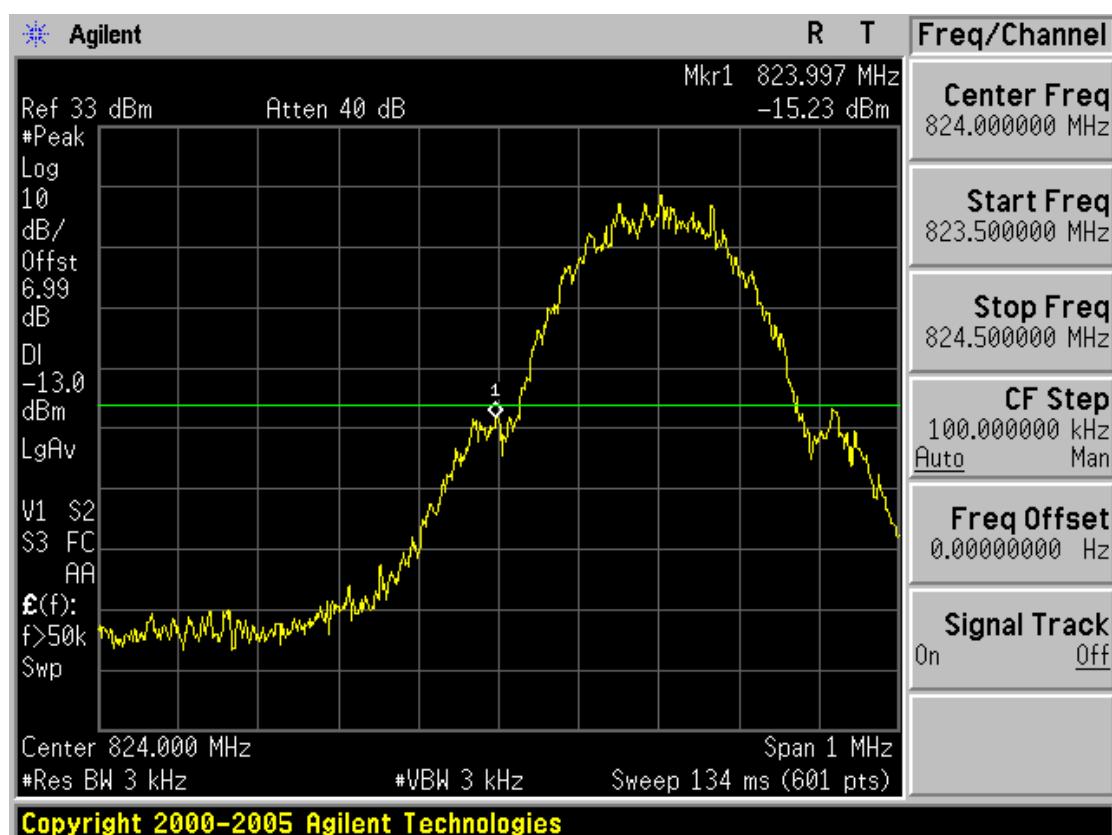


## GSM850

## Band Edge Ch. 251

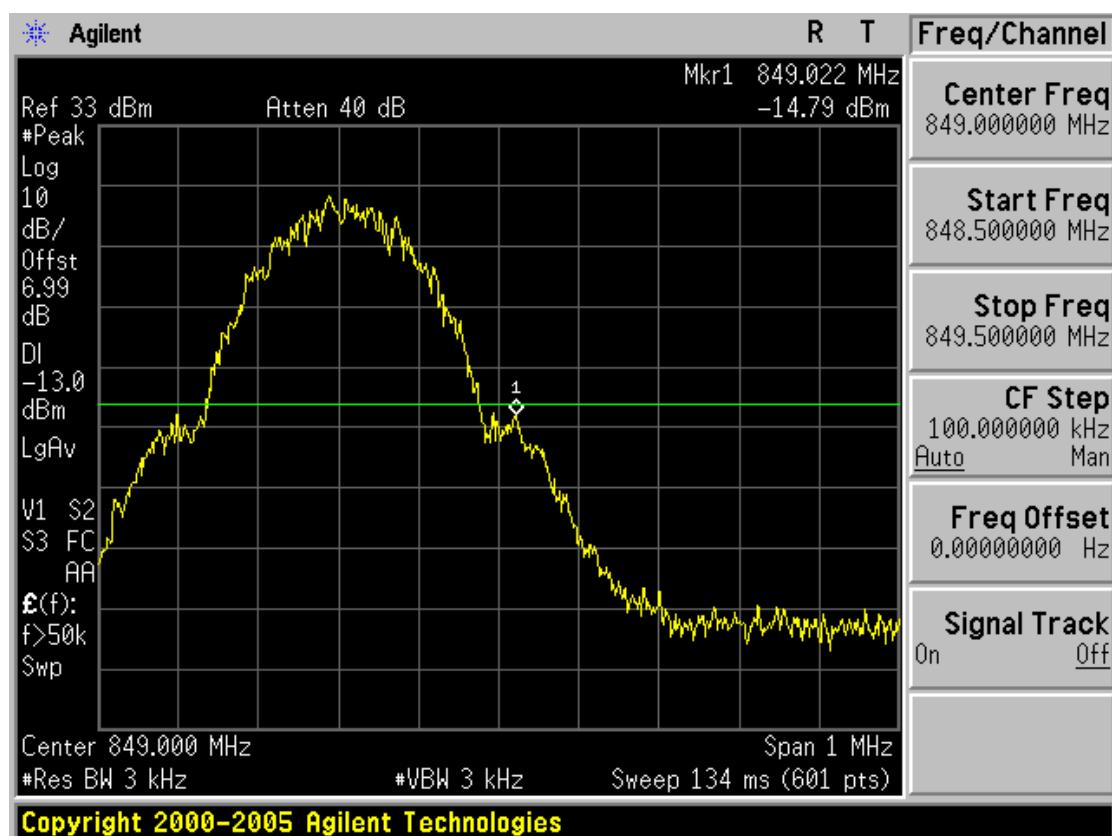


PCS1900

Band Edge Ch. 512

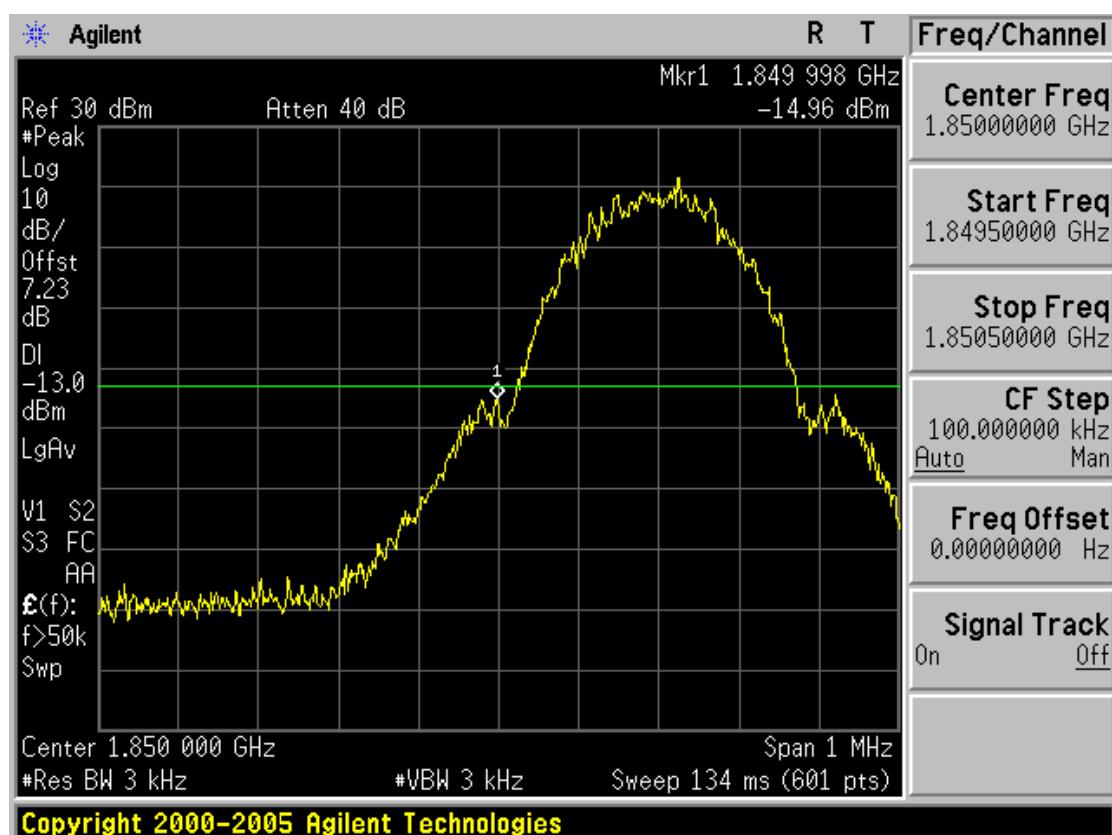

PCS1900

Band Edge Ch. 810

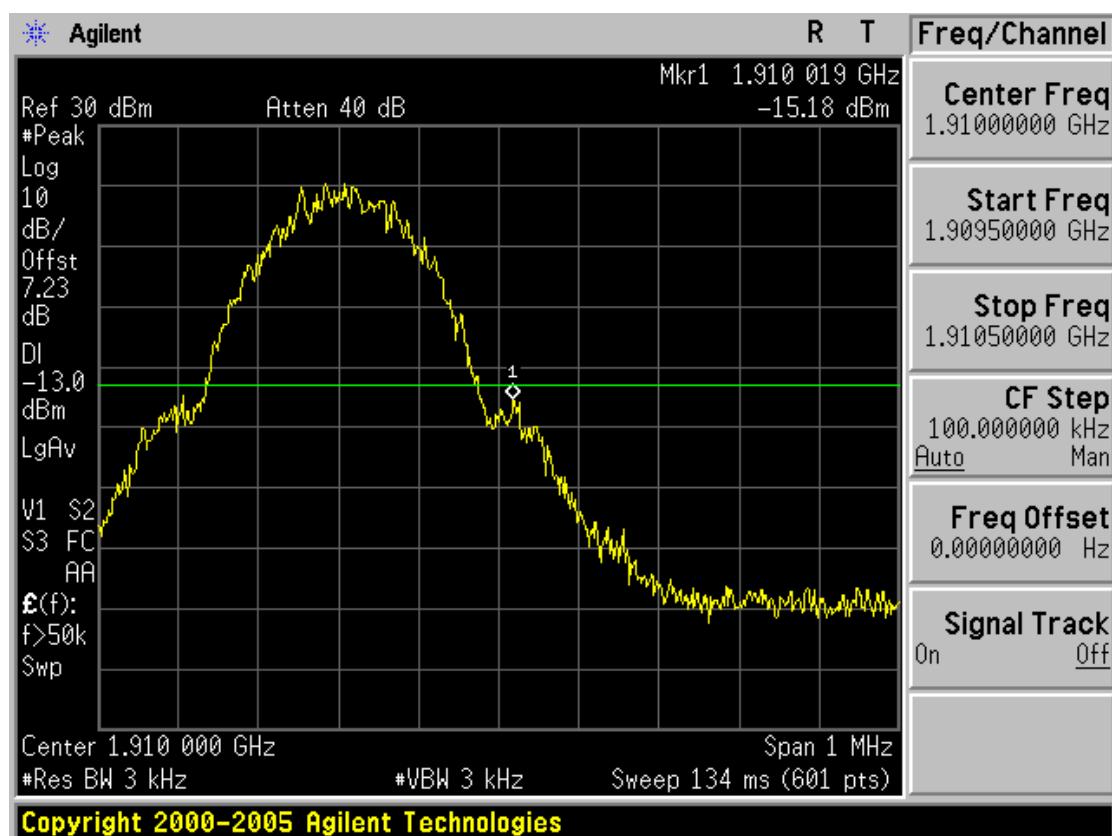

### **3.5 Spurious and Harmonic Emissions at Antenna Terminal**


FCC ID	:	<b>NPQMGQ7180</b>
Specification	:	47 CFR 2.1051, 24.238(a)
Tested Frequency	:	824.2MHz, 836.6MHz and 848.8MHz for GSM850 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

#### **Measurement Procedure:**

- The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.
- The spectrum is scanned from the lowest frequency generated in the equipment up to 10'th harmonics of the highest frequency.
- Spectrum analyzer plots are included on the following pages.


GSM850

## Spurious Emissions at Antenna Terminal / Ch.128 -1

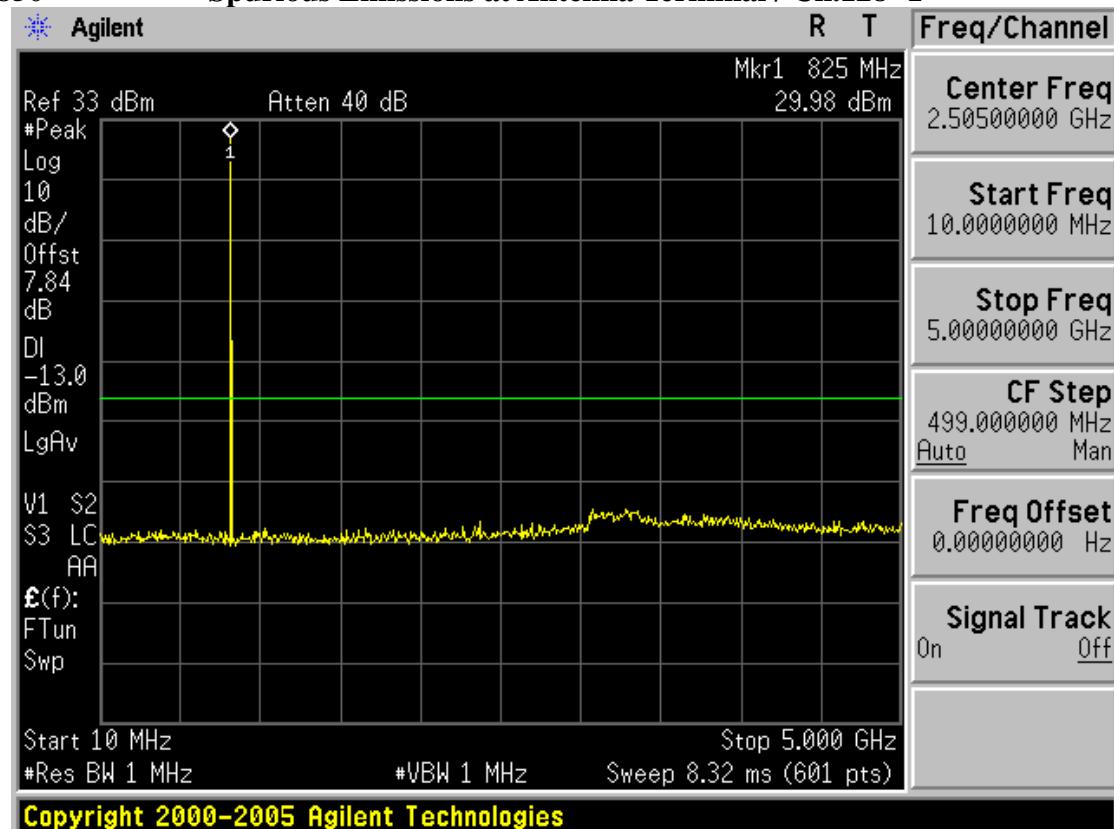


GSM850

## Spurious Emissions at Antenna Terminal / Ch.128 -2

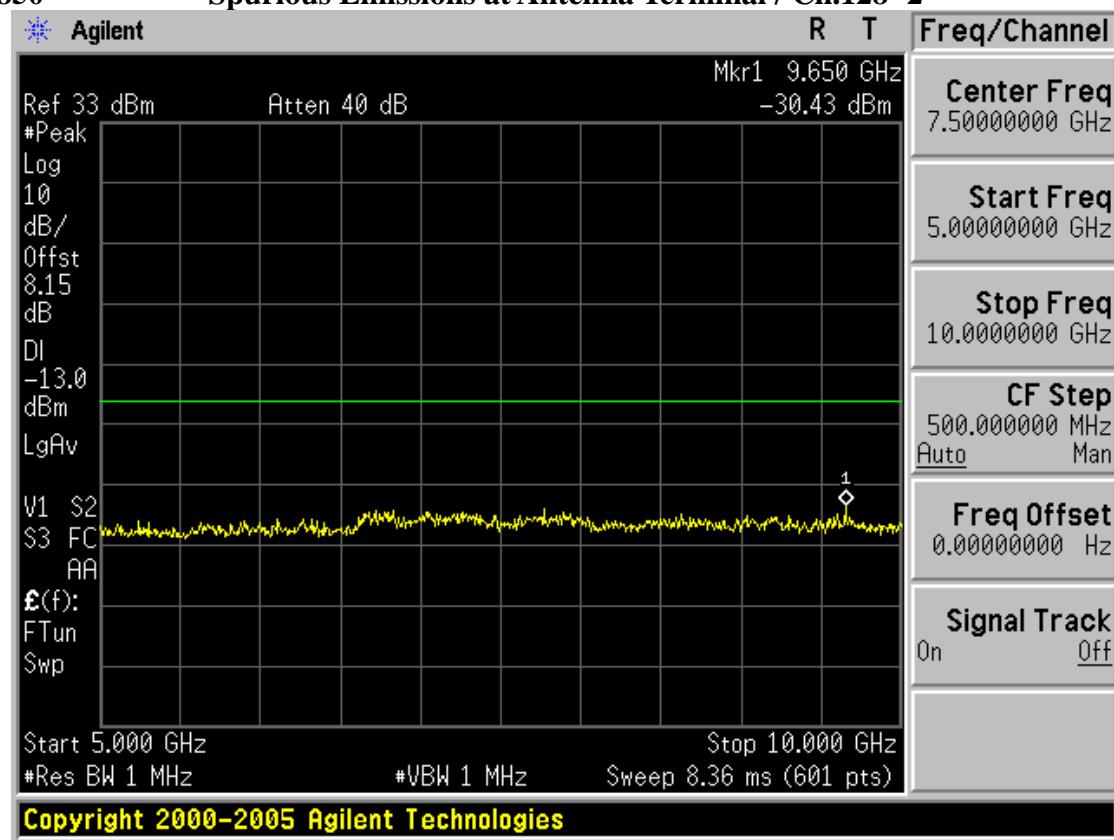


GSM850

## Spurious Emissions at Antenna Terminal / Ch.190 -1

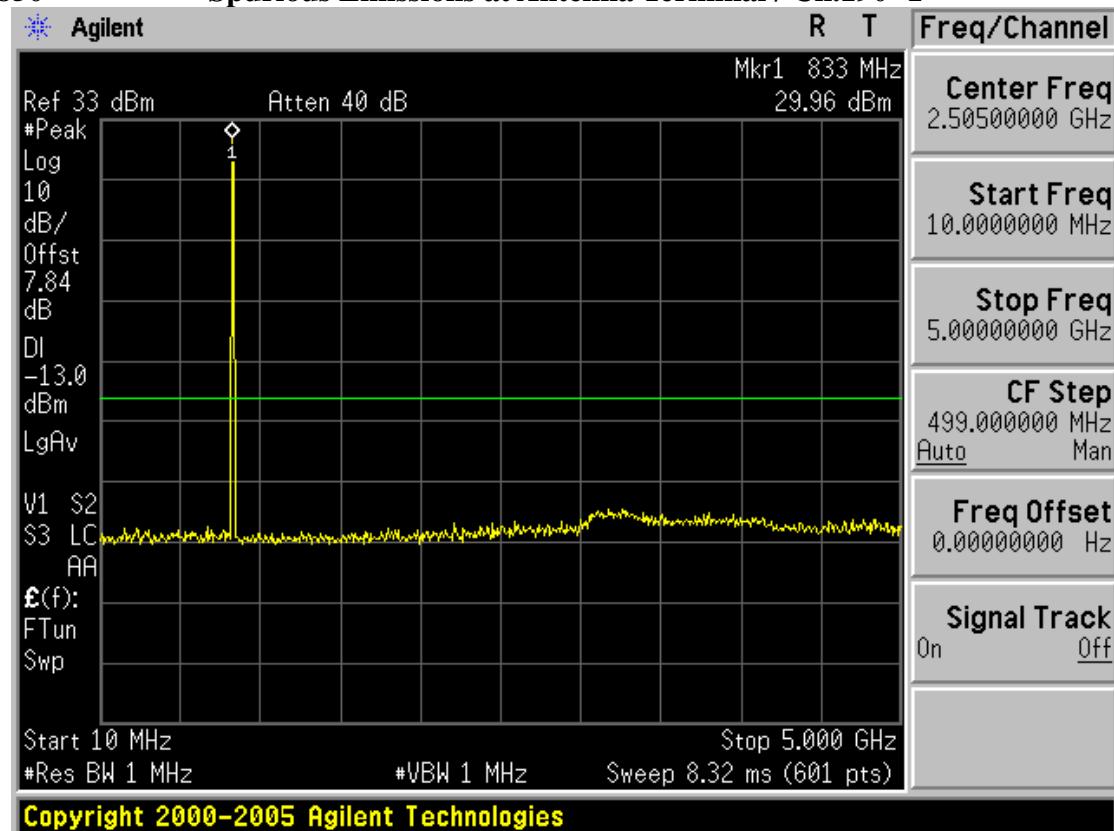


GSM850

## Spurious Emissions at Antenna Terminal / Ch.190 -2

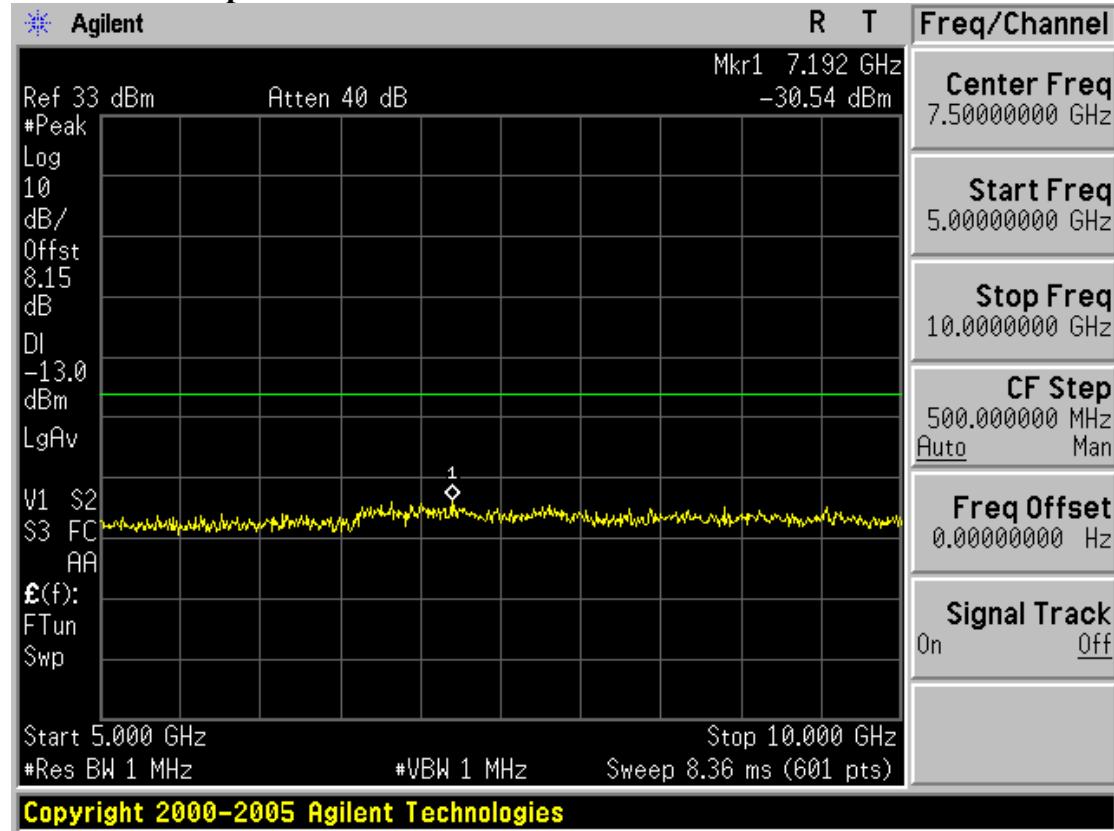


GSM850

## Spurious Emissions at Antenna Terminal / Ch.251 -1

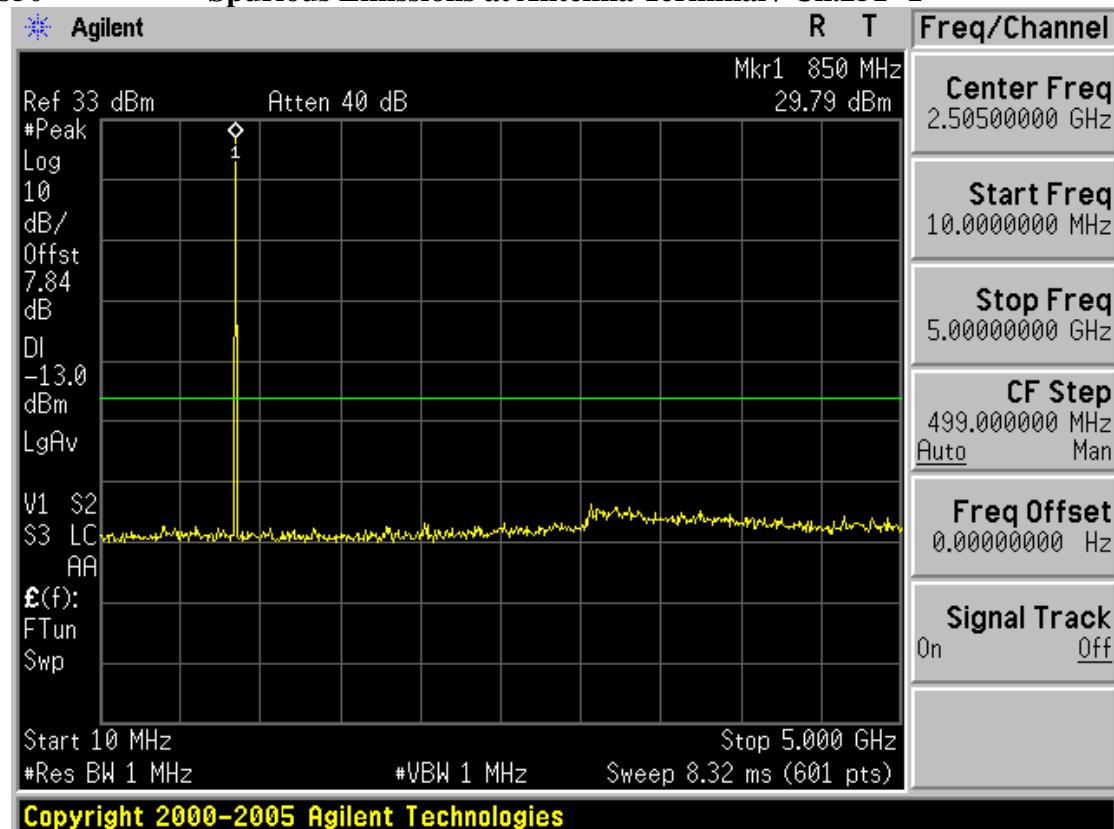


GSM850

## Spurious Emissions at Antenna Terminal / Ch.251-2

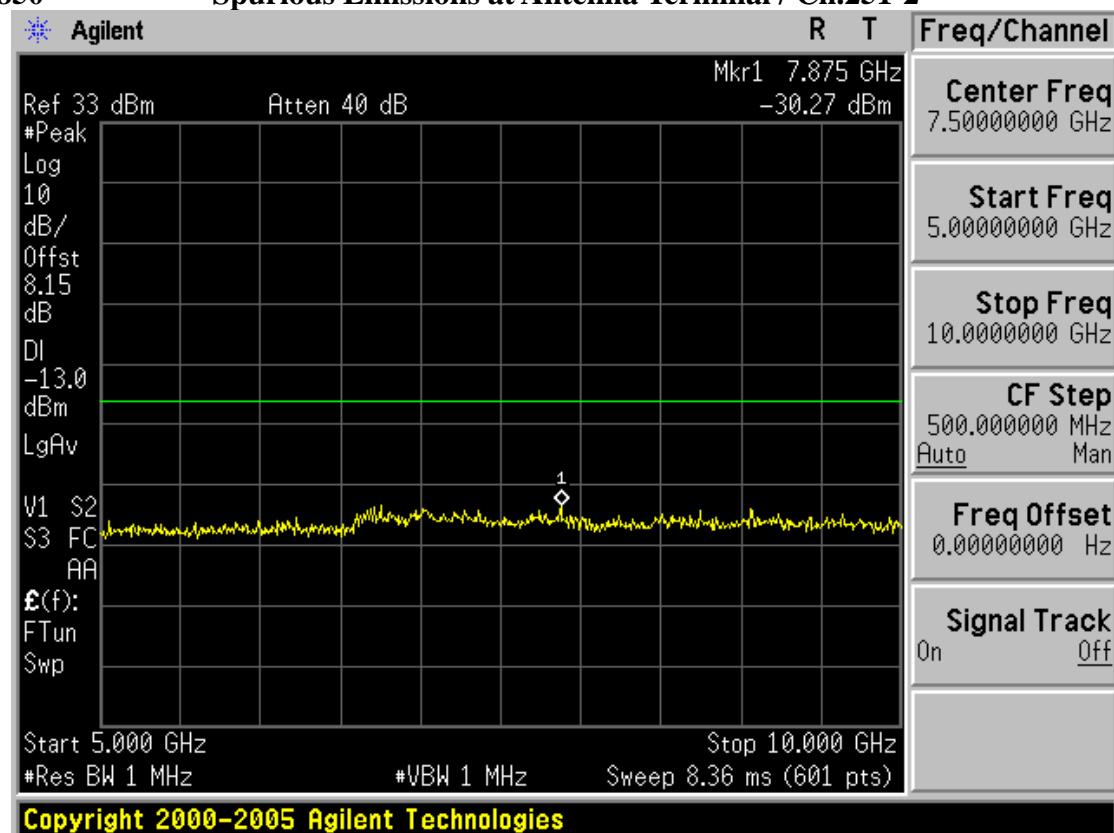


PCS1900

## Spurious Emissions at Antenna Terminal / Ch.512 -1

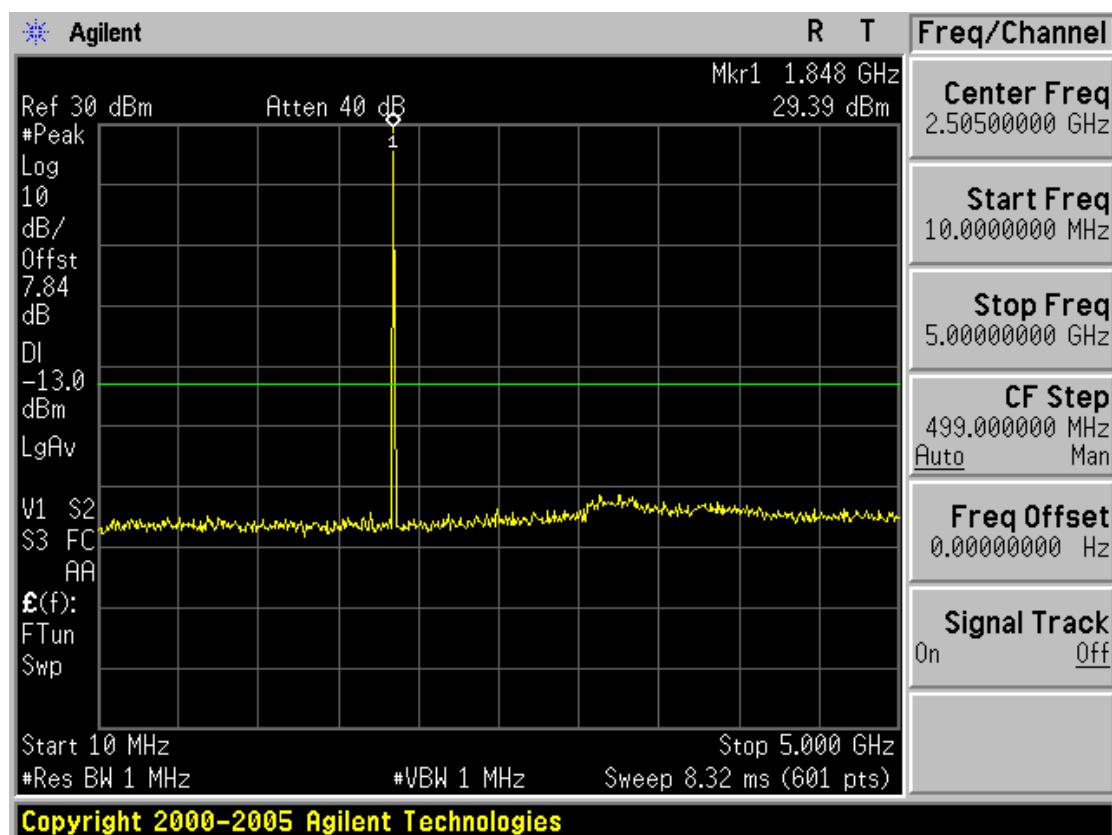


PCS1900

## Spurious Emissions at Antenna Terminal / Ch.512 -2

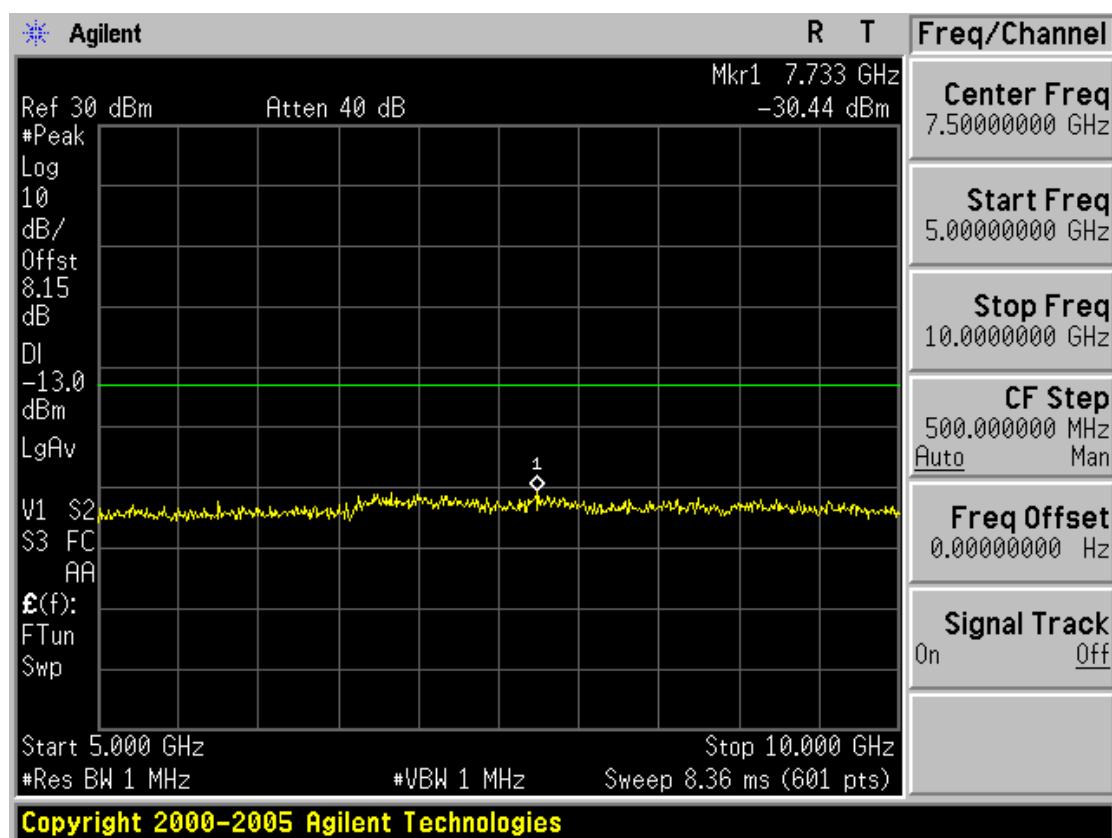


PCS1900

## Spurious Emissions at Antenna Terminal / Ch.512 -3

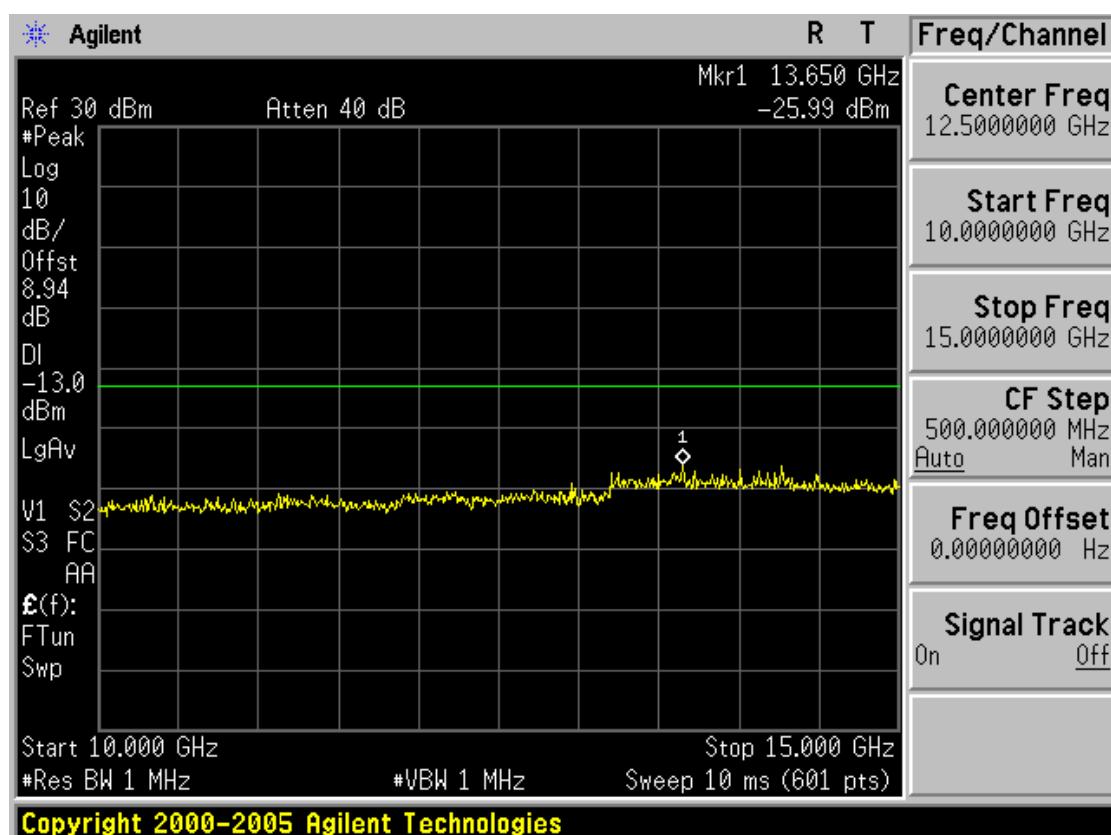


PCS1900

## Spurious Emissions at Antenna Terminal / Ch.512 -4

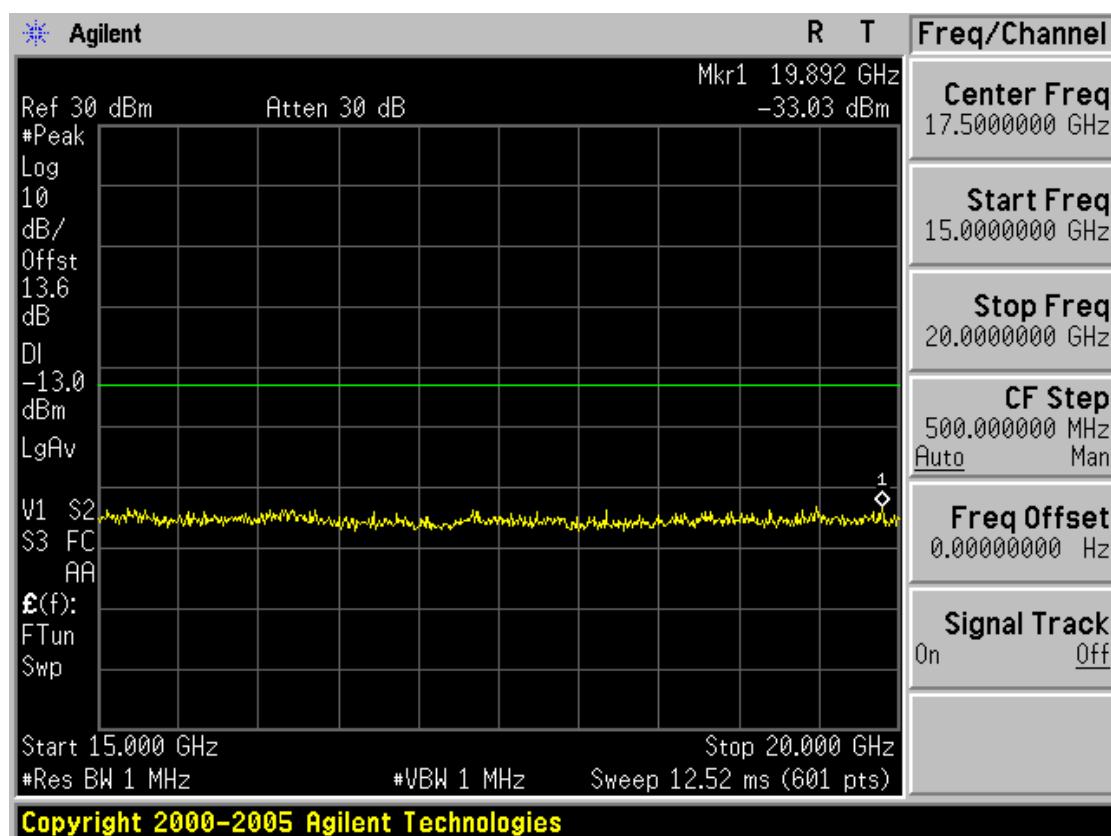


PCS1900

## Spurious Emissions at Antenna Terminal / Ch.661 -1

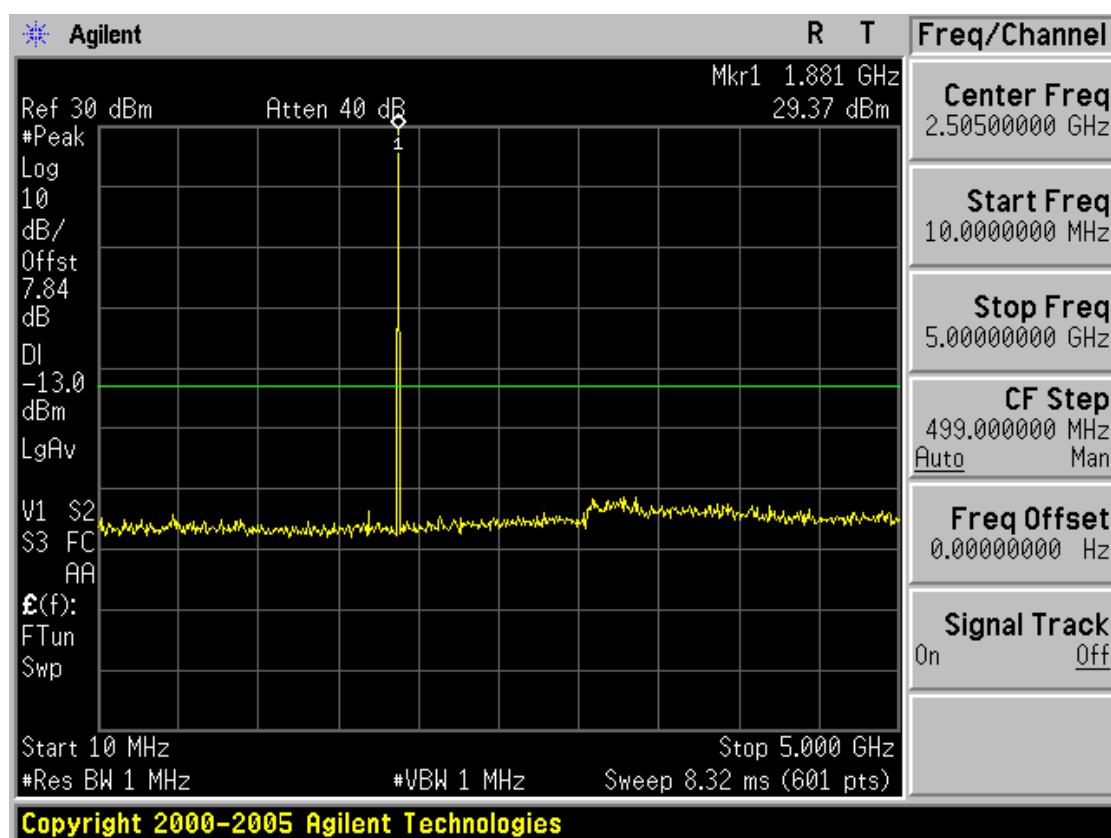


PCS1900

## Spurious Emissions at Antenna Terminal / Ch.661 -2

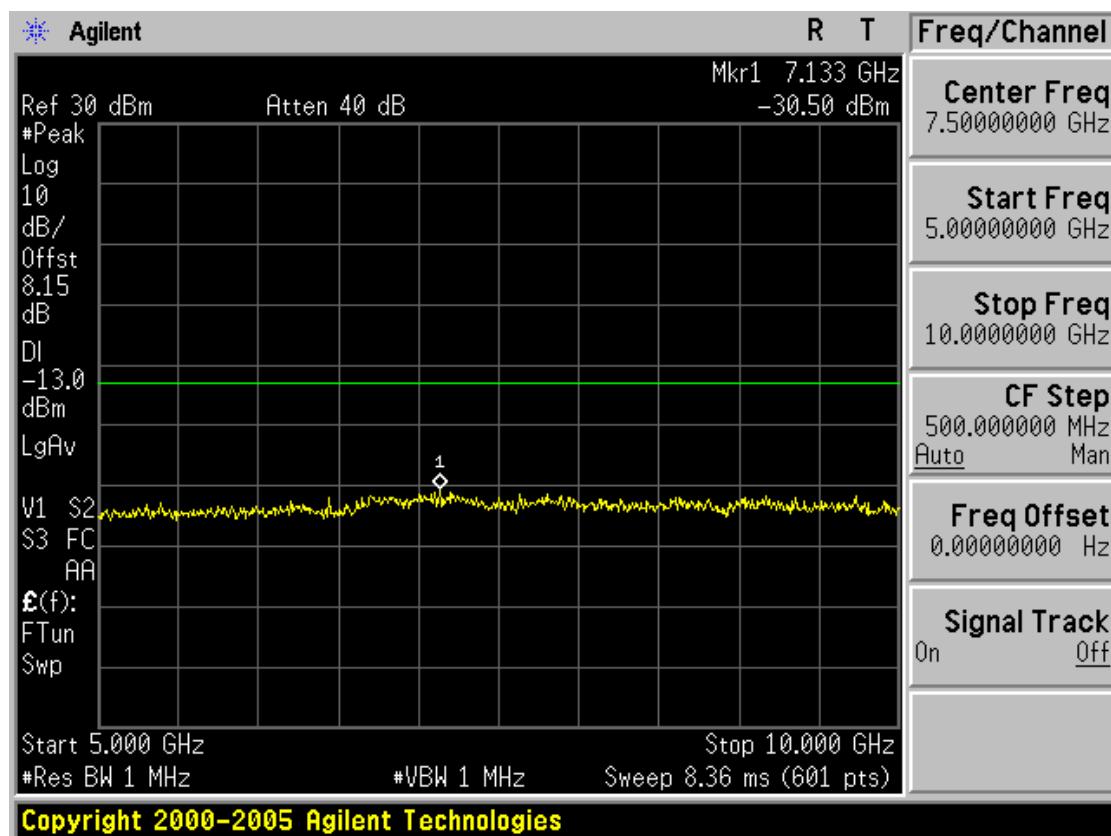


PCS1900

## Spurious Emissions at Antenna Terminal / Ch.661 -3

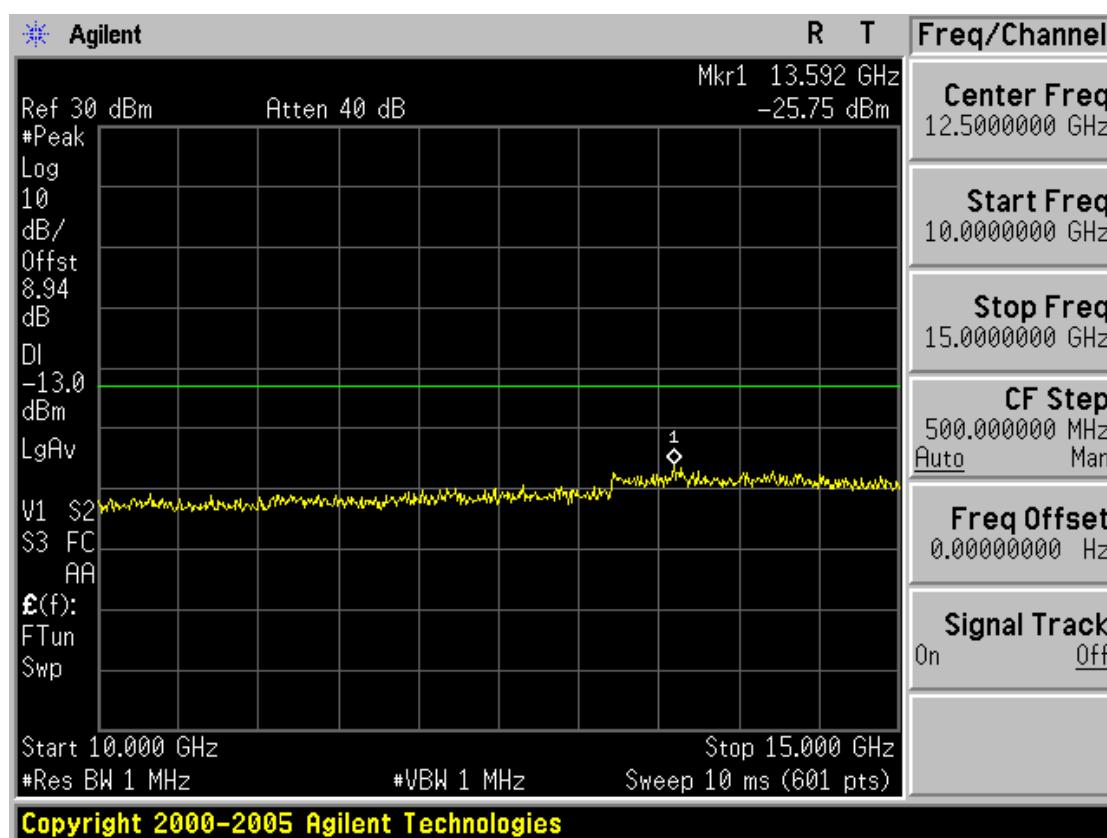


PCS1900

## Spurious Emissions at Antenna Terminal / Ch.661 -4

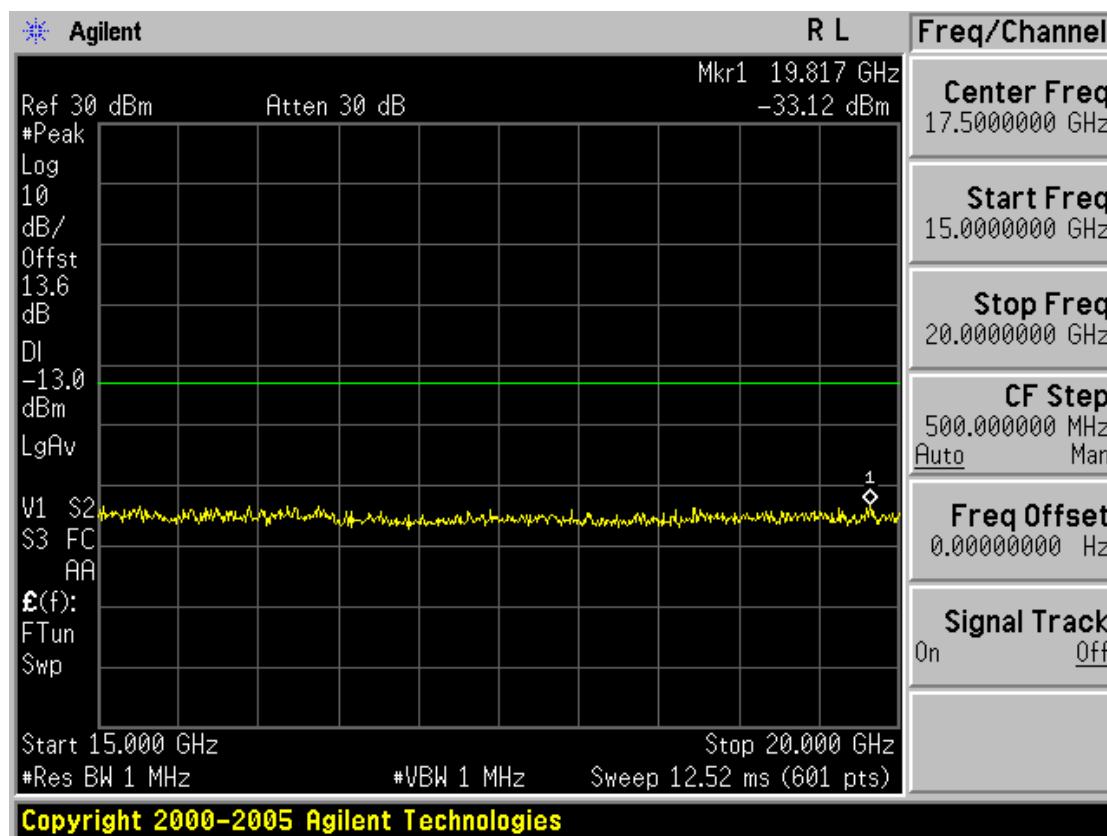


PCS1900

## Spurious Emissions at Antenna Terminal / Ch.810 -1

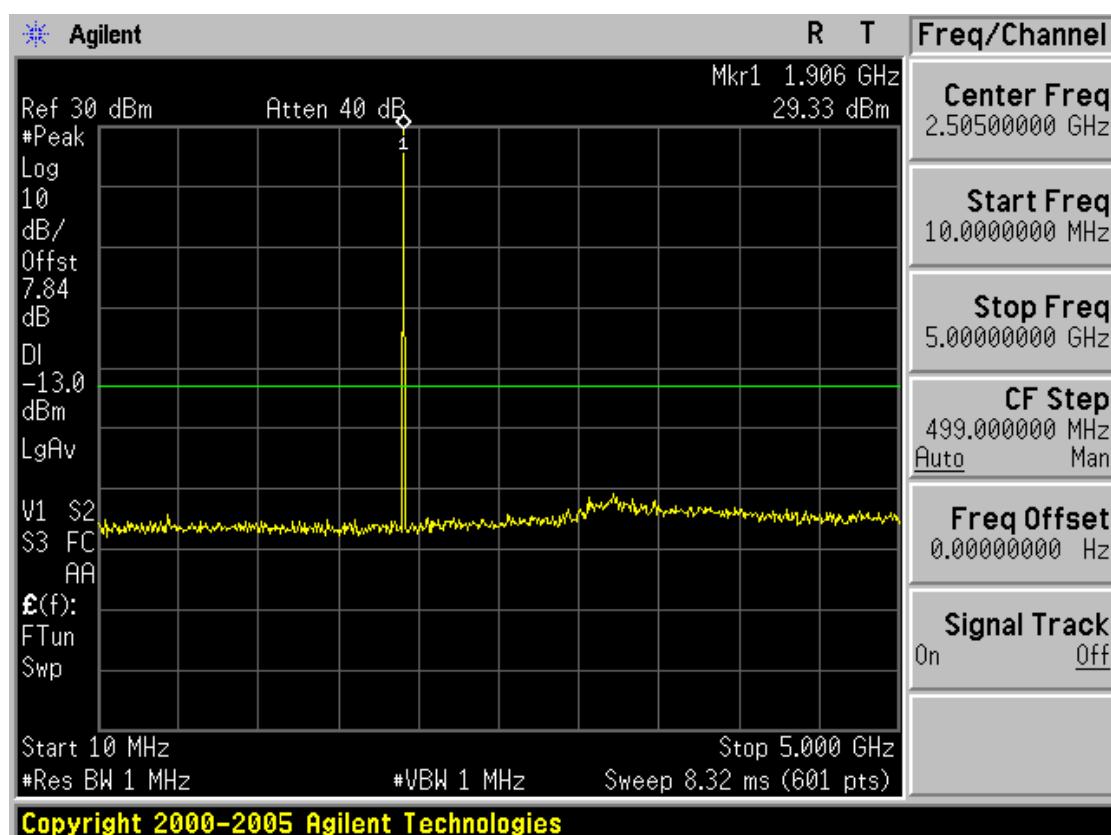


PCS1900

## Spurious Emissions at Antenna Terminal / Ch.810 -2

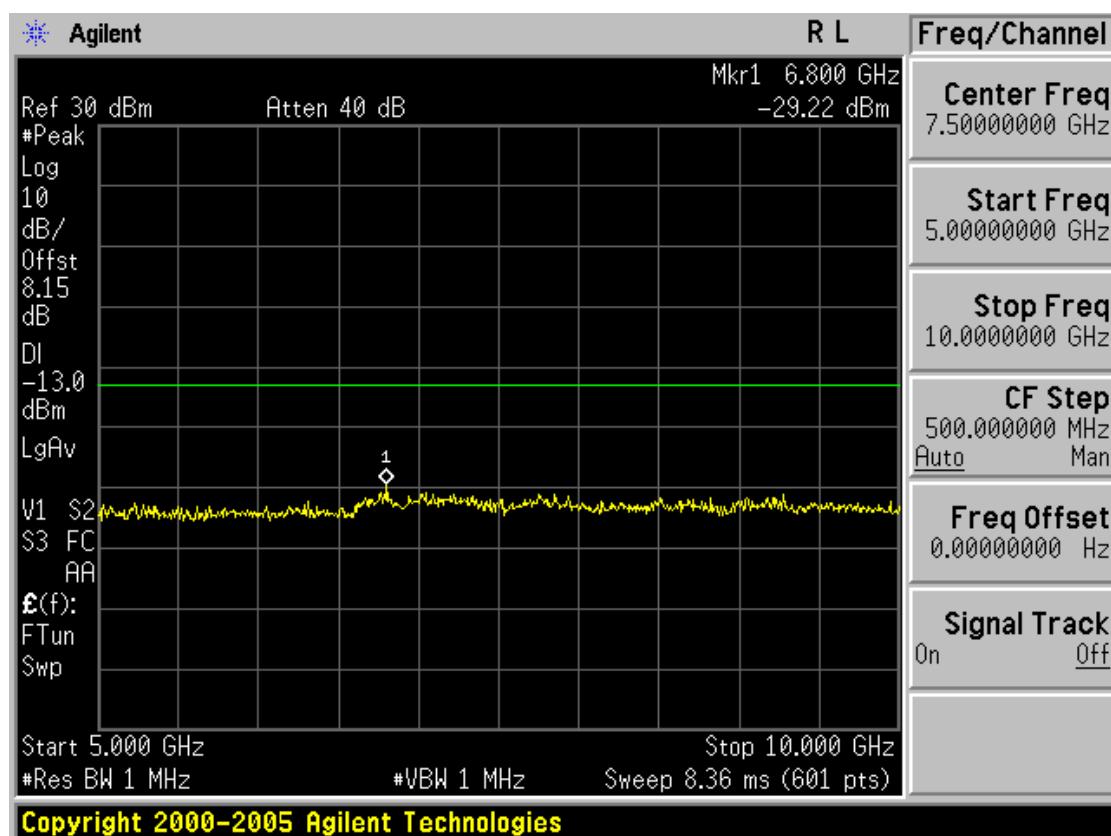


PCS1900

## Spurious Emissions at Antenna Terminal / Ch.810 -3

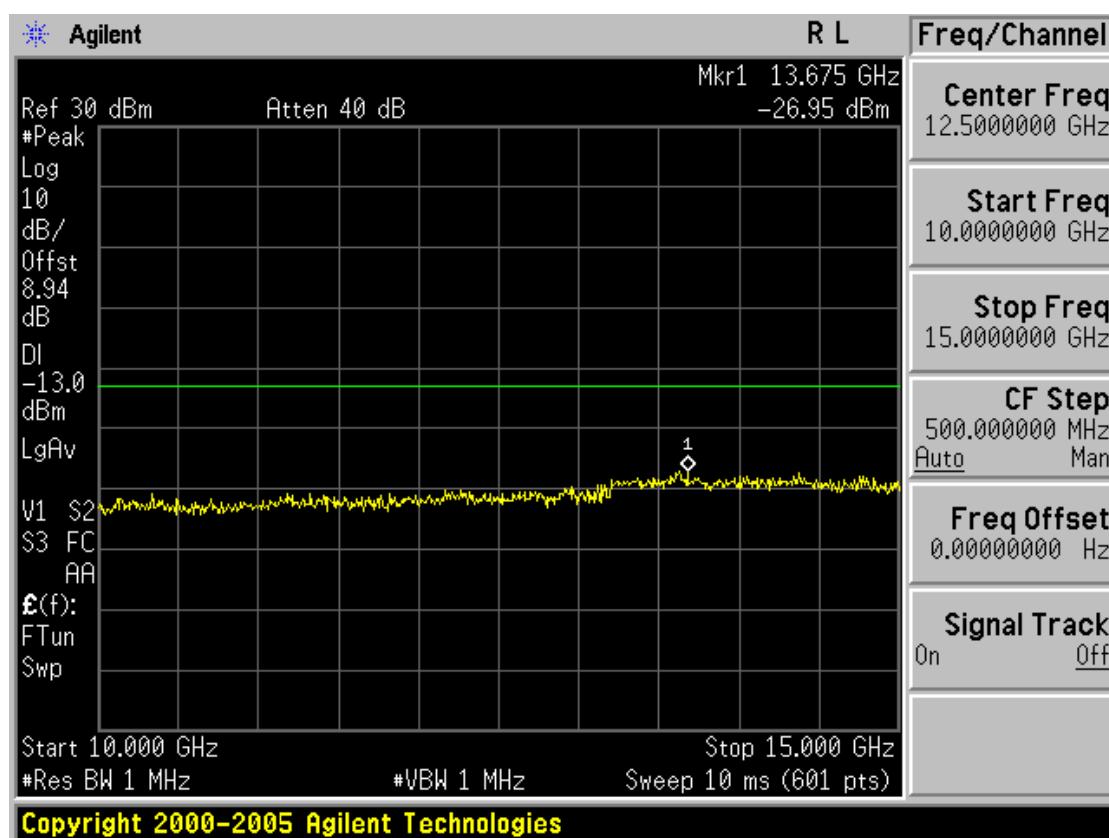

PCS1900

## Spurious Emissions at Antenna Terminal / Ch.810 -4

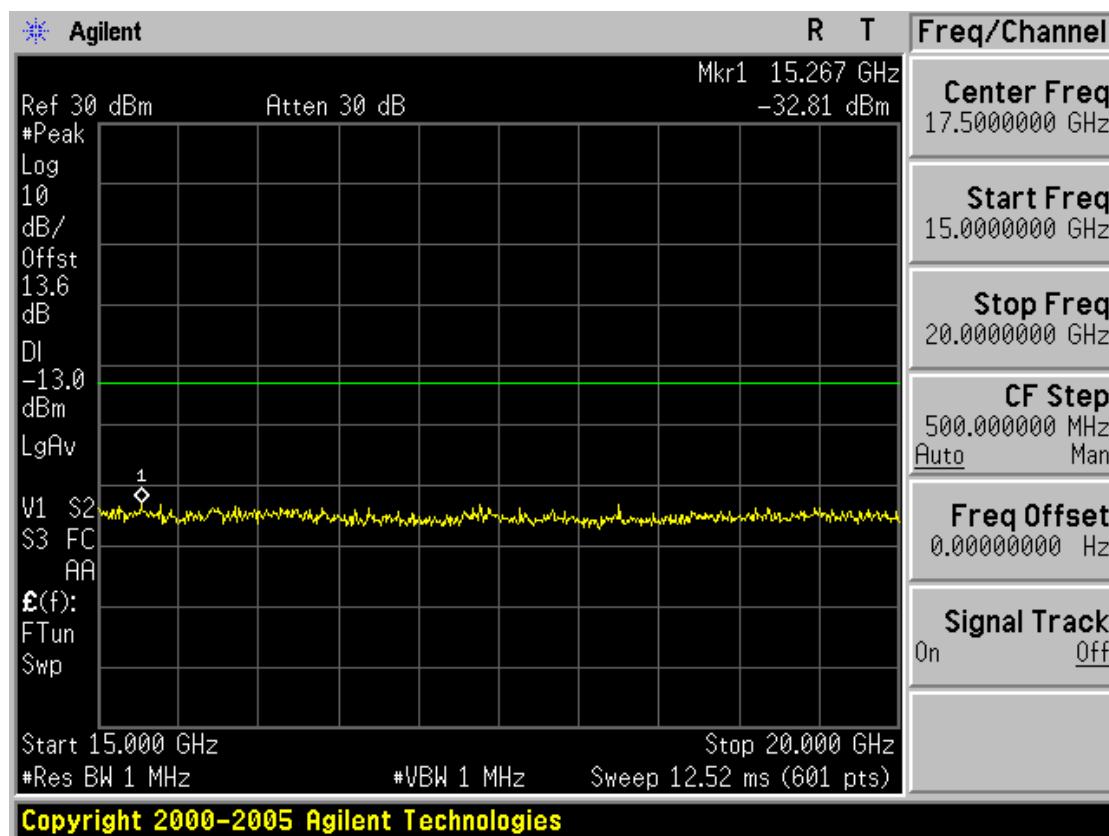

### 3.6 Field Strength of Spurious Radiation

FCC ID	:	NPQMGQ7180
Specification	:	47 CFR 2.1053(a)
Tested Frequency	:	824.2MHz, 836.6MHz and 848.8MHz for GSM850 1850.2MHz, 1880.0MHz and 1909.8MHz for PCS1900

#### Measurement Procedure:

- Radiation and harmonic emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

**GSM850 Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY : 824.2 MHz  
 CHANNEL : 128(Low)  
 MEASURED OUTPUT POWER : 27.39 dBm = 0.548 W  
 MODULATION SIGNAL : GSM (Internal)  
 DISTANCE : 3 meters  
 LIMIT :  $43 + 10 \log_{10} (W) =$  40.39 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1648.4	-44.14	5.74	-38.40	H	65.79
2472.6	-51.14	6.94	-44.20	H	71.59
-	-	-	-	-	-

**NOTE**

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

**GSM850 Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY : 836.6 MHz  
 CHANNEL : 190(Mid)  
 MEASURED OUTPUT POWER : 27.35 dBm = 0.543 W  
 MODULATION SIGNAL : GSM (Internal)  
 DISTANCE : 3 meters  
 LIMIT :  $43 + 10 \log_{10} (W) = 40.35$  dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.2	-48.01	5.81	-42.20	V	69.55
2509.8	-50.97	6.97	-44.00	H	71.35
-	-	-	-	-	-

**NOTE**

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

**GSM850 Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY : 848.8 MHz  
 CHANNEL : 251(High)  
 MEASURED OUTPUT POWER : 28.72 dBm = 0.745 W  
 MODULATION SIGNAL : GSM (Internal)  
 DISTANCE : 3 meters  
 LIMIT :  $43 + 10 \log_{10} (W) = 41.72$  dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1697.6	-49.37	5.87	-43.50	V	72.22
2546.4	-52.19	6.99	-45.20	H	73.92
-	-	-	-	-	-

**NOTE**

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

**GSM1900 Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY : 1850.2 MHz  
 CHANNEL : 512(Low)  
 MEASURED OUTPUT POWER : 28.23 dBm = 0.665 W  
 MODULATION SIGNAL : GSM (Internal)  
 DISTANCE : 3 meters  
 LIMIT :  $43 + 10 \log_{10} (W) = 41.23$  dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1668.0	-47.14	7.94	-39.20	H	67.43
2038.0	-52.13	8.83	-43.30	V	71.53
3700.4	-51.88	9.68	-42.20	V	70.43
-	-	-	-	-	-

**NOTE**

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

**GSM1900 Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY : 1880.0 MHz  
 CHANNEL : 661(Mid)  
 MEASURED OUTPUT POWER : 28.83 dBm = 0.763 W  
 MODULATION SIGNAL : GSM (Internal)  
 DISTANCE : 3 meters  
 LIMIT :  $43 + 10 \log_{10} (W) =$  41.83 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1696.0	-52.82	8.02	-44.80	H	73.63
2072.0	-50.55	8.85	-41.70	V	70.53
3760.0	-46.80	9.70	-37.10	V	65.93
-	-	-	-	-	-

**NOTE**

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

**GSM1900 Field Strength of SPURIOUS Radiation**

OPERATING FREQUENCY : 1909.8 MHz  
 CHANNEL : 810(High)  
 MEASURED OUTPUT POWER : 26.31 dBm = 0.428 W  
 MODULATION SIGNAL : GSM (Internal)  
 DISTANCE : 3 meters  
 LIMIT :  $43 + 10 \log_{10} (W) =$  39.31 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1722.0	-55.08	8.08	-47.00	H	73.31
2104.0	-51.17	8.87	-42.30	V	68.61
3819.6	-47.02	9.72	-37.30	V	63.61
-	-	-	-	-	-

**NOTE**

Radiated Spurious Emission Measurements by Substitution Method  
according to ANSI/TIA/EIA-603-C 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

### 3.7 Frequency Stability/Temperature Variation.

FCC ID	: NPQMGQ7180
Specification	: 47 CFR 2.1055
Tested Frequency	: 836.6MHz for GSM850 1880.0MHz for PCS1900

#### Measurement Procedure:

The frequency stability of the transmitter is measured by:

- a) **Temperature** :The temperature is varied from -30°C to + 50°C using an environmental chamber.
- b) **Primary Supply Voltage** :The primary supply voltage is varied from 85% to 115% of the voltage Normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification –The minimum frequency stability shall be +/- 0.00025% at any time during normal operation.

Specification — The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025 (\pm 2.5\text{ppm})$  of the center frequency.

#### Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27 °C to provide a reference)
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight ”soak” at -30°C(usually 14-16 hours),the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency to the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements is made at 10°C interval up to room temperature. At least a period of one and one half hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency were made at 10intervals starting at -30°C up to +50°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.



**Frequency Stability (GSM850)**

OPERATING FREQUENCY : 836,599,973 Hz  
 CHANNEL : 190(Mid)  
 REFERENCE VOLTAGE : 3.7 VDC  
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	3.7	+25(Ref)	836,599,973	0.000000
100%		-30	836,599,949	-0.000003
100%		-20	836,599,954	-0.000002
100%		-10	836,599,965	-0.000001
100%		0	836,599,960	-0.000002
100%		+10	836,599,969	0.000000
100%		+20	836,599,975	0.000000
100%		+25	836,599,973	0.000000
100%		+30	836,599,965	-0.000001
100%		+40	836,599,968	-0.000001
100%		+50	836,599,949	-0.000003
100%		+60	836,599,944	-0.000003
85%	3.145	+25	-	-
115%	4.255	+25	836,599,972	0.000000
BATT.ENDPOINT	3.400	+25	836,599,968	-0.000001

## Frequency Stability(GSM850)

(Continued...)

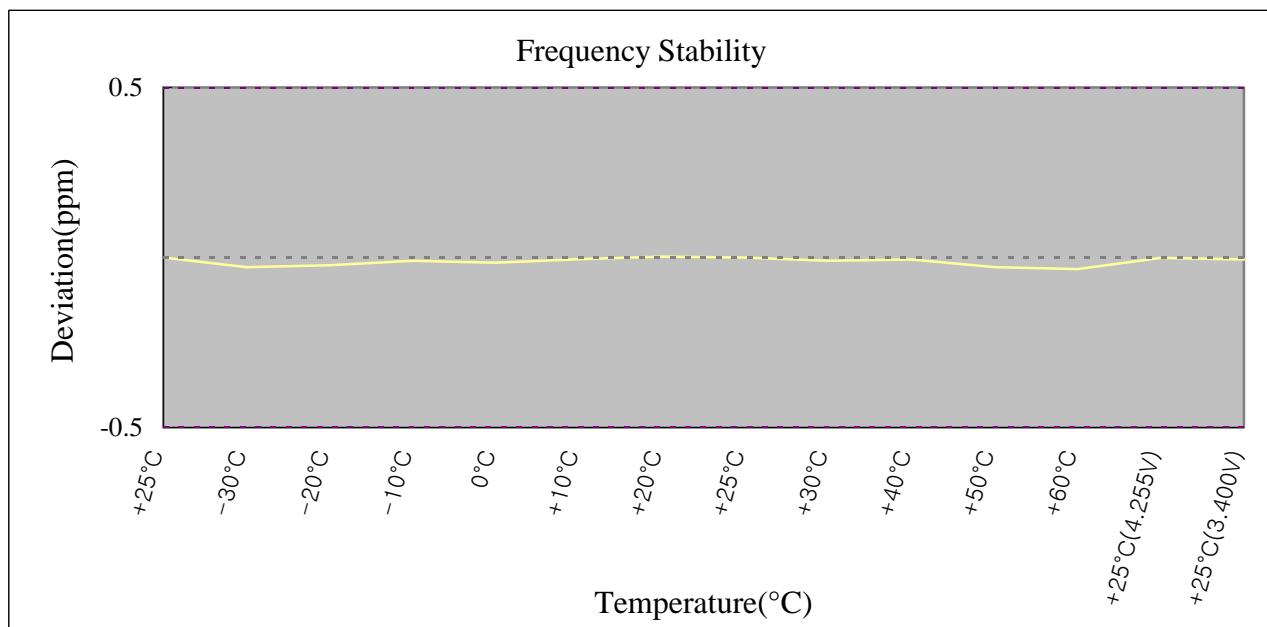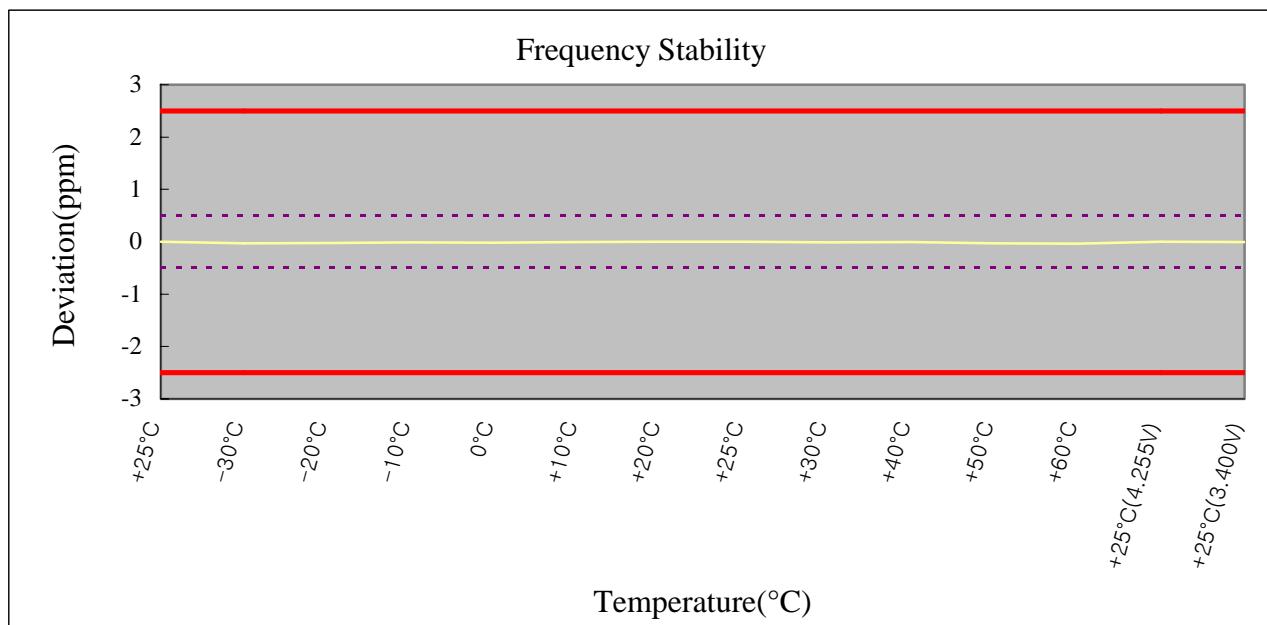



**Frequency Stability (PCS1900)**

OPERATING FREQUENCY : 1,879,999,963 Hz  
 CHANNEL : 0661(Mid)  
 REFERENCE VOLTAGE : 3.7 VDC  
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (dB)	FREQ (Hz)	Deviation (%)
100%	3.7	+25(Ref)	1,879,999,963	0.000000
100%		-30	1,879,999,957	0.000000
100%		-20	1,879,999,949	-0.000001
100%		-10	1,879,999,960	0.000000
100%		0	1,879,999,959	0.000000
100%		+10	1,879,999,967	0.000000
100%		+20	1,879,999,969	0.000000
100%		+25	1,879,999,963	0.000000
100%		+30	1,879,999,965	0.000000
100%		+40	1,879,999,960	0.000000
100%		+50	1,879,999,943	-0.000001
100%		+60	1,879,999,945	-0.000001
85%	3.145	+25	-	-
115%	4.255	+25	1,879,999,936	-0.000001
BATT.ENDPOINT	3.400	+25	1,879,999,956	0.000000

## Frequency Stability (PCS1900)

(continued...)

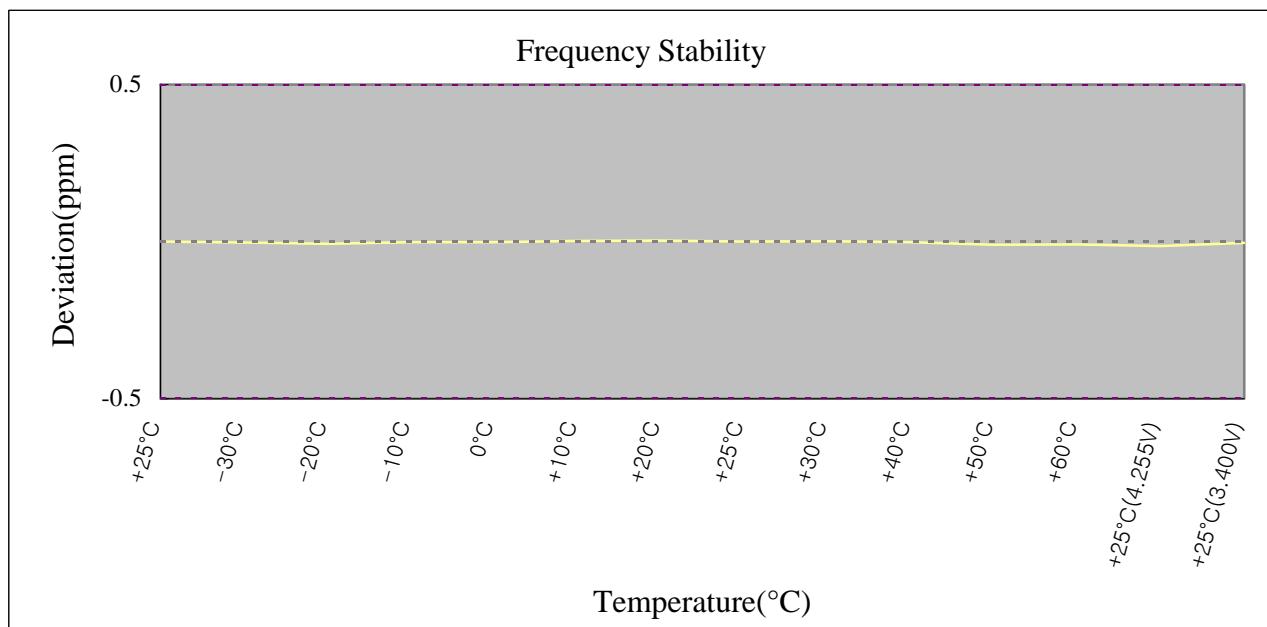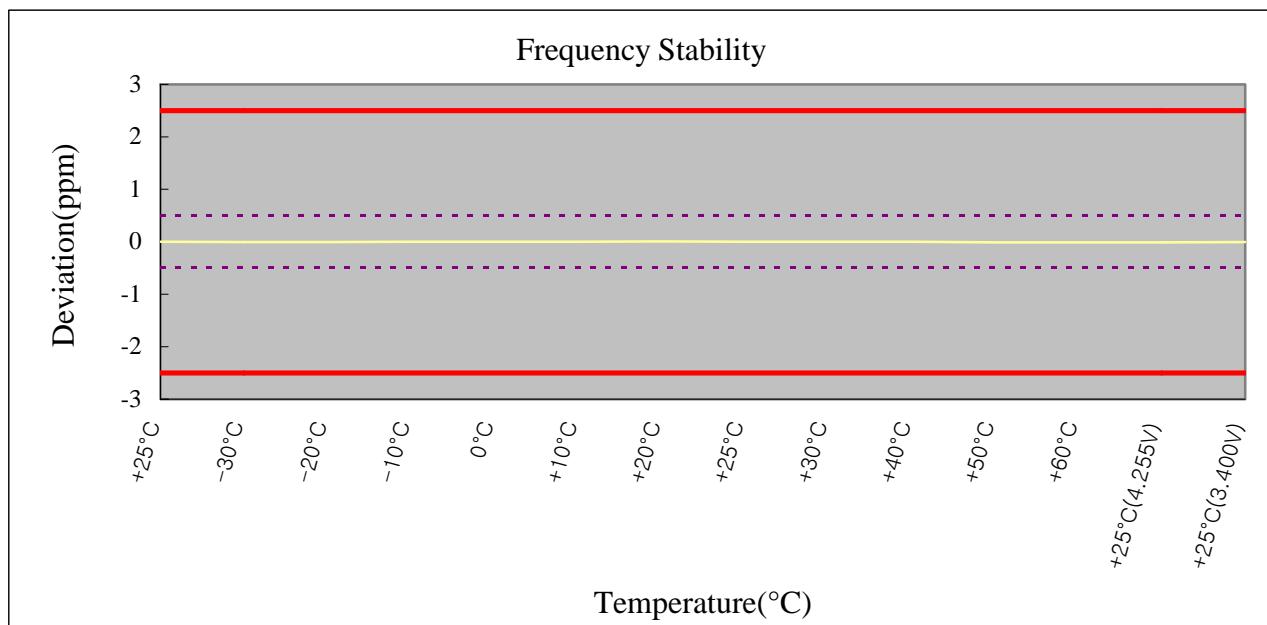

## 4. TEST EQUIPMENT

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	S/N
01	Spectrum Analyzer	Agilent	E4404B	21/03/07	US41061134
02	Spectrum Analyzer	Agilent	E4440A	14/11/07	MY45304199
03	Spectrum Analyzer	H.P	8563E	06/10/07	3551A04634
04	Power Meter	H.P	EPM-442A	06/07/07	GB37170413
05	Power Sensor	H.P	8481A	23/03/07	3318A96332
06	Frequency Counter	H.P	5342A	15/09/07	2119A04450
07	Multifunction Synthesizer	H.P	8904A	12/10/07	3633A08404
08	Signal Generator	Rohde Schwarz	SMR20	22/03/07	101251
09	Signal Generator	H.P	E4421A	06/07/07	US37230529
10	Audio Analyzer	H.P	8903B	06/07/07	3011A0944B
11	Modulation Analyzer	H.P	8901B	10/07/07	3028A03029
12	Oscilloscope	Tektronix	TDS3052	01/10/07	B016821
13	8960 Series 10 Wireless Comms Test Set	Agilent	Z5515C	13/06/08	GB43461134
14	Universal Radio Communication Test	Rohde Schwarz	CMU200	21/03/07	107631
15	CDMA Mobile Station Test Set	H.P	8924C	15/09/07	US35360688
16	PCS Interface	HP	83236B	15/09/07	3711J03014
17	Multi system UE Tester	Japan Radid Co., Ltd	NJZ-2000	20/11/07	ET00095
18	Power Splitter	WEINSCHEL	1593	14/10/07	332
19	BAND Reject Filter	Microwave Circuits	N0308372	19/10/07	3125-01DC0312
20	BAND Reject Filter	Wainwright	WRCG1750	19/10/07	SN2
21	AC Power supply	DAEKWANG	5KVA	21/03/07	N/A
22	DC Power Supply	H.P	6622A	20/03/07	465487
23	HORN ANT	EMCO	3115	04/04/07	6419
24	HORN ANT	EMCO	3115	04/25/07	21097
25	HORN ANT	A.H.Systems	SAS-574	16/08/07	154
26	HORN ANT	A.H.Systems	SAS-574	16/08/07	155
27	Dipole Antenna	Schwarzbeck	VHA9103	18/11/07	2116
28	Dipole Antenna	Schwarzbeck	VHA9103	18/11/07	2117
29	Dipole Antenna	Schwarzbeck	UHA9105	18/11/07	2261
30	Dipole Antenna	Schwarzbeck	UHA9105	18/11/07	2262
31	Loop Antenna	ETS	6502	23/11/07	3471

## 4. TEST EQUIPMENT (CONTINUED)

	Type	Manufacturer	Model	Cal.Due.Date (dd/mm/yy)	S/N
32	TEMP & HUMIDITY Chamber	JISCO	J-RHC2	13/09/07	021031
33	EMI Test Receiver	R&S	ESCI	28/04/07	100364
34	EMI Test Receiver	R&S	ESU	25/01/08	100014
35	RFI/FIELD Intensity Meter	Kyorits	KNM-504D	21/07/07	4N-161-4
36	Frequency Converter	Kyorits	KCV-604C	21/07/07	4-230-3
37	Log Periodic Antenna	Schwarzbeck	UHALP9108A1	26/09/07	1098
38	Biconical Antenna	Schwarzbeck	VHA9103	12/09/07	2233
39	Digital Multimeter	H.P	34401A	18/04/07	3146A13475
40	Attenuator (10dB)	WEINSCHEL	23-10-34	26/01/07	BP4386
41	High-Pass Filter	ANRITSU	MP526	13/10/07	M27756
42	Attenuator (3dB)	Agilent	8491B	10/07/07	58177
43	Attenuator (10dB)	WEINSCHEL	23-10-34	26/01/07	BP4387
44	Attenuator (30dB)	H.P	8498A	17/10/07	50101
45	Amplifier (25dB)	Agilent	8447D	12/04/07	2944A10144
46	Amplifier (30dB)	Agilent	8449B	13/10/07	3008A01590
47	Position Controller	TOKIN	5901T	N/A	14173
48	Driver	TOKIN	5902T2	N/A	14174
49	Spectrum Analyzer	H.P	8591E	21/03/07	3649A05889
50	RFI/FIELD Intensity Meter	Kyorits	KNW-2402	11/07/07	4N-170-3
51	LISN	Kyorits	KNW-407	19/08/07	8-317-8
52	LISN	Kyorits	KNW-242	09/10/07	8-654-15
53	CVCF	NF Electronic	4400	N/A	344536 4420064
54	Software	ToYo EMI	EP5/RE	N/A	Ver 2.0.800
55	Software	ToYo EMI	EP5/CE	N/A	Ver 2.0.801
56	Software	AUDIX	e3	N/A	Ver 3.0
57	Software	Agilent	Benchlink	N/A	A.01.09 021211

---

## 5. EMISSION DESIGNATOR

---

### **GSM850**

Emission Designator = 249KGXW

GSM BW = 249 KHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

(Measured at the 99.75% power bandwidth)

### **PCS1900**

Emission Designator = 252KGXW

GSM BW = 252 KHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

(Measured at the 99.75% power bandwidth)

---

## **6. CONCLUSION**

---

The data collected shows that the **Telian Corporation**. Dual band GSM phone **FCC ID: NPQMGQ7180** complies with all the requirements of Parts 2 , 22 and 24 of the FCC rules.