


Blank label (STA-L000246)

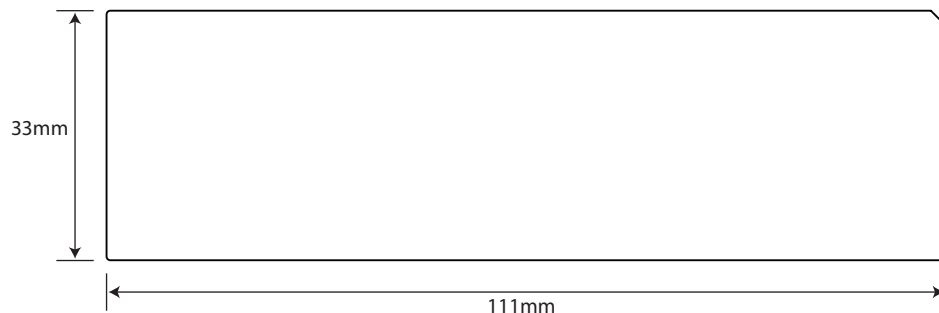

Label with example variable data (not for manufacture)

Model No: D5001 HW VER: V02 Made In China, 2014 FCC ID: NQ8D5001 SSID (2.4GHz): PACE882 SSID (5.0GHz): PACE882_5G Encryption Key: 3afde8b8c57d1bc3	 Serial No: PAD90000882 CM MAC: 84:E0:58:21:22:AC WAN MAN MAC: 84:E0:58:21:22:AE Pace S/N: FAAAAD93131989
---	---

Notes:

The barcodes MUST have a minimum x-dimension of 5 mils (0.125mm).

The barcodes must be as wide as possible across the width of the label, while still including enough quiet zone to the left and right of the barcode to ensure an accurate scan.

Colons (:) and hyphens (-) are to be used only in human-readable serial numbers. Do not include these in the barcoded serial numbers.

All barcodes shown are examples for reference only. See the serialisation specification for E255 D5001 for full details

Minimum point size for serial numbers: 8 point


Ensure the Encryption Key number is in large bold font, as shown (Arial Bold 11pt is used in this example).

The label system (label, ink and printing) shall be UL certified to UL 969.

Blank Label Part	STA-L000246	Ribbon	STA-CZEB003 or equivalent				E255-D5001-Product-Label			Rev
										A
Additional Notes				Model	Pace D5001	Drafted By	Nick Tonge	Sheet 1 of 1		
See also: Serialisation specification for E255 D5001 (latest issue) Label Position Instructions 700-533020x First issue				Model Part No	E2553316500	Date	5 September 2014			
				Additional Graphics (if required)		Approved by		Signature	Date	
				N/A		Tech Pubs	Marilyn Heron			
						Approvals	N/A			
		Project Team	Eamonn Boyle							

FCC LABEL LOCATION

The label will be permanently affixed at a conspicuous location on the device.

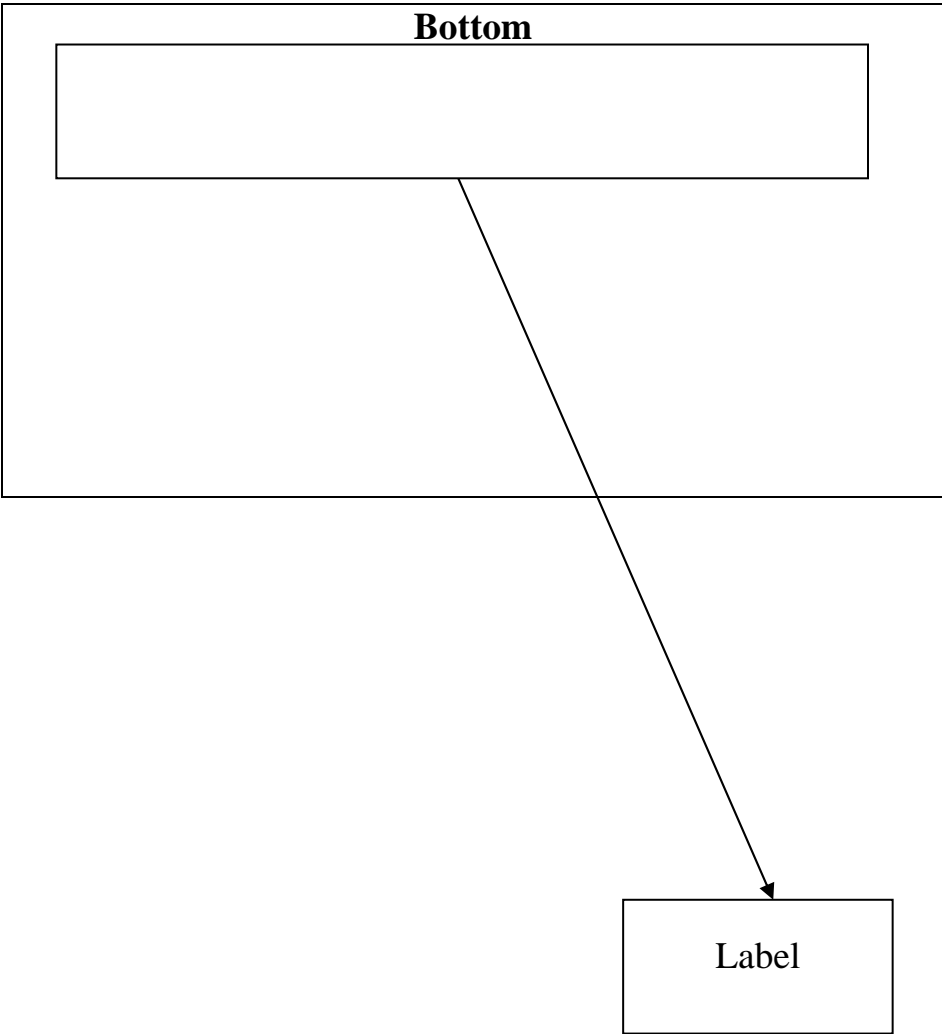

(Fig. 1) FCC ID: NQ8D5001