



A D T

FCC TEST REPORT(15.247)

REPORT NO.: RF140828E03

MODEL NO.: D5001, D3001, D3003

FCC ID: NQ8D5001

RECEIVED: Aug. 28, 2014

TESTED: Sep. 10 to 23, 2014

ISSUED: Oct. 03, 2014

APPLICANT: Pace Micro Technology plc

ADDRESS: Saltaire, Shipley, West Yorkshire, BD18 3LF,
UK

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	12
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	13
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	16
3.4 DUTY CYCLE OF TEST SIGNAL	17
3.5 DESCRIPTION OF SUPPORT UNITS	18
3.6 CONFIGURATION OF SYSTEM UNDER TEST.....	19
4. TEST TYPES AND RESULTS	20
4.1 CONDUCTED EMISSION MEASUREMENT.....	20
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	20
4.1.2 TEST INSTRUMENTS.....	20
4.1.3 TEST PROCEDURES	21
4.1.4 DEVIATION FROM TEST STANDARD.....	21
4.1.5 TEST SETUP.....	21
4.1.6 EUT OPERATING CONDITIONS	22
4.1.7 TEST RESULTS	23
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	25
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT ...	25
4.2.2 TEST INSTRUMENTS.....	26
4.2.3 TEST PROCEDURES	27
4.2.4 DEVIATION FROM TEST STANDARD.....	27
4.2.5 TEST SETUP.....	28
4.2.6 EUT OPERATING CONDITIONS	28
4.2.7 TEST RESULTS	29
4.3 6dB BANDWIDTH MEASUREMENT	42
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	42
4.3.2 TEST INSTRUMENTS.....	42
4.3.3 TEST PROCEDURE.....	42
4.3.4 DEVIATION FROM TEST STANDARD.....	42
4.3.5 TEST SETUP.....	42
4.3.6 EUT OPERATING CONDITIONS	42
4.3.7 TEST RESULTS (MODE 1)	43
4.3.8 TEST RESULTS (MODE 2)	45



A D T

4.4	CONDUCTED OUTPUT POWER MEASUREMENT	46
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	46
4.4.2	TEST INSTRUMENTS	46
4.4.3	TEST PROCEDURES	46
4.4.4	DEVIATION FROM TEST STANDARD	47
4.4.5	TEST SETUP	47
4.4.6	EUT OPERATING CONDITIONS	47
4.4.7	TEST RESULTS(MODE 1)	48
4.4.8	TEST RESULTS(MODE 2)	49
4.5	POWER SPECTRAL DENSITY MEASUREMENT	50
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	50
4.5.2	TEST INSTRUMENTS	50
4.5.3	TEST PROCEDURE	50
4.5.4	DEVIATION FROM TEST STANDARD	50
4.5.5	TEST SETUP	50
4.5.6	EUT OPERATING CONDITION	50
4.5.7	TEST RESULTS(MODE 1)	51
4.5.8	TEST RESULTS(MODE 2)	54
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	56
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	56
4.6.2	TEST INSTRUMENTS	56
4.6.3	TEST PROCEDURE	56
4.6.4	DEVIATION FROM TEST STANDARD	57
4.6.5	TEST SETUP	57
4.6.6	EUT OPERATING CONDITION	57
4.6.7	TEST RESULTS(MODE 1)	57
4.6.8	TEST RESULTS(MODE 2)	70
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	77
6.	INFORMATION ON THE TESTING LABORATORIES	78
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	79



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF140828E03	Original release	Oct. 03, 2014



1. CERTIFICATION

PRODUCT: DOCSIS 3.0 Wireless Gateway Router with MOCA 2.0
BRAND NAME: Pace
MODEL NO.: D5001, D3001, D3003
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: Pace Micro Technology plc
TESTED: Sep. 10 to 23, 2014
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: D5001) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Midoli Peng , Date: Oct. 03, 2014
(Midoli Peng, Specialist)

Approved by : May Chen , Date: Oct. 03, 2014
(May Chen, Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -17.40dB at 0.54063MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.2dB at 2381.00MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

NOTE: 1. The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz, and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 2400 ~ 2483.5MHz. For the 5.15~5.25GHz and 5.725~5.850GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.86 dB
Radiated emissions (30MHz-1GHz)	5.37 dB
Radiated emissions (1GHz -6GHz)	3.65 dB
Radiated emissions (6GHz -18GHz)	3.88 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	DOCSIS 3.0 Wireless Gateway Router with MOCA 2.0
MODEL NO.	D5001, D3001, D3003
POWER SUPPLY	DC 12V from internal power supply
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 450Mbps 802.11ac: up to 1300Mbps
OPERATING FREQUENCY	For 15.407 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz For 15.247 2.412 ~ 2.462GHz
NUMBER OF CHANNEL	For 15.407 9 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 4 for 802.11n (HT40), 802.11ac (VHT40) 2 for 802.11ac (VHT80) For 15.247 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
MAXIMUM OUTPUT POWER	Please see NOTE
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	NA



Note:

1. The EUT has three model names which are identical to each other in all aspects except for the following table:

Model Name	D5001	D3001	D3003	Remark
DSxUS	24x8	16x4	16x4	Remove BCM3184 wide band tuner for E469&E470
Wifi function	2.4G / 5G 11n & ac concurrent	2.4G / 5G 11n & ac concurrent	2.4G / 5G 11n & ac concurrent	-
With Moca	Yes	Yes	NA	Remove BCM6803 for E470
Wide band tuner	BCM3184	NA	NA	Remove BCM3184 wide band tuner for E469&E470
MoCA Chip	BCM6803KFSBG+ BCM3451KMLG	BCM6803KFSBG+ BCM3451KMLG	NA	Remove BCM6803 for E470

In general, these 3 models share the same main board PCB but with different component mounting. Two WiFi boards, enclosures, antennas, PSU are all the same without any changing.

From the above models, model: **D5001** was selected as representative model for the test and its data was recorded in this report.

2. The maximum output power(mW) table as below table:

2.4GHz				
Test Mode	802.11b	802.11g	802.11n (HT20)	802.11n (HT40)
3TX / CDD Mode	808.083	986.932	995.844	254.792
3TX / Beamforming Mode	NA	NA	531.12	254.792
5GHz				
Test Mode	802.11a	802.11ac (VHT20)	802.11ac (VHT40)	802.11ac (VHT80)
3TX / CDD Mode	678.435	704.784	630.307	171.995
3TX / Beamforming Mode	NA	398.179	359.682	171.995

3. The EUT must be supplied with an internal power supply:

Brand	Model No.	Spec.
AMPOWER	E12B001.00	AC I/P: 100~240V, 50/60Hz, 1.3A AC Input cable: 1.8m, unshielded DC O/P: 12V, 4A

4. There are six antennas provided to this EUT, please refer to the following table:

Antenna No.	Transmitter Circuit	Brand	Model	Gain (dBi) (Include cable loss)	Frequency range (GHz to GHz)	Antenna Type	Connector Type	Cable Length (mm)
LB1	2	Galtronics	02102073-05762B1	2.84	2.4~2.4835	Dipole	i-pex(MHF)	310
LB2	0	Galtronics	02102073-05762C1	3.8	2.4~2.4835	PCB	i-pex(MHF)	161
LB3	1	Galtronics	02102073-05762A1	4.87	2.4~2.4835	PCB	i-pex(MHF)	66
HB1	0	Galtronics	02102142-05762B2	5.50 5.27	5.15~5.35 5.47~5.85	Dipole	i-pex(MHF)	130
HB2	2	Galtronics	02102142-05762B1	4.75 5.68	5.15~5.35 5.47~5.85	Dipole	i-pex(MHF)	80
HB3	1	Galtronics	02102142-05762B3	4.03 5.74	5.15~5.35 5.47~5.85	Dipole	i-pex(MHF)	170

5. The EUT incorporates a MIMO function.

MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	1TX 2TX CDD 3TX CDD	3RX
802.11b	1 ~ 11Mbps	1TX 2TX CDD 3TX CDD	3RX
802.11g	6 ~ 54Mbps	1TX 2TX CDD 3TX CDD	3RX
802.11n (HT20) & 802.11n (HT40)	MCS 0~7	1TX 2TX CDD / beamforming 3TX CDD / beamforming	3RX
	MCS 8~15	2TX beamforming 3TX CDD / beamforming	3RX
	MCS 16~23	3TX / beamforming	3RX
802.11ac (VHT20)	MCS0~8 Nss= 1	1TX 2Tx CDD / beamforming 3TX CDD / beamforming	3RX
	MCS0~8 Nss= 2	2TX beamforming 3TX CDD / beamforming	3RX
	MCS0~9 Nss= 3	3TX / beamforming	3RX
802.11ac (VHT40) & 802.11ac (VHT80)	MCS0~9 Nss= 1	1TX 2Tx CDD / beamforming 3TX CDD / beamforming	3RX
	MCS0~9 Nss= 2	2TX CDD / beamforming 3TX CDD / beamforming	3RX
	MCS0~9 Nss= 3	3TX / beamforming	3RX

Note: The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)



A D T

6. The emission of the simultaneous operation (2.4GHz & 5GHz) has been evaluated and no non-compliance was found.
7. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
1	√	√	√	√	√	3TX / CDD Mode
2	-	-	-	√	√	3TX / Beamforming Mode

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5	1

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (MBPS)	EUT CONFIGURE MODE
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5	1



RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	1
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	1
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5	1

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	1
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	1, 2
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5	1, 2

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	EUT CONFIGURE MODE
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	1
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	1, 2
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5	1, 2



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	30deg. C, 70%RH	120Vac, 60Hz	Mike Hsieh
RE<1G	23deg. C, 68%RH	120Vac, 60Hz	Robert Cheng
RE≥1G	25deg. C, 67%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	James Chan
OB	25deg. C, 60%RH	120Vac, 60Hz	James Chan



A D T

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r02

662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

3.4 DUTY CYCLE OF TEST SIGNAL

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = 12.42 ms/12.48 ms = 0.995

802.11g: Duty cycle = 2.063 ms/2.083 ms = 0.990

802.11n (HT20): Duty cycle = 0.975 ms/0.993 ms = 0.982

802.11n (HT40): Duty cycle = 0.49 ms/0.51 ms = 0.961, Duty factor = $10 * \log(1/0.961) = 0.17$

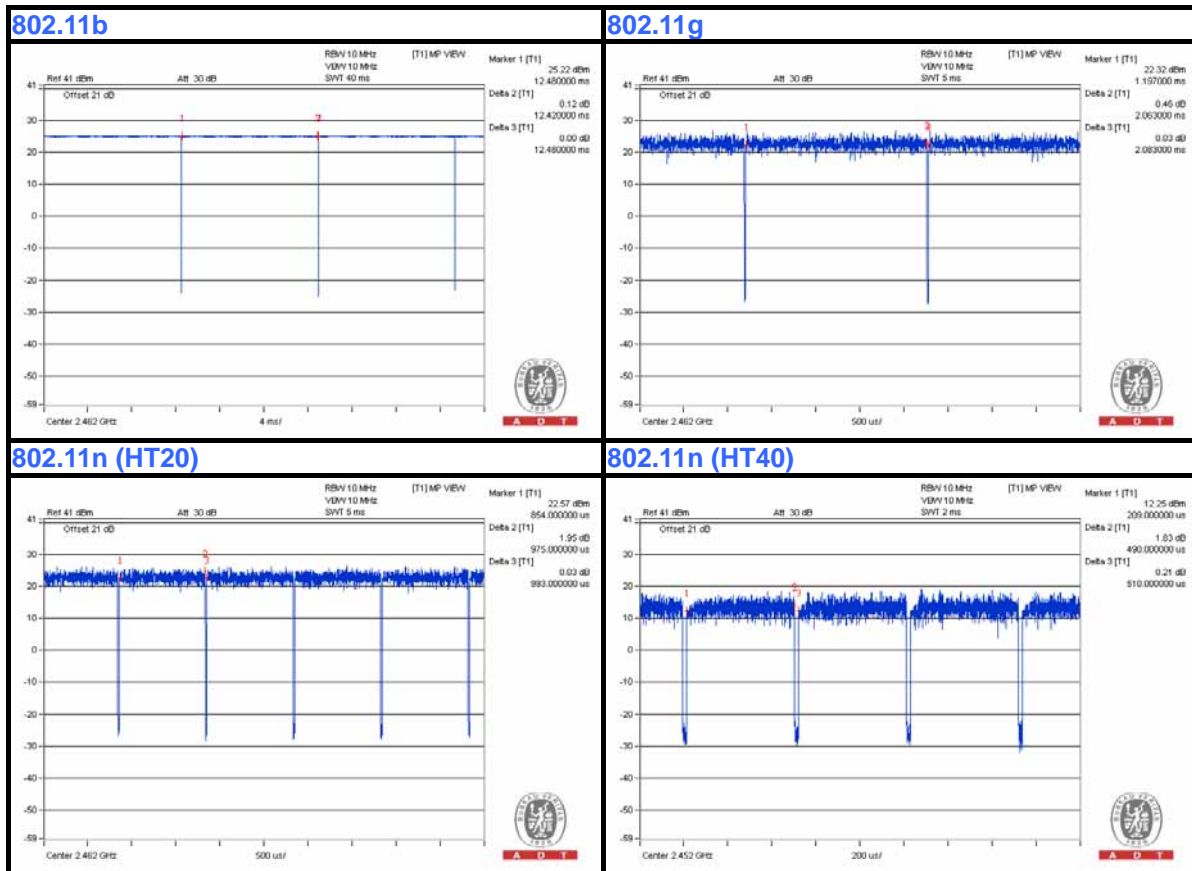



A D T

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID	Remark
A	NOTEBOOK COMPUTER	DELL	E5430	7YV4VY1	FCC DoC	Provided by Lab
B	iPod shuffle (For other test items)	Apple	MC749TA/A	CC4DN25WDFDM	NA	Provided by Lab
	iPod shuffle (For conducted emission test)	Apple	MD778TA/A	CC4JMCXF4T1	NA	Provided by Lab
C	iPod shuffle (For other test items)	Apple	MC749TA/A	CC4DMFKUDFDM	NA	Provided by Lab
	iPod shuffle (For conducted emission test)	Apple	MD778TA/A	CC4JMH7LF4T1	NA	Provided by Lab
D	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC	Provided by Lab

NOTE:

1. All power cords of the above support units are non-shielded (1.8 m).

No.	Cable	Qty.	Length (m)	Shielded (Yes/ No)	Cores (Number)	Remark
1.	RJ-45	3	10	No	0	Provided by Lab
2.	Coaxial	1	10	Yes	0	Provided by Lab
3.	AC	1	1.8	No	0	Supplied by client
4.	USB	1	0.1	Yes	0	Provided by Lab
5.	USB	1	0.1	Yes	0	Provided by Lab
6.	RJ-45	1	10	No	0	Provided by Lab

3.6 CONFIGURATION OF SYSTEM UNDER TEST

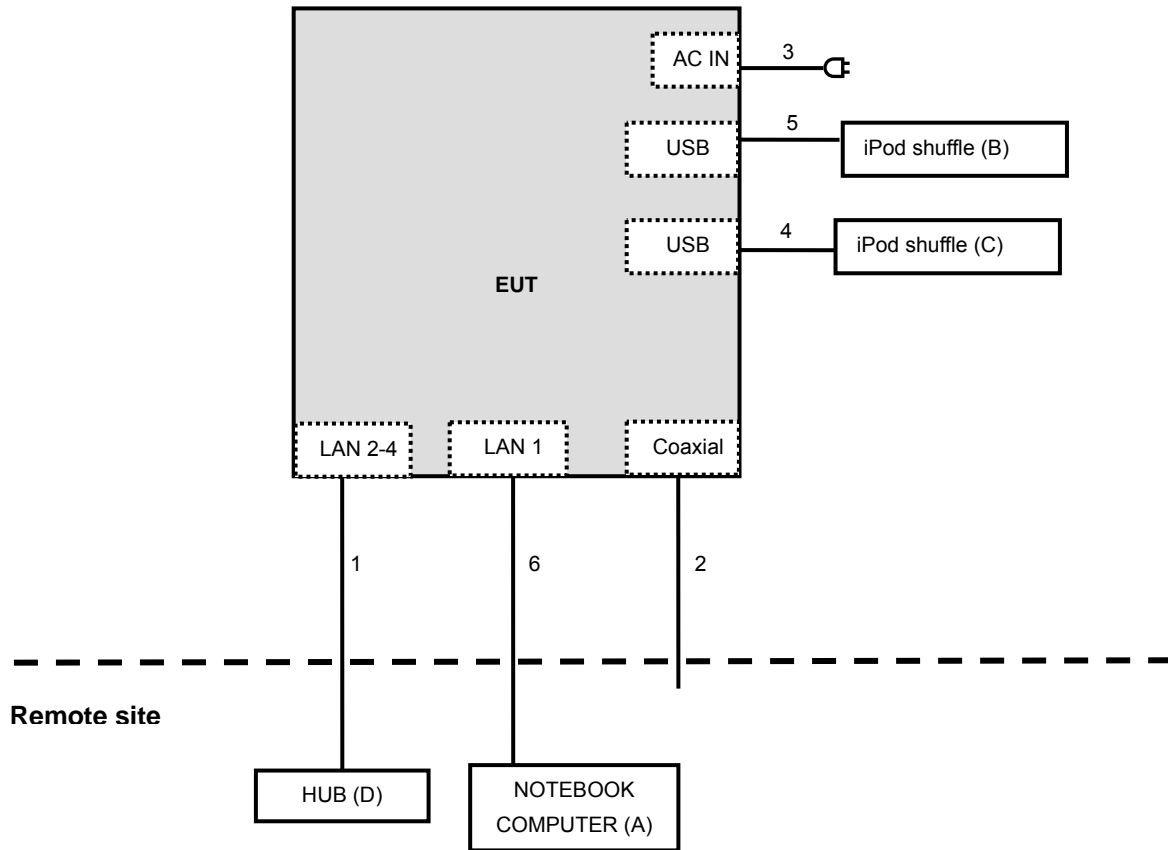



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Apr. 29, 2014	Apr. 28, 2015
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 12, 2013	Sep. 11, 2014
Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ	ENV216	100071	Nov. 13, 2013	Nov. 12, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 10 , 2014	Mar. 09, 2015
50 ohms Terminator	N/A	EMC-03	Sep. 24, 2013	Sep. 23, 2014
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2013	Sep. 30, 2014
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Sep. 10, 2014

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

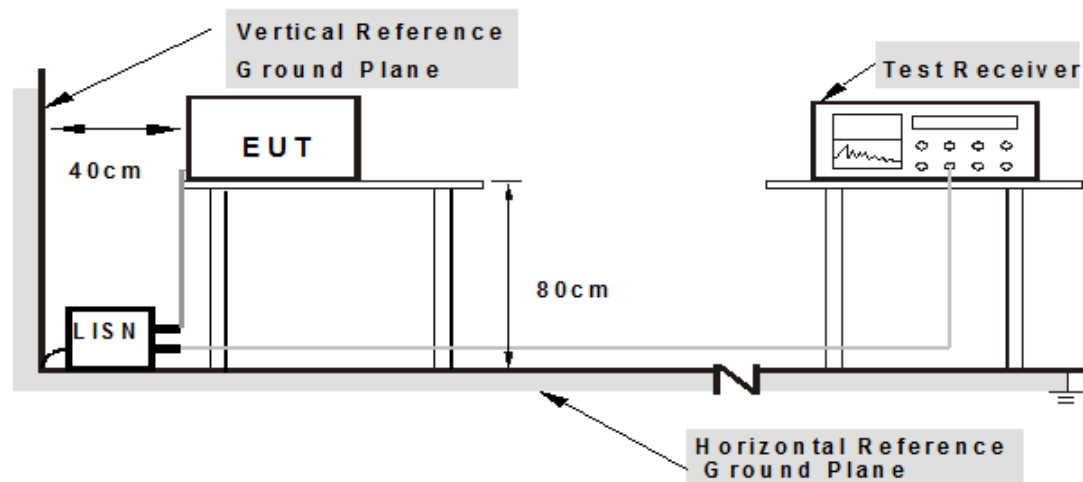

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



A D T

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared computer system (support unit A) to act as communication partner.
3. The communication partner ran test program "Mtool.exe[2.0.1.1]" to enable EUT under transmission/receiving condition continuously.


4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.17734	0.07	44.62	36.34	44.69	36.41	64.61
2	0.24375	0.07	38.68	31.59	38.75	31.66	61.97	51.97	-23.21	-20.30
3	0.35313	0.09	40.50	27.37	40.59	27.46	58.89	48.89	-18.30	-21.43
4	0.54063	0.10	37.26	26.88	37.36	26.98	56.00	46.00	-18.64	-19.02
5	14.16797	0.57	30.12	24.24	30.69	24.81	60.00	50.00	-29.31	-25.19
6	29.92969	1.00	33.12	28.08	34.12	29.08	60.00	50.00	-25.88	-20.92

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

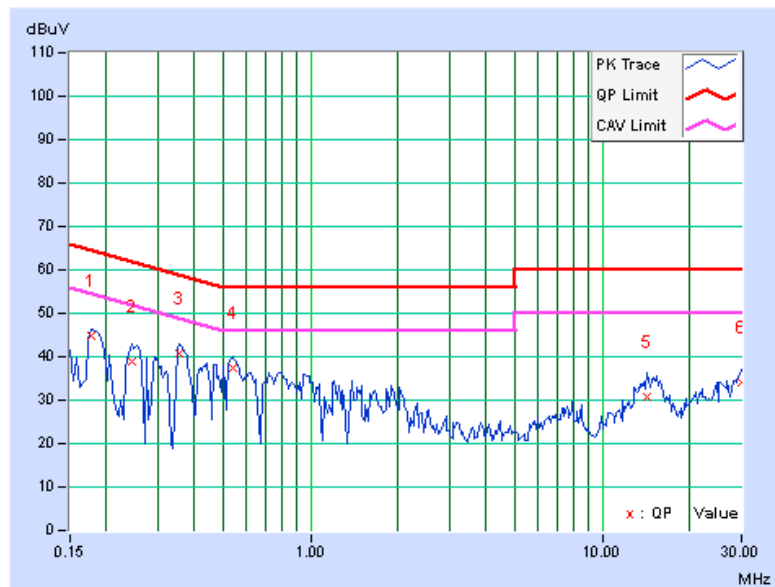


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	0.07	43.55	34.06	43.62	34.13	64.61	54.61	-20.99	-20.48
2	0.25938	0.08	39.36	23.26	39.44	23.34	61.45	51.45	-22.02	-28.12
3	0.35313	0.09	41.36	27.81	41.45	27.90	58.89	48.89	-17.44	-20.99
4	0.54063	0.10	38.50	28.09	38.60	28.19	56.00	46.00	-17.40	-17.81
5	14.92578	0.58	33.07	26.64	33.65	27.22	60.00	50.00	-26.35	-22.78
6	29.72266	0.98	35.13	30.25	36.11	31.23	60.00	50.00	-23.89	-18.77

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

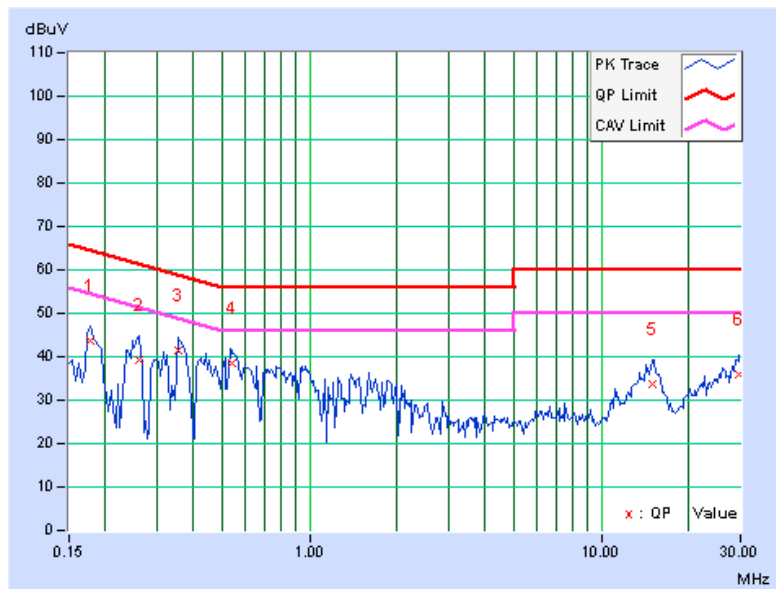



A D T

4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.



A D T

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	July 21, 2014	July 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Feb. 26, 2014	Feb. 25, 2015
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 05, 2014	July 04, 2015
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 24, 2014	June 23, 2015
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Sep. 18 to 19, 2014

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

<Frequency Range below 1GHz>

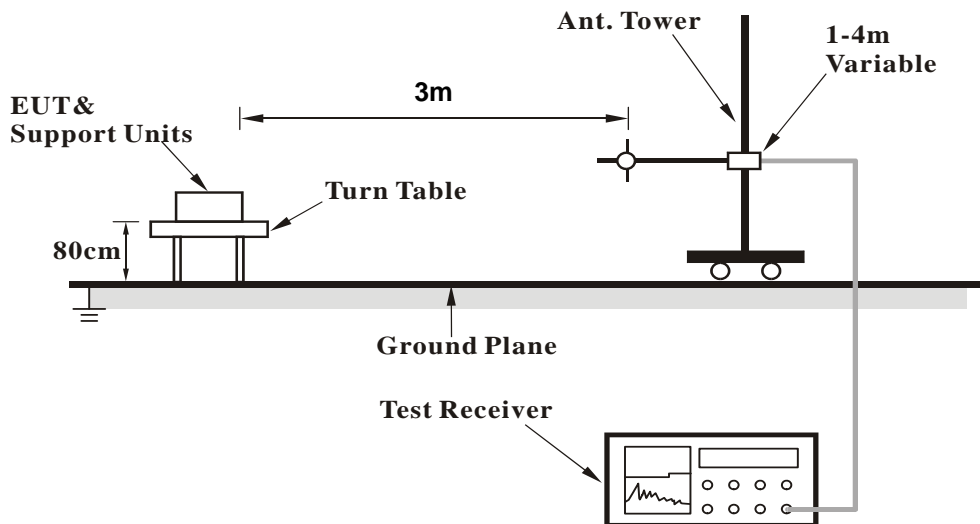

<Frequency Range above 1GHz>

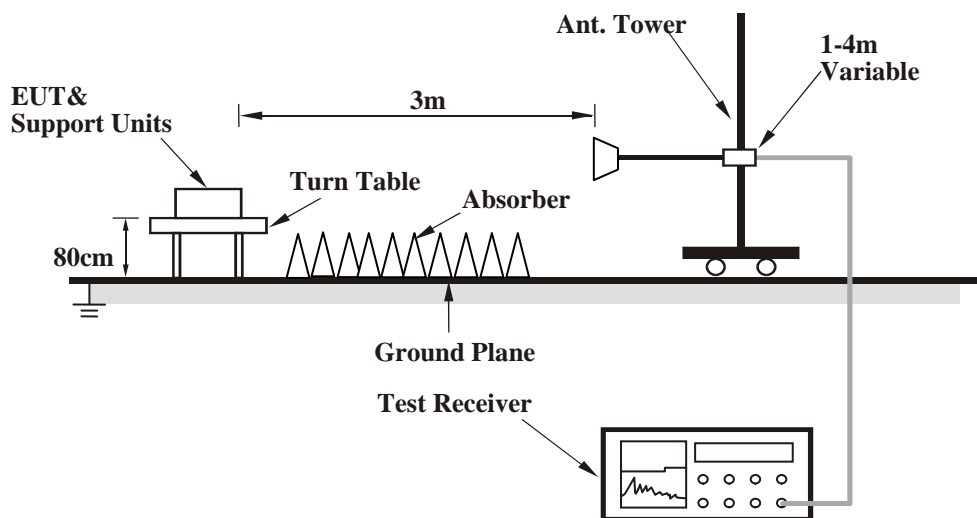

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11n (HT20)

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	108.81	28.8 QP	43.5	-14.7	2.00 H	87	45.28	-16.45
2	125.01	31.2 QP	43.5	-12.4	2.00 H	274	46.07	-14.92
3	250.00	32.9 QP	46.0	-13.2	1.00 H	299	47.17	-14.32
4	500.01	34.5 QP	46.0	-11.6	1.50 H	243	41.81	-7.36
5	625.00	40.0 QP	46.0	-6.0	1.00 H	252	44.45	-4.41
6	651.96	34.0 QP	46.0	-12.0	1.00 H	216	38.06	-4.08
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.57	34.8 QP	40.0	-5.2	1.00 V	131	48.83	-14.00
2	98.48	25.9 QP	43.5	-17.6	1.50 V	312	44.10	-18.20
3	380.51	35.3 QP	46.0	-10.7	1.00 V	350	45.39	-10.09
4	390.70	31.7 QP	46.0	-14.3	1.00 V	100	41.56	-9.90
5	500.01	34.1 QP	46.0	-11.9	1.00 V	243	41.46	-7.36
6	628.64	34.3 QP	46.0	-11.8	1.00 V	286	38.61	-4.36

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	114.9 PK			1.41 H	247	117.27	-2.37
2	*2412.00	111.9 AV			1.41 H	247	114.27	-2.37
3	2491.00	59.3 PK	74.0	-14.7	1.36 H	244	61.31	-2.01
4	2491.00	53.5 AV	54.0	-0.5	1.36 H	244	55.51	-2.01
5	4824.00	47.7 PK	74.0	-26.3	1.09 H	273	41.99	5.71
6	4824.00	39.8 AV	54.0	-14.2	1.09 H	273	34.09	5.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	113.5 PK			1.10 V	270	115.87	-2.37
2	*2412.00	111.1 AV			1.10 V	270	113.47	-2.37
3	2491.00	55.3 PK	74.0	-18.7	1.79 V	203	57.31	-2.01
4	2491.00	49.2 AV	54.0	-4.8	1.79 V	203	51.21	-2.01
5	4824.00	49.2 PK	74.0	-24.8	1.02 V	263	43.49	5.71
6	4824.00	43.3 AV	54.0	-10.7	1.02 V	263	37.59	5.71

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2355.00	56.5 PK	74.0	-17.5	1.23 H	138	59.13	-2.63
2	2355.00	49.5 AV	54.0	-4.5	1.23 H	138	52.13	-2.63
3	*2437.00	118.7 PK			1.42 H	244	120.95	-2.25
4	*2437.00	115.8 AV			1.42 H	244	118.05	-2.25
5	4874.00	48.1 PK	74.0	-25.9	1.12 H	279	42.20	5.90
6	4874.00	40.3 AV	54.0	-13.7	1.12 H	279	34.40	5.90
7	7311.00	57.9 PK	74.0	-16.1	1.16 H	62	44.73	13.17
8	7311.00	52.0 AV	54.0	-2.0	1.16 H	62	38.83	13.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2355.00	56.2 PK	74.0	-17.8	1.15 V	270	58.83	-2.63
2	2355.00	49.4 AV	54.0	-4.6	1.15 V	270	52.03	-2.63
3	*2437.00	115.0 PK			1.37 V	274	117.25	-2.25
4	*2437.00	112.0 AV			1.37 V	274	114.25	-2.25
5	4874.00	49.2 PK	74.0	-24.8	1.00 V	259	43.30	5.90
6	4874.00	43.0 AV	54.0	-11.0	1.00 V	259	37.10	5.90
7	7311.00	59.3 PK	74.0	-14.7	1.05 V	267	46.13	13.17
8	7311.00	53.5 AV	54.0	-0.5	1.05 V	267	40.33	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2381.00	59.6 PK	74.0	-14.4	1.23 H	136	62.10	-2.50
2	2381.00	53.8 AV	54.0	-0.2	1.23 H	136	56.30	-2.50
3	*2462.00	115.5 PK			1.16 H	90	117.64	-2.14
4	*2462.00	112.6 AV			1.16 H	90	114.74	-2.14
5	4924.00	47.0 PK	74.0	-27.0	1.22 H	106	40.89	6.11
6	4924.00	38.1 AV	54.0	-15.9	1.22 H	106	31.99	6.11
7	7386.00	54.4 PK	74.0	-19.6	1.12 H	66	41.22	13.18
8	7386.00	48.5 AV	54.0	-5.5	1.12 H	66	35.32	13.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2381.00	56.5 PK	74.0	-17.5	1.00 V	274	59.00	-2.50
2	2381.00	51.9 AV	54.0	-2.1	1.00 V	274	54.40	-2.50
3	*2462.00	110.8 PK			1.34 V	88	112.94	-2.14
4	*2462.00	108.3 AV			1.34 V	88	110.44	-2.14
5	4924.00	48.9 PK	74.0	-25.1	1.02 V	271	42.79	6.11
6	4924.00	42.8 AV	54.0	-11.2	1.02 V	271	36.69	6.11
7	7386.00	55.9 PK	74.0	-18.1	1.07 V	268	42.72	13.18
8	7386.00	50.2 AV	54.0	-3.8	1.07 V	268	37.02	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.7 PK	74.0	-0.3	1.42 H	243	76.17	-2.47
2	2390.00	52.2 AV	54.0	-1.8	1.42 H	243	54.67	-2.47
3	*2412.00	115.7 PK			1.42 H	243	118.07	-2.37
4	*2412.00	105.4 AV			1.42 H	243	107.77	-2.37
5	2485.60	60.7 PK	74.0	-13.3	1.16 H	145	62.72	-2.02
6	2485.60	50.1 AV	54.0	-3.9	1.16 H	145	52.12	-2.02
7	4824.00	46.9 PK	74.0	-27.1	1.17 H	90	41.19	5.71
8	4824.00	38.1 AV	54.0	-15.9	1.17 H	90	32.39	5.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.5 PK	74.0	-6.5	1.30 V	90	69.97	-2.47
2	2390.00	47.9 AV	54.0	-6.1	1.30 V	90	50.37	-2.47
3	*2412.00	111.0 PK			1.30 V	90	113.37	-2.37
4	*2412.00	101.1 AV			1.30 V	90	103.47	-2.37
5	2485.60	56.5 PK	74.0	-17.5	1.18 V	270	58.52	-2.02
6	2485.60	49.6 AV	54.0	-4.4	1.18 V	270	51.62	-2.02
7	4824.00	47.1 PK	74.0	-26.9	1.03 V	277	41.39	5.71
8	4824.00	38.8 AV	54.0	-15.2	1.03 V	277	33.09	5.71

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2388.10	59.7 PK	74.0	-14.3	1.39 H	242	62.18	-2.48
2	2388.10	43.8 AV	54.0	-10.2	1.39 H	242	46.28	-2.48
3	*2437.00	120.8 PK			1.39 H	242	123.05	-2.25
4	*2437.00	111.4 AV			1.39 H	242	113.65	-2.25
5	2484.50	67.2 PK	74.0	-6.8	1.39 H	242	69.22	-2.02
6	2484.50	50.3 AV	54.0	-3.7	1.39 H	242	52.32	-2.02
7	4874.00	47.1 PK	74.0	-26.9	1.21 H	88	41.20	5.90
8	4874.00	38.1 AV	54.0	-15.9	1.21 H	88	32.20	5.90
9	7311.00	60.4 PK	74.0	-13.6	1.11 H	74	47.23	13.17
10	7311.00	48.5 AV	54.0	-5.5	1.11 H	74	35.33	13.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2388.10	58.4 PK	74.0	-15.6	1.26 V	76	60.88	-2.48
2	2388.10	42.1 AV	54.0	-11.9	1.26 V	76	44.58	-2.48
3	*2437.00	116.2 PK			1.26 V	76	118.45	-2.25
4	*2437.00	107.1 AV			1.26 V	76	109.35	-2.25
5	2484.50	56.5 PK	74.0	-17.5	1.15 V	274	58.52	-2.02
6	2484.50	49.8 AV	54.0	-4.2	1.15 V	274	51.82	-2.02
7	4874.00	47.0 PK	74.0	-27.0	1.01 V	263	41.10	5.90
8	4874.00	38.6 AV	54.0	-15.4	1.01 V	263	32.70	5.90
9	7311.00	60.5 PK	74.0	-13.5	1.07 V	240	47.33	13.17
10	7311.00	48.6 AV	54.0	-5.4	1.07 V	240	35.43	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.20	59.8 PK	74.0	-14.2	1.18 H	151	62.29	-2.49
2	2385.20	49.0 AV	54.0	-5.0	1.18 H	151	51.49	-2.49
3	*2462.00	116.8 PK			1.35 H	243	118.94	-2.14
4	*2462.00	107.0 AV			1.35 H	243	109.14	-2.14
5	2483.50	73.2 PK	74.0	-0.8	1.35 H	243	75.23	-2.03
6	2483.50	51.6 AV	54.0	-2.4	1.35 H	243	53.63	-2.03
7	4924.00	47.2 PK	74.0	-26.8	1.21 H	97	41.09	6.11
8	4924.00	37.9 AV	54.0	-16.1	1.21 H	97	31.79	6.11
9	7386.00	58.1 PK	74.0	-15.9	1.12 H	86	44.92	13.18
10	7386.00	46.9 AV	54.0	-7.1	1.12 H	86	33.72	13.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.20	56.8 PK	74.0	-17.2	1.16 V	285	59.29	-2.49
2	2385.20	49.8 AV	54.0	-4.2	1.16 V	285	52.29	-2.49
3	*2462.00	112.2 PK			1.31 V	70	114.34	-2.14
4	*2462.00	102.7 AV			1.31 V	70	104.84	-2.14
5	2483.50	67.6 PK	74.0	-6.4	1.31 V	70	69.63	-2.03
6	2483.50	47.9 AV	54.0	-6.1	1.31 V	70	49.93	-2.03
7	4924.00	46.3 PK	74.0	-27.7	1.06 V	259	40.19	6.11
8	4924.00	38.1 AV	54.0	-15.9	1.06 V	259	31.99	6.11
9	7386.00	58.2 PK	74.0	-15.8	1.13 V	225	45.02	13.18
10	7386.00	47.1 AV	54.0	-6.9	1.13 V	225	33.92	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.2 PK	74.0	-0.8	1.44 H	156	75.67	-2.47
2	2390.00	52.5 AV	54.0	-1.5	1.44 H	156	54.97	-2.47
3	*2412.00	116.0 PK			1.44 H	156	118.37	-2.37
4	*2412.00	104.8 AV			1.44 H	156	107.17	-2.37
5	2483.70	64.4 PK	74.0	-9.6	1.19 H	162	66.43	-2.03
6	2483.70	50.0 AV	54.0	-4.0	1.19 H	162	52.03	-2.03
7	4824.00	46.6 PK	74.0	-27.4	1.18 H	91	40.89	5.71
8	4824.00	37.9 AV	54.0	-16.1	1.18 H	91	32.19	5.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.9 PK	74.0	-6.1	1.26 V	85	70.37	-2.47
2	2390.00	48.1 AV	54.0	-5.9	1.26 V	85	50.57	-2.47
3	*2412.00	111.4 PK			1.33 V	60	113.77	-2.37
4	*2412.00	100.4 AV			1.33 V	60	102.77	-2.37
5	2483.70	56.8 PK	74.0	-17.2	1.14 V	300	58.83	-2.03
6	2483.70	48.7 AV	54.0	-5.3	1.14 V	300	50.73	-2.03
7	4824.00	47.6 PK	74.0	-26.4	1.08 V	291	41.89	5.71
8	4824.00	39.1 AV	54.0	-14.9	1.08 V	291	33.39	5.71

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	64.0 PK	74.0	-10.0	1.23 H	159	66.47	-2.47
2	2390.00	48.1 AV	54.0	-5.9	1.23 H	159	50.57	-2.47
3	*2437.00	121.0 PK			1.23 H	159	123.25	-2.25
4	*2437.00	111.1 AV			1.23 H	159	113.35	-2.25
5	2483.50	65.3 PK	74.0	-8.7	1.23 H	159	67.33	-2.03
6	2483.50	49.1 AV	54.0	-4.9	1.23 H	159	51.13	-2.03
7	4874.00	46.1 PK	74.0	-27.9	1.23 H	85	40.20	5.90
8	4874.00	37.5 AV	54.0	-16.5	1.23 H	85	31.60	5.90
9	7311.00	53.8 PK	74.0	-20.2	1.14 H	70	40.63	13.17
10	7311.00	48.0 AV	54.0	-6.0	1.14 H	70	34.83	13.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.4 PK	74.0	-17.6	1.37 V	50	58.87	-2.47
2	2390.00	46.4 AV	54.0	-7.6	1.37 V	50	48.87	-2.47
3	*2437.00	116.4 PK			1.37 V	50	118.65	-2.25
4	*2437.00	106.7 AV			1.37 V	50	108.95	-2.25
5	2483.50	60.0 PK	74.0	-14.0	1.37 V	50	62.03	-2.03
6	2483.50	44.7 AV	54.0	-9.3	1.37 V	50	46.73	-2.03
7	4874.00	47.0 PK	74.0	-27.0	1.04 V	299	41.10	5.90
8	4874.00	38.8 AV	54.0	-15.2	1.04 V	299	32.90	5.90
9	7311.00	53.6 PK	74.0	-20.4	1.04 V	263	40.43	13.17
10	7311.00	47.9 AV	54.0	-6.1	1.04 V	263	34.73	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.4 PK			1.69 H	171	118.54	-2.14
2	*2462.00	105.9 AV			1.69 H	171	108.04	-2.14
3	2485.20	73.4 PK	74.0	-0.6	1.69 H	171	75.42	-2.02
4	2485.20	51.9 AV	54.0	-2.1	1.69 H	171	53.92	-2.02
5	4924.00	45.9 PK	74.0	-28.1	1.19 H	72	39.79	6.11
6	4924.00	37.5 AV	54.0	-16.5	1.19 H	72	31.39	6.11
7	7386.00	53.6 PK	74.0	-20.4	1.14 H	80	40.42	13.18
8	7386.00	47.7 AV	54.0	-6.3	1.14 H	80	34.52	13.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.8 PK			1.36 V	35	113.94	-2.14
2	*2462.00	101.5 AV			1.36 V	35	103.64	-2.14
3	2485.20	67.8 PK	74.0	-6.2	1.36 V	35	69.82	-2.02
4	2485.20	48.2 AV	54.0	-5.8	1.36 V	35	50.22	-2.02
5	4924.00	45.6 PK	74.0	-28.4	1.06 V	304	39.49	6.11
6	4924.00	37.7 AV	54.0	-16.3	1.06 V	304	31.59	6.11
7	7386.00	53.7 PK	74.0	-20.3	1.04 V	247	40.52	13.18
8	7386.00	47.6 AV	54.0	-6.4	1.04 V	247	34.42	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.4 PK	74.0	-1.6	1.23 H	144	74.87	-2.47
2	2390.00	53.5 AV	54.0	-0.5	1.23 H	144	55.97	-2.47
3	*2422.00	111.3 PK			1.23 H	144	113.62	-2.32
4	*2422.00	100.9 AV			1.23 H	144	103.22	-2.32
5	4844.00	46.3 PK	74.0	-27.7	1.16 H	82	40.52	5.78
6	4844.00	37.7 AV	54.0	-16.3	1.16 H	82	31.92	5.78
7	7266.00	53.2 PK	74.0	-20.8	1.20 H	72	40.00	13.20
8	7266.00	47.3 AV	54.0	-6.7	1.20 H	72	34.10	13.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.7 PK	74.0	-6.3	1.42 V	30	70.17	-2.47
2	2390.00	48.3 AV	54.0	-5.7	1.42 V	30	50.77	-2.47
3	*2422.00	106.7 PK			1.42 V	30	109.02	-2.32
4	*2422.00	96.5 AV			1.42 V	30	98.82	-2.32
5	4844.00	47.1 PK	74.0	-26.9	1.01 V	312	41.32	5.78
6	4844.00	38.9 AV	54.0	-15.1	1.01 V	312	33.12	5.78
7	7266.00	53.4 PK	74.0	-20.6	1.07 V	260	40.20	13.20
8	7266.00	47.8 AV	54.0	-6.2	1.07 V	260	34.60	13.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.2 PK	74.0	-11.8	1.20 H	152	64.67	-2.47
2	2390.00	46.8 AV	54.0	-7.2	1.20 H	152	49.27	-2.47
3	*2437.00	113.7 PK			1.20 H	152	115.95	-2.25
4	*2437.00	103.1 AV			1.20 H	152	105.35	-2.25
5	2485.40	73.2 PK	74.0	-0.8	1.20 H	152	75.22	-2.02
6	2485.40	51.2 AV	54.0	-2.8	1.20 H	152	53.22	-2.02
7	4874.00	46.0 PK	74.0	-28.0	1.22 H	67	40.10	5.90
8	4874.00	37.5 AV	54.0	-16.5	1.22 H	67	31.60	5.90
9	7311.00	53.6 PK	74.0	-20.4	1.09 H	66	40.43	13.17
10	7311.00	47.5 AV	54.0	-6.5	1.09 H	66	34.33	13.17

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.2 PK	74.0	-12.8	1.36 V	25	63.67	-2.47
2	2390.00	44.3 AV	54.0	-9.7	1.36 V	25	46.77	-2.47
3	*2437.00	109.1 PK			1.36 V	25	111.35	-2.25
4	*2437.00	98.7 AV			1.36 V	25	100.95	-2.25
5	2485.40	68.0 PK	74.0	-6.0	1.36 V	25	70.02	-2.02
6	2485.40	48.7 AV	54.0	-5.3	1.36 V	25	50.72	-2.02
7	4874.00	46.8 PK	74.0	-27.2	1.03 V	327	40.90	5.90
8	4874.00	38.8 AV	54.0	-15.2	1.03 V	327	32.90	5.90
9	7311.00	53.5 PK	74.0	-20.5	1.10 V	276	40.33	13.17
10	7311.00	47.6 AV	54.0	-6.4	1.10 V	276	34.43	13.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	110.8 PK			1.20 H	145	112.98	-2.18
2	*2452.00	100.4 AV			1.20 H	145	102.58	-2.18
3	2485.80	70.0 PK	74.0	-4.0	1.20 H	145	72.02	-2.02
4	2485.80	53.6 AV	54.0	-0.4	1.20 H	145	55.62	-2.02
5	4904.00	46.3 PK	74.0	-27.7	1.19 H	73	40.28	6.02
6	4904.00	37.6 AV	54.0	-16.4	1.19 H	73	31.58	6.02
7	7356.00	54.1 PK	74.0	-19.9	1.05 H	69	40.92	13.18
8	7356.00	47.9 AV	54.0	-6.1	1.05 H	69	34.72	13.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	106.2 PK			1.41 V	23	108.38	-2.18
2	*2452.00	96.1 AV			1.41 V	23	98.28	-2.18
3	2485.80	68.0 PK	74.0	-6.0	1.41 V	23	70.02	-2.02
4	2485.80	48.5 AV	54.0	-5.5	1.41 V	23	50.52	-2.02
5	4904.00	47.0 PK	74.0	-27.0	1.06 V	336	40.98	6.02
6	4904.00	38.9 AV	54.0	-15.1	1.06 V	336	32.88	6.02
7	7356.00	54.3 PK	74.0	-19.7	1.08 V	268	41.12	13.18
8	7356.00	47.9 AV	54.0	-6.1	1.08 V	268	34.72	13.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Sep. 23, 2014


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS (MODE 1)

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	8.60	9.04	9.06	0.5	PASS
6	2437	9.07	8.61	9.08	0.5	PASS
11	2462	8.14	8.58	8.61	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	16.39	16.40	16.43	0.5	PASS
6	2437	16.39	16.40	15.51	0.5	PASS
11	2462	16.41	16.40	16.42	0.5	PASS

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	17.64	17.68	17.67	0.5	PASS
6	2437	17.70	17.65	16.24	0.5	PASS
11	2462	17.74	17.66	17.65	0.5	PASS

802.11n (HT40)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
3	2422	36.47	36.42	36.44	0.5	PASS
6	2437	36.33	36.48	36.43	0.5	PASS
9	2452	36.52	36.05	36.16	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / Chain(0) : CH11

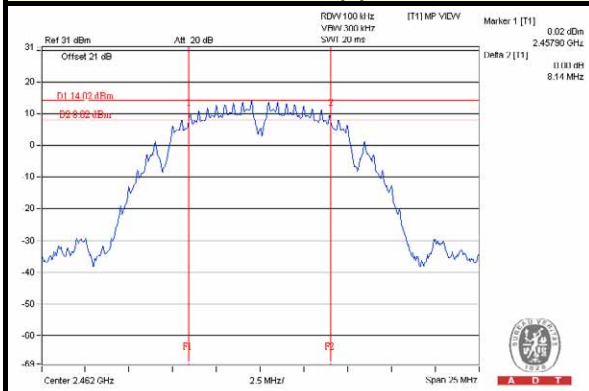


802.11g / Chain(2) : CH6

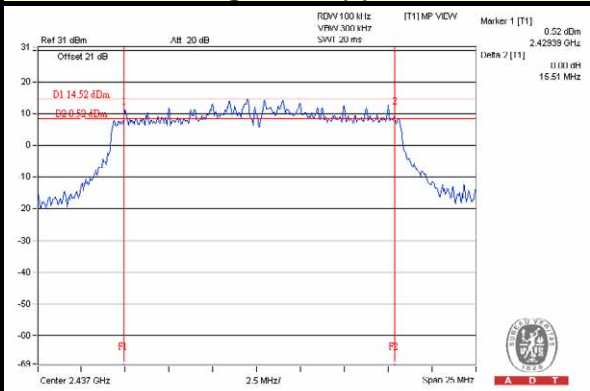

802.11n (HT20) / Chain(2) : CH6

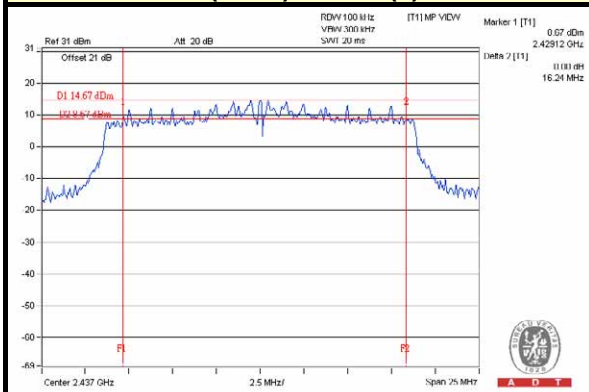

802.11n (HT40) / Chain(1) : CH9

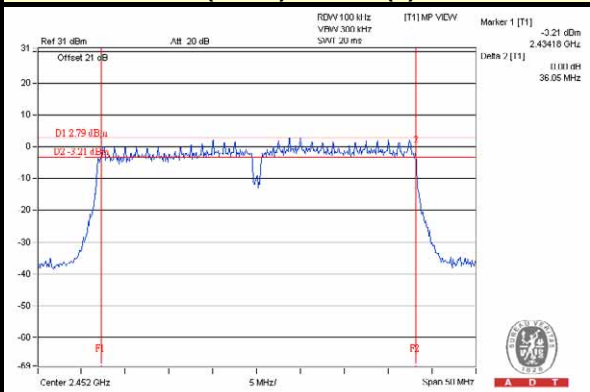



A D T


4.3.8 TEST RESULTS (MODE 2)

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	17.64	17.68	17.67	0.5	PASS
6	2437	17.62	17.65	17.59	0.5	PASS
11	2462	17.74	17.66	17.65	0.5	PASS

802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
3	2422	36.47	36.42	36.44	0.5	PASS
6	2437	36.33	36.48	36.43	0.5	PASS
9	2452	36.52	36.05	36.16	0.5	PASS

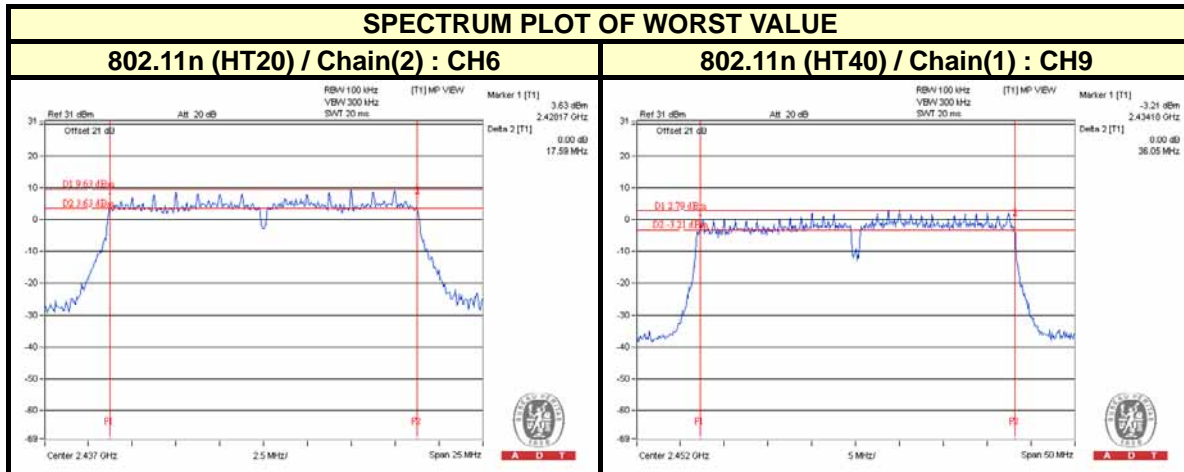



A D T

4.4 CONDUCTED OUTPUT POWER MEASUREMENT

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT \leq 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths \geq 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT \geq 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power meter Anritsu	ML2495A	1014008	Apr. 30, 2014	Apr. 29, 2015
Power sensor Anritsu	MA2411B	0917122	Apr. 30, 2014	Apr. 29, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Sep. 23, 2014


4.4.3 TEST PROCEDURES

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the average power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

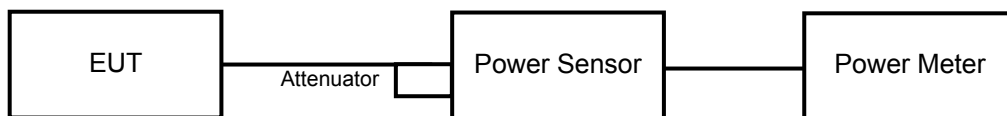

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS(MODE 1)

802.11b

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	20.98	20.86	20.81	367.717	25.66	30	PASS
6	2437	24.29	24.32	24.30	808.083	29.07	30	PASS
11	2462	20.26	20.20	20.38	320.027	25.05	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	20.40	20.27	20.46	327.235	25.15	30	PASS
6	2437	25.20	25.30	25.01	986.932	29.94	30	PASS
11	2462	20.38	20.43	20.37	328.445	25.16	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	19.10	19.03	19.39	248.162	23.95	30	PASS
6	2437	25.10	25.26	25.27	995.844	29.98	30	PASS
11	2462	19.00	19.13	19.30	246.393	23.92	30	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
3	2422	18.51	18.58	18.61	215.680	23.34	30	PASS
6	2437	19.21	19.27	19.39	254.792	24.06	30	PASS
9	2452	16.16	16.18	16.45	126.957	21.04	30	PASS



A D T

4.4.8 TEST RESULTS(MODE 2)

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	19.10	19.03	19.39	248.162	23.95	27.35	PASS
6	2437	22.37	22.55	22.52	531.12	27.25	27.35	PASS
11	2462	19.00	19.13	19.30	246.393	23.92	27.35	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.65\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(8.65-6) = 27.35\text{dBm}$.

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
3	2422	18.51	18.58	18.61	215.68	23.34	27.35	PASS
6	2437	19.21	19.27	19.39	254.792	24.06	27.35	PASS
9	2452	16.16	16.18	16.45	126.957	21.04	27.35	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 8.65\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(8.65-6) = 27.35\text{dBm}$.

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Sep. 23, 2014


4.5.3 TEST PROCEDURE

1. Set the RBW = 10 kHz, VBW =30 kHz, Detector = power averaging (RMS).
2. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.5.7 TEST RESULTS(MODE 1)

802.11b

TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm)	10 log (N=3) dB	Total PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-7.00	4.77	-2.23	5.35	PASS
	6	2437	-4.57	4.77	0.20	5.35	PASS
	11	2462	-5.68	4.77	-0.91	5.35	PASS
1	1	2412	-6.48	4.77	-1.71	5.35	PASS
	6	2437	-3.23	4.77	1.54	5.35	PASS
	11	2462	-5.92	4.77	-1.15	5.35	PASS
2	1	2412	-7.09	4.77	-2.32	5.35	PASS
	6	2437	-4.46	4.77	0.31	5.35	PASS
	11	2462	-6.15	4.77	-1.38	5.35	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3]$ = 8.65dBi > 6dBi , so the power density limit shall be reduced to $8-(8.65-6) = 5.35$ dBm.

802.11g

TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm)	10 log (N=3) dB	Total PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-8.53	4.77	-3.76	5.35	PASS
	6	2437	-3.79	4.77	0.98	5.35	PASS
	11	2462	-8.33	4.77	-3.56	5.35	PASS
1	1	2412	-8.77	4.77	-4.00	5.35	PASS
	6	2437	-3.02	4.77	1.75	5.35	PASS
	11	2462	-8.03	4.77	-3.26	5.35	PASS
2	1	2412	-9.30	4.77	-4.53	5.35	PASS
	6	2437	-6.29	4.77	-1.52	5.35	PASS
	11	2462	-9.19	4.77	-4.42	5.35	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3]$ = 8.65dBi > 6dBi , so the power density limit shall be reduced to $8-(8.65-6) = 5.35$ dBm.



A D T

802.11n (HT20)

TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm)	10 log (N=3) dB	Total PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-10.71	4.77	-5.94	5.35	PASS
	6	2437	-4.49	4.77	0.28	5.35	PASS
	11	2462	-10.37	4.77	-5.60	5.35	PASS
1	1	2412	-11.29	4.77	-6.52	5.35	PASS
	6	2437	-4.12	4.77	0.65	5.35	PASS
	11	2462	-11.02	4.77	-6.25	5.35	PASS
2	1	2412	-11.92	4.77	-7.15	5.35	PASS
	6	2437	-6.03	4.77	-1.26	5.35	PASS
	11	2462	-11.54	4.77	-6.77	5.35	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3]$ = 8.65dBi > 6dBi , so the power density limit shall be reduced to 8-(8.65-6) =5.35dBm.

802.11n (HT40)

TX CHAIN	CHANNEL	FREQ. (MHz)	PSD W/O DUTY FACTOR (dBm)	10 log (N=3) dB	DUTY FACTOR (dB)	TOTAL PSD WITH DUTY FACTOR (dBm)	LIMIT (dBm)	PASS /FAIL
0	1	2412	-12.46	4.77	0.17	-7.52	5.35	PASS
	6	2437	-12.84	4.77	0.17	-7.90	5.35	PASS
	11	2462	-15.65	4.77	0.17	-10.71	5.35	PASS
1	1	2412	-13.16	4.77	0.17	-8.22	5.35	PASS
	6	2437	-12.48	4.77	0.17	-7.54	5.35	PASS
	11	2462	-15.40	4.77	0.17	-10.46	5.35	PASS
2	1	2412	-14.51	4.77	0.17	-9.57	5.35	PASS
	6	2437	-13.32	4.77	0.17	-8.38	5.35	PASS
	11	2462	-16.17	4.77	0.17	-11.23	5.35	PASS


NOTE: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3]$ = 8.65dBi > 6dBi , so the power density limit shall be reduced to 8-(8.65-6) =5.35dBm.
 2. Refer to section 3.4 for duty cycle spectrum plot.




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / Chain(1) : CH6

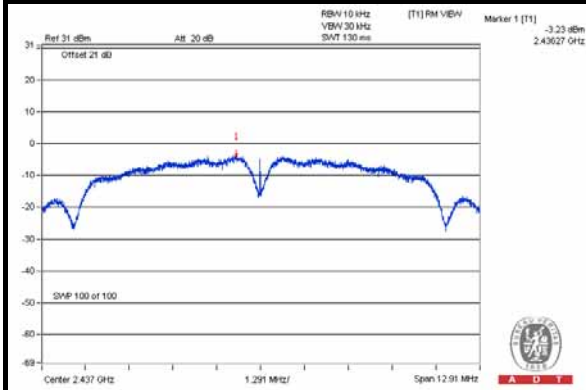


802.11g / Chain(1) : CH6

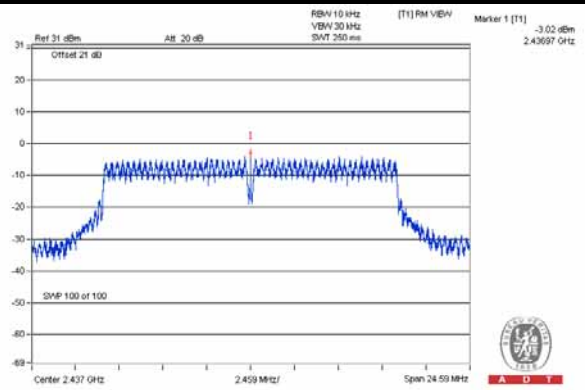

802.11n (HT20) / Chain(1) : CH6

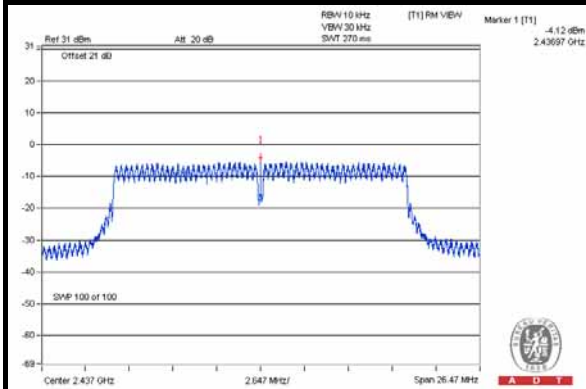

802.11n (HT40) / Chain(0) : CH3

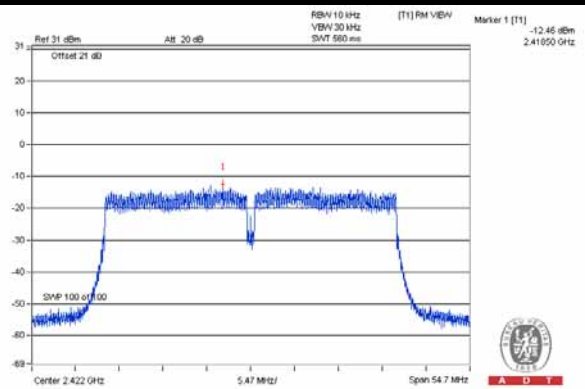



4.5.8 TEST RESULTS(MODE 2)

802.11n (HT20)

TX CHAIN	CHANNEL	FREQUENCY (MHz)	PSD (dBm)	10 log (N=3) dB	Total PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-10.71	4.77	-5.94	5.35	PASS
	6	2437	-9.51	4.77	-4.74	5.35	PASS
	11	2462	-10.37	4.77	-5.60	5.35	PASS
1	1	2412	-11.29	4.77	-6.52	5.35	PASS
	6	2437	-8.72	4.77	-3.95	5.35	PASS
	11	2462	-11.02	4.77	-6.25	5.35	PASS
2	1	2412	-11.92	4.77	-7.15	5.35	PASS
	6	2437	-9.71	4.77	-4.94	5.35	PASS
	11	2462	-11.54	4.77	-6.77	5.35	PASS

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3]$ = 8.65dBi > 6dBi , so the power density limit shall be reduced to $8-(8.65-6) = 5.35$ dBm.

802.11n (HT40)

TX CHAIN	CHANNEL	FREQ. (MHz)	PSD W/O DUTY FACTOR (dBm)	10 log (N=3) dB	DUTY FACTOR (dB)	TOTAL PSD WITH DUTY FACTOR (dBm)	LIMIT (dBm)	PASS /FAIL
0	1	2412	-12.46	4.77	0.17	-7.52	5.35	PASS
	6	2437	-12.84	4.77	0.17	-7.90	5.35	PASS
	11	2462	-15.65	4.77	0.17	-10.71	5.35	PASS
1	1	2412	-13.16	4.77	0.17	-8.22	5.35	PASS
	6	2437	-12.48	4.77	0.17	-7.54	5.35	PASS
	11	2462	-15.40	4.77	0.17	-10.46	5.35	PASS
2	1	2412	-14.51	4.77	0.17	-9.57	5.35	PASS
	6	2437	-13.32	4.77	0.17	-8.38	5.35	PASS
	11	2462	-16.17	4.77	0.17	-11.23	5.35	PASS

NOTE: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3]$ = 8.65dBi > 6dBi , so the power density limit shall be reduced to $8-(8.65-6) = 5.35$ dBm.

2. Refer to section 3.4 for duty cycle spectrum plot.





A D T

SPECTRUM PLOT OF WORST VALUE

802.11n (HT20) / Chain(1) : CH6

802.11n (HT40) / Chain(0) : CH3

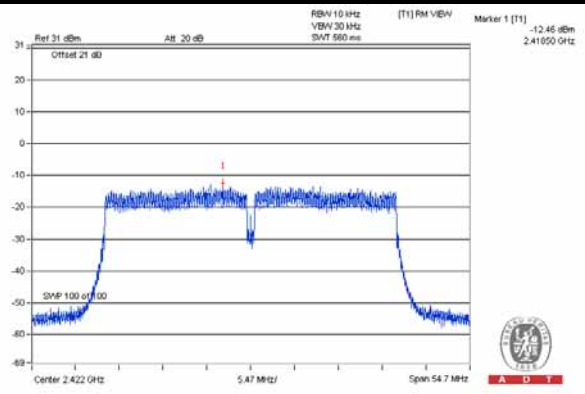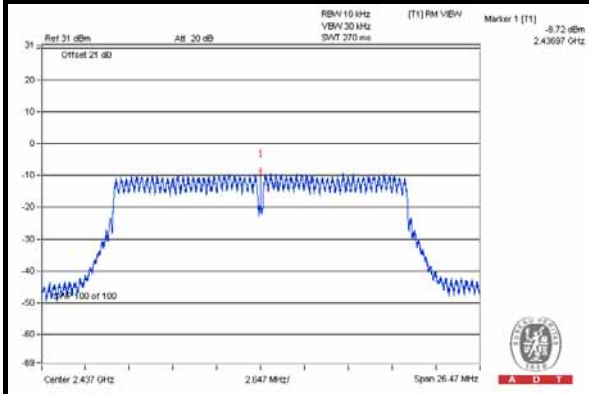



A D T

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSV 40	100964	July 05, 2014	July 04, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Sep. 23, 2014

4.6.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6


4.6.7 TEST RESULTS(MODE 1)

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.




A D T

802.11b

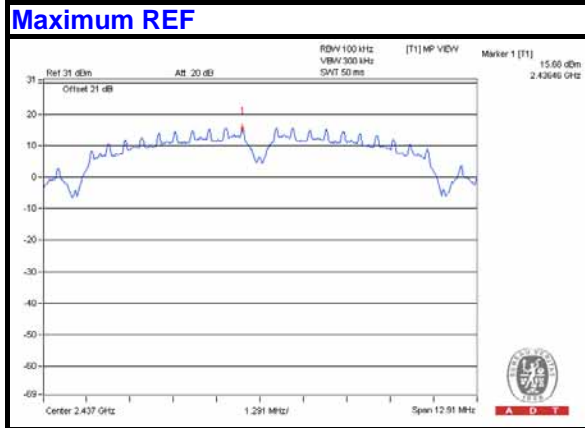


Chain 0


CH 1

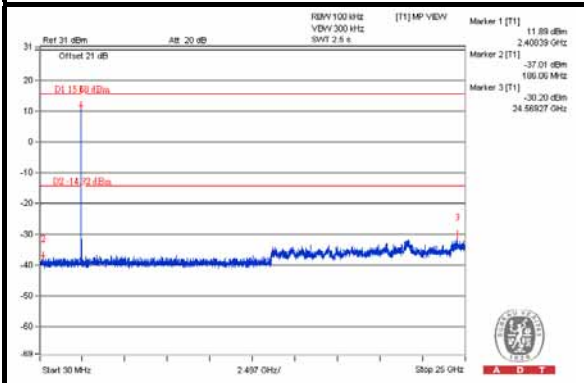


CH 6

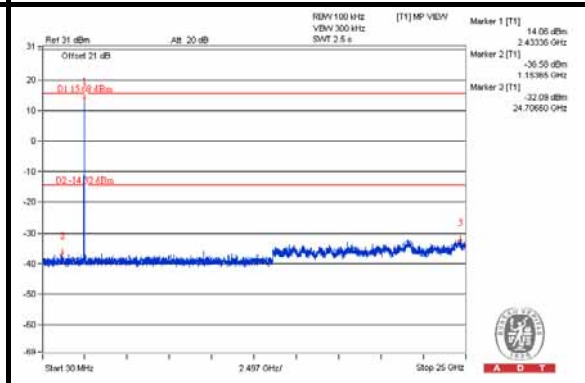


CH 11

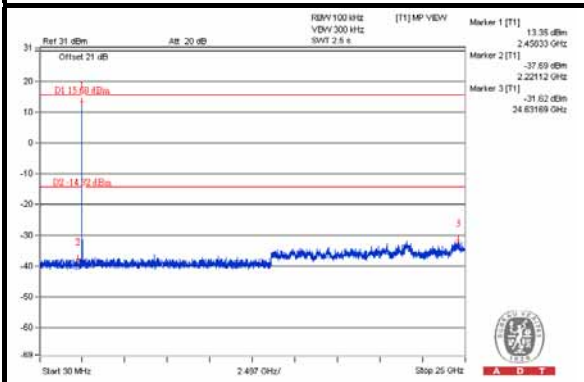

CH 1 Band edge

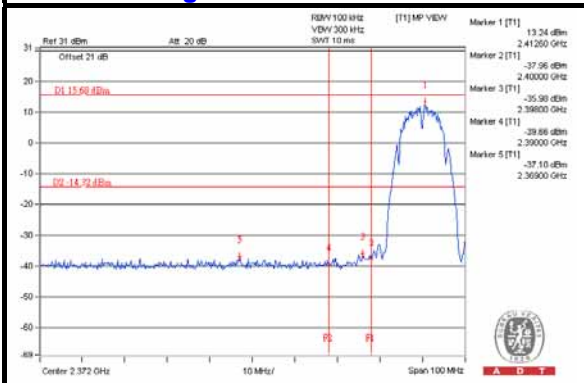

CH 11 Band edge

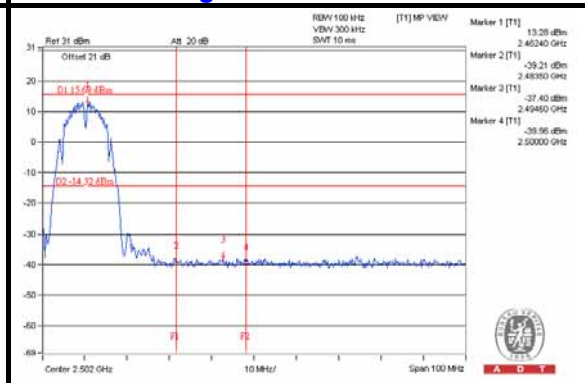





A D T

Chain 1


CH 1

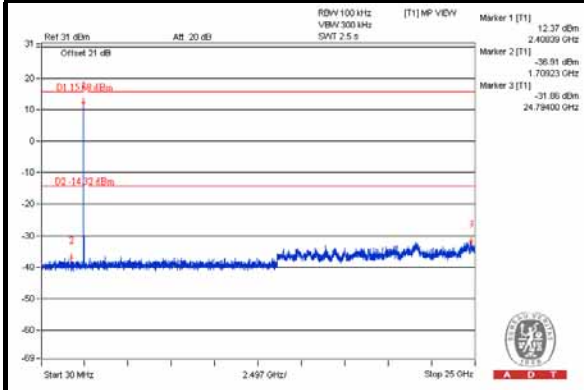


CH 6

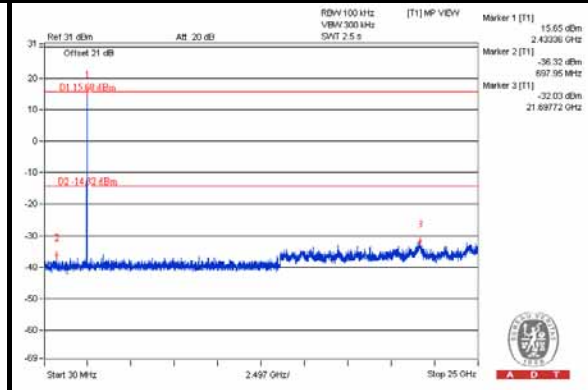


CH 11

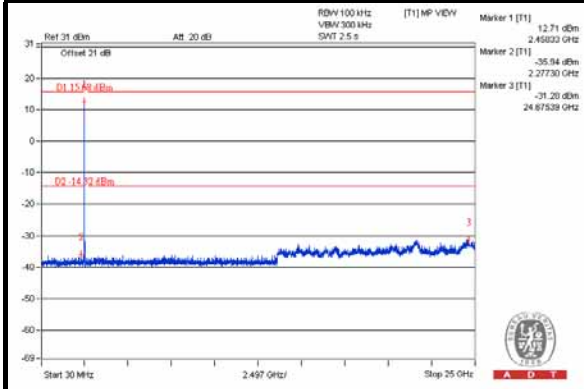

CH 1 Band edge

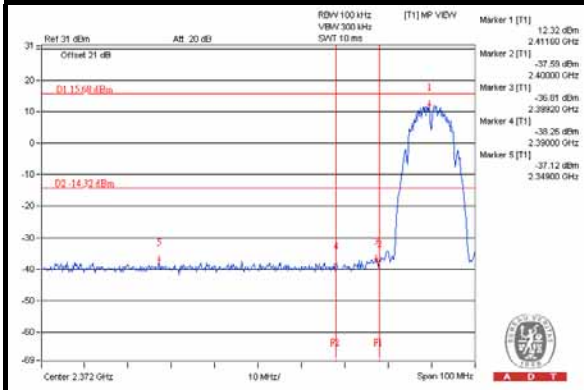


CH 11 Band edge

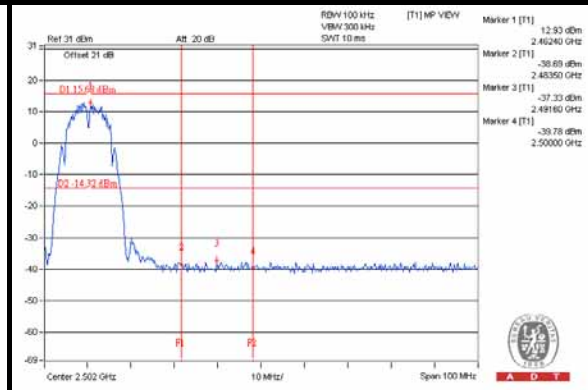


Chain 2


CH 1

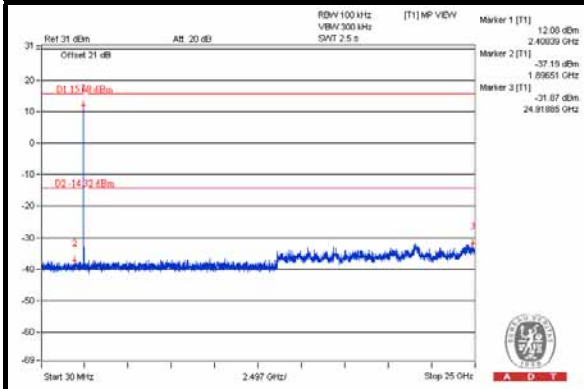


CH 6

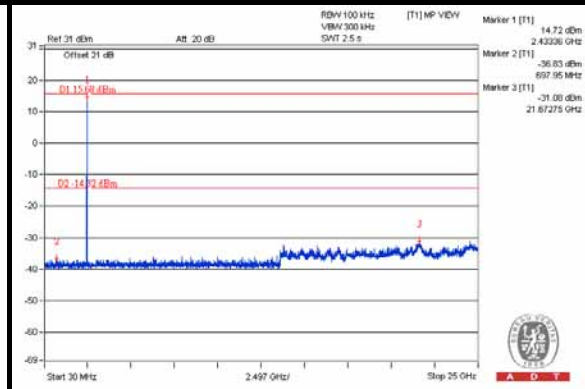


CH 11

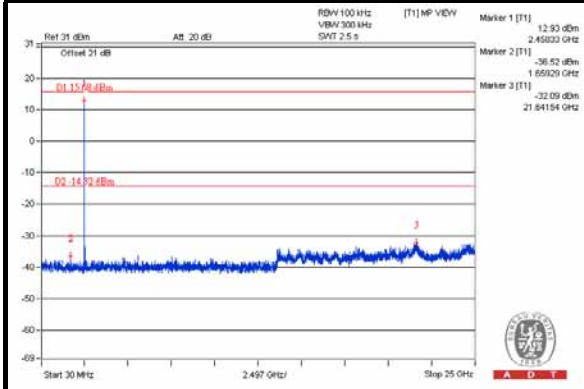

CH 1 Band edge

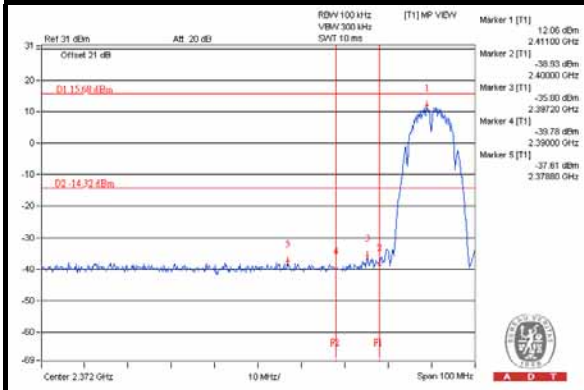

CH 11 Band edge

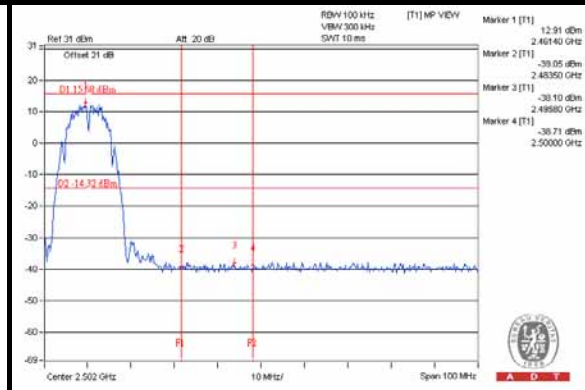




A D T


802.11g

Maximum REF

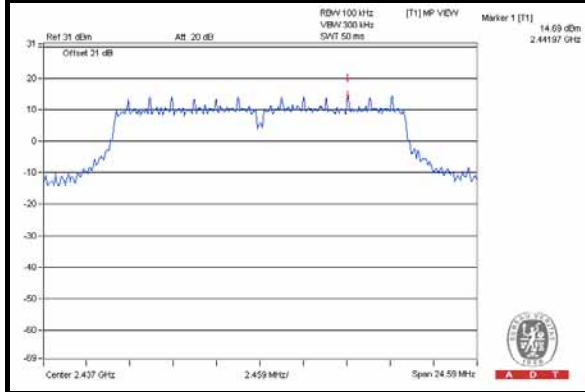


Chain 0


CH 1

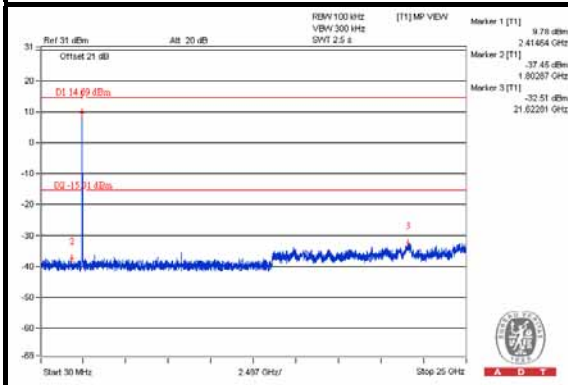


CH 6

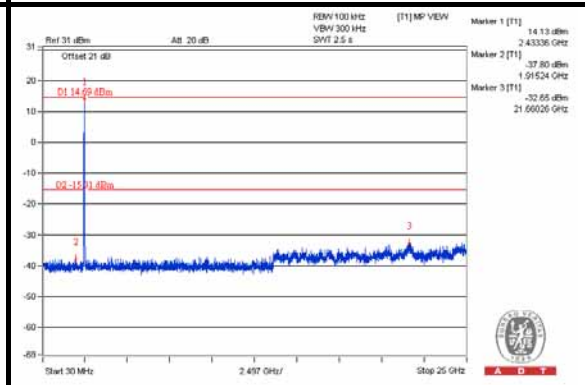


CH 11

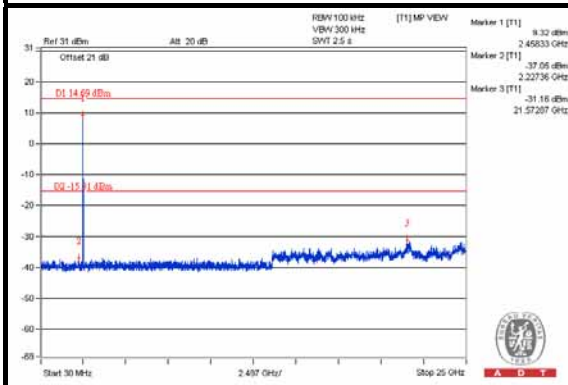

CH 1 Band edge

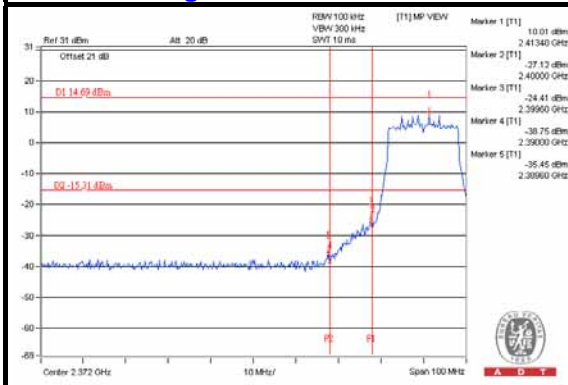

CH 11 Band edge

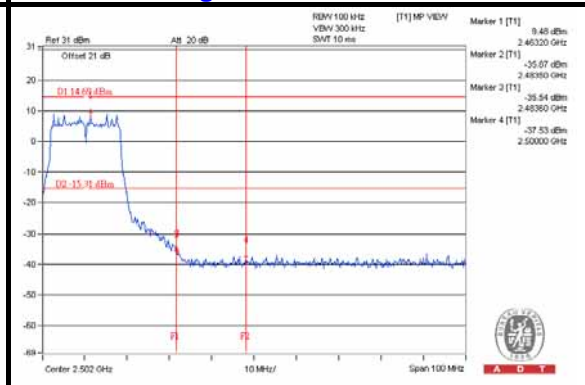





A D T

Chain 1


CH 1

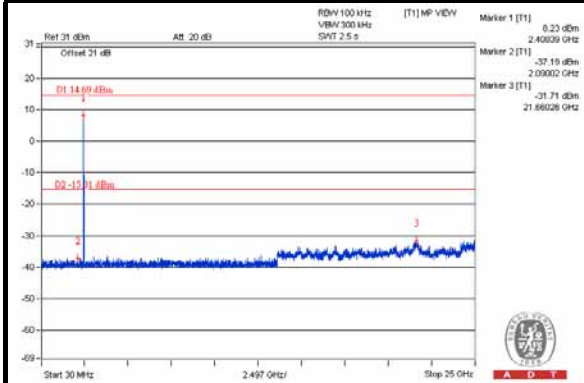


CH 6

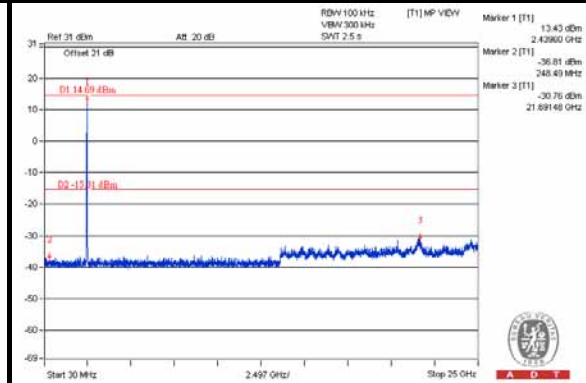


CH 11

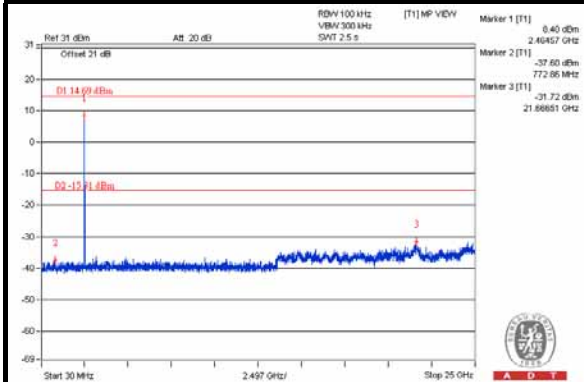

CH 1 Band edge

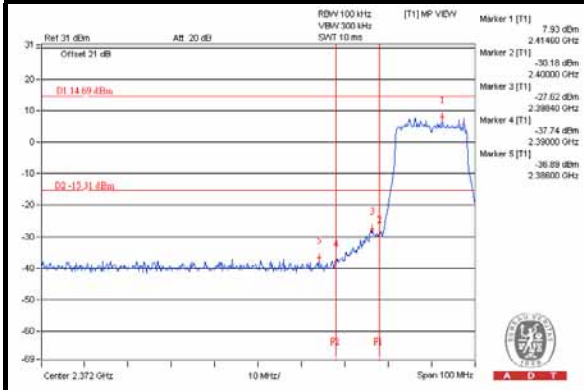

CH 11 Band edge

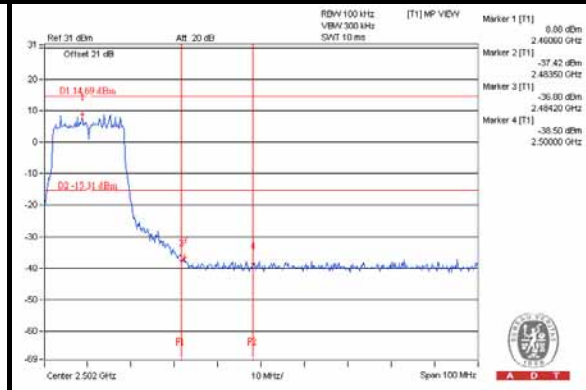





A D T

Chain 2


CH 1

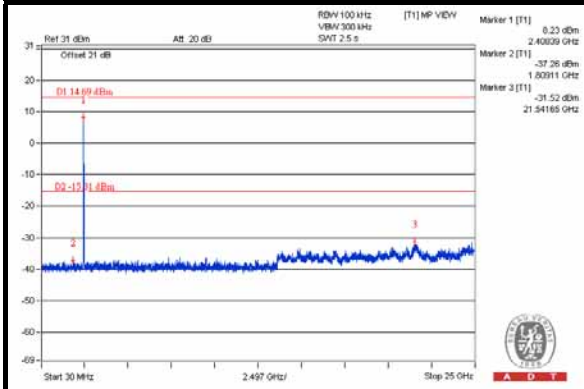


CH 6

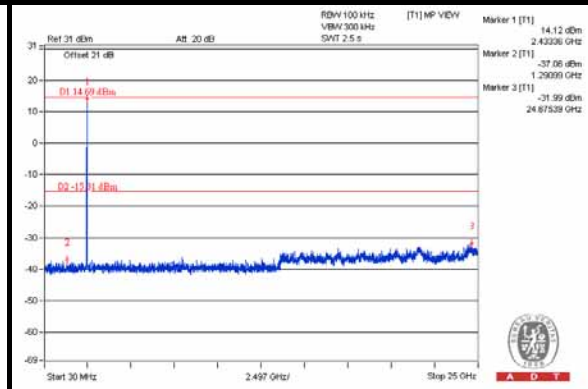


CH 11

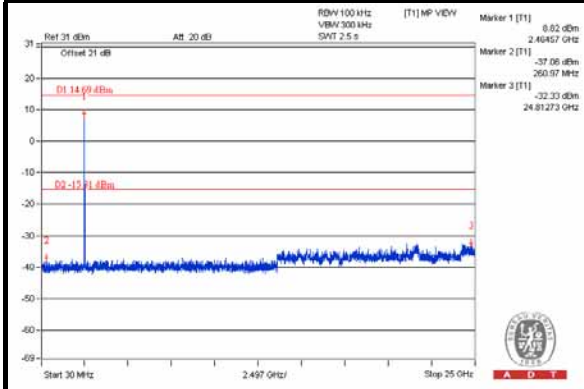

CH 1 Band edge

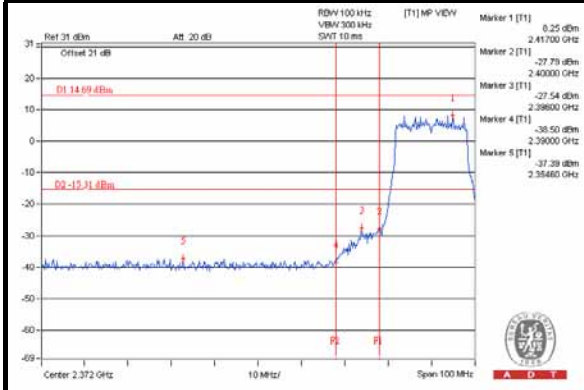


CH 11 Band edge

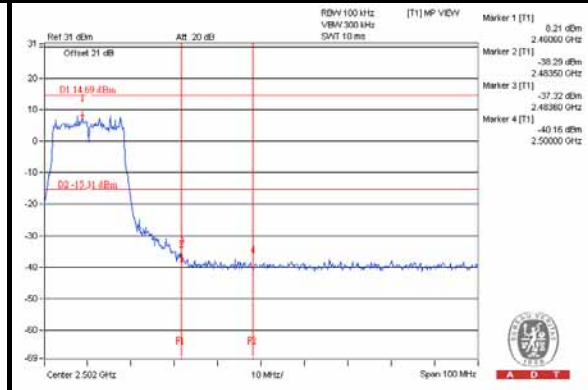




A D T

802.11n(HT20)

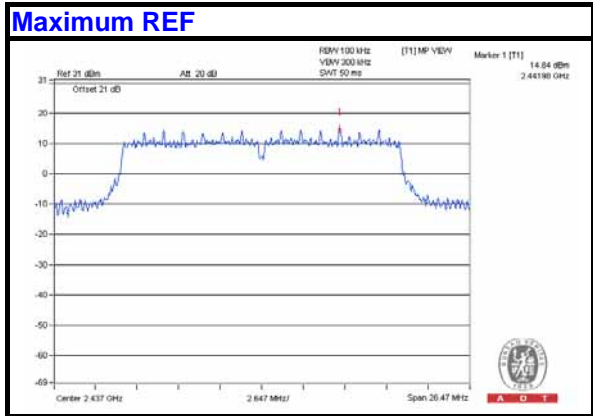


Chain 0


CH 1

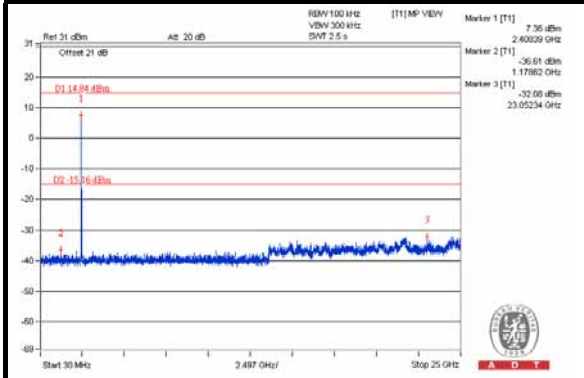


CH 6

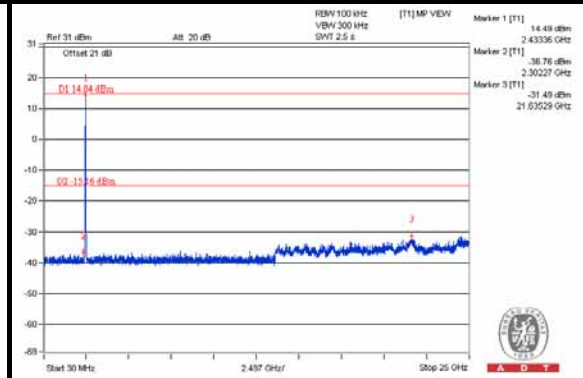


CH 11

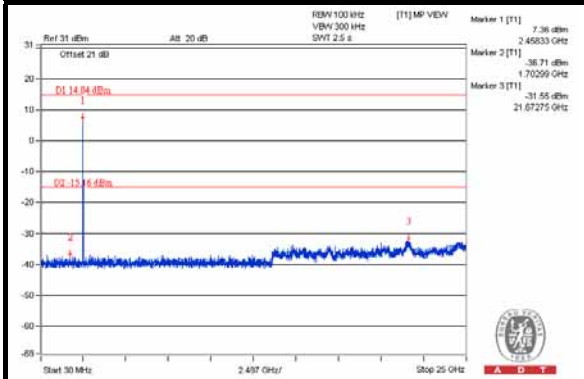

CH 1 Band edge

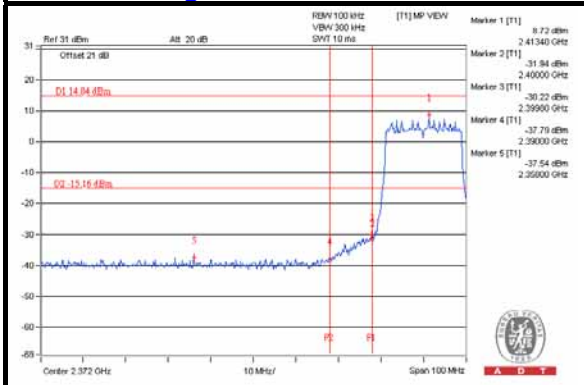

CH 11 Band edge

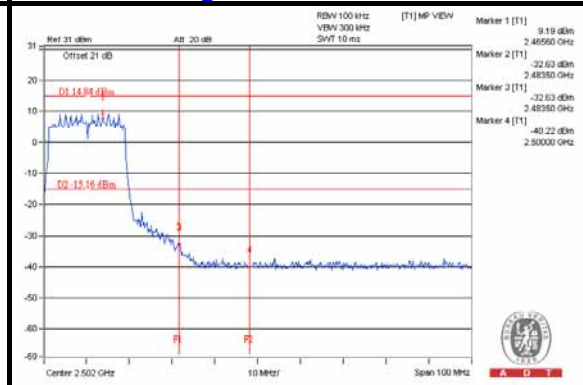





A D T

Chain 1


CH 1

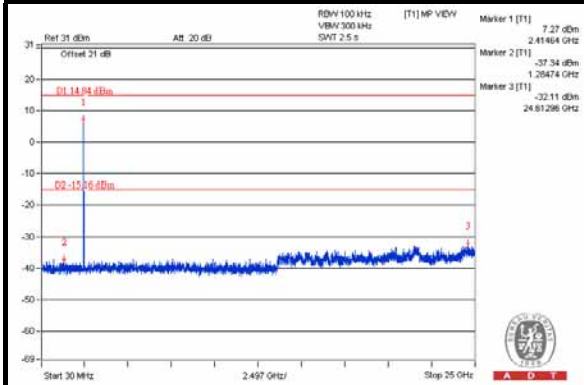


CH 6

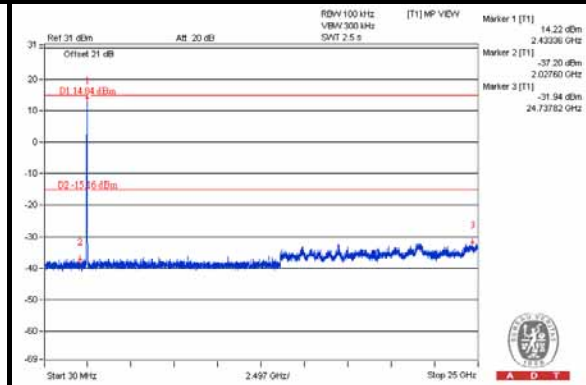


CH 11

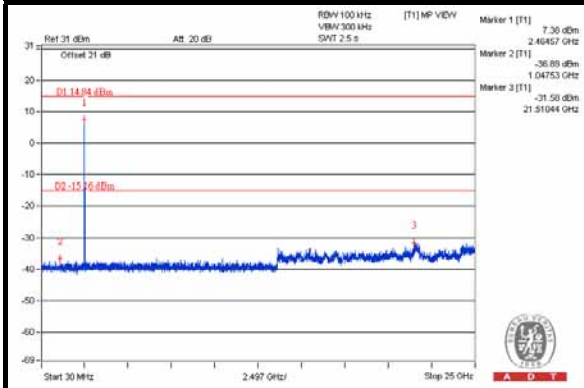

CH 1 Band edge

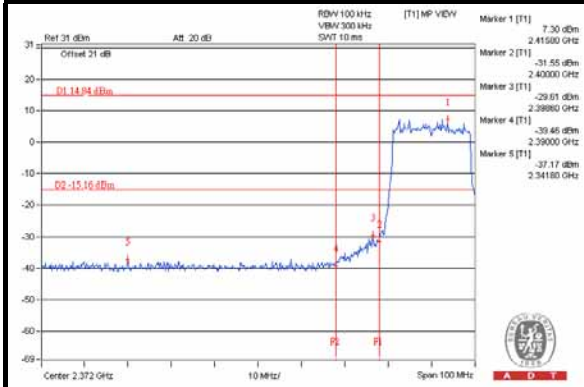

CH 11 Band edge

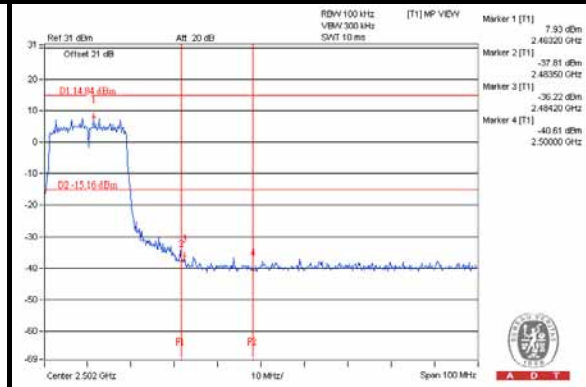





A D T

Chain 2


CH 1

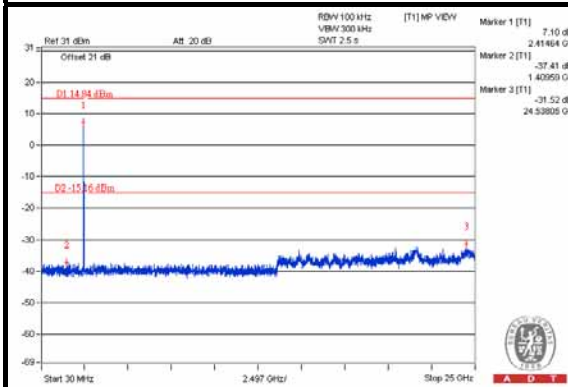


CH 6

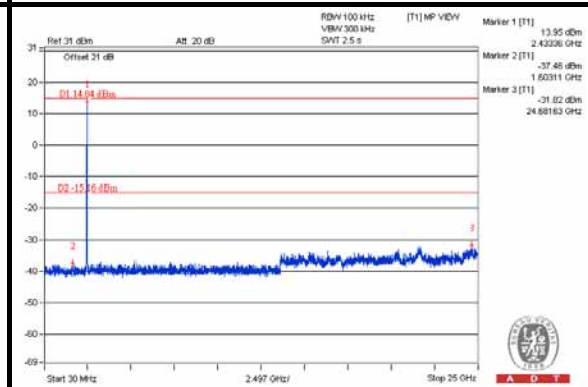


CH 11

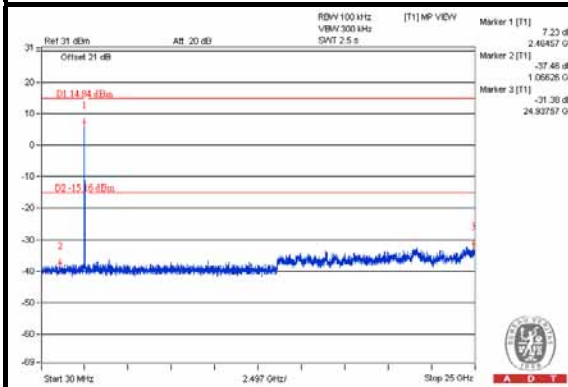

CH 1 Band edge

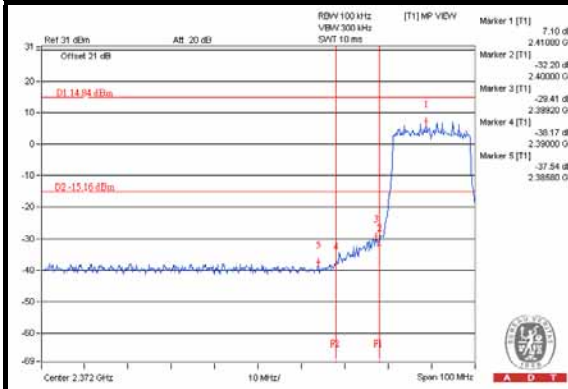


CH 11 Band edge

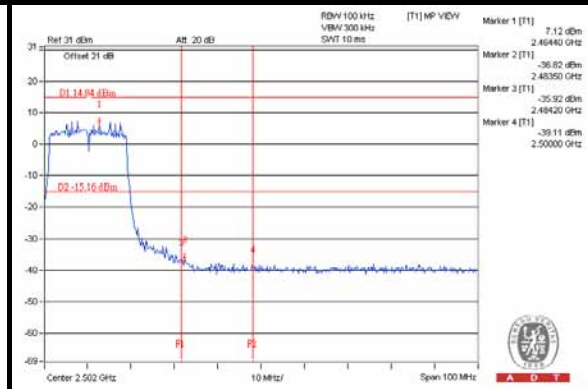




A D T

802.11n(HT40)

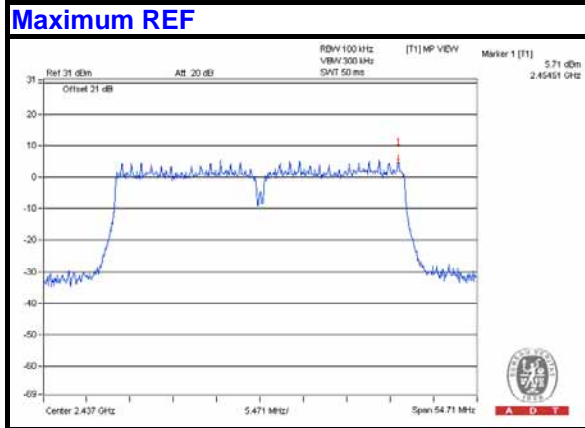


Chain 0


CH 3

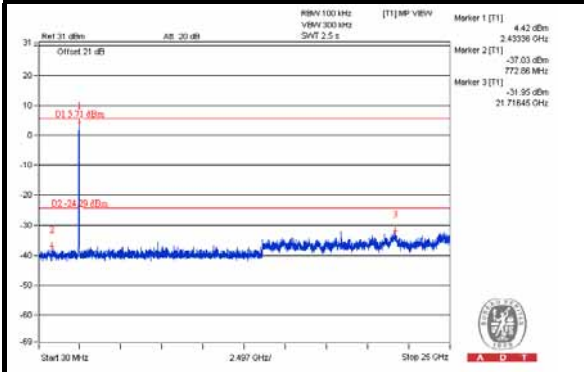


CH 6

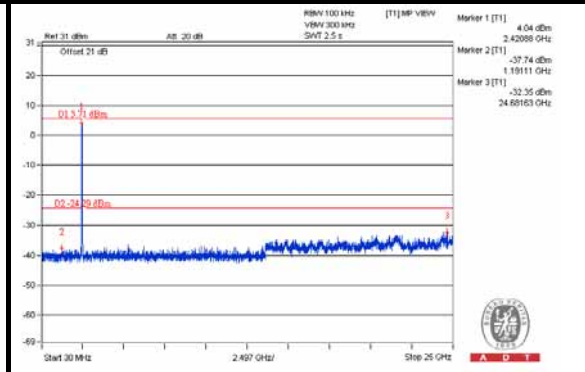


CH 9

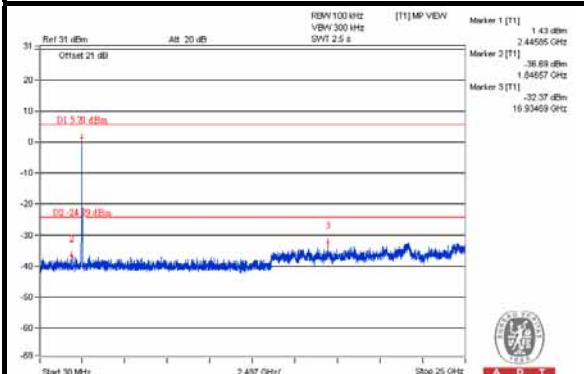

CH 3 Band edge

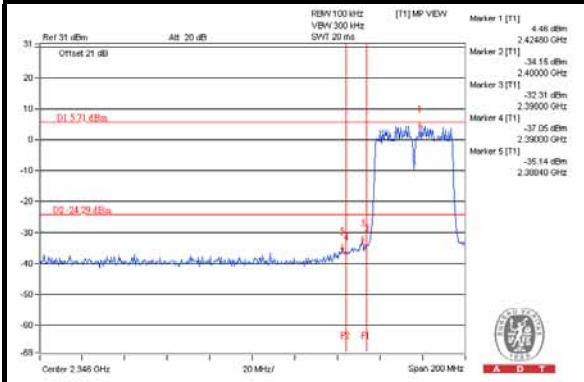

CH 9 Band edge

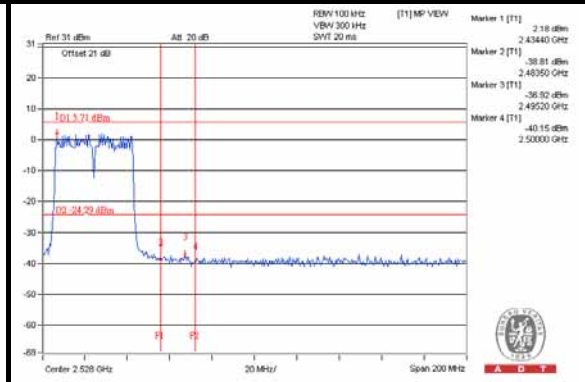





A D T

Chain 1



CH 3

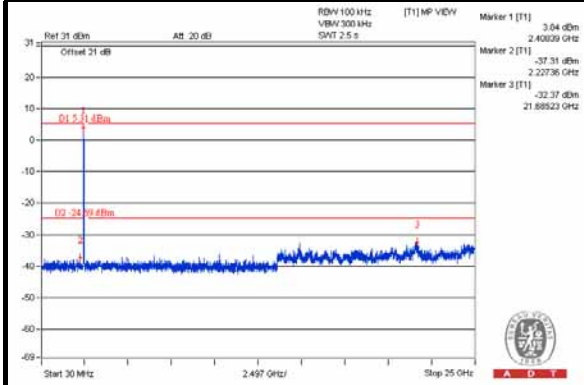


CH 6

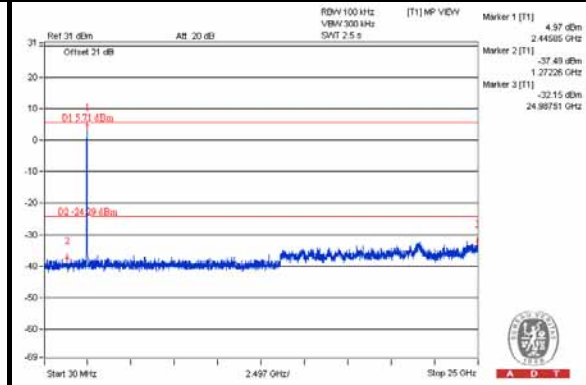


CH 9

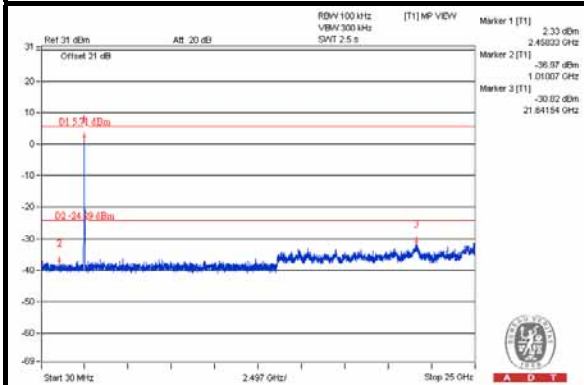

CH 3 Band edge

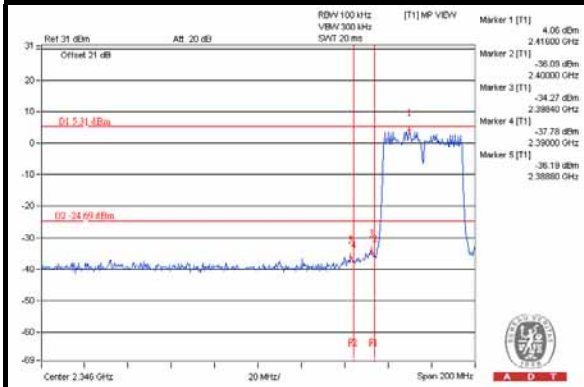

CH 9 Band edge

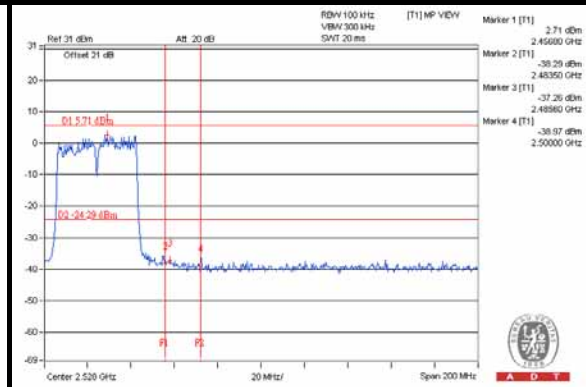





A D T

Chain 2


CH 1

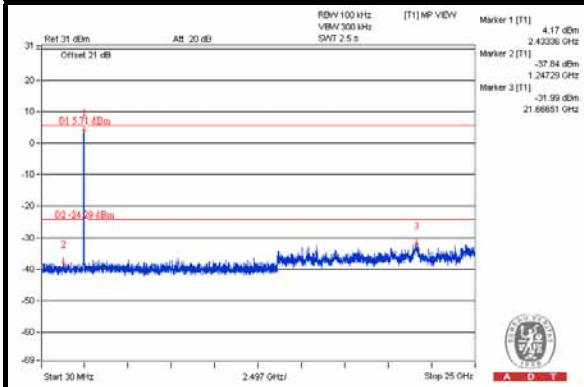


CH 6

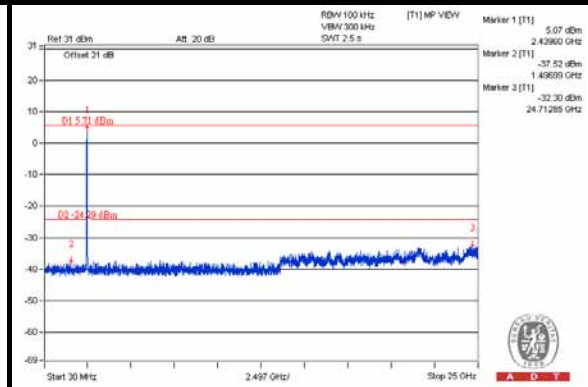


CH 11

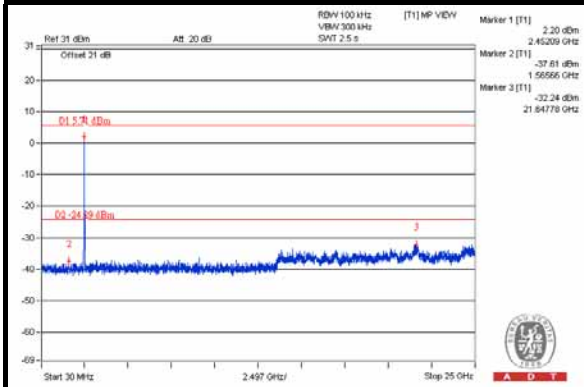

CH 1 Band edge

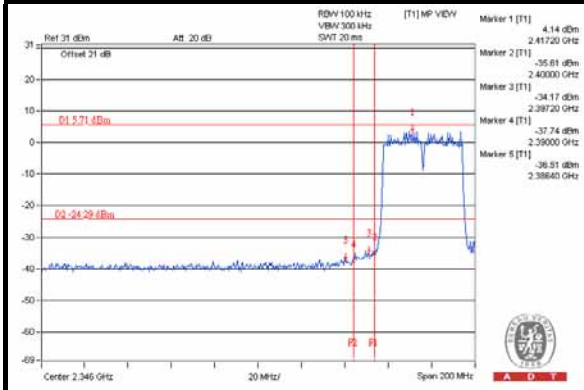

CH 11 Band edge

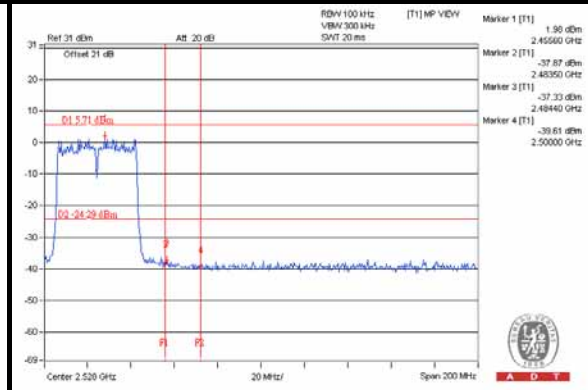

4.6.8 TEST RESULTS(MODE 2)


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.



A D T


802.11n(HT20)

Maximum REF

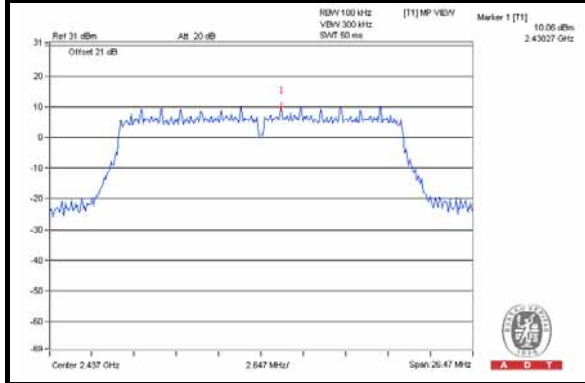


Chain 0


CH 1

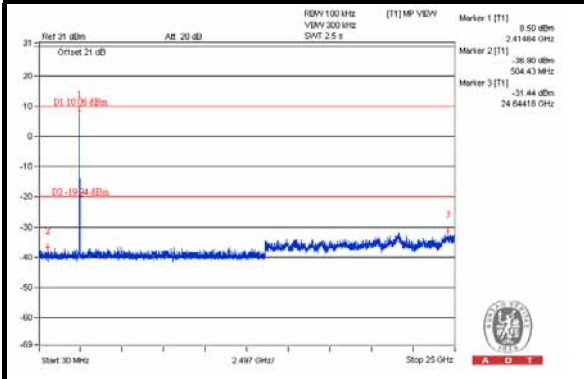


CH 6

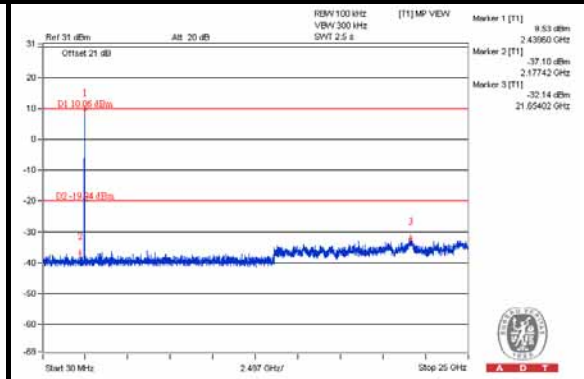


CH 11

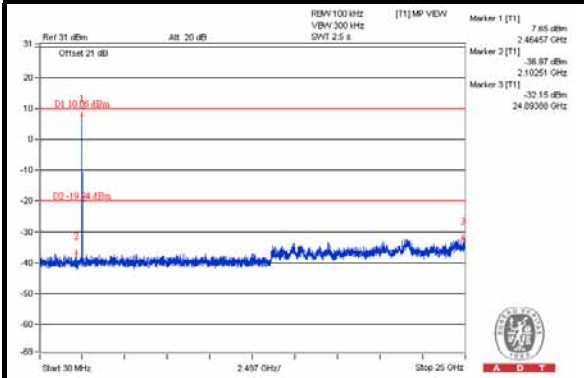

CH 1 Band edge

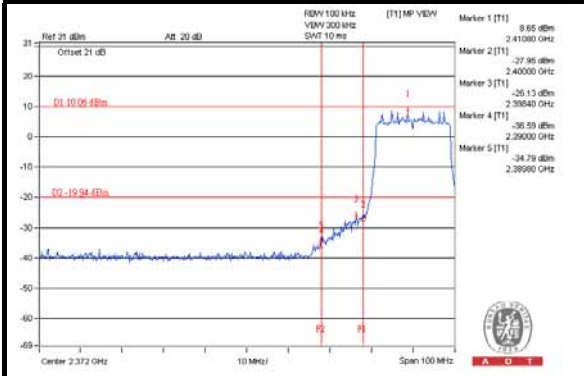

CH 11 Band edge

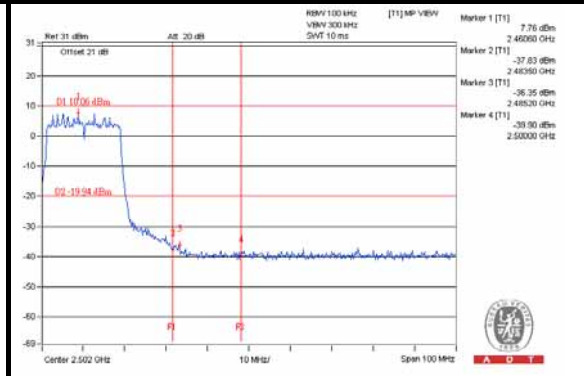





A D T

Chain 1


CH 1

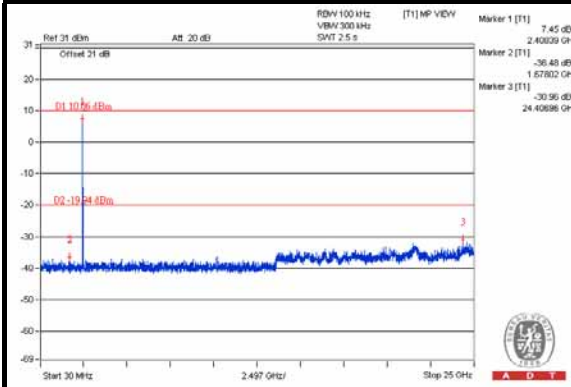


CH 6

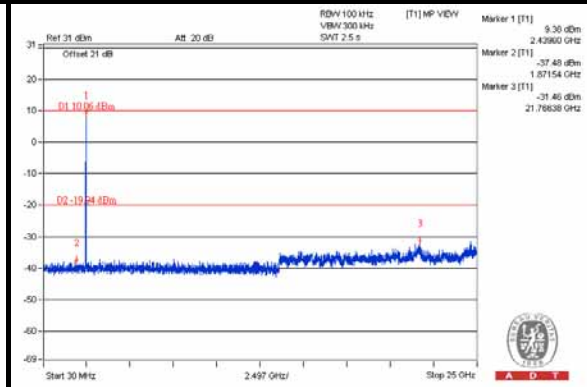


CH 11

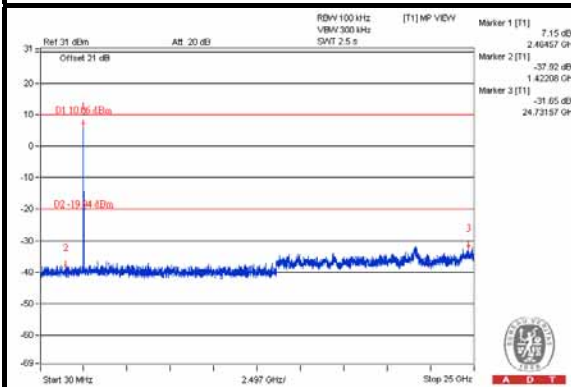

CH 1 Band edge

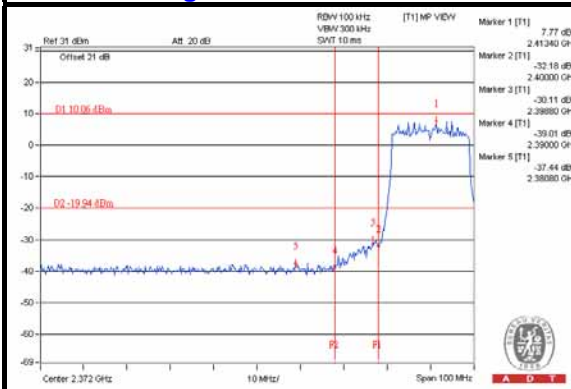

CH 11 Band edge

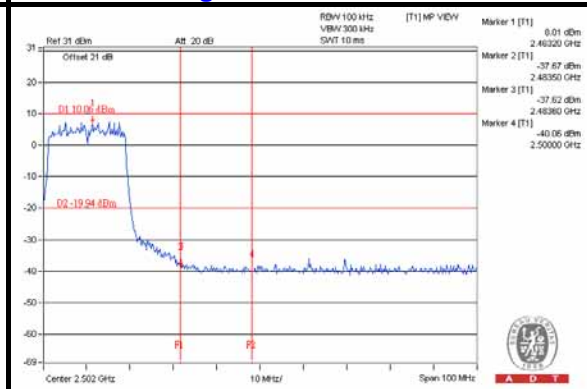





A D T

Chain 2


CH 1

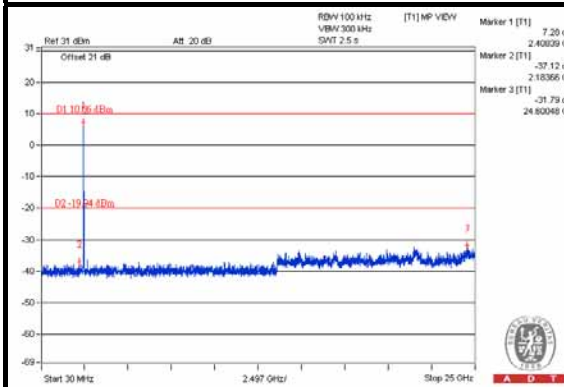


CH 6

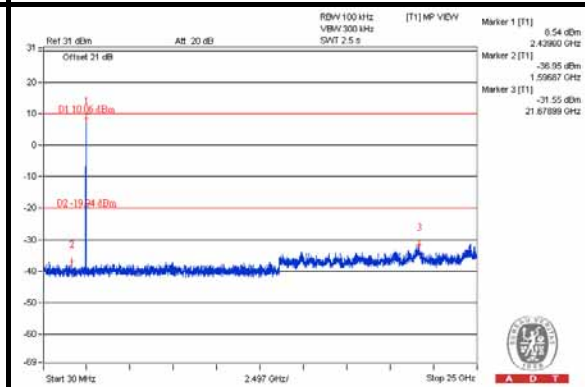


CH 11

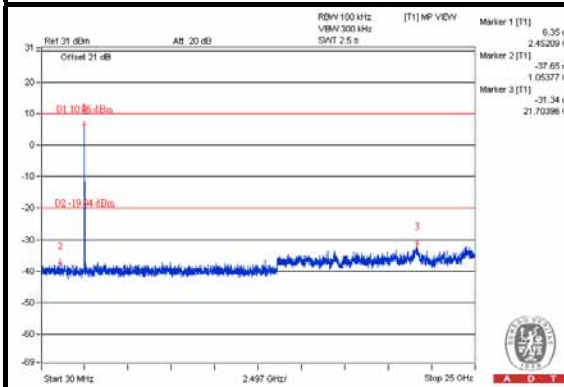

CH 1 Band edge

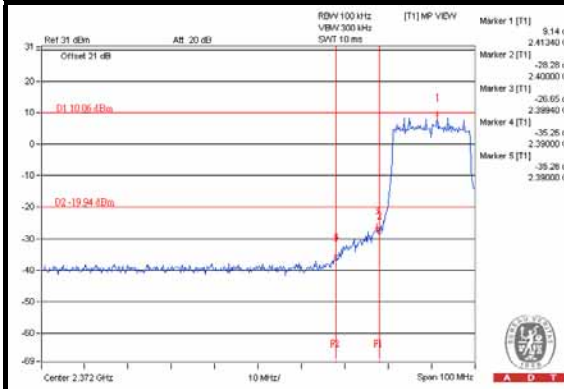


CH 11 Band edge

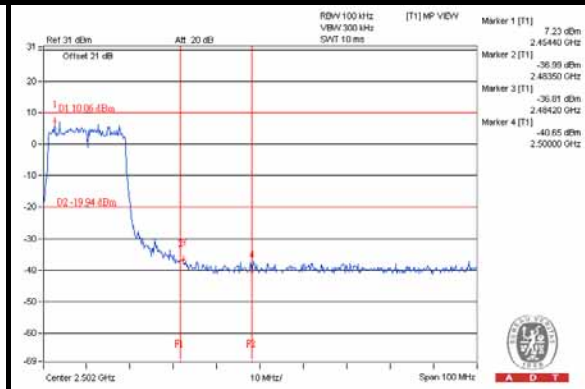




A D T

802.11n(HT40)

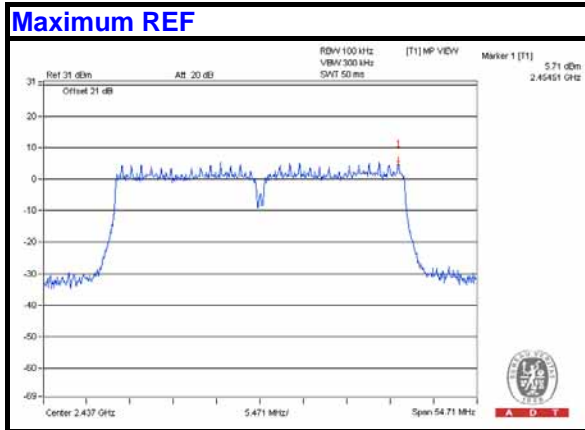


Chain 0


CH 3

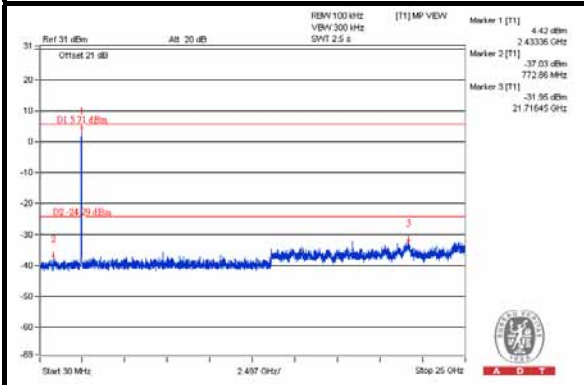


CH 6

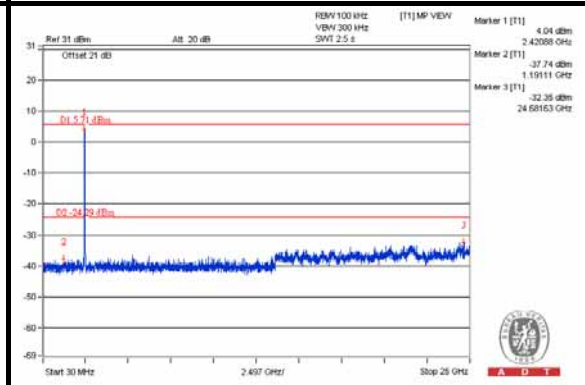


CH 9

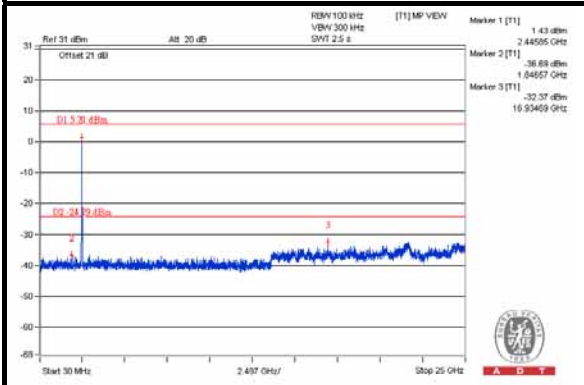

CH 3 Band edge

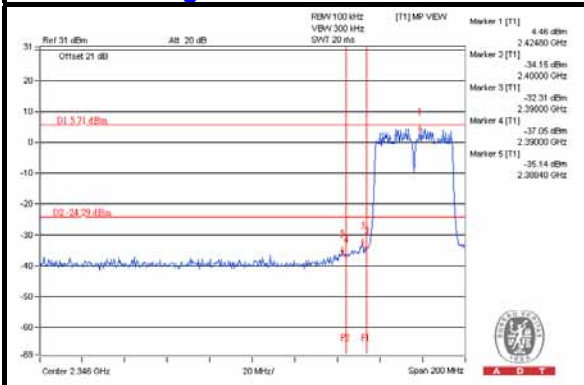

CH 9 Band edge

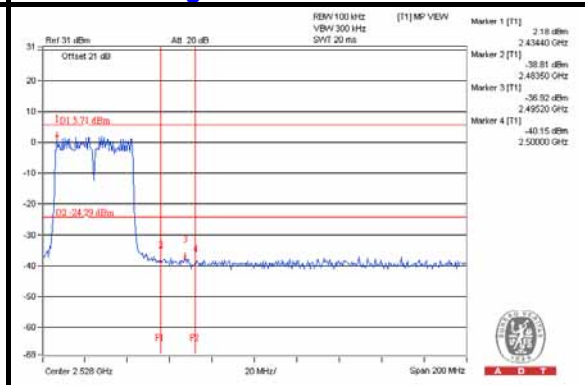





A D T

Chain 1



CH 3

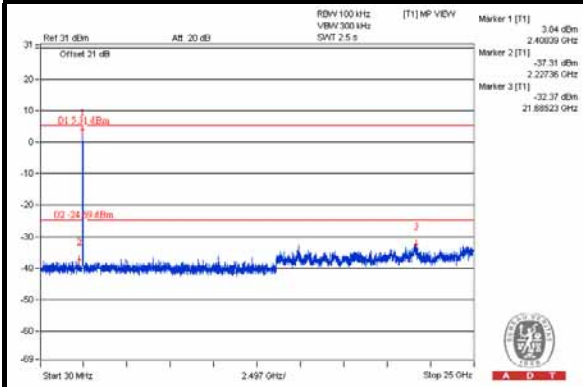


CH 6

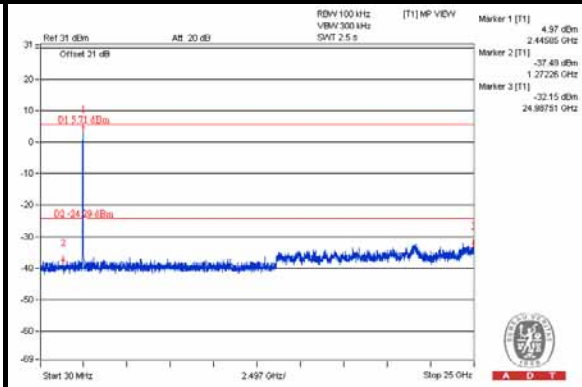


CH 9

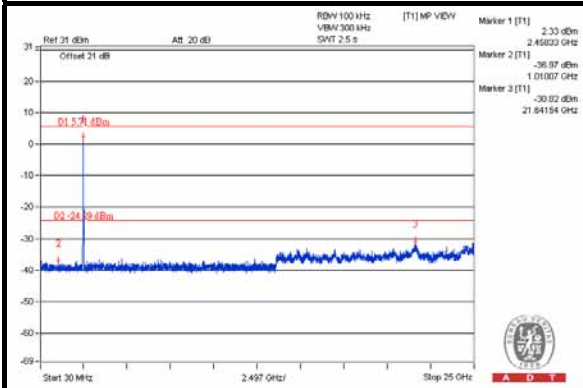

CH 3 Band edge

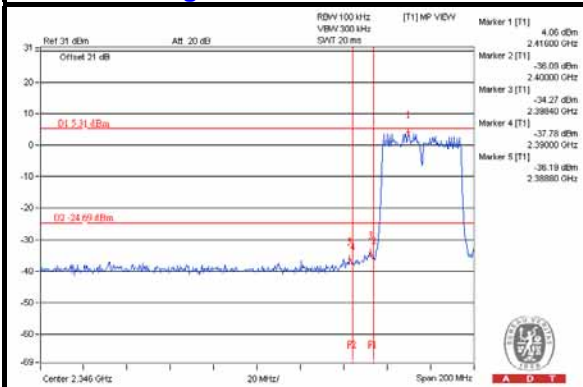

CH 9 Band edge

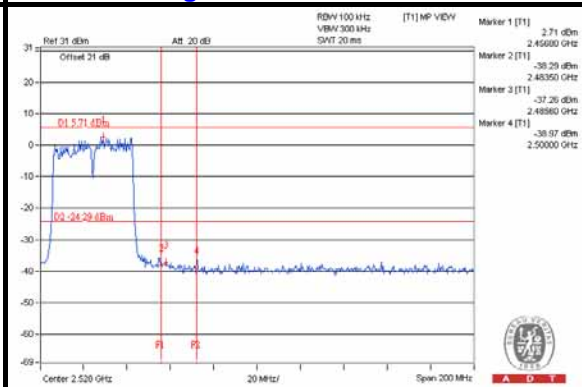





A D T

Chain 2


CH 1

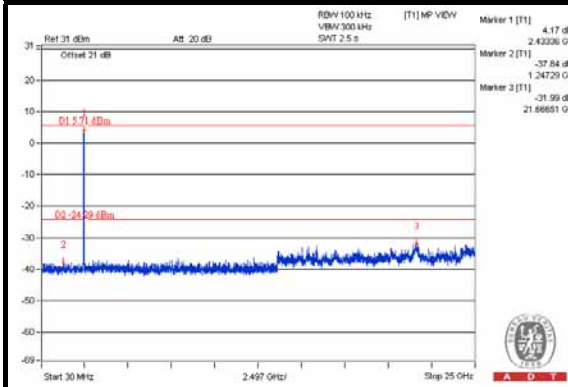


CH 6

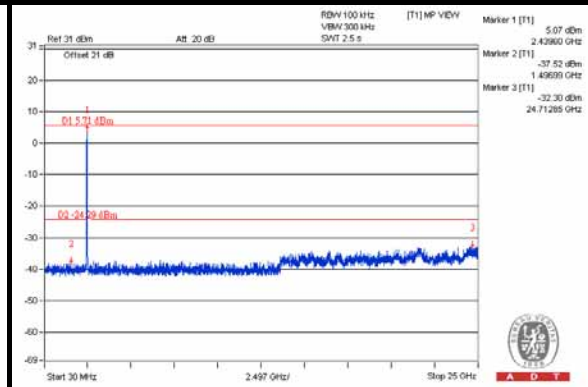


CH 11

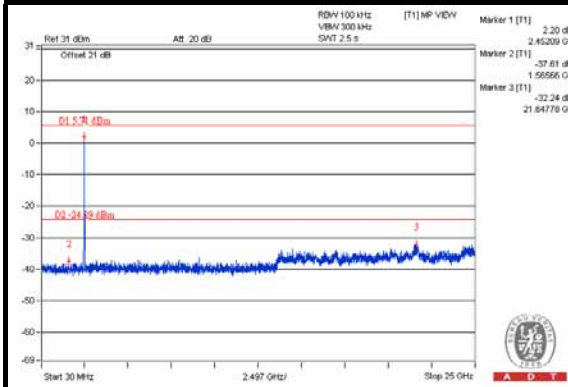

CH 1 Band edge

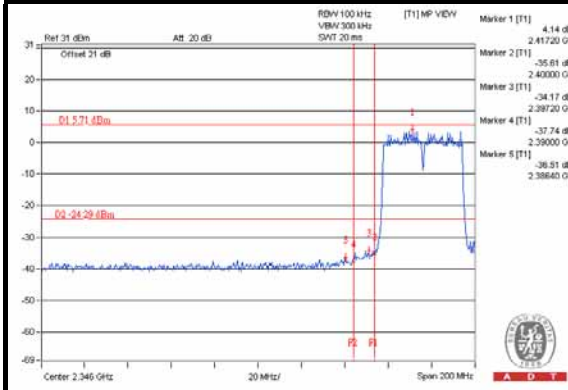

CH 11 Band edge

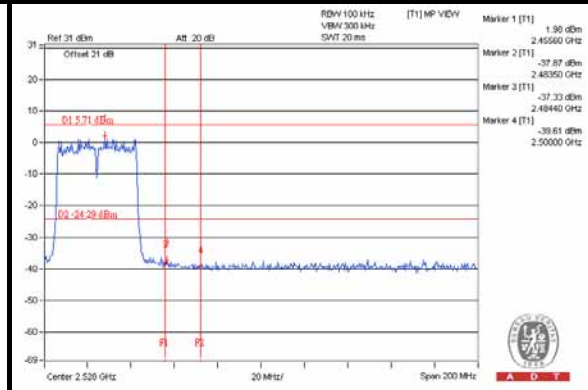



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF/Telecom Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---