


# LABEL POSITION INSTRUCTION

## LABEL POSITION INSTRUCTION FOR PACE PX001BNM (XG1P D3643495500)

Position the base serial number label (middle section) from **D364-PX001BNM-Product-Label-RevA** as squarely as possible in position shown.

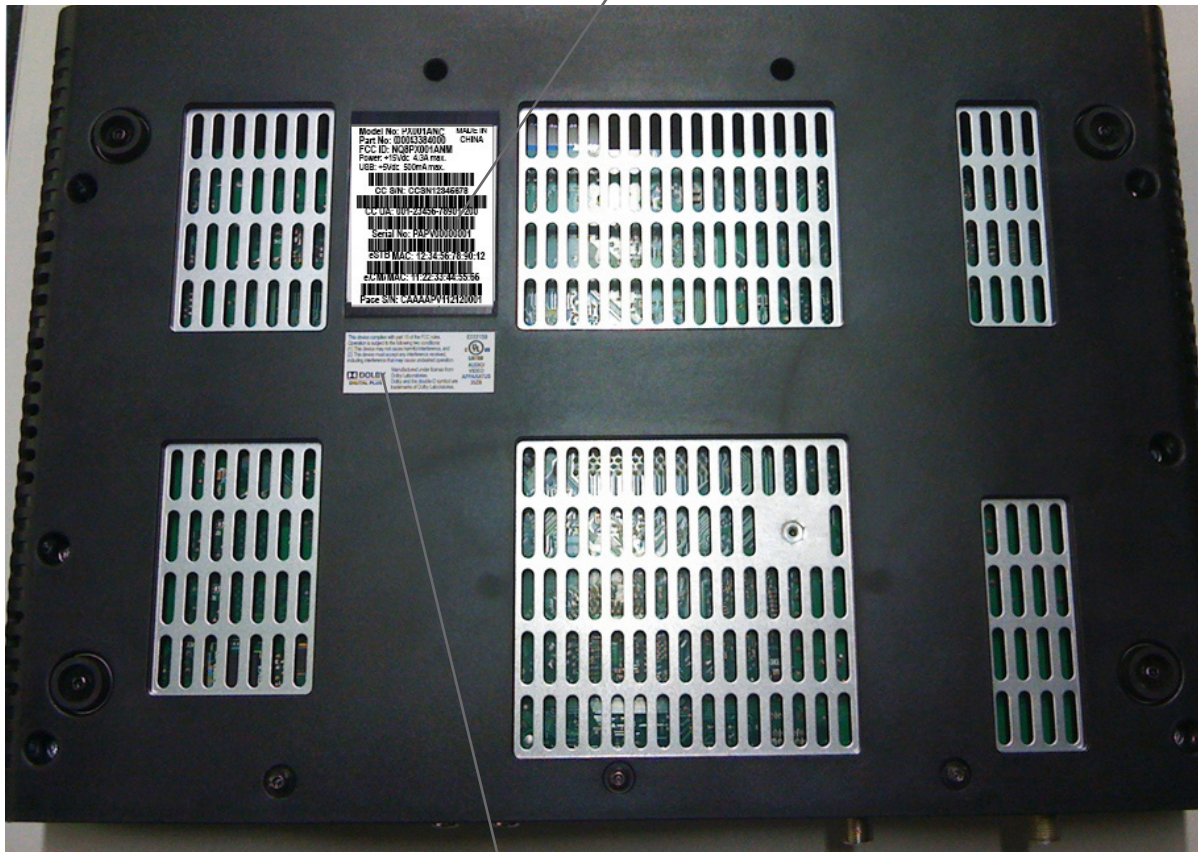

Position the APPROVALS label (top section) from **D364-PX001BNM-Product-Label-RevA** as squarely as possible in position shown.

**Change since last revision:**  
First Issue.

**Document Number** 700-5340320

**Drafted By** Nick

**Date** 7 March 2013

**Sheet** 1 of 4

**Tech Pubs Approval**

# LABEL POSITION INSTRUCTION


LABEL POSITION INSTRUCTION FOR PACE PX001BNM (XG1P D3643495500)

## SERVICE CENTER INSTRUCTION

On all units returned into the service center, replace the black (manufacturing) tamper-evident label with the blue (service) tamper-evident label.

Position RED MOTOROLA CABLECARD label **298-3384000** as squarely as possible in position shown.

Position Tamper-evident label **298-1203730** as squarely as possible in position shown. Use firm finger pressure to press the label down flush and securely in place.

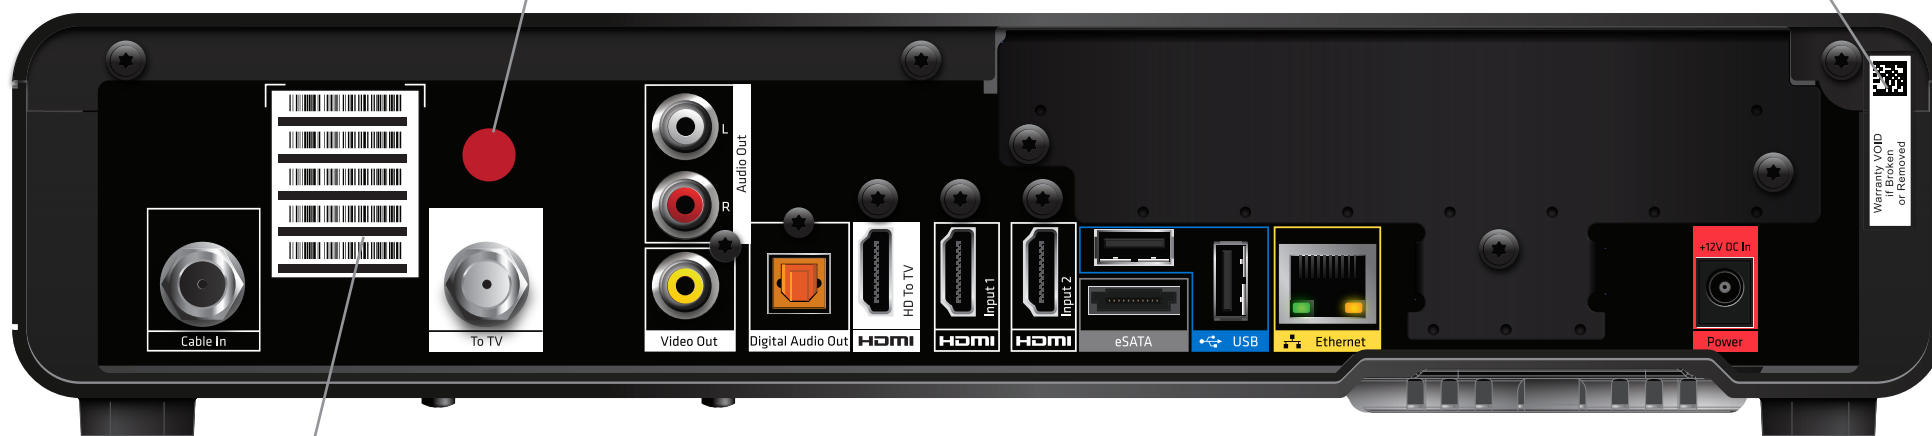

Position the rear-panel serial number label (bottom section) from **D364-PX001BNM-Product-Label-RevA** as squarely as possible in position shown.


Document Number 700-5340320

Sheet 2 of 4

# LABEL POSITION INSTRUCTION

LABEL POSITION INSTRUCTION FOR PACE PX001BNM (XG1P D3643495500)

Position Proposition 65 label 299-1005125 as squarely as possible in position shown.

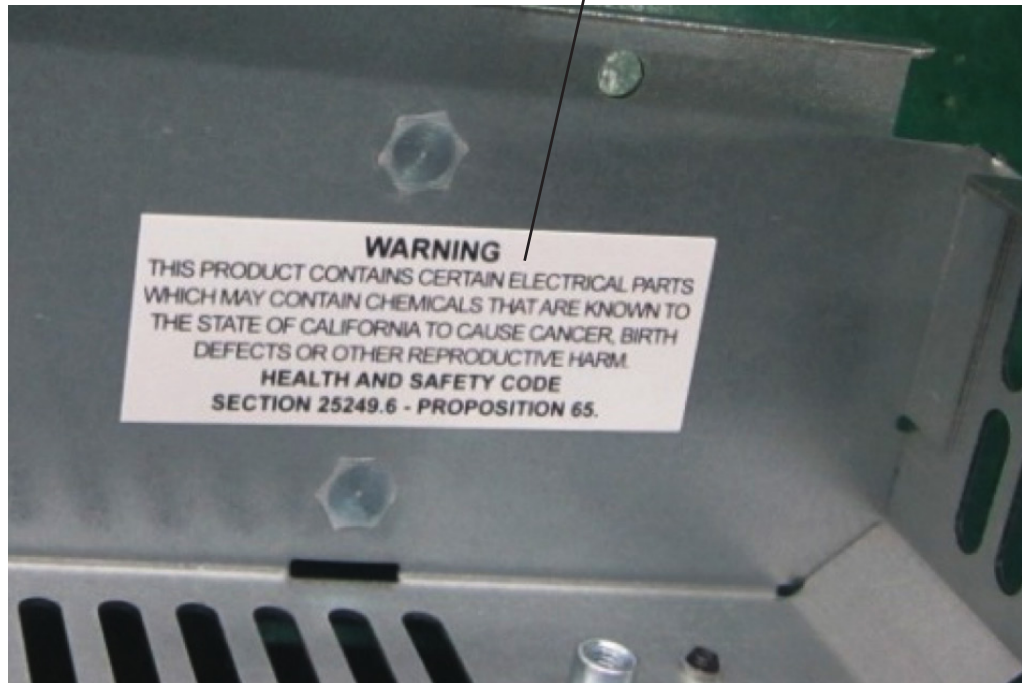

---

Document Number 700-5340320


---

Sheet 3 of 4

# LABEL POSITION INSTRUCTION

LABEL POSITION INSTRUCTION FOR PACE PX001BNM (XG1P D3643495500)

Position CARTON label **D364-PX001BNM-Carton-Label-RevA**  
as squarely as possible in position shown.

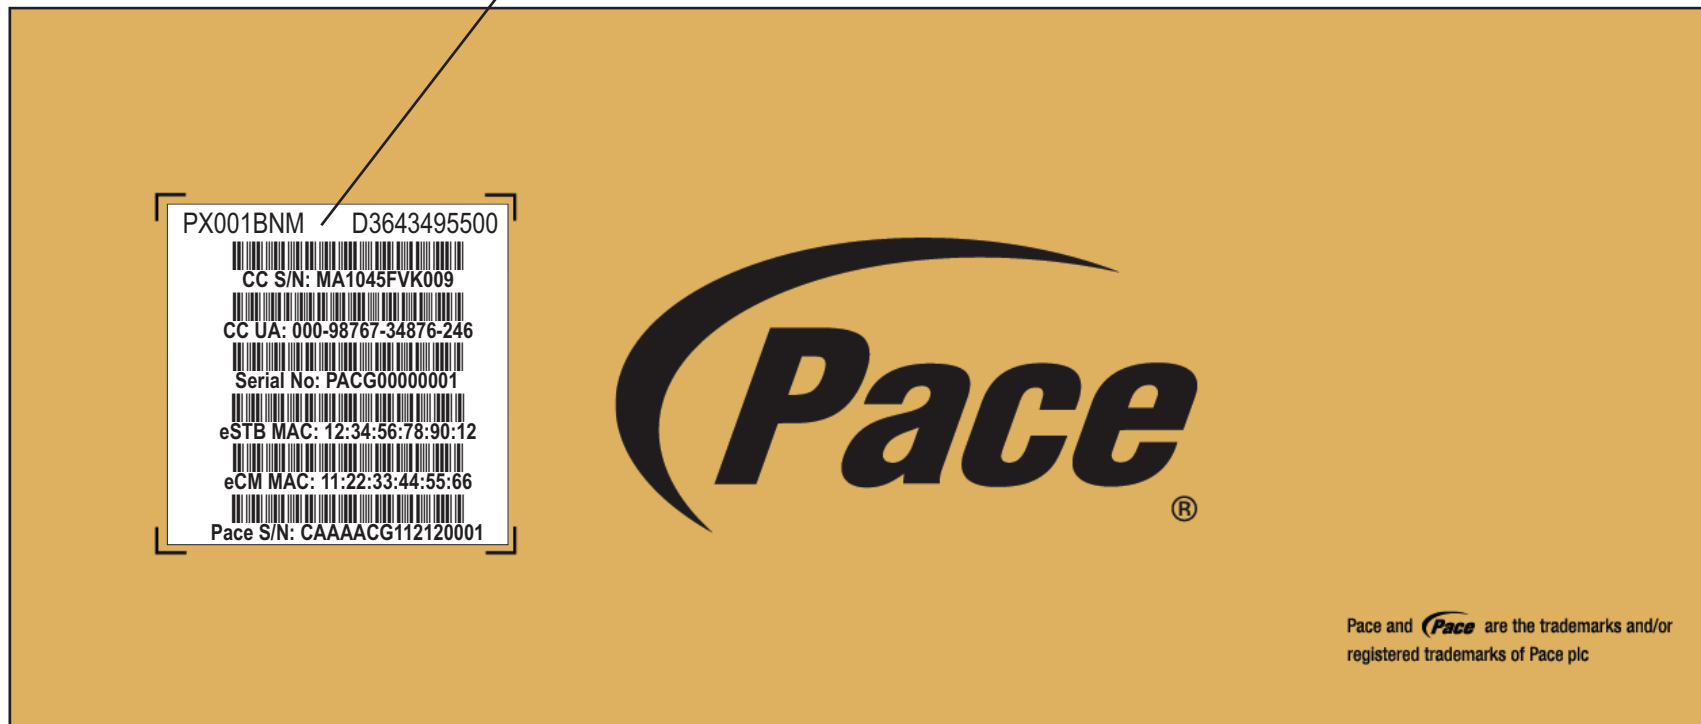

Document Number 700-5340320

Sheet 4 of 4