


LABEL POSITION INSTRUCTION

LABEL POSITION INSTRUCTION FOR PACE PX001BNT (XG1T D6671001900)

Position the base serial number label (middle section) from **D667-PX001BNT-Product-Label-RevA** as squarely as possible in position shown.

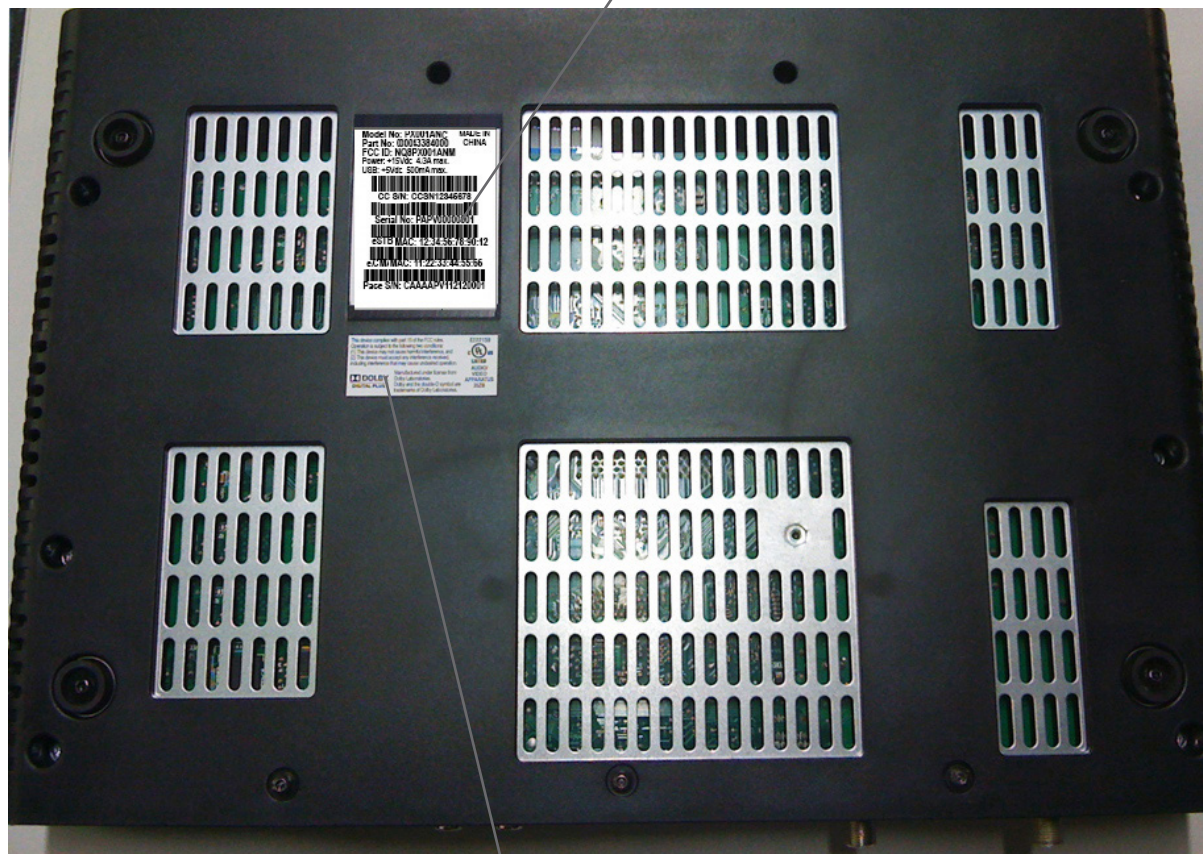

Position the APPROVALS label (top section) from **D667-PX001BNT-Product-Label-RevA** as squarely as possible in position shown.

Change since last revision:
First Issue.

Document Number	700-5100180
Drafted By	Nick
Date	7 March 2013
Sheet	1 of 4
Tech Pubs Approval	


LABEL POSITION INSTRUCTION

LABEL POSITION INSTRUCTION FOR PACE PX001BNT (XG1T D6671001900)

SERVICE CENTER INSTRUCTION

On all units returned into the service center, replace the black (manufacturing) tamper-evident label with the blue (service) tamper-evident label.

Position Tamper-evident label **298-1203730** as squarely as possible in position shown. Use firm finger pressure to press the label down flush and securely in place.

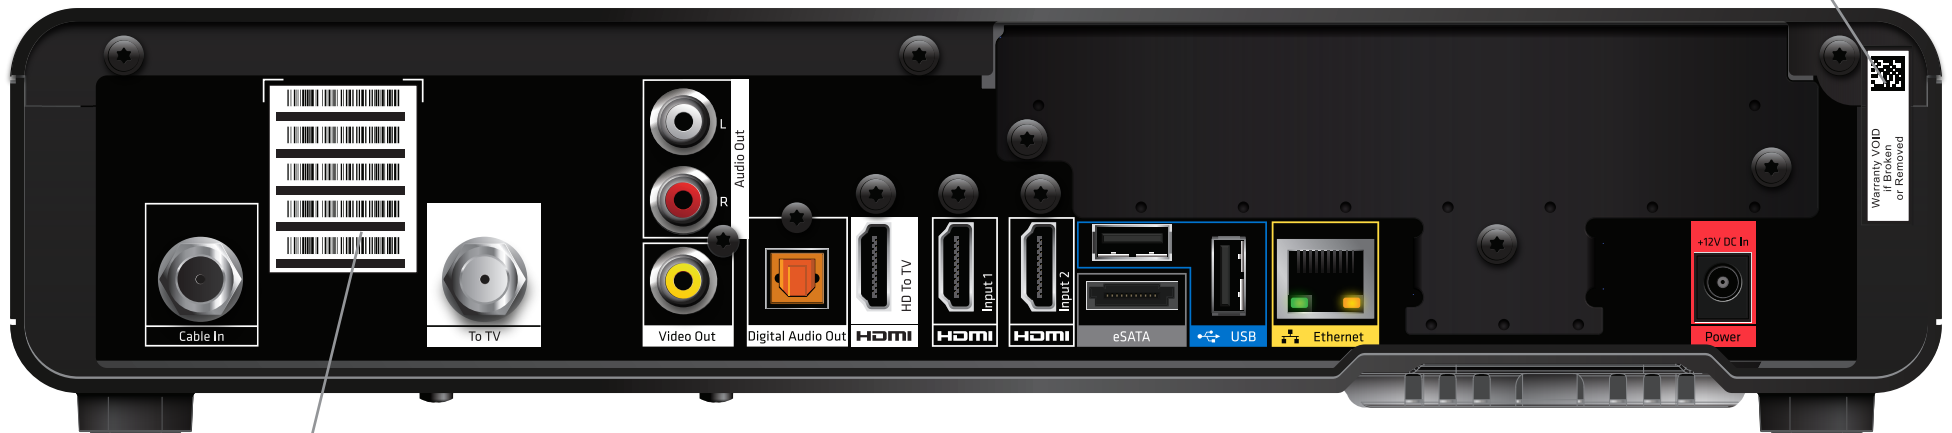


Position the rear-panel serial number label (bottom section) from **D667-PX001BNT-Product-Label-RevA** as squarely as possible in position shown.

Document Number	700-5100180
Sheet	2 of 4

LABEL POSITION INSTRUCTION

LABEL POSITION INSTRUCTION FOR PACE PX001BNT (XG1T D6671001900)

Position Proposition 65 label 299-1005125 as squarely as possible in position shown.

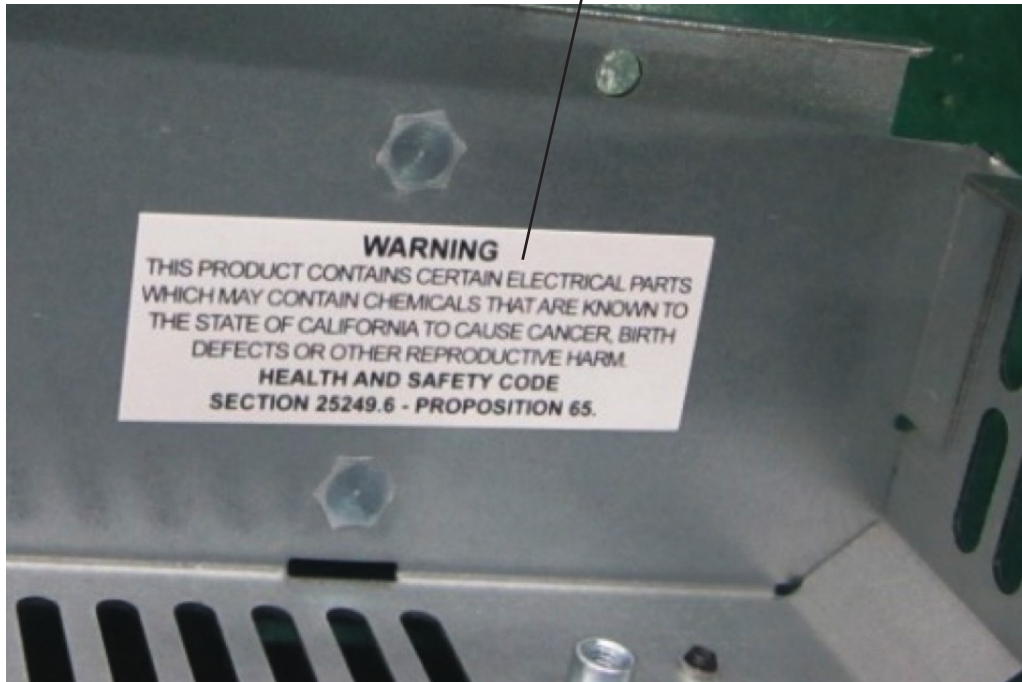


Document Number 700-5100180


Sheet 3 of 4

LABEL POSITION INSTRUCTION

LABEL POSITION INSTRUCTION FOR PACE PX001BNT (XG1T D6671001900)

Position CARTON label **D667-PX001BNT-Carton-Label-RevA**
as squarely as possible in position shown.

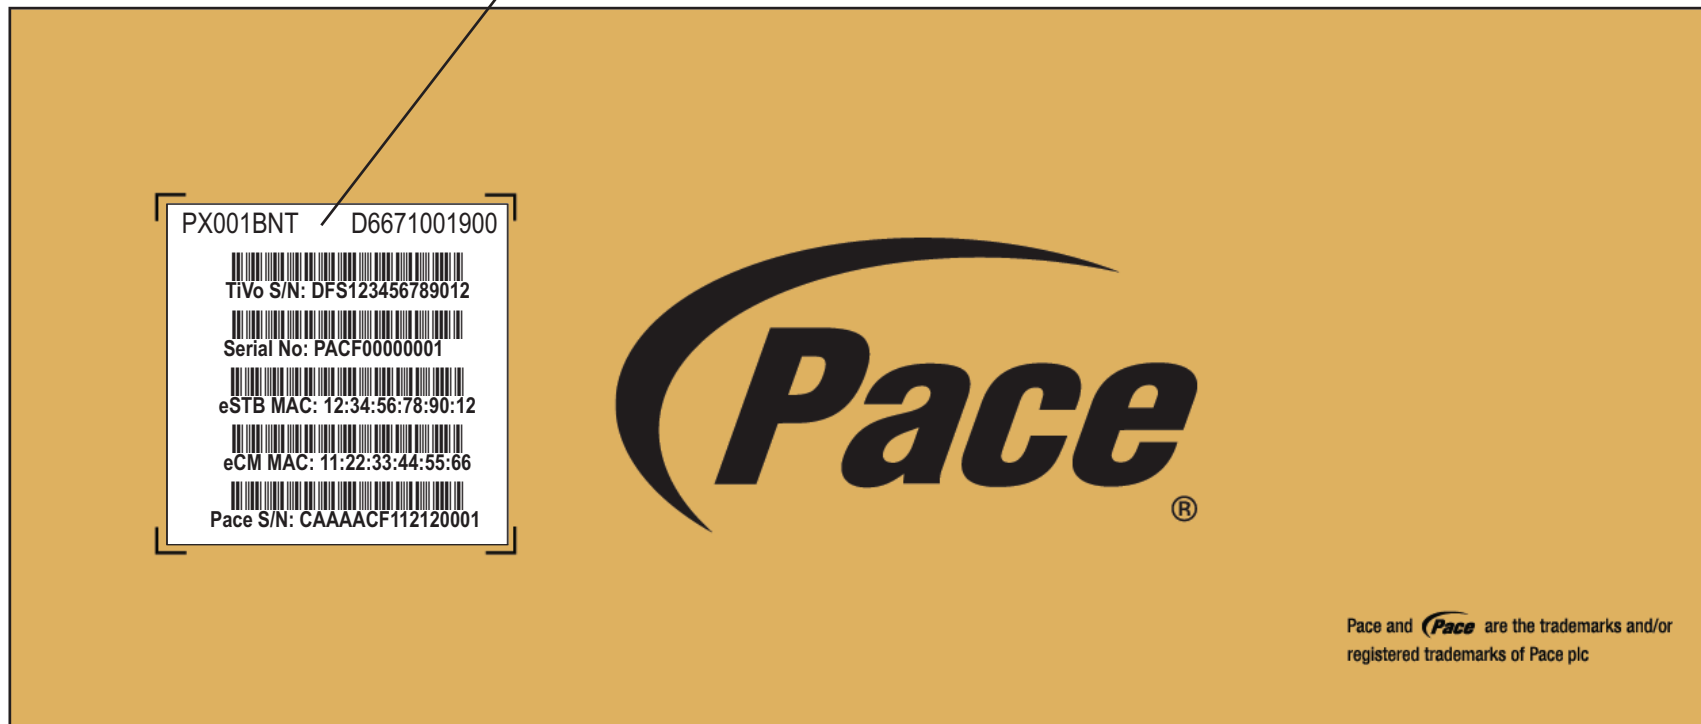

Pace and  are the trademarks and/or registered trademarks of Pace plc

Document Number 700-5100180

Sheet 4 of 4