

LABEL POSITION INSTRUCTION

LABEL POSITION INSTRUCTION FOR PACE E1183415000 (COMCAST PX013ANM)


Position Tamper-evident label **298-1203730** as squarely as possible in position shown. Use firm finger pressure to press the label down flush and securely in place.

SERVICE CENTER INSTRUCTION
On all units returned into the service center, replace the black (manufacturing) tamper-evident label with the blue (service) tamper-evident label.

Position Approvals label (top section of **E118-PX013ANM-Product-Label-RevA**) as squarely as possible in position shown.

Position base serial-number label (middle section of **E118-PX013ANM-Product-Label-RevA**) as squarely as possible in position shown.

Position COMCAST TAMPERING label 298-3415000 as squarely as possible in position shown.

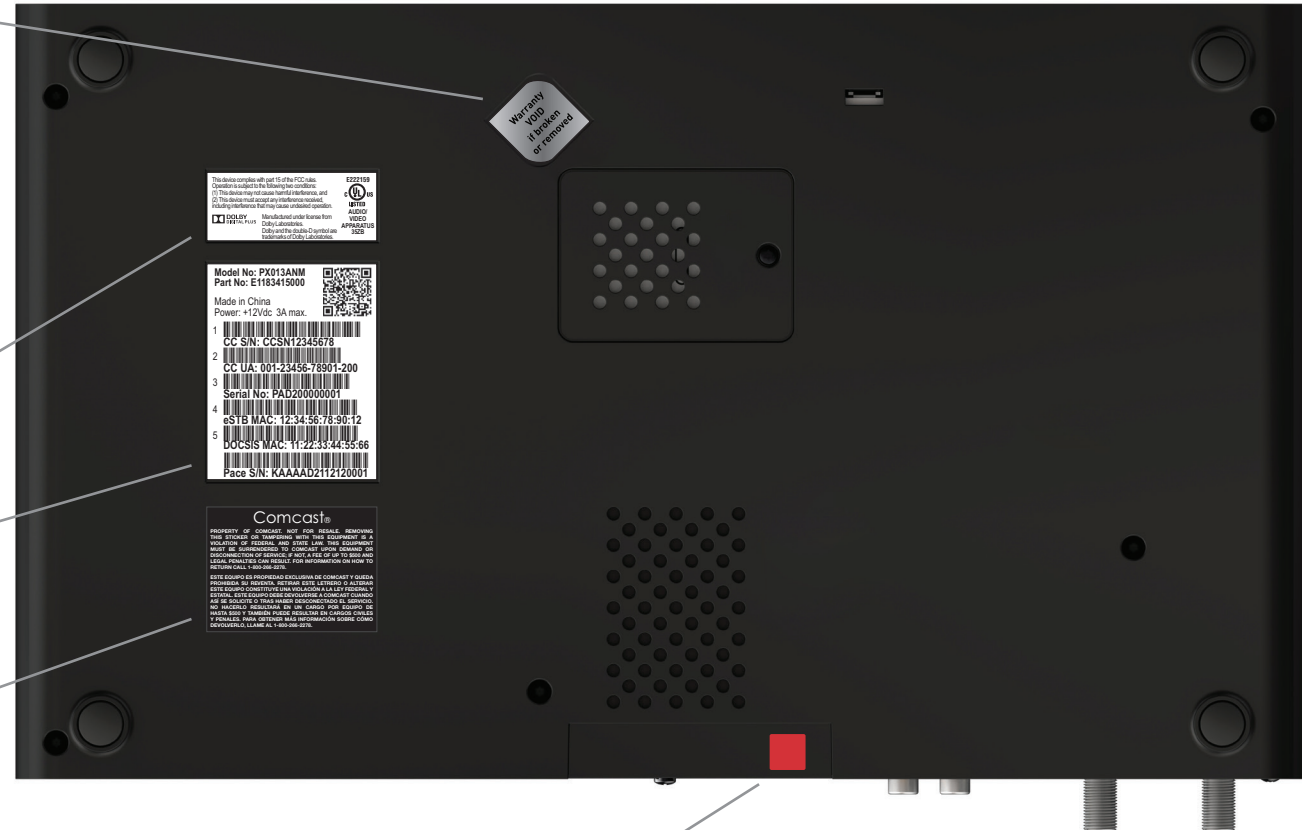

Position RED CABLECARD label **298-3409710** as squarely as possible in position shown, aligned with the left-hand edge of the rear-panel M-CARD text.

Document Number	700-5340350
Drafted By	Nick Tonge
Date	12 February 2014
Sheet	1 of 3
Tech Pubs Approval	

LABEL POSITION INSTRUCTION

LABEL POSITION INSTRUCTION FOR PACE E1183415000 (COMCAST PX013ANM)

Position the rear-panel QR Code label (bottom right section of **E118-PX013ANM-Product-Label-RevA**) as squarely as possible in position shown.

Position the rear-panel serial number label (bottom left section of **E118-PX013ANM-Product-Label-RevA**) as squarely as possible in position shown.



Document Number 700-5340350

Sheet 2 of 3

LABEL POSITION INSTRUCTION

LABEL POSITION INSTRUCTION FOR PACE E1183415000 (COMCAST PX013ANM)



Position 4 x CARTON label
E118-PX013ANM-Carton-Label-RevA (one per unit)
as squarely as possible between the corner tick marks
in positions shown.

Document Number 700-5340350

Sheet 3 of 3