

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:1 of 50 Date: Oct. 11, 2002
--	----------------------	---

Product Name: Bluetooth USB Adapter
Model Number: BROR02
Applicant: AIPTEK International Inc.
No. 5-1, Innovation Road 1, Science-Based Industrial Park,
Hsin-Chu, Taiwan, R.O.C.
Date of Receipt: Sep. 24,2002
Finished date of Test: Sep. 25, 2002
Applicable Standards: 47 CFR Part 15, Subpart C
ANSI C63.4:1992

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Tested By : James Lee, Date: Oct. 11, 2002
(James Lee)

Checked By : Jonson Lee, Date: Oct. 11, 2002
(Jonson Lee)

Approved By : Harris W. Lai, Date: Oct. 11, 2002
(Harris W. Lai, Director)

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:2 of 50 Date:Oct. 11, 2002
---	----------------------	--

TABLE OF CONTENTS

1. DOCUMENT POLICY AND TEST STATEMENT.....	4
1.1 DOCUMENT POLICY.....	4
1.2 TEST STATEMENT	4
2. DESCRIPTION OF EUT AND TEST MODE.....	4
2.1 GENERAL DESCRIPTION OF EUT.....	4
2.2 DESCRIPTION OF SUPPORT UNIT.....	5
2.3 DESCRIPTION OF TEST MODE	5
3. DESCRIPTION OF APPLIED STANDARDS.....	5
4 TECHNICAL CHARACTERISTICS TEST.....	6
4.1 CONDUCTED EMISSION TEST	6
4.1.1 LIMIT	6
4.1.2 TEST EQUIPMENT	6
4.1.3 TEST SETUP	7
4.1.4 TEST PROCEDURE	7
4.1.5 EUT OPERATING CONDITION	7
4.1.6 TEST RESULT	8
4.2 RADIATED EMISSION TEST.....	9
4.2.1 LIMIT	9
4.2.2 TEST EQUIPMENT	10
4.2.3 TEST SET-UP	11
4.2.4 TEST PROCEDURE.....	11
4.2.5 EUT OPERATING CONDITION	12
4.2.6 TEST RESULT	12
4.3 CHANNEL SEPARATION TEST	16
4.3.1 LIMIT	16
4.3.2 TEST EQUIPMENT	16
4.3.3 TEST SET-UP	16
4.3.4 TEST PROCEDURE.....	16
4.3.5 EUT OPERATING CONDITION	16
4.3.6 TEST RESULT	17
4.4 QUANTITY OF HOPPING CHANNEL TEST	20
4.4.1 LIMIT	20
4.4.2 TEST EQUIPMENT	20
4.4.3 TEST SET-UP	20
4.4.4 TEST PROCEDURE.....	20
4.4.5 EUT OPERATING CONDITION	20
4.4.6 TEST RESULT	21
4.5 AVERAGE TIME OF OCCUPANCY TEST	22
4.5.1 LIMIT	22
4.5.2 TEST EQUIPMENT	22



4.5.3 TEST SET-UP	22
4.5.4 TEST PROCEDURE.....	22
4.5.5 EUT OPERATING CONDITION	22
4.5.6 TEST RESULT	23
4.6 20DBC BANDWIDTH TEST.....	26
4.6.1 LIMIT	26
4.6.2 TEST EQUIPMENT	26
4.6.3 TEST SET-UP	26
4.6.4 TEST PROCEDURE.....	26
4.6.5 EUT OPERATING CONDITION	26
4.6.6 TEST RESULT	27
4.7 PEAK POWER TEST	30
4.7.1 LIMIT	30
4.7.2 TEST EQUIPMENT	30
4.7.3 TEST SET-UP	31
4.7.4 TEST PROCEDURE.....	31
4.7.5 EUT OPERATING CONDITION	31
4.7.6 TEST RESULT	31
4.8 BAND EDGE TEST.....	35
4.8.1 LIMIT	35
4.8.2 TEST EQUIPMENT	35
4.8.3 TEST SET-UP	36
4.8.4 TEST PROCEDURE.....	37
4.8.5 EUT OPERATING CONDITION	37
4.8.6 TEST RESULT	37
4.9 POWER DENSITY TEST	40
4.9.1 LIMIT	40
4.9.2 TEST EQUIPMENT	40
4.9.3 TEST SET-UP	40
4.9.4 TEST PROCEDURE.....	40
4.9.5 EUT OPERATING CONDITION	40
4.9.6 TEST RESULT	41
4.10 RF POWER EXPOSURE EVALUATION TEST	44
4.10.1 LIMIT	44
4.10.2 TEST EQUIPMENT	45
4.10.3 TEST SET-UP	45
4.10.4 TEST PROCEDURE.....	45
4.10.5 EUT OPERATING CONDITION	46
4.10.6 RESULT	46
5. ANTENNA APPLICATION	47
5.1 ANTENNA REQUIREMENT	47
5.2 RESULT	47
6. PHOTOS OF TESTING	48
7. TERMS OF ABRIVATION	50

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:4 of 50 Date:Oct. 11, 2002
---	----------------------	--

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 120 VAC/60 Hz, was used during the test.

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth USB Adapter
MODEL NO.	BROR02
POWER SUPPLY	5Vdc from USB port of PC system
CABLE	N/A
I/O PORT	USB interface
FREQUENCY BAND	2400~2483.5MHz
CARRIER FREQUENCY	CH0: 2402MHz~CH78: 2480MHz
NUMBER OF CHANNEL	79
CHANNEL SPACING	1MHz
RATED RF OUTPUT POWER	1mW
I.F. & L.O.	I.F.: 0MHz, L.O.:2402~2480MHz
MODULATION TYPE	GFSK (FHSS)
BIT RATE OF TRANSMISSION	1Mbps
ANTENNA TYPE	Monopole antenna printed on PCB

NOTE : The EUT is a wireless data communication device. For more detailed features, please refer to the manufacturer's specification or User's Manual of EUT.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<p>TEST REPORT</p>	<p>Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:5 of 50 Date:Oct. 11, 2002</p>
---	---------------------------	---

2.2 DESCRIPTION OF SUPPORT UNIT

The transmitter part of EUT was tested with a PC system and configured by the requirement of ANSI C63.4. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID / DOC	CABLE
1.	Notebook	DELL	PP01L/ 3F438A01	DOC	1.8m unshielded AC power cable 1.8m unshielded DC power cable
2	PRINTER	EPSON	P310B	DOC	1.5m unshielded power cord 1.2m shielded data cable
3	MODEM	DATATRONICS	1200CK	E2050V1200CK	1.5m unshielded DC power cable 1.2m shielded data cable

NOTE : For the actual test configuration, please refer to the photos of testing.

2.3 DESCRIPTION OF TEST MODE

79 channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
0	2402
39	2441
78	2480

NOTE :

1. Below 1 GHz, the channel 0, 39, and 78 were pre-tested in chamber. The channel 78, worst case one, was chosen for conducted and radiated emission test.
2. Above 1 GHz, the channel 0, 39 and 78 were tested individually

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of wireless product and to be connected with a PC system for normal use. According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C

ANSI C63.4:1992

All tests have been performed and recorded as the above standards.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:6 of 50 Date:Oct. 11, 2002
---	----------------------	--

4 TECHNICAL CHARACTERISTICS TEST

4.1 CONDUCTED EMISSION TEST

4.1.1 LIMIT

Frequency (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE :

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.


4.1.2 TEST EQUIPMENT

The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESHS30/ 826003/008	JUL. 2003 R&S
LISN	50 μ H, 50 ohm	SOLAR ELECTRONICS	8215-50-R-24-BNC / 924839	JUN. 2003 ETC
LISN	50 μ H, 50 ohm	SOLAR ELECTRONICS	9252-50-R-24-BNC / 951318	JUN. 2003 ETC

NOTE : The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.1.3 TEST SETUP

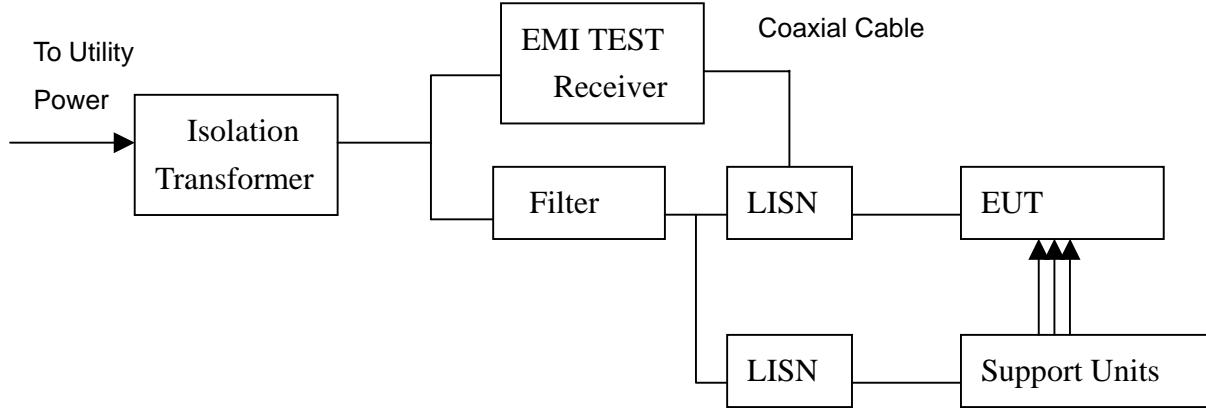

NOTE :

1. The EUT was put on a wooden table with 0.8m height above ground plane, and 0.4m away from reference ground plane (> 2m*2m).
2. For the actual test configuration, please refer to the photos of testing.

4.1.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4 and CISPR 22. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50µH as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

4.1.5 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at a specific channel frequency.

Under Windows 2000 run "EMI TEST" program, PC sent "H" pattern or accessed the following peripherals :

- RS232 (modem)
- Printer
- FDD
- HDD

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:8 of 50 Date:Oct. 11, 2002
---	----------------------	--

4.1.6 TEST RESULT

Temperature:	26 °C	Humidity:	59 %RH
Ferquency Range:	0.15 – 30 MHz	Test Mode:	Ch78
Receiver Detector:	Q.P. and AV.	Tested By:	James Lee

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.172	0.20	38.0	24.1	38.2	24.3	64.9	54.9	-26.7	-30.6
0.482	0.20	14.6	11.0	14.8	11.2	56.3	46.3	-41.5	-35.1
0.550	0.20	16.2	12.3	16.4	12.5	56.0	46.0	-39.6	-33.5
1.150	0.20	14.0	4.5	14.2	4.7	56.0	46.0	-41.8	-41.3

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.172	0.20	39.9	25.7	40.1	25.9	64.8	54.8	-24.7	-28.9
0.480	0.20	15.9	12.2	16.1	12.4	56.3	46.3	-40.2	-33.9
0.550	0.20	19.3	16.2	19.5	16.4	56.0	46.0	-36.5	-29.6
1.150	0.20	15.6	7.2	15.8	7.4	56.0	46.0	-40.2	-38.6

NOTE :

1. Measurement uncertainty is less than +/- 2dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. **: Measurement does not apply for this frequency.
5. Margin value = Emission level - Limit
6. The emission of other frequencies were very low against the limit.
7. -: The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:9 of 50 Date:Oct. 11, 2002
---	----------------------	--

4.2 RADIATED EMISSION TEST

4.2.1 LIMIT

FCC Part15, Subpart C Section 15.209 limit of radiated emission for frequency below1000MHz. The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB μ V/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
ABOVE 960	3	54.0

NOTE : 1. In the emission tables above , the tighter limit applies at the band edges.

2. Distance refers to the distance between measuring instrument , antemma , and the closest point of any part of the device or system.

FCC Part 15, Section15.35(b) limit of radiated emission for frequency above 1000 MHz

FREQUENCY (MHz)	Class A (dB μ V/m) (at 3m)		Class B (dB μ V/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

FUNDAMENTAL FREQUENCY (MHz)	FIELD STRENGTH OF FUNDAMENTAL (dB μ V/m) (at 3m)		FIELD STRENGTH OF HARMONICS (dB μ V/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88	68

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<p>TEST REPORT</p>	<p>Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:10 of 50 Date:Oct. 11, 2002</p>
---	---------------------------	--

4.2.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	AUG. 2003 R&S
SPECTRUM	9KHz-26.5GHz	HP	8953E/ 3710A03220	MAY. 2003 ETC
PRE-AMPLIFIER	1GHz-26.5GHz Gain:30dB	HP	8449B/ 3008A01019	NOV. 2002 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/9701-1124	JUL. 2003 ETC
HORN ANTENNA	1GHz to 18GHz	EMCO	3115/ 9602-4681	DEC. 2002 ETC
OATS	3 - 10 M measurement	SRT	SRT-1	MAY 2003

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



4.2.3 TEST SET-UP

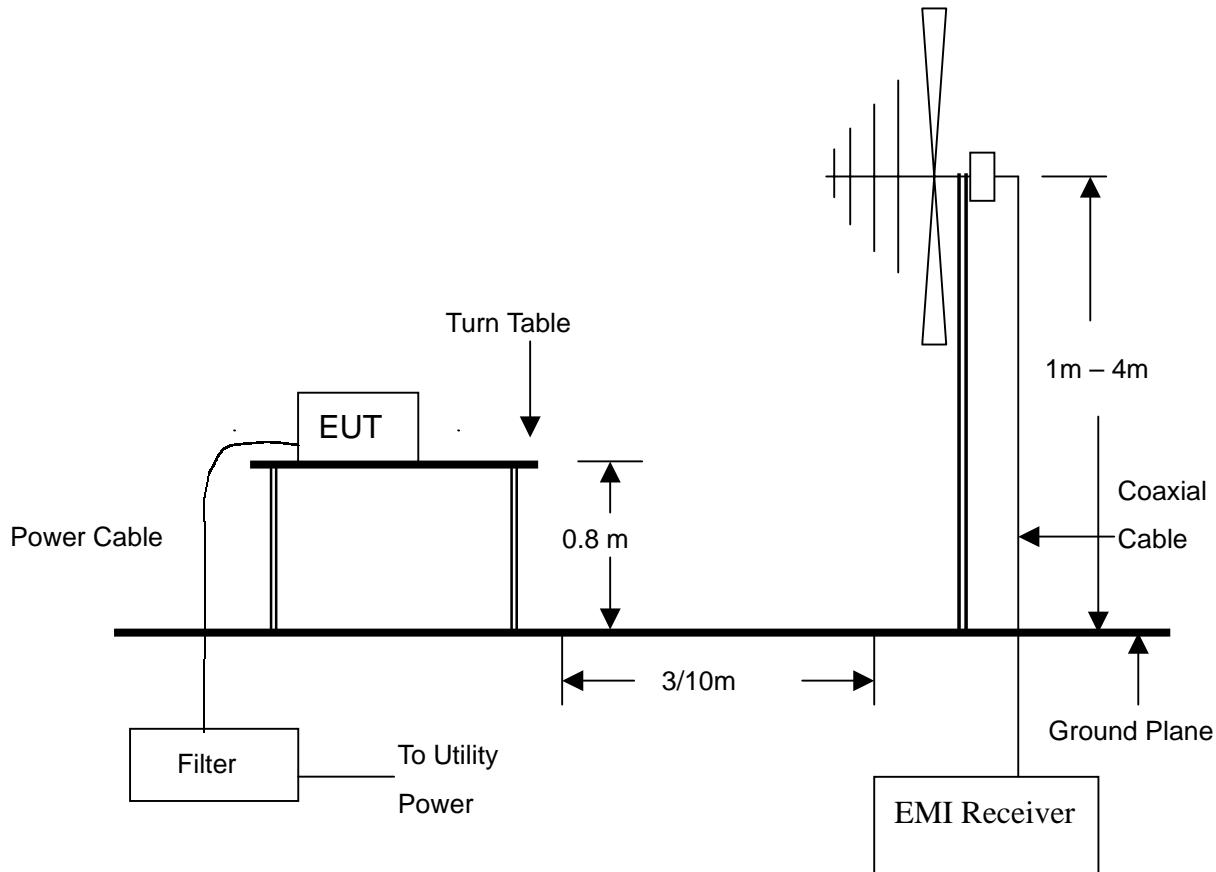

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.

4.2.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4 and CISPR 22. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz. All readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak and average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:12 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.2.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.

4.2.6 TEST RESULT

Temperature:	25°C	Humidity:	65%RH
Ferquency Range:	30 – 1000 MHz	Test mode:	Ch78
Receiver Detector:	Q.P. or AV.	Measured Distance:	3m
Tested by:	James Lee		

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	EL(m)	AZ(°)
113.68	1.06	8.44	19.5	29.0	43.5	-14.5	156	4
279.29	1.56	13.67	16.1	31.3	46.0	-14.7	177	4
668.90	2.51	21.1	14.8	38.4	46.0	-7.6	161	1.6

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	EL(m)	AZ(°)
308.3280	1.66	14.94	21.9	38.5	46.0	-7.5	136	3.3
398.4040	1.94	16.27	16.0	34.2	46.0	-11.8	145	2.8
668.5920	2.51	21.10	9.1	32.7	46.0	-13.3	178	1.5

NOTE :

1. Measurement uncertainty is less than +/- 4dB
2. **: Measurement does not apply for this frequency.
3. Emissiom Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:13 of 50 Date:Oct. 11, 2002
---	----------------------	---

Temperature: 25°C Humidity: 65%RH
Ferquency Range: 1 – 18 GHz Test mode: Ch0
Receiver Detector: PK. or AV. Measured Distance: 3m
Tested by: James Lee

Antenna Polarization : Horizontal

Freq./MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
2113.7000	-33.13	27.43	55.5	38.0	49.8	32.3	74.0	54.0	-18.5	-21.7	185	2.2
2162.0000	-33.21	27.52	52.5	38.5	46.8	32.8	74.0	54.0	-21.5	-21.2	224	2.2
2258.1000	-33.23	27.72	51.8	37.4	46.3	31.9	74.0	54.0	-22.2	-22.1	144	2.3
2401.8000(F)	-32.82	28.00	84.0	50.0	79.2	45.2	114	94.0	-30.0	-48.8	230	1.7
4804.0000	-32.24	33.64	55.2	40.1	56.6	41.5	74.0	54.0	-18.8	-12.5	228	1.2
7205.9000	-30.21	36.26	51.0	32.4	57.0	38.5	74.0	54.0	-23.0	-15.5	229	1.5

Antenna Polarization : Vertical

Freq/MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
2113.9500	-33.13	27.43	50.5	37.1	44.8	31.4	74.0	54.0	-23.5	-22.6	350	1.4
2162.0950	-33.21	27.52	49.8	36.7	44.1	31.0	74.0	54.0	-24.2	-23.0	324	1.8
2210.0750	-33.21	27.62	51.0	36.0	45.4	30.4	74.0	54.0	-23.0	-23.6	310	1.8
2257.9500	-33.23	27.71	53.6	38.5	48.1	33.0	74.0	54.0	-20.4	-21.0	330	1.0
2402.138(F)	-32.82	28.00	81.5	44.9	76.7	40.1	114	94.0	-32.5	-53.9	175	1.2
4803.6930	-32.24	33.64	54.4	39.8	55.8	41.2	74.0	54.0	-19.6	-12.8	165	2.0
7205.6730	-30.21	36.26	52.6	35.1	58.6	41.2	74.0	54.0	-21.5	-12.8	170	1.5

NOTE :

1. Measurement uncertainty is less than +/- 4dB
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
- 5.(F):The field strength of fundamental frequency.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:14 of 50 Date:Oct. 11, 2002
---	----------------------	---

Temperature: 25°C Humidity: 65%RH
 Ferquency Range: 1 – 18 GHz Test mode: Ch39
 Receiver Detector: PK. or AV. Measured Distance: 3m
 Tested by: James Lee

Antenna Polarization : Horizontal

Freq./MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
2152.700	-33.21	27.50	52.8	37.2	47.1	31.5	74.0	54.0	-21.2	-22.5	224	1.6
2200.900	-33.20	27.60	52.5	39.2	46.8	33.6	74.0	54.0	-21.6	-20.4	222	1.4
2248.900	-33.25	27.70	53.5	37.8	48.0	32.2	74.0	54.0	-20.5	-21.8	221	1.8
2297.600	-33.13	27.79	54.1	36.1	48.7	30.8	74.0	54.0	-19.9	-23.2	216	1.7
2440.975(F)	-32.85	28.08	85.0	52.7	80.2	47.9	114	94.0	-29.1	-46.1	220	1.9
4882.000	-32.17	33.71	52.1	36.5	53.6	38.0	74.0	54.0	-21.9	-16.0	215	1.7
7322.588	-30.40	36.36	48.0	29.5	53.9	35.5	74.0	54.0	-26.0	-18.5	237	1.4

Antenna Polarization : Vertical

Freq./MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
2057.063	-33.63	27.31	45.0	32.9	38.7	26.6	74.0	54.0	-29.0	-27.4	308	1.3
2152.800	-33.21	27.50	50.1	36.2	44.4	30.5	74.0	54.0	-23.9	-23.5	310	1.9
2201.100	-33.20	27.60	51.3	37.7	45.7	32.1	74.0	54.0	-22.7	-21.9	313	1.1
2249.600	-33.25	27.70	51.0	37.8	45.5	32.2	74.0	54.0	-23.0	-21.8	313	1.4
2297.025	-33.13	27.79	51.0	37.5	45.7	32.2	74.0	54.0	-23.0	-21.8	313	1.4
2440.910 (F)	-32.85	28.08	82.1	45.8	77.3	41.0	114	94.0	-31.9	-53.0	185	1.1
4881.439	-32.16	33.70	52.0	36.6	53.5	38.1	74.0	54.0	-22.0	-15.9	183	2.2
7322.600	-30.40	36.36	50.3	30.4	56.3	36.4	74.0	54.0	-23.7	-17.6	179	1.3

NOTE :

1. Measurement uncertainty is less than +/- 4dB
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
- 5.(F):The field strength of fundamental frequency.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:15 of 50 Date:Oct. 11, 2002
---	----------------------	---

Temperature:	25°C	Humidity:	65%RH
Ferquency Range:	1 – 18 GHz	Test mode:	Ch78
Receiver Detector:	PK. or AV.	Measured Distance:	3m
Tested by:	James Lee		

Antenna Polarization : Horizontal

Freq./MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
2168.8000	-33.21	27.54	48.7	34.0	43.0	28.3	74.0	54.0	-25.3	-25.7	221	1.2
2192.5000	-33.20	27.58	52.2	36.8	46.5	31.2	74.0	54.0	-21.9	-22.8	222	1.4
2287.9000	-33.16	27.77	53.6	37.5	48.2	32.2	74.0	54.0	-20.4	-21.8	216	1.6
2385.0000	-32.91	27.97	50.0	36.4	45.1	31.4	74.0	54.0	-24.0	-22.6	225	1.9
2479.9880(F)	-32.86	28.16	83.4	52.8	78.7	48.1	114	94.0	-30.6	-45.9	225	1.9
2483.5000	-32.86	28.17	58.4	35.0	53.7	30.3	74.0	54.0	-15.6	-23.7	225	1.9
4959.3000	-31.95	33.77	52.2	36.5	54.0	38.3	74.0	54.0	-21.8	-15.7	225	1.3
7439.1800	-30.37	36.45	43.1	30.7	49.1	36.8	74.0	54.0	-30.9	-17.2	225	2.2

Antenna Polarization : Vertical

Freq./MHz	Cable Loss (dB)	Ant. Fact. (dB)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Margin (dBuV/m)		AZ (o)	EL (m)
			PK	AV	PK	AV	PK	AV	PK	AV		
2191.8390	-33.20	27.58	50.7	36.8	45.1	31.2	74.0	54.0	-23.3	-22.8	223	1.6
2239.925	-33.24	27.68	50.4	35.9	44.8	30.3	74.0	54.0	-23.7	-23.7	225	1.7
2384.1880	-32.92	27.97	47.4	34.1	42.5	29.2	74.0	54.0	-26.6	-24.8	230	1.7
2479.8750(F)	-32.86	28.16	81.0	50.3	76.3	45.6	114	94.0	-33.0	-48.4	156	1.1
2483.5400	-32.86	28.17	56.3	34.1	51.6	29.4	74.0	54.0	-17.8	-24.6	162	1.1
4959.8750	-31.95	33.77	51.0	36.5	52.8	38.3	74.0	54.0	-23.0	-15.7	163	2.2
7439.4130	-30.37	36.45	47.7	31.3	53.8	37.3	74.0	54.0	-26.3	-16.7	196	1.0

NOTE :

1. Measurement uncertainty is less than +/- 4dB
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
- 5.(F):The field strength of fundamental frequency.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:16 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.3 CHANNEL SEPARATION TEST

4.3.1 LIMIT

FCC Part15, Subpart C Section 15.247(a)(1) . Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

FREQUENCY RANGE (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

4.3.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR.2003 R & S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SET-UP



The EUT was connected to a spectrum through a 50 ohm RF cable.

4.3.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.

4.3.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.


 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:17 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.3.6 TEST RESULT

Temperature: 25°C Humidity: 60%RH
Spectrum Detector: PK Tested by James Lee
Test Result PASS

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	SEPARATION READ VALUE (kHz)	SEPARATION LIMIT (kHz)
0	2402.05	1008.000	>25kHz
39	2441.048	1008.000	>25kHz
78	2479.058	1008.000	>25kHz

CH0:

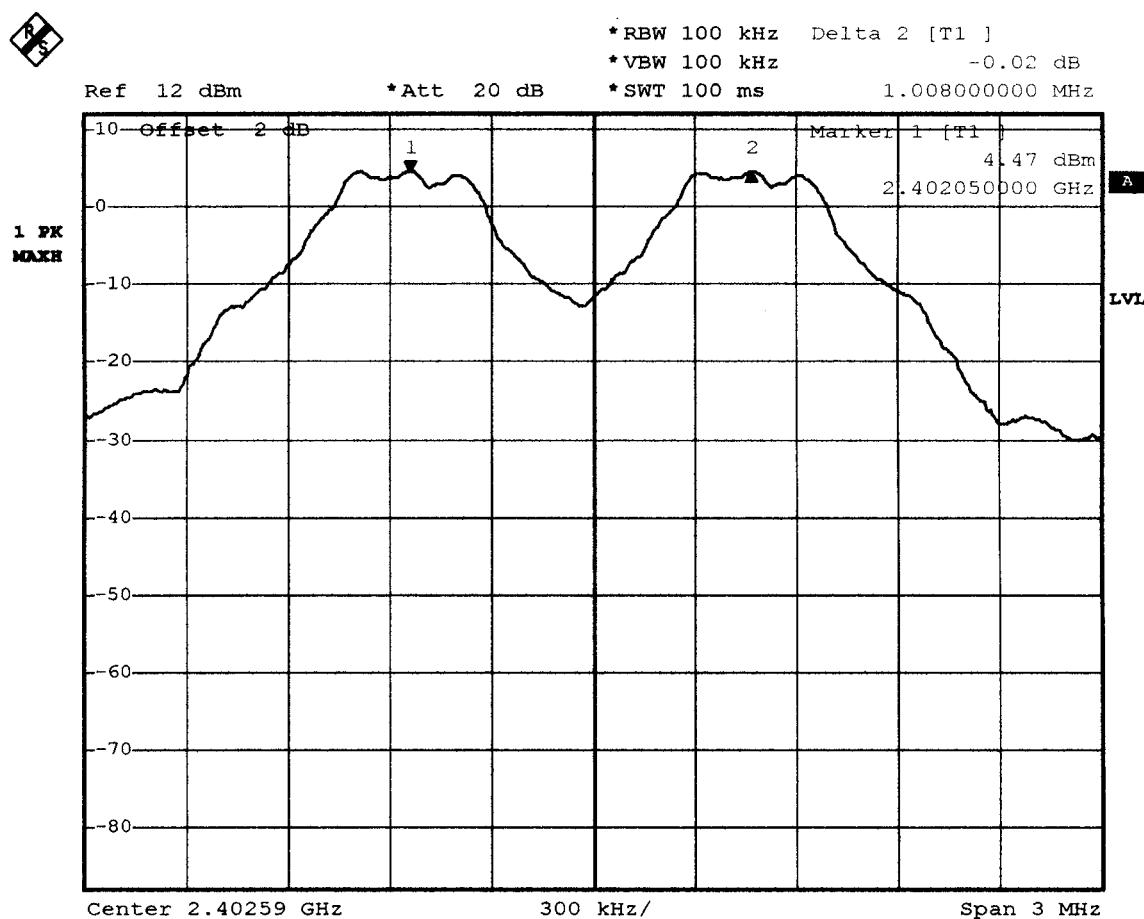




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:18 of 50
Date:Oct. 11, 2002

CH39:

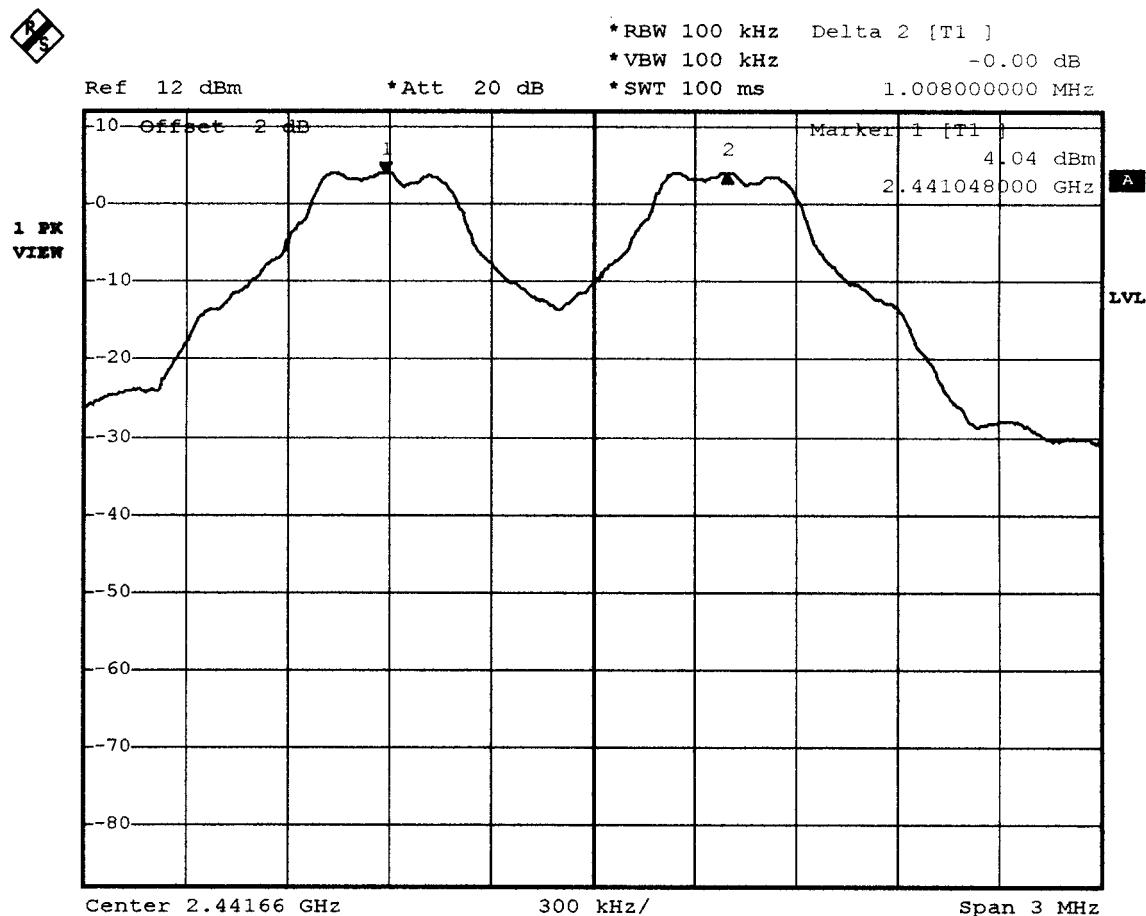

Date: 29.AUG.2002 14:12:42




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:19 of 50
Date:Oct. 11, 2002

CH78:

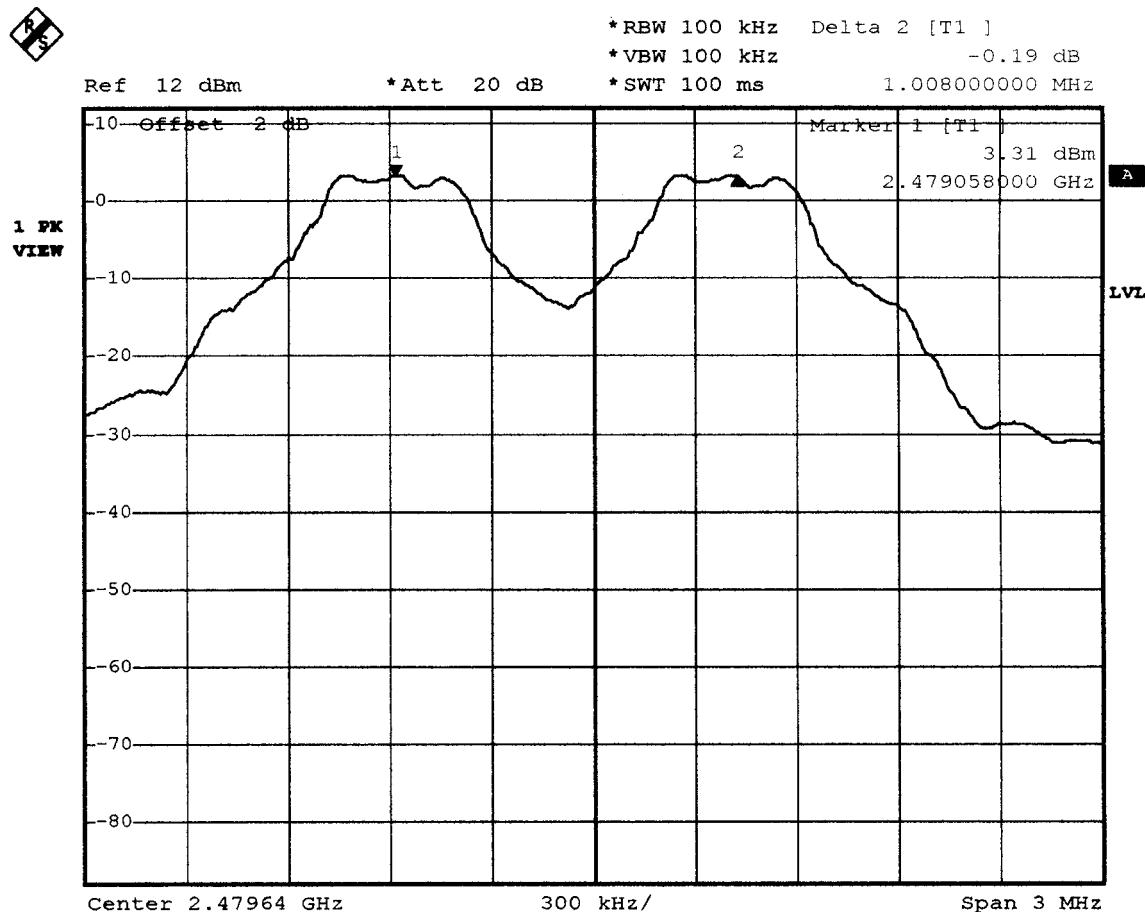

Date: 29.AUG.2002 14:15:02

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:20 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.4 QUANTITY OF HOPPING CHANNEL TEST

4.4.1 LIMIT

FCC Part15, Subpart C Section 15.247.

FREQUENCY RANGE (MHz)	Limit (Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	75	15
5725-5850	NA	NA	75	NA


4.4.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR.2003 R & S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST SET-UP



The EUT was connected to a spectrum through a 50 RF cable.

4.4.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.

4.4.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.


 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:21 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.4.6 TEST RESULT

Temperature:	25°C	Humidity:	60%RH
Spectrum Detector:	PK	Tested by	James Lee
Test Result	PASS		

HOPPING CHANNEL FREQUENCY RANGE	QUANTITY OF HOPPING CHANNEL	
	READ VALUE	LIMIT
2402~2480	79	75

CH0-CH78

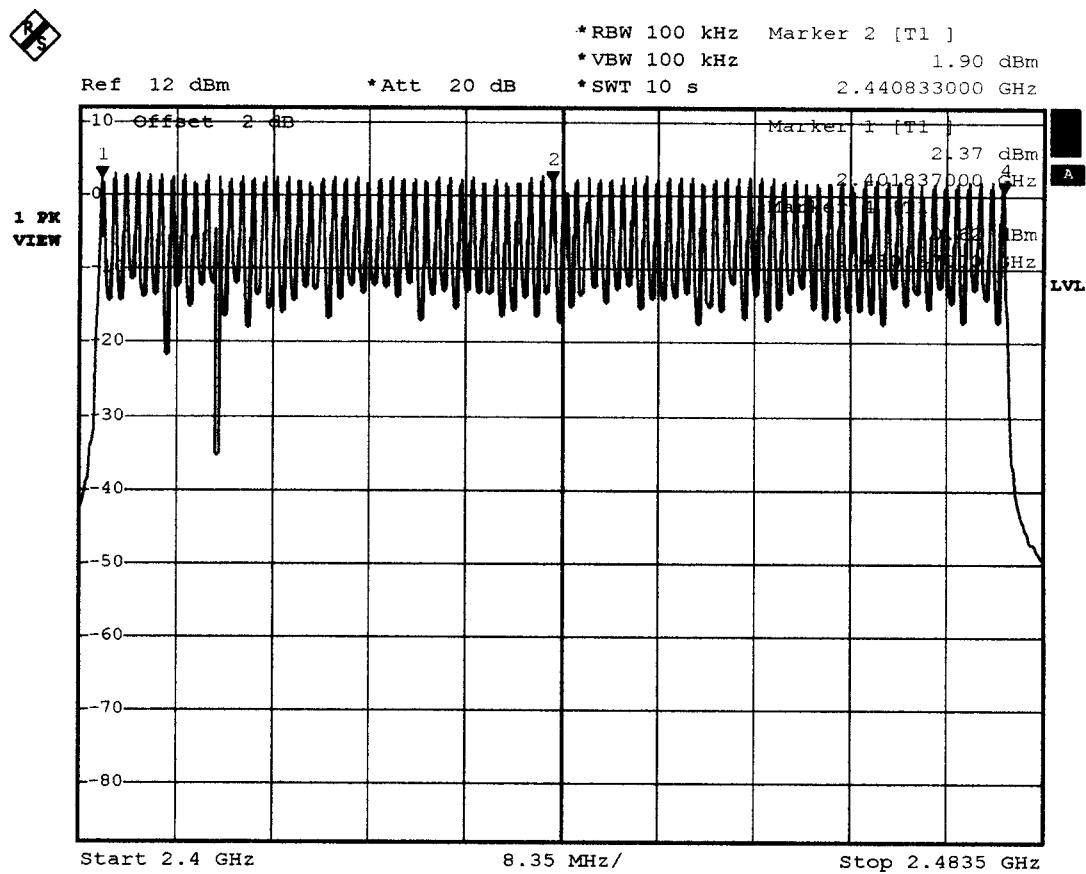

Date: 29.AUG.2002 14:08:00

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:22 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.5 AVERAGE TIME OF OCCUPANCY TEST

4.5.1 LIMIT

FCC Part15, Subpart C Section 15.247.

FREQUENCY RANGE (MHz)	LIMIT (ms)		
	20dB bandwidth <250kHz(50Channel)	20dB bandwidth >250kHz(25Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20s)	400(10s)	NA
2400-2483.5	NA	NA	400(30s)
5725-5850	NA	NA	400(30s)

NOTE: The “()” is all channel's average time of occupancy.


4.5.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR.2003 R & S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST SET-UP



The EUT was connected to a spectrum through a 50 RF cable.

4.5.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.

4.5.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT


Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:23 of 50
Date:Oct. 11, 2002

4.5.6 TEST RESULT

Temperature: 25°C Humidity: 60%RH
Spectrum Detector: PK Tested by James Lee
Test Result PASS

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	Average time of occupancy READ VALUE (ms)	Average time of occupancy LIMIT (ms)
0	2402.049	1.276	400
39	2441.046	1.284	400
78	2480.466	1.260	400

CH0:

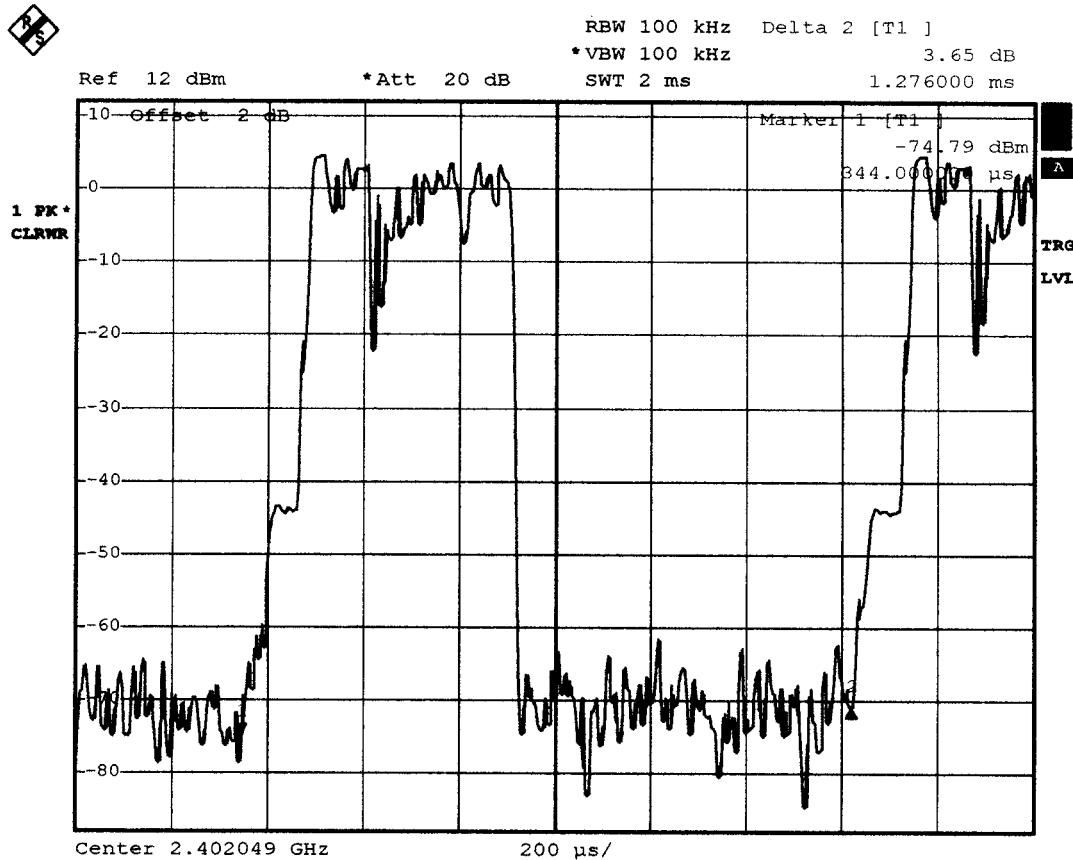

Date: 29.AUG.2002 12:37:43




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:24 of 50
Date:Oct. 11, 2002

Ch39:

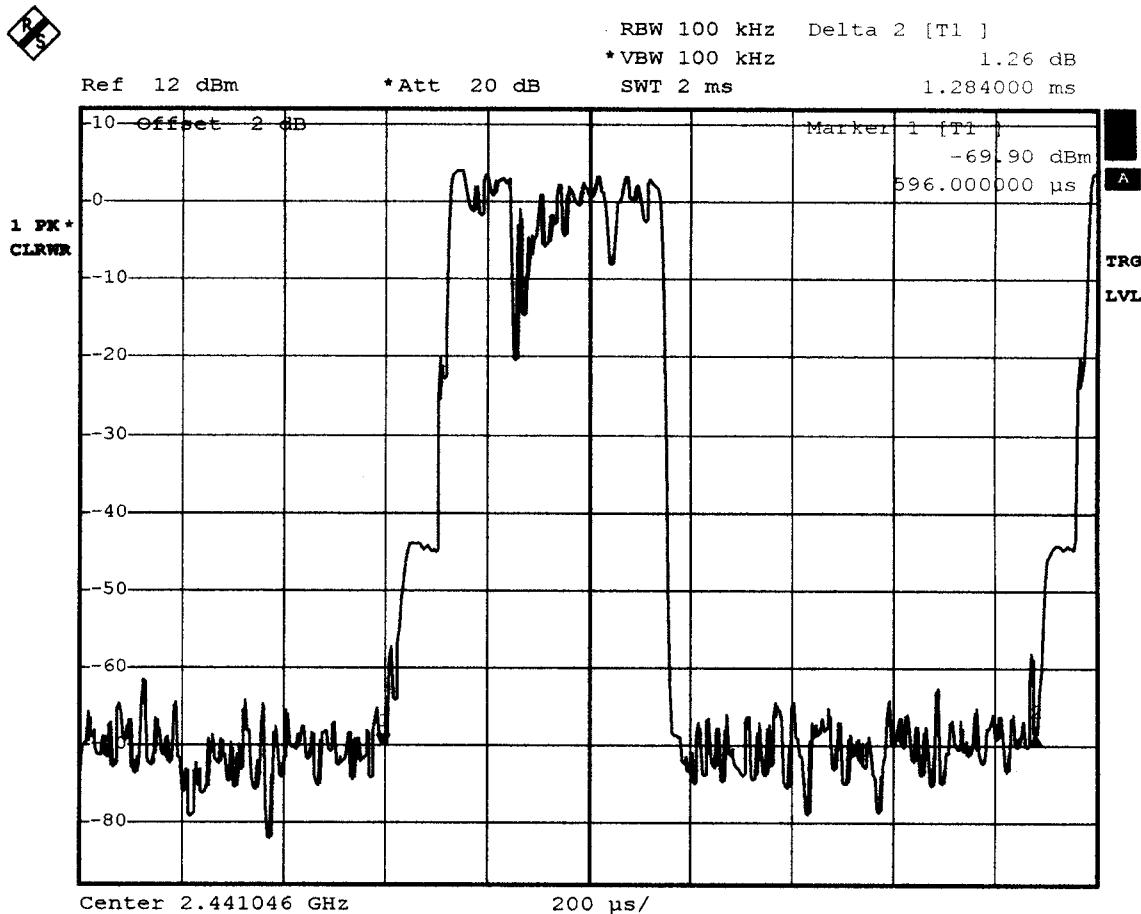

Date: 29.AUG.2002 12:48:20




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:25 of 50
Date:Oct. 11, 2002

CH78:

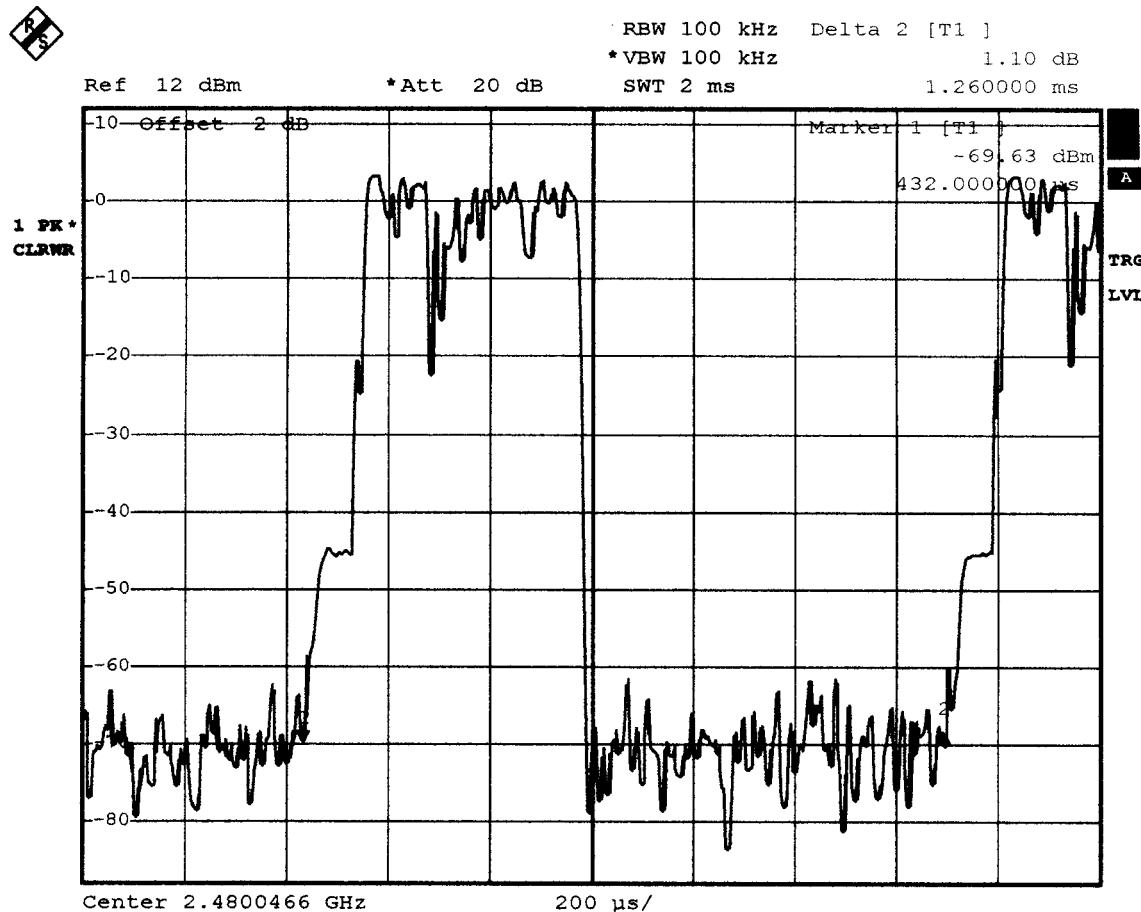

Date: 29.AUG.2002 13:00:45

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:26 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.6 20dBc BANDWIDTH TEST

4.6.1 LIMIT

FCC Part15, Subpart C Section 15.247.

FREQUENCY RANGE (MHz)	LIMIT (kHz)				
	Quantity of Hopping Channel	50	25	15	75
902-928	<250kHz	>250kHz	NA	NA	
2400-2483.5	NA	NA	>1000	<1000	


4.6.2 TEST EQUIPMENT

The following test equipment was used during the test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR.2003 R & S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST SET-UP



The EUT was connected to a spectrum through a 50 RF cable.

4.6.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.

4.6.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.


 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:27 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.6.6 TEST RESULT

Temperature: 25°C Humidity: 60%RH
 Spectrum Detector: PK Tested by James Lee
 Test Result PASS

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	20 dB DOWN BW (kHz)	MAXIMUM LIMIT (kHz)
0	2402	924	1000
39	2441	784	1000
78	2480	784	1000

CH0:

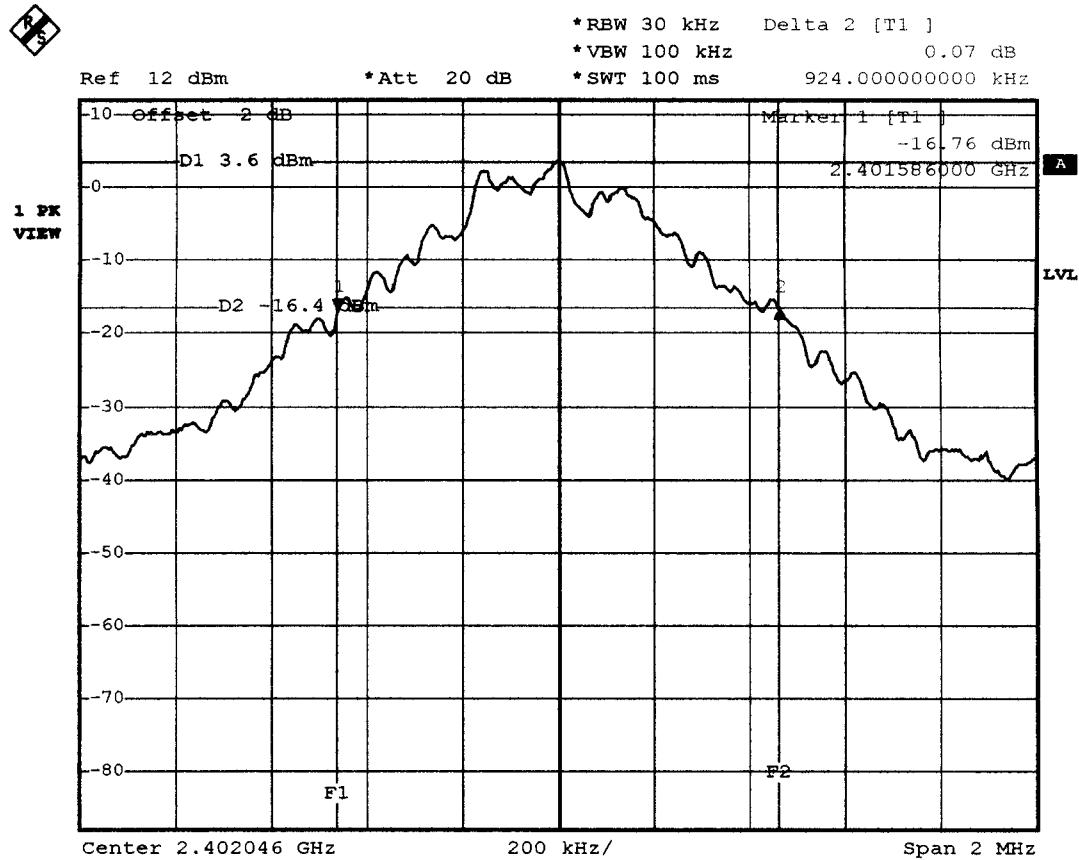

Date: 29.AUG.2002 12:29:15




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:28 of 50
Date:Oct. 11, 2002

CH39:

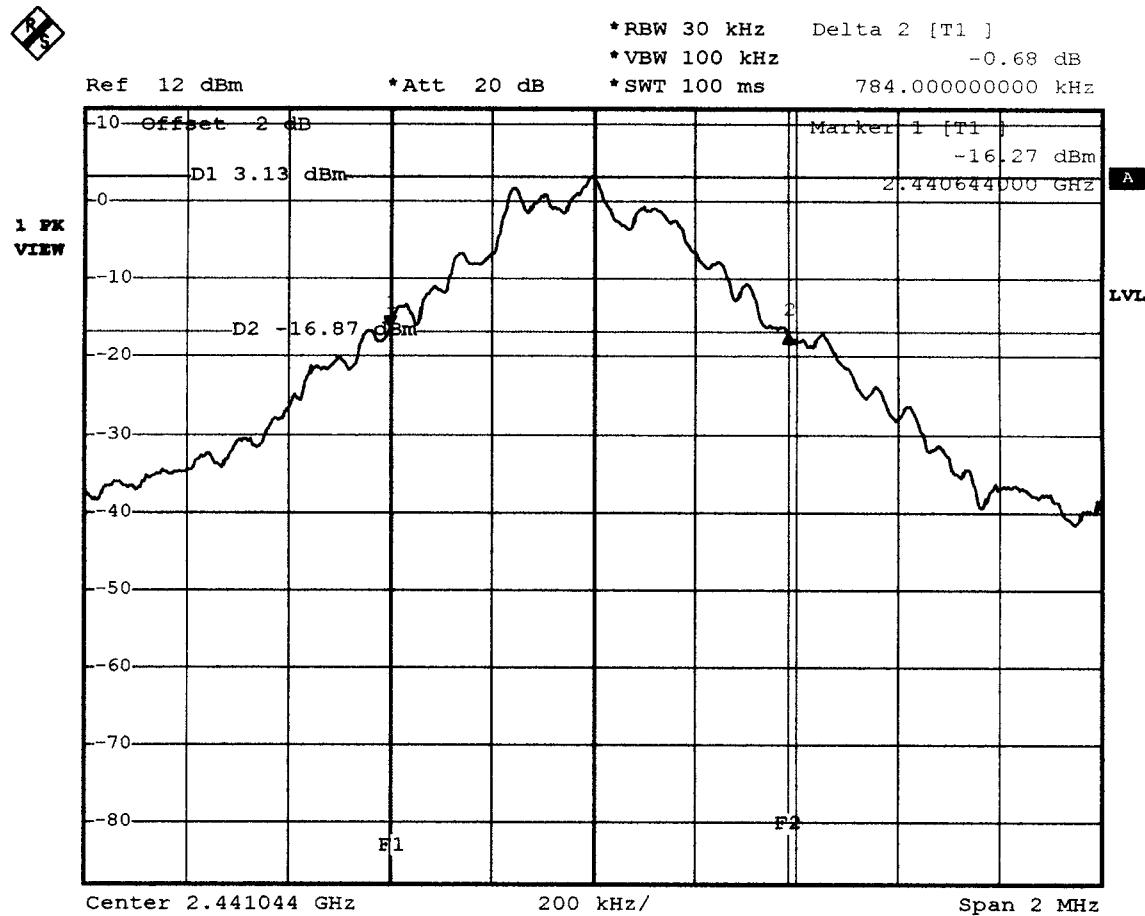

Date: 29.AUG.2002 12:43:44




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:29 of 50
Date:Oct. 11, 2002

CH78:

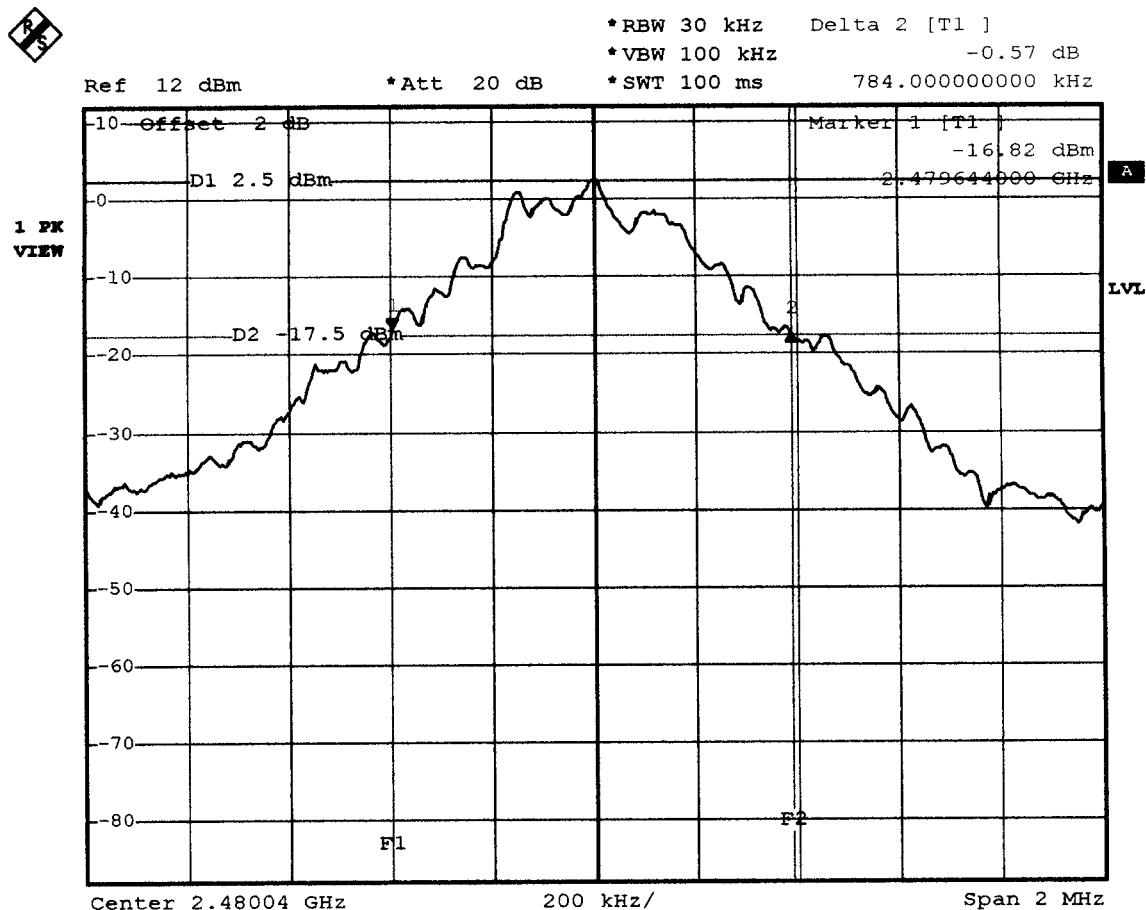

Date: 29.AUG.2002 12:53:15

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:30 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.7 PEAK POWER TEST

4.7.1 LIMIT

FCC Part15, Subpart C Section 15.247.

FREQUENCY RANGE (MHz)	LIMIT (W)				
	Quantity of Hopping Channel	50	25	15	75
902-928	1(30dBm)	0.125(21dBm)	NA	NA	NA
2400-2483.5	NA	NA	0.125(21dBm)	1(30dBm)	
5725-5850	NA	NA	NA	NA	1(30dBm)

4.7.2 TEST EQUIPMENT

The following test equipment was used during the test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2003 R & S
POWER METER	N/A	HP	435A/ 1810A08277	NOV. 2002 ETC
POWER SENSOR	DC-18GHz 0.3 μ W-100mW 50	HP	8481A	NOV. 2002 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:31 of 50
Date:Oct. 11, 2002

4.7.3 TEST SET-UP

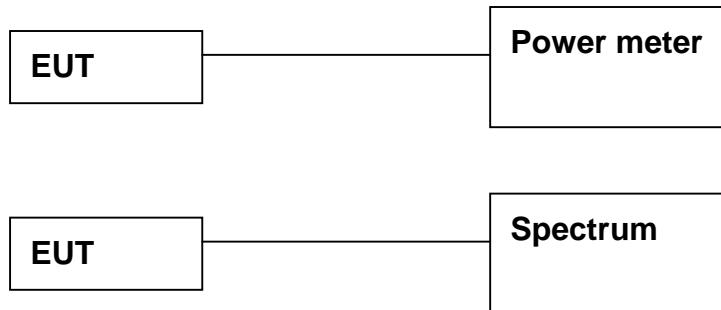

The EUT was connected to a spectrum through a 50 RF cable.

4.7.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.
Recorded the read value of the power meter.

4.7.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.

4.7.6 TEST RESULT

Temperature:	25°C	Humidity:	60%RH
Spectrum Detector:	PK	Tested by	James Lee
Test Result	PASS		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)
0	2402.0456	4.3	30
39	2441.0454	3.9	30
78	2480.0466	3.3	30




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:32 of 50
Date:Oct. 11, 2002


CH0:

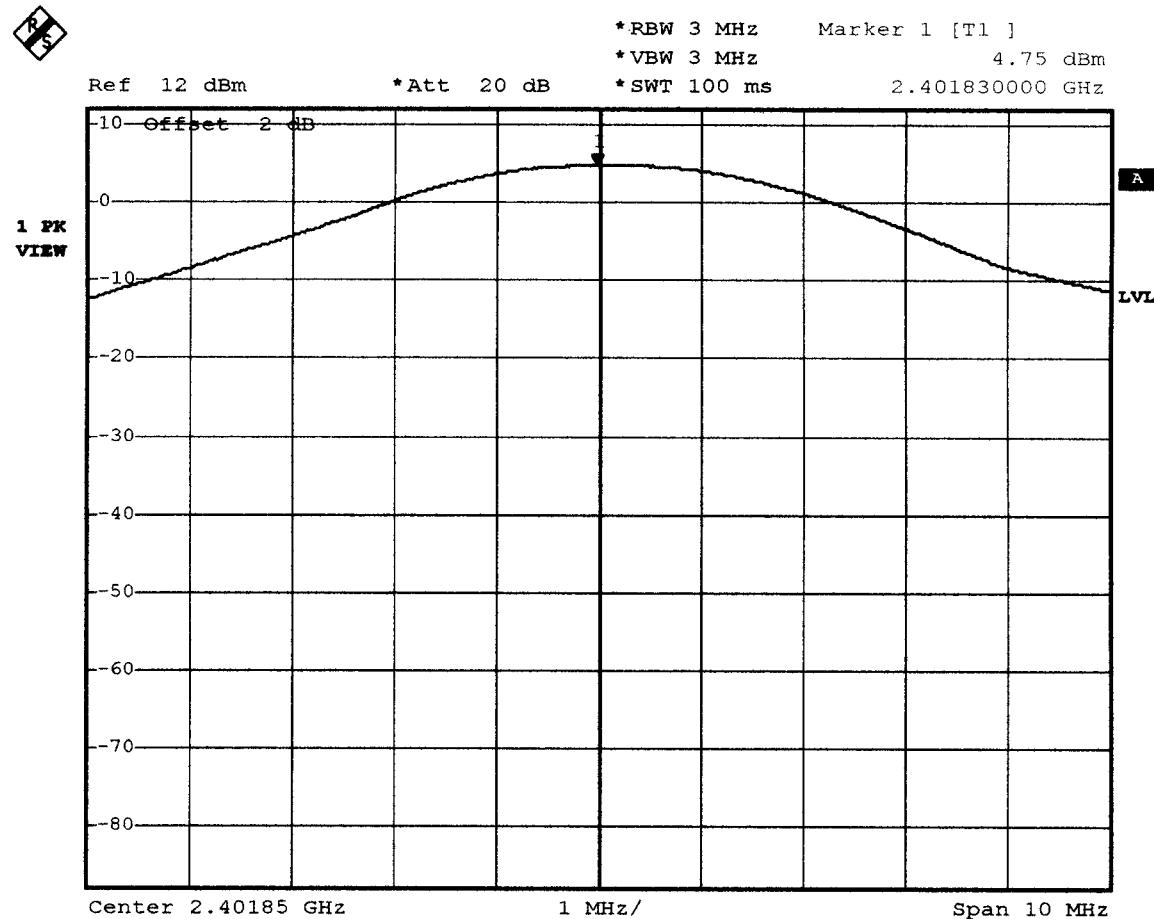

Date: 29.AUG.2002 12:26:53

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:33 of 50 Date:Oct. 11, 2002
---	----------------------	---

CH39:

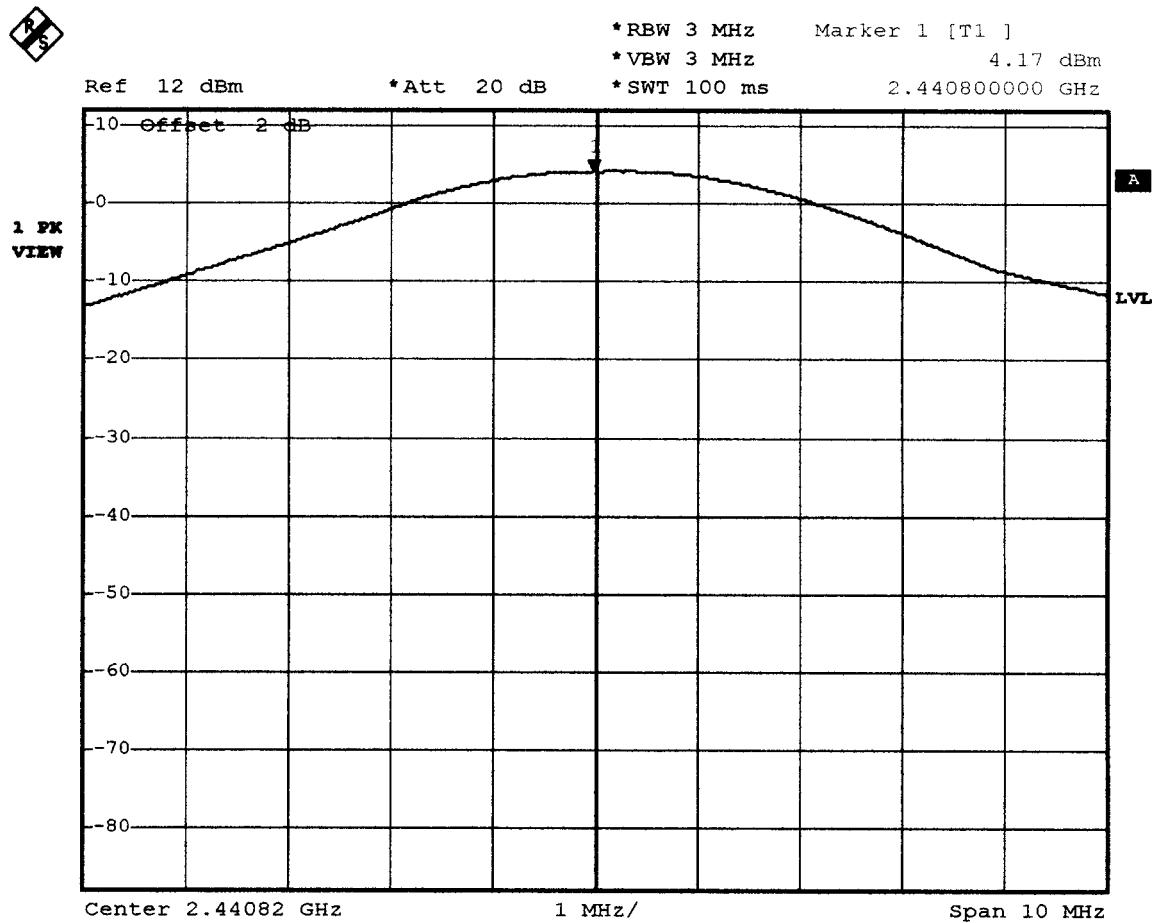

Date: 29.AUG.2002 12:40:58




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:34 of 50
Date:Oct. 11, 2002

CH78:

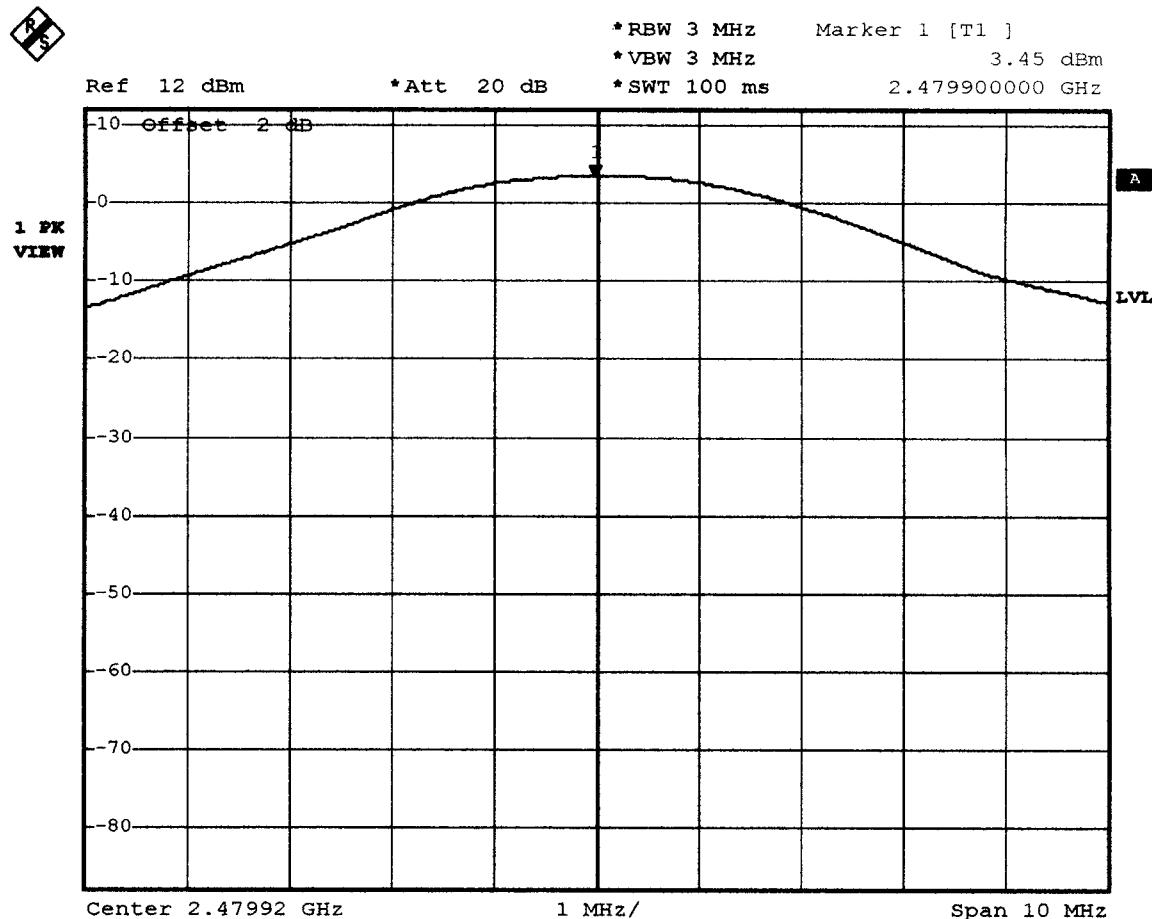

Date: 29.AUG.2002 12:50:48

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:35 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.8 BAND EDGE TEST

4.8.1 LIMIT

FCC Part15, Subpart C Section 15.247. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

OPERATING FREQUENCY RANGE (MHz)	SPURIOUS EMISSION FREQUENCY (MHz)	LIMIT	
		Peak power ration to emission(dBc)	Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

4.8.2 TEST EQUIPMENT

The following test equipment was used during the test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR.2003 R & S
SPECTRUM	9KHz-26.5GHz	HP	8953E/ 3710A03220	May.2003 ETC
PRE-AMPLIFIER	1GHz-26.5GHz Gain:30dB	HP	8449B/ 3008A01019	NOV.2002 ETC
HORN ANTENNA	1GHz to 18GHz	EMCO	3115/ 9602-4681	Dec.2002 ETC
OATS	3 - 10 M measurement	SRT	SRT-1	MAY 2003

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:36 of 50
Date:Oct. 11, 2002


4.8.3 TEST SET-UP

FOR RF CONDUCTED TEST (dBc)



The EUT was connected to the spectrum through a 50 RF cable.

FOR RADIATED EMISSION TEST

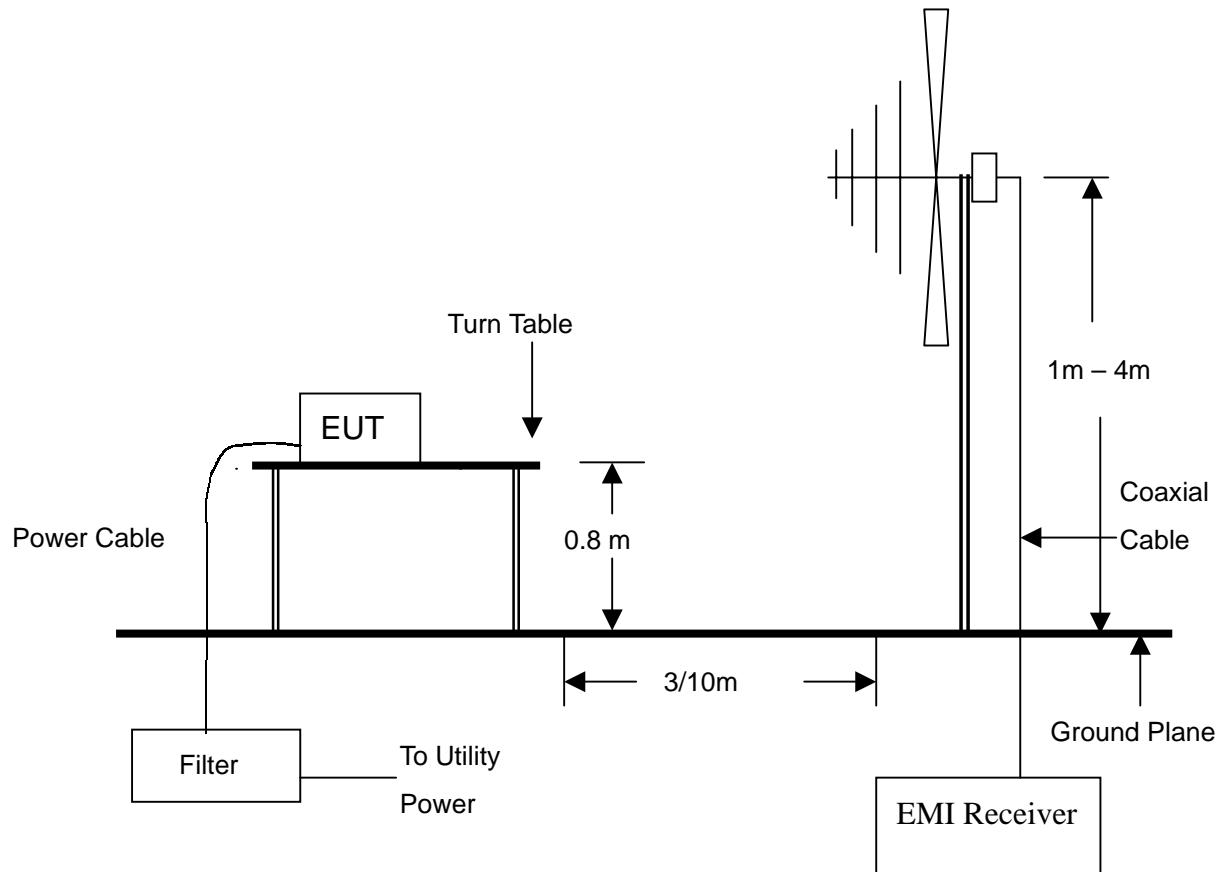

NOTE :

3. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
4. For the actual test configuration, please refer to the photos of testing.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:37 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.8.4 TEST PROCEDURE

1. The EUT was operating in hopping mode or could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.
2. The EUT was tested according to the requirement of ANSI C63.4 and CISPR 22.
The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz. All readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak and average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

4.8.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.

4.8.6 TEST RESULT

Temperature:	25°C	Humidity:	60%RH
Spectrum Detector:	PK & AV	Tested by	James Lee
Test Result	PASS		

1. Conducted test

Frequency (MHz)	PEAK POWER OUTPUT (dBm)	Emission read Value(dBm)	Result of Band edge (dBc)	Band edge LIMIT (dBc)
<2400	2.04	-35.86	37.86	>20dBc
>2483.5	1.47	-43.36	44.83	>20dBc

2. Radiated emision test


Frequency (MHz)	Antenna polarization (H/V)	PEAK POWER OUTPUT (dBuV/m)	Emission read Value(dBuV/m)	Band edge LIMIT (dBuV/m)
<2400	H	45.2	33	54
>2483.5	H	48.1	30.3	54



TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:38 of 50
Date:Oct. 11, 2002

<2400MHz:

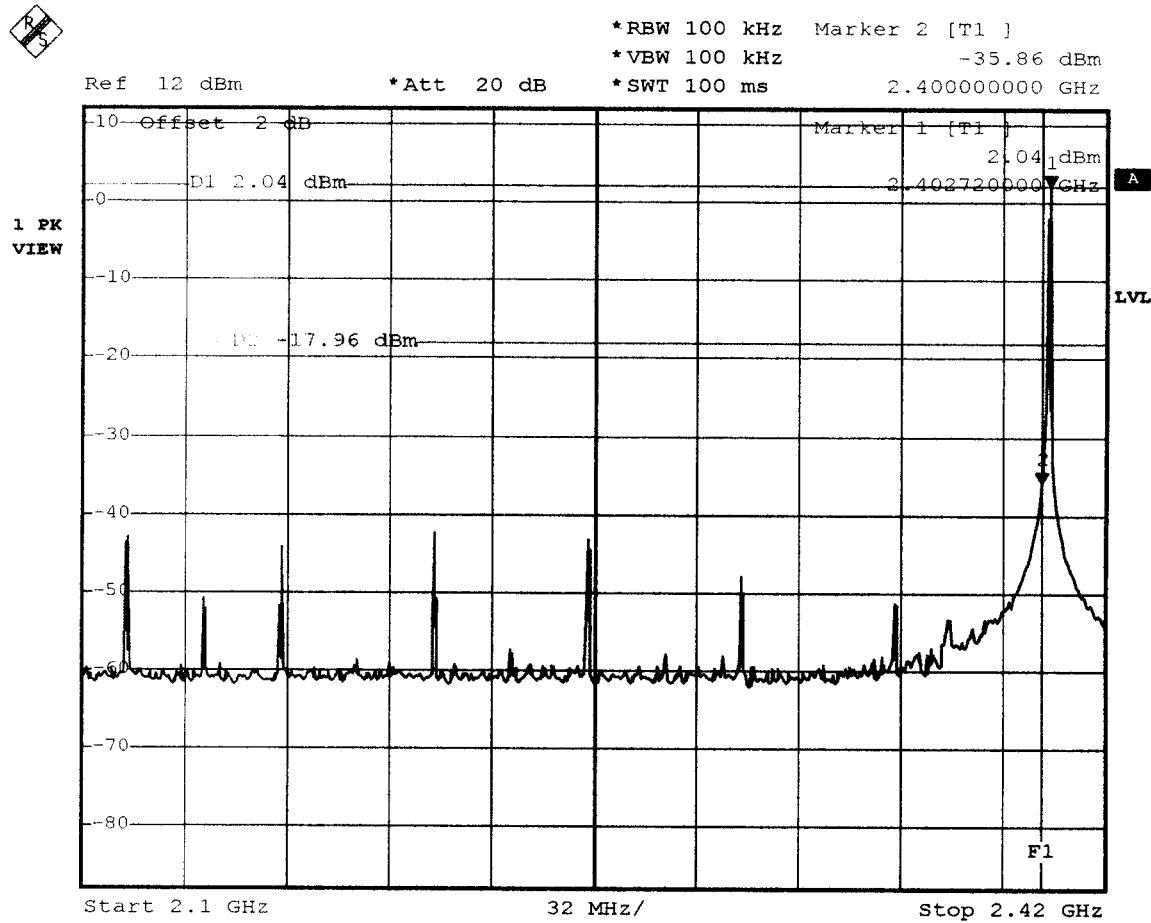

Date: 5.SEP.2002 07:30:05




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:39 of 50
Date:Oct. 11, 2002

>2483.5MHz

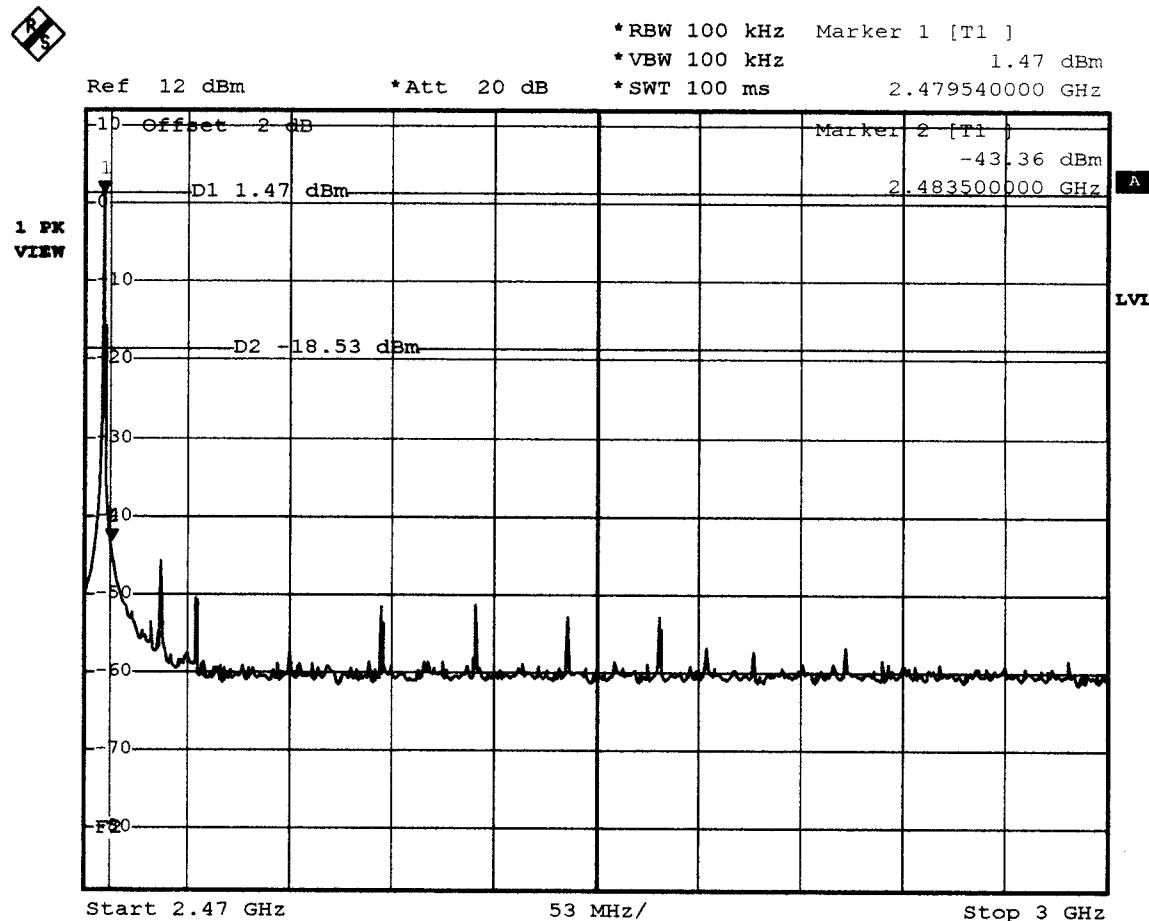

Date: 5.SEP.2002 07:32:58

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:40 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.9 POWER DENSITY TEST

4.9.1 LIMIT

FCC Part15, Subpart C Section 15.247.

FREQUENCY RANGE (MHz)	Limit(dBm/kHz)
902-928	
2400-2483.5	8dBm/3kHz
5725-5850	

4.9.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR.2003 R & S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.9.3 TEST SET-UP



The EUT was connected to a spectrum through a 50 ohm RF cable.

4.9.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.

4.9.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.


 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:41 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.9.6 TEST RESULT

Temperature: 25°C Humidity: 60%RH
Spectrum Detector: PK Tested by James Lee
Test Result PASS

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3KHz BW (dBm/3kHz)	MAXIMUM LIMIT (dBm/3kHz)
0	2402.0456	-5.77	8
39	2441.0454	-5.95	8
78	2480.0466	-6.94	8

CH0:

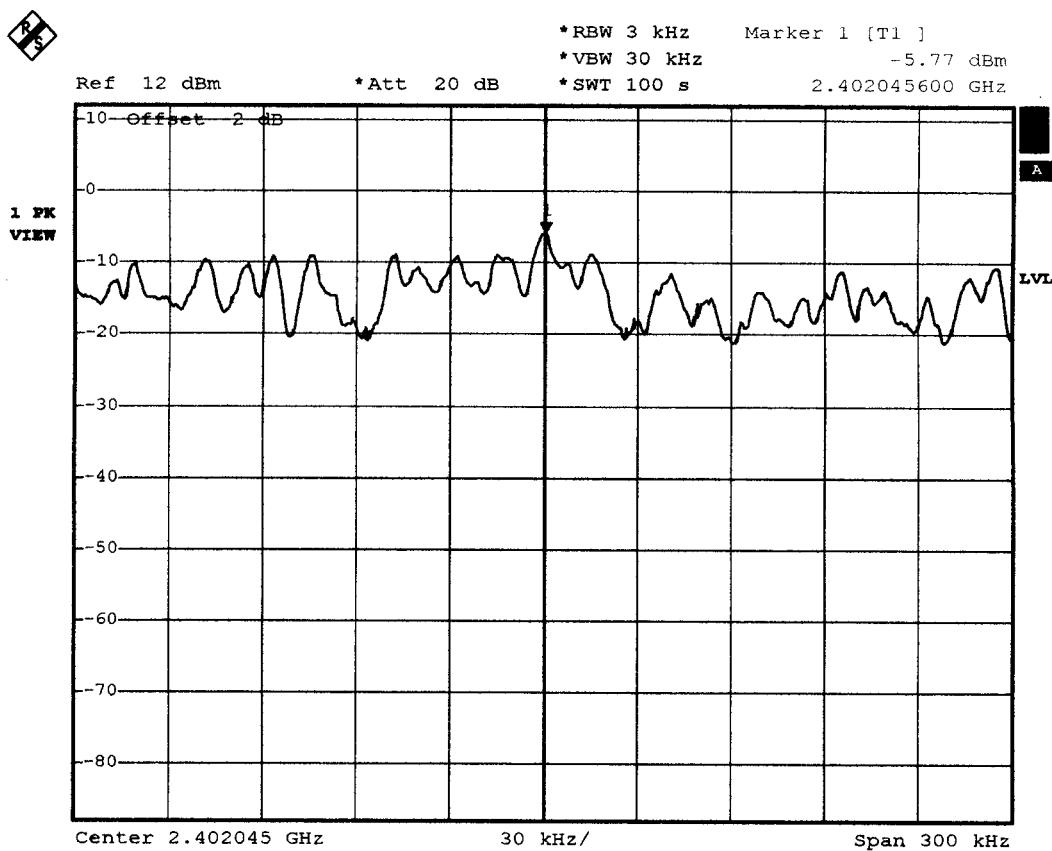




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:42 of 50
Date:Oct. 11, 2002


CH39:

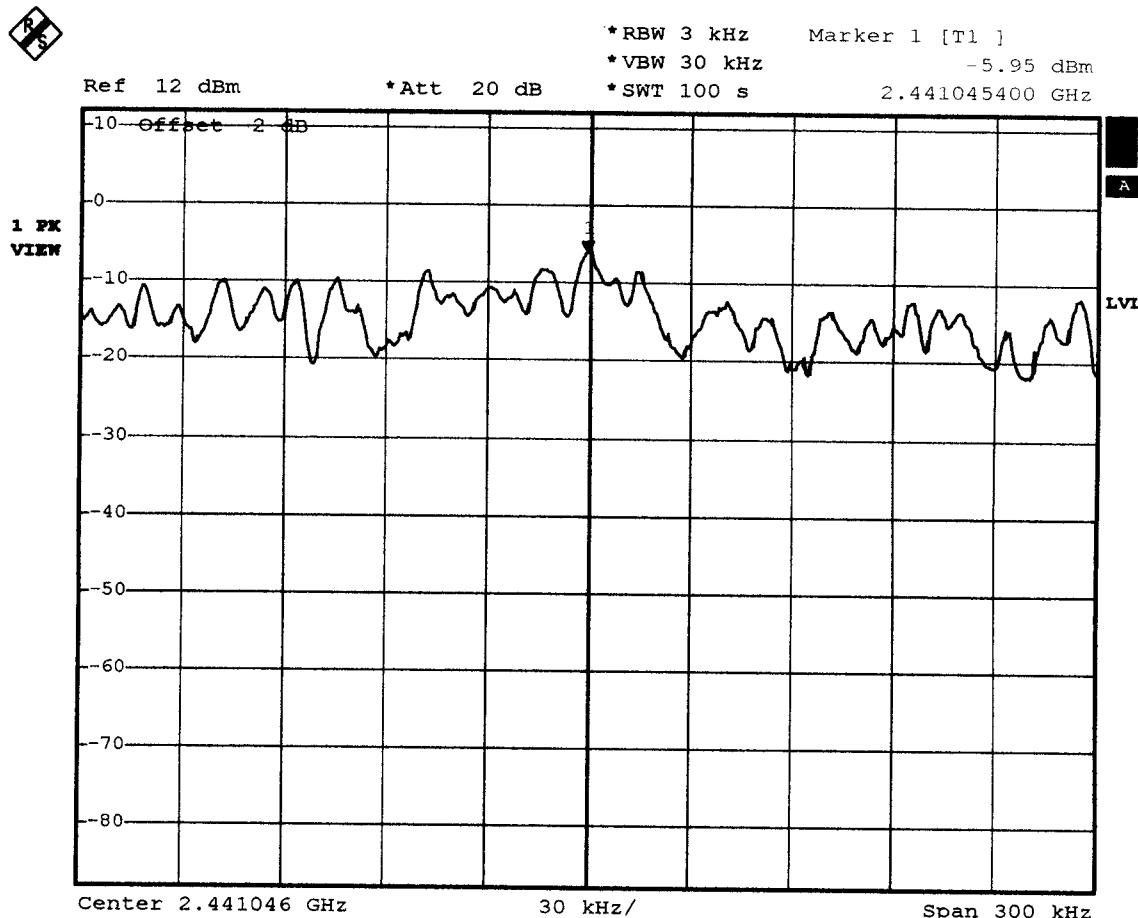

Date: 29.AUG.2002 12:46:01

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:43 of 50 Date:Oct. 11, 2002
---	----------------------	---

CH78:

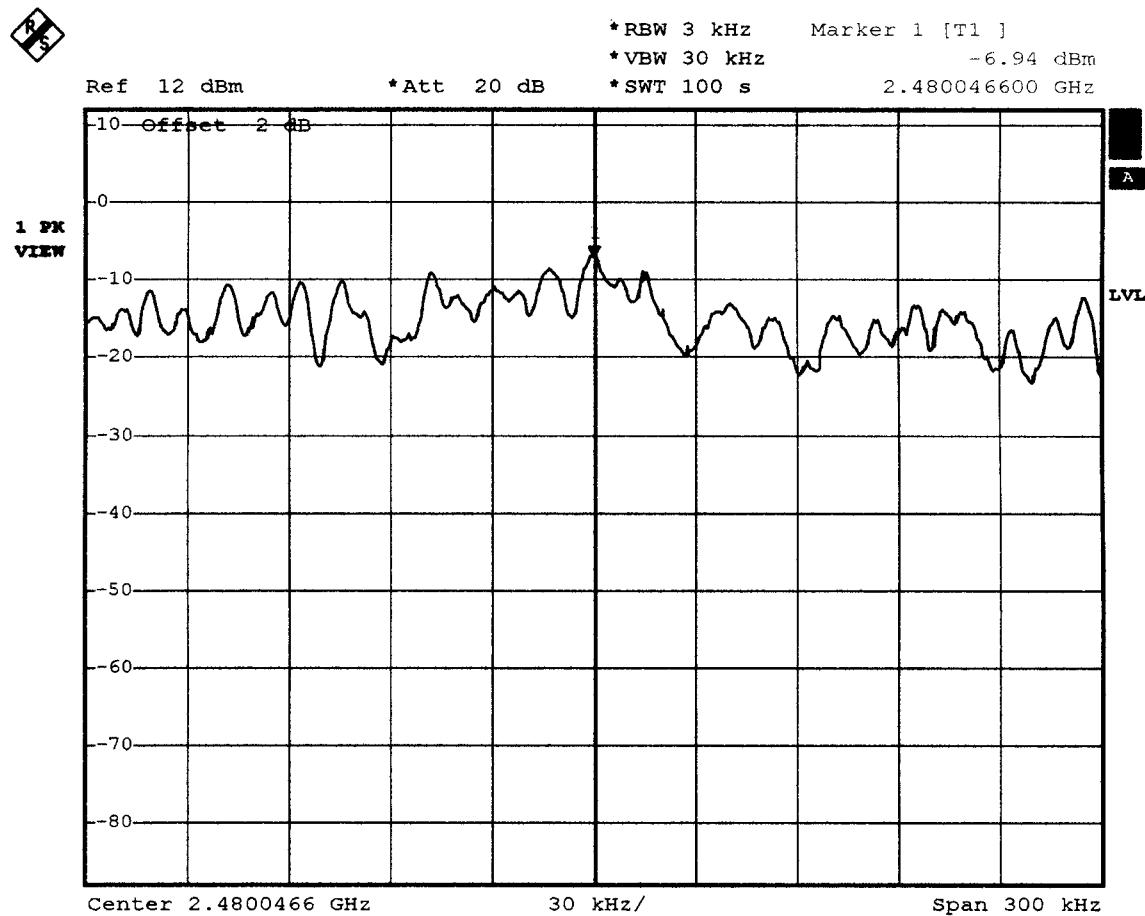

Date: 29.AUG.2002 12:58:15

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:44 of 50 Date:Oct. 11, 2002
---	----------------------	---

4.10 RF POWER EXPOSURE EVALUATION TEST

4.10.1 LIMIT

According to the requirement of IEEE C95.1 and FCC OET Bulletin 65.

Limits for Occupational/Controlled Exposure

Frequency Range (MHz)	Electric Field Strength(E) (V/m)	Magnetic Field Strength(H) (A/m)	Power density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength(E) (V/m)	Magnetic Field Strength(H) (A/m)	Power density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

f = frequency in MHz *Plane-wave equivalent power density

NOTE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<p>TEST REPORT</p>	<p>Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:45 of 50 Date:Oct. 11, 2002</p>
---	---------------------------	--


4.10.2 TEST EQUIPMENT

The following test equipment was used during the test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR.2003 R & S
POWER METER	N/A	HP	435A/ 1810A08277	NOV.2002 ETC
POWER SENSOR	DC-18GHz 0.3 μ W-100mW 50	HP	8481A	NOV.2002 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.10.3 TEST SET-UP



The EUT was connected to the spectrum through a 50 Ω RF cable.

4.10.4 TEST PROCEDURE

1. The EUT was operating in hopping mode or could be controlled its channel.
The power meter read power value.
2. The EUT uses an integral antenna and the antenna gain is 0dBi declared by manufacturer.
3. As discussed in OET Bulletin 65, calculations can be made to predict RF field strength and power density levels around typical RF sources. For example, in the case of a non-directional antenna, a prediction for power density in the far-field of the antenna can be made by use of the general Equations (1) or (2) below [for conversion to electric or magnetic field strength see Equation (3) above]. These equations are generally accurate in the far-field of an antenna but will over-predict power density in the near field, where it could be used for making a "worst case" or conservative prediction.

$$S = PG/4 \pi R^2 \quad (\text{Eq.1})$$

$$S = EIRP/4 \pi R^2 \quad (\text{Eq. 2})$$

$$S = E^2/3770 = 37.7H^2 \quad (\text{Eq. 3})$$

where: S = power density (mW/cm^2)

E = electric field strength (V/m)

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:46 of 50 Date:Oct. 11, 2002
---	----------------------	---

H = magnetic field strength (A/m)

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator (dBi)

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

where: EIRP = equivalent (or effective) isotropically radiated power

4.10.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.

4.10.6 RESULT

Temperature:	25°C	Humidity:	60%RH
Spectrum Detector:	PK	Tested by	James Lee
Result	PASS		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF Output Power to antenna (dBm)(e.i.r.p.)	Result calculated when nearby person (cm)	Limit when nearby person (cm)
0	2402.0456	4.3	0.46	20
39	2441.0454	3.9	0.44	20
78	2480.0466	3.3	0.41	20

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	TEST REPORT	Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:47 of 50 Date:Oct. 11, 2002
---	--------------------	---

5. Antenna application

5.1 Antenna requirement

The EUT's antenna is met the requirement of FCC part15C section15.203 and 15.204.

FCC part15C section15.247 requirement:

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.2 Result

The EUT's antenna used a monopole antenna and integrated on PCB. The antenna's gain is 0dBi and meets the requirement.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:48 of 50
Date:Oct. 11, 2002

6. PHOTOS OF TESTING

- Conducted test






**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02092411
Report No.:FCCA02082301-01
FCC ID:NRQ-BROR02
Page:49 of 50
Date:Oct. 11, 2002

- Radiated test

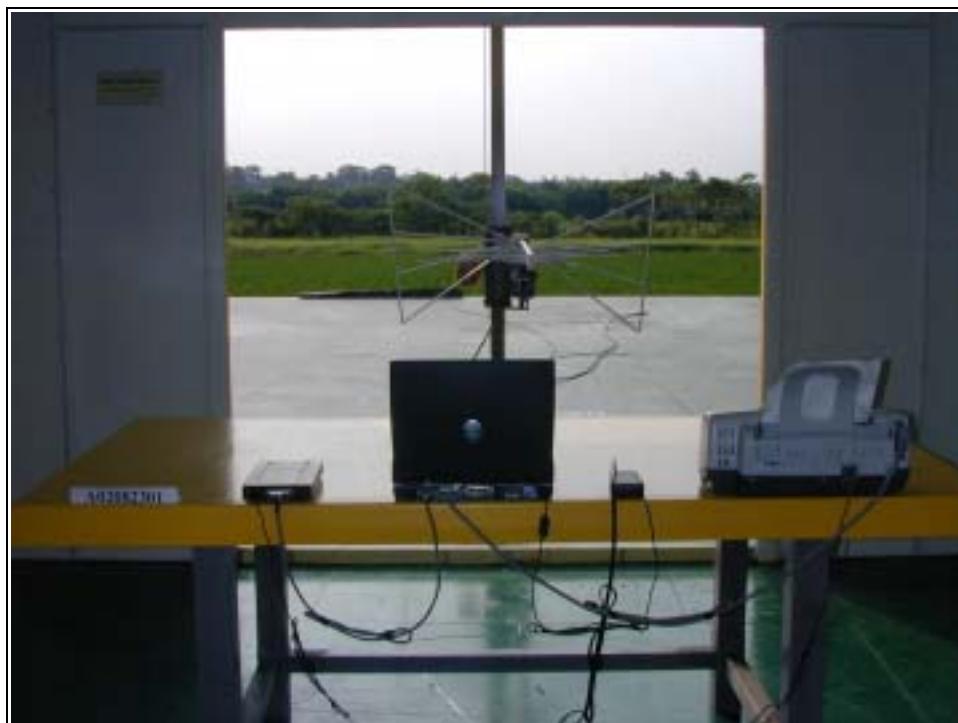

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<p>TEST REPORT</p>	<p>Reference No.:A02092411 Report No.:FCCA02082301-01 FCC ID:NRQ-BROR02 Page:50 of 50 Date:Oct. 11, 2002</p>
---	---------------------------	--

7. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction