

AIPTEK

3F, No. 5-1 Innovation Rd., 1, Science-Based Industrial Park,
Hsin-Chu, Taiwan, R.O.C.

Tel: 886-3-567-8138

Fax: 886-3-567-8569

FCC ID.:NRQ99APC400

EXHIBIT 3

Test Report With EUT Photograph

FC

Test Report

For

Applicant : AIPTEK International Inc.
Equipment Type : PC Camera
Model : APC 400
FCC ID : NRQ99APC400

Report No. : 995018FI

995018FI

Test Report Certification

Quietek Corporation

No.75-1, Wang-Yeh Valley, Yung-Hsing, Chiung-Lin,
Hsin-Chu County, Taiwan, R.O.C.

Tel : 886-3-592-8858, Fax: 886-3-592-8859

E-Mail : quietek@ms24.hinet.net

Accredited by NIST(NVLAP), VCCI, BSMI, DNV, TUV

Applicant : AIPTEK International Inc.
Address : 3F, No. 5-1 Innovation Rd.. 1, Science-Based Industrial Park,
Hsin-Chu, Taiwan, 300 R.O.C.
Equipment Type : PC Camera
Model : APC 400
FCC ID. : NRQ99APC400
Measurement Standard : CISPR 22/1994
Measurement Procedure : ANSI C63.4 /1992
Operation Voltage : 12V DC
Classification : Class B
Test Result : Complied
Test Date : May 24, 1999
Report No. : 995018FI

The Test Results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented by: Kathy Lee

Test Engineer: Arthur Liu

Approved: Gene Chang






TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1 EUT DESCRIPTION	4
1.2 TESTED SYSTEM DETAILS	5
1.3 EUT CONFIGURATION	6
1.4 EUT EXERCISE SOFTWARE.....	7
1.5 TEST PERFORMED	7
1.6 TEST FACILITY	8
2. CONDUCTED EMISSION	9
2.1 TEST EQUIPMENT LIST	9
2.2 TEST SETUP	9
2.3 LIMITS	9
2.4 TEST PROCEDURE.....	10
2.5 TEST RESULTS	10
3. RADIATED EMISSION.....	11
3.1 TEST EQUIPMENT	11
3.2 TEST SETUP	11
3.3 LIMITS	12
3.4 TEST PROCEDURE.....	12
3.5 TEST RESULTS	12
4. SUMMARY OF TEST RESULTS	13
5. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	18
6. TEST PHOTOGRAPHS.....	19
7. EUT DETAILED PHOTOGRAPHS	21



1. General Information

1.1 EUT Description

Applicant : AIPTEK International Inc.

Address : 3F, No. 5-1 Innovation Rd., 1, Science-Based
Industrial Park, Hsin-Chu, Taiwan, 300 R.O.C.

Equipment Type : PC Camera

Model : APC 400

FCC ID : NRQ99APC400

Operation Voltage : 12V DC

Data Cable : Non-Shielded, 1.5m
Bonded a ferrite core on the cable.

Remark: The EUT is a PC Camera with USB interface that supports maximum resolution is 640 X 480.

1.2 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

1.2.1 Host Personal Computer

Model Number : P2L97
Serial Number : 92M4Y00768
FCC ID : DoC
Manufacturer : ASUS
Power Cord : Non-Shielded, 1.8m

1.2.2 Monitor

Model Number : CM752ET-311
Serial Number : T8E004439
FCC ID : DoC
Manufacturer : HITACHI
Data Cable : Shielded, 1.5m
Power Cord : Shielded, 1.7m

1.2.3 Keyboard

Model Number : SCORPIUS 980N plus/980
Serial Number : 808000124
FCC ID : F2Q4NE980
Manufacturer : QTRONIX
Data Cable : Shielded, 1.8m

1.2.4 Mouse


Model Number : M-M35
Serial Number : 811313-2000
FCC ID : DZL210365
Manufacturer : Logitech
Data Cable : Shielded, 1.8m

1.2.5 Modem

Model Number : 1414
Serial Number : 980033039
FCC ID : IFAXDM1414
Manufacturer : ACEEX
Data Cable : Shielded, 1.5m
Power Adapter : ACCEX, M/N: SCP41-91000A
Cable Output : Shielded, 1.5m

- 1.2.6 Modem
 Model Number : 1414
 Serial Number : 980033035
 FCC ID : IFAXDM1414
 Manufacturer : ACEEX
 Data Cable : Shielded, 1.5m
 Power Adapter : ACCEX, M/N: SCP41-91000A
 Cable Output : Shielded, 1.5m
- 1.2.7 Printer
 Model Number : C2642A
 Serial Number : MY75N1D2Y1
 FCC ID : B94C2642X
 Manufacturer : HP
 Data Cable : Shielded, 1.2m
 Power Adapter : NMB, M/N: C2175A
 Cable for AC IN: Non-Shielded, 0.7m
 Cable for AC Out: Non-Shielded, 1.5m
- 1.2.8 Joystick
 Model Number : JPD110
 Serial Number : 9814A15646
 FCC ID : DoC
 Manufacturer : Maxxtro
 Data Cable : Shielded, 1.7m

1.3 EUT Configuration

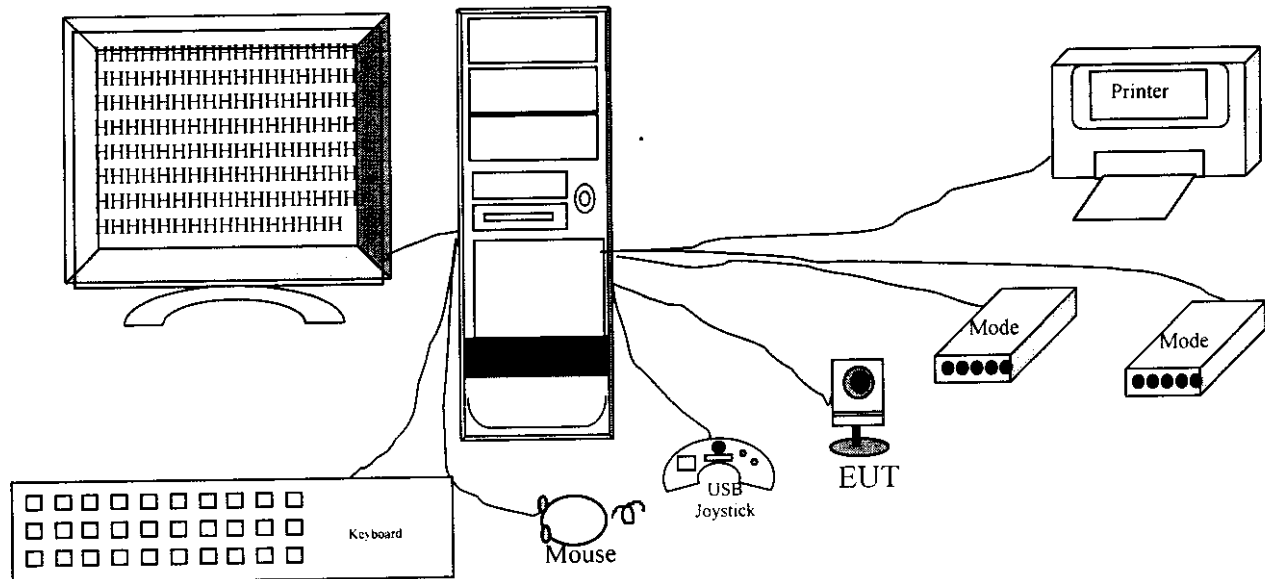

1.4 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 1.4.1 Setup the EUT and simulators as shown on 1.3
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 Boot the PC from Hard Disk .
- 1.4.4 PC reads test software from disk.
- 1.4.5 The PC Camera (EUT) will start to operate and capture the video figure into PC.
- 1.4.6 PC will display "video figure" on monitor.
- 1.4.7 Printer and modem will keep at standby mode during EUT operation.
- 1.4.8 Repeat the above procedure 1.4.4 to 1.4.7

1.5 Test performed

Conducted emissions were investigated over the frequency range from **0.15MHz to 30MHz** using a receiver bandwidth of 9kHz.

Radiated emissions were investigated over the frequency range from **30MHz to 1000MHz** using a receiver bandwidth of 120kHz. Radiated testing was performed at an antenna to EUT distance of 10 meters .

1.6 Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2



September 30, 1998 Accreditation on NVLAP
NVLAP Lab Code: 200347-0

February 23, 1999 Accreditation on DNV
Statement No. : 413-99-LAB11



December 8, 1998 Registration on VCCI
Registration No. for No.2 Shielded Room C-858
Registration No. for No.1 Open Area Test Site R-823
Registration No. for No.2 Open Area Test Site R-835



January 04, 1999 Accreditation on TÜV Rheinland
Certificate No.: I9865712-9901



Name of firm : QuieTek Corporation

Site location : No.75-1, Wang-Yeh Valley, Yung-Hsing Tsuen,
Chiung-Lin, Hsin-Chu County, Taiwan, R.O.C.

2.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 /1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9KHz.

2.5 Test Results

The emission from the EUT was below the specified limits. The worst case emissions are shown in Chapter 4. The acceptance criterion was met and the EUT passed the test.

3. Radiated Emission


3.1 Test Equipment

The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X	Test Receiver	R & S	ESCS 30 / 825442/14	May, 1998
		Spectrum Analyzer	Advantest	R3261C / 71720140	May, 1998
		Pre-Amplifier	HP	8447D/3307A01812	May, 1998
	X	Bilog Antenna	Chase	CBL6112B / 12452	Sep., 1998
	X	Horn Antenna	EM	EM6917 / 103325	May, 1998
Site # 2	X	Test Receiver	R & S	ESCS 30 / 825442/17	May, 1998
		Spectrum Analyzer	Advantest	R3261C / 71720609	May, 1998
		Pre-Amplifier	HP	8447D/3307A01814	May, 1998
	X	Bilog Antenna	Chase	CBL6112B / 2455	Sep., 1998
	X	Horn Antenna	EM	EM6917 / 103325	May, 1998

- Note:
1. All equipment upon which need to calibrated are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

3.2 Test Setup

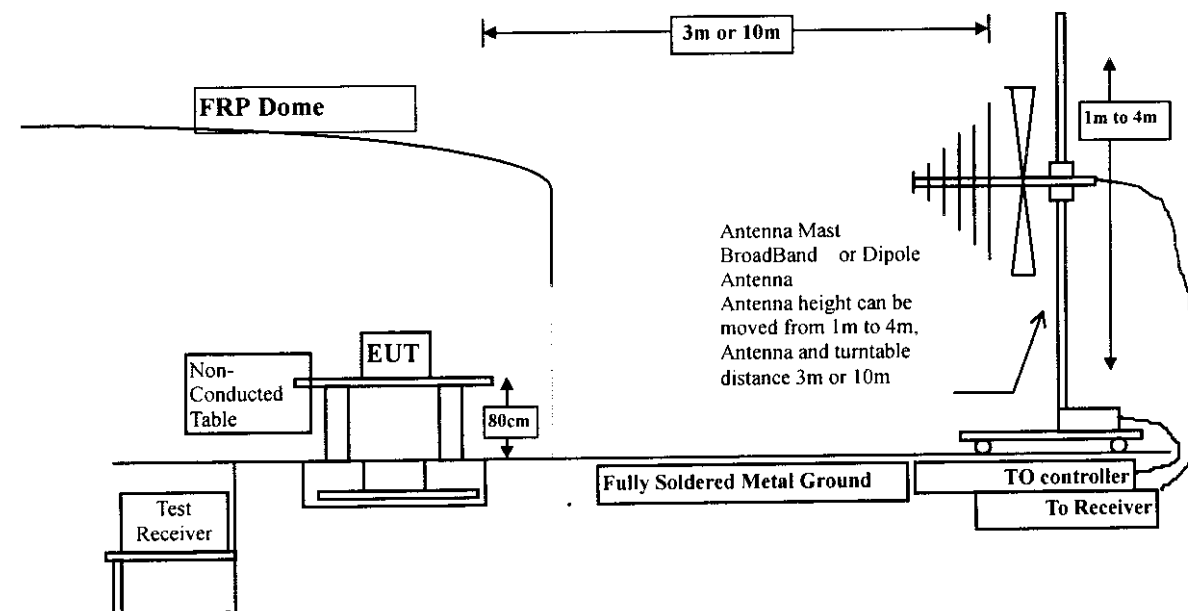

3.3 Limits

CISPR 22 Limits (dBuV)					FCC Part 15 Subpart B (dBuV)				
Frequency	Class A		Class B		Frequency	Class A		Class B	
MHz	Distance (m)	dBuV/m	Distance (m)	dBuV/m		uV	dBuV	uV	dBuV
30 – 230	10	40	10	30	30 – 88	90	39	100	40.0
230 – 1000	10	47	10	37	88 – 216	150	43.5	150	43.5
					216 – 960	210	46.5	200	46.0
					960 - 2000	300	49.5	500	54.0

Remark: 1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3. RF Line Voltage (dBuV) = 20 log RF Line Voltage (uV)

3.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 10 meters . The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4 /1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz.

3.5 Test Results

The emission from the EUT was below the specified limits. The worst case emissions are shown in Chapter 4. The acceptance criterion was met and the EUT passed the test.

4. Summary of Test Results

The test results in the emission were performed according to the requirements of measurement standard and process. QuieTek Corporation is assumed full responsibility for the accuracy and completeness of these measurements. The test data of the emission are listed as the attached data.

All the tests were carried out with the EUT in normal operation, which was defined as:

(1) Mode 1 : Normal Operation

The EUT passed all the tests.

The uncertainty is calculated in accordance with NAMAS NIS 81, The total uncertainty for this test is as follows:

➤ **Emission Test**

- Uncertainty in the Conducted Emission Test: $< \pm 2.0 \text{ dB}$
- Uncertainty in the field strength measured: $< \pm 4.0 \text{ dB}$

CONDUCTED EMISSION DATA

Date of Test : May 24, 1999 EUT : PC CameraPC Camera
 Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	Line1	Line1	
	dB	dB	dBuV	dBuV	dBuV
0.202	0.02	0.10	31.27	31.39	63.54
0.302	0.04	0.10	28.25	28.39	60.18
0.406	0.05	0.10	26.85	27.00	57.73
0.506	0.06	0.10	23.07	23.23	56.00
* 12.002	0.30	0.27	32.21	32.77	60.00
27.005	0.39	0.56	31.25	32.20	60.00

Average:

0.202	0.02	0.10	30.00	30.12	53.53
0.302	0.04	0.10	27.30	27.44	50.19
0.406	0.05	0.10	26.20	26.35	47.73
0.506	0.06	0.10	22.00	22.16	46.00
12.000	0.30	0.27	25.10	25.66	50.00
27.010	0.39	0.56	31.10	32.05	50.00

Remarks :

1. " * " means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test : May 24, 1999 EUT : PC Camera
 Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency	Cable	LISN	Reading Level	Measurement Level	Limits
MHz	Loss	Factor	Line2	Line2	
	dB	dB	dBuV	dBuV	dBuV
0.176	0.01	0.10	33.77	33.88	64.65
0.203	0.02	0.10	28.51	28.63	63.49
0.226	0.02	0.10	31.41	31.53	62.58
* 12.001	0.30	0.27	31.05	31.61	60.00
24.001	0.38	0.52	20.59	21.48	60.00
27.005	0.39	0.56	17.45	18.40	60.00

Average:

0.176	0.01	0.10	33.10	33.21	54.67
0.203	0.02	0.10	27.40	27.52	53.49
0.226	0.02	0.10	31.10	31.22	52.60
12.000	0.30	0.27	24.00	24.56	50.00
24.000	0.38	0.52	17.20	18.09	50.00
27.000	0.39	0.56	15.70	16.65	50.00

Remarks :

1. " * " means that this data is the worst emission level.



RADIATED EMISSION DATA

Date of Test : May 24, 1999 EUT : PC Camera
 Test Mode : Mode 1 Test Site : No.2 Open Test Site

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit	Ant	Turn
	Loss	Factor		Level	Horizontal				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
48.000	1.33	8.92	0.00	9.96	20.21	9.79	30.00	393	65
144.000	2.24	11.16	0.00	14.57	27.97	2.03	30.00	393	172
240.016	3.17	11.32	0.00	15.27	29.76	7.24	37.00	393	170
288.017	3.63	13.11	0.00	13.02	29.76	7.24	37.00	393	151
336.000	3.94	13.76	0.00	14.81	32.51	4.49	37.00	318	140
384.017	4.19	15.11	0.00	12.83	32.13	4.87	37.00	266	124
432.000	4.44	16.31	0.00	13.75	34.50	2.50	37.00	231	130
466.860	4.63	16.88	0.00	10.69	32.20	4.80	37.00	211	19
504.017	4.82	17.29	0.00	12.41	34.51	2.49	37.00	199	106
528.019	4.94	17.67	0.00	12.37	34.99	2.01	37.00	149	92
576.019	5.20	18.72	0.00	9.16	33.07	3.93	37.00	177	75
624.019	5.44	19.30	0.00	8.00	32.75	4.25	37.00	134	134
* 864.035	6.69	20.73	0.00	7.68	35.10	1.90	37.00	148	147

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss

RADIATED EMISSION DATA

Date of Test : May 24, 1999 EUT : PC Camera
 Test Mode : Mode 1 Test Site : No.2 Open Test Site

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit	Ant	Turn
	Loss	Factor		Level	Vertical				
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m	cm	deg
48.000	1.33	8.03	0.00	18.35	27.71	2.29	30.00	99	75
240.010	3.17	11.22	0.00	17.85	32.24	4.76	37.00	99	113
288.009	3.63	13.17	0.00	13.83	30.64	6.36	37.00	99	131
336.009	3.94	14.63	0.00	13.90	32.47	4.53	37.00	99	177
384.017	4.19	15.50	0.00	11.34	31.03	5.97	37.00	393	183
466.790	4.63	17.15	0.00	11.87	33.65	3.35	37.00	115	184
504.022	4.82	17.10	0.00	10.64	32.55	4.45	37.00	299	38
* 600.023	5.31	18.42	0.00	11.88	35.62	1.38	37.00	393	118

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss

5. EMI Reduction Method During Compliance Testing

No modification was made during testing.