

FCC Part 15 B  
MEASUREMENT AND TEST REPORT  
For  
**Lelux Electronics Ltd.**

Unit 6, 10/F, TCL TOWER, NO.8, Tai Chung Road,  
Tsuen Wan, New Territories, Hong Kong

**FCC ID: NS3-500R**

October 14, 2008

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> Wireless Remote Control
<b>Test Engineer:</b>	Joe Du
<b>Report Number:</b>	<b>SE08J-154F</b>
<b>Test Date:</b>	October 9-10, 2008
<b>Reviewed By:</b>	
<b>Prepared By:</b>	<b>S&amp;E Technologies Laboratory Ltd</b> Room407, Block A Shennan Garden, Hi-Tech Industrial Park, Shenzhen 518057, P.R. China. Tel: 86-755-26636573, 26630631 Fax: 86-755-26630557

**Note:** This test report is limited to the above client company and the product model only. It may not be duplicated without prior written consent of S&E Technologies Laboratory Ltd.

## Table of contents

<b>1. TEST SUMMARY .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1 CLIENT INFORMATION .....	5
2.2 GENERAL DESCRIPTION OF E.U.T. ....	5
2.3 DETAILS OF E.U.T. ....	5
2.4 DESCRIPTION OF SUPPORT UNITS.....	5
2.5 STANDARDS APPLICABLE FOR TESTING.....	5
2.6 TEST FACILITY .....	5
2.7 TEST LOCATION.....	6
<b>3. EQUIPMENT USED DURING TEST .....</b>	<b>7</b>
<b>4. CONDUCTED EMISSION TEST .....</b>	<b>8</b>
4.1 TEST EQUIPMENT .....	8
4.2 TEST PROCEDURE.....	8
4.3 CONDUCTED TEST SETUP .....	8
4.4 EUT OPERATING CONDITION.....	9
4.5 CONDUCTED EMISSION LIMITS .....	9
4.6 CONDUCTED EMISSION TEST RESULT .....	9
<b>5. RADIATION EMISSION TEST .....</b>	<b>10</b>
5.1 TEST EQUIPMENT .....	10
5.2 MEASUREMENT UNCERTAINTY .....	10
5.3 TEST PROCEDURE.....	10
5.4 RADIATED TEST SETUP .....	11
5.5 SPECTRUM ANALYZER SETUP .....	11
5.6 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	12
5.7 SUMMARY OF TEST RESULTS .....	12
5.8 EUT OPERATING CONDITION.....	12
5.9 RADIATED EMISSIONS LIMIT .....	13
5.10 RADIATED EMISSIONS TEST RESULT .....	14
<b>6. DWELL TIME.....</b>	<b>16</b>
6.1 TEST STANDARDS.....	16
6.2 DIAGRAM OF TEST SETUP .....	16
6.3 TEST EQUIPMENTS USED.....	16
6.4 TEST DESCRIPTION.....	16
6.5 TEST RESULTS : PASS .....	17
<b>7. BAND EDGE .....</b>	<b>19</b>
7.1 TEST PROCEDURE.....	19
7.2 BAND EDGE .....	19
7.3 BAND EDGE TEST RESULT .....	20
<b>8. PHOTOGRAPHS OF TESTING .....</b>	<b>21</b>
<b>9. PHOTOGRAPHS – CONSTRUCTIONAL DETAILS .....</b>	<b>22</b>
EUT - FRONT VIEW .....	22
EUT - REAR VIEW .....	22
EUT - UNCOVERED VIEW .....	23
EUT - PCB VIEW.....	23
SUPPLEMENTARY MODEL: 500R1 .....	24
SUPPLEMENTARY MODEL: 500R2 .....	24

SUPPLEMENTARY MODEL: 500R3 .....	24
<b>10. FCC ID LABEL.....</b>	<b>25</b>

**1. Test Summary**

FCC Rules	Description of Test	Result
§ 15.207	Conducted Emission	N/A
§ 15.231	Radiated Emission	Compliant
§ 15.231	Occupied Bandwidth	Compliant

## 2. General Information

### 2.1 Client Information

Applicant: **Lelux Electronics Ltd.**  
Address of Applicant: Unit 6, 10/F, TCL TOWER, NO.8, Tai Chung Road,  
Tsuen Wan, New Territories, Hong Kong

### 2.2 General Description of E.U.T.

Product description: Wireless Remote Control  
Model No.: 500R (EUT)  
Supplementary Model No.: 500R1, 500R2, 500R3  
*Note: The above models share the same schematic diagram, PCB layout and enclosure except for the different button functions.*  
Operation Frequency: 433.92MHz  
Modulation: AM  
Antenna Designation: Non-user replaceable (fixed)

### 2.3 Details of E.U.T.

Power Supply: 3VDC Battery

### 2.4 Description of Support Units

The EUT has been tested as an independent device unit.

### 2.5 Standards Applicable for Testing

The customer requested FCC tests for a remote control. The standards used were FCC 15 Paragraph 15.205, Paragraph 15.209, Paragraph 15.231, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

### 2.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 732901**

SAE Technologies Development (Dongguan) Co., Ltd. has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 732901, July 23, 2008.

**2.7 Test Location**

All Emissions tests were performed at:- laboratory of SAE Technologies Development (Dongguan) Co., Ltd. at Zhenan Hi-Tech Industrial Park, Changan Zhen, Dongguan City, Guangdong Province, China 523875

### 3. Equipment Used during Test

Conducted Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	Artificial Mains	Rohde & Schwarz	ESH2-Z5	100028	2007/11	2008/11
2	Pulse Limiter	Rohde & Schwarz	ESH2-Z2	100044	2007/11	2008/11
3	EMI Test Software	Rohde & Schwarz	ES-K1 V1.71	N/A	2007/11	2008/11
4	EMI Test Receiver	Rohde & Schwarz	ESCS30	100038	2007/11	2008/11
Radiated Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	3m Semi- Anechoic Chamber	ETS	N/A	N/A	2007/11	2008/11
2	EMI Test Receiver	Rohde & Schwarz	ESI 26	100009	2007/11	2008/11
3	RF Test Panel	Rohde & Schwarz	TS/RSP	335015/0017	N/A	N/A
4	Turntable	ETS	2088	2149	N/A	N/A
5	Antenna Mast	ETS	2075	2346	N/A	N/A
6	EMI Test Software	Rohde & Schwarz	ES-K1	N/A	N/A	N/A
7	Ultra-Broadband Antenna	Rohde & Schwarz	HL562	100015	2007/11	2008/11
Dwell Time Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	Shielded Room	ETS LINDGREN	RFD-100	2391	N/A	N/A
2	EMI Test Receiver	Rohde & Schwarz	ESI 26	100009	2007/11	2008/11
Common Used Equipment						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	Temperature, Humidity&Barometer	Oregon Scientific	BA-888	EMC0001 to EMC0004	2008-07	2009-07
2	DMM	Fluke	73	70681569 or 70671122	2008-07	2009-07

## 4. Conducted Emission Test

Product:	Remote control
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	-
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximized peak within 6dB of Average Limit

### 4.1 Test Equipment


Please refer to Section 3 this report.

### 4.2 Test Procedure

1. The EUT was tested according to ANSI C63.4. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximized peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 4.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

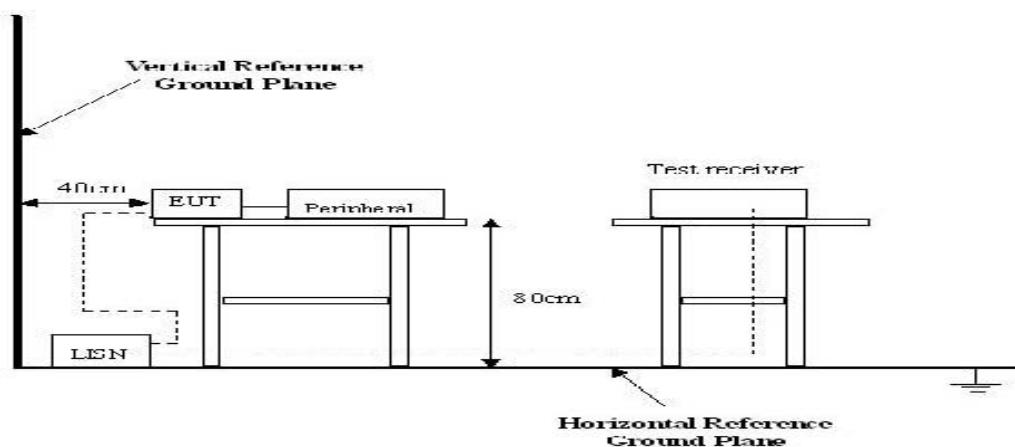

#### **4.4 EUT Operating Condition**

Operating condition is according to ANSI C63.4.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

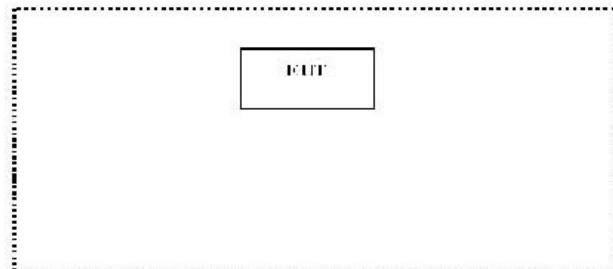

#### **4.5 Conducted Emission Limits**

66-56 dB $\mu$ V/m between 0.15MHz & 0.5MHz

56 dB $\mu$ V/m between 0.5MHz & 5MHz

60 dB $\mu$ V/m between 5MHz & 30MHz

**Note:** In the above limits, the tighter limit applies at the band edges.

#### **4.6 Conducted Emission Test Result**

Owing to the DC operation of EUT, this test is not performed.

## 5. Radiation Emission Test

Product:	Remote control
Test Requirement:	FCC Part15 Paragraph 15.209, Paragraph 15.231
Test Method:	Based on FCC Part15 Paragraph 15.33
Test Date:	October 09, 2008
Frequency Range:	30MHz to 5GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximized peak within 6dB of limit

### 5.1 Test Equipment

Please refer to Section 3 this report.

### 5.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4, the Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at TDK is +4.0 dB.

### 5.3 Test Procedure

1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB $\mu$ V of specification limits), and are distinguished with a "Qp" in the data table.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

#### 5.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4, The specification used in this report was the FCC Part15 Paragraph 15.209, Paragraph 15.231 limits.

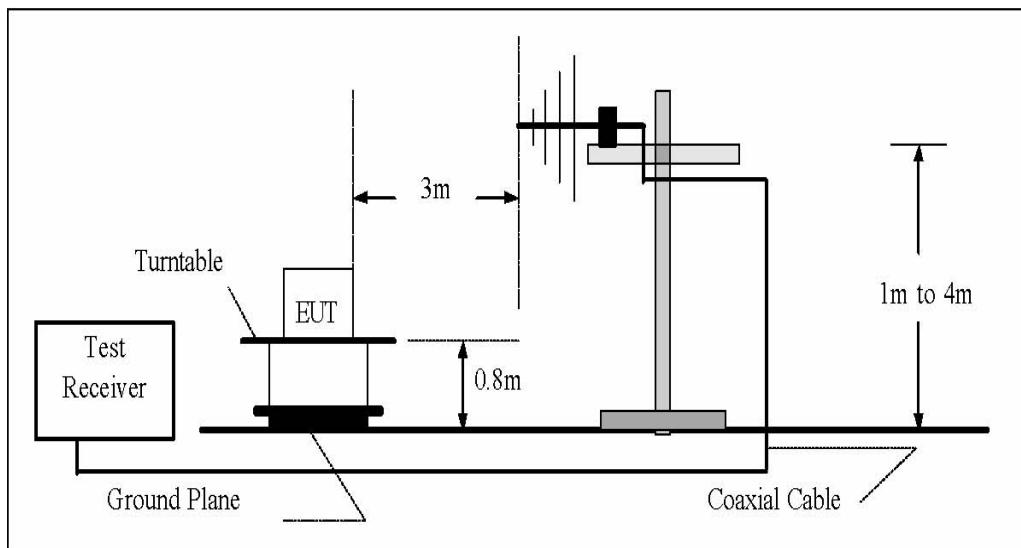

#### 5.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.209, Paragraph 15.231 Rules, the system was tested to 5000 MHz.

Start Frequency:	30 MHz
Stop Frequency:	5000 MHz
Sweep Speed	Auto
IF Bandwidth:	100 kHz
Video Bandwidth:	1 MHz
Quasi-Peak Adapter Bandwidth:	120 kHz
Quasi-Peak Adapter Mode:	Normal
Resolution Bandwidth:	1MHz

## **5.6 Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB $\mu$ V means the emission is 7dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

## **5.7 Summary of Test Results**

According to the data in section 7.10, the EUT complied with the FCC Part15 Paragraph 15.209 and Paragraph 15.231 standards.

## **5.8 EUT Operating Condition**

Same as section 4.4 of this report.

**5.9 Radiated Emissions Limit****A. FCC Part 15 subpart C Paragraph 15.231 Limit**

Fundamental Frequency (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
433.92	10996.7	80.83
Harmonics	1100.0	60.83

**Note:** (1) RF Voltage (dBuV)=20 log RF Voltage (uV)

(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

(3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

**B. Frequencies in restricted band are complied to limit on Paragraph 15.209**

Frequency (MHz)	Distance (m)	Field strength (dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

**Note:** (1) RF Voltage (dBuV)=20 log RF Voltage (uV)

(2) In the above table, the tighter limit applies at the band edges.

(3) Distance refers to the distance in meters between the measuring instrument antenna.

**5.10 Radiated Emissions Test Result**

Formula of conversion factors: the field strength at 3m was established by adding The meter reading of the spectrum analyzer (which is set to read in units of dBuV) To the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the pressleter was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz) Meter Reading +ACF=FS  
33                    20dBuV+10.36dB=30.36dBuV/m @3m

**A. Fundamental Radiated Emission Data for 433MHz**

Test Item:	Fundamental Radiated Emission Data
Test Voltage:	3VDC Battery
Test Mode:	Transmitting
Temperature:	23 °C
Humidity:	53%RH
Test Result:	Pass

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
433.915	Vertical	64.05	80.83	-16.78	1.2	85
867.833	Vertical	42.38	60.83	-18.45	1.6	241
433.915	Horizontal	68.73	80.83	-12.10	1.2	86
867.833	Horizontal	44.01	60.83	-16.82	1.6	250
Others		-				

Note: 1. Datum of measurement within this frequency range shown “-” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

**B. General Radiated Emission Data**

Test Item: General Radiated Emission Data  
Test Voltage: 3VDC Battery  
Test Mode: Transmitting  
Temperature: 23 °C  
Humidity: 53%RH  
Test Result: Pass

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
253.657	Vertical	26.12	46.0	-19.88	1.2	55
749.009	Vertical	26.89	46.0	-19.11	2.0	186
989.426	Vertical	31.61	54.0	-22.39	1.8	70
248.113	Horizontal	28.23	46.0	-17.77	1.2	45
749.287	Horizontal	27.39	46.0	-18.61	1.6	69
1108.445	Horizontal	34.34	54.0	-19.66	2.0	162


## 6. Dwell Time

### 6.1 Test Standards

FCC Rules and Regulations Part 15 Subpart C –Intentional Radiators

According to 15.231 (a), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 6.2 Diagram of Test Setup

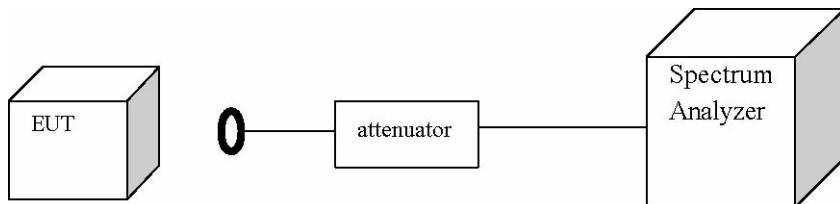

Remark: the attenuator is the built-in part of spectrum analyzer.

### 6.3 Test Equipments Used

Please refer to Section 3 this report

### 6.4 Test Description


#### 6.4.1 Test Receiver Setting:


RBW (KHz)	VBW (KHz)	Detector	Comment
30	100	Peak	

6.4.2 Test Procedure The EUT was set up per the test configuration figured in Sec 6.2 of this test report to simulate the typical usage per the user's manual. The transmitter output of EUT was connected to the spectrum analyzer through an attenuator.

Set the spectrum analyzer into zero span and perform the dwell time bandwidth measurement.

Record the dwell time and compare with the required limit.

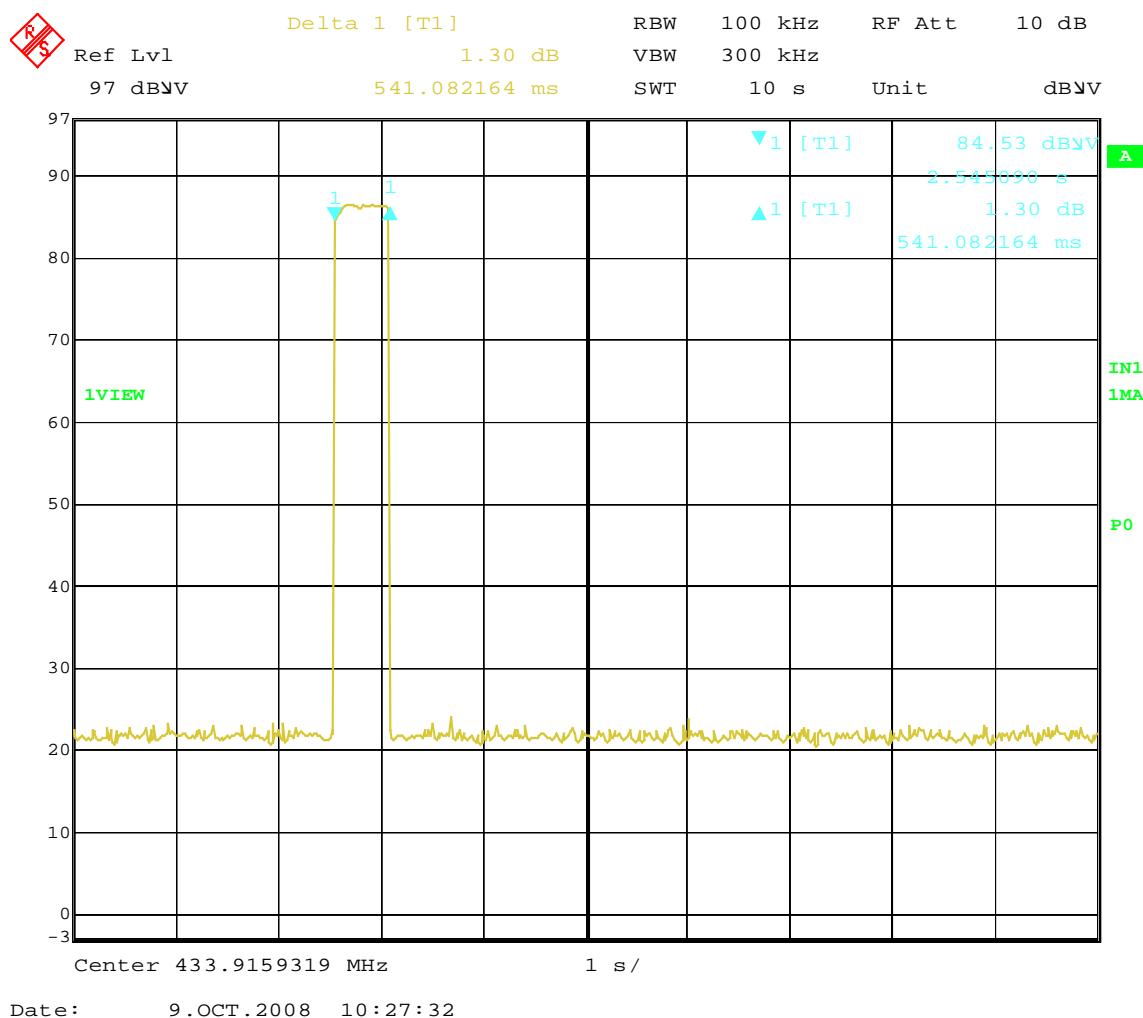**6.5 Test Results : Pass****Test data see following graph:**

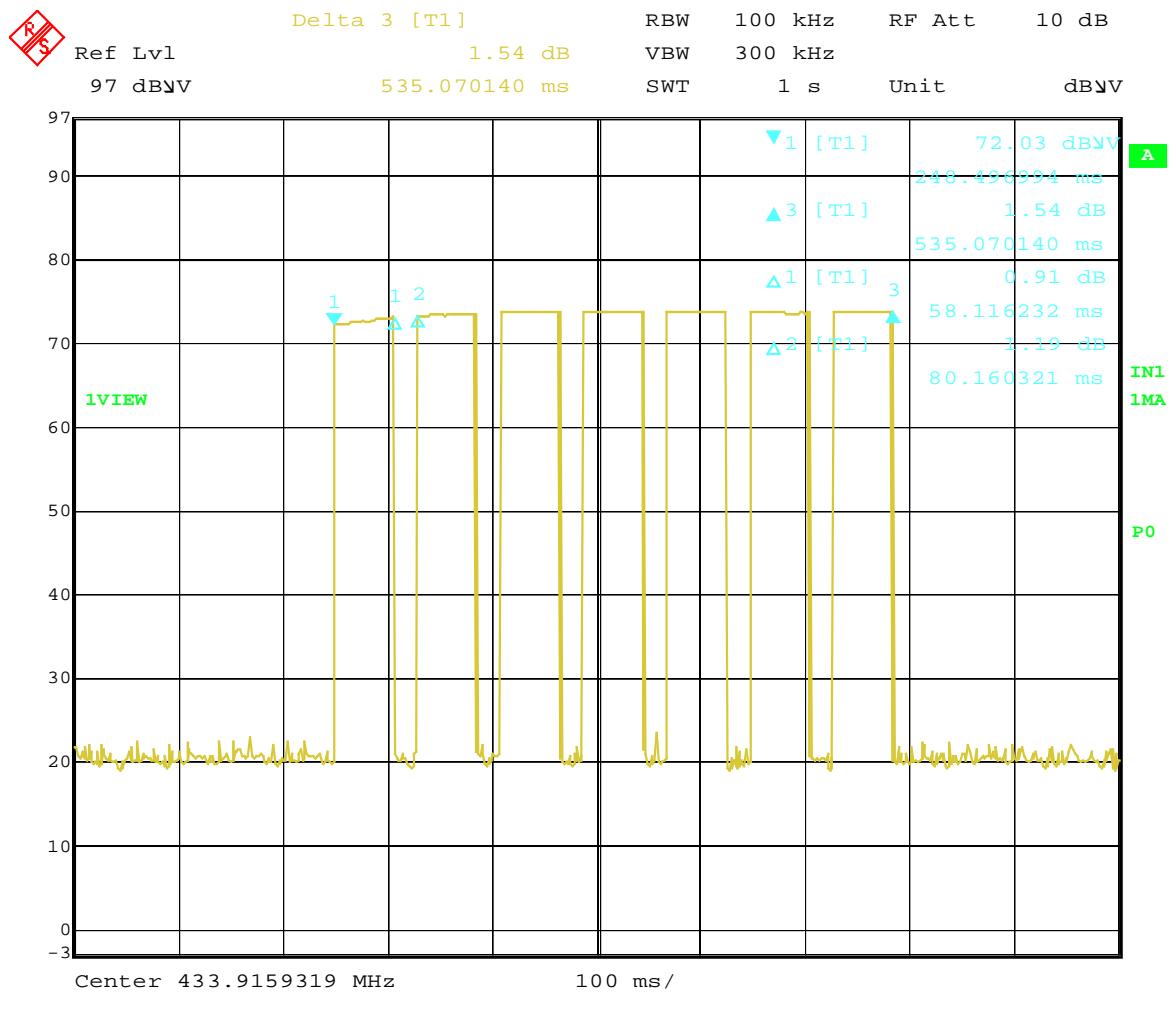

## 7. Band Edge

Test Requirement: FCC Part15 C  
Test Method: Based on FCC Part15 Paragraph 15.231  
Test Date: October 09, 2008  
Test mode: Transmitting  
Temperature: 23 °C  
Humidity: 53%RH

### 7.1 Test Procedure


1. The EUT, peripherals were put on the turntable which table size is 1mX1.5m, table high 0.8m. All set up is according to ANSI C63.4.
2. With the EUT's antenna attached, the EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band. Measurements were made at 3 meters.
3. The antenna height was varied from 1m to 4m high to find the maximum emission for each frequency.
4. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 20KHz RBW and 200KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.

### 7.2 Band Edge

Requirements: Paragraph 15.231, the emission power at the START and STOP frequencies shall be at least 50dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209.

### 7.3 Band Edge Test Result

The graph as below, represents the emissions take for this device.

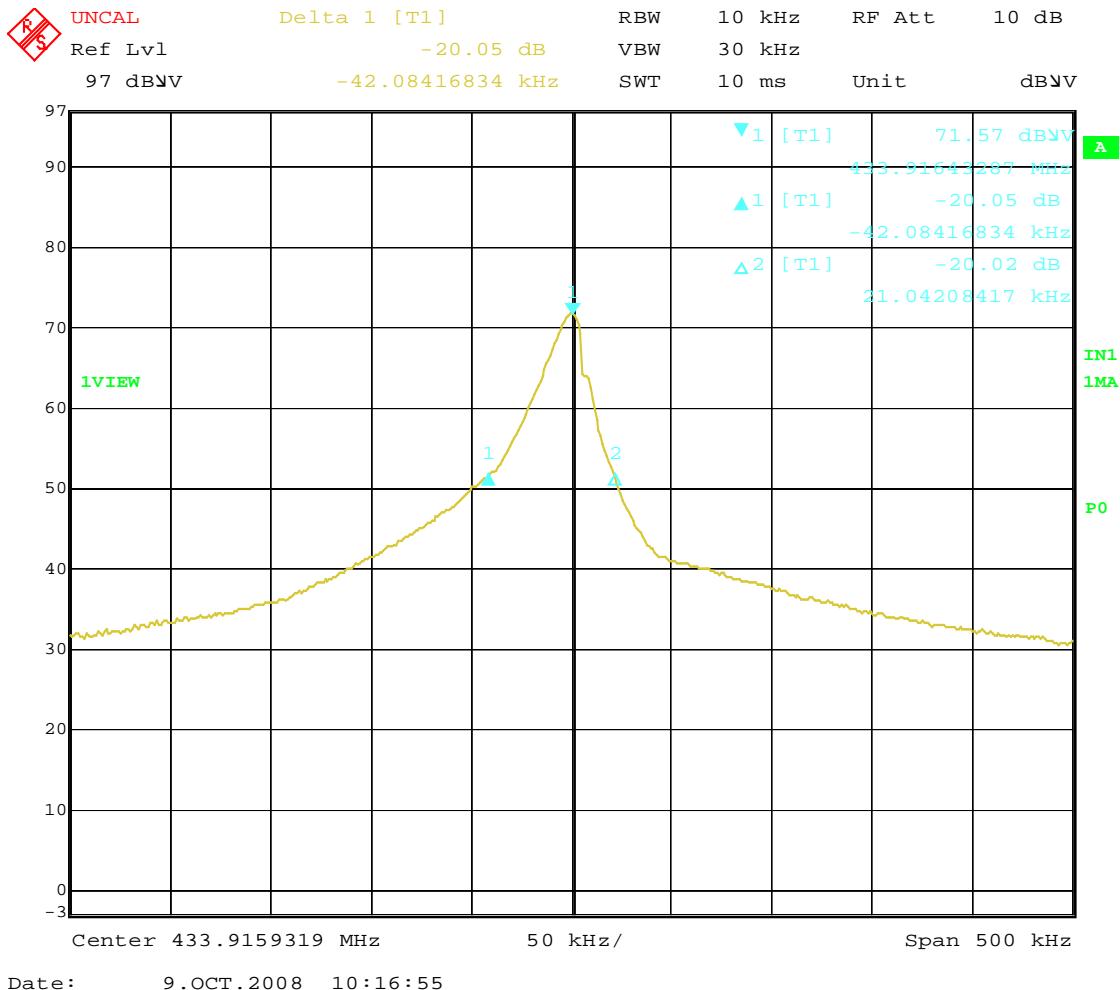

## **8. Photographs of Testing**

### **Radiated Emission**



## **9. Photographs – Constructional Details**

**EUT - Front View**





**EUT - Rear View**



**EUT - Uncovered View**



**EUT - PCB View**

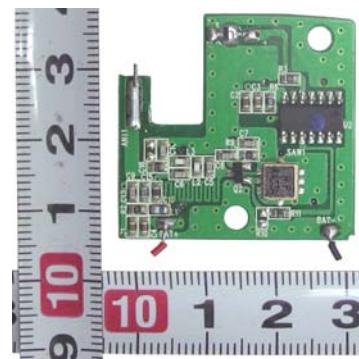

**Supplementary Model: 500R1**



**Supplementary Model: 500R2**



**Supplementary Model: 500R3**



**10. FCC ID Label****FCC ID: NS3-500R**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

**EUT Bottom View/proposed FCC Mark Location**