


Part No. 9000719

Automotive Wi-Fi / BT Dual Band or CBRS/n78 Stamped Metal Embedded Antenna 2.4 / 5 GHz or 3.3 – 3.8 GHz

Supports: Wi-Fi applications, Agriculture, Automotive, Bluetooth, Zigbee, WLAN, Smart Home, Healthcare, Digital Signage

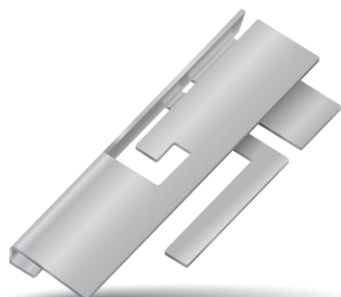

*CBRS/n78 layout offered in Appendix 1

Stamped Metal Wi-Fi or CBRS/n78 Embedded Antenna

2.4 GHz; 5 GHz; 3.3 - 3.8 GHz

KEY BENEFITS

Stay-in-Tune

KYOCERA AVX antenna technology provides superior RF field containment, resulting in less interaction with surrounding components.

Quicker Time-to-Market

By optimizing antenna size, performance and emissions, customer and regulatory specifications are more easily met.

Reliability

Products are the latest RoHS version compliant

APPLICATIONS

- Embedded design
- Cellular, Headsets, Tablets
- Gateway, Access Point
- Handheld
- Telematics
- Tracking
- Healthcare
- M2M, Industrial devices
- Smart Grid
- OBD-II

KYOCERA AVX A-Series automotive antennas deliver on the key needs of device designers for higher functionality.

KYOCERA AVX has completed rigorous testing to qualify the A-series antennas for automotive applications. Although the AEC-Q200 standard does not include antenna products, all testing has been done following applicable AEC-Q200 requirements and procedures as closely as possible. Customers must provide additional quality requirements, if any, to drive additional compliance testing.

Electrical Specifications

Typical Characteristics, on 120 x 180 mm PCB

Frequency (GHz)	2.400 – 2.485	4.900 – 5.825	3.300– 3.800
Peak Gain	1.5 dBi	2.6 dBi	Refer to Appendix 1
Average Efficiency	80%	72%	
VSWR Match	1.5:1 max	1.6:1 max	
Feed Point Impedance	50 ohms unbalanced		
Polarization	Linear		
Power Handling	0.5 Watt CW		

Mechanical Specifications & Ordering Part Number




Ordering Part Number	9000719
Size (mm)	17.85 x 6.9 x 4.3
Mounting	SMT
Weight (grams)	0.35
Packaging	Tape & Reel
Temperature Range	-50/+125 °C
Temperature Cycle	IEC 60068-2-14:2009
Temperature Exposure	Mil-STD-202 Method 108
High Temperature Humidity	MIL-STD-202 Method 103. per spec.: 168 Hrs.
Mechanical Shock	IEC 60068-2-6:2007
Vibration	IEC 60068-2-27:2008
IMDS and PPAP available	

2.4 / 5 GHz Stamped Metal Embedded Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


Antenna Dimensions

Typical antenna dimensions (mm)

Part Number	A	B	C
9000719	17.85 ± 0.3	6.9 ± 0.3	4.3 ± 0.4

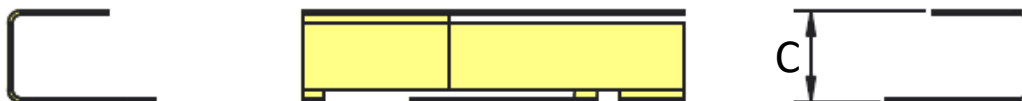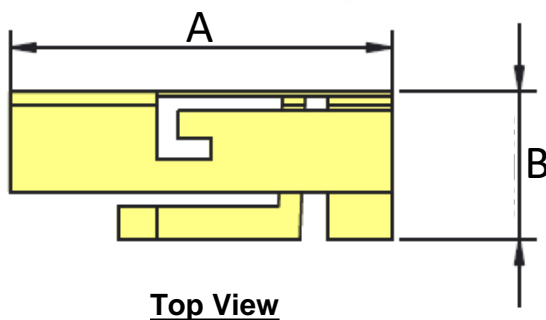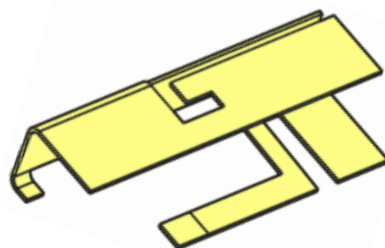

Height





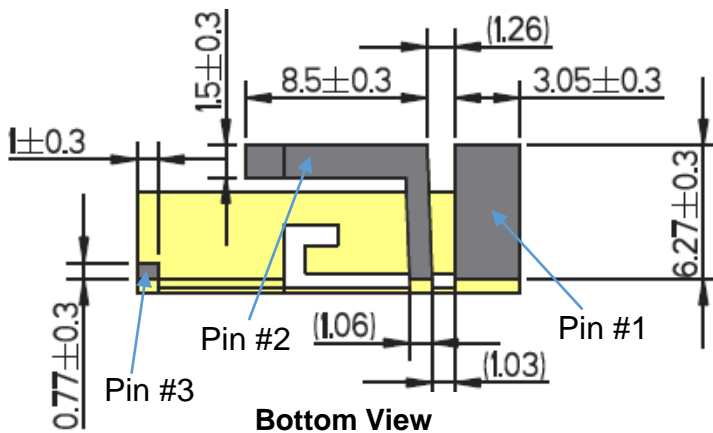


Pin	Description
1	Feed
2	Ground
3	Dummy Pad

2.4 / 5 GHz Stamped Metal Embedded Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

VSWR and Efficiency Plots



Typical Performance on 120 x 180 mm PCB

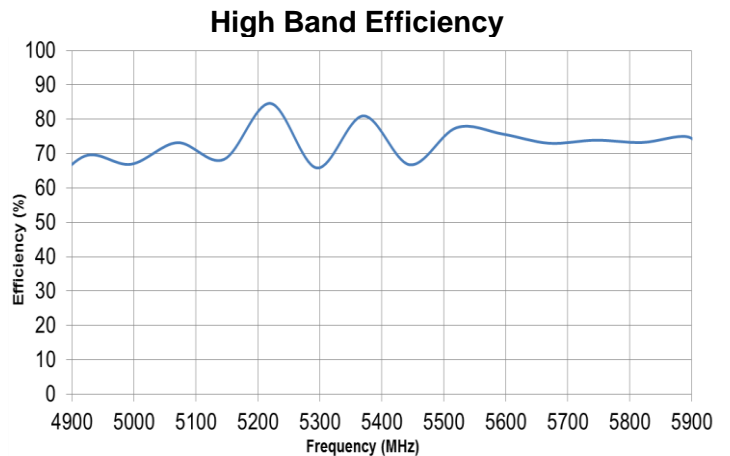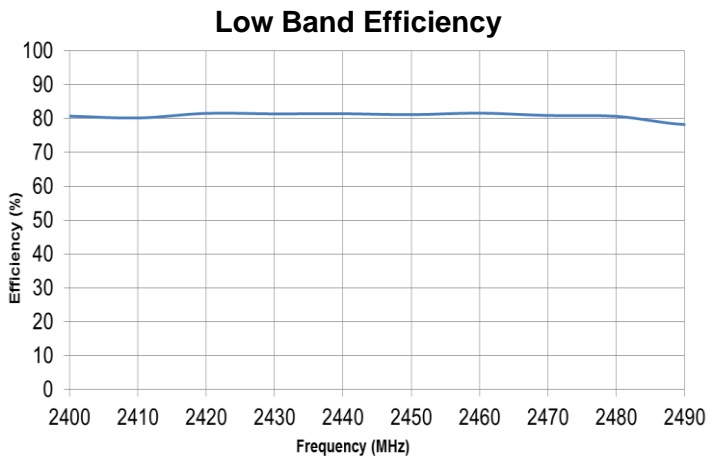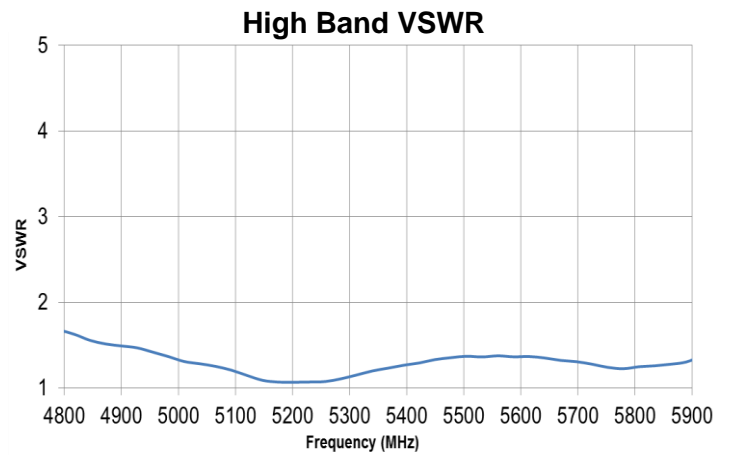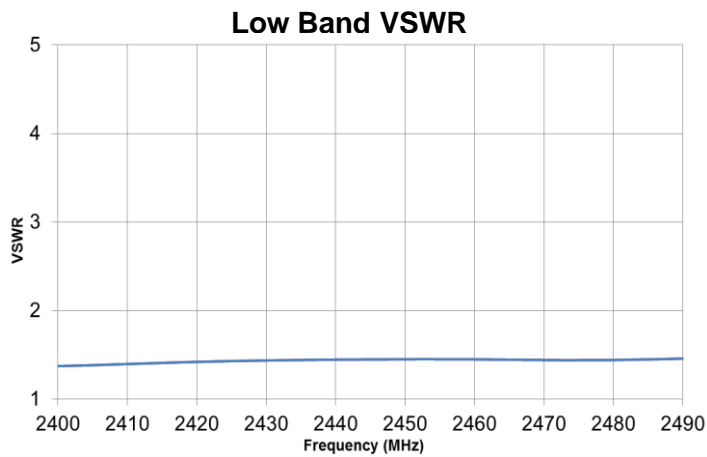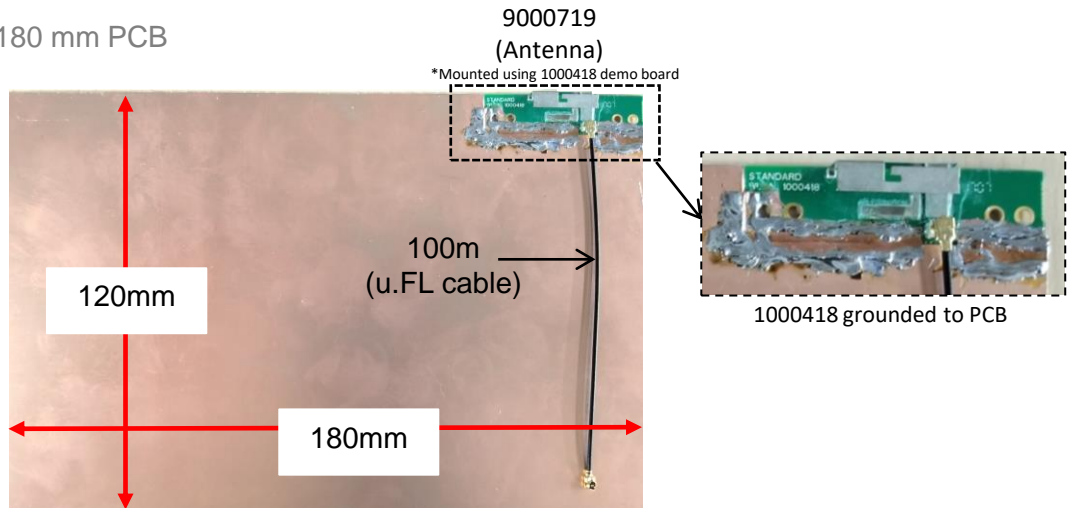

2.4 / 5 GHz Stamped Metal Embedded Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Radiation Patterns



Typical Performance on 120 x 180 mm PCB
 Measured @ 2400, 5100 MHz

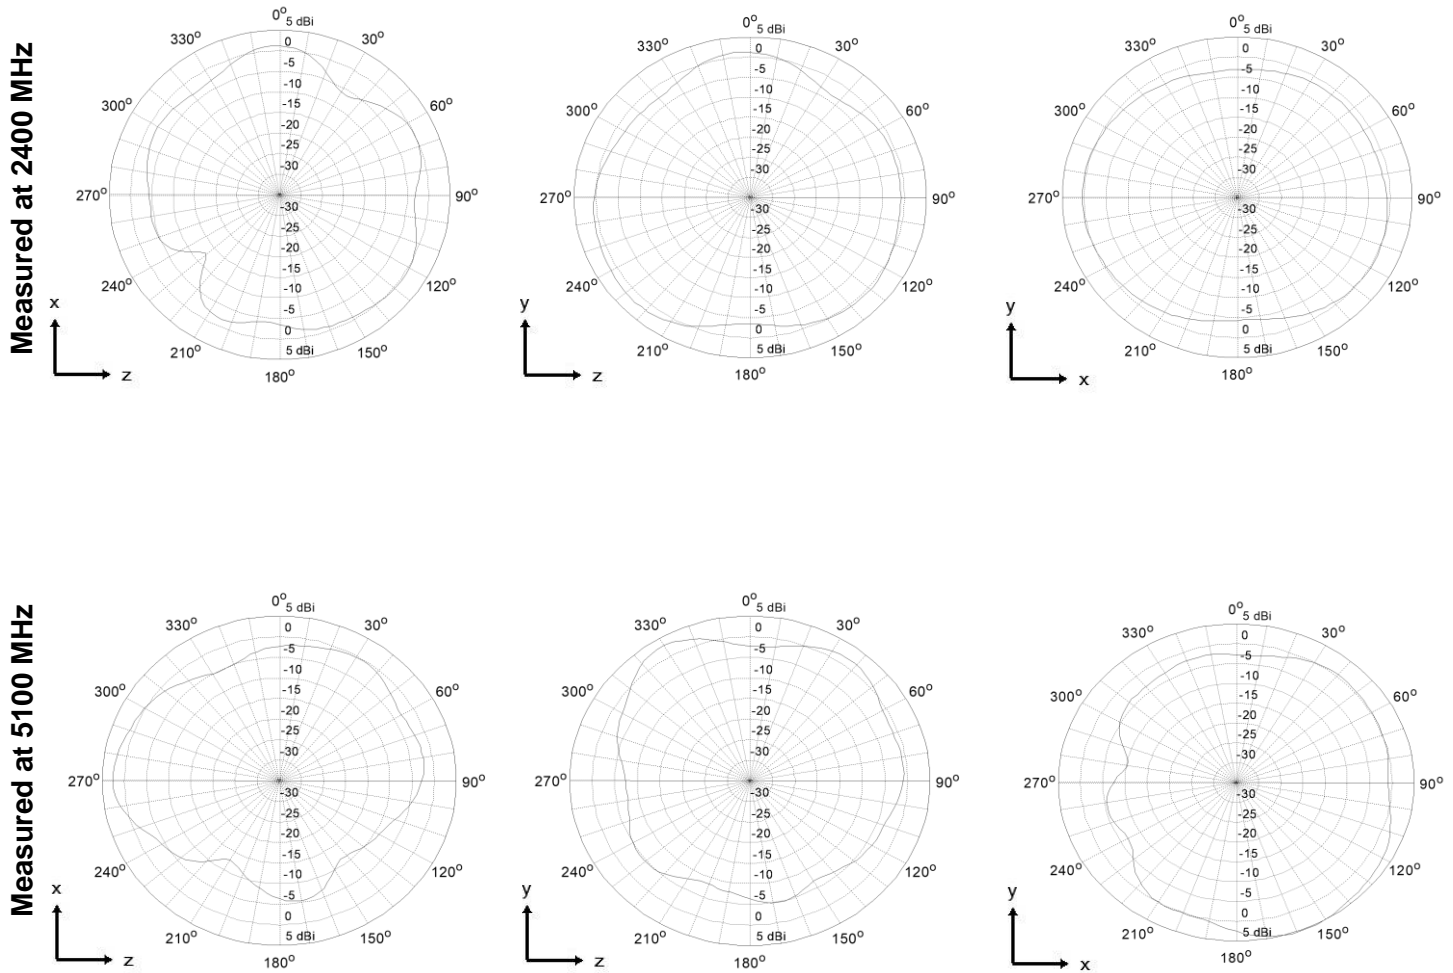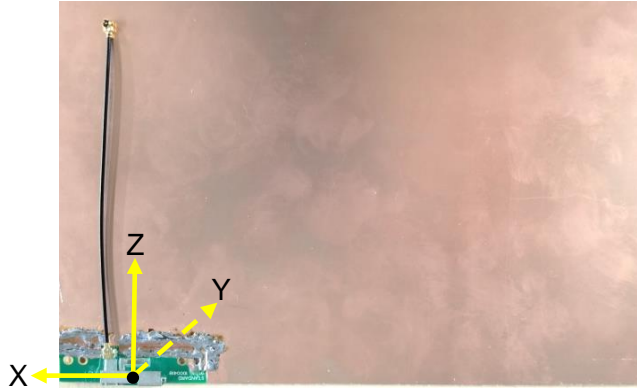

2.4 / 5 GHz Stamped Metal Embedded Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout (Minor Tuning Layout)




Typical layout dimensions (mm)

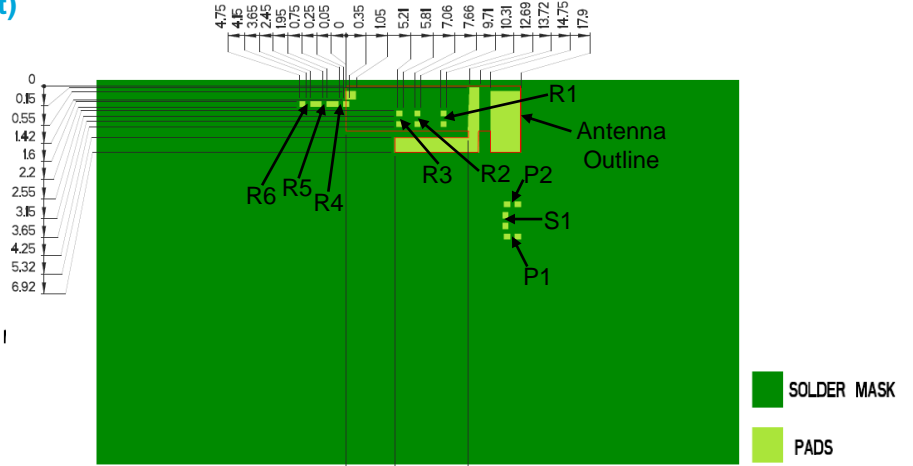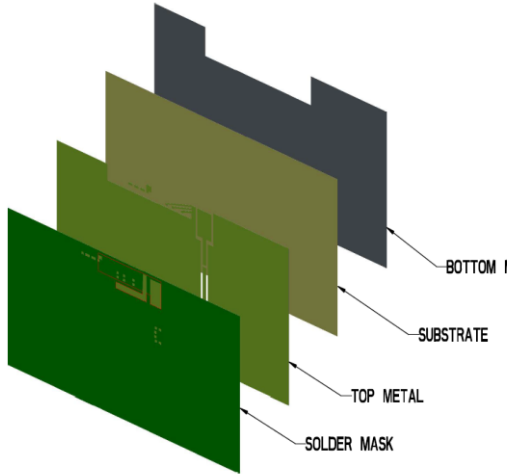

Note:
 Layout has minor tuning capabilities to allow for small antenna footprint.

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad

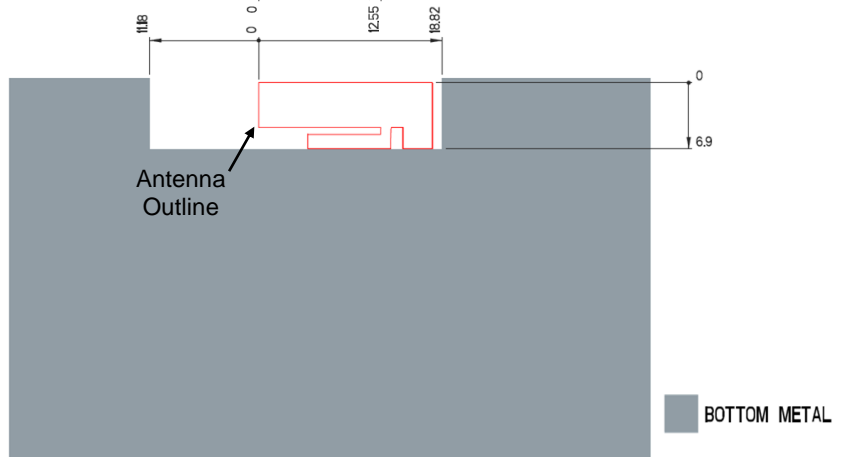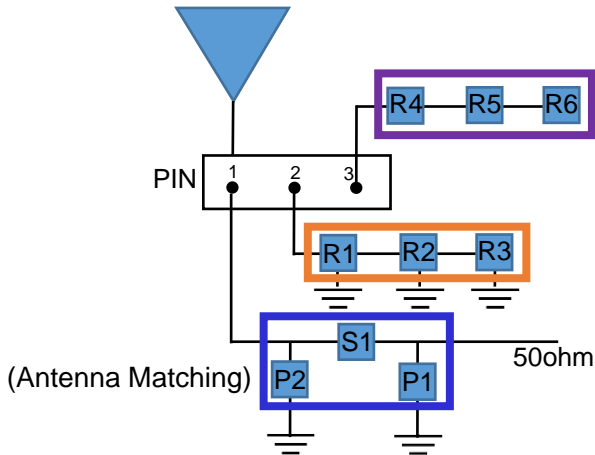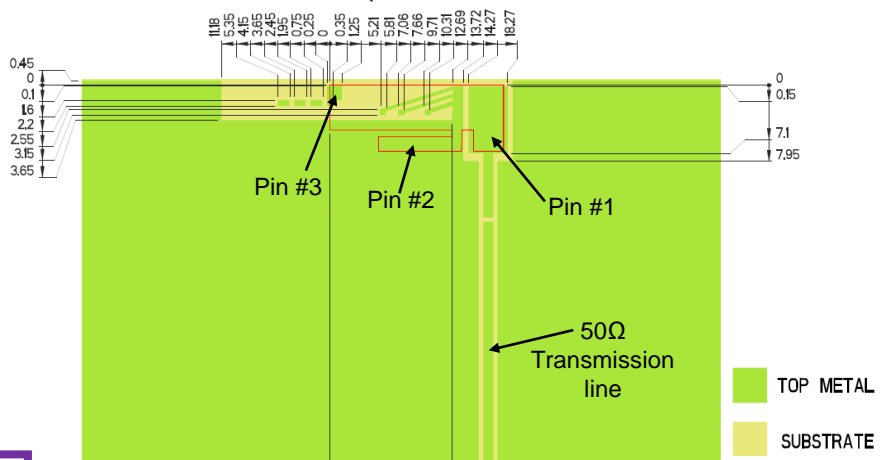


Antenna Matching & Tuning Component Values

	P1	S1	P2	R1 – R3	R4 – R6
Default Values	DNI	0Ω	DNI	DNI	DNI
Component Tolerance	N/A	N/A	N/A	N/A	N/A

2.4 / 5 GHz Stamped Metal Embedded Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout (Major Tuning Layout)




Typical layout dimensions (mm)

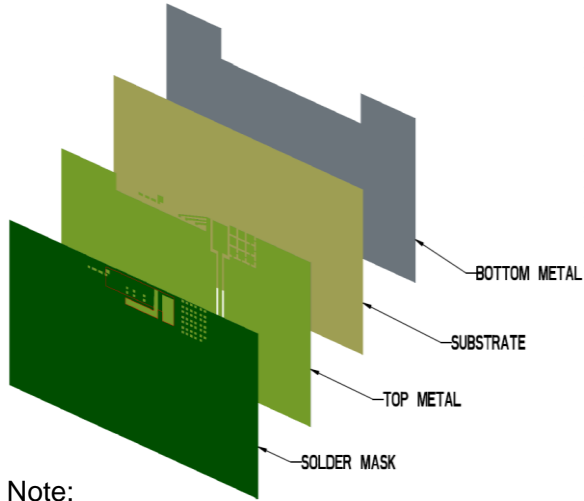

Note:
 Layout has Major tuning capabilities to allow for robust tuning after board spin, instructions on [Antenna Matching Structure](#) page.

Pin Descriptions


Pin#	Description
1	Feed
2	Ground
3	Dummy Pad

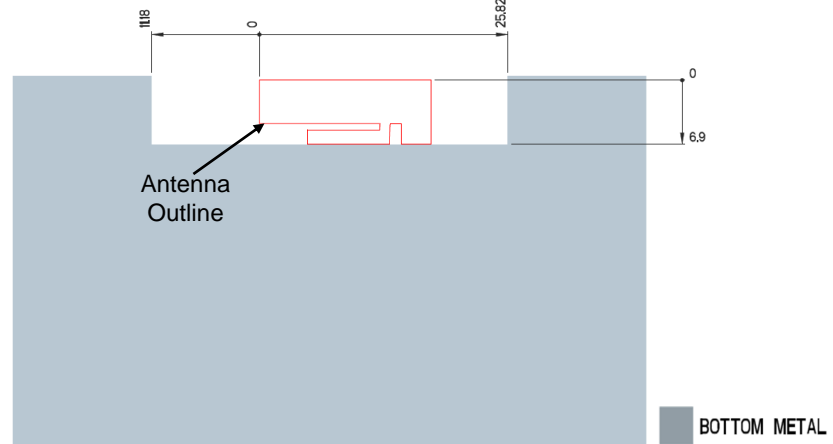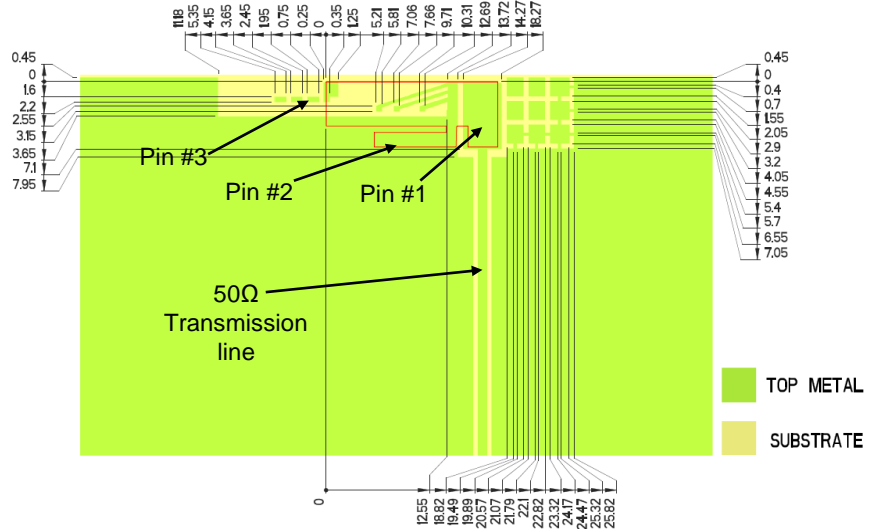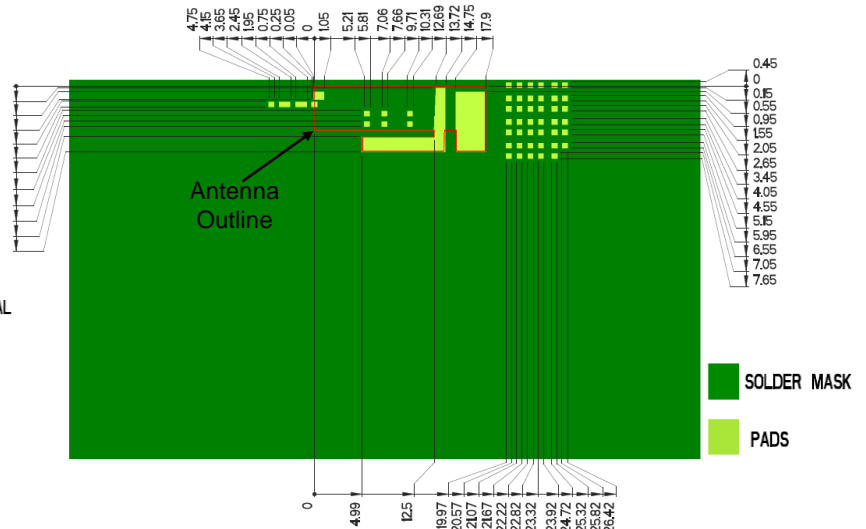

2.4 / 5 GHz Stamped Metal Embedded Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Matching Structure (Major Tuning Structure)


Typical matching values on 140 x 50 mm PCB

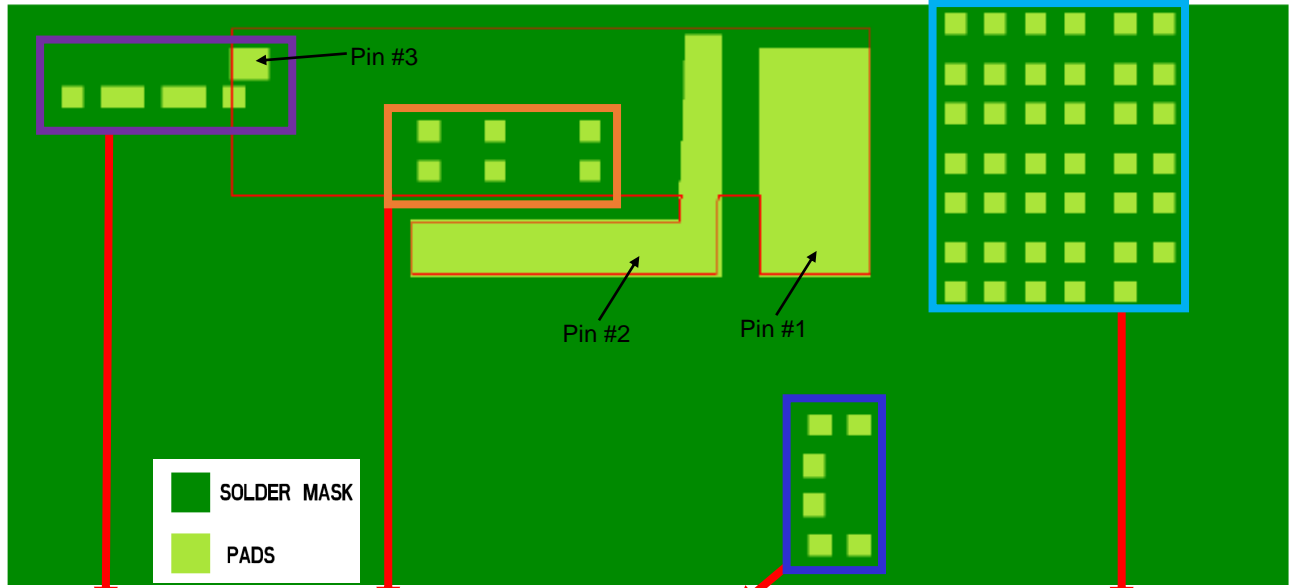


Low Band Tuning
(Add to Shift Low)





Low Band Tuning
(Add to Shift High)

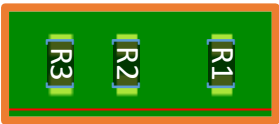

Antenna Matching





High Band Tuning
(Add to Shift High, DNI to Shift Low)

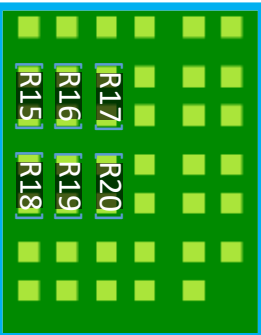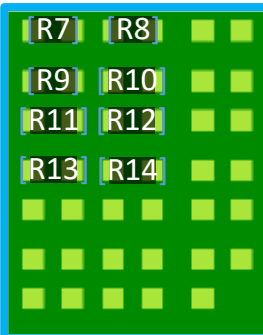

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad

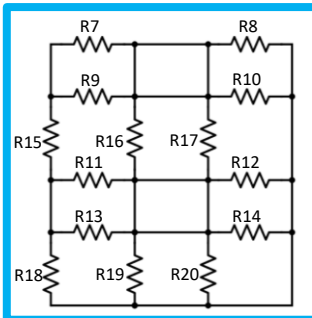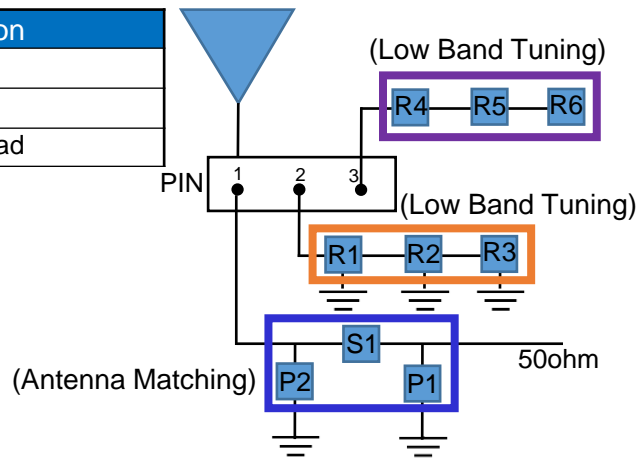

*Extend ground towards antenna feed with 0Ω component(s). R7- R20 can improve high band bandwidth/ performance with ground coupling.

	P1	S1	P2	R1 – R3	R4 – R6	R7 – R14	R15 - R20
Default Values	DNI	0Ω	DNI	DNI	DNI	DNI	DNI
Tolerance	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Appendix 1 CBRS/n78 Stamped Metal Embedded Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Appendix 1

Appendix 1 gives instructions on how to achieve CBRS/n78 performances through layout and impedance matching network.

(3.300 – 3.800 GHz)



Frequency (GHz)	3.300 – 3.800
Peak Gain	4.12 dBi
Average Efficiency	76%
VSWR Match	2.6:1 max
Feed Point Impedance	50 ohms unbalanced
Polarization	Linear
Power Handling	0.5 Watt CW

*Data shown above has Appendix 1 matching applied on 120 x 180 mm pcb.

Appendix 1 CBRS/n78 Stamped Metal Embedded Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout (CBRS/n78 performances)




Typical layout dimensions (mm)

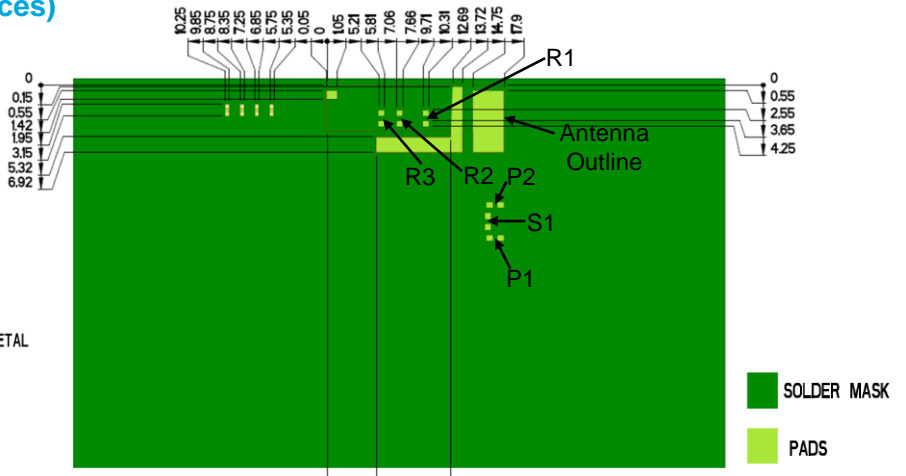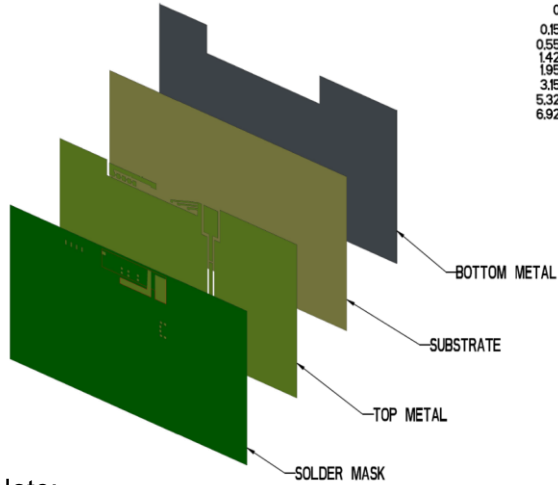

Note:
Layout has minor tuning capabilities to allow for small antenna footprint.

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad

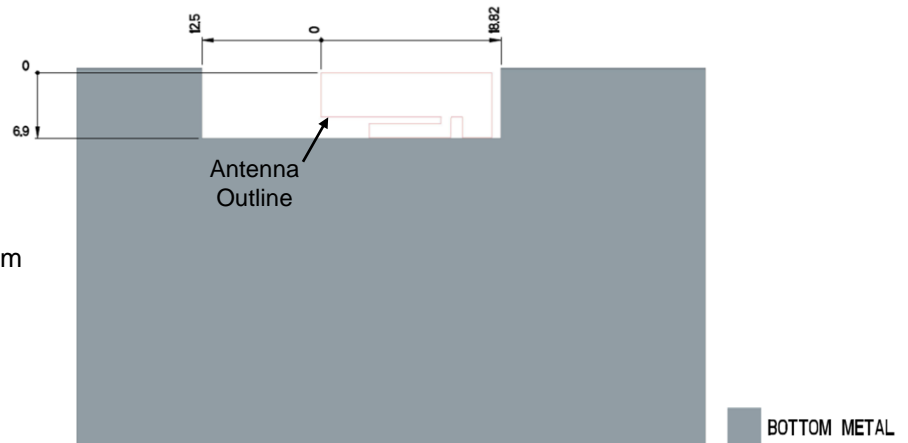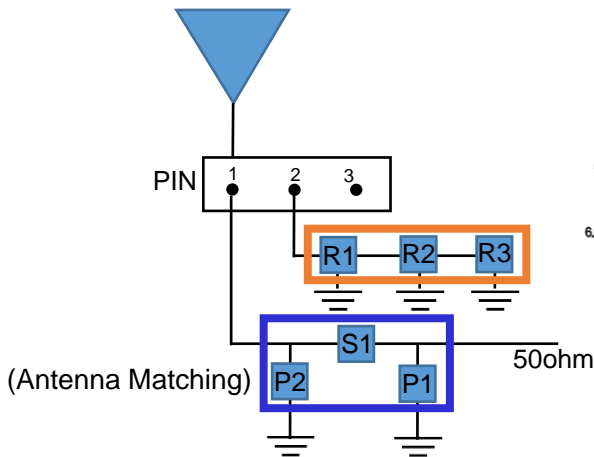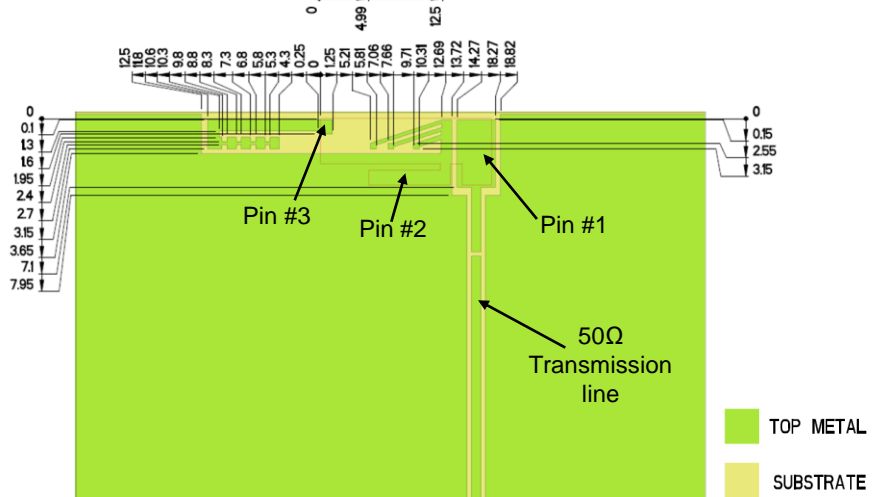


Antenna Matching & Tuning Component Values

	P1	S1	P2	R1 – R3
Default Values	DNI	0Ω	DNI	DNI
Component Tolerance	N/A	N/A	N/A	N/A

Appendix 1 CBRS/n78 Stamped Metal Embedded Antenna Specifications.
KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


Antenna Matching Structure

Typical matching values on 140 x 50 mm PCB

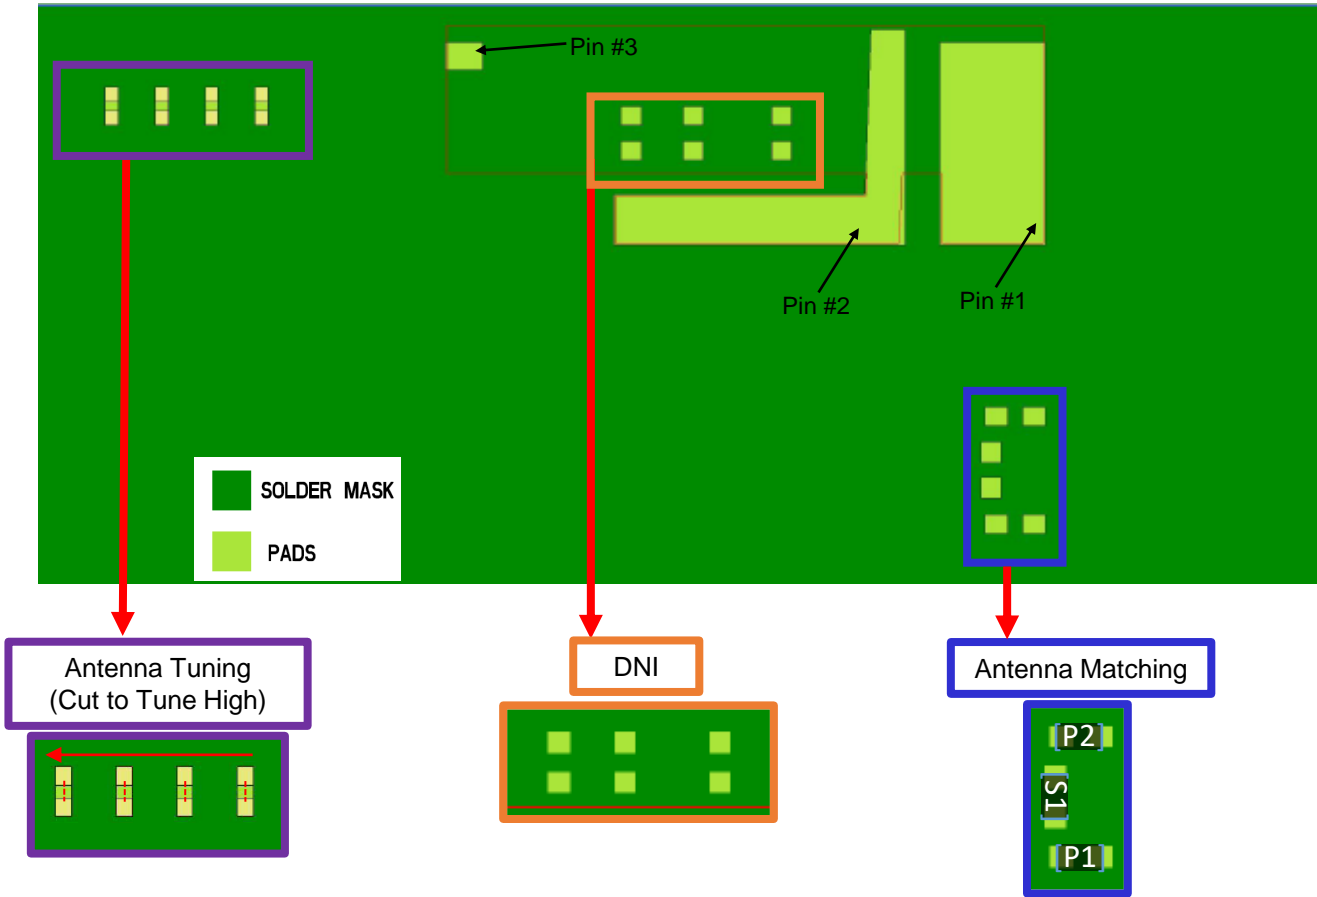

Pin Descriptions

Pin#	Description
1	Feed
2	Ground
3	Dummy Pad

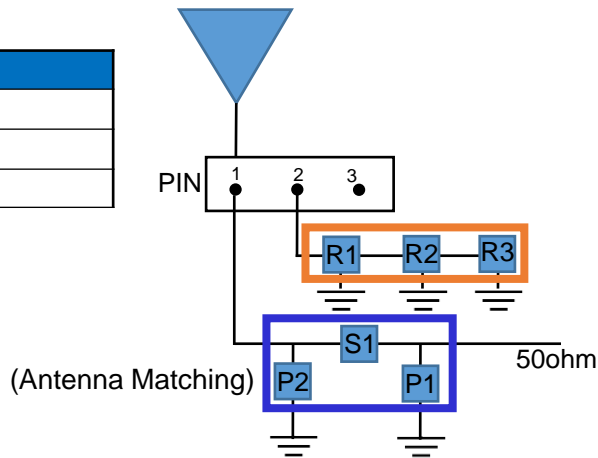


Antenna Matching & Tuning Component Values

	P1	S1	P2	R1 - R3
Default Values	DNI	0Ω	DNI	DNI
Component Tolerance	N/A	N/A	N/A	N/A


Appendix 1 CBR5/n78 Stamped Metal Embedded Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Appendix 1 VSWR and Efficiency Plots


Typical Performance on 120 x 180 mm PCB

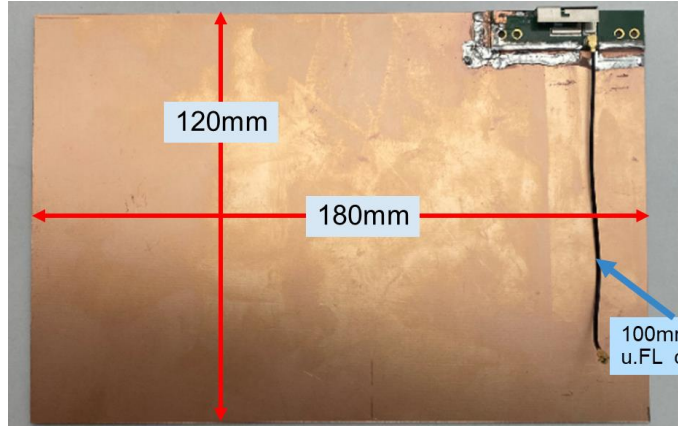


VSWR

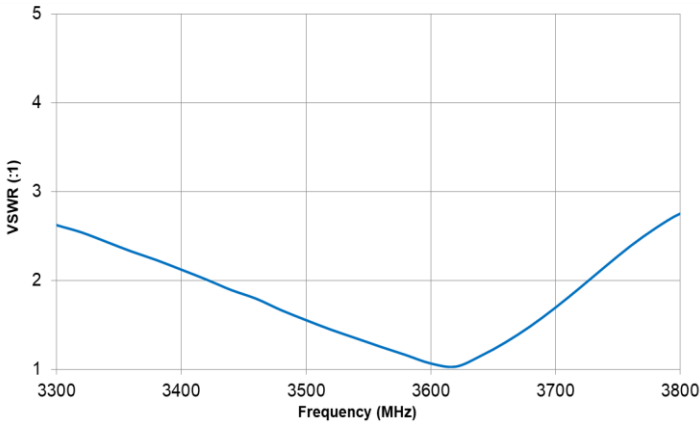

Efficiency

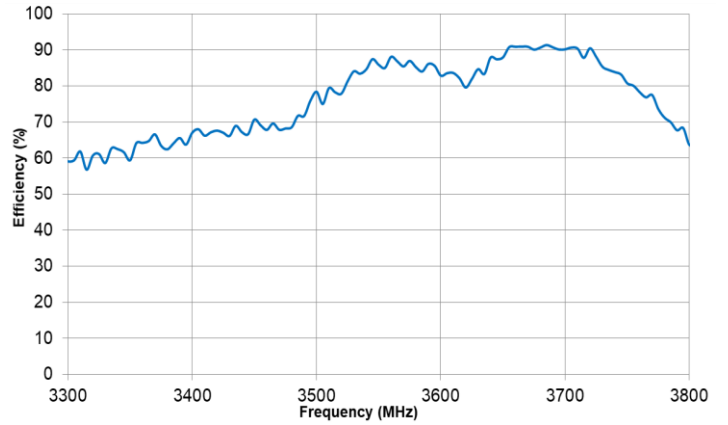

Peak Gain

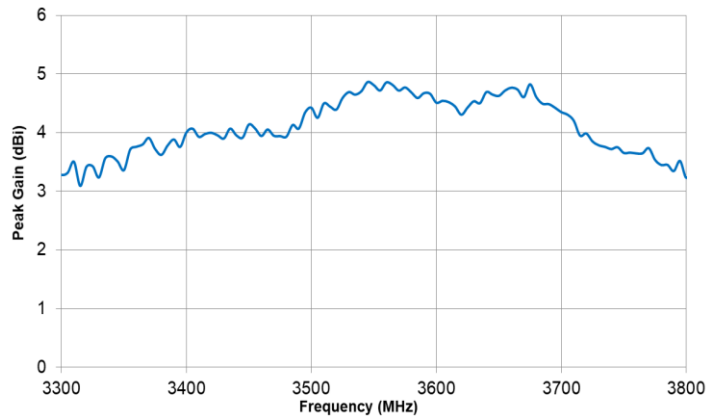


Appendix 1 CBRs/n78 Stamped Metal Embedded Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Appendix 1 Antenna Radiation Patterns

Typical Performance on 120 x 180 mm PCB

Measured @ 3500 MHz

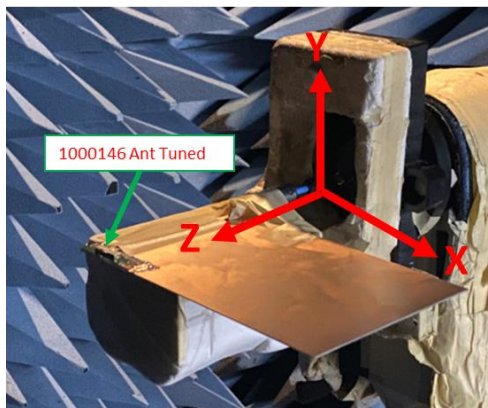

Measured at 3500 MHz

