

# FCC Measurement/Technical Report on

## In Vehicle Infotainment

### SMART CRONY IVI

FCC ID: NT8-SMARTCRONYIVI  
IC: -

**Test Report Reference:** MDE\_VIS\_1916\_FCC\_02

**Test Laboratory:**

7layers GmbH  
Borsigstrasse 11  
40880 Ratingen  
Germany



Deutsche  
Akkreditierungsstelle  
D-PL-12140-01-01  
D-PL-12140-01-02  
D-PL-12140-01-03

**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

**7layers GmbH**  
Borsigstraße 11  
40880 Ratingen, Germany  
T +49 (0) 2102 749 0  
F +49 (0) 2102 749 350

Geschäftsführer/  
Managing Directors:  
Frank Spiller  
Bernhard Retka  
Alexandre Norré-Oudard

Registergericht/registered:  
Düsseldorf HRB 75554  
USt-Id.-Nr./VAT-No. DE203159652  
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas  
Group Company*

*www.7layers.com*

## Table of Contents

|          |                                                            |           |
|----------|------------------------------------------------------------|-----------|
| <b>1</b> | <b>Applied Standards and Test Summary</b>                  | <b>3</b>  |
| 1.1      | Applied Standards                                          | 3         |
| 1.2      | FCC-IC Correlation Table                                   | 4         |
| 1.3      | Measurement Summary                                        | 5         |
| <b>2</b> | <b>Revision History / Signatures</b>                       | <b>8</b>  |
| <b>3</b> | <b>Administrative Data</b>                                 | <b>9</b>  |
| 3.1      | Testing Laboratory                                         | 9         |
| 3.2      | Project Data                                               | 9         |
| 3.3      | Applicant Data                                             | 9         |
| 3.4      | Manufacturer Data                                          | 9         |
| <b>4</b> | <b>Test object Data</b>                                    | <b>10</b> |
| 4.1      | General EUT Description                                    | 10        |
| 4.2      | EUT Main components                                        | 11        |
| 4.3      | Ancillary Equipment                                        | 11        |
| 4.4      | Auxiliary Equipment                                        | 11        |
| 4.5      | EUT Setups                                                 | 12        |
| 4.6      | Operating Modes / Test Channels                            | 12        |
| 4.7      | Product labelling                                          | 12        |
| <b>5</b> | <b>Test Results</b>                                        | <b>13</b> |
| 5.1      | 26 dB Bandwidth                                            | 13        |
| 5.2      | 6 dB Bandwidth                                             | 17        |
| 5.3      | 99 % Bandwidth                                             | 21        |
| 5.4      | Maximum Conducted Output Power                             | 25        |
| 5.5      | Peak Power Spectral Density                                | 31        |
| 5.6      | Undesirable Emissions; General Field Strength Limits       | 38        |
| 5.7      | Band Edge                                                  | 50        |
| <b>6</b> | <b>Test Equipment</b>                                      | <b>57</b> |
| <b>7</b> | <b>Antenna Factors, Cable Loss and Sample Calculations</b> | <b>61</b> |
| 7.1      | LISN R&S ESH3-Z5 (150 kHz – 30 MHz)                        | 61        |
| 7.2      | Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)                       | 62        |
| 7.3      | Antenna R&S HL562 (30 MHz – 1 GHz)                         | 63        |
| 7.4      | Antenna R&S HF907 (1 GHz – 18 GHz)                         | 64        |
| 7.5      | Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)                   | 65        |
| 7.6      | Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)                   | 66        |
| <b>8</b> | <b>Measurement Uncertainties</b>                           | <b>67</b> |
| <b>9</b> | <b>Photo Report</b>                                        | <b>68</b> |

## 1 APPLIED STANDARDS AND TEST SUMMARY

### 1.1 APPLIED STANDARDS

#### **Type of Authorization**

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-19 Edition) and 15 (10-1-19 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

#### Note:

The tests were selected and performed with reference to the FCC Public Notice “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02 General U-NII Test Procedures New Rules v02r01, 2017-12-14”.

ANSI C63.10-2013 is applied.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 (“new rules”) is applied.

## 1.2 FCC-IC CORRELATION TABLE

### Correlation of measurement requirements for UNII / LE-LAN (e.g. WLAN 5 GHz) equipment from FCC and IC

#### UNII equipment

| Measurement                                                                              | FCC reference                                 | IC reference                                                                                            |
|------------------------------------------------------------------------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------|
| Conducted emissions on AC Mains                                                          | § 15.207                                      | RSS-Gen Issue 5: 8.8                                                                                    |
| Occupied bandwidth                                                                       | § 15.403 (i) (26 dB) /<br>§ 15.407 (e) (6 dB) | RSS-247 Issue 2: 6.2.1.1,<br>6.2.2.1, 6.2.3.1 (99%)<br>RSS-247 Issue 2: 6.2.4.1 (6<br>dB)               |
| Maximum conducted output power                                                           | § 15.407 (a)<br>(1),(2),(3),(4)               | RSS-247 Issue 2: 6.2.1.1,<br>6.2.2.1, 6.2.3.1, 6.2.4.1                                                  |
| Maximum power spectral density                                                           | § 15.407 (a)<br>(1),(2),(3),(5)               | RSS-247 Issue 2: 6.2.1.1,<br>6.2.2.1, 6.2.3.1, 6.2.4.1                                                  |
| Transmitter undesirable emissions;<br>General Field Strength Limits,<br>Restricted Bands | § 15.407 (b)<br>§ 15.209 (a)                  | RSS-Gen Issue 5:<br>6.13/8.9/8.10;<br>RSS-247 Issue 2: 3.3/6.2<br>6.2.1.2, 6.2.2.2, 6.2.3.2,<br>6.2.4.2 |
| Frequency stability                                                                      | § 15.407 (g)                                  | RSS-Gen Issue 5: 6.11/8.11                                                                              |
| Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)                       | § 15.407 (h)                                  | RSS-247 Issue 2: 6.2.2.1,<br>6.2.3.1, 6.3                                                               |
| Antenna requirement                                                                      | § 15.203 / 15.204                             | RSS-Gen Issue 5: 8.3                                                                                    |
| Receiver spurious emissions                                                              | -                                             | -                                                                                                       |

### 1.3 MEASUREMENT SUMMARY

#### 47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

#### FCC §15.31, §15.403 (i)

26 dB Bandwidth

The measurement was performed according to ANSI C63.10

#### Final Result

| OP-Mode<br>Radio Technology, Operating Frequency,<br>Subband | Setup    | Date       | FCC       | IC  |
|--------------------------------------------------------------|----------|------------|-----------|-----|
| WLAN a, high, U-NII-3                                        | S01_AE01 | 2021-06-30 | Performed | N/A |
| WLAN a, low, U-NII-3                                         | S01_AE01 | 2021-06-30 | Performed | N/A |
| WLAN a, mid, U-NII-3                                         | S01_AE01 | 2021-06-30 | Performed | N/A |
| WLAN ac 80 MHz, mid, U-NII-3                                 | S01_AE01 | 2021-06-30 | Performed | N/A |
| WLAN n 20 MHz, high, U-NII-3                                 | S01_AE01 | 2021-06-30 | Performed | N/A |
| WLAN n 20 MHz, low, U-NII-3                                  | S01_AE01 | 2021-06-30 | Performed | N/A |
| WLAN n 20 MHz, mid, U-NII-3                                  | S01_AE01 | 2021-06-30 | Performed | N/A |
| WLAN n 40 MHz, high, U-NII-3                                 | S01_AE01 | 2021-06-30 | Performed | N/A |
| WLAN n 40 MHz, low, U-NII-3                                  | S01_AE01 | 2021-06-30 | Performed | N/A |

#### 47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

#### FCC §15.31, §15.407 (e)

6 dB Bandwidth

The measurement was performed according to ANSI C63.10

#### Final Result

| OP-Mode<br>Radio Technology, Operating Frequency,<br>Subband | Setup    | Date       | FCC    | IC     |
|--------------------------------------------------------------|----------|------------|--------|--------|
| WLAN a, high, U-NII-3                                        | S01_AE01 | 2021-06-30 | Passed | Passed |
| WLAN a, low, U-NII-3                                         | S01_AE01 | 2021-06-30 | Passed | Passed |
| WLAN a, mid, U-NII-3                                         | S01_AE01 | 2021-06-30 | Passed | Passed |
| WLAN ac 80 MHz, mid, U-NII-3                                 | S01_AE01 | 2021-06-30 | Passed | Passed |
| WLAN n 20 MHz, high, U-NII-3                                 | S01_AE01 | 2021-06-30 | Passed | Passed |
| WLAN n 20 MHz, low, U-NII-3                                  | S01_AE01 | 2021-06-30 | Passed | Passed |
| WLAN n 20 MHz, mid, U-NII-3                                  | S01_AE01 | 2021-06-30 | Passed | Passed |
| WLAN n 40 MHz, high, U-NII-3                                 | S01_AE01 | 2021-06-30 | Passed | Passed |
| WLAN n 40 MHz, low, U-NII-3                                  | S01_AE01 | 2021-06-30 | Passed | Passed |

#### 47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

#### FCC §15.31, IC RSS 247 Ch. 6.2.x

99 % Bandwidth

The measurement was performed according to ANSI C63.10

#### Final Result

| OP-Mode<br>Radio Technology, Operating Frequency,<br>Subband | Setup    | Date       | FCC | IC        |
|--------------------------------------------------------------|----------|------------|-----|-----------|
| WLAN a, high, U-NII-3                                        | S01_AE01 | 2021-06-30 | N/A | Performed |
| WLAN a, low, U-NII-3                                         | S01_AE01 | 2021-06-30 | N/A | Performed |
| WLAN a, mid, U-NII-3                                         | S01_AE01 | 2021-06-30 | N/A | Performed |
| WLAN ac 80 MHz, mid, U-NII-3                                 | S01_AE01 | 2021-06-30 | N/A | Performed |

**47 CFR CHAPTER I FCC PART 15  
Subpart E §15.407**

**FCC §15.31, IC RSS 247 Ch. 6.2.x**

99 % Bandwidth

The measurement was performed according to ANSI C63.10

**Final Result**

| <b>OP-Mode</b><br>Radio Technology, Operating Frequency,<br>Subband | <b>Setup</b> | <b>Date</b> | <b>FCC</b> | <b>IC</b> |
|---------------------------------------------------------------------|--------------|-------------|------------|-----------|
| WLAN n 20 MHz, high, U-NII-3                                        | S01_AE01     | 2021-06-30  | N/A        | Performed |
| WLAN n 20 MHz, low, U-NII-3                                         | S01_AE01     | 2021-06-30  | N/A        | Performed |
| WLAN n 20 MHz, mid, U-NII-3                                         | S01_AE01     | 2021-06-30  | N/A        | Performed |
| WLAN n 40 MHz, high, U-NII-3                                        | S01_AE01     | 2021-06-30  | N/A        | Performed |
| WLAN n 40 MHz, low, U-NII-3                                         | S01_AE01     | 2021-06-30  | N/A        | Performed |

**47 CFR CHAPTER I FCC PART 15  
Subpart E §15.407**

**FCC §15.31, §15.407 (a)(1)**

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10

**Final Result**

| <b>OP-Mode</b><br>Radio Technology, Operating Frequency,<br>Subband | <b>Setup</b> | <b>Date</b> | <b>FCC</b> | <b>IC</b> |
|---------------------------------------------------------------------|--------------|-------------|------------|-----------|
| WLAN a, high, U-NII-3                                               | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN a, low, U-NII-3                                                | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN a, mid, U-NII-3                                                | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN ac 80 MHz, mid, U-NII-3                                        | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN n 20 MHz, high, U-NII-3                                        | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN n 20 MHz, low, U-NII-3                                         | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN n 20 MHz, mid, U-NII-3                                         | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN n 40 MHz, high, U-NII-3                                        | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN n 40 MHz, low, U-NII-3                                         | S01_AE01     | 2021-06-30  | Passed     | Passed    |

**47 CFR CHAPTER I FCC PART 15  
Subpart E §15.407**

**FCC §15.31, §15.407 (a) (1),(5)**

Peak Power Spectral Density

The measurement was performed according to ANSI C63.10

**Final Result**

| <b>OP-Mode</b><br>Radio Technology, Operating Frequency,<br>Subband | <b>Setup</b> | <b>Date</b> | <b>FCC</b> | <b>IC</b> |
|---------------------------------------------------------------------|--------------|-------------|------------|-----------|
| WLAN a, high, U-NII-3                                               | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN a, low, U-NII-3                                                | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN a, mid, U-NII-3                                                | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN ac 80 MHz, mid, U-NII-3                                        | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN n 20 MHz, high, U-NII-3                                        | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN n 20 MHz, low, U-NII-3                                         | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN n 20 MHz, mid, U-NII-3                                         | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN n 40 MHz, high, U-NII-3                                        | S01_AE01     | 2021-06-30  | Passed     | Passed    |
| WLAN n 40 MHz, low, U-NII-3                                         | S01_AE01     | 2021-06-30  | Passed     | Passed    |

**47 CFR CHAPTER I FCC PART 15  
Subpart E §15.407**

**FCC §15.407 (b), (1),(2),(3),(4); FCC  
§15.205, §15.209, §15.407 (b) (5),(6)**

Undesirable Emissions; General Field Strength Limits

The measurement was performed according to ANSI C63.10

**Final Result**

| <b>OP-Mode</b><br>Radio Technology, Operating Frequency,<br>Measurement range, Subband | <b>Setup</b> | <b>Date</b> | <b>FCC</b> | <b>IC</b> |
|----------------------------------------------------------------------------------------|--------------|-------------|------------|-----------|
| WLAN a, high, 1GHz - 26GHz, U-NII-3                                                    | S01_AD01     | 2021-06-27  | Passed     | Passed    |
| WLAN a, low, 1GHz - 26GHz, U-NII-3                                                     | S01_AD01     | 2021-06-26  | Passed     | Passed    |
| WLAN a, mid, 1GHz - 26GHz, U-NII-3                                                     | S01_AD01     | 2021-06-27  | Passed     | Passed    |
| WLAN a, mid, 26GHz - 40GHz, U-NII-3                                                    | S01_AD01     | 2021-07-06  | Passed     | Passed    |
| WLAN a, mid, 30MHz - 1GHz, U-NII-3                                                     | S01_AD01     | 2021-06-24  | Passed     | Passed    |
| WLAN a, mid, 9kHz - 30MHz, U-NII-3                                                     | S01_AD01     | 2021-06-25  | Passed     | Passed    |
| WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-3<br>Remark: tested 1-18 GHz                  | S01_AD01     | 2021-07-02  | Passed     | Passed    |
| WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-3<br>Remark: tested 1-18 GHz                   | S01_AD01     | 2021-06-27  | Passed     | Passed    |
| WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-3<br>Remark: tested 1-18 GHz                   | S01_AD01     | 2021-06-30  | Passed     | Passed    |
| WLAN n 20 MHz, mid, 26GHz - 40GHz, U-NII-3                                             | S01_AD01     | 2021-07-06  | Passed     | Passed    |
| WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-3                                             | S01_AD01     | 2021-07-03  | Passed     | Passed    |
| WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-3                                              | S01_AD01     | 2021-07-02  | Passed     | Passed    |

**47 CFR CHAPTER I FCC PART 15  
Subpart E §15.407**

**FCC §15.407 (b), (1),(2),(3),(4)**

Band Edge

The measurement was performed according to ANSI C63.10

**Final Result**

| <b>OP-Mode</b><br>Radio Technology, Operating Frequency,<br>Subband | <b>Setup</b> | <b>Date</b> | <b>FCC</b> | <b>IC</b> |
|---------------------------------------------------------------------|--------------|-------------|------------|-----------|
| WLAN a, high, U-NII-3                                               | S01_AD01     | 2021-06-27  | Passed     | Passed    |
| WLAN a, low, U-NII-3                                                | S01_AD01     | 2021-06-26  | Passed     | Passed    |
| WLAN ac 80 MHz, mid, U-NII-3                                        | S01_AD01     | 2021-07-30  | Passed     | Passed    |
| WLAN n 20 MHz, high, U-NII-3                                        | S01_AD01     | 2021-07-30  | Passed     | Passed    |
| WLAN n 20 MHz, low, U-NII-3                                         | S01_AD01     | 2021-06-27  | Passed     | Passed    |
| WLAN n 40 MHz, high, U-NII-3                                        | S01_AD01     | 2021-07-03  | Passed     | Passed    |
| WLAN n 40 MHz, low, U-NII-3                                         | S01_AD01     | 2021-07-03  | Passed     | Passed    |

N/A: Not applicable

N/P: Not performed

## 2 REVISION HISTORY / SIGNATURES

| Report version control |              |                    |                  |
|------------------------|--------------|--------------------|------------------|
| Version                | Release date | Change Description | Version validity |
| initial                | 2021-08-23   | --                 | valid            |
| --                     | --           | --                 | --               |

COMMENT: -



(responsible for accreditation scope)  
Dipl.-Ing. Marco Kullik



(responsible for testing and report)  
M.Sc. Joel Asongwe



7 layers GmbH, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0



### 3 ADMINISTRATIVE DATA

#### 3.1 TESTING LABORATORY

Company Name: 7layers GmbH  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAKKS D-PL-12140-01-01 | -02 | -03  
FCC Designation Number: DE0015  
FCC Test Firm Registration: 929146  
ISED CAB Identifier: DE0007; ISED#: 3699A  
Responsible for accreditation scope: Dipl.-Ing. Marco Kullik  
Report Template Version: 2021-01-13

#### 3.2 PROJECT DATA

Responsible for testing and report: M.Sc. Joel Asongwe  
Employees who performed the tests: documented internally at 7Layers  
Date of Report: 2021-08-23  
Testing Period: 2021-06-24 to 2021-07-30

#### 3.3 APPLICANT DATA

Company Name: Visteon Corporation  
Address: One Village Center Drive  
Van Buren Township, MI, 48111,  
U.S.A  
Contact Person: Heidi Sepanik, Corporate Secretary

#### 3.4 MANUFACTURER DATA

Company Name: please see Applicant Data  
Address:  
Contact Person:

## 4 TEST OBJECT DATA

### 4.1 GENERAL EUT DESCRIPTION

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Kind of Device<br>product description    | This system consists of 10.25" TFT display with capacitive touch screen.<br>RF features FM/AM, USB, BT, WiFi, in built GPS Navigation, RVC modes. It consists of a Class AB power amplifier and a DSP tuner for media & radio entertainment.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Product name                             | In Vehicle Infotainment                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Type                                     | SMART CRONY IVI                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Declared EUT data by the supplier</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Voltage Type                             | Car battery                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Voltage Level                            | 13.5 V DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Tested Modulation Type                   | OFDM, BPSK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Specific product<br>description          | SMART CRONY IVI In-vehicle infotainment system that combines entertainment and information delivery for driver and passengers. This system consists of features like AM/FM Radio, GPS, RVC, USB, & BT/WiFi interfaces with 10.25 Inch TFT & Touch screen interface.<br>This Infotainment can allow a driver to perform a number of tasks, such as standard radio and listen to music over USB flash drive or Bluetooth, hands-free phone connections to make phone calls, vehicle voice commands and other types of Interactive audio or video.<br>Heart of the IVI is NXP I.MX8 application is the automotive processor (SOC) and Hero DSP TEF6635 Digital Signal Processor (DSP).DSP acts as an AM/FM receiver and tone control unit. Communication between DSP and SOC is done through I2C, I2S interfaces. |
| Ports of the device                      | Cable Harness including DC<br>USB<br>AM/FM<br>GPS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Antenna 1                                | Gain: 3.5 dBi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Tested Datarates                         | WLAN a: 6 Mbps<br>WLAN n/ac: MCS0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Special software used<br>for testing     | VMF Analyser software provided by the Applicant                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

#### 4.2 EUT MAIN COMPONENTS

| Sample Name      | Sample Code                  | Description     |
|------------------|------------------------------|-----------------|
| EUT D            | DE1105011ad01                | Radiated Sample |
| Sample Parameter | Value                        |                 |
| Serial No.       | -                            |                 |
| HW Version       | 25761                        |                 |
| SW Version       | 4.62                         |                 |
| Comment          | Sample with integral Antenna |                 |

| Sample Name      | Sample Code                                      | Description      |
|------------------|--------------------------------------------------|------------------|
| EUT E            | DE1105011ae01                                    | Conducted Sample |
| Sample Parameter | Value                                            |                  |
| Serial No.       | -                                                |                  |
| HW Version       | 25761                                            |                  |
| SW Version       | 4.62                                             |                  |
| Comment          | Sample with temporary external Antenna connector |                  |

NOTE: The short description is used to simplify the identification of the EUT in this test report.

#### 4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

| Device | Details<br>(Manufacturer, Type Model, OUT Code) | Description |
|--------|-------------------------------------------------|-------------|
| -      | -                                               | -           |

#### 4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

| Device | Details<br>(Manufacturer, Type Model, HW, SW, S/N) | Description |
|--------|----------------------------------------------------|-------------|
| -      | -                                                  | -           |

## 4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

| Setup    | Combination of EUTs | Description and Rationale |
|----------|---------------------|---------------------------|
| S01_AE01 | EUT E,              | Conducted Setup           |
| S01_AD01 | EUT D,              | Radiated setup            |

## 4.6 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.

| U-NII-Subband 3<br>5725 - 5850 MHz |      |      | Nom.<br>BW |
|------------------------------------|------|------|------------|
| low                                | mid  | high | 20 MHz     |
| 149                                | 157  | 165  | Ch.-No.    |
| 5745                               | 5785 | 5825 | MHz        |

|      |      |      |         |
|------|------|------|---------|
| low  | mid  | high | 40 MHz  |
| 151  | -    | 159  | Ch.-No. |
| 5755 | -    | 5795 | MHz     |
| low  | mid  | high | 80 MHz  |
| -    | 155  | -    | Ch.-No. |
| -    | 5775 | -    | MHz     |

## 4.7 PRODUCT LABELLING

### 4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

### 4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

## 5 TEST RESULTS

### 5.1 26 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

#### 5.1.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.


The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyzer settings:

- Resolution Bandwidth (RBW): initially approx. 1 % of nominal emission bandwidth
- Video Bandwidth (VBW): > RBW
- Span: 40 / 80 / 160 / 320 MHz (for 20 / 40 / 80 / 160 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: Until the trace is stable
- Sweeptime: Auto
- Detector: Peak

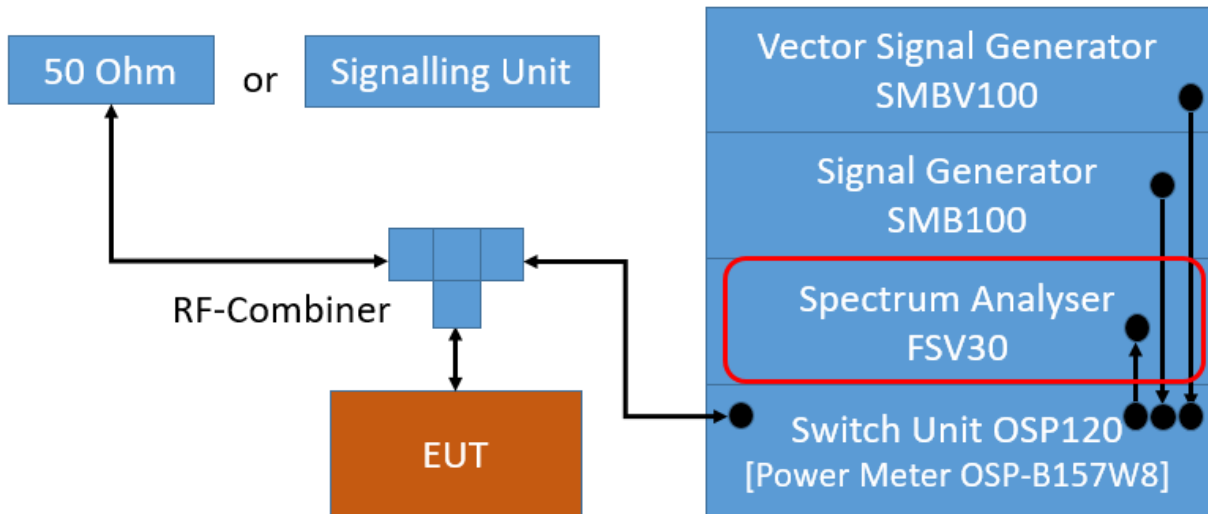

TS8997; Occupied Channel Bandwidth 6 dB / 26 dB / 99 %

### 5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.403 (i)

There exist no applicable limits for the U-NII subbands 1, 2A and 2C. The test was performed to determine the limits for the "Maximum Conducted Output Power" test case. Therefore no result was applied.

### 5.1.3 TEST PROTOCOL

Ambient temperature: 25 °C  
Air Pressure: 990 hPa  
Humidity: 43 %

| Radio Technology | Operating Frequency | Subband | 26 dB Bandwidth [MHz] |
|------------------|---------------------|---------|-----------------------|
| WLAN a           | low                 | U-NII-3 | 19.9                  |
| WLAN a           | mid                 | U-NII-3 | 19.8                  |
| WLAN a           | high                | U-NII-3 | 19.8                  |
| WLAN n 20 MHz    | low                 | U-NII-3 | 20.2                  |
| WLAN n 20 MHz    | mid                 | U-NII-3 | 20.2                  |
| WLAN n 20 MHz    | high                | U-NII-3 | 20.4                  |
| WLAN n 40 MHz    | low                 | U-NII-3 | 48.0                  |
| WLAN n 40 MHz    | high                | U-NII-3 | 40.8                  |
| WLAN ac 80 MHz   | mid                 | U-NII-3 | 84.0                  |


Remark: Please see next sub-clause for the measurement plot.

### 5.1.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN a, Operating Frequency = high, Subband = U-NII-3 (S01\_AE01)

#### 26 dB Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Max Level (dBm) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|-----------------|--------|
| 5825.000000         | 19.800000       | --              | --              | 5814.850000          | 5834.650000           | -0.7            | PASS   |

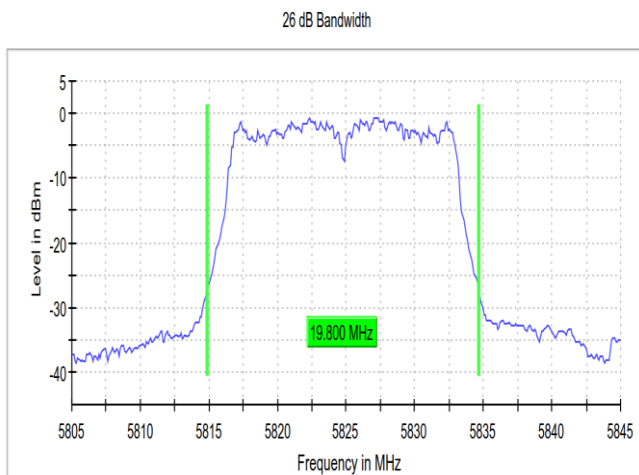


#### Measurement

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| Start Frequency       | 5.80500 GHz      | 5.80500 GHz    |
| Stop Frequency        | 5.84500 GHz      | 5.84500 GHz    |
| Span                  | 40.000 MHz       | 40.000 MHz     |
| RBW                   | 200.000 kHz      | ~ 200.000 kHz  |
| VBW                   | 1.000 MHz        | >= 600.000 kHz |
| SweepPoints           | 400              | ~ 400          |
| Sweeptime             | 28.477 $\mu$ s   | AUTO           |
| Reference Level       | -10.000 dBm      | -10.000 dBm    |
| Attenuation           | 10.000 dB        | AUTO           |
| Detector              | MaxPeak          | MaxPeak        |
| SweepCount            | 200              | 200            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| Sweeptype             | FFT              | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.30 dB          | 0.30 dB        |
| Run                   | 39 / max. 150    | max. 150       |
| Stable                | 5 / 5            | 5              |
| Max Stable Difference | 0.00 dB          | 0.30 dB        |

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Subband = U-NII-3 (S01\_AE01)

#### 26 dB Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Max Level (dBm) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|-----------------|--------|
| 5745.000000         | 20.200000       | --              | --              | 5734.750000          | 5754.950000           | -0.5            | PASS   |

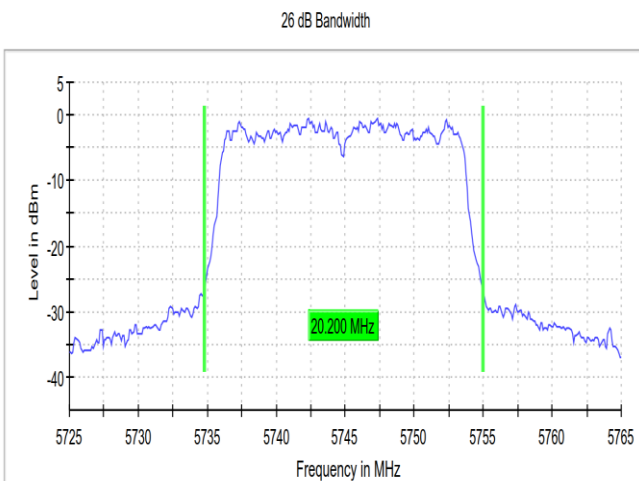

#### Measurement

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| Start Frequency       | 5.72500 GHz      | 5.72500 GHz    |
| Stop Frequency        | 5.76500 GHz      | 5.76500 GHz    |
| Span                  | 40.000 MHz       | 40.000 MHz     |
| RBW                   | 200.000 kHz      | ~ 200.000 kHz  |
| VBW                   | 1.000 MHz        | >= 600.000 kHz |
| SweepPoints           | 400              | ~ 400          |
| Sweeptime             | 28.477 $\mu$ s   | AUTO           |
| Reference Level       | 0.000 dBm        | 0.000 dBm      |
| Attenuation           | 20.000 dB        | AUTO           |
| Detector              | MaxPeak          | MaxPeak        |
| SweepCount            | 200              | 200            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| Sweeptype             | FFT              | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.30 dB          | 0.30 dB        |
| Run                   | 39 / max. 150    | max. 150       |
| Stable                | 5 / 5            | 5              |
| Max Stable Difference | 0.29 dB          | 0.30 dB        |

Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Subband = U-NII-3 (S01\_AE01)

### 26 dB Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Max Level (dBm) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|-----------------|--------|
| 5795.000000         | 40.825516       | ---             | ---             | 5774.136961          | 5814.962477           | -2.5            | PASS   |




### Measurement

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| Start Frequency       | 5.75500 GHz      | 5.75500 GHz    |
| Stop Frequency        | 5.83500 GHz      | 5.83500 GHz    |
| Span                  | 80.000 MHz       | 80.000 MHz     |
| RBW                   | 300.000 kHz      | ~ 400.000 kHz  |
| VBW                   | 1.000 MHz        | >= 900.000 kHz |
| SweepPoints           | 533              | ~ 533          |
| Sweeptime             | 31.621 $\mu$ s   | AUTO           |
| Reference Level       | -10.000 dBm      | -10.000 dBm    |
| Attenuation           | 10.000 dB        | AUTO           |
| Detector              | MaxPeak          | MaxPeak        |
| SweepCount            | 200              | 200            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| Sweeptype             | FFT              | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.30 dB          | 0.30 dB        |
| Run                   | 105 / max. 150   | max. 150       |
| Stable                | 5 / 5            | 5              |
| Max Stable Difference | 0.00 dB          | 0.30 dB        |

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-3 (S01\_AE01)

### 26 dB Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Max Level (dBm) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|-----------------|--------|
| 5775.000000         | 84.000000       | ---             | ---             | 5733.250000          | 5817.250000           | -6.3            | PASS   |

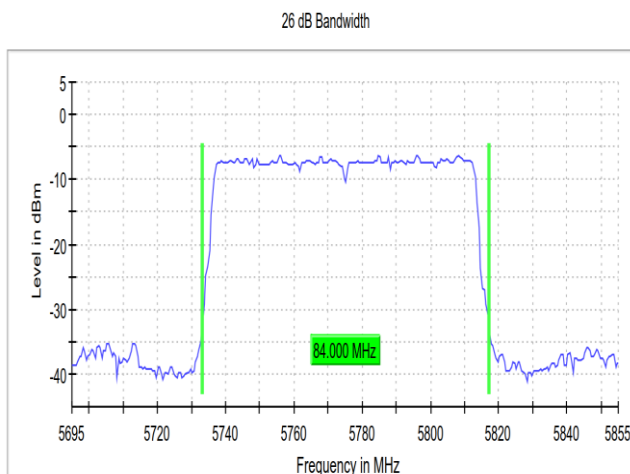

### Measurement

| Setting               | Instrument Value | Target Value  |
|-----------------------|------------------|---------------|
| Start Frequency       | 5.69500 GHz      | 5.69500 GHz   |
| Stop Frequency        | 5.85500 GHz      | 5.85500 GHz   |
| Span                  | 160.000 MHz      | 160.000 MHz   |
| RBW                   | 1.000 MHz        | ~ 800.000 kHz |
| VBW                   | 3.000 MHz        | >= 3.000 MHz  |
| SweepPoints           | 320              | ~ 320         |
| Sweeptime             | 22.875 $\mu$ s   | AUTO          |
| Reference Level       | -10.000 dBm      | -10.000 dBm   |
| Attenuation           | 10.000 dB        | AUTO          |
| Detector              | MaxPeak          | MaxPeak       |
| SweepCount            | 200              | 200           |
| Filter                | 3 dB             | 3 dB          |
| Trace Mode            | Max Hold         | Max Hold      |
| Sweeptype             | FFT              | AUTO          |
| Preamp                | off              | off           |
| Stablemode            | Trace            | Trace         |
| Stablevalue           | 0.30 dB          | 0.30 dB       |
| Run                   | 64 / max. 150    | max. 150      |
| Stable                | 5 / 5            | 5             |
| Max Stable Difference | 0.16 dB          | 0.30 dB       |

## 5.1.5 TEST EQUIPMENT USED

- R&S TS8997



## 5.2 6 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 5.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.


The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 40 / 80 / 160 / 320 MHz (for 20 / 40 / 80 / 160 MHz nominal bandwidth))
- Trace: Maxhold
- Sweeps: Until the trace is stable
- Sweeptime: Auto
- Detector: Peak

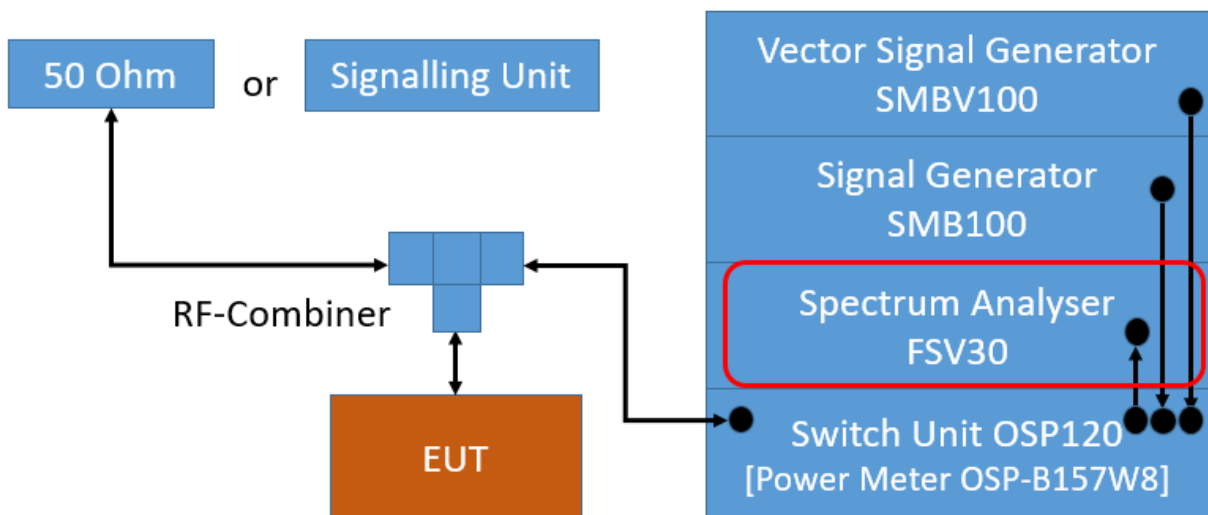

TS8997; Occupied Channel Bandwidth 6 dB / 26 dB / 99 %

## 5.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.407 (e)

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

## 5.2.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 990 hPa  
 Humidity: 43 %

| Radio Technology | Operating Frequency | 6 dB Bandwidth [MHz] | Limit [MHz] | Margin [MHz] | Min. 6 dB Frequency [MHz] | Max. 6 dB Frequency [MHz] |
|------------------|---------------------|----------------------|-------------|--------------|---------------------------|---------------------------|
| WLAN a           | low                 | 16.40                | 0.5         | 15.90        | 5736.63                   | 5753.03                   |
| WLAN a           | mid                 | 16.40                | 0.5         | 15.90        | 5776.63                   | 5793.03                   |
| WLAN a           | high                | 16.40                | 0.5         | 15.90        | 5816.63                   | 5833.03                   |
| WLAN n 20 MHz    | low                 | 17.65                | 0.5         | 17.15        | 5735.98                   | 5753.63                   |
| WLAN n 20 MHz    | mid                 | 17.65                | 0.5         | 17.15        | 5775.98                   | 5793.63                   |
| WLAN n 20 MHz    | high                | 17.65                | 0.5         | 17.15        | 5815.98                   | 5833.63                   |
| WLAN n 40 MHz    | low                 | 35.70                | 0.5         | 35.20        | 5737.03                   | 5772.73                   |
| WLAN n 40 MHz    | high                | 35.70                | 0.5         | 35.20        | 5777.03                   | 5812.73                   |
| WLAN ac 80 MHz   | mid                 | 76.40                | 0.5         | 75.90        | 5736.63                   | 5813.03                   |


Remark: Please see next sub-clause for the measurement plot.

## 5.2.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-3 (S01\_AE01)

### 6 dB Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Max Level (dBm) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|-----------------|--------|
| 5745.000000         | 16.400000       | 0.500000        | ---             | 5736.625000          | 5753.025000           | -1.5            | PASS   |

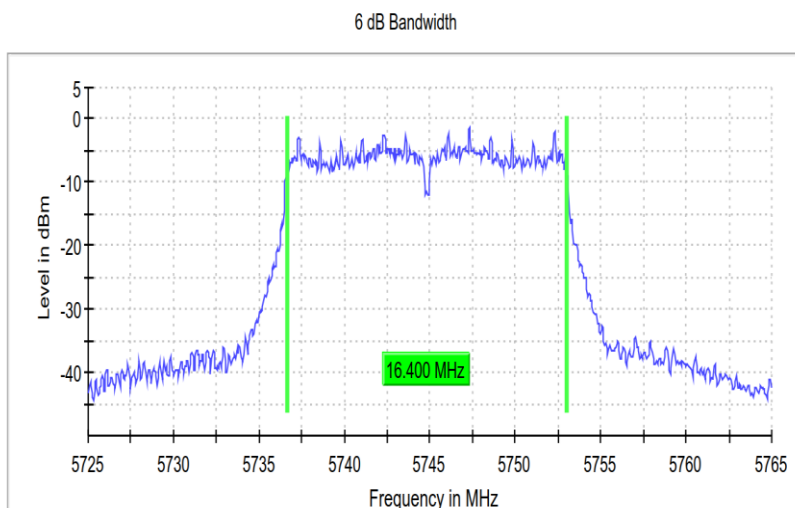


### Measurement

| Setting               | Instrument Value | Target Value  |
|-----------------------|------------------|---------------|
| Start Frequency       | 5.69500 GHz      | 5.69500 GHz   |
| Stop Frequency        | 5.85500 GHz      | 5.85500 GHz   |
| Span                  | 160.000 MHz      | 160.000 MHz   |
| RBW                   | 1.000 MHz        | ~ 800.000 kHz |
| VBW                   | 3.000 MHz        | >= 3.000 MHz  |
| SweepPoints           | 320              | ~ 320         |
| Sweeptime             | 22.875 µs        | AUTO          |
| Reference Level       | -10.000 dBm      | -10.000 dBm   |
| Attenuation           | 10.000 dB        | AUTO          |
| Detector              | MaxPeak          | MaxPeak       |
| SweepCount            | 200              | 200           |
| Filter                | 3 dB             | 3 dB          |
| Trace Mode            | Max Hold         | Max Hold      |
| SweepType             | FFT              | AUTO          |
| Preamp                | off              | off           |
| Stablemode            | Trace            | Trace         |
| Stablevalue           | 0.30 dB          | 0.30 dB       |
| Run                   | 64 / max. 150    | max. 150      |
| Stable                | 5 / 5            | 5             |
| Max Stable Difference | 0.16 dB          | 0.30 dB       |

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Subband = U-NII-3 (S01\_AE01)

### 6 dB Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Max Level (dBm) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|-----------------|--------|
| 5745.000000         | 17.650000       | 0.500000        | ---             | 5735.975000          | 5753.625000           | -1.5            | PASS   |

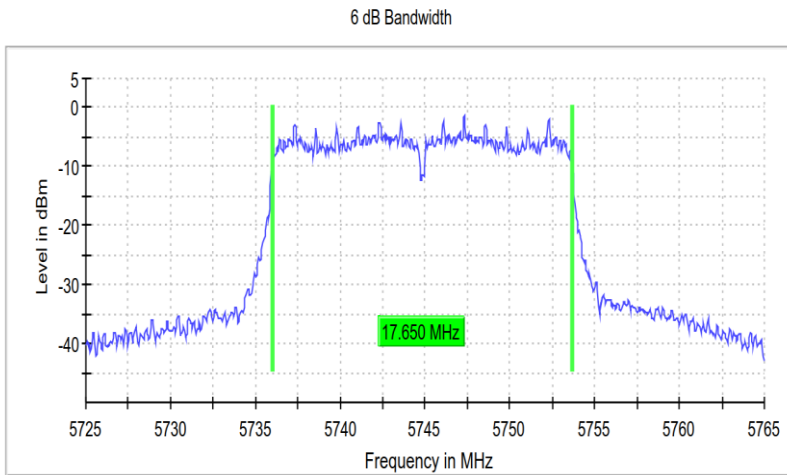


### Measurement

| Setting               | Instrument Value | Target Value  |
|-----------------------|------------------|---------------|
| Start Frequency       | 5.72500 GHz      | 5.72500 GHz   |
| Stop Frequency        | 5.76500 GHz      | 5.76500 GHz   |
| Span                  | 40.000 MHz       | 40.000 MHz    |
| RBW                   | 100.000 kHz      | ~ 100.000 kHz |
| VBW                   | 300.000 kHz      | ~ 300.000 kHz |
| SweepPoints           | 800              | ~ 800         |
| SweepTime             | 56.836 μs        | AUTO          |
| Reference Level       | -10.000 dBm      | -10.000 dBm   |
| Attenuation           | 10.000 dB        | AUTO          |
| Detector              | MaxPeak          | MaxPeak       |
| SweepCount            | 200              | 200           |
| Filter                | 3 dB             | 3 dB          |
| Trace Mode            | Max Hold         | Max Hold      |
| SweepType             | FFT              | AUTO          |
| Preamp                | off              | off           |
| Stablemode            | Trace            | Trace         |
| Stablevalue           | 0.30 dB          | 0.30 dB       |
| Run                   | 85 / max. 150    | max. 150      |
| Stable                | 5 / 5            | 5             |
| Max Stable Difference | 0.06 dB          | 0.30 dB       |

Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband = U-NII-3 (S01\_AE01)

### 6 dB Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Max Level (dBm) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|-----------------|--------|
| 5755.000000         | 35.700000       | 0.500000        | ---             | 5737.025000          | 5772.725000           | -5.4            | PASS   |

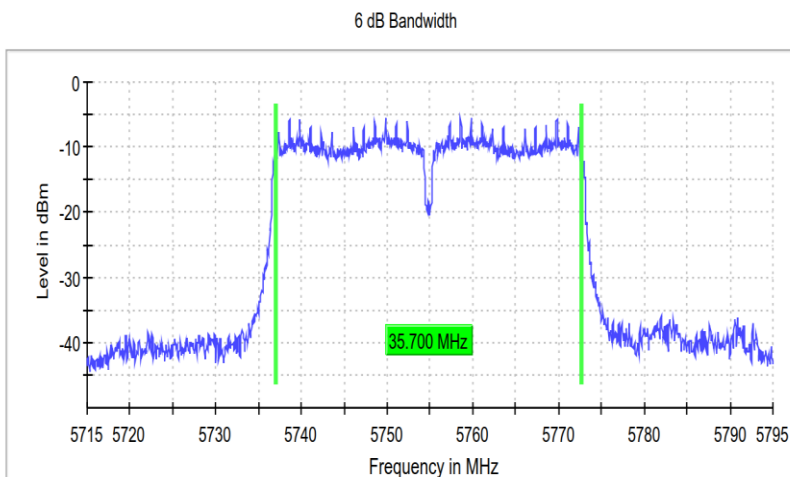


### Measurement

| Setting               | Instrument Value | Target Value  |
|-----------------------|------------------|---------------|
| Start Frequency       | 5.71500 GHz      | 5.71500 GHz   |
| Stop Frequency        | 5.79500 GHz      | 5.79500 GHz   |
| Span                  | 80.000 MHz       | 80.000 MHz    |
| RBW                   | 100.000 kHz      | ~ 100.000 kHz |
| VBW                   | 300.000 kHz      | ~ 300.000 kHz |
| SweepPoints           | 1600             | ~ 1600        |
| SweepTime             | 94.727 μs        | AUTO          |
| Reference Level       | -10.000 dBm      | -10.000 dBm   |
| Attenuation           | 10.000 dB        | AUTO          |
| Detector              | MaxPeak          | MaxPeak       |
| SweepCount            | 200              | 200           |
| Filter                | 3 dB             | 3 dB          |
| Trace Mode            | Max Hold         | Max Hold      |
| SweepType             | FFT              | AUTO          |
| Preamp                | off              | off           |
| Stablemode            | Trace            | Trace         |
| Stablevalue           | 0.30 dB          | 0.30 dB       |
| Run                   | 81 / max. 150    | max. 150      |
| Stable                | 5 / 5            | 5             |
| Max Stable Difference | 0.29 dB          | 0.30 dB       |

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-3 (S01\_AE01)

### 6 dB Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Max Level (dBm) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|-----------------|--------|
| 5775.000000         | 76.400000       | 0.500000        | --              | 5736.625000          | 5813.025000           | -13.9           | PASS   |

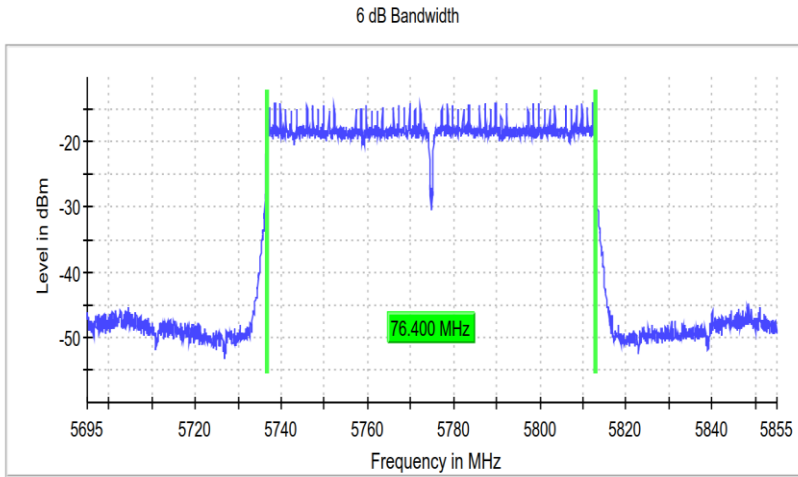

### Measurement

| Setting               | Instrument Value | Target Value  |
|-----------------------|------------------|---------------|
| Start Frequency       | 5.69500 GHz      | 5.69500 GHz   |
| Stop Frequency        | 5.85500 GHz      | 5.85500 GHz   |
| Span                  | 160.000 MHz      | 160.000 MHz   |
| RBW                   | 100.000 kHz      | ~ 100.000 kHz |
| VBW                   | 300.000 kHz      | ~ 300.000 kHz |
| SweepPoints           | 3200             | ~ 3200        |
| Sweeptime             | 189.453 $\mu$ s  | AUTO          |
| Reference Level       | -10.000 dBm      | -10.000 dBm   |
| Attenuation           | 10.000 dB        | AUTO          |
| Detector              | MaxPeak          | MaxPeak       |
| SweepCount            | 200              | 200           |
| Filter                | 3 dB             | 3 dB          |
| Trace Mode            | Max Hold         | Max Hold      |
| SweepType             | FFT              | AUTO          |
| Preamp                | off              | off           |
| Stablemode            | Trace            | Trace         |
| Stablevalue           | 0.30 dB          | 0.30 dB       |
| Run                   | 82 / max. 150    | max. 150      |
| Stable                | 5 / 5            | 5             |
| Max Stable Difference | 0.00 dB          | 0.30 dB       |

## 5.2.5 TEST EQUIPMENT USED

- R&S TS8997

### 5.3 99 % BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

#### 5.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.


The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyzer settings:

- Resolution Bandwidth (RBW): approx.  $\geq 1\%$  of the span, but not below
- Video Bandwidth (VBW):  $\geq 3$  times the RBW
- Span: 40 / 80 / 160 / 320 MHz (for 20 / 40 / 80 / 160 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: Until the trace is stable
- Sweeptime: Auto
- Detector: Peak

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

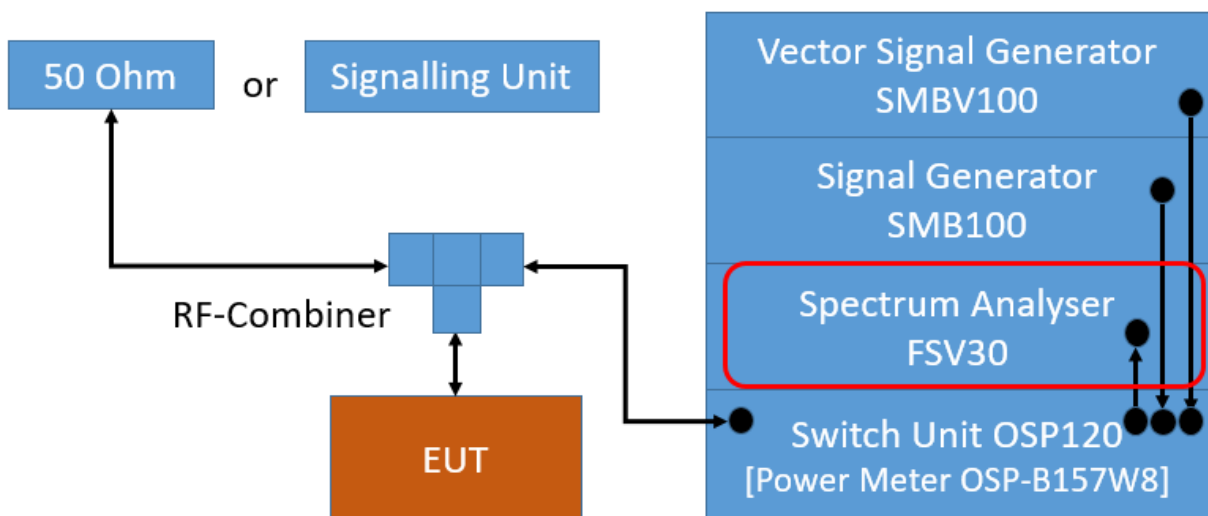

TS8997; Occupied Channel Bandwidth 6 dB / 26 dB / 99 %

### 5.3.2 TEST REQUIREMENTS / LIMITS

No applicable limit:

### 5.3.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 990 hPa  
 Humidity: 43 %

| Radio Technology | Operating Frequency | Subband | 99% Bandwidth [MHz] |
|------------------|---------------------|---------|---------------------|
| WLAN a           | low                 | U-NII-3 | 16.6                |
| WLAN a           | mid                 | U-NII-3 | 16.6                |
| WLAN a           | high                | U-NII-3 | 16.6                |
| WLAN n 20 MHz    | low                 | U-NII-3 | 17.7                |
| WLAN n 20 MHz    | mid                 | U-NII-3 | 17.8                |
| WLAN n 20 MHz    | high                | U-NII-3 | 17.8                |
| WLAN n 40 MHz    | low                 | U-NII-3 | 36.5                |
| WLAN n 40 MHz    | high                | U-NII-3 | 36.5                |
| WLAN ac 80 MHz   | mid                 | U-NII-3 | 77.0                |


Remark: Please see next sub-clause for the measurement plot.

### 5.3.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-3 (S01\_AE01)

#### 99 % Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|--------|
| 5745.000000         | 16.600000       | ---             | ---             | 5736.550000          | 5753.150000           | PASS   |

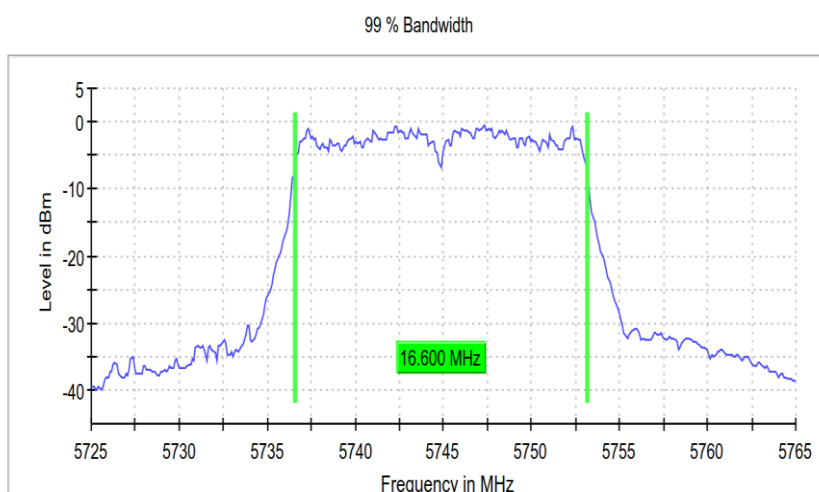


#### Measurement

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| Start Frequency       | 5.72500 GHz      | 5.72500 GHz    |
| Stop Frequency        | 5.76500 GHz      | 5.76500 GHz    |
| Span                  | 40.000 MHz       | 40.000 MHz     |
| RBW                   | 200.000 kHz      | >= 200.000 kHz |
| VBW                   | 1.000 MHz        | >= 600.000 kHz |
| SweepPoints           | 400              | ~ 400          |
| SweepTime             | 28.477 μs        | AUTO           |
| Reference Level       | -10.000 dBm      | -10.000 dBm    |
| Attenuation           | 10.000 dB        | AUTO           |
| Detector              | MaxPeak          | MaxPeak        |
| SweepCount            | 200              |                |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| SweepType             | FFT              | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.30 dB          | 0.30 dB        |
| Run                   | 49 / max. 150    | max. 150       |
| Stable                | 5 / 5            | 5              |
| Max Stable Difference | 0.03 dB          | 0.30 dB        |

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Subband = U-NII-3 (S01\_AE01)

**99 % Bandwidth**

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|--------|
| 5745.000000         | 17.700000       | ---             | ---             | 5735.950000          | 5753.650000           | PASS   |

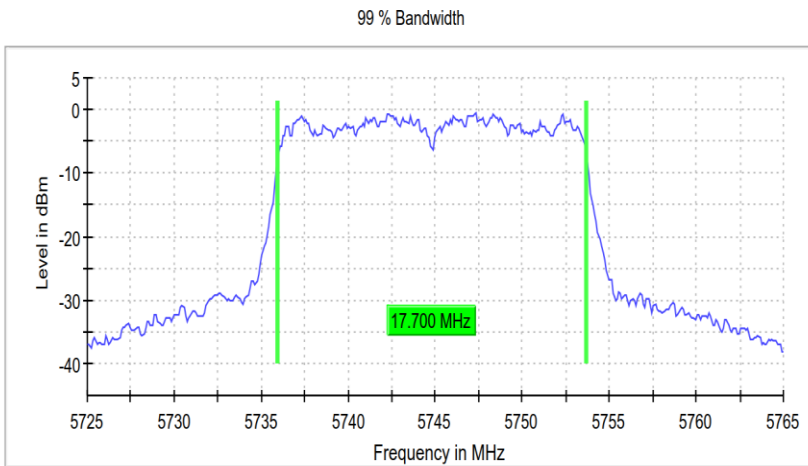


**Measurement**

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| Start Frequency       | 5.72500 GHz      | 5.72500 GHz    |
| Stop Frequency        | 5.76500 GHz      | 5.76500 GHz    |
| Span                  | 40.000 MHz       | 40.000 MHz     |
| RBW                   | 200.000 kHz      | >= 200.000 kHz |
| VBW                   | 1.000 MHz        | >= 600.000 kHz |
| SweepPoints           | 400              | ~ 400          |
| SweepTime             | 28.477 μs        | AUTO           |
| Reference Level       | -10.000 dBm      | -10.000 dBm    |
| Attenuation           | 10.000 dB        | AUTO           |
| Detector              | MaxPeak          | MaxPeak        |
| SweepCount            | 200              | 200            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| SweepType             | FFT              | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.30 dB          | 0.30 dB        |
| Run                   | 66 / max. 150    | max. 150       |
| Stable                | 5 / 5            | 5              |
| Max Stable Difference | 0.03 dB          | 0.30 dB        |

Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband = U-NII-3 (S01\_AE01)

**99 % Bandwidth**

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|--------|
| 5755.000000         | 36.500000       | ---             | ---             | 5736.625000          | 5773.125000           | PASS   |

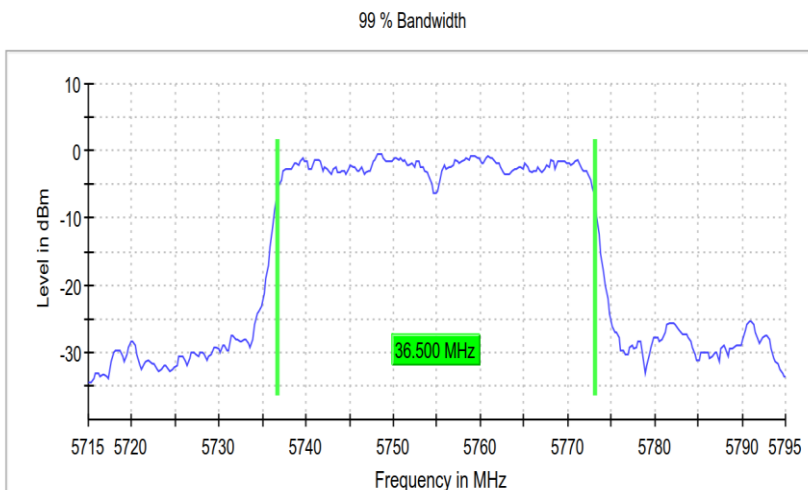


**Measurement**

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| Start Frequency       | 5.71500 GHz      | 5.71500 GHz    |
| Stop Frequency        | 5.79500 GHz      | 5.79500 GHz    |
| Span                  | 80.000 MHz       | 80.000 MHz     |
| RBW                   | 500.000 kHz      | >= 400.000 kHz |
| VBW                   | 2.000 MHz        | >= 1.500 MHz   |
| SweepPoints           | 320              | ~ 320          |
| SweepTime             | 18.906 μs        | AUTO           |
| Reference Level       | -10.000 dBm      | -10.000 dBm    |
| Attenuation           | 10.000 dB        | AUTO           |
| Detector              | MaxPeak          | MaxPeak        |
| SweepCount            | 200              | 200            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| SweepType             | FFT              | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.30 dB          | 0.30 dB        |
| Run                   | 79 / max. 150    | max. 150       |
| Stable                | 5 / 5            | 5              |
| Max Stable Difference | 0.00 dB          | 0.30 dB        |

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-3 (S01\_AE01)

### 99 % Bandwidth

| DUT Frequency (MHz) | Bandwidth (MHz) | Limit Min (MHz) | Limit Max (MHz) | Band Edge Left (MHz) | Band Edge Right (MHz) | Result |
|---------------------|-----------------|-----------------|-----------------|----------------------|-----------------------|--------|
| 5775.000000         | 77.000000       | ---             | ---             | 5736.250000          | 5813.250000           | PASS   |

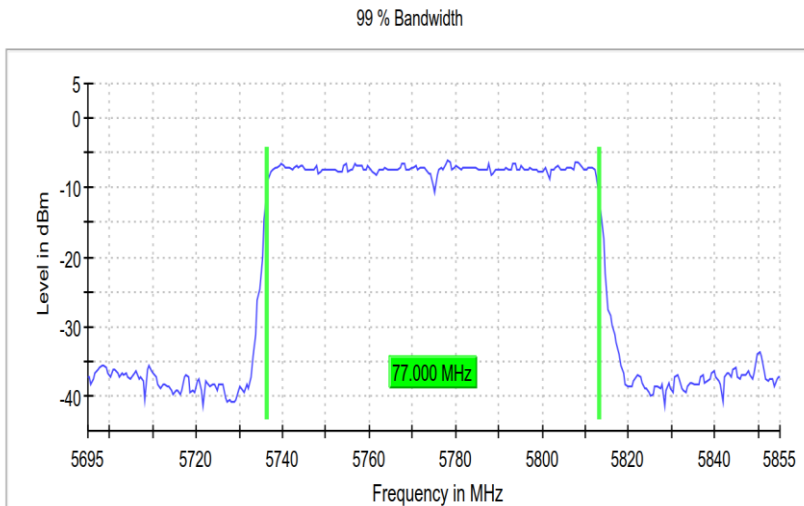

### Measurement

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| Start Frequency       | 5.69500 GHz      | 5.69500 GHz    |
| Stop Frequency        | 5.85500 GHz      | 5.85500 GHz    |
| Span                  | 160.000 MHz      | 160.000 MHz    |
| RBW                   | 1.000 MHz        | >= 800.000 kHz |
| VBW                   | 3.000 MHz        | >= 3.000 MHz   |
| SweepPoints           | 320              | ~ 320          |
| Sweeptime             | 22.875 $\mu$ s   | AUTO           |
| Reference Level       | -10.000 dBm      | -10.000 dBm    |
| Attenuation           | 10.000 dB        | AUTO           |
| Detector              | MaxPeak          | MaxPeak        |
| SweepCount            | 200              | 200            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| Sweeptype             | FFT              | AUTO           |
| Preamplifier          | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.30 dB          | 0.30 dB        |
| Run                   | 67 / max. 150    | max. 150       |
| Stable                | 5 / 5            | 5              |
| Max Stable Difference | 0.07 dB          | 0.30 dB        |

### 5.3.5 TEST EQUIPMENT USED

- R&S TS8997



## 5.4 MAXIMUM CONDUCTED OUTPUT POWER

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 5.4.1 TEST DESCRIPTION


The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power

The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.


The OSP-B157W is a gated RF average power meter with a signal bandwidth > 300 MHz.

Note:

The measurement was performed according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **PM-G**.

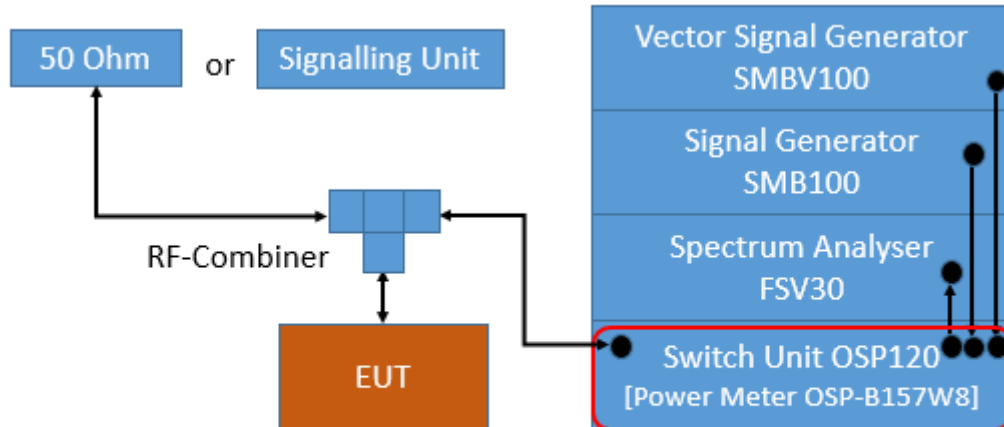

TS8997; Maximum Conducted Output Power

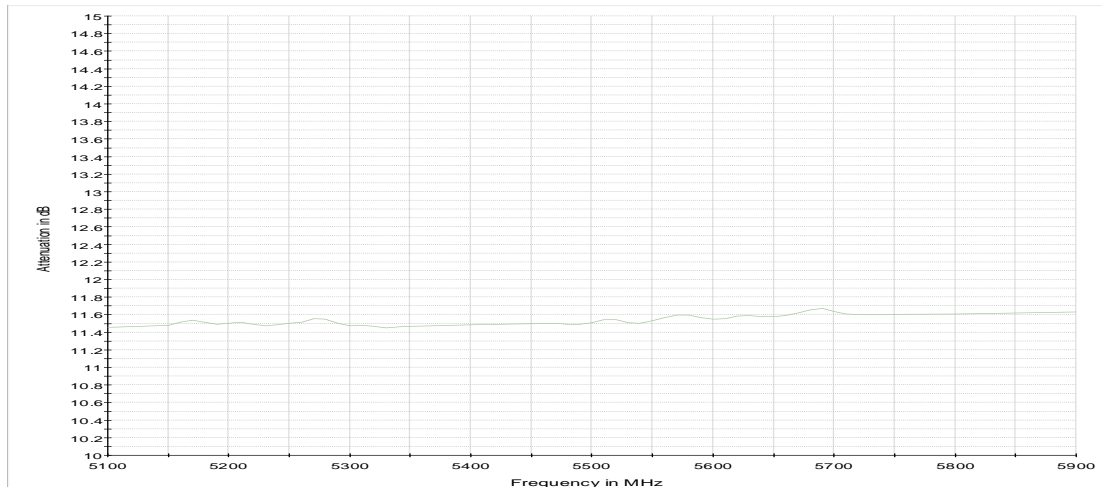

Attenuation of measurement path

## 5.4.2 TEST REQUIREMENTS / LIMITS

### A) FCC

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

§15.407 (a) (1)

Limit: 50 mW (17 dBm) or 4 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 (“new rules”):

§15.407 (a) (1) (i): Outdoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

§15.407 (a) (1) (ii): Indoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

§15.407 (a) (1) (iv): Mobile and portable client devices:

Limit: 250 mW (24 dBm) provided the maximum antenna gain does not exceed 6 dBi.

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

§15.407 (a) (2)

Limit: 250 mW (24 dBm) or 11 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

§15.407 (a) (3)

Limit: 1 W (30 dBm) or 17 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 (“new rules”):

§15.407 (a) (3):

Limit: 1 W (30 dBm).

§15.407 (a) (4):

The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

## **B) IC**

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:

Limit (e.i.r.p.): 200 mW (23 dBm) or  $10 + 10 \log_{10} B$  [dBm], whichever power is less.

B is the 99% emission bandwidth in MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or  $11 + 10 \log_{10} B$  [dBm], whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or  $17 + 10 \log_{10} B$  [dBm], whichever power is less.

Note: For EUTs operating at a higher e.i.r.p. than 200 mW (23 dBm), compliance with the e.i.r.p. elevation mask is required.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or  $11 + 10 \log_{10} B$  [dBm], whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or  $17 + 10 \log_{10} B$  [dBm], whichever power is less.

RSS-247, 6.2.4 (1), Band 5725-5825 MHz:

Limits:

Maximum conducted Power: 1W (30 dBm) or  $17 + 10 \log_{10} B$  [dBm], whichever power is less.

e.i.r.p.: 4.0 W (36 dBm) or  $23 + 10 \log_{10} B$  [dBm], whichever power is less.

All frequency bands: B is the 99% emission bandwidth in MHz.

### 5.4.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 990 hPa  
 Humidity: 43 %  
 WLAN a-Mode; 20 MHz; 6 Mbit/s

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | FCC Cond. Limit [dBm] | Margin [dB] | IC Cond. Limit [dBm] | Margin [dB] | IC EIRP Limit [dBm] | Margin [dB] |
|---------------|---------|-------------|-------------------|------------|-----------------------|-------------|----------------------|-------------|---------------------|-------------|
| 3             | 149     | 5745        | 9.4               | 12.9       | 30.0                  | 20.6        | 30.0                 | 20.6        | 36.0                | 23.1        |
|               | 157     | 5785        | 9.2               | 12.7       | 30.0                  | 20.8        | 30.0                 | 20.8        | 36.0                | 23.3        |
|               | 165     | 5825        | 9.1               | 12.6       | 30.0                  | 20.9        | 30.0                 | 20.9        | 36.0                | 23.4        |

WLAN n-Mode; 20 MHz; MCS0; SISO

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | FCC Cond. Limit [dBm] | Margin [dB] | IC Cond. Limit [dBm] | Margin [dB] | IC EIRP Limit [dBm] | Margin [dB] |
|---------------|---------|-------------|-------------------|------------|-----------------------|-------------|----------------------|-------------|---------------------|-------------|
| 3             | 149     | 5745        | 9.4               | 12.9       | 30.0                  | 20.6        | 30.0                 | 20.6        | 36.0                | 23.1        |
|               | 157     | 5785        | 9.5               | 13.0       | 30.0                  | 20.5        | 30.0                 | 20.5        | 36.0                | 23.0        |
|               | 165     | 5825        | 9.0               | 12.5       | 30.0                  | 21.0        | 30.0                 | 21.0        | 36.0                | 23.5        |

WLAN n-Mode; 40 MHz; MCS0; SISO

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | FCC Cond. Limit [dBm] | Margin [dB] | IC Cond. Limit [dBm] | Margin [dB] | IC EIRP Limit [dBm] | Margin [dB] |
|---------------|---------|-------------|-------------------|------------|-----------------------|-------------|----------------------|-------------|---------------------|-------------|
| 3             | 151     | 5755        | 8.5               | 12.0       | 30.0                  | 21.5        | 30.0                 | 21.5        | 36.0                | 24.0        |
|               | 159     | 5795        | 8.4               | 11.9       | 30.0                  | 21.6        | 30.0                 | 21.6        | 36.0                | 24.1        |

WLAN ac-Mode; 80 MHz; MCS8; SISO

| U-NII-Subband | Ch. No. | Freq. [MHz] | Cond. Power [dBm] | EIRP [dBm] | FCC Cond. Limit [dBm] | Margin [dB] | IC Cond. Limit [dBm] | Margin [dB] | IC EIRP Limit [dBm] | Margin [dB] |
|---------------|---------|-------------|-------------------|------------|-----------------------|-------------|----------------------|-------------|---------------------|-------------|
| 3             | 155     | 5775        | 2.9               | 6.4        | 30.0                  | 27.1        | 30.0                 | 27.1        | 36.0                | 29.6        |

Remark: Please see next sub-clause for the measurement plot.


#### 5.4.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-3 (S01\_AE01)

##### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5745.000000         | 9.4             | 30.0            | 9.4              | 96.170        | PASS   |

Gated Trace

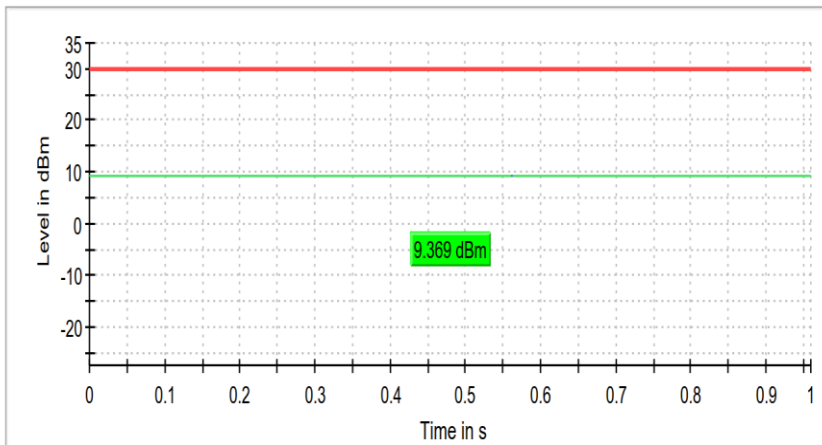

— Gated Trace — Overall — Limit

##### OSP PowerMeter settings


| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid, Subband = U-NII-3 (S01\_AE01)

##### Result

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5785.000000         | 9.5             | 30.0            | 9.5              | 95.919        | PASS   |

Gated Trace

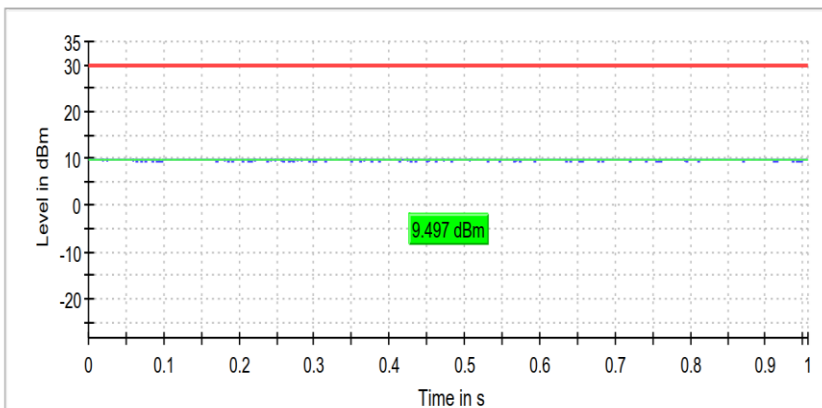

— Gated Trace — Overall — Limit


##### OSP PowerMeter settings

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |

Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Subband = U-NII-3 (S01\_AE01)

**Result**

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5755.000000         | 8.5             | 30.0            | 8.5              | 92.115        | PASS   |

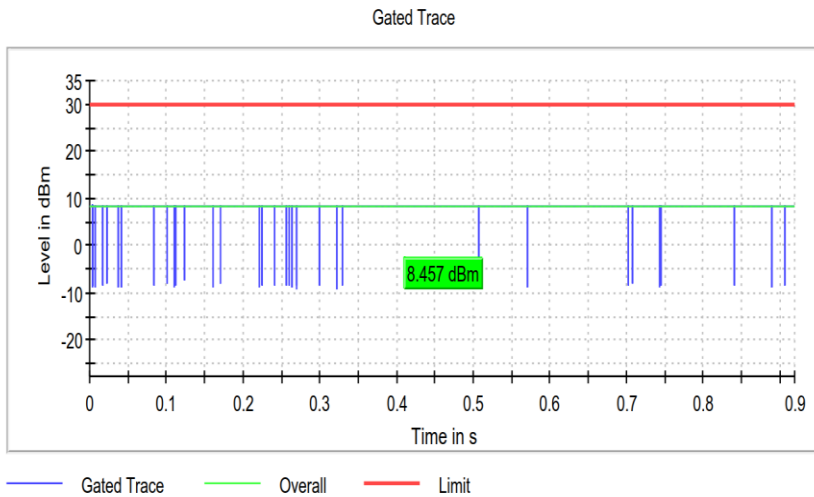


**OSP PowerMeter settings**

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-3 (S01\_AE01)

**Result**

| DUT Frequency (MHz) | Gated RMS (dBm) | Limit Max (dBm) | Gated EIRP (dBm) | DutyCycle (%) | Result |
|---------------------|-----------------|-----------------|------------------|---------------|--------|
| 5775.000000         | 2.9             | 30.0            | 2.9              | 85.386        | PASS   |

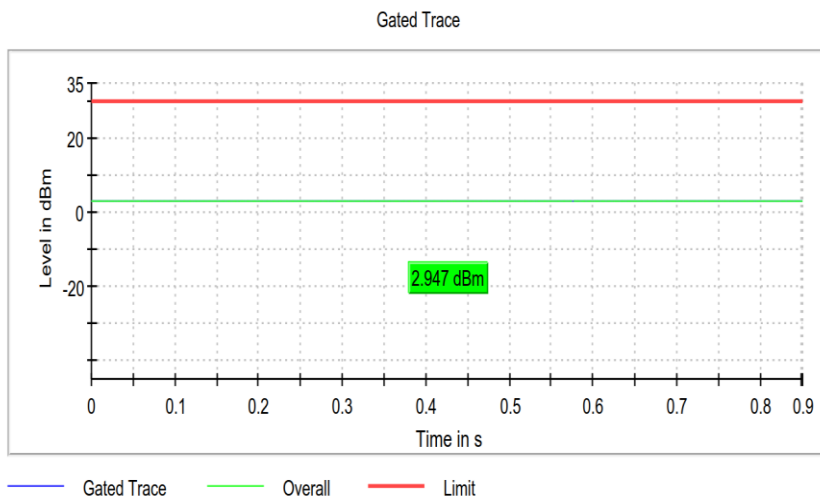

**OSP PowerMeter settings**

| Setting          | Instrument Value | Target Value  |
|------------------|------------------|---------------|
| Measurement Time | 1.000 s          | 1.000 s       |
| Points           | 1000000          | 1000000       |
| Time resolution  | 1.000 $\mu$ s    | 1.000 $\mu$ s |

**5.4.5 TEST EQUIPMENT USED**

- R&S TS8997

## 5.5 PEAK POWER SPECTRAL DENSITY

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 5.5.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Maximum Power Spectral Density measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power.


The EUT was connected to the test system as described in the block diagram below. The complete attenuation of the measurement path is known and considered.

Analyzer settings:


- Resolution Bandwidth (RBW): 1 MHz (for subband 3: 500 kHz)
- Video Bandwidth (VBW): 3 MHz (for subband 3: 2 MHz)
- Trace: Average, RMS power averaging mode
- Sweeps: 100
- Sweep time: 5 ms
- Detector: RMS
- Trigger: gated mode

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **SA-3**.

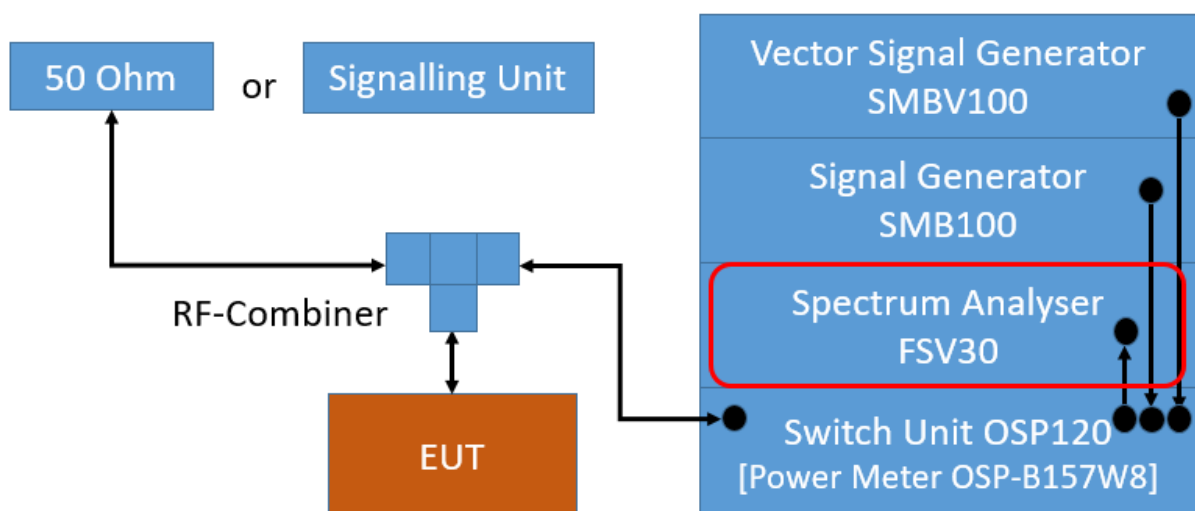

TS8997; Maximum Power Spectral Density

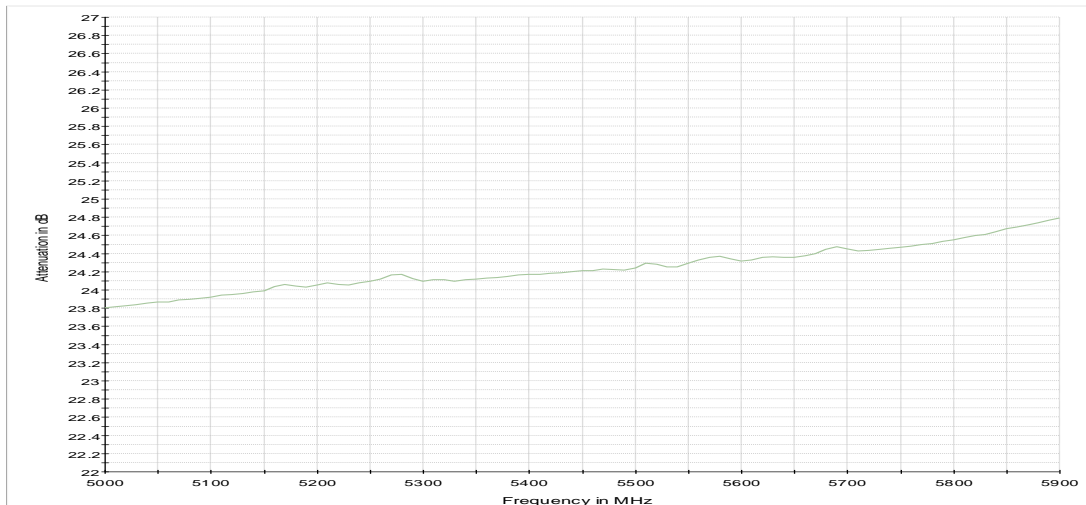

Attenuation of the measurement path

## 5.5.2 TEST REQUIREMENTS / LIMITS

### A) FCC

FCC Part 15, Subpart E, §15.407 (a) (1)

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

(i) and (ii), outdoor and indoor access points: Limit: 17 dBm/MHz.

(iv), mobile and portable client devices: Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (3)

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

Limit: 30 dBm/500 kHz.

Note: The limit will be also fulfilled when measuring at any bandwidth greater than 500 kHz.

This applies to signals where the maximum conducted output power was measured at a bandwidth exceeding 500 kHz and which fulfil that limit of 30 dBm.

### B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:

Limit (e.i.r.p.): 10 dBm/MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:

Limit: 11 dBm/MHz.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:

Limit: 11 dBm/MHz.

RSS-247, 6.2.4 (1), Band 5725-5850 MHz:

Limit: 30 dBm/500 kHz.



### 5.5.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 990 hPa  
 Humidity: 43 %  
 WLAN a-Mode; 20 MHz; 6 Mbit/s

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|--------------|
| 3             | 149     | 5745        | -4.8           | 30.0                | 34.8        | 30.0               | 34.8        |              |
|               | 157     | 5785        | -5.0           | 30.0                | 35.0        | 30.0               | 35.0        |              |
|               | 165     | 5825        | -4.9           | 30.0                | 34.9        | 30.0               | 34.9        |              |

WLAN n-Mode; 20 MHz; MCS0; SISO

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|--------------|
| 3             | 149     | 5745        | -5.0           | 30.0                | 35.0        | 30.0               | 35.0        |              |
|               | 157     | 5785        | -4.9           | 30.0                | 34.9        | 30.0               | 34.9        |              |
|               | 165     | 5825        | -4.9           | 30.0                | 34.9        | 30.0               | 34.9        |              |

WLAN n-Mode; 40 MHz; MCS0; SISO

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|--------------|
| 3             | 151     | 5755        | -4.8           | 30.0                | 34.8        | 30.0               | 34.8        |              |
|               | 159     | 5795        | -5.1           | 30.0                | 35.1        | 30.0               | 35.1        |              |

WLAN ac-Mode; 80 MHz; MCS8; SISO

| U-NII-Subband | Ch. No. | Freq. [MHz] | MPSD [dBm/MHz] | FCC Limit [dBm/MHz] | Margin [dB] | IC Limit [dBm/MHz] | Margin [dB] | IC EIRP MPSD |
|---------------|---------|-------------|----------------|---------------------|-------------|--------------------|-------------|--------------|
| 3             | 155     | 5775        | -13.1          | 30.0                | 43.1        | 30.0               | 43.1        |              |

Remark: Please see next sub-clause for the measurement plot.

### 5.5.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-3 (S01\_AE01)

#### Result

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 5745.000000         | 5747.178218     | -4.768    | 30.0            | PASS   |

#### Ports

| Port | Duty Cycle (%) |
|------|----------------|
| 1    | 0.000          |

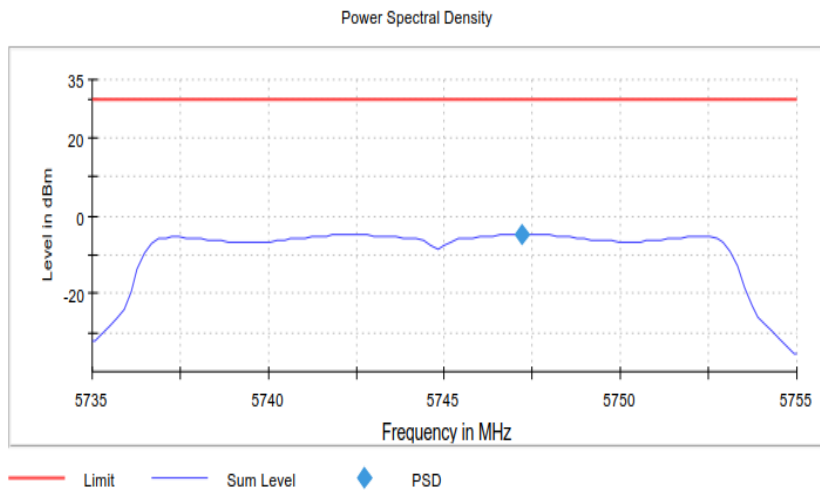

#### Measurement

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| Start Frequency       | 5.73500 GHz      | 5.73500 GHz    |
| Stop Frequency        | 5.75500 GHz      | 5.75500 GHz    |
| Span                  | 20.000 MHz       | 20.000 MHz     |
| RBW                   | 500.000 kHz      | <= 500.000 kHz |
| VBW                   | 2.000 MHz        | >= 1.500 MHz   |
| SweepPoints           | 101              | ~ 80           |
| SweepTime             | 505.000 ms       | 505.000 ms     |
| Reference Level       | -10.000 dBm      | -10.000 dBm    |
| Attenuation           | 10.000 dB        | AUTO           |
| Detector              | RMS              | RMS            |
| SweepCount            | 119              | 119            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| SweepType             | Sweep            | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.30 dB          | 0.30 dB        |
| Run                   | 4 / max. 15      | max. 15        |
| Stable                | 3 / 3            | 3              |
| Max Stable Difference | 0.04 dB          | 0.30 dB        |


Radio Technology = WLAN n 20 MHz, Operating Frequency = mid, Subband = U-NII-3 (S01\_AE01)

### Result

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 5785.000000         | 5787.376238     | -4.920    | 30.0            | PASS   |

### Ports

| Port | Duty Cycle (%) |
|------|----------------|
| 1    | 0.000          |

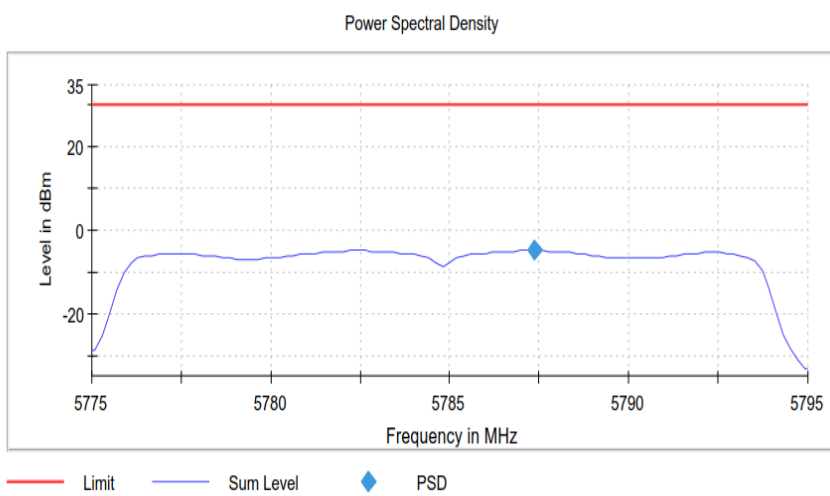

### Measurement

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| Start Frequency       | 5.77500 GHz      | 5.77500 GHz    |
| Stop Frequency        | 5.79500 GHz      | 5.79500 GHz    |
| Span                  | 20.000 MHz       | 20.000 MHz     |
| RBW                   | 500.000 kHz      | <= 500.000 kHz |
| VBW                   | 2.000 MHz        | >= 1.500 MHz   |
| SweepPoints           | 101              | ~ 80           |
| Sweeptime             | 505.000 ms       | 505.000 ms     |
| Reference Level       | -10.000 dBm      | -10.000 dBm    |
| Attenuation           | 10.000 dB        | AUTO           |
| Detector              | RMS              | RMS            |
| SweepCount            | 119              | 119            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| Sweeptype             | Sweep            | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.30 dB          | 0.30 dB        |
| Run                   | 4 / max. 15      | max. 15        |
| Stable                | 3 / 3            | 3              |
| Max Stable Difference | 0.02 dB          | 0.30 dB        |


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband = U-NII-3 (S01\_AE01)

### Result

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 5755.000000         | 5769.625000     | -4.771    | 30.0            | PASS   |

### Ports

| Port | Duty Cycle (%) |
|------|----------------|
| 1    | 0.000          |

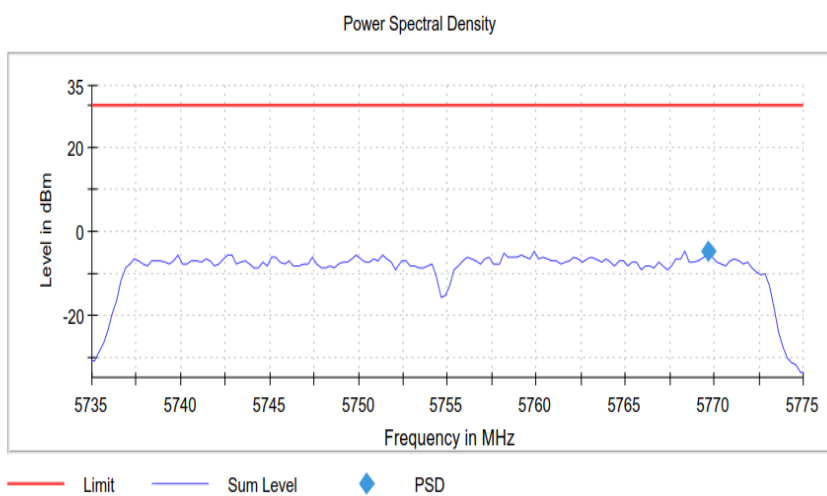

### Measurement

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| Start Frequency       | 5.73500 GHz      | 5.73500 GHz    |
| Stop Frequency        | 5.77500 GHz      | 5.77500 GHz    |
| Span                  | 40.000 MHz       | 40.000 MHz     |
| RBW                   | 500.000 kHz      | <= 500.000 kHz |
| VBW                   | 2.000 MHz        | >= 1.500 MHz   |
| SweepPoints           | 160              | ~ 160          |
| Sweeptime             | 16.000 $\mu$ s   | 16.000 $\mu$ s |
| Reference Level       | -10.000 dBm      | -10.000 dBm    |
| Attenuation           | 10.000 dB        | AUTO           |
| Detector              | RMS              | RMS            |
| SweepCount            | 0                | 3750001        |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| Sweeptype             | FFT              | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.30 dB          | 0.30 dB        |
| Run                   | 15 / max. 15     | max. 15        |
| Stable                | 3 / 3            | 3              |
| Max Stable Difference | 0.00 dB          | 0.30 dB        |


Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-3 (S01\_AE01)

### Result

| DUT Frequency (MHz) | Frequency (MHz) | PSD (dBm) | Limit Max (dBm) | Result |
|---------------------|-----------------|-----------|-----------------|--------|
| 5775.000000         | 5795.125000     | -13.130   | 30.0            | PASS   |

### Ports

| Port | Duty Cycle (%) |
|------|----------------|
| 1    | 0.000          |

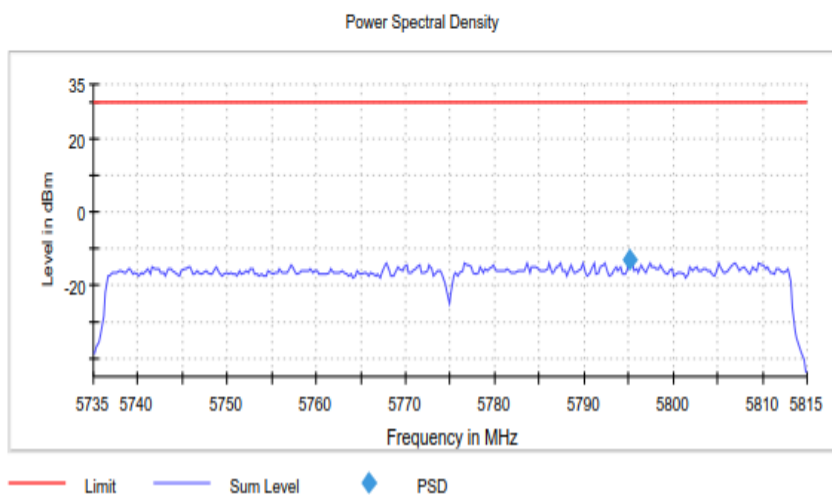

### Measurement

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| Start Frequency       | 5.73500 GHz      | 5.73500 GHz    |
| Stop Frequency        | 5.81500 GHz      | 5.81500 GHz    |
| Span                  | 80.000 MHz       | 80.000 MHz     |
| RBW                   | 500.000 kHz      | <= 500.000 kHz |
| VBW                   | 2.000 MHz        | >= 1.500 MHz   |
| SweepPoints           | 320              | ~ 320          |
| Sweeptime             | 32.000 us        | 32.000 us      |
| Reference Level       | -10.000 dBm      | -10.000 dBm    |
| Attenuation           | 10.000 dB        | AUTO           |
| Detector              | RMS              | RMS            |
| SweepCount            | 0                | 1875001        |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| SweepType             | FFT              | AUTO           |
| Preamplifier          | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.30 dB          | 0.30 dB        |
| Run                   | 15 / max. 15     | max. 15        |
| Stable                | 3 / 3            | 3              |
| Max Stable Difference | 0.00 dB          | 0.30 dB        |

## 5.5.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.6 UNDESIRABLE EMISSIONS; GENERAL FIELD STRENGTH LIMITS

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 5.6.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapters of ANSI C63.10:


- < 30 MHz: Chapter 6.4
- 30 MHz – 1 GHz: Chapter 6.5
- > 1 GHz: Chapter 6.6 (procedure according 6.6.5 used)

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered.

#### **Below 1 GHz:**

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

#### **1. Measurement up to 30 MHz**

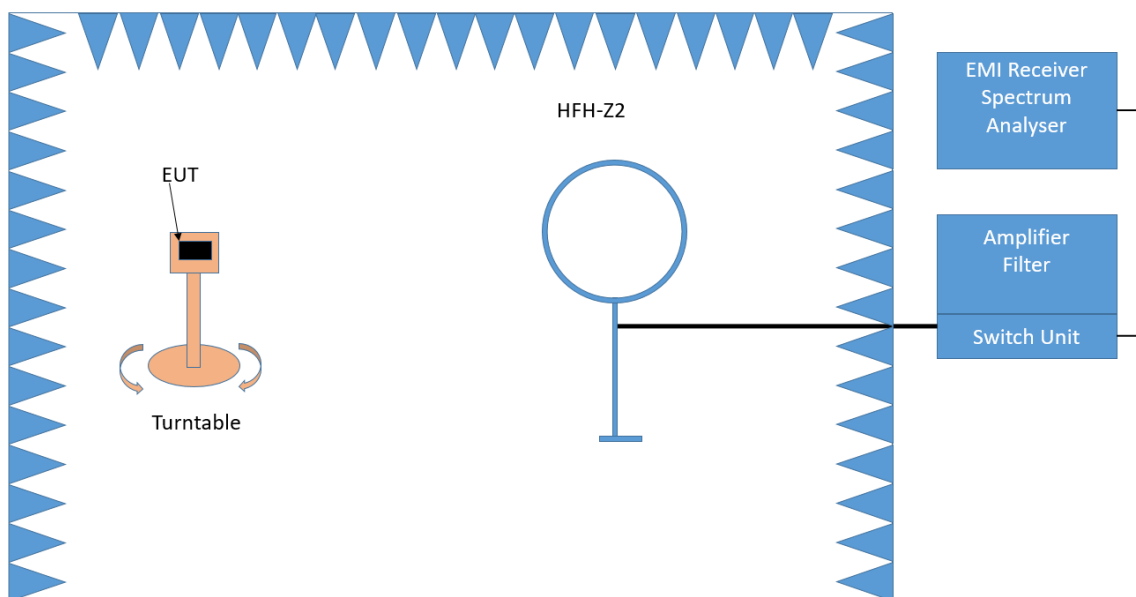

Test Setup; Spurious Emission Radiated (SAC), 9 kHz – 30 MHz

The Loop antenna HFH2-Z2 is used.

**Step 1: pre measurement**

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)


Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

**Step 2: final measurement**

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

**2. Measurement above 30 MHz and up to 1 GHz**

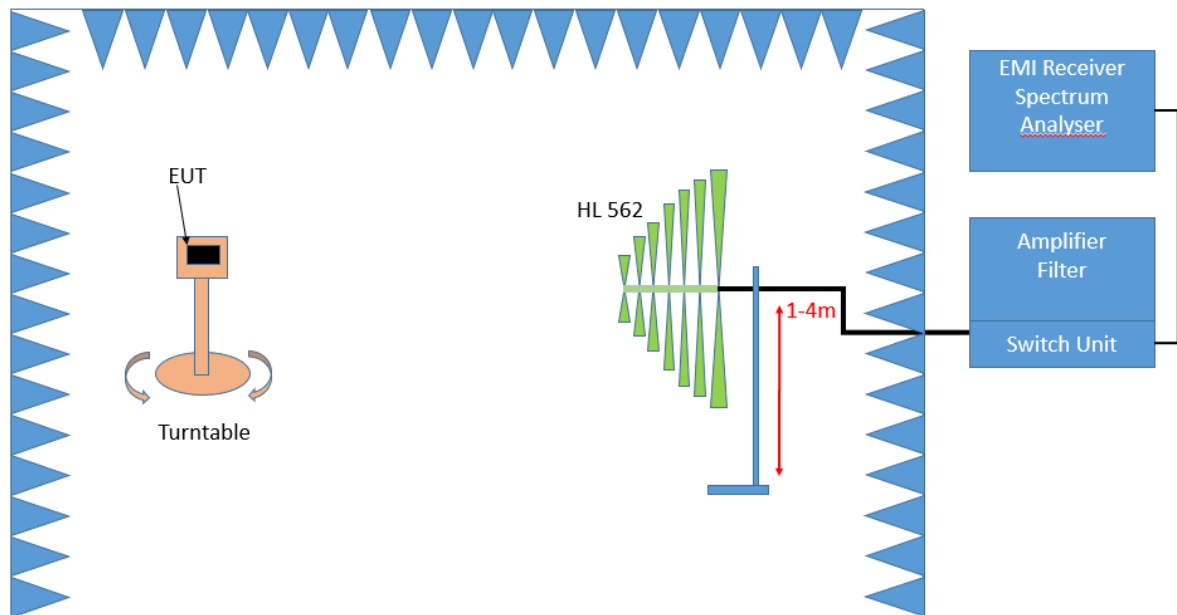

Test Setup; Spurious Emission Radiated (SAC), 30 MHz- 1GHz

### **Step 1:** Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range:  $-180^{\circ}$  to  $90^{\circ}$
- Turntable step size:  $90^{\circ}$
- Height variation range: 1 – 4 m
- Height variation step size: 1.5 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

### **Step 2:** Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by  $\pm 45^{\circ}$  around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by  $\pm 100$  cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $360^{\circ}$
- Height variation range: 1 – 4 m
- Antenna Polarisation: max. value determined in step 1

### **Step 3:** Final measurement with QP detector

With the settings determined in step 2, the final measurement will be performed:

EMI receiver settings for step 3:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.




### Above 1 GHz:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

### 3. Measurement 1 GHz up to 26.5 GHz

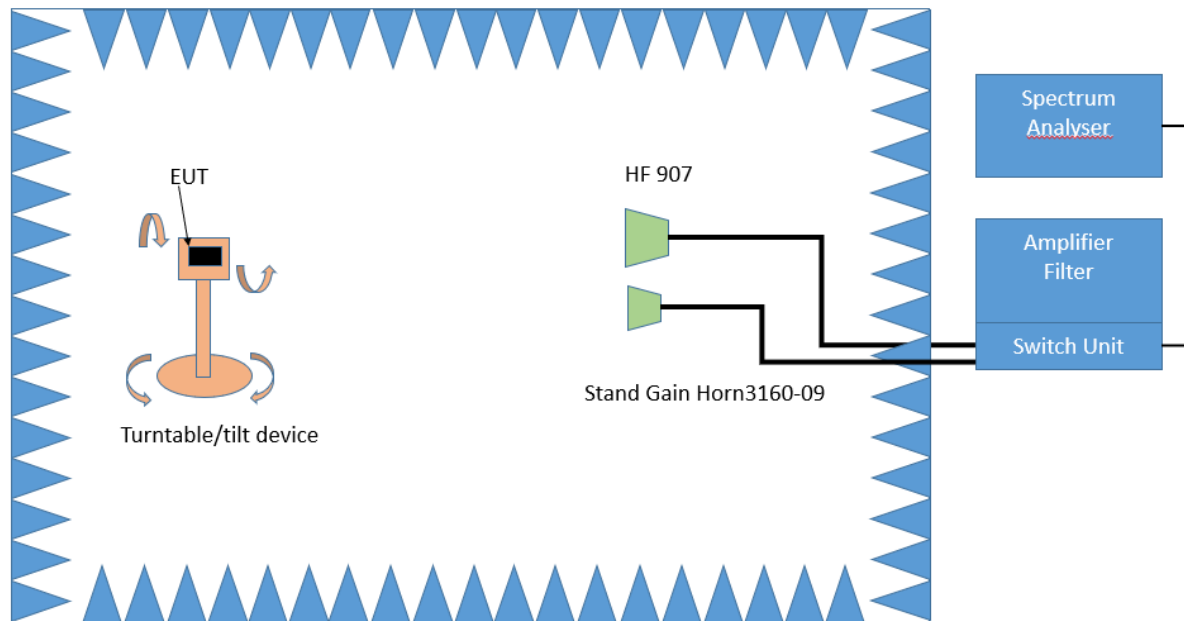

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

#### Step 1:

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

#### Step 2:

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instep 2 is omitted. Instead of this, a maximum search with a step size  $\pm 45^\circ$  for the elevation axis is performed.

The turn table azimuth will slowly vary by  $\pm 22.5^\circ$ .

The elevation angle will slowly vary by  $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

#### Step 3:


Spectrum analyser settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

#### 4. Measurement above 26.5 GHz up to 40 GHz

The following modifications, compared to the frequency range 1 GHz – 26.5 GHz, apply to the measurement procedure for the frequency range above 26.5 GHz:

- Measurement distance: 1m

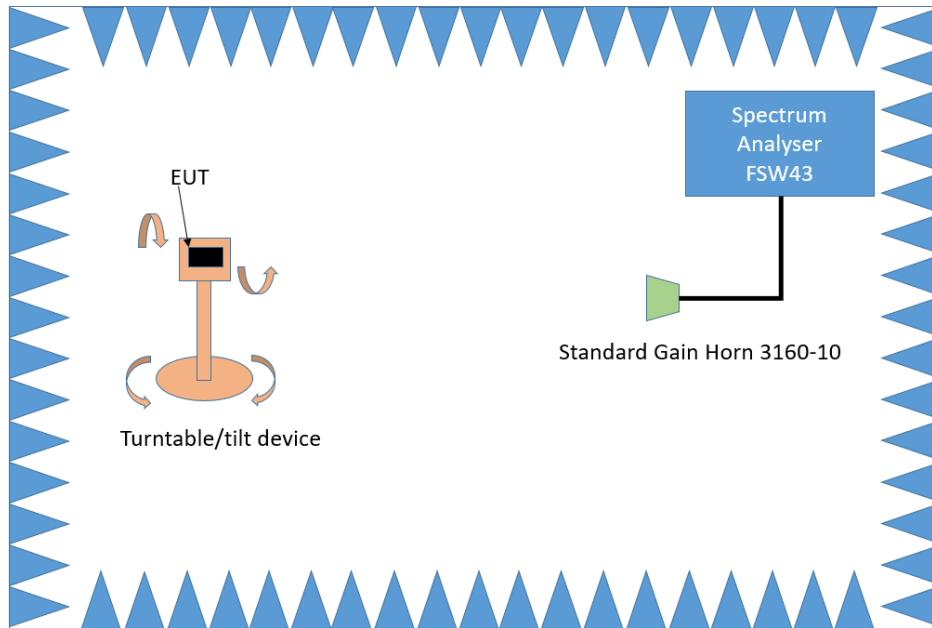

Test Setup; Spurious Emission Radiated (FAC), 26.5 – 40 GHz

#### 5.6.2 TEST REQUIREMENTS / LIMITS

##### A) FCC

FCC Part 15 Subpart E, §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit: –27 dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit: –27 dBm/MHz at 75 MHz or more above or below the band edge  
 increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge  
 increasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edge  
 increasing linearly to 27 dBm/MHz at the band edge.

**B) IC**

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1.2, Emissions outside the band 5150-5250 MHz, indoor operation only:  
Limit: -27 dBm/MHz EIRP outside of the band 5150-5250 MHz.

RSS-247, 6.2.2.2, Emissions outside the band 5250-5350 MHz:  
Limit: -27 dBm/MHz EIRP outside of the band 5250-5350 MHz.

RSS-247, 6.2.3.2, Emissions outside the bands 5470-5600 MHz and 5650-5725 MHz:  
Limit: -27 dBm/MHz EIRP outside of the band 5470-5725 MHz.  
However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.  
Note: No operation is permitted for the frequency range 5600-5650 MHz.

RSS-247, 6.2.4.2, Emissions outside the band 5725-5850 MHz:

- a. 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b. 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c. 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d. -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

### C) FCC & IC

FCC Part 15 Subpart E, §15.405

The provisions of §§ 15.203 and 15.205 are included.

§15.407 (b)(6)

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

§15.407 (b)(7)

The provisions of §15.205 apply to intentional radiators operating under this section

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

| Frequency in MHz | Limit (µV/m)     | Measurement distance (m) | Limits (dBµV/m)    |
|------------------|------------------|--------------------------|--------------------|
| 0.009 – 0.49     | 2400/F(kHz)@300m | 3                        | (48.5 – 13.8)@300m |
| 0.49 – 1.705     | 24000/F(kHz)@30m | 3                        | (33.8 – 23.0)@30m  |
| 1.705 – 30       | 30@30m           | 3                        | 29.5@30m           |

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

| Frequency in MHz | Limit (µV/m) | Measurement distance (m) | Limits (dBµV/m) |
|------------------|--------------|--------------------------|-----------------|
| 30 – 88          | 100@3m       | 3                        | 40.0@3m         |
| 88 – 216         | 150@3m       | 3                        | 43.5@3m         |
| 216 – 960        | 200@3m       | 3                        | 46.0@3m         |
| 960 – 26000      | 500@3m       | 3                        | 54.0@3m         |
| 26000 – 40000    | 500@3m       | 1                        | 54.0@3m         |

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:

- Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)
- Limit (dBµV/m) = EIRP [dBm] – 20 log (d [m]) + 104.8

Limit types (in result tables on next page):

RB – Emissions falls into a "Restricted Band" according FCC §§15.205 and 15.209 \*)

UE – "Undesirable Emission Limit" according FCC §15.407

BE-RB – Band Edge Limit basing on "Restricted Band Limits"

BE-UE – Band Edge Limit basing on "Undesirable Emission Limit"

\*) Below 1 GHz the limits of §15.209 are applied for all frequencies.

### 5.6.3 TEST PROTOCOL

Ambient temperature: 26 - 28 °C  
 Air Pressure: 999 - 1007 hPa  
 Humidity: 37 - 39 %  
 WLAN a-Mode; 20 MHz; 6 Mbit/s  
 Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|-------------|------------|
| 157     | 5785                   | 155.3                | 22.2                    | QP       | 120       | 43.5           | 21.3        | UE         |
| 157     | 5785                   | 551.6                | 43.7                    | QP       | 120       | 46.0           | 2.3         | UE         |
| 157     | 5785                   | 600.0                | 43.0                    | QP       | 120       | 46.0           | 3.0         | UE         |
| 157     | 5785                   | 930.0                | 42.0                    | QP       | 120       | 46.0           | 4.0         | UE         |
| 157     | 5785                   | 1000.0               | 43.2                    | QP       | 120       | 54.0           | 10.8        | UE         |

WLAN n-Mode; 20 MHz; MCS0; SISO  
 Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|-------------|------------|
| 149     | 5745                   | -                    | -                       | -        | -         | -              | > 20        | -          |
| 157     | 5785                   | -                    | -                       | -        | -         | -              | > 20        | -          |
| 165     | 5825                   | 2790.2               | 55.8                    | PEAK     | 1000      | 74.0           | 18.2        | RB         |
| 165     | 5825                   | 2789.8               | 37.6                    | AV       | 1000      | 54.0           | 16.4        | RB         |


WLAN n-Mode; 40 MHz; MCS0; SISO  
 Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------|----------|-----------|----------------|-------------|------------|
| 151     | 5755                   | -                    | -                       | -        | -         | -              | > 20        | -          |
| 159     | 5795                   | 2790.2               | 55.5                    | Peak     | 1000      | 74.0           | 18.5        | RB         |
| 159     | 5795                   | 2790.0               | 37.9                    | AV       | 1000      | 54.0           | 16.1        | RB         |


Remark: Please see next sub-clause for the measurement plot.

#### 5.6.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = WLAN a, Operating Frequency = mid,  
Measurement range = 9 kHz – 30 MHz, Subband = U-NII-3  
(S01\_AD01)

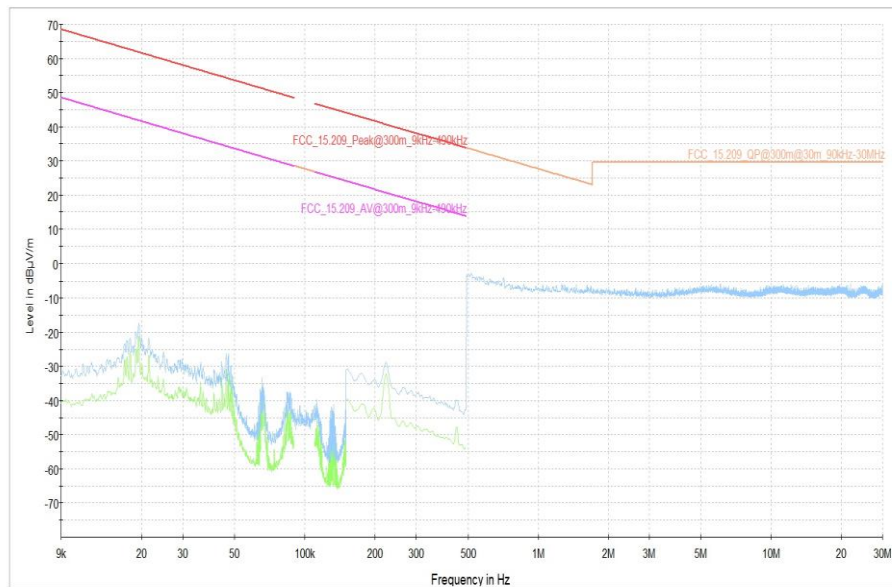


Radio Technology = WLAN a, Operating Frequency = mid,  
Measurement range = 30 MHz – 1 GHz, Subband = U-NII-3  
(S01\_AD01)

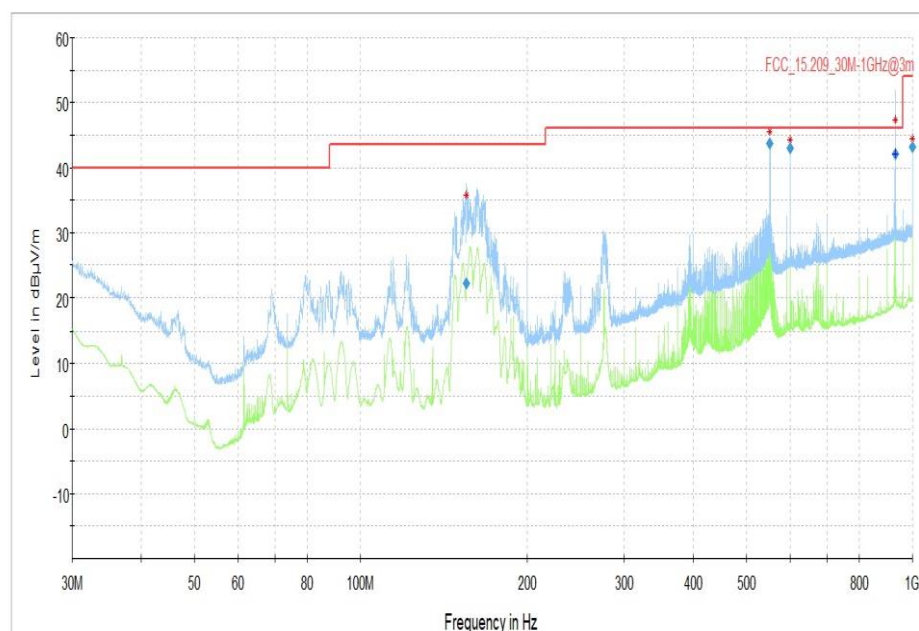


Radio Technology = WLAN a, Operating Frequency = high,  
Measurement range = 1 GHz - 26 GHz, Subband = U-NII-3  
(S01\_AD01)

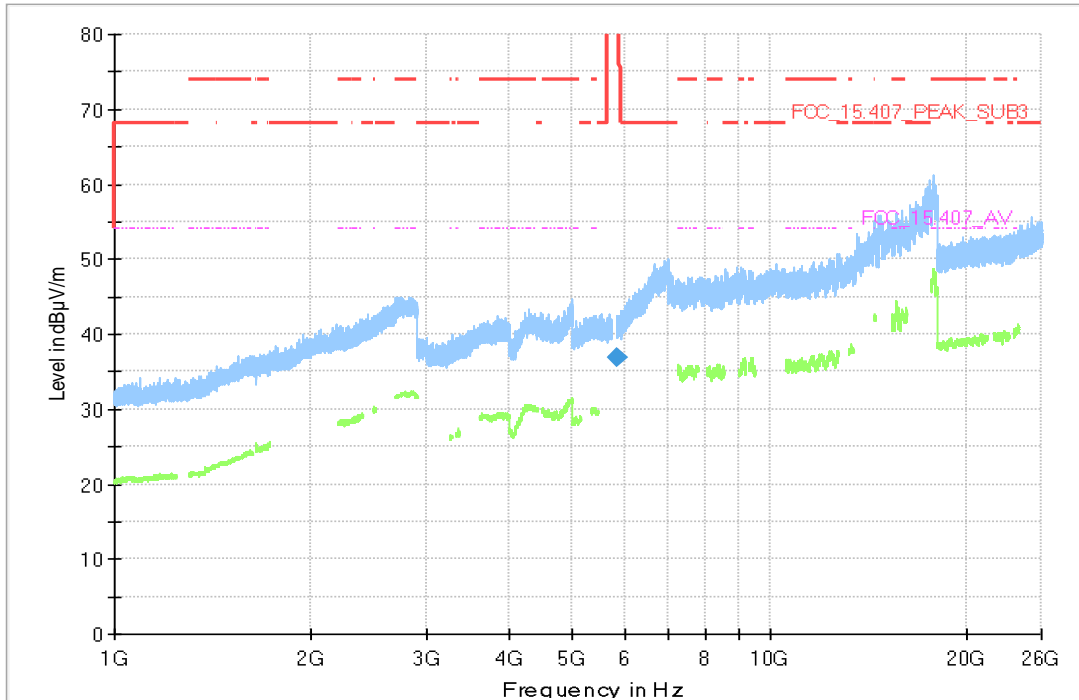


Radio Technology = WLAN a, Operating Frequency = mid,  
Measurement range = 26 GHz - 40 GHz, Subband = U-NII-3  
(S01\_AD01)

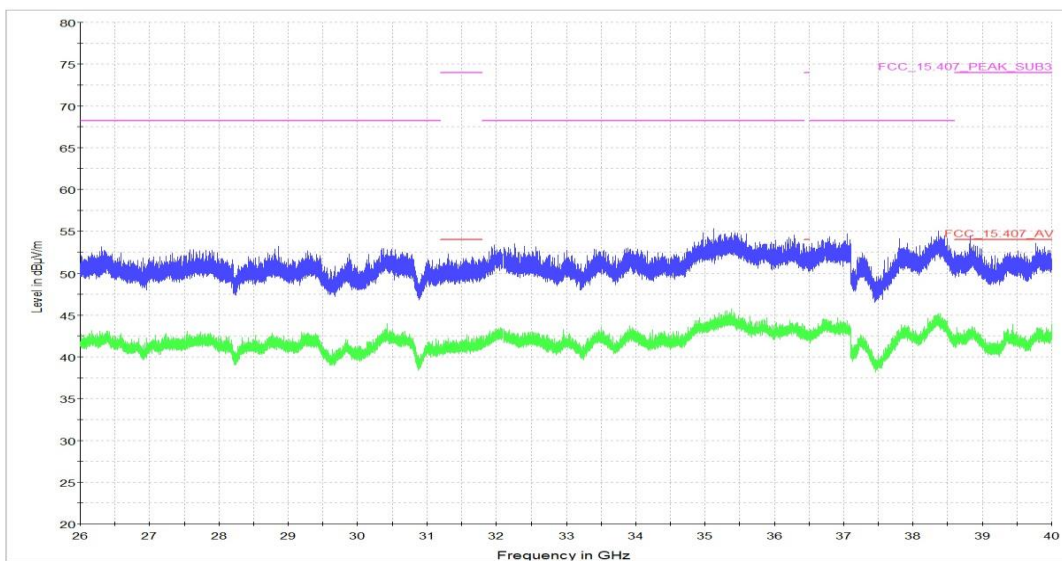

Radio Technology = WLAN n 20 MHz, Operating Frequency = mid,  
 Measurement range = 26 GHz - 40 GHz, Subband = U-NII-3  
 (S01\_AD01)

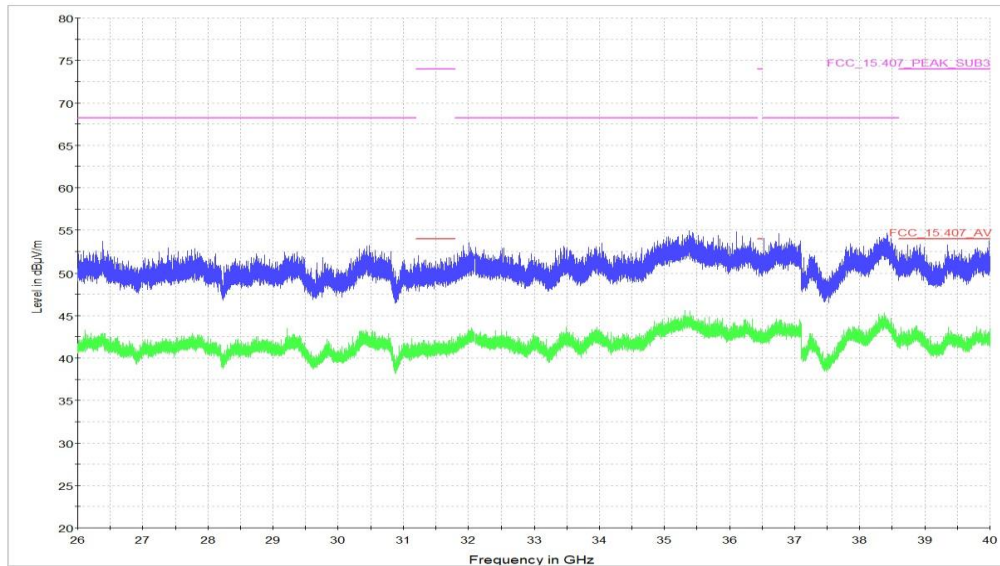


Radio Technology = WLAN n 20 MHz, Operating Frequency = high,  
 Measurement range = 1 GHz - 26 GHz, Subband = U-NII-3  
 (S01\_AD01)

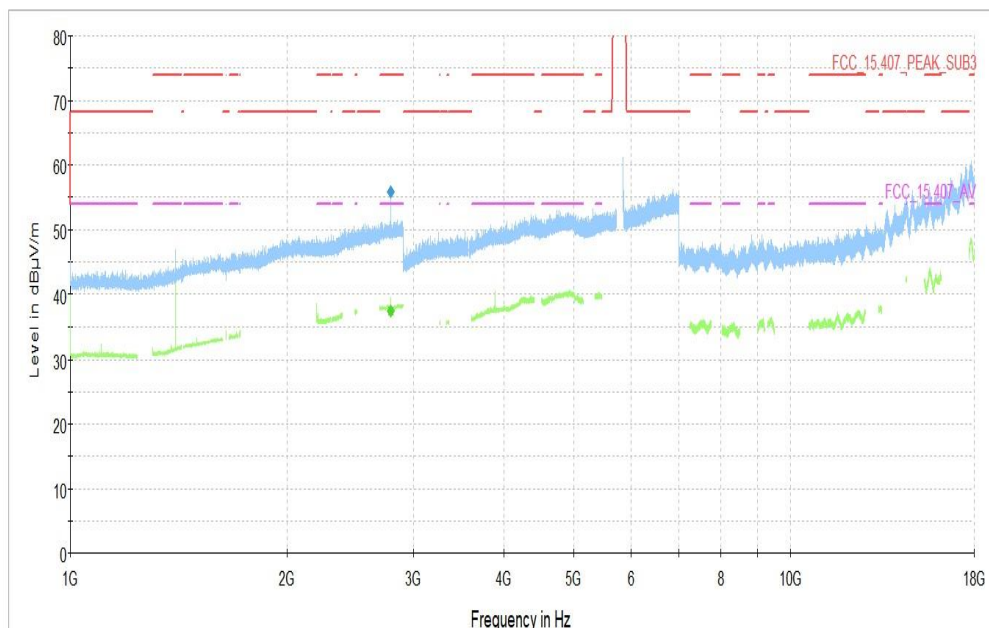



Radio Technology = WLAN n 40 MHz, Operating Frequency = high,  
 Measurement range = 1 GHz - 26 GHz, Subband = U-NII-3  
 (S01\_AD01)

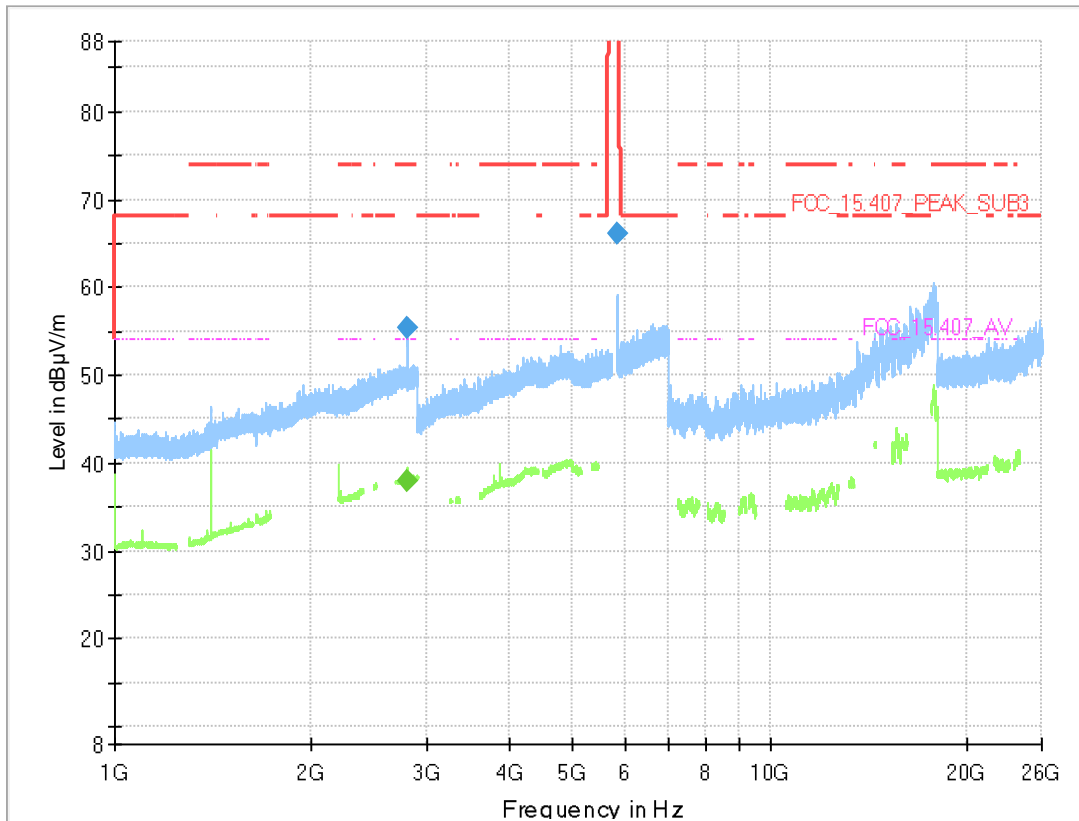

### 5.6.5 TEST EQUIPMENT USED

- Radiated Emissions

## 5.7 BAND EDGE

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 5.7.1 TEST DESCRIPTION


The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The measurements were performed according the following sub-chapter of ANSI C63.10:

- Chapter 6.10.5

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only (procedure according ANSI C63.10, chapter 6.6.5).

### 3. Measurement above 1 GHz

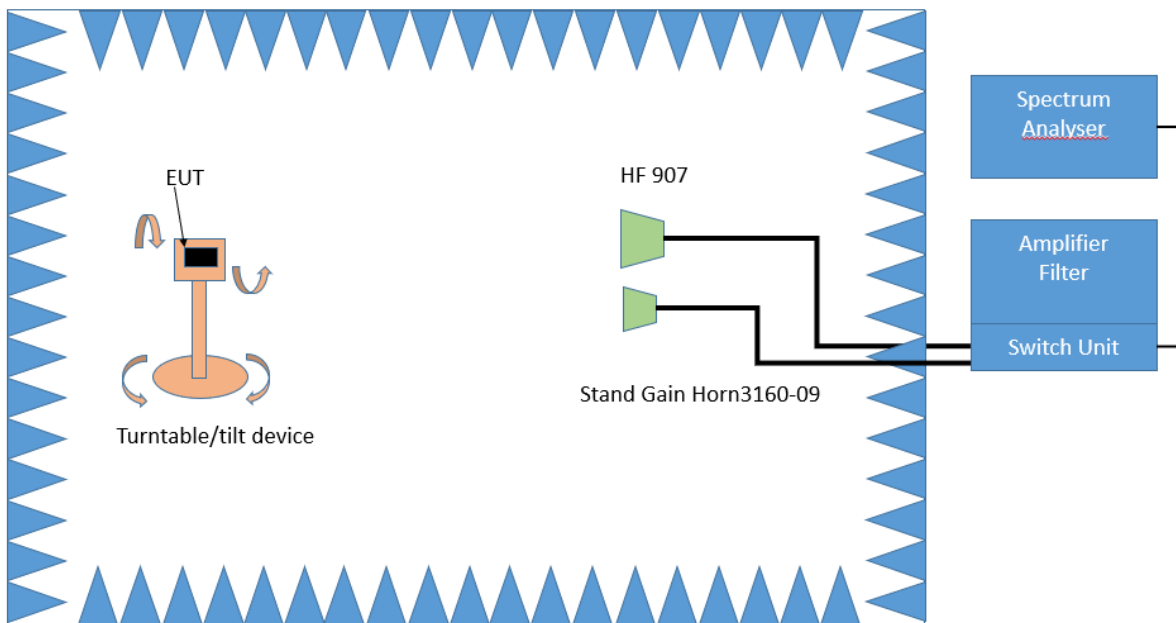

Test Setup; Spurious Emission Radiated (FAC), 1 GHz-26.5 GHz

#### Step 1:

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of 90 °.

The turn table step size (azimuth angle) for the preliminary measurement is 45 °.

Spectrum analyser settings:

- Detector: Peak, Average
- RBW = 1 MHz
- VBW = 3 MHz

**Step 2:**

The turn table azimuth will slowly vary by  $\pm 22.5^\circ$ .

The elevation angle will slowly vary by  $\pm 45^\circ$

Spectrum analyser settings:

- Detector: Peak

**Step 3:**

Spectrum analyser settings for step 3:

- Detector: Peak / CISPR Average
- Measured frequencies: in step 1 determined frequencies
- RBW = 1 MHz
- VBW = 3 MHz
- Measuring time: 1 s

### 5.7.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

| Frequency in MHz | Limit ( $\mu\text{V}/\text{m}$ ) | Measurement distance (m) | Limits ( $\text{dB}\mu\text{V}/\text{m}$ ) |
|------------------|----------------------------------|--------------------------|--------------------------------------------|
| 0.009 – 0.49     | 2400/F(kHz)@300m                 | 3                        | (48.5 – 13.8)@300m                         |
| 0.49 – 1.705     | 24000/F(kHz)@30m                 | 3                        | (33.8 – 23.0)@30m                          |
| 1.705 – 30       | 30@30m                           | 3                        | 29.5@30m                                   |

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

| Frequency in MHz | Limit ( $\mu\text{V}/\text{m}$ ) | Measurement distance (m) | Limits ( $\text{dB}\mu\text{V}/\text{m}$ ) |
|------------------|----------------------------------|--------------------------|--------------------------------------------|
| 30 – 88          | 100@3m                           | 3                        | 40.0@3m                                    |
| 88 – 216         | 150@3m                           | 3                        | 43.5@3m                                    |
| 216 – 960        | 200@3m                           | 3                        | 46.0@3m                                    |
| 960 – 26000      | 500@3m                           | 3                        | 54.0@3m                                    |
| 26000 – 40000    | 500@3m                           | 1                        | 54.0@3m                                    |

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dB}\mu\text{V}/\text{m)} = 20 \log (\text{Limit } (\mu\text{V}/\text{m})/1\mu\text{V}/\text{m})$

### 5.7.3 TEST PROTOCOL

Ambient temperature: 28 °C  
 Air Pressure: 1007 hPa  
 Humidity: 37 %  
 WLAN a-Mode; 20 MHz; 6 Mbit/s  
 Applied duty cycle correction (AV): 0 dB

| U-NII-Subband | Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type | FCC /IC? |
|---------------|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|-------------|------------|----------|
| 3             | 149     | 5745                   | 5725.0                | 35.5                    | PEAK     | 1000      | 120.6          | 85.1        | BE-UE      | FCC&IC   |
|               | 165     | 5825                   | 5850.0                | 36.8                    | PEAK     | 1000      | 121.2          | 84.4        | BE-UE      | FCC&IC   |

WLAN n-Mode; 20 MHz; MCS0; SISO  
 Applied duty cycle correction (AV): 0 dB

| U-NII-Subband | Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type | FCC /IC? |
|---------------|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|-------------|------------|----------|
| 3             | 149     | 5745                   | 5725.0                | 36.1                    | PEAK     | 1000      | 121.9          | 85.8        | BE-UE      | FCC&IC   |
|               | 165     | 5825                   | 5850.0                | 69.5                    | PEAK     | 1000      | 118.3          | 48.8        | BE-UE      | FCC&IC   |

WLAN n-Mode; 40 MHz; MCS0; SISO  
 Applied duty cycle correction (AV): 0 dB

| U-NII-Subband | Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type | FCC /IC? |
|---------------|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|-------------|------------|----------|
| 3             | 151     | 5755                   | 5725.0                | 73.1                    | PEAK     | 1000      | 119.6          | 46.5        | BE-UE      | FCC&IC   |
|               | 159     | 5795                   | 5850.0                | 66.1                    | PEAK     | 1000      | 120.3          | 54.2        | BE-UE      | FCC&IC   |


WLAN ac-Mode; 80 MHz; MCS8; SISO  
 Applied duty cycle correction (AV): 0 dB

| U-NII-Subband | Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBμV/m] | Detector | RBW [kHz] | Limit [dBμV/m] | Margin [dB] | Limit Type | FCC /IC? |
|---------------|---------|------------------------|-----------------------|-------------------------|----------|-----------|----------------|-------------|------------|----------|
| 3             | 155     | 5775                   | 5725.0                | 59.9                    | PEAK     | 1000      | 118.5          | 58.6        | BE-UE      | FCC&IC   |
|               | 155     | 5775                   | 5850.0                | 66.5                    | PEAK     | 1000      | 118.3          | 51.8        | BE-UE      | FCC&IC   |


Remark: Please see next sub-clause for the measurement plot.

#### 5.7.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)


Radio Technology = WLAN a, Operating Frequency = low, Subband = U-NII-3 (S01\_AD01)

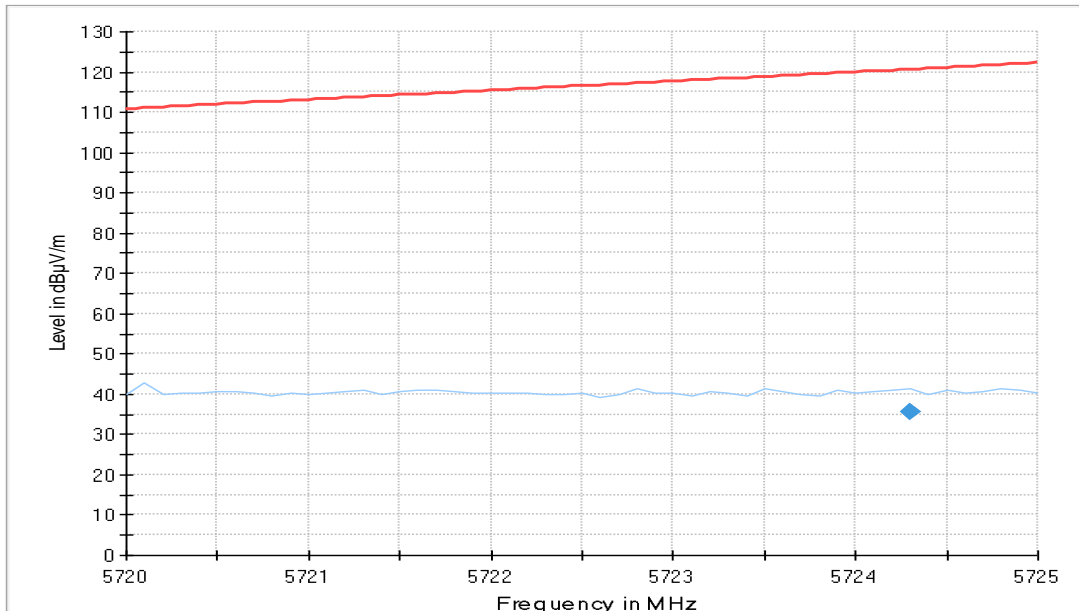


Radio Technology = WLAN a, Operating Frequency = high, Subband = U-NII-3 (S01\_AD01)

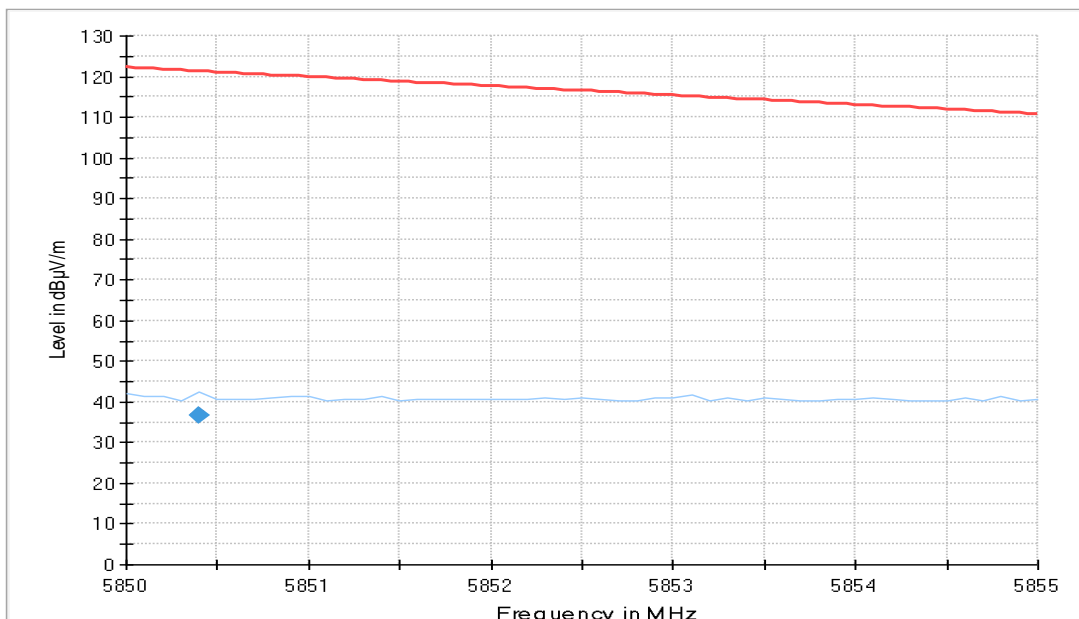


Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Subband = U-NII-3  
(S01\_AD01)

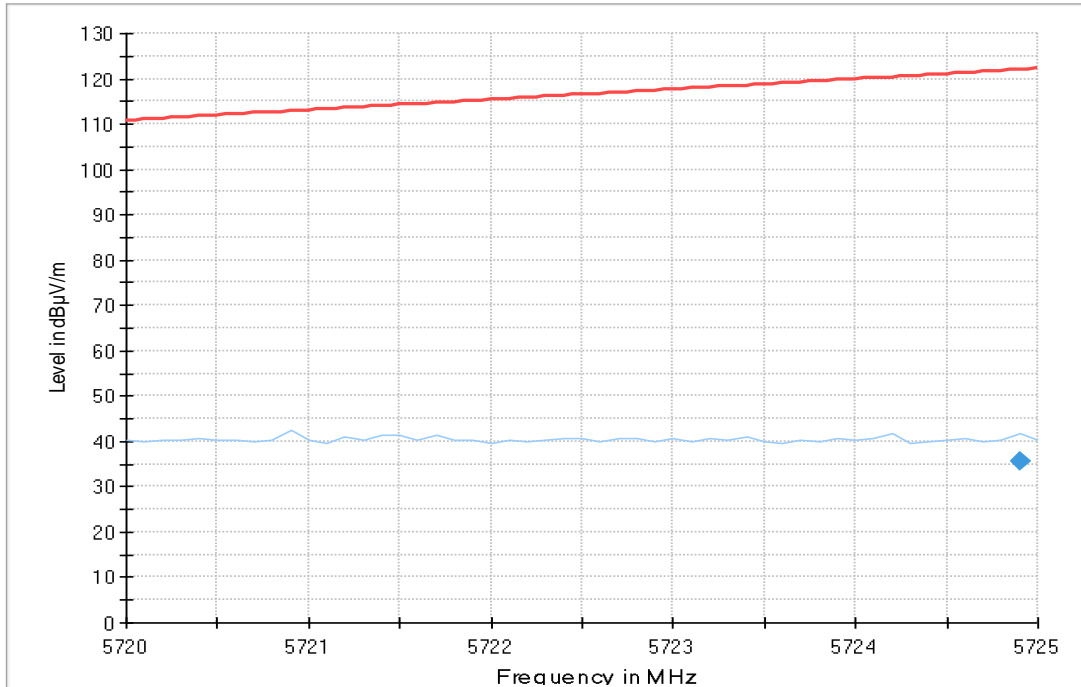


Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Subband = U-NII-3  
(S01\_AD01)

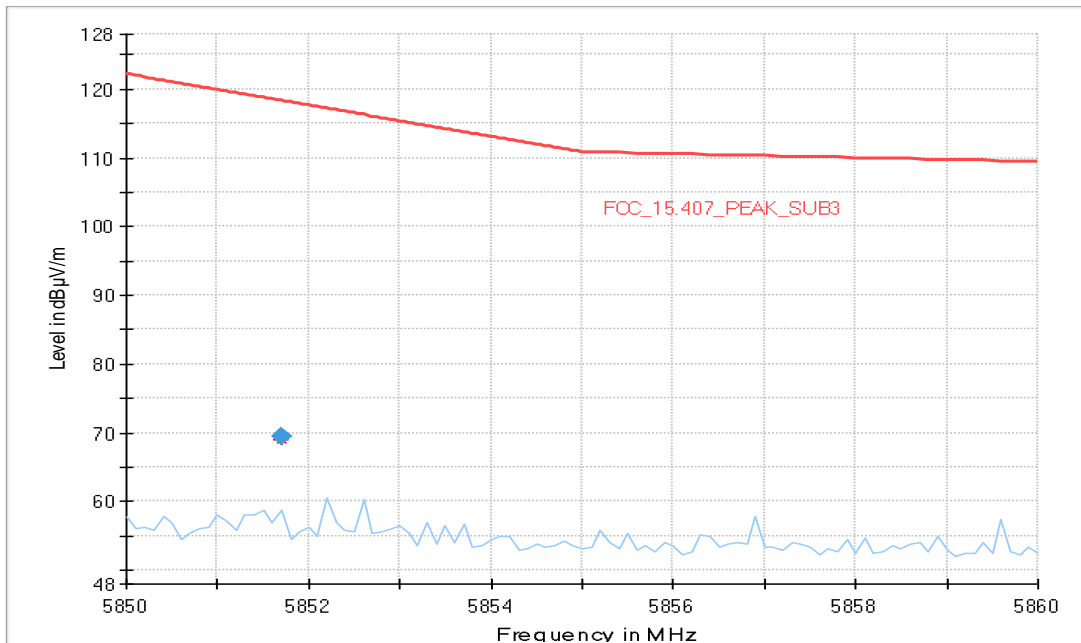



Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband = U-NII-3 (S01\_AD01)

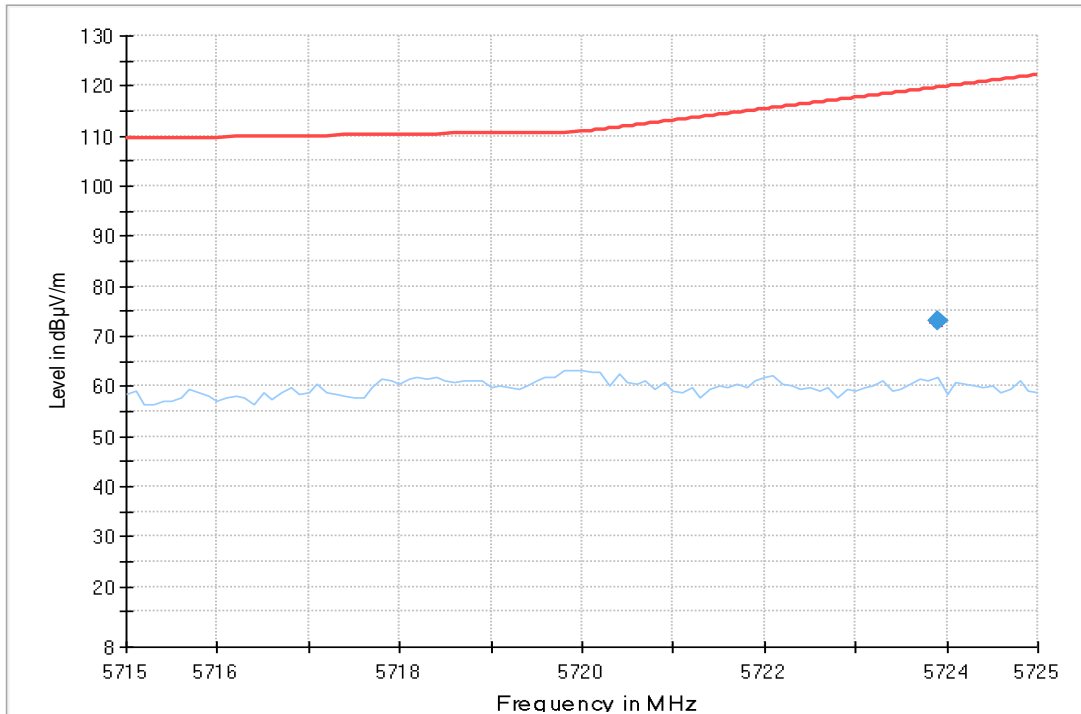

Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Subband = U-NII-3 (S01\_AD01)

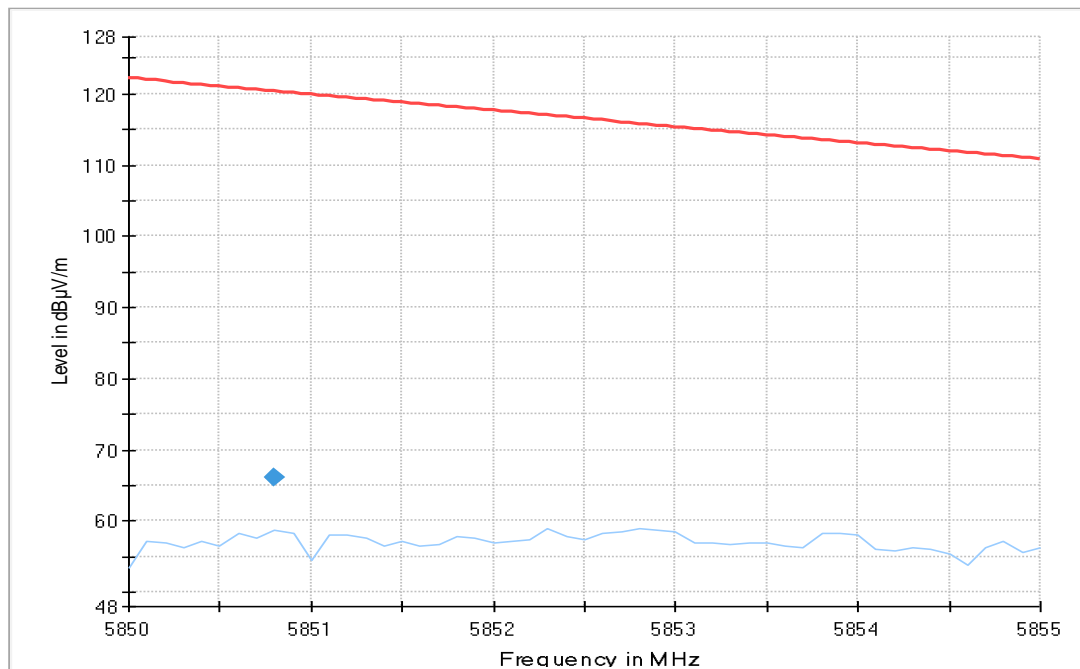

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-3 (S01\_AD01)

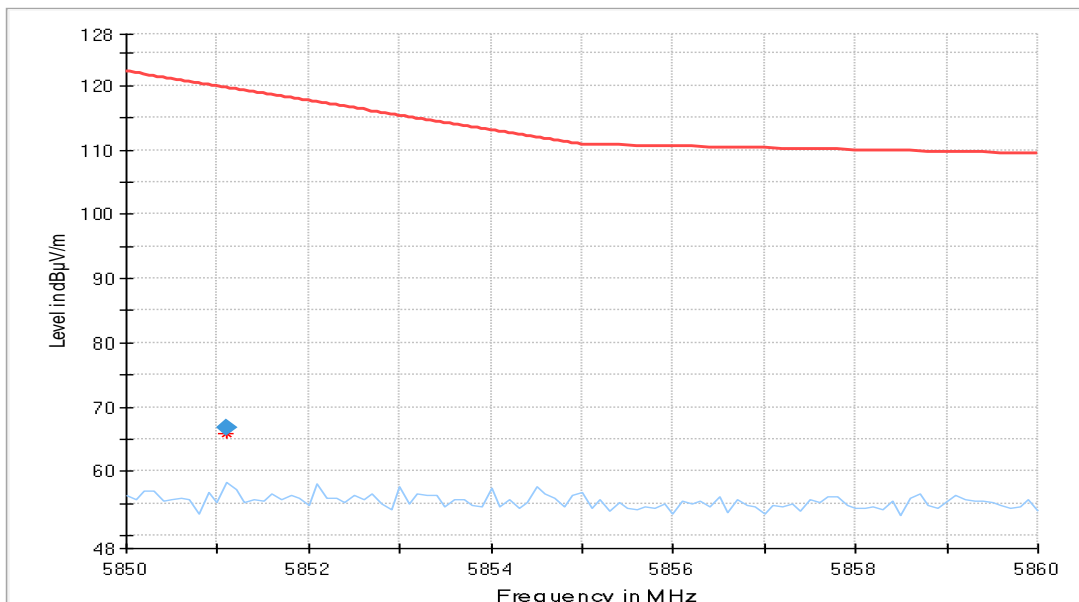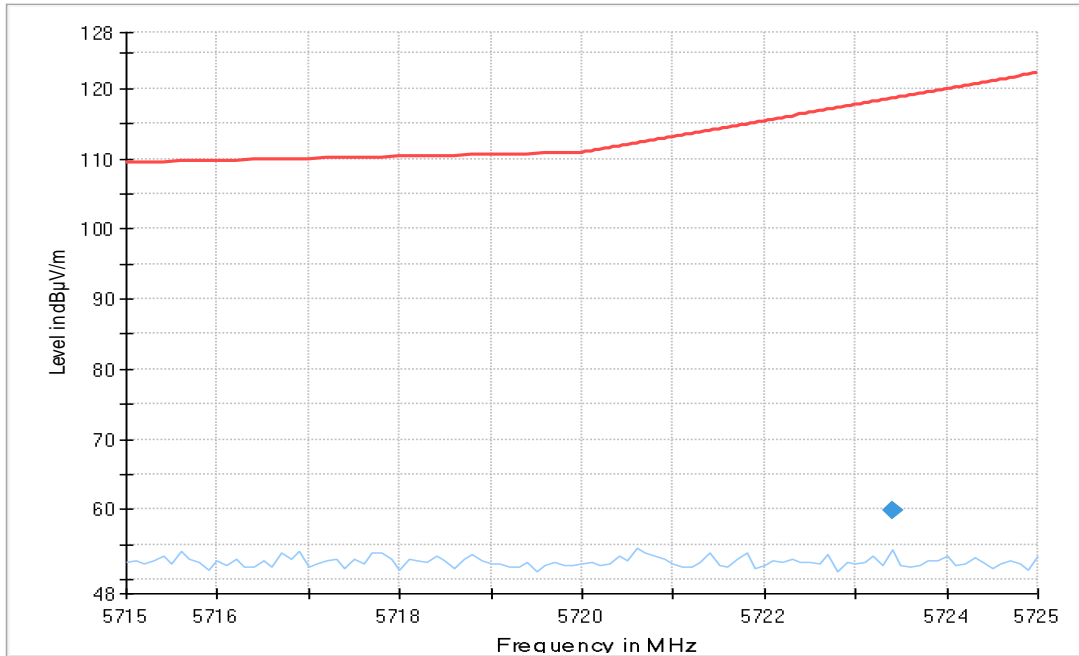

### 5.7.5 TEST EQUIPMENT USED

- Radiated Emissions



## 6 TEST EQUIPMENT

- 1 R&S TS8997  
2.4 and 5 GHz Bands Conducted Test Lab

| Ref.No. | Device Name                    | Description                                        | Manufacturer                      | Serial Number  | Last Calibration | Calibration Due |
|---------|--------------------------------|----------------------------------------------------|-----------------------------------|----------------|------------------|-----------------|
| 1.1     | MFS                            | Rubidium Frequency Normal MFS                      | Datum GmbH                        | 002            | 2020-11          | 2021-11         |
| 1.2     | SMB100A                        | Signal Generator 9 kHz - 6 GHz                     | Rohde & Schwarz                   | 107695         | 2021-06          | 2024-06         |
| 1.3     | EX520                          | Digital Multimeter 12                              | Extech Instruments Corp           | 05157876       | 2020-04          | 2022-04         |
| 1.4     | FSV30                          | Signal Analyzer 10 Hz - 30 GHz                     | Rohde & Schwarz                   | 103005         | 2020-05          | 2022-05         |
| 1.5     | Opus10 THI (8152.00)           | T/H Logger 15                                      | Lufft Mess- und Regeltechnik GmbH | 13985          | 2019-06          | 2021-08         |
| 1.6     | NGSM 32/10                     | Power Supply                                       | Rohde & Schwarz GmbH & Co. KG     | 3456           | 2020-01          | 2022-01         |
| 1.7     | Temperature Chamber KWP 120/70 | Temperature Chamber Weiss 01                       | Weiss                             | 59226012190010 | 2020-05          | 2022-05         |
| 1.8     | SMB100A                        | Signal Generator 100 kHz - 40 GHz                  | Rohde & Schwarz Vertriebs-GmbH    | 181486         | 2019-11          | 2021-11         |
| 1.9     | Temperature Chamber VT 4002    | Temperature Chamber Vötsch 03                      | Vötsch                            | 58566002150010 | 2020-05          | 2022-05         |
| 1.10    | Opus10 THI (8152.00)           | T/H Logger 14                                      | Lufft Mess- und Regeltechnik GmbH | 13993          |                  |                 |
| 1.11    | OSP120                         | Contains Power Meter and Switching Unit OSP-B157W8 | Rohde & Schwarz                   | 101158         | 2021-06          | 2024-06         |

- 2 Radiated Emissions  
Lab to perform radiated emission tests

| Ref.No. | Device Name          | Description                          | Manufacturer                      | Serial Number | Last Calibration | Calibration Due |
|---------|----------------------|--------------------------------------|-----------------------------------|---------------|------------------|-----------------|
| 2.1     | MFS                  | Rubidium Frequency Normal MFS        | Datum GmbH                        | 002           | 2020-11          | 2021-11         |
| 2.2     | N5000/NP             | Filter for EUT, 2 Lines, 250 V, 16 A | ETS-LINDGREN                      | 241515        |                  |                 |
| 2.3     | Opus10 TPR (8253.00) | T/P Logger 13                        | Lufft Mess- und Regeltechnik GmbH | 13936         |                  |                 |
| 2.4     | ESW44                | EMI Receiver / Spectrum Analyzer     | Rohde & Schwarz GmbH & Co. KG     | 101603        | 2019-12          | 2021-12         |
| 2.5     | Anechoic Chamber 01  | SAC/FAR, 10.58 m x 6.38 m x 6.00 m   | Frankonia                         | none          | 2021-04          | 2023-04         |

| Ref.No. | Device Name                    | Description                                                        | Manufacturer                        | Serial Number      | Last Calibration | Calibration Due |
|---------|--------------------------------|--------------------------------------------------------------------|-------------------------------------|--------------------|------------------|-----------------|
| 2.6     | HL 562<br>ULTRALOG             | Biconical-log-per antenna (30 MHz - 3 GHz) with HL 562E biconicals | Rohde & Schwarz GmbH & Co. KG       | 830547/003         | 2018-07          | 2021-07         |
| 2.7     | AMF-7D00101800-30-10P-R        | Broadband Amplifier 100 MHz - 18 GHz                               | Miteq                               |                    |                  |                 |
| 2.8     | 5HC2700/12750-1.5-KK           | High Pass Filter                                                   | Trilithic                           | 9942012            |                  |                 |
| 2.9     | ASP 1.2/1.8-10 kg              | Antenna Mast                                                       | Maturo GmbH                         | -                  |                  |                 |
| 2.10    | Anechoic Chamber 03            | FAR, 8.80m x 4.60m x 4.05m (l x w x h)                             | Albatross Projects                  | P26971-647-001-PRB | 2021-04          | 2023-04         |
| 2.11    | Fluke 177                      | Digital Multimeter 03 (Multimeter)                                 | Fluke Europe B.V.                   | 86670383           | 2020-04          | 2022-04         |
| 2.12    | Opus10 THI (8152.00)           | T/H Logger 10                                                      | Lufft Mess- und Regeltechnik GmbH   | 12488              | 2019-06          | 2021-08         |
| 2.13    | PONTIS Con4101                 | PONTIS Camera Controller                                           |                                     | 6061510370         |                  |                 |
| 2.14    | NRVD                           | Power Meter                                                        | Rohde & Schwarz GmbH & Co. KG       | 828110/016         | 2020-08          | 2021-08         |
| 2.15    | HF 906                         | Double-ridged horn                                                 | Rohde & Schwarz                     | 357357/002         | 2018-09          | 2021-09         |
| 2.16    | JS4-18002600-32-5P             | Broadband Amplifier 18 GHz - 26 GHz                                | Miteq                               | 849785             |                  |                 |
| 2.17    | FSW 43                         | Spectrum Analyzer                                                  | Rohde & Schwarz                     | 103779             | 2021-06          | 2023-06         |
| 2.18    | EP 1200/B, NA/B1               | AC Source, Amplifier with integrated variable Oscillator           | Spitzenberger & Spies GmbH & Co. KG | B6278              |                  |                 |
| 2.19    | 3160-09                        | Standard Gain / Pyramidal Horn Antenna 26.5 GHz                    | EMCO Elektronik GmbH                | 00083069           |                  |                 |
| 2.20    | WHKX 7.0/18G-8SS               | High Pass Filter                                                   | Wainwright Instruments GmbH         | 09                 |                  |                 |
| 2.21    | DS 420S                        | Turn Table 2 m diameter                                            | HD GmbH                             | 420/573/99         |                  |                 |
| 2.22    | 4HC1600/12750-1.5-KK           | High Pass Filter                                                   | Trilithic                           | 9942011            |                  |                 |
| 2.23    | Temperature Chamber KWP 120/70 | Temperature Chamber Weiss 01                                       | Weiss                               | 59226012190010     | 2020-05          | 2022-05         |
| 2.24    | JS4-00102600-42-5A             | Broadband Amplifier 30 MHz - 26 GHz                                | Miteq                               | 619368             |                  |                 |
| 2.25    | TT 1.5 WI                      | Turn Table                                                         | Maturo GmbH                         | -                  |                  |                 |

| Ref.No. | Device Name                           | Description                                   | Manufacturer                                 | Serial Number  | Last Calibration | Calibration Due |
|---------|---------------------------------------|-----------------------------------------------|----------------------------------------------|----------------|------------------|-----------------|
| 2.26    | HL 562<br>ULTRALOG                    | Biconical-log-per Antenna (30 MHz - 3 GHz)    | Rohde & Schwarz GmbH & Co. KG                | 100609         | 2019-05          | 2022-05         |
| 2.27    | HF 906                                | Double-ridged horn                            | Rohde & Schwarz                              | 357357/001     |                  |                 |
| 2.28    | FS-Z325                               | Harmonic Mixer 220 - 325 GHz                  | Rohde & Schwarz Messgerätebau GmbH           | 101006         | 2020-03          | 2023-03         |
| 2.29    | CMU 200                               | "CMU1" Universal Radio Communication Tester   | Rohde & Schwarz GmbH & Co. KG                | 102366         | 2021-02          | 2024-02         |
| 2.30    | 3160-10                               | Standard Gain / Pyramidal Horn Antenna 40 GHz | EMCO Elektronik GmbH                         | 00086675       |                  |                 |
| 2.31    | MA4985-XP-ET                          | Bore Sight Antenna Mast                       | innco systems GmbH                           | none           |                  |                 |
| 2.32    | Temperature Chamber VT 4002           | Temperature Chamber Vötsch 03                 | Vötsch                                       | 58566002150010 | 2020-05          | 2022-05         |
| 2.33    | CBT                                   | Bluetooth Tester "CBT-02" incl. BLE-Option    | Rohde & Schwarz                              | 100302         | 2021-05          | 2024-05         |
| 2.34    | VLFX-650+                             | Low Pass Filter DC650 MHz                     | Mini-Circuits                                | 15542          |                  |                 |
| 2.35    | JUN-AIR Mod. 6-15                     | Air Compressor                                | JUN-AIR Deutschland GmbH                     | 612582         |                  |                 |
| 2.36    | 5HC3500/18000-1.2-KK                  | High Pass Filter                              | Trilithic                                    | 200035008      |                  |                 |
| 2.37    | FS-Z140                               | Harmonic Mixer 90 -140 GHz                    | Rohde & Schwarz Messgerätebau GmbH           | 101007         | 2020-03          | 2023-03         |
| 2.38    | HFH2-Z2                               | Loop Antenna + 3 Axis Tripod                  | Rohde & Schwarz GmbH & Co. KG                | 829324/006     | 2021-01          | 2024-01         |
| 2.39    | Voltcraft M-3860M                     | Digital Multimeter 01 (Multimeter)            | Conrad                                       | IJ096055       |                  |                 |
| 2.40    | CMW500                                | callbox, 2G, 3G, LTE, WLAN, BT, Audio         | Rohde & Schwarz GmbH & Co. KG                | 149268-Qf      |                  |                 |
| 2.41    | ESR 7                                 | EMI Receiver / Spectrum Analyzer              | Rohde & Schwarz                              | 101424         | 2021-01          | 2023-01         |
| 2.42    | SB4-100.OLD20-3T/10 Airwin 2 x 1.5 kW | Air compressor (oil-free)                     | airWin Kompressoren UG                       | 901/00503      |                  |                 |
| 2.43    | UNI-T UT195E                          | True RMS Digital Multimeter                   | UNI-T UNI-TREND TECHNOLOGY (CHINA) CO., LTD. | C190729561     |                  |                 |

| Ref.No. | Device Name            | Description                           | Manufacturer                  | Serial Number          | Last Calibration | Calibration Due |
|---------|------------------------|---------------------------------------|-------------------------------|------------------------|------------------|-----------------|
| 2.44    | JS4-00101800-35-5P     | Broadband Amplifier 30 MHz - 18 GHz   | Miteq                         | 896037                 |                  |                 |
| 2.45    | AS 620 P               | Antenna Mast (pneumatic polarisation) | HD GmbH                       | 620/37                 |                  |                 |
| 2.46    | CMW500                 | Callbox OIL-RE, SUA-160 MHz           | Rohde & Schwarz GmbH & Co. KG | 167766-By              | 2019-07          | 2022-07         |
| 2.47    | TD1.5-10kg             | EUT Tilt Device (Rohacell)            | Maturo GmbH                   | TD1.5-10kg/024/3790709 |                  |                 |
| 2.48    | Innco Systems CO3000   | Controller for bore sight mast SAC    | innco systems GmbH            | CO3000/967/39371016/L  |                  |                 |
| 2.49    | NRV-Z1                 | Sensor Head B                         | Rohde & Schwarz GmbH & Co. KG | 827753/006             | 2020-08          | 2021-08         |
| 2.50    | HF 907-2               | Double-ridged horn                    | Rohde & Schwarz               | 102817                 | 2019-04          | 2022-04         |
| 2.51    | PAS 2.5 - 10 kg        | Antenna Mast                          | Maturo GmbH                   | -                      |                  |                 |
| 2.52    | AFS42-00101800-25-S-42 | Broadband Amplifier 25 MHz - 18 GHz   | Miteq                         | 2035324                |                  |                 |
| 2.53    | AM 4.0                 | Antenna Mast 4 m                      | Maturo GmbH                   | AM4.0/180/11920513     |                  |                 |
| 2.54    | HF 907                 | Double-ridged horn                    | Rohde & Schwarz               | 102444                 | 2018-07          | 2021-07         |

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

## 7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

### 7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

| Frequency<br>MHz | Corr.<br>dB | LISN<br>insertion<br>loss<br>ESH3-<br>Z5<br>dB | cable<br>loss<br>(incl. 10<br>dB<br>atten-<br>uator)<br>dB |
|------------------|-------------|------------------------------------------------|------------------------------------------------------------|
| 0.15             | 10.1        | 0.1                                            | 10.0                                                       |
| 5                | 10.3        | 0.1                                            | 10.2                                                       |
| 7                | 10.5        | 0.2                                            | 10.3                                                       |
| 10               | 10.5        | 0.2                                            | 10.3                                                       |
| 12               | 10.7        | 0.3                                            | 10.4                                                       |
| 14               | 10.7        | 0.3                                            | 10.4                                                       |
| 16               | 10.8        | 0.4                                            | 10.4                                                       |
| 18               | 10.9        | 0.4                                            | 10.5                                                       |
| 20               | 10.9        | 0.4                                            | 10.5                                                       |
| 22               | 11.1        | 0.5                                            | 10.6                                                       |
| 24               | 11.1        | 0.5                                            | 10.6                                                       |
| 26               | 11.2        | 0.5                                            | 10.7                                                       |
| 28               | 11.2        | 0.5                                            | 10.7                                                       |
| 30               | 11.3        | 0.5                                            | 10.8                                                       |

#### Sample calculation

$$U_{\text{LISN}} \text{ (dB } \mu\text{V)} = U \text{ (dB } \mu\text{V)} + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

## 7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

| Frequency<br>MHz | AF<br>HFH-Z2)<br>dB (1/m) | Corr.<br>dB | cable<br>loss 1<br>(inside<br>chamber)<br>dB | cable<br>loss 2<br>(outside<br>chamber)<br>dB | cable<br>loss 3<br>(switch<br>unit)<br>dB | cable<br>loss 4<br>(to<br>receiver)<br>dB | distance<br>corr.<br>(-40 dB/<br>decade)<br>dB | d <sub>Limit</sub><br>(meas.<br>distance<br>(limit)<br>m | d <sub>used</sub><br>(meas.<br>distance<br>(used)<br>m |
|------------------|---------------------------|-------------|----------------------------------------------|-----------------------------------------------|-------------------------------------------|-------------------------------------------|------------------------------------------------|----------------------------------------------------------|--------------------------------------------------------|
| 0.009            | 20.50                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.01             | 20.45                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.015            | 20.37                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.02             | 20.36                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.025            | 20.38                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.03             | 20.32                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.05             | 20.35                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.08             | 20.30                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.1              | 20.20                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.2              | 20.17                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.3              | 20.14                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.49             | 20.12                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.490001         | 20.12                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 0.5              | 20.11                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 0.8              | 20.10                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 1                | 20.09                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 2                | 20.08                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 3                | 20.06                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 4                | 20.05                     | -39.5       | 0.2                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 5                | 20.05                     | -39.5       | 0.2                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 6                | 20.02                     | -39.5       | 0.2                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 8                | 19.95                     | -39.5       | 0.2                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 10               | 19.83                     | -39.4       | 0.2                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 12               | 19.71                     | -39.4       | 0.2                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 14               | 19.54                     | -39.4       | 0.2                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 16               | 19.53                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 18               | 19.50                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 20               | 19.57                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 22               | 19.61                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 24               | 19.61                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 26               | 19.54                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 28               | 19.46                     | -39.2       | 0.3                                          | 0.1                                           | 0.3                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 30               | 19.73                     | -39.1       | 0.4                                          | 0.1                                           | 0.3                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |

### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction =  $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

### 7.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

( $d_{Limit} = 3\text{ m}$ )

| Frequency | AF R&S HL562 | Corr. |
|-----------|--------------|-------|
| MHz       | dB (1/m)     | dB    |
| 30        | 18.6         | 0.6   |
| 50        | 6.0          | 0.9   |
| 100       | 9.7          | 1.2   |
| 150       | 7.9          | 1.6   |
| 200       | 7.6          | 1.9   |
| 250       | 9.5          | 2.1   |
| 300       | 11.0         | 2.3   |
| 350       | 12.4         | 2.6   |
| 400       | 13.6         | 2.9   |
| 450       | 14.7         | 3.1   |
| 500       | 15.6         | 3.2   |
| 550       | 16.3         | 3.5   |
| 600       | 17.2         | 3.5   |
| 650       | 18.1         | 3.6   |
| 700       | 18.5         | 3.6   |
| 750       | 19.1         | 4.1   |
| 800       | 19.6         | 4.1   |
| 850       | 20.1         | 4.4   |
| 900       | 20.8         | 4.7   |
| 950       | 21.1         | 4.8   |
| 1000      | 21.6         | 4.9   |

| cable loss 1 (inside chamber) | cable loss 2 (outside chamber) | cable loss 3 (switch unit) | cable loss 4 (to receiver) | distance corr. (-20 dB/decade) | $d_{Limit}$ (meas. distance (limit)) | $d_{used}$ (meas. distance (used)) |
|-------------------------------|--------------------------------|----------------------------|----------------------------|--------------------------------|--------------------------------------|------------------------------------|
| dB                            | dB                             | dB                         | dB                         | dB                             | m                                    | m                                  |
| 0.29                          | 0.04                           | 0.23                       | 0.02                       | 0.0                            | 3                                    | 3                                  |
| 0.39                          | 0.09                           | 0.32                       | 0.08                       | 0.0                            | 3                                    | 3                                  |
| 0.56                          | 0.14                           | 0.47                       | 0.08                       | 0.0                            | 3                                    | 3                                  |
| 0.73                          | 0.20                           | 0.59                       | 0.12                       | 0.0                            | 3                                    | 3                                  |
| 0.84                          | 0.21                           | 0.70                       | 0.11                       | 0.0                            | 3                                    | 3                                  |
| 0.98                          | 0.24                           | 0.80                       | 0.13                       | 0.0                            | 3                                    | 3                                  |
| 1.04                          | 0.26                           | 0.89                       | 0.15                       | 0.0                            | 3                                    | 3                                  |
| 1.18                          | 0.31                           | 0.96                       | 0.13                       | 0.0                            | 3                                    | 3                                  |
| 1.28                          | 0.35                           | 1.03                       | 0.19                       | 0.0                            | 3                                    | 3                                  |
| 1.39                          | 0.38                           | 1.11                       | 0.22                       | 0.0                            | 3                                    | 3                                  |
| 1.44                          | 0.39                           | 1.20                       | 0.19                       | 0.0                            | 3                                    | 3                                  |
| 1.55                          | 0.46                           | 1.24                       | 0.23                       | 0.0                            | 3                                    | 3                                  |
| 1.59                          | 0.43                           | 1.29                       | 0.23                       | 0.0                            | 3                                    | 3                                  |
| 1.67                          | 0.34                           | 1.35                       | 0.22                       | 0.0                            | 3                                    | 3                                  |
| 1.67                          | 0.42                           | 1.41                       | 0.15                       | 0.0                            | 3                                    | 3                                  |
| 1.87                          | 0.54                           | 1.46                       | 0.25                       | 0.0                            | 3                                    | 3                                  |
| 1.90                          | 0.46                           | 1.51                       | 0.25                       | 0.0                            | 3                                    | 3                                  |
| 1.99                          | 0.60                           | 1.56                       | 0.27                       | 0.0                            | 3                                    | 3                                  |
| 2.14                          | 0.60                           | 1.63                       | 0.29                       | 0.0                            | 3                                    | 3                                  |
| 2.22                          | 0.60                           | 1.66                       | 0.33                       | 0.0                            | 3                                    | 3                                  |
| 2.23                          | 0.61                           | 1.71                       | 0.30                       | 0.0                            | 3                                    | 3                                  |

( $d_{Limit} = 10\text{ m}$ )

|      |      |      |
|------|------|------|
| 30   | 18.6 | -9.9 |
| 50   | 6.0  | -9.6 |
| 100  | 9.7  | -9.2 |
| 150  | 7.9  | -8.8 |
| 200  | 7.6  | -8.6 |
| 250  | 9.5  | -8.3 |
| 300  | 11.0 | -8.1 |
| 350  | 12.4 | -7.9 |
| 400  | 13.6 | -7.6 |
| 450  | 14.7 | -7.4 |
| 500  | 15.6 | -7.2 |
| 550  | 16.3 | -7.0 |
| 600  | 17.2 | -6.9 |
| 650  | 18.1 | -6.9 |
| 700  | 18.5 | -6.8 |
| 750  | 19.1 | -6.3 |
| 800  | 19.6 | -6.3 |
| 850  | 20.1 | -6.0 |
| 900  | 20.8 | -5.8 |
| 950  | 21.1 | -5.6 |
| 1000 | 21.6 | -5.6 |

|      |      |      |      |       |    |   |
|------|------|------|------|-------|----|---|
| 0.29 | 0.04 | 0.23 | 0.02 | -10.5 | 10 | 3 |
| 0.39 | 0.09 | 0.32 | 0.08 | -10.5 | 10 | 3 |
| 0.56 | 0.14 | 0.47 | 0.08 | -10.5 | 10 | 3 |
| 0.73 | 0.20 | 0.59 | 0.12 | -10.5 | 10 | 3 |
| 0.84 | 0.21 | 0.70 | 0.11 | -10.5 | 10 | 3 |
| 0.98 | 0.24 | 0.80 | 0.13 | -10.5 | 10 | 3 |
| 1.04 | 0.26 | 0.89 | 0.15 | -10.5 | 10 | 3 |
| 1.18 | 0.31 | 0.96 | 0.13 | -10.5 | 10 | 3 |
| 1.28 | 0.35 | 1.03 | 0.19 | -10.5 | 10 | 3 |
| 1.39 | 0.38 | 1.11 | 0.22 | -10.5 | 10 | 3 |
| 1.44 | 0.39 | 1.20 | 0.19 | -10.5 | 10 | 3 |
| 1.55 | 0.46 | 1.24 | 0.23 | -10.5 | 10 | 3 |
| 1.59 | 0.43 | 1.29 | 0.23 | -10.5 | 10 | 3 |
| 1.67 | 0.34 | 1.35 | 0.22 | -10.5 | 10 | 3 |
| 1.67 | 0.42 | 1.41 | 0.15 | -10.5 | 10 | 3 |
| 1.87 | 0.54 | 1.46 | 0.25 | -10.5 | 10 | 3 |
| 1.90 | 0.46 | 1.51 | 0.25 | -10.5 | 10 | 3 |
| 1.99 | 0.60 | 1.56 | 0.27 | -10.5 | 10 | 3 |
| 2.14 | 0.60 | 1.63 | 0.29 | -10.5 | 10 | 3 |
| 2.22 | 0.60 | 1.66 | 0.33 | -10.5 | 10 | 3 |
| 2.23 | 0.61 | 1.71 | 0.30 | -10.5 | 10 | 3 |

#### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction =  $-20 * \text{LOG} (d_{Limit} / d_{used})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

### 7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

| Frequency<br>MHz | AF<br>R&S<br>HF907<br>dB (1/m) | Corr.<br>dB |
|------------------|--------------------------------|-------------|
| 1000             | 24.4                           | -19.4       |
| 2000             | 28.5                           | -17.4       |
| 3000             | 31.0                           | -16.1       |
| 4000             | 33.1                           | -14.7       |
| 5000             | 34.4                           | -13.7       |
| 6000             | 34.7                           | -12.7       |
| 7000             | 35.6                           | -11.0       |

| cable<br>loss 1<br>(relay +<br>cable<br>inside<br>chamber)<br>dB | cable<br>loss 2<br>(outside<br>chamber)<br>dB | cable<br>loss 3<br>(switch<br>unit,<br>atten-<br>uator &<br>pre-amp)<br>dB | cable<br>loss 4 (to<br>receiver)<br>dB |
|------------------------------------------------------------------|-----------------------------------------------|----------------------------------------------------------------------------|----------------------------------------|
| 0.99                                                             | 0.31                                          | -21.51                                                                     | 0.79                                   |
| 1.44                                                             | 0.44                                          | -20.63                                                                     | 1.38                                   |
| 1.87                                                             | 0.53                                          | -19.85                                                                     | 1.33                                   |
| 2.41                                                             | 0.67                                          | -19.13                                                                     | 1.31                                   |
| 2.78                                                             | 0.86                                          | -18.71                                                                     | 1.40                                   |
| 2.74                                                             | 0.90                                          | -17.83                                                                     | 1.47                                   |
| 2.82                                                             | 0.86                                          | -16.19                                                                     | 1.46                                   |

| Frequency<br>MHz | AF<br>R&S<br>HF907<br>dB (1/m) | Corr.<br>dB |
|------------------|--------------------------------|-------------|
| 3000             | 31.0                           | -23.4       |
| 4000             | 33.1                           | -23.3       |
| 5000             | 34.4                           | -21.7       |
| 6000             | 34.7                           | -21.2       |
| 7000             | 35.6                           | -19.8       |

| cable<br>loss 1<br>(relay<br>inside<br>chamber)<br>dB | cable<br>loss 2<br>(inside<br>chamber)<br>dB | cable<br>loss 3<br>(outside<br>chamber)<br>dB | cable<br>loss 4<br>(switch<br>unit,<br>atten-<br>uator &<br>pre-amp)<br>dB | cable<br>loss 5 (to<br>receiver)<br>dB | used<br>for<br>FCC<br>15.247 |
|-------------------------------------------------------|----------------------------------------------|-----------------------------------------------|----------------------------------------------------------------------------|----------------------------------------|------------------------------|
| 0.47                                                  | 1.87                                         | 0.53                                          | -27.58                                                                     | 1.33                                   |                              |
| 0.56                                                  | 2.41                                         | 0.67                                          | -28.23                                                                     | 1.31                                   |                              |
| 0.61                                                  | 2.78                                         | 0.86                                          | -27.35                                                                     | 1.40                                   |                              |
| 0.58                                                  | 2.74                                         | 0.90                                          | -26.89                                                                     | 1.47                                   |                              |
| 0.66                                                  | 2.82                                         | 0.86                                          | -25.58                                                                     | 1.46                                   |                              |

| Frequency<br>MHz | AF<br>R&S<br>HF907<br>dB (1/m) | Corr.<br>dB |
|------------------|--------------------------------|-------------|
| 7000             | 35.6                           | -57.3       |
| 8000             | 36.3                           | -56.3       |
| 9000             | 37.1                           | -55.3       |
| 10000            | 37.5                           | -56.2       |
| 11000            | 37.5                           | -55.3       |
| 12000            | 37.6                           | -53.7       |
| 13000            | 38.2                           | -53.5       |
| 14000            | 39.9                           | -56.3       |
| 15000            | 40.9                           | -54.1       |
| 16000            | 41.3                           | -54.1       |
| 17000            | 42.8                           | -54.4       |
| 18000            | 44.2                           | -54.7       |

| cable<br>loss 1<br>(relay<br>inside<br>chamber)<br>dB | cable<br>loss 2<br>(High<br>Pass)<br>dB | cable<br>loss 3<br>(pre-<br>amp)<br>dB | cable<br>loss 4<br>(inside<br>chamber)<br>dB | cable<br>loss 5<br>(outside<br>chamber)<br>dB | cable<br>loss 6<br>(to<br>receiver)<br>dB |
|-------------------------------------------------------|-----------------------------------------|----------------------------------------|----------------------------------------------|-----------------------------------------------|-------------------------------------------|
| 0.56                                                  | 1.28                                    | -62.72                                 | 2.66                                         | 0.94                                          | 1.46                                      |
| 0.69                                                  | 0.71                                    | -61.49                                 | 2.84                                         | 1.00                                          | 1.53                                      |
| 0.68                                                  | 0.65                                    | -60.80                                 | 3.06                                         | 1.09                                          | 1.60                                      |
| 0.70                                                  | 0.54                                    | -61.91                                 | 3.28                                         | 1.20                                          | 1.67                                      |
| 0.80                                                  | 0.61                                    | -61.40                                 | 3.43                                         | 1.27                                          | 1.70                                      |
| 0.84                                                  | 0.42                                    | -59.70                                 | 3.53                                         | 1.26                                          | 1.73                                      |
| 0.83                                                  | 0.44                                    | -59.81                                 | 3.75                                         | 1.32                                          | 1.83                                      |
| 0.91                                                  | 0.53                                    | -63.03                                 | 3.91                                         | 1.40                                          | 1.77                                      |
| 0.98                                                  | 0.54                                    | -61.05                                 | 4.02                                         | 1.44                                          | 1.83                                      |
| 1.23                                                  | 0.49                                    | -61.51                                 | 4.17                                         | 1.51                                          | 1.85                                      |
| 1.36                                                  | 0.76                                    | -62.36                                 | 4.34                                         | 1.53                                          | 2.00                                      |
| 1.70                                                  | 0.53                                    | -62.88                                 | 4.41                                         | 1.55                                          | 1.91                                      |

#### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.



### 7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

| Frequency<br>MHz | AF<br>EMCO<br>3160-09<br>dB (1/m) | Corr.<br>dB |
|------------------|-----------------------------------|-------------|
| 18000            | 40.2                              | -23.5       |
| 18500            | 40.2                              | -23.2       |
| 19000            | 40.2                              | -22.0       |
| 19500            | 40.3                              | -21.3       |
| 20000            | 40.3                              | -20.3       |
| 20500            | 40.3                              | -19.9       |
| 21000            | 40.3                              | -19.1       |
| 21500            | 40.3                              | -19.1       |
| 22000            | 40.3                              | -18.7       |
| 22500            | 40.4                              | -19.0       |
| 23000            | 40.4                              | -19.5       |
| 23500            | 40.4                              | -19.3       |
| 24000            | 40.4                              | -19.8       |
| 24500            | 40.4                              | -19.5       |
| 25000            | 40.4                              | -19.3       |
| 25500            | 40.5                              | -20.4       |
| 26000            | 40.5                              | -21.3       |
| 26500            | 40.5                              | -21.1       |

| cable<br>loss 1<br>(inside<br>chamber)<br>dB | cable<br>loss 2<br>(pre-<br>amp)<br>dB | cable<br>loss 3<br>(inside<br>chamber)<br>dB | cable<br>loss 4<br>(switch<br>unit)<br>dB | cable<br>loss 5<br>(to<br>receiver)<br>dB |
|----------------------------------------------|----------------------------------------|----------------------------------------------|-------------------------------------------|-------------------------------------------|
| 0.72                                         | -35.85                                 | 6.20                                         | 2.81                                      | 2.65                                      |
| 0.69                                         | -35.71                                 | 6.46                                         | 2.76                                      | 2.59                                      |
| 0.76                                         | -35.44                                 | 6.69                                         | 3.15                                      | 2.79                                      |
| 0.74                                         | -35.07                                 | 7.04                                         | 3.11                                      | 2.91                                      |
| 0.72                                         | -34.49                                 | 7.30                                         | 3.07                                      | 3.05                                      |
| 0.78                                         | -34.46                                 | 7.48                                         | 3.12                                      | 3.15                                      |
| 0.87                                         | -34.07                                 | 7.61                                         | 3.20                                      | 3.33                                      |
| 0.90                                         | -33.96                                 | 7.47                                         | 3.28                                      | 3.19                                      |
| 0.89                                         | -33.57                                 | 7.34                                         | 3.35                                      | 3.28                                      |
| 0.87                                         | -33.66                                 | 7.06                                         | 3.75                                      | 2.94                                      |
| 0.88                                         | -33.75                                 | 6.92                                         | 3.77                                      | 2.70                                      |
| 0.90                                         | -33.35                                 | 6.99                                         | 3.52                                      | 2.66                                      |
| 0.88                                         | -33.99                                 | 6.88                                         | 3.88                                      | 2.58                                      |
| 0.91                                         | -33.89                                 | 7.01                                         | 3.93                                      | 2.51                                      |
| 0.88                                         | -33.00                                 | 6.72                                         | 3.96                                      | 2.14                                      |
| 0.89                                         | -34.07                                 | 6.90                                         | 3.66                                      | 2.22                                      |
| 0.86                                         | -35.11                                 | 7.02                                         | 3.69                                      | 2.28                                      |
| 0.90                                         | -35.20                                 | 7.15                                         | 3.91                                      | 2.36                                      |

#### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

| Frequency<br>GHz | AF<br>EMCO<br>3160-10<br>dB (1/m) | Corr.<br>dB | cable<br>loss 1<br>(inside<br>chamber)<br>dB | cable<br>loss 2<br>(outside<br>chamber)<br>dB | cable<br>loss 3<br>(switch<br>unit)<br>dB | cable<br>loss 4<br>(to<br>receiver)<br>dB | distance<br>corr.<br>(-20 dB/<br>decade)<br>dB | d <sub>Limit</sub><br>(meas.<br>distance<br>(limit))<br>m | d <sub>used</sub><br>(meas.<br>distance<br>(used))<br>m |
|------------------|-----------------------------------|-------------|----------------------------------------------|-----------------------------------------------|-------------------------------------------|-------------------------------------------|------------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------|
| 26.5             | 43.4                              | -11.2       | 4.4                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 27.0             | 43.4                              | -11.2       | 4.4                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 28.0             | 43.4                              | -11.1       | 4.5                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 29.0             | 43.5                              | -11.0       | 4.6                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 30.0             | 43.5                              | -10.9       | 4.7                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 31.0             | 43.5                              | -10.8       | 4.7                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 32.0             | 43.5                              | -10.7       | 4.8                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 33.0             | 43.6                              | -10.7       | 4.9                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 34.0             | 43.6                              | -10.6       | 5.0                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 35.0             | 43.6                              | -10.5       | 5.1                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 36.0             | 43.6                              | -10.4       | 5.1                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 37.0             | 43.7                              | -10.3       | 5.2                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 38.0             | 43.7                              | -10.2       | 5.3                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 39.0             | 43.7                              | -10.2       | 5.4                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |
| 40.0             | 43.8                              | -10.1       | 5.5                                          |                                               |                                           |                                           | -9.5                                           | 3                                                         | 1.0                                                     |

### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction =  $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$


Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 8 MEASUREMENT UNCERTAINTIES

| Test Case                            | Parameter          | Uncertainty            |
|--------------------------------------|--------------------|------------------------|
| AC Power Line                        | Power              | ± 3.4 dB               |
| Field Strength of spurious radiation | Power              | ± 5.5 dB               |
| 6 dB / 26 dB / 99% Bandwidth         | Power<br>Frequency | ± 2.9 dB<br>± 11.2 kHz |
| Conducted Output Power               | Power              | ± 2.2 dB               |
| Band Edge Compliance                 | Power<br>Frequency | ± 2.2 dB<br>± 11.2 kHz |
| Frequency Stability                  | Frequency          | ± 25 Hz                |
| Power Spectral Density               | Power              | ± 2.2 dB               |

The measurement uncertainties for all parameters are calculated with an expansion factor (coverage factor)  $k = 1.96$ . This means, that the true value is in the corresponding interval with a probability of 95 %.

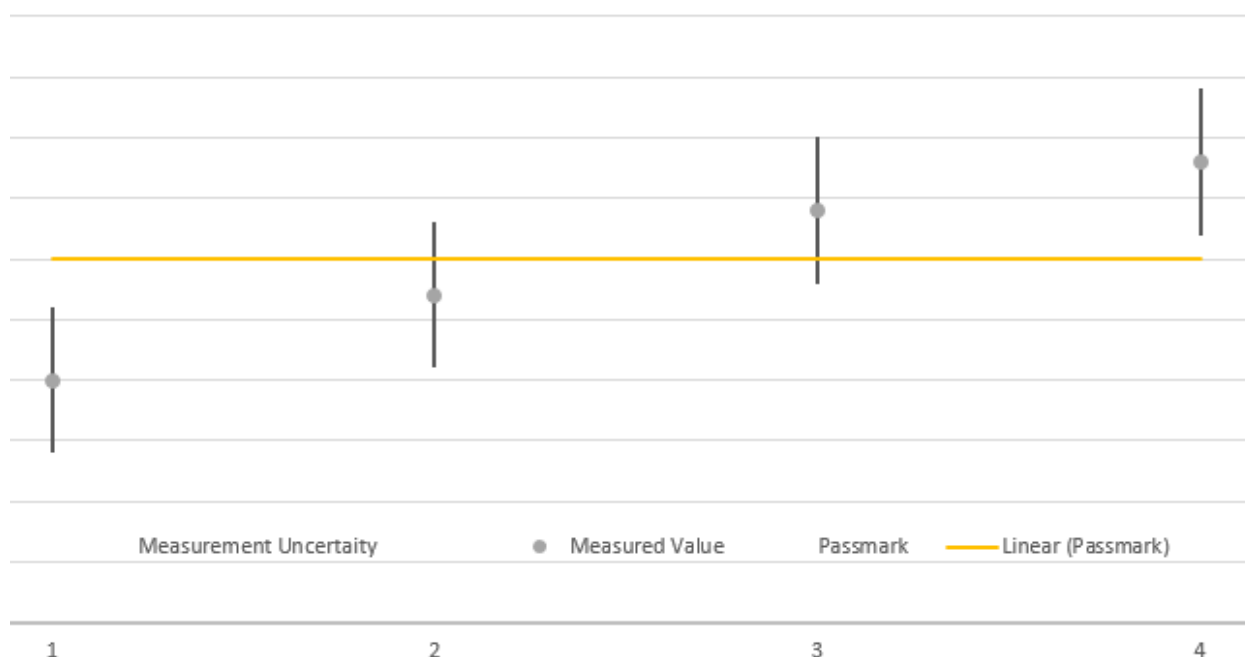

The verdicts in this test report are given according the above diagram:

| Case | Measured Value  | Uncertainty Range | Verdict |
|------|-----------------|-------------------|---------|
| 1    | below pass mark | below pass mark   | Passed  |
| 2    | below pass mark | within pass mark  | Passed  |
| 3    | above pass mark | within pass mark  | Failed  |
| 4    | above pass mark | above pass mark   | Failed  |

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so called shared risk principle.

## 9 PHOTO REPORT

Please see separate photo report.