


CLASSIFIED

**PROPRIETARY INFORMATION**  
 ALL RIGHTS RESERVED. NO PARTS OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM, OR TRANSMITTED, IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE, WITHOUT THE PRIOR WRITTEN PERMISSION OF TELEMATICS WIRELESS LTD. NOR USED IN WHOLE OR IN PART FOR ANY PURPOSE OR FOR ANY CUSTOMER EXCEPT TELEMATICS WIRELESS.

REV	△	DESCRIPTION	CHNGD SHEET	E. C. N	DATE	DRAWN	CHECKED
A				1334	13/10/13		

**NOTES:**

- MATERIAL: WHITE POLYESTER SELF ADHESIVE FILM.  
(SUCH AS "WP" MADE BY EPC)
- BAR CODING SHALL BE ACCORDING TO CODE 39.
- MARKING: HIGH DURABILITY AND SOLVENT RESISTANCE BLACK MARKING  
(USING THERMAL TRANSFER BLACK RIBBON SUCH AS "RHD" MADE BY EPC).
- THE LABEL MATERIAL SHALL BE CAPABLE OF WITHSTANDING A TEMPERATURE RANGE OF -45°C TO +100°C, AND THE DELETERIOUS EFFECTS CAUSED BY:
  - CONFORMAL COATING (ALL TYPES)
  - SALT SPRAY
- THE ADHESIVE SHALL BE APPROPRIATE FOR AFFIXING THE LABEL TO SURFACES SUCH AS GLASS EPOXY, ALUMINUM, PLASTIC AND ALLOW THE LABEL TO BE REMOVED QUICKLY WITHOUT LEAVING ADHESIVE TRACES ON THE SURFACE.
- THE LABELS WILL BE SUPPLIED ROLLED.
- S/N XXXXXX  
XXXXXX - CONSECUTIVE NUMERICAL NUMBERS.
- THE FOLLOWING INFORMATION WILL BE PROVIDED TO THE MANUFACTURER WITH EACH PURCHASING ORDER:
  - STARTING S/N (FIRST XXXXXX)

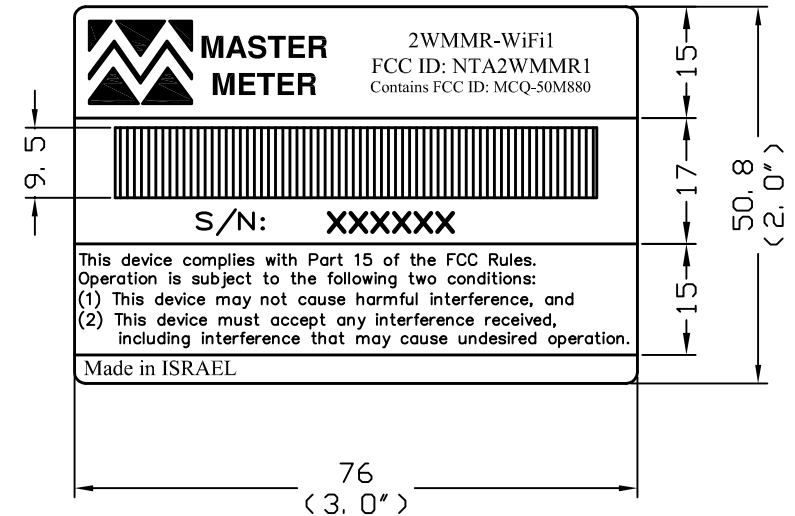

NO.	PART NO.	NAME	DESCRIPTION	U/M	QTY	NOTES
		NAME:  BARCODE 2WMMR WIF1	PROCESSING LEVEL			
UNLESS OTHERWISE SPECIFIED:			OPERATION	CATALOG NO.		
ALL DIMENSIONS ARE IN MM.						
TOLERANCES: LINEAR ± - ANGLES ± -						
ROUGHNESS: √ (<√ √>)		PROD/PROJ: 2WMMR	DESIGNED	M. K.	13/10/13	SHEET/DF 1/1
		CHECKED	Y. L.	13/10/13		
		APPROVED	A. S.	13/10/13		
		Q. A.	D. Q.	13/10/13		
SCALE: 1: 1			213973436000			SIZE B

 **MASTER  
METER** 2WMMR-WiFi1  
FCC ID: NTA2WMMR1  
Contain FCC ID: MCQ-50M880

---

  
S/N: 2000

---

This device complies with Part 15 of the FCC Rules.  
Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) This device must accept any interference received,  
including interference that may cause undesired operation.

Made in ISRAEL


CLASSIFIED

**PROPRIETARY INFORMATION**  
 ALL RIGHTS RESERVED. NO PARTS OF THIS DOCUMENT MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM, OR TRANSMITTED, IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE, WITHOUT THE PRIOR WRITTEN PERMISSION OF TELEMATICS WIRELESS LTD. NOR USED IN WHOLE OR IN PART FOR ANY PURPOSE OR FOR ANY CUSTOMER EXCEPT TELEMATICS WIRELESS.

REV	△	DESCRIPTION	CHNGD SHEET	E. C. N	DATE	DRAWN	CHECKED
A				1334	13/10/13		

**NOTES:**

- MATERIAL: WHITE POLYESTER SELF ADHESIVE FILM.  
(SUCH AS "WP" MADE BY EPC)
- BAR CODING SHALL BE ACCORDING TO CODE 39.
- MARKING: HIGH DURABILITY AND SOLVENT RESISTANCE BLACK MARKING  
(USING THERMAL TRANSFER BLACK RIBBON SUCH AS "RHD" MADE BY EPC).
- THE LABEL MATERIAL SHALL BE CAPABLE OF WITHSTANDING A TEMPERATURE RANGE OF -45°C TO +100°C, AND THE DELETERIOUS EFFECTS CAUSED BY:
  - CONFORMAL COATING (ALL TYPES)
  - SALT SPRAY
- THE ADHESIVE SHALL BE APPROPRIATE FOR AFFIXING THE LABEL TO SURFACES SUCH AS GLASS EPOXY, ALUMINUM, PLASTIC AND ALLOW THE LABEL TO BE REMOVED QUICKLY WITHOUT LEAVING ADHESIVE TRACES ON THE SURFACE.
- THE LABELS WILL BE SUPPLIED ROLLED.
- S/N XXXXXX  
XXXXXX - CONSECUTIVE NUMERICAL NUMBERS.
- THE FOLLOWING INFORMATION WILL BE PROVIDED TO THE MANUFACTURER WITH EACH PURCHASING ORDER:
  - STARTING S/N (FIRST XXXXXX)

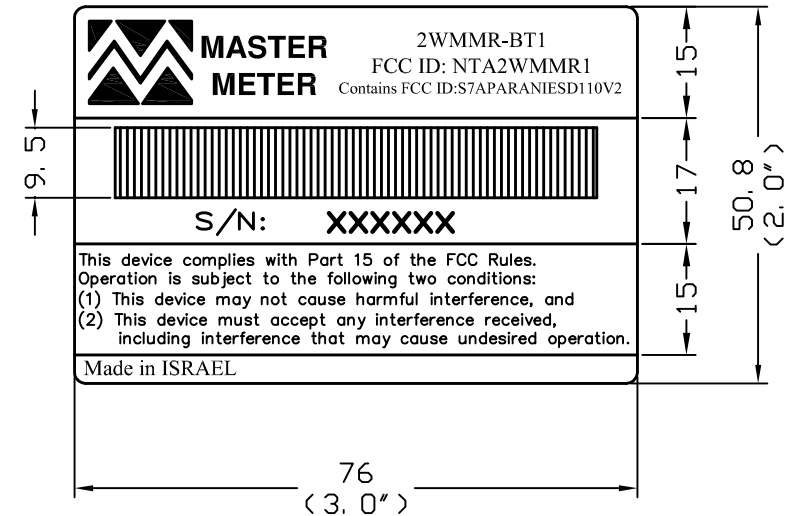

NO.	PART NO.	NAME	DESCRIPTION	U/M	QTY	NOTES	
		NAME:	PROCESSING LEVEL				
		ALL DIMENSIONS ARE IN MM.	OPERATION	CATALOG NO.			
		TOLERANCES: LINEAR ± - ANGLES ± -					
		ROUGHNESS: √ (√ √)					
		PROD/PROJ: 2WMMR	DESIGNED	M. K.	13/10/13	SHEET/DF	
			CHECKED	Y. L.	13/10/13	1/1	
			APPROVED	A. S.	13/10/13		
			Q. A.	D. Q.	13/10/13		
		SCALE: 1: 1	213973460000				SIZE B

 **MASTER  
METER** 2WMMR-BT1  
FCC ID: NTA2WMMR1  
Cortain FCC ID: STAPARANESD119V2

  
S/N: 3000

This device complies with Part 15 of the FCC Rules.  
Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) This device must accept any interference received,  
including interference that may cause undesired operation.

Made in ISRAEL