



HERMON LABORATORIES



Hermon Laboratories Ltd.  
P.O.Box 23  
Binyamina 30500, Israel  
Tel. +972 46288001  
Fax. +972 46288277  
e-mail: [mail@hermonlabs.com](mailto:mail@hermonlabs.com)

## ELECTROMAGNETIC EMISSIONS TEST REPORT

according to 47CFR Part 90, subpart I and part 15, subpart B  
for

**Telematics Wireless Ltd.**

EQUIPMENT UNDER TEST:

**Monitoring service reader**

**Model:FP100RA 1W**

This report is in conformity with ISO/IEC 17025. The A2LA logo endorsement applies only to the test methods and the standards that are listed in the scope of Hermon Laboratories accreditation.  
The test results relate only to the items tested. **This test report must not be reproduced in full with the approval of Hermon Laboratories Ltd.**

Page 1 of 82

Document ID: TELRAD\_FCC.15717\_1W.doc  
Date of Issue: March 04



## Contents

<b>1</b>	<b>Project information.....</b>	<b>3</b>
<b>2</b>	<b>Summary and signatures.....</b>	<b>4</b>
<b>3</b>	<b>EUT description .....</b>	<b>5</b>
3.1	GENERAL DESCRIPTION.....	5
3.2	EUT TEST CONFIGURATION .....	5
<b>4</b>	<b>Test results.....</b>	<b>7</b>
4.1	PEAK OUTPUT POWER TEST ACCORDING TO PART 90 §90.205(k).....	7
4.2	OCCUPIED BANDWIDTH ACCORDING TO PART 90 §90.209(5).....	8
4.3	EMISSION MASK AND RADIATED SPURIOUS EMISSIONS TEST ACCORDING TO PART 90 §90.210(k)(3).....	9
4.4	UNINTENTIONAL RADIATED EMISSIONS TEST ACCORDING TO §15.109.....	12
4.5	ANTENNA POWER CONDUCTED TEST ACCORDING TO §15.111.....	15
4.6	FREQUENCY STABILITY MEASUREMENT ACCORDING TO §90.213.....	16
4.7	CONDUCTED EMISSIONS TEST ACCORDING TO §15.107.....	18
	<b>Appendix A Plots .....</b>	<b>21</b>
	<b>Appendix B Test equipment used for tests.....</b>	<b>71</b>
	<b>Appendix C Antenna factors and cable loss.....</b>	<b>73</b>
	<b>Appendix D General information.....</b>	<b>82</b>
	TEST FACILITY DESCRIPTION .....	82
	ABBREVIATIONS AND ACRONYMS .....	82
	SPECIFICATION REFERENCES .....	82



## 1 Project information

### Description of equipment under test

Test items : Monitoring service reader  
Manufacturer : Telematics Wireless Ltd.  
Types (Models) : FP100RA 1W

### Applicant information

Applicant's responsible person : Mr. Roman Sternberg, VP marketing  
Company : Telematics Wireless Ltd.  
Address : 26, Hamelacha street  
P.O.Box : 1911  
City : Holon  
Postal code : 58117  
Country : Israel  
Telephone number : +972-3557 5750  
Telefax number : +972-3557 5753

### Test performance

Project Number: : 15717-1W  
Location : Hermon Laboratories  
Test started : February 25, 2004  
Test completed : February 29, 2004  
Purpose of test : Apparatus compliance verification in accordance with emission requirements  
Test specification(s) : 47CFR part 90, §§90.205, 90.209, 90.210, 90.213,  
part 15 §15.107, §15.109



## 2 Summary and signatures

The EUT, FP100RA 1W reader, was tested according to FCC part 90 subpart I, §§90.205(k), 90.209, 90.210(k)(3), part 15 §§15.107, 15.109 and found to comply with the standard requirements.

Test description	Specification reference	Tested by	Date tested	Test report paragraph	Verdict
RF output power	90.205(k); 2.1046	Mr. Y. Neuman, test engineer	February 29, 2004	4.1	Pass
Occupied bandwidth	90.209; 2.1049	Mr. Y. Neuman, test engineer	February 29, 2004	4.2	Pass
Emission mask	90.210(k)(3); 2.1051	Mr. Y. Neuman, test engineer	February 29, 2004	4.3	Pass
Radiated spurious emissions	90.210; 2.1053	Mr. Y. Neuman, test engineer	February 29, 2004	4.3	Pass
Radiated emissions	15.109	Mr. Y. Neuman, test engineer	January 20, 21, 2004	4.4	Pass
Antenna power conducted	15.111	Mr. Y. Neuman, test engineer	January 21, 2004	4.5	Pass
Frequency stability	90.213, 2.1055	Mr. Y. Neuman, test engineer	December 1, 2003	4.6	Tested
Conducted emissions	15.107	Mr. B. Eφος, test engineer	February 2, 2004	4.7	Pass

**Test report prepared by:**

Mrs. M. Cherniavsky, MScEE, certification engineer

**Test report approved by:**

Mr. Michael Nikishin, MScEE, group leader

Mr. Edward Usoskin, PhD, C.E.O.



### 3 EUT description

#### 3.1 General description

The EUT, a reader, is the roadside component of a vehicle identification system, operating at 912 MHz or 918 MHz with ASK modulation and utilizing external antenna. Data bit rate is 500 kbps. The device is powered from mains via AC/DC adapter.

The frequencies generated or used in the EUT are: 50 kHz, 16 MHz (reference clock), 70 MHz (Tx IF), 422.5 MHz (Tx VCO), 925 MHz (Rx LO).

#### 3.2 EUT test configuration

The EUT ports and lines description is given in Table 3.4.1, support/test equipment list is provided in Table 3.4.2, test configuration is shown in Figure 3.4.1.

The conducted measurements were performed at "Ant main" port because of lesser attenuation from the RF amplifier output (connectors "Ant 1" – "Ant 4" can be used instead of "Ant main", in this case the additional multiplexer is involved, as shown in RF switch block diagram attached to this Application).

**Table 3.2.1**  
**EUT ports and lines**

Port type	Port description	Connector type	Quantity	Cable type description	Cable length, m	Connected to
Power	DC	DC jack	1	Unshielded	1.5	AC/DC adapter
Signal	Host, RS232/422	D-type 9	1	Unshielded	2	PC
Signal	Aux, RS232	D-type 9	1	Unshielded	2	Open circuit
Signal	Maintenance, RS232	D-type 9	1	Unshielded	2	Open circuit
Signal	I/O	D-type 25	1	Unshielded	1	Open circuit
Signal	Antenna	SMA	5	coax	NA	50 Ohm termination


**Table 3.2.2**  
**EUT support/test equipment**

Description	Manufacturer	Model number	Serial number
Laptop with adapter	Toshiba	PA1262E	28012460
ITE power supply (adapter)	Potrans Electrical Corp.	UP30437	1711-030-A



Figure 3.2.1

EUT test configuration

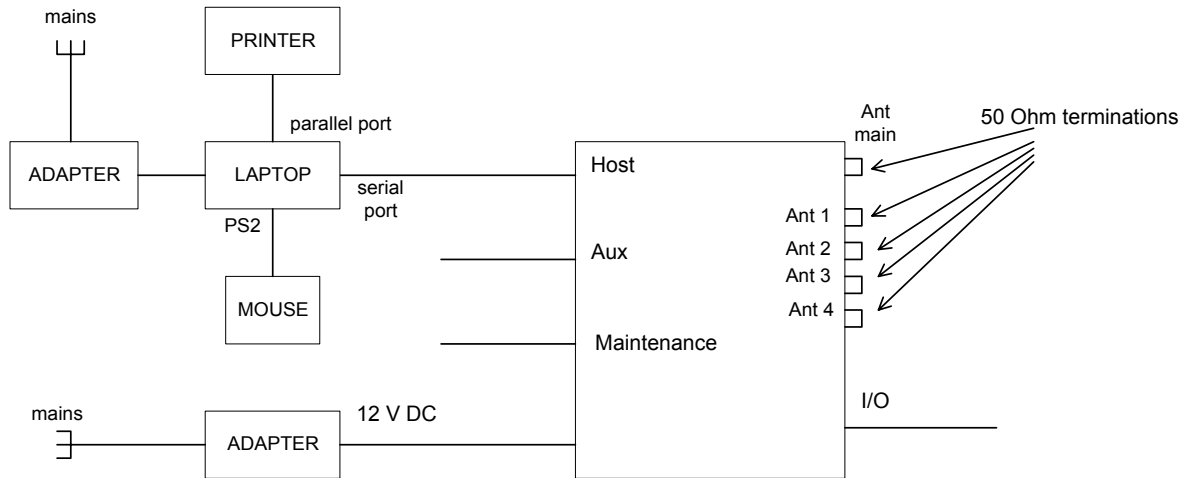



## 4 Test results

### 4.1 Peak output power test according to part 90 §90.205(k)

DATE of TEST: February 29, 2004  
 AMBIENT TEMPERATURE: 21°C  
 RELATIVE HUMIDITY: 50 %  
 AIR PRESSURE: 1012 hPa  
 MEASUREMENT UNCERTAINTY: ±4.5 dB

Carrier frequency, MHz	Peak output power, dBm	Limit, dBm	Margin, dB	Verdict
912.00	29.5	44.7	15.2	Pass
918.00	28.8	44.7	15.9	Pass

#### LIMITATION ON POWER

Operating frequency range, MHz	Maximum effective radiated power (ERP)
902 - 927.25	30 W (44.7 dBm)

#### TEST PROCEDURE

The EUT main antenna port was connected via attenuator to spectrum analyzer and peak output power was measured.

#### TEST EQUIPMENT USED:

HL 0057	HL 1424	HL 2254				
---------	---------	---------	--	--	--	--



## 4.2 Occupied bandwidth according to part 90 §90.209(5)

METHOD OF MEASUREMENTS	ANSI C63.4 §13.1.7
DATE of TEST:	February 29, 2004
AMBIENT TEMPERATURE:	21°C
RELATIVE HUMIDITY:	50 %
AIR PRESSURE:	1012 hPa
MEASUREMENT UNCERTAINTY:	±2.6 dB
CARRIER FREQUENCY:	915.00 MHz

Carrier frequency, MHz	Measured 23 dB bandwidth, MHz	Authorized bandwidth, MHz	Margin, MHz	Reference to Plots in Appendix A	Verdict
912.00	4.30	12	7.70	A1	Pass
918.00	4.33	12	7.67	A2	Pass

### LIMIT

Operating frequency range, MHz	Authorized bandwidth, MHz
909.75 – 921.75	12

### TEST PROCEDURE

The EUT RF output was connected to the spectrum analyzer, which settings are shown in the plots. Spectrum analyzer readings were corrected for external attenuation and cable loss. The measurements were performed at carrier frequency in continuous transmit mode of operation as frequency band between 23 dBc points.

### TEST EQUIPMENT USED:

HL 0057	HL 1424	HL 2254			
---------	---------	---------	--	--	--





### 4.3 Emission mask and radiated spurious emissions test according to part 90 §90.210(k)(3)

METHOD OF MEASUREMENTS	ANSI 63.4 §13.1.4
DATE of TEST:	November 4, 2003
AMBIENT TEMPERATURE:	30°C
RELATIVE HUMIDITY:	38 %
AIR PRESSURE:	1014 hPa
FREQUENCY RANGE:	9 kHz – 9.5 GHz
MEASUREMENT UNCERTAINTY:	±4.3 dB (conducted method) ±4.5 dB (radiated method)

The peak power of any emission shall be attenuated below the power of the highest emission contained within the licensee's sub-band in accordance with the following schedule:

- 1) On any frequency within the authorized bandwidth: zero dB;
- 2) On any frequency outside the licensee's sub-band edges:  $55 + 10 \log (P)$  dB, where (P) is the highest emission (in watts) of the transmitter inside the licensee's sub-band.

#### 4.3.1 Test procedure

**Conducted spurious emissions** were measured at the EUT main antenna terminal in the frequency range from 9 kHz up to 9.5 GHz.

The specified limit  $55 + 10 \log (P)$  was converted in EIRP units – 25 dBm and applied to spurious emissions testing in transmit mode throughout the following frequency ranges:

9 kHz to 909.75 MHz and 921.75 MHz to 9.5 GHz.

Emissions at the lower band edge and at the higher band edge were tested.

The test results were recorded in Table 4.3.1 and shown in Plots A3 to A21.

**Radiated spurious emissions** were measured at 3-m test distance in the anechoic chamber from 9 kHz up to 6.5 GHz and at OATS from 6.5 GHz up to 9.5 GHz:

with the loop antenna in the 9 kHz to 30 MHz range,

the biconilog - in the 30 MHz to 1000 MHz range,

the double ridged guide – in 1 GHz to 9.5 GHz range.

The EUT was set up on the 80 cm height wooden table as shown in Figures 4.3.1 and 4.3.2.

**9 kHz – 30 MHz frequency range.** The loop antenna was positioned with its plane vertical. The loop center was 1 meter above the ground plane. To find maximum radiation the turntable was rotated 360 and the measuring antenna was rotated about its vertical axis.

**30 MHz – 9.5 GHz frequency range.** To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.

The specified limit  $55 + 10 \log (P)$  was converted in 72.4 dB(μV/m) equivalent field strength at 3 m

$E = \sqrt{30Px1.64} / r$ , where

$P = -25 \text{ dBm} = 3 \times 10^{-6} \text{ W}$ , 1.64 is a numeric gain of an ideal dipole, r - 3 meter distance.

$E [\text{dB}\mu\text{V}/\text{m}] = 20 \log \{10^6 \times \sqrt{(30 \times 3 \times 10^{-6} \times 1.64)/3}\} = 72.4 \text{ dB}\mu\text{V}/\text{m}$ .

The test results were recorded in Table 4.3.2 and shown in Plots A22 to A35.

The test equipment was set up as shown in Figures 4.3.3.

The spurious emissions found in 1.0 GHz – 6.5 GHz range were retested by substitution method.

The EUT was replaced with a substitution antenna (double ridge guide for the mentioned range) connected to signal generator. The measuring antenna height was changed from 1 to 4 m to find a maximum radiation from substitution antenna. The level of the signal generator output was adjusted until the previously recorded field strength maximum reading was obtained as depicted in Table 4.3.3.

$$\text{ERP (dBm)} = P_{\text{out gen}} (\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$



Figure 4.3.1

Set up for radiated emissions measurement with loop antenna

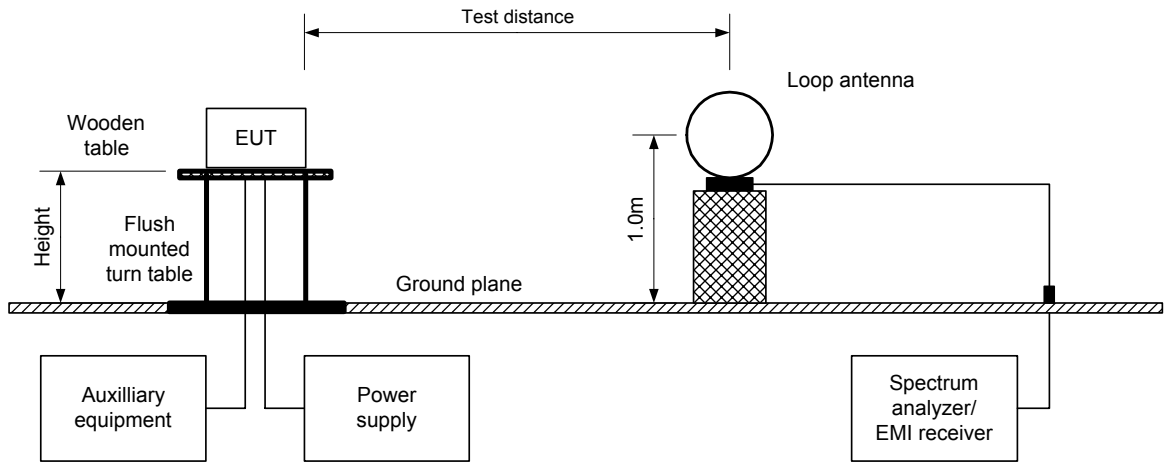


Figure 4.3.2

Set up for radiated emissions measurement with biconilog antenna

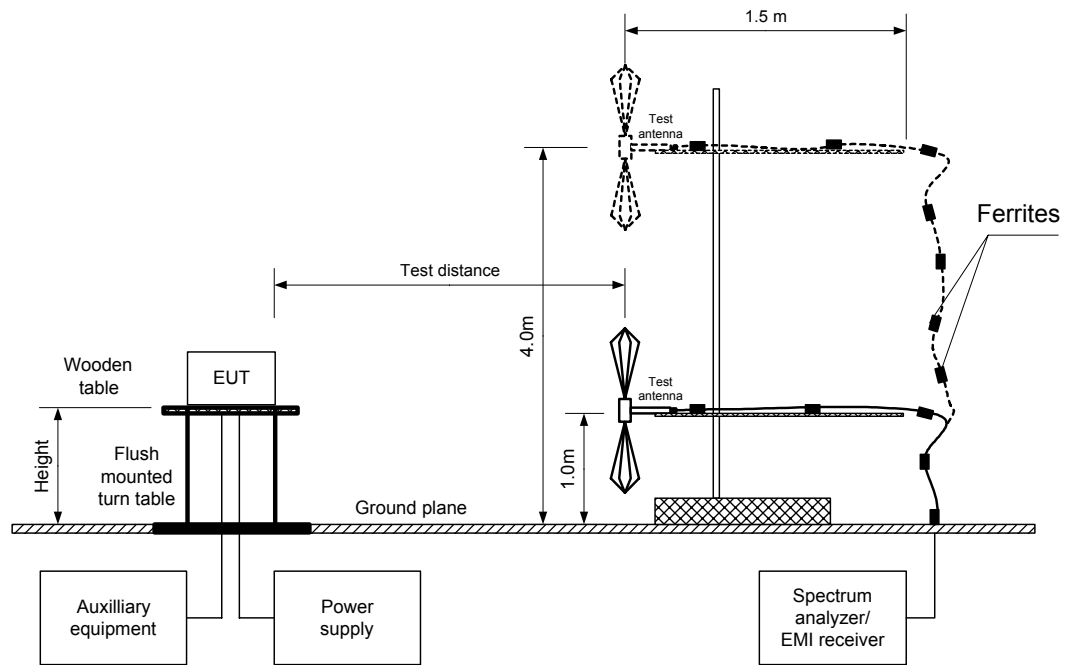
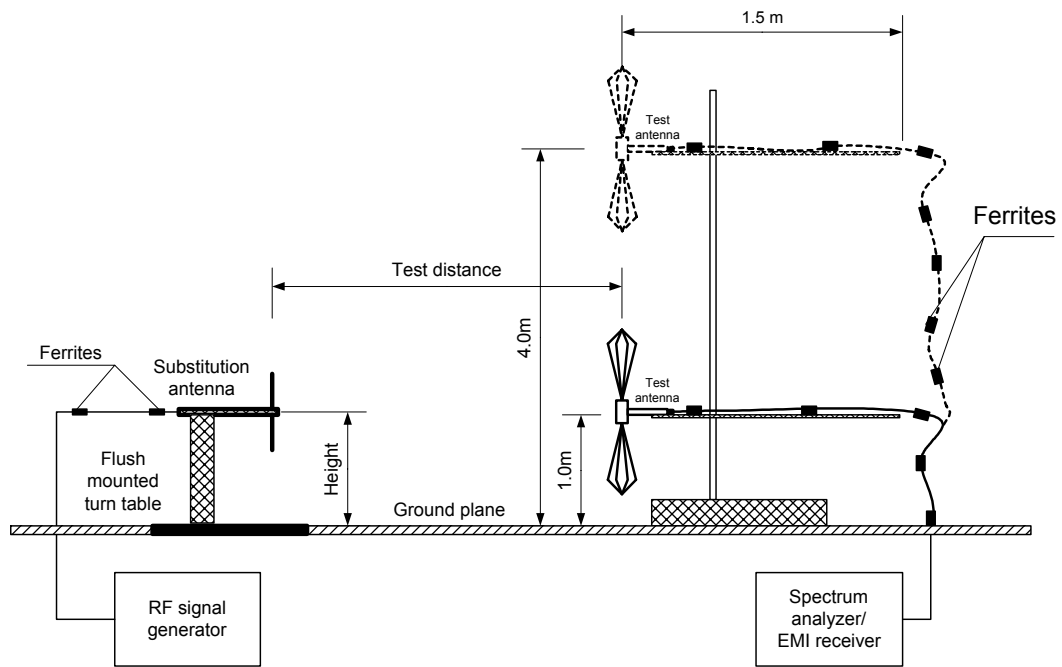




Figure 4.3.3

Setup for substitution ERP measurements of spurious





**Table 4.3.1**  
**Conducted spurious emissions test results**

Frequency, MHz	Spurious emission level, dBm		Margin, dB	Verdict	Reference to Plots in Appendix A
	Measured	Limit			
908.946	-28.94	-25	3.94	Pass	A6
921.978	-35.15	-25	10.15	Pass	A16

**Table 4.3.2**  
**Radiated emissions measurement results**

Frequency, MHz	Field strength of spurious, dB( $\mu$ V/m)	Limit, dB( $\mu$ V/m)	Margin, dB*	Verdict	Reference to Plots in Appendix A
<b>Low carrier frequency 912 MHz</b>					
1824	70.7	72.4	1.7	Pass	A25, A26
2736	65.0	72.4	7.4	Pass	A25
3648	64.2	72.4	8.2	Pass	A25
6384	61.7	72.4	10.7	Pass	A25
<b>High carrier frequency 918 MHz</b>					
1836	67.4	72.4	5.0	Pass	A32, A33
2754	63.3	72.4	9.1	Pass	A32
3672	59.8	72.4	12.6	Pass	A32

\*- Margin = dB below (negative if above) specification limit

The listed in table above test results were obtained throughout measurements with antennas in vertical polarization.

**Table 4.3.3**  
**Substitution ERP of spurious test results**

Frequency, MHz	Field strength, dB( $\mu$ V/m)	RF generator output, dBm	Antenna gain, dBd	Cable loss, dB	Spurious emission, dBm	Limit, dBm	Margin, dB	Verdict
<b>Low carrier frequency 912 MHz</b>								
1824	70.7	-32.3	6.3	0.8+1.7	-28.5	-25	3.5	Pass
2736	65	-39.4	7.0	0.9	-33.3	-25	8.3	Pass
3648	64.2	-39.9	7.1	1.1	-33.9	-25	8.9	Pass
6384	61.7	-43.5	8.8	1.4	-36.1	-25	11.1	Pass
<b>High carrier frequency 918 MHz</b>								
1836	67.4	-34.8	6.4	0.8+1.7	-30.9	-25	5.9	Pass
2754	63.3	-40.8	7.0	0.9	-34.7	-25	9.7	Pass
3672	59.8	-44.1	7.1	1.1	-38.1	-25	13.1	Pass



---

**TEST EQUIPMENT USED FOR CONDUCTED METHOD:**

HL 0057	HL 1200	HL 1424	HL 1430	HL 2254		
---------	---------	---------	---------	---------	--	--

**TEST EQUIPMENT USED IN ANECHOIC CHAMBER:**

HL 0446	HL 0465	HL 0521	HL 0589	HL 0592	HL 0593	HL 0594
HL 0604	HL 0661	HL 1004	HL 1942	HL 1947	HL 1984	HL 2009
HL 2400	HL 2432					

**TEST EQUIPMENT USED AT OPEN AREA TEST SITE:**

HL 0038	HL 0091	HL 0287	HL 0661	HL 1200	HL 1424	HL 1942
HL 1984	HL 2254	HL 2259	HL 2400	HL 2432		



#### 4.4 Unintentional radiated emissions test according to §15.109

METHOD OF MEASUREMENT:	ANSI 63.4 §11.6 / ANSI 63.4 §12.1.4
TEST PERFORMED AT:	Anechoic chamber
DATE of TEST:	January 20, 21, 2004
AMBIENT TEMPERATURE:	22°C
RELATIVE HUMIDITY:	41 %
AIR PRESSURE:	1013 hPa
DISTANCE BETWEEN ANTENNA AND EUT:	3 m
THE EUT WAS TESTED AS:	Table-top
FREQUENCY RANGE:	30 MHz – 5 GHz
DETECTOR TYPE:	Peak
MEASUREMENT UNCERTAINTY:	± 6 dB max

For test procedure and setup refer to section 4.3, radiated emissions. For full test results refer to plots A36 to A38.

Quasi-peak detector, RBW = 120 kHz

Frequency, MHz	Antenna polarization	Antenna height, m	Turntable position (°)	Radiated emissions, dB (µV/m)	Limit, dB (µV/m)	Margin, dB	Verdict
48.01	Vertical	1.00	0	37.30	40.00	2.70	Pass
80.01	Horizontal	2.40	0	37.30	40.00	2.70	Pass
112.01	Horizontal	3.30	57	42.52	43.50	0.98	Pass
144.02	Horizontal	1.50	215	40.59	43.50	2.91	Pass
192.01	Horizontal	1.60	220	41.67	43.50	1.83	Pass
399.99	Horizontal	1.10	250	41.69	46.00	4.31	Pass
533.18	Vertical	1.00	0	42.93	46.00	3.07	Pass
720.00	Horizontal	1.10	0	44.00	46.00	2.00	Pass

The recorded test results were obtained through measurements with biconilog antenna.

#### LIMIT (§ 15.109)

Frequency, MHz	Class B equipment @ 3 m dB(µV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 5000	54.0

#### TEST EQUIPMENT USED:

HL 0465	HL 0521	HL 0589	HL 0592	HL 0593	HL 0594	HL 0604
HL 1004	HL 1947	HL 2009	HL 2432			



#### 4.5 Antenna power conducted test according to §15.111

DATE of TEST: January 21, 2004  
 AMBIENT TEMPERATURE: 22°C  
 RELATIVE HUMIDITY: 41 %  
 AIR PRESSURE: 1013 hPa  
 THE EUT WAS TESTED AS: Table-top  
 FREQUENCY RANGE: 30 MHz – 5 GHz  
 MEASUREMENT UNCERTAINTY: ± 3.5 dB

For test procedure and setup refer to section 4.3, conducted emissions. For full test results refer to plots A39 to A44.

Frequency, MHz	Spurious emission level, dBm		Margin, dB	Verdict	Reference to Plots in Appendix A
	Measured	Limit			
422.497	-75.33	-57	18.33	Pass	A40
924.990	-58.17	-57	1.17	Pass	A41
1849.92	-61.67	-57	4.67	Pass	A43
2774.97	-62.67	-57	5.67	Pass	A44

#### LIMIT (§ 15.111)

The power at the antenna terminal at any frequency within the range of measurements specified in section 15.33 shall not exceed 2.0 nanowatts (-57 dBm).

#### TEST EQUIPMENT USED:

HL 1424	HL 2254					



#### 4.6 Frequency stability measurement according to §90.213

DATE of TEST: December 1, 2003  
AMBIENT TEMPERATURE: 22°C  
RELATIVE HUMIDITY: 46 %  
AIR PRESSURE: 1015 hPa

#### TEST PROCEDURE

The EUT frequency stability was measured with variation of supply voltage or ambient temperature in the range from – 30°C to +50°C.

#### Frequency stability test results vs supply voltage

Voltage, V	Frequency, Hz	Displacement, Hz	Time, min
U <sub>cc</sub> =12 V	914999643	13	startup
	914999621	-9	+2
	914999627	-3	+5
	<b>914999630</b>	0	+10
U <sub>cc</sub> =8 V	914999666	36	startup
	914999627	-3	+2
	914999615	-15	+5
	914999614	-16	+10
U <sub>cc</sub> =40 V	914999638	8	startup
	914999617	-13	+2
	914999606	-24	+5
	914999604	-26	+10

Reference frequency: 914999630 Hz

For information only: 2.5 ppm = ± 2287 Hz

#### TEST EQUIPMENT USED:

HL 0026	HL 0481	HL 0493	HL 0559	HL 1188		





**Frequency stability test results vs ambient temperature**

Temperature, °C	Frequency, Hz	Displacement, Hz	Time, min
t°=30°C	914999679	49	startup
	914999645	15	+2
	914999645	15	+5
	914999654	24	+10
t°=40°C	914999640	10	startup
	914999632	2	+2
	914999636	6	+5
	914999649	19	+10
t°=50°C	914999688	58	startup
	914999679	49	+2
	914999723	93	+5
	914999757	127	+10
t°=10°C	915000006	376	startup
	914999976	346	+2
	914999961	331	+5
	914999960	330	+10
t°=0°C	915000392	762	startup
	915000316	686	+2
	915000273	643	+5
	915000252	622	+10
t°=-10°C	915001191	1561	startup
	915001087	1457	+2
	915000993	1363	+5
	915000944	1314	+10
t°=-20°C	915001973	2343	startup
	915001724	2094	+2
	915001644	2014	+5
	915001584	1954	+10
t°=-30°C	915002605	2975	startup
	915002555	2925	+2
	915002501	2871	+5
	915002446	2816	+10



#### 4.7 Conducted emissions test according to §15.107

METHOD OF MEASUREMENTS	ANSI 63.4 §13.1.3
DATE of TEST:	February 2, 2004
RELATIVE HUMIDITY:	53%
AMBIENT TEMPERATURE:	20°C
AIR PRESSURE:	1017 hPa
THE EUT WAS TESTED AS:	TABLE-TOP
DETECTOR USED:	QUASI-PEAK
FREQUENCY RANGE:	150 kHz – 30 MHz
RESOLUTION BANDWIDTH:	9 kHz
MEASUREMENT UNCERTAINTY, dB	± 3.9 dB in 9 – 150 kHz ± 3.8 dB in 150 kHz – 30 MHz

EUT power lines, stand by mode

Quasi-peak detector

Frequency, MHz	Line identification	Measured emissions, dB (µV)	Specification QP limit, dB (µV)	Margin, dB	Verdict	Reference to Plots in Appendix A
0.88	2	34.45	56.00	21.55	Pass	A46
2.05	2	37.39	56.00	18.61	Pass	A46
2.64	1	39.44	56.00	16.56	Pass	A45
13.80	1	43.34	60.00	16.66	Pass	A45
14.63	1	45.46	60.00	14.54	Pass	A45
18.54	1	40.94	60.00	19.06	Pass	A45
24.62	1	43.13	60.00	16.87	Pass	A45

Average detector

Frequency, MHz	Line identification	Measured emissions, dB (µV)	Specification AVRG limit, dB (µV)	Margin, dB	Verdict	Reference to Plots in Appendix A
0.88	2	34.19	46.00	11.81	Pass	A46
2.05	2	34.76	46.00	11.24	Pass	A46
2.64	1	34.59	46.00	11.41	Pass	A45
13.80	1	39.03	50.00	10.97	Pass	A45
14.63	1	43.60	50.00	6.40	Pass	A45
18.54	1	37.75	50.00	12.25	Pass	A45
24.62	1	39.13	50.00	10.87	Pass	A45

**EUT power lines, transmit mode****Quasi-peak detector**

Frequency, MHz	Line identification	Measured emissions, dB ( $\mu$ V)	Specification QP limit, dB ( $\mu$ V)	Margin, dB	Verdict	Reference to Plots in Appendix A
2.58	2	39.36	56.00	16.64	Pass	A48
14.33	1	44.83	60.00	15.17	Pass	A47
14.52	2	43.10	60.00	16.90	Pass	A48
14.86	1	43.13	60.00	16.87	Pass	A47
18.55	1	42.71	60.00	17.29	Pass	A47
20.37	2	41.00	60.00	19.00	Pass	A48
24.82	2	43.76	60.00	16.24	Pass	A48
25.39	1	44.58	60.00	15.42	Pass	A47

**Average detector**

Frequency, MHz	Line identification	Measured emissions, dB ( $\mu$ V)	Specification AVRG limit, dB ( $\mu$ V)	Margin, dB	Verdict	Reference to Plots in Appendix A
2.58	2	34.23	46.00	11.77	Pass	A48
14.33	1	38.86	50.00	11.14	Pass	A47
14.52	2	40.79	50.00	9.21	Pass	A48
14.86	1	36.70	50.00	13.30	Pass	A47
18.55	1	40.78	50.00	9.22	Pass	A47
20.37	2	38.36	50.00	11.64	Pass	A48
24.82	2	41.07	50.00	8.93	Pass	A48
25.39	1	42.12	50.00	7.88	Pass	A47

**Laptop power lines****Quasi-peak detector**

Frequency, MHz	Line identification	Measured emissions, dB ( $\mu$ V)	Specification QP limit, dB ( $\mu$ V)	Margin, dB	Verdict	Reference to Plots in Appendix A
0.29	1	34.69	60.49	25.80	Pass	A49
0.64	2	33.12	56.00	22.88	Pass	A50
1.05	2	32.50	56.00	23.50	Pass	A50
1.52	1	34.32	56.00	21.68	Pass	A49
2.81	1	33.25	56.00	22.75	Pass	A49
5.85	1	34.58	60.00	25.42	Pass	A49

**Average detector**

Frequency, MHz	Line identification	Measured emissions, dB ( $\mu$ V)	Specification AVRG limit, dB ( $\mu$ V)	Margin, dB	Verdict	Reference to Plots in Appendix A
0.29	1	34.55	50.49	15.94	Pass	A49
0.64	2	32.97	46.00	13.03	Pass	A50
1.05	2	32.32	46.00	13.68	Pass	A50
1.52	1	31.03	46.00	14.97	Pass	A49
2.81	1	31.16	46.00	14.84	Pass	A49
5.85	1	32.53	50.00	17.47	Pass	A49

**LIMIT**

Frequency, MHz	Class B equipment, dB( $\mu$ V)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

\*The limit decreases linearly with the logarithm of frequency.

**TEST PROCEDURE**

The measurements were performed at mains terminals by means of LISN, connected to spectrum analyzer in the frequency range as referred to in the table above. The unused coaxial connector of the LISN was terminated with 50  $\Omega$ . The measurements were made with quasi-peak and average detectors as referred to in the tables. The position of the EUT cables was varied to determine maximum emission level.

**TEST EQUIPMENT USED:**


HL 0447	HL 1430	HL 1501	HL 1503			
---------	---------	---------	---------	--	--	--



## Appendix A Plots

Plot A 1

23 dB bandwidth measurement result at 912 MHz fundamental

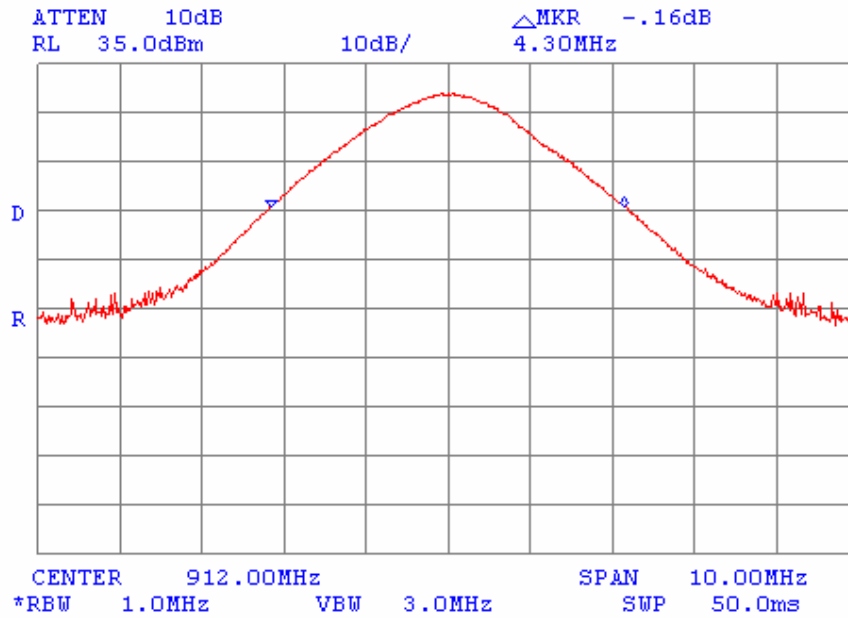


Limit=12 MHz  
5% of 12 MHz=600 kHz, RBW = 1 MHz  
Note: Measurement was performed in continuous transmission mode



Plot A 2

23 dB bandwidth measurement result at 918 MHz fundamental

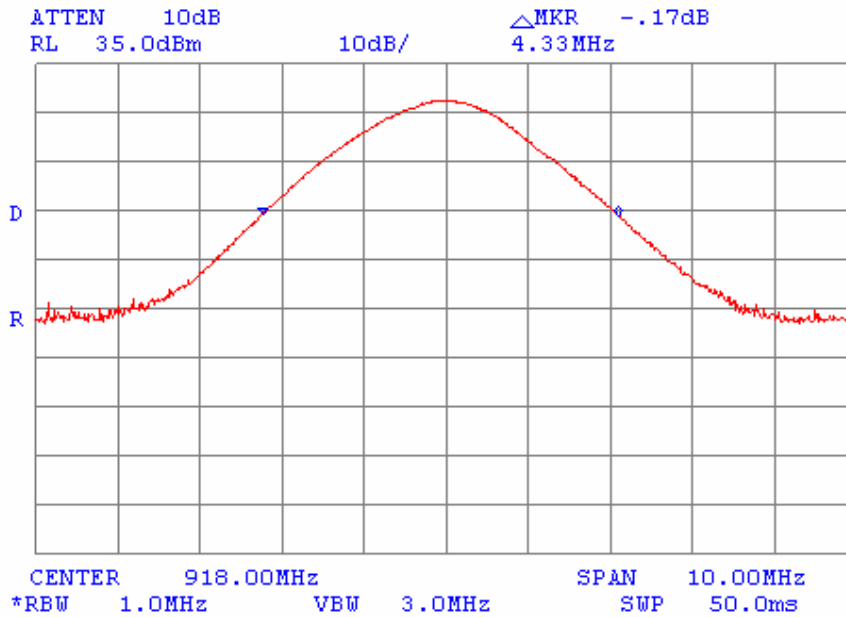

Limit=12 MHz

5% of 12 MHz=600 kHz, RBW = 1 MHz

Note: Measurement was performed in continuous transmission mode



Plot A 3

Conducted spurious emission measurements from 9 kHz to 150 kHz @ 912 MHz fundamental


17:04:56 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 9.0 kHz  
-44.52 dBm

LOG REF -25.0 dBm

10  
dB/  
#ATTN  
0 dB

VA SB  
SC FC  
ACORR

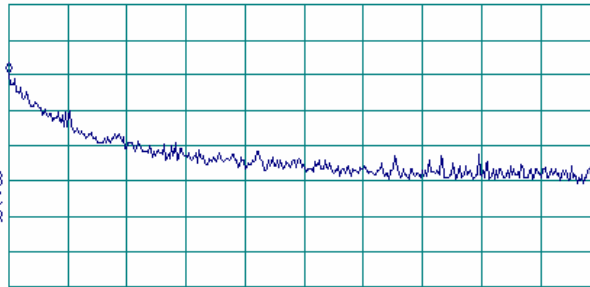

START 9.0 kHz STOP 150.0 kHz  
RL 1JF BW 1.0 kHz AVG BW 3 kHz SWP 423 msec




Plot A 4

Conducted spurious emission measurements from 150 kHz to 30 MHz @ 912 MHz fundamental

17:02:00 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 1.11 MHz  
-58.37 dBm

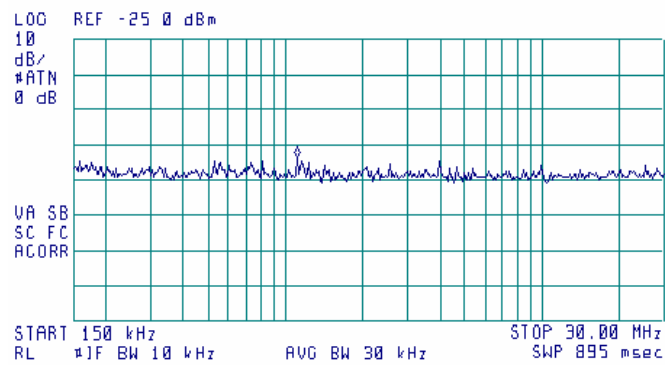






Plot A 5

Conducted spurious emission measurements from 30 MHz to 900 MHz @ 912 MHz fundamental

16:55:42 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 371.5 MHz  
-39.86 dBm

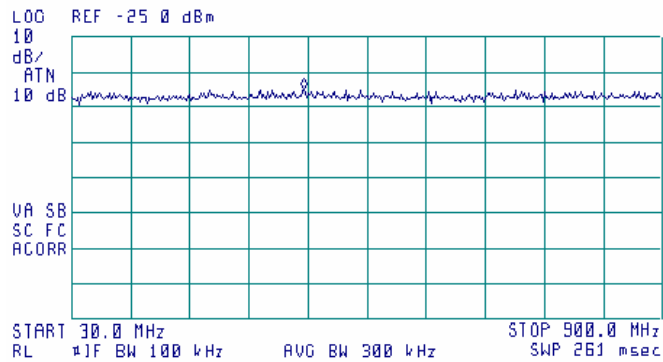



Plot A 6

Conducted spurious emission measurements from 900 MHz to 909.75 MHz @ 912 MHz fundamental

16:45:48 FEB 29, 2004


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 908.946 MHz  
-28.94 dBm

LOG REF -15.0 dBm

10  
dB/  
ATTN  
10 dB

VA SB  
SC FC  
ACORR

START 900.000 MHz STOP 909.750 MHz  
RL 10 dB BW 100 kHz AVG BW 300 kHz SWP 20.0 msec

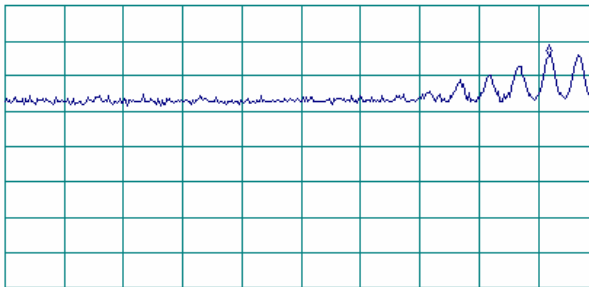



Plot A 7


Conducted spurious emission measurements from 921.75 MHz to 1000 MHz @ 912 MHz fundamental

16:50:14 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 955.01 MHz  
-40 61 dBm

LOG REF -25 0 dBm

10  
dB/  
ATTN  
10 dB

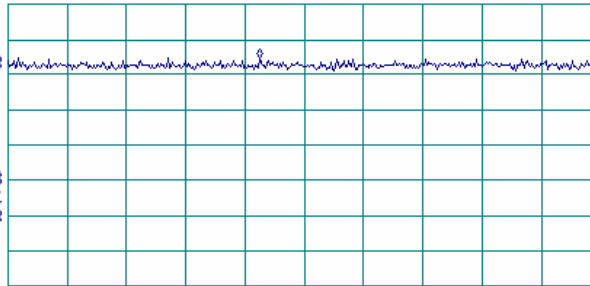


START 921.75 MHz STOP 1.000000 GHz  
RL 11F BW 100 kHz AVG BW 300 kHz SWP 23 5 msec



Plot A 8

Conducted spurious emission measurements from 1.000 GHz to 2.900 GHz @ 912 MHz fundamental

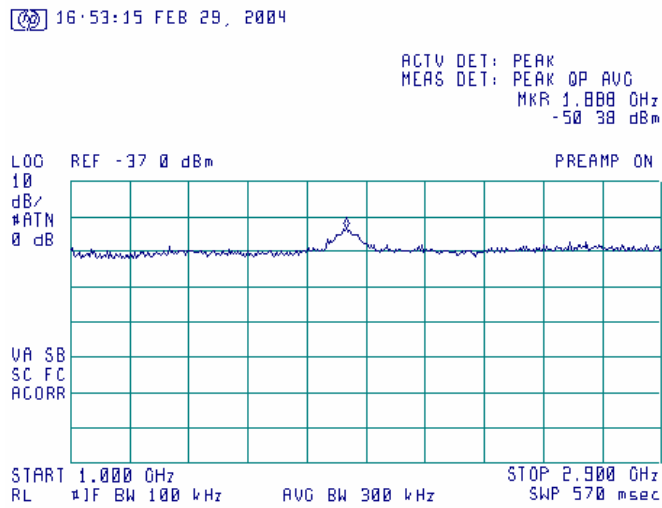


25 dB below the limit



**Plot A 9**

**Conducted spurious emission measurements from 2.900 GHz to 4.000 GHz @ 912 MHz fundamental**

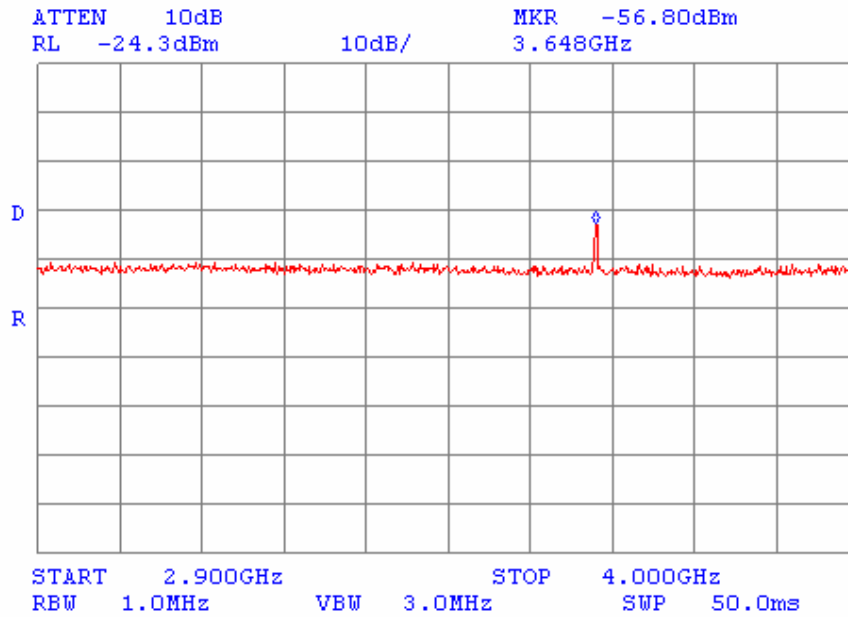






Plot A 11

Conducted spurious emission measurements from 8.000 GHz to 9.500 GHz @ 912 MHz fundamental

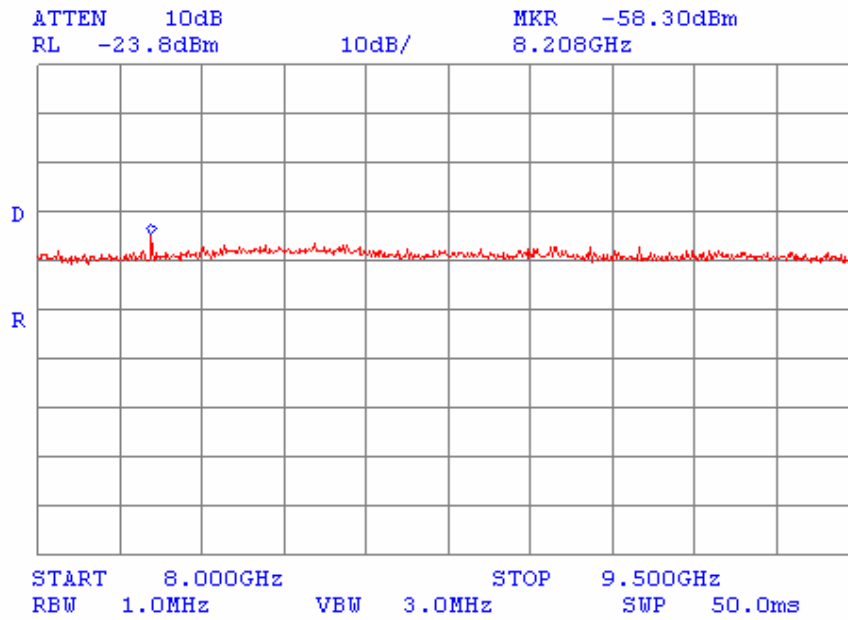




Plot A 12

Conducted spurious emission measurements from 9 kHz to 150 kHz @ 918 MHz fundamental

16:42:11 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 9.0 kHz  
-45.85 dBm

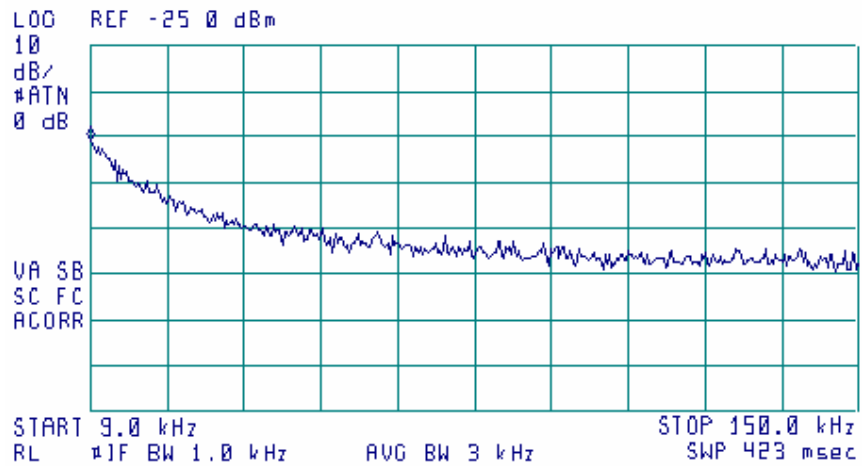





Plot A 13

Conducted spurious emission measurements from 150 kHz to 30 MHz @ 918 MHz fundamental

16:40:12 FEB 29, 2004


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 500 kHz  
-59.46 dBm

LOC REF -25.0 dBm

10  
dB/  
#ATTN  
0 dB

VA SB  
SC FC  
ACORR

START 150 kHz STOP 30.00 MHz  
RL 11F BW 10 kHz AVG BW 30 kHz SWP 895 msec

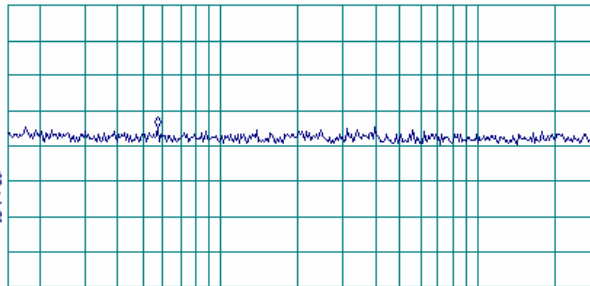




Plot A 14

Conducted spurious emission measurements from 30 MHz to 900 MHz @ 918MHz fundamental

16:27:41 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 602.5 MHz  
-40.16 dBm

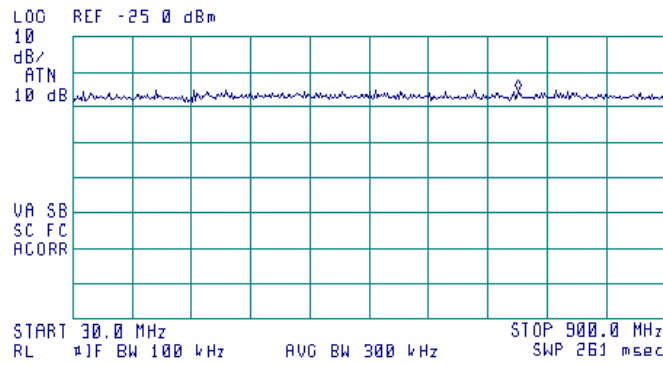




Plot A 15

Conducted spurious emission measurements from 900 MHz to 909.5 MHz @ 918 MHz fundamental

16:19:16 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 900.523 MHz  
-40.69 dBm

LOG REF -25.0 dBm

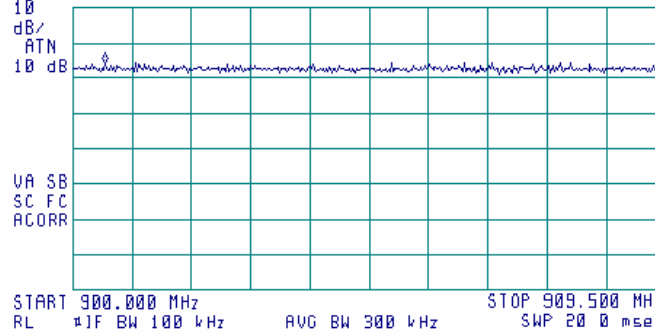




Plot A 16

Conducted spurious emission measurements from 921.75 MHz to 925.00 MHz @ 918 MHz fundamental

16:14:36 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 921.978 MHz  
-35.15 dBm

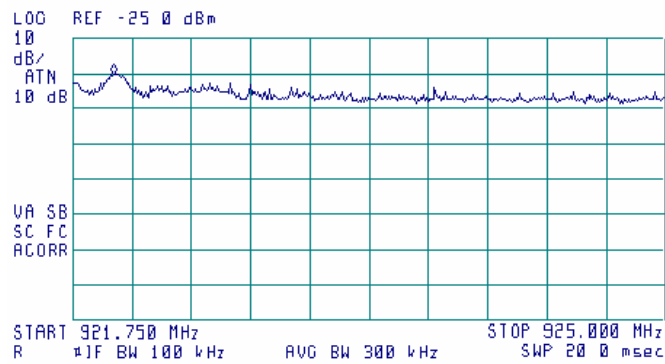




Plot A 17

Conducted spurious emission measurements from 925.00 MHz to 1000 MHz @ 918 MHz fundamental

16:17:09 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 961.56 MHz  
-40.03 dBm

LOG REF -25.0 dBm

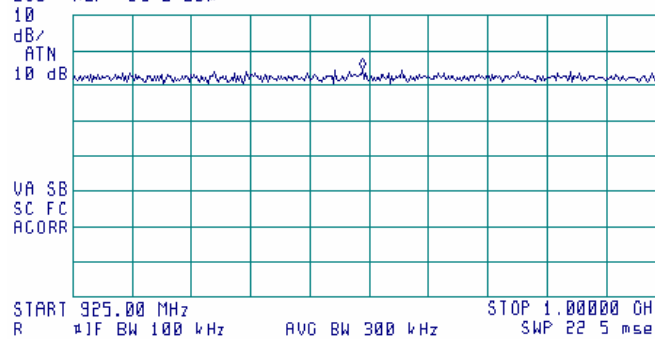




Plot A 18

Conducted spurious emission measurements from 1.000 GHz to 2.900 GHz @ 918 MHz fundamental

16:37:31 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 1.898 GHz  
-50.43 dBm

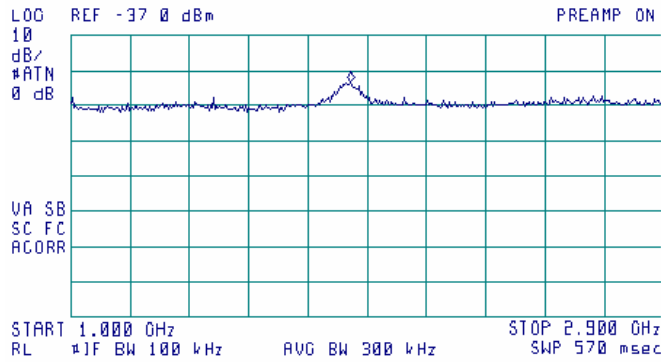

25 dB below the limit










Plot A 21

Conducted spurious emission measurements from 8.000 GHz to 9.500 GHz @ 918 MHz fundamental

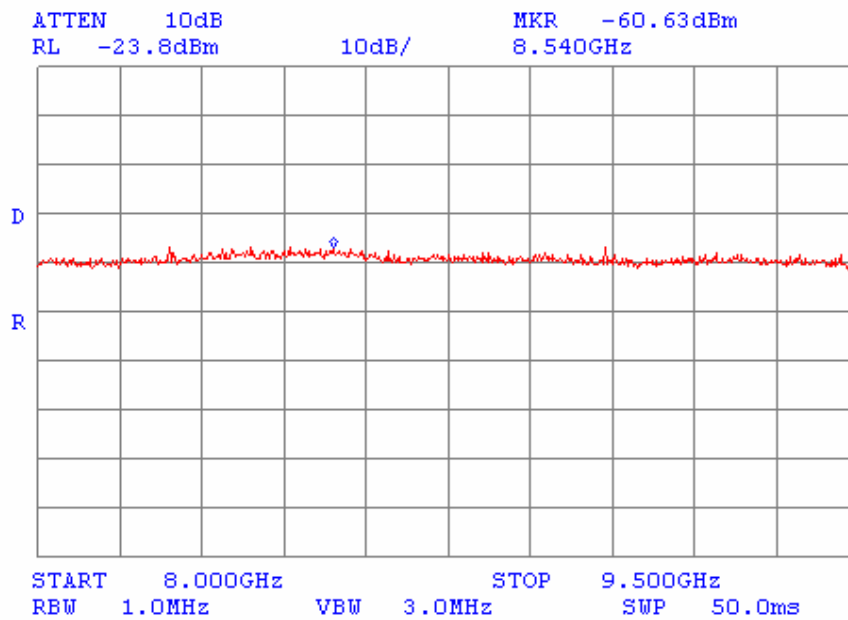




Plot A 22

Radiated spurious emission measurements in the anechoic chamber from 9 kHz to 150 kHz  
@ 912 MHz fundamental

11:22:40 FEB 25, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 10.4 kHz  
59.69 dB $\mu$ V/m

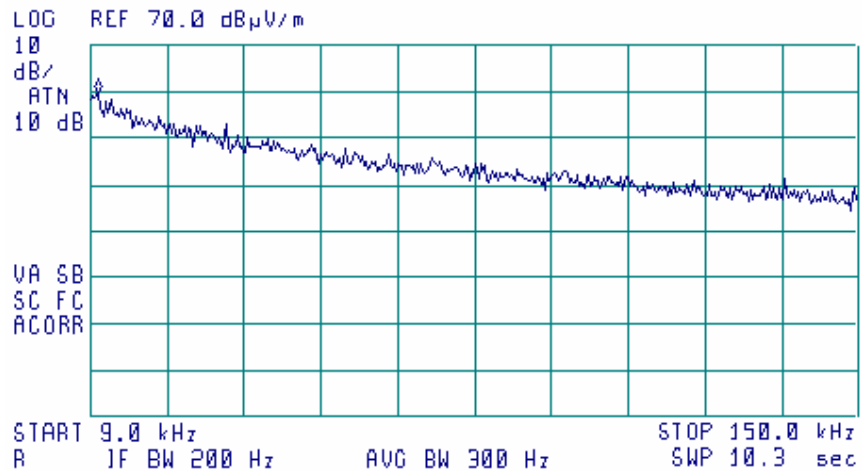




Plot A 23

Radiated spurious emission measurements in the anechoic chamber from 150 kHz to 30 MHz  
@ 912 MHz fundamental

11:14:11 FEB 25, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 150 kHz  
58.15 dB $\mu$ V/m

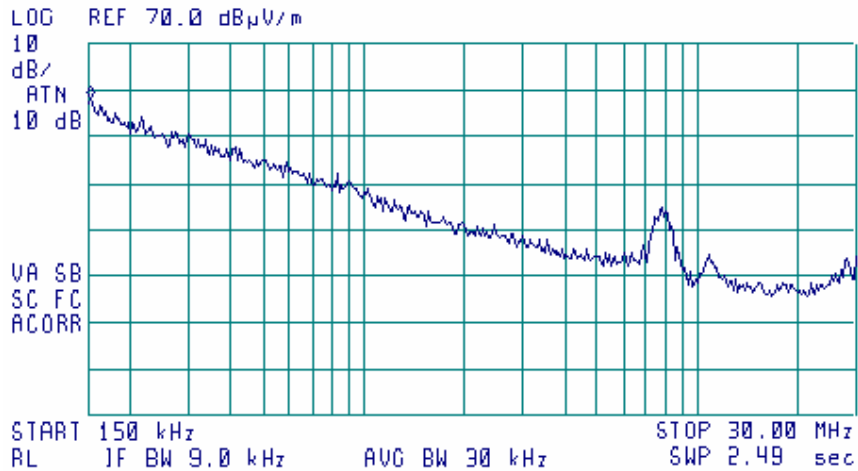




Plot A 24

Radiated spurious emission measurements in the anechoic chamber from 30 MHz to 1000 MHz  
@ 912 MHz fundamental

10:44:49 FEB 25, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 904.7 MHz  
56.15 dB $\mu$ V/m

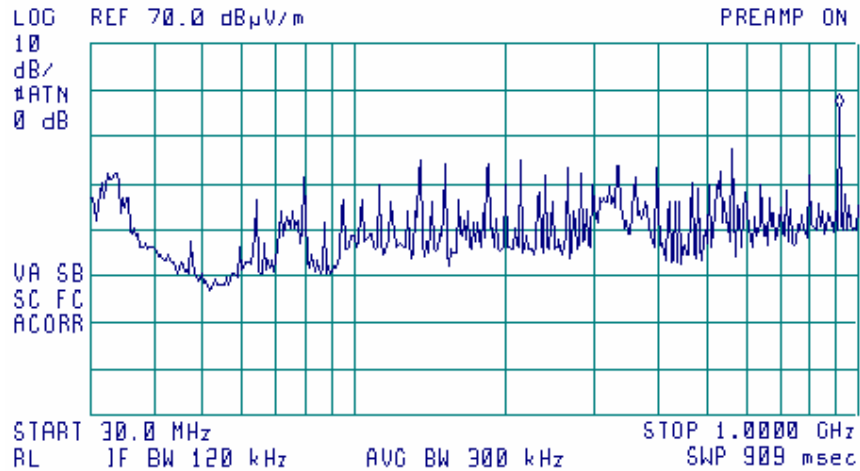




Plot A 25

Radiated spurious emission measurements in the anechoic chamber from 1 GHz to 6.5 GHz  
@ 912 MHz fundamental

09:47:36 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 1.829 GHz  
64.45 dB $\mu$ V/m

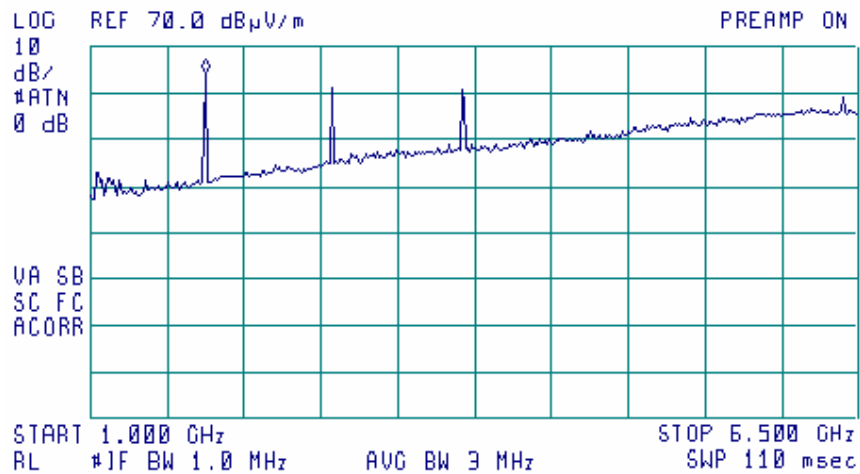




Plot A 26

Radiated spurious emission measurements in the anechoic chamber, second harmonic of 912 MHz fundamental

09:55:03 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 1.82400 GHz  
70.67 dBμV/m

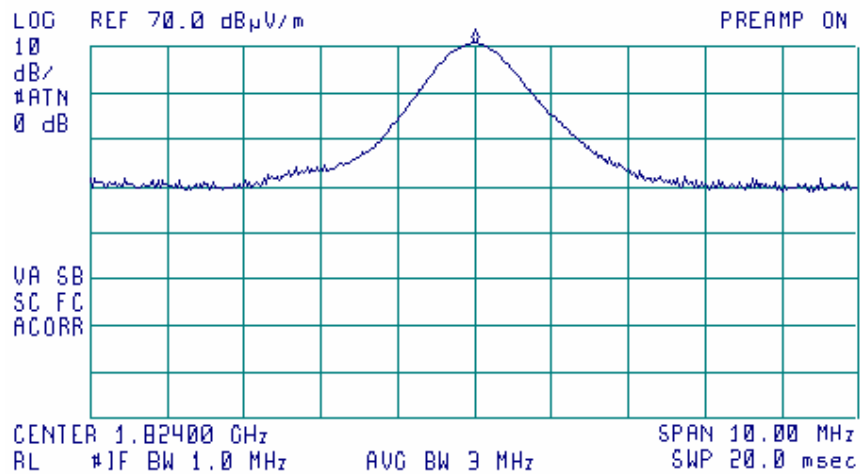


The second harmonic of fundamental:  
ERP=P<sub>gen</sub>-CL+G<sub>ant</sub>=-32.3 dBm - 0.8 dB - 1.7 dB + 6.3 dBd= -28.5 dBm



Plot A 27

Radiated spurious emission measurements at the OATS from 6.5 GHz to 8 GHz  
@ 912 MHz fundamental

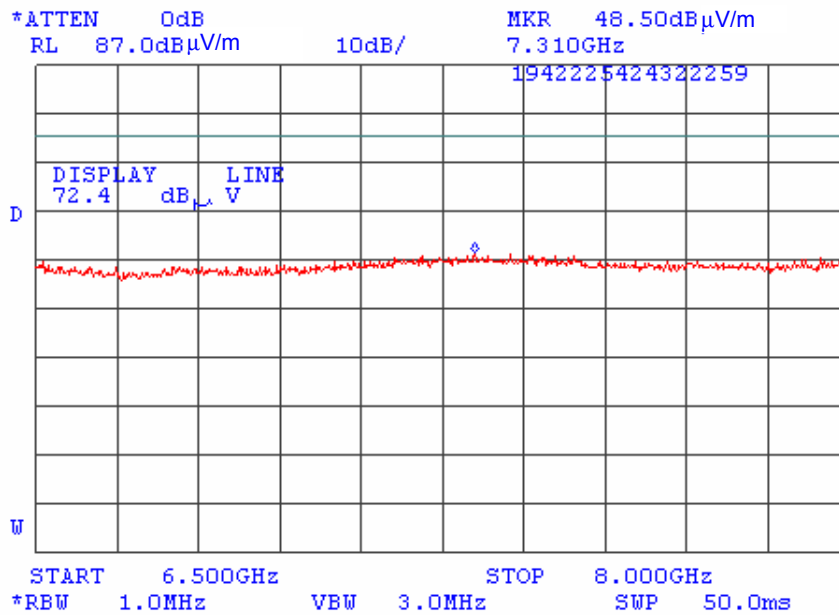


No spurious emissions were found.



Plot A 28

Radiated spurious emission measurements at the OATS from 8 GHz to 9.5 GHz  
@ 912 MHz fundamental

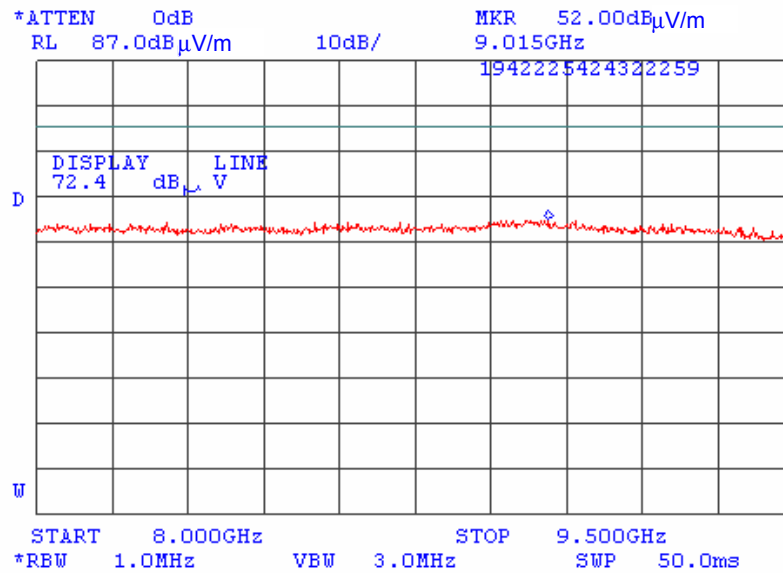

No spurious emissions were found.






Plot A 29

Radiated spurious emission measurements in the anechoic chamber from 9 kHz to 150 kHz  
@ 918 MHz fundamental

11:27:07 FEB 25, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 9.7 kHz  
60.10 dB $\mu$ V/m

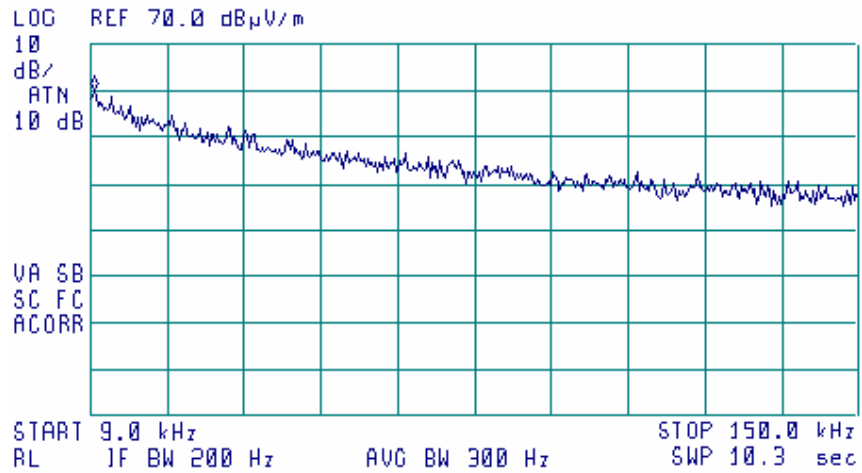




Plot A 30

Radiated spurious emission measurements in the anechoic chamber from 150 kHz to 30 MHz  
@ 918 MHz fundamental

11:34:10 FEB 25, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 150 kHz  
57.68 dB $\mu$ V/m

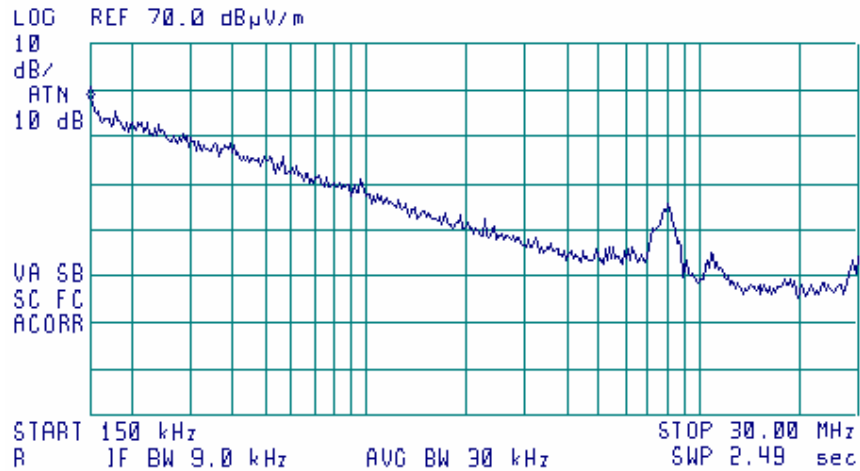




Plot A 31

Radiated spurious emission measurements in the anechoic chamber from 30 MHz to 1000 MHz  
@ 918 MHz fundamental

10:28:26 FEB 25, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 914.2 MHz  
57.11 dB $\mu$ V/m

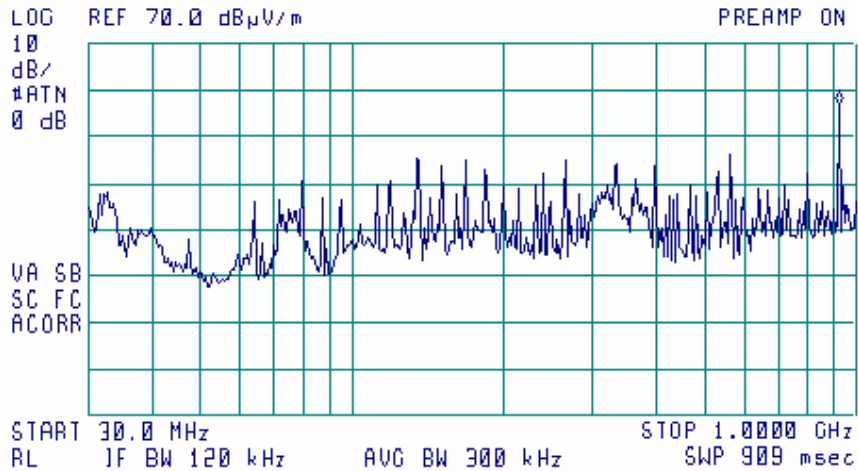

Limit: 70 dB( $\mu$ V/m)  
All spurious emissions were found more than 20 dB below the limit.




Plot A 32

Radiated spurious emission measurements in the anechoic chamber from 1 GHz to 6.5 GHz  
@ 918 MHz fundamental

09:27:04 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 2.756 GHz  
60.51 dB $\mu$ V/m

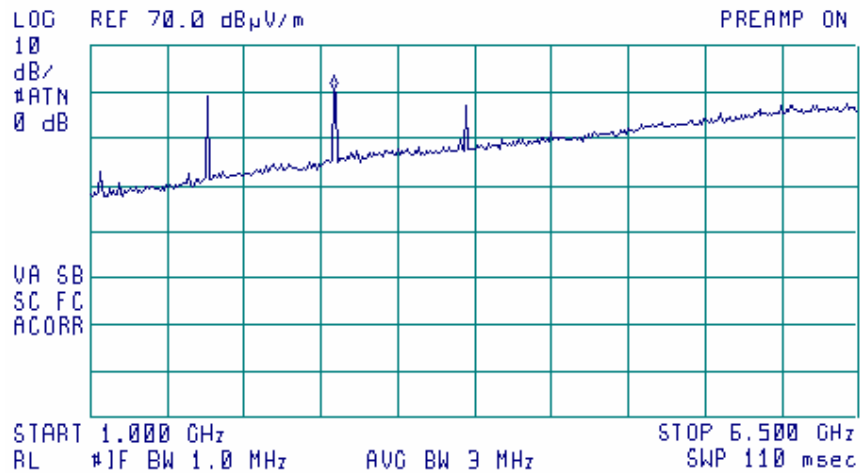




Plot A 33

Radiated spurious emission measurements in the anechoic chamber, second harmonic of 918 MHz fundamental

09:41:01 FEB 29, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 1.83594 GHz  
67.44 dBμV/m

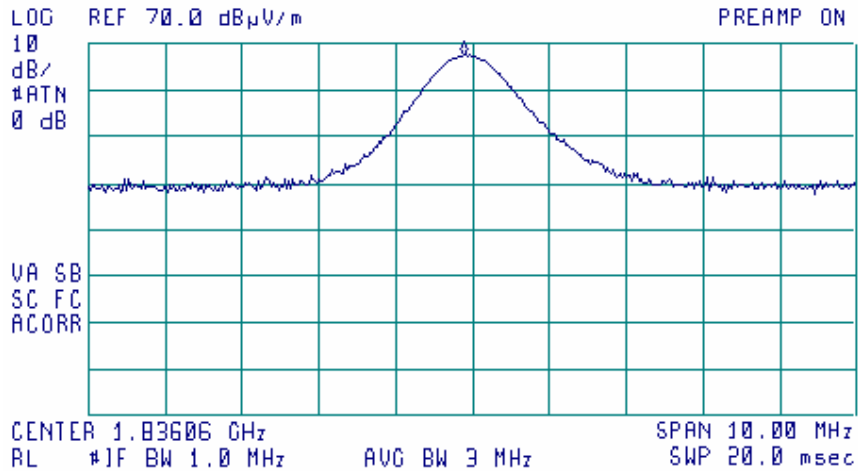


The second harmonic of fundamental.

ERP=P<sub>gen</sub>-CL+G<sub>ant</sub>= -34.8 dBm - 0.8 dB - 1.7 dB + 6.4 dBd = -30.9 dBm



Plot A 34

Radiated spurious emission measurements at the OATS from 6.5 GHz to 8 GHz  
@ 918 MHz fundamental

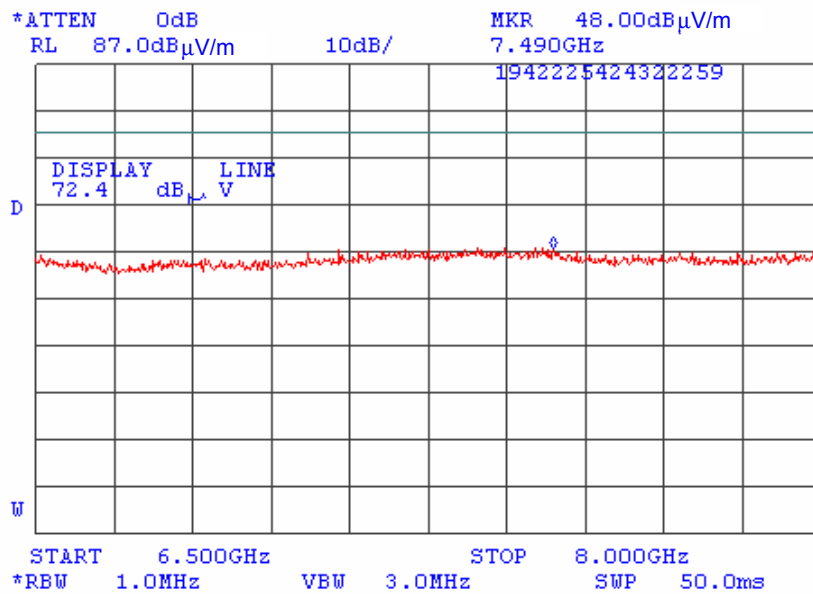


No spurious emissions were found.



Plot A 35

Radiated spurious emission measurements at the OATS from 8 GHz to 9.5 GHz  
@ 918 MHz fundamental

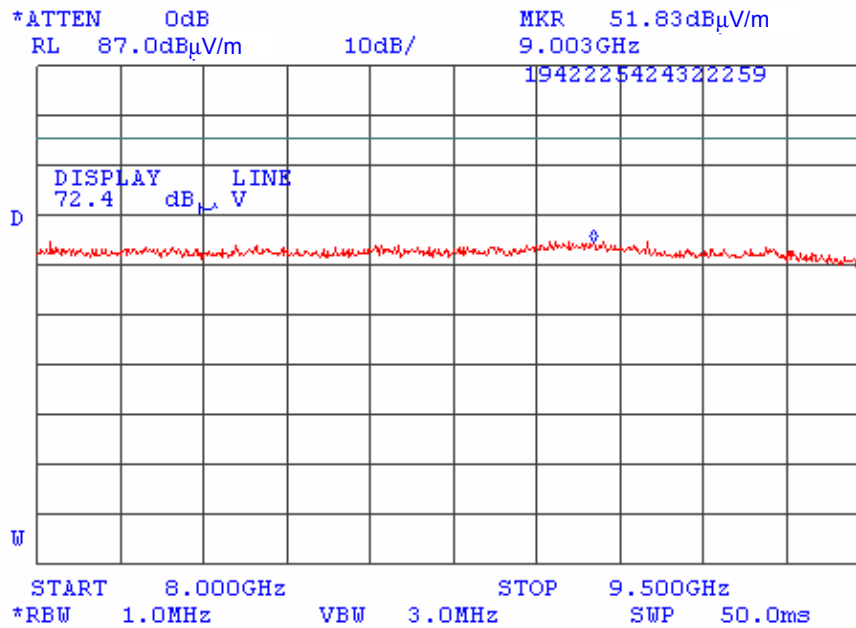

No spurious emissions were found.




Plot A 36

Radiated emission measurements in the anechoic chamber from 30 MHz to 1000 MHz,  
test distance 3 m, vertical & horizontal antenna polarization

20:11:29 JAN 20, 2004

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 532.5 MHz  
43.34 dB $\mu$ V/m

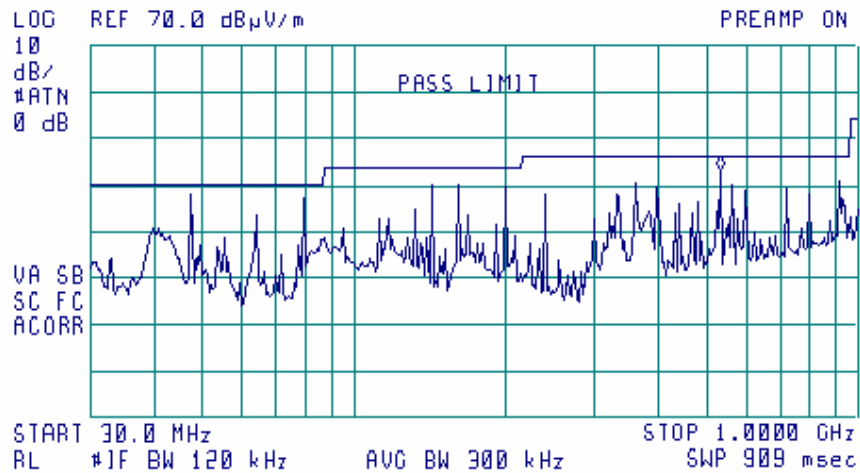






Plot A 37

Radiated emission measurements in the anechoic chamber from 1 GHz to 2.9 GHz,  
test distance 3 m, vertical & horizontal antenna polarization

07:32:33 JAN 21, 2004

ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 2.800 GHz  
46.44 dB $\mu$ V/m

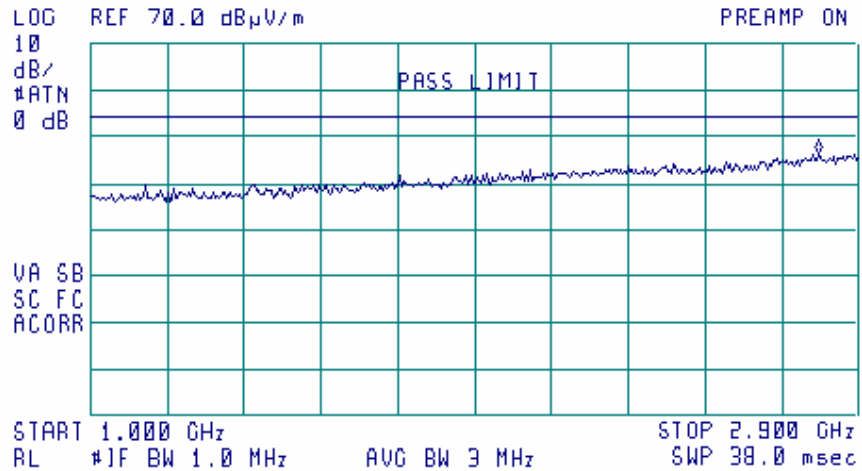




Plot A 38

Radiated emission measurements in the anechoic chamber from 2.9 GHz to 5 GHz,  
test distance 3 m, vertical & horizontal antenna polarization

07:49:36 JAN 21, 2004


ACTV DET: PEAK  
MEAS DET: PEAK OP AVG  
MKR 4.942 GHz  
44.59 dB $\mu$ V/m

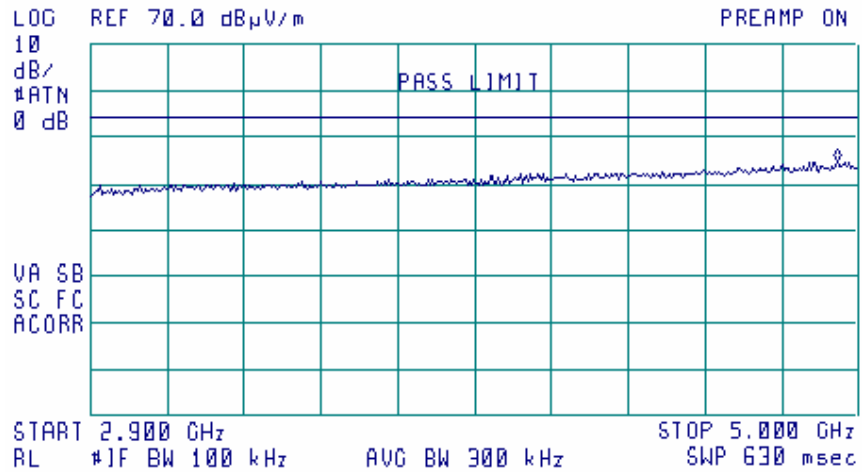



Plot A 39

Conducted spurious emission measurements in Rx mode

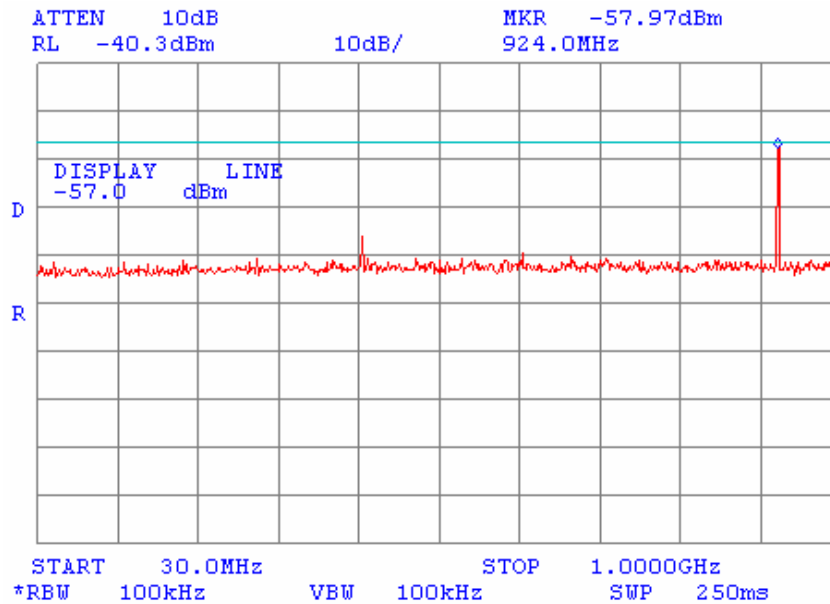

Cable loss 0.3 dB included








Plot A 42

Conducted spurious emission measurements in Rx mode

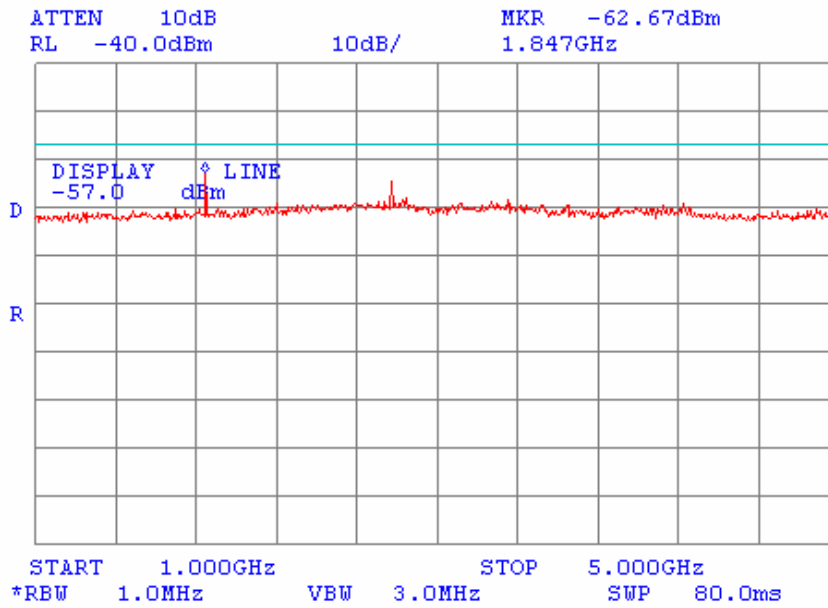


Cable loss 0.8 dB included



Plot A 43

Conducted spurious emission measurements in Rx mode

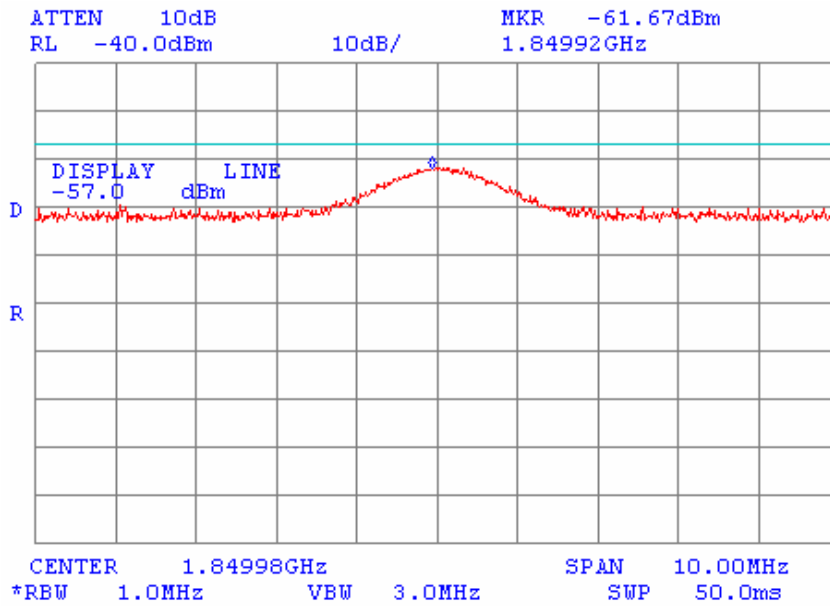


Cable loss 0.5 dB included



Plot A 44

Conducted spurious emission measurements in Rx mode

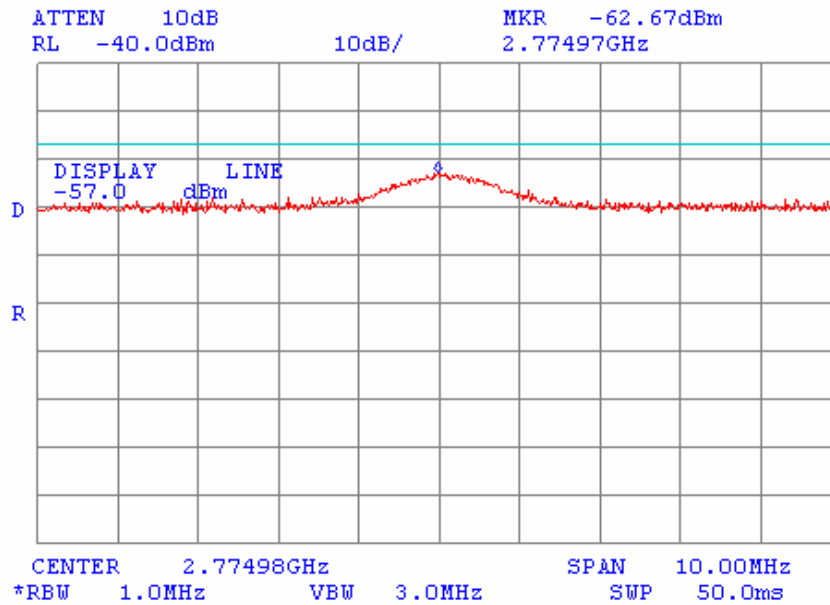

Cable loss 0.6 dB included





Plot A 45

Conducted emission measurement results at the EUT AC first line in stand by mode

10:07:25 FEB 02, 2004


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 14.53 MHz  
45.69 dB $\mu$ V

MEASURE  
AT MKR  
ADD TO  
LIST

LOG REF 75.0 dB $\mu$ V

10  
dB/  
ATN  
10 dB

VA SB  
SC FC  
ACORR

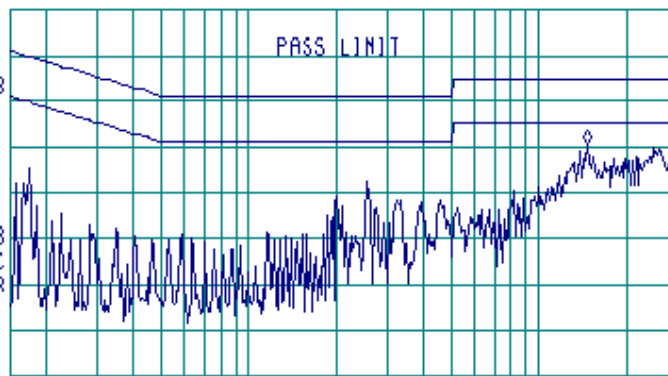

MARKER  
↓ CF

MARKER  
▲

NEXT  
PEAK

NEXT PK  
RIGHT


NEXT PK  
LEFT

More  
1 of 2



Plot A 46


Conducted emission measurements test results at the EUT AC second line in stand by mode

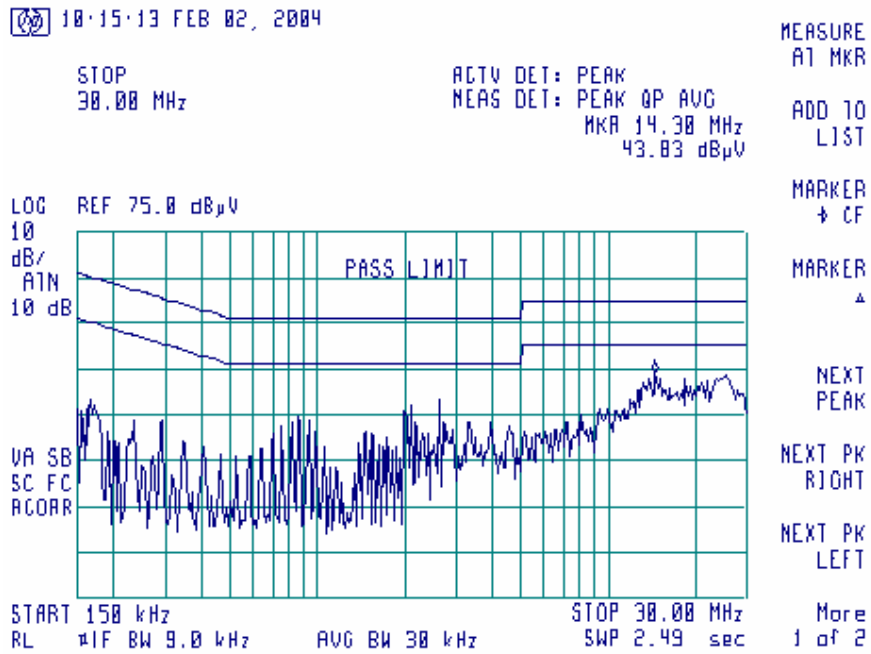



Plot A 47

Conducted emission measurements test results at the EUT AC first line in transmit mode

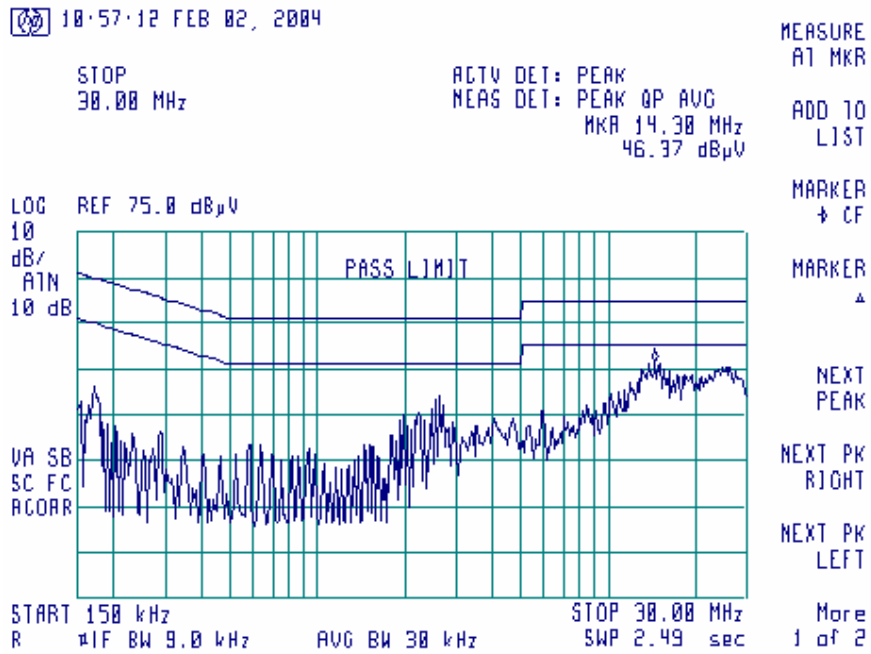



Plot A 48

Conducted emission measurements test results at the EUT AC second line in transmit mode

10:55:26 FEB 02, 2004

REF LEVEL  
75.0 dB $\mu$ V

FREQ 175.2 kHz  
PEAK 43.6 dB $\mu$ V  
QP 40.8 dB $\mu$ V  
AVG 36.0 dB $\mu$ V

MEASURE  
AT MKR

ADD TO  
LIST

CLEAR  
WRITE A

MAX  
HOLD A

VIEW A

BLANK A

Trace  
A B C

More  
1 of 3

LOG REF 75.0 dB $\mu$ V

10

dB/


ATN

10 dB

VA SB

SC FC

ACORR

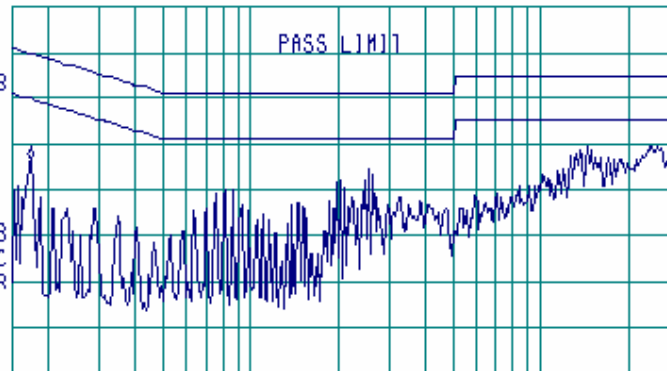

START 150 kHz

R \*1F BW 9.0 kHz

AVG BW 30 kHz

STOP 30.00 MHz

SWP 2.49 sec



Plot A 49

Conducted emission measurements test results at the laptop AC first line

11-05-12 FEB 02, 2004

ACTV DET: PEAK  
NEAS DET: PEAK QP AVG  
MKR 5.06 MHz  
36.33 dBμV

MEASURE  
AT MKR

ADD TO  
LIST

MARKER  
→ CF

MARKER  
▲

NEXT  
PEAK

NEXT PK  
RIGHT


NEXT PK  
LEFT

More  
1 of 2

LOG REF 75.0 dBμV

10  
dB/  
ATN  
10 dB

VA SB  
SC FC  
RCOAR

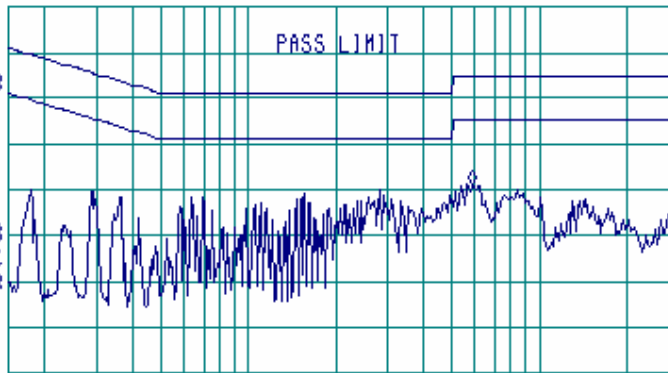

START 150 kHz

R #1F BW 9.0 kHz

AUG BW 30 kHz

STOP 30.00 MHz

SWP 2.49 sec



Plot A 50

Conducted emission measurements test results at the laptop AC first line

11:19:08 FEB 02, 2004

STOP  
30.00 MHz

ACTV DET: PEAK  
NEAS DET: PEAK OP AVG  
MKR 100 kHz  
36 20 dB $\mu$ V

MEASURE  
AT MKR

ADD TO  
LIST

CLEAR  
WRITE A

MAX  
HOLD A

VIEW A

BLANK A


Trace  
A B C

More  
1 of 3

LO0 REF 75 0 dB $\mu$ V

10  
dB/  
ATN  
10 dB

VA SB  
SC FC  
ACORR

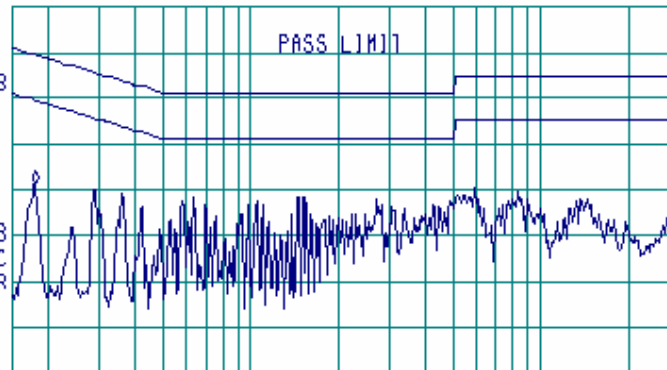

START 150 kHz

RL 11F BW 9.0 kHz

AVG BW 30 kHz

STOP 30.00 MHz

SHP 2 49 sec



## Appendix B Test equipment used for tests

HL Serial No.	Description	Manufacturer information			Due Calibr. Month/ year
		Name	Model No.	Serial No.	
0026	Spectrum analyzer, 100 Hz-2.2 GHz	Anritsu	MS 2601A	3460	9/04
0038	Antenna mast, 1-4 m	Hermon Labs	AM-1	028	2/05 check
0057	Attenuator, 50 Ohm, 2W, 0-18 GHz, 30 dB	Hewlett Packard	8492A	129	3/05
0091	Position controller for antenna mast + turntable, OFTS	Hermon Labs	CRL-2	091	4/04 check
0287	Turntable, motorized diameter, 2 m	Hermon Labs	TMD-2	042	11/04 check
0446	Active loop antenna, 10 kHz-30 MHz	Electro-Mechanics	6502	2857	10/04
0447	LISN, 16/2, 300 V RMS	Hermon Labs	LISN 16-1	447	11/04
0465	Anechoic chamber 9 (L) x 6.5 (W) x 5.5 (H) m	Hermon Labs	AC-1	023	10/05 check
0481	Power supply 40 V/1 A	Horizon Electronics	DHP 40-1	7625	2/05
0493	Oven temperature	Thermotron	S-1.2 Mini-Max	4016	9/04
0521	Spectrum analyzer with RF filter section (EMI receiver 9 kHz - 6.5 GHz)	Hewlett Packard	8546A	0319	9/04
0559	Multimeter digital	Fluke	76	0903	10/04
0589	Cable coaxial, GORE A2POL118.2, 3 m	Hermon Labs	GORE-3	589	11/04
0592	Position controller	Hermon Labs	L2-SR3000	100	5/04 check
0593	Antenna mast, 1-4 m/ 1-6 m Pneumatic	Hermon Labs	AM-F1	101	2/05 check
0594	Turntable for Anechoic Chamber, flush mounted, d=1.2 m, pneumatic	Hermon Labs	WDC1	102	1/05 check
0604	Antenna biconilog log-periodic/T Bow- Tie, 26 - 2000 MHz	EMCO	3141	9611-1011	1/05
0661	Generator Swept Signal, 10MHz to 40GHz+ 10dBm	Hewlett Packard	83640B	0266	9/04
1004	Cable, coaxial ANDREW PSWJ4, 6 m	Hermon Labs	ANDREW-6	163	12/04
1188	Power supply, controllable, DC, 40V/30A	Power/Mate corp.PMC	0-40/3A	9677	1/05
1200	Quadruplexer, 1-12 GHz	Elettronica S.p.A.- Roma	UE 84	0240	4/04 check
1424	Spectrum analyzer, 30 Hz - 40 GHz	Agilent Technologies	8564EC	3946A00219	8/04
1430	EMI Receiver System, 9 kHz - 2.9 GHz	Agilent Technologies	8542E	3807A00262	9/04



HL Serial No.	Description	Manufacturer information			Due Calibr. Month/ year
		Name	Model No.	Serial No.	
1501	Cable RF, 6 m	Belden	M17/167 MIL-C-17	1501	12/04 check
1503	Cable RF, 6 m	Belden	M17/167 MIL-C-17	1503	9/04 check
1942	Cable 18 GHz, 4 m, blue	Rhophase Microwave Ltd	SPS-1803A-4000-NPS	T4658	10/04
1947	Cable 18 GHz, 6.5 m, blue	Rhophase Microwave Ltd	NPS-1803A-6500-NPS	T4974	10/04
1984	Antenna, double ridged waveguide horn, 1-18 GHz, 300W, N-type	EMC Test Systems	3115	9911-5964	3/05
2009	Cable RF, 8 m	Alpha Wire	RG-214	C-56	12/04
2254	Cable 40 GHz, 0.8 m, blue	Rhophase Microwave	KPS-1503A-800-KPS	W4907	11/04
2259	Amplifier Low Noise 2-20 GHz	Sophia Wireless	LNA0220-C	0223	11/04
2400	Cable 40 GHz, 1.5 m, green	Rhophase Microwave Ltd.	KPS-1503A-1500-KPS	X2946	6/04
2432	Antenna, double-ridged waveguide horn, 1-18 GHz	EMC Test Systems	3115	000271777	7/04





## Appendix C Antenna factors and cable loss

**Correction factor**  
**Line impedance stabilization network**  
**Model LISN 16 - 1**  
**Hermon Laboratories**

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.

**Antenna factor**  
**Active loop antenna**  
**Model 6502**  
**S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Antenna factor  
Biconilog antenna EMCO Model 3141  
Ser.No.1011**

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field intensity in dB(μV/m).



**Antenna factor**  
**Double-ridged wave guide horn antenna**  
**Model 3115, S/N 9911-5964, HL1984**

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Antenna factor**  
**Double-ridged guide horn antenna**  
**Model 3115, serial number: 00027177, HL2432**

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Cable loss**  
**Cable Coaxial, GORE A2P01POL118, 2.3 m, model:GORE-3, HL 0589**  
**+ Cable Coaxial, ANDREW PSWJ4, 6m, model: ANDREW-6, HL 1004**

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB	
1	30	0.33	≤ 6.5	±0.12	
2	50	0.40			
3	100	0.57			
4	300	0.97			
5	500	1.25			
6	800	1.59			
7	1000	1.81			
8	1200	1.97			
9	1400	2.15			
10	1600	2.28			
11	1800	2.43			
12	2000	2.61			
13	2200	2.75			
14	2400	2.89			
15	2600	2.97			
16	2800	3.21	≤ 6.5	±0.12	
17	3000	3.32			
18	3300	3.47			
19	3600	3.62			
20	3900	3.84			
21	4200	3.92			±0.17
22	4500	4.07			
23	4800	4.36			
24	5100	4.62			
25	5400	4.78			
26	5700	5.16			
27	6000	5.67			
28	6500	5.99			



**Cable loss**  
**Cable 18 GHz, 4 m, blue, model: SPS-1803A-4000-NPS, S/N T4658, HL 1942**

Frequency, GHz	Cable loss, dB
0.03	0.21
0.05	0.26
0.10	0.36
0.20	0.50
0.30	0.61
0.40	0.70
0.50	0.78
0.60	0.85
0.70	0.93
0.80	0.99
0.90	1.04
1.00	1.10
1.10	1.16
1.20	1.22
1.30	1.26
1.40	1.31
1.50	1.35
1.60	1.41
1.70	1.45
1.80	1.49
1.90	1.53
2.00	1.57
2.10	1.61
2.20	1.65
2.30	1.69
2.40	1.72
2.50	1.76
2.60	1.79
2.70	1.83
2.80	1.87
2.90	1.90
3.10	1.97
3.30	2.04
3.50	2.11
3.70	2.18
3.90	2.24
4.10	2.31
4.30	2.38
4.50	2.43
4.70	2.53
4.90	2.53
5.10	2.63
5.30	2.65
5.50	2.72
5.70	2.76
5.90	2.79

Frequency, GHz	Cable loss, dB
6.10	2.88
6.30	2.90
6.50	2.97
6.70	3.02
6.90	3.04
7.10	3.07
7.30	3.12
7.50	3.13
7.70	3.19
7.90	3.24
8.10	3.30
8.30	3.36
8.50	3.45
8.70	3.41
8.90	3.45
9.10	3.42
9.30	3.55
9.50	3.48
9.70	3.58
9.90	3.61
10.10	3.66
10.30	3.68
10.50	3.70
10.70	3.70
10.90	3.75
11.10	3.78
11.30	3.86
11.50	3.98
11.70	4.10
11.90	4.12
12.10	4.09
12.40	4.13
13.00	4.23
13.50	4.35
14.00	4.40
14.50	4.44
15.00	4.57
15.50	4.66
16.00	4.64
16.50	4.66
17.00	4.75
17.50	4.85
18.00	4.93



**Cable loss**  
**Cable 18 GHz, 6.5 m, blue, model: NPS-1803A-6500-NPS, S/N T4974, HL 1947**

Frequency, GHz	Cable loss, dB
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Cable loss, dB
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92



**Cable loss**  
**RF cable 8 m, model RG-214, HL 2009**

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	1	0.10	NA	±0.12
2	10	0.14		
3	30	0.25		
4	50	0.34		
5	100	0.53		
6	300	0.99		
7	500	1.31		
8	800	1.73		
9	1000	1.98		
10	1100	2.11		
11	1200	2.21		
12	1300	2.35		
13	1400	2.46		
14	1500	2.55		
15	1600	2.68		
16	1700	2.78		
17	1800	2.88		
18	1900	2.98		
19	2000	3.09		





**Cable loss**  
**Cable 40 GHz, 0.8 m, blue, model: KPS-1503A-800-KPS, S/N W4907, HL 2254**

Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB
0.03	0.04	5.10	0.80	15.00	1.49
0.05	0.07	5.30	0.83	15.50	1.49
0.10	0.09	5.50	0.83	16.00	1.46
0.20	0.15	5.70	0.84	16.50	1.47
0.30	0.19	5.90	0.87	17.00	1.50
0.40	0.25	6.10	0.86	17.50	1.57
0.50	0.29	6.30	0.89	18.00	1.63
0.60	0.33	6.50	0.90	18.50	1.57
0.70	0.37	6.70	0.89	19.00	1.63
0.80	0.41	6.90	0.93	19.50	1.65
0.90	0.44	7.10	0.92	20.00	1.64
1.00	0.45	7.30	0.95	20.50	1.75
1.10	0.48	7.50	0.96	21.00	1.72
1.20	0.51	7.70	0.97	21.50	1.78
1.30	0.53	7.90	1.01	22.00	1.76
1.40	0.54	8.10	1.00	22.50	1.72
1.50	0.57	8.30	1.05	23.00	1.83
1.60	0.59	8.50	1.04	23.50	1.80
1.70	0.64	8.70	1.07	24.00	1.90
1.80	0.67	8.90	1.11	24.50	1.81
1.90	0.69	9.10	1.09	25.00	1.98
2.00	0.71	9.30	1.14	25.50	1.91
2.10	0.73	9.50	1.12	26.00	2.02
2.20	0.75	9.70	1.15	26.50	1.92
2.30	0.77	9.90	1.16	27.00	1.97
2.40	0.79	10.10	1.16	28.00	2.02
2.50	0.81	10.30	1.19	29.00	1.95
2.60	0.83	10.50	1.14	30.00	1.94
2.70	0.85	10.70	1.19	31.00	2.11
2.80	0.87	10.90	1.17	32.00	2.17
2.90	0.89	11.10	1.13	33.00	2.27
3.10	0.91	11.30	1.20	34.00	2.27
3.30	0.93	11.50	1.13	35.00	2.29
3.50	0.95	11.70	1.20	36.00	2.35
3.70	0.97	11.90	1.18	37.00	2.37
3.90	0.99	12.10	1.14	38.00	2.40
4.10	1.01	12.40	1.19	39.00	2.57
4.30	1.03	13.00	1.34	40.00	2.36
4.50	1.05	13.50	1.33		
4.70	1.07	14.00	1.48		
4.90	1.09	14.50	1.45		



## Appendix D General information

### Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, telecommunications, environmental, safety standards, and by AMTAC (UK) for safety of medical devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01) and approved by Israel Ministry of environmental protection, radiation hazards department (Permit number 1158).

Address: PO Box 23, Binyamina 30500, Israel.

Telephone: +972 4628 8001

Fax: +972 4628 8277

e-mail: [mail@hermonlabs.com](mailto:mail@hermonlabs.com)

website: [www.hermonlabs.com](http://www.hermonlabs.com)

Person for contact: Mr. Alex Usoskin, QA manager.

### Abbreviations and acronyms

The following abbreviations and acronyms are applicable to this test report:

ASK	amplitude shift keying
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
EUT	equipment under test
GHz	gigahertz
H	height
Hz	hertz
kHz	kilohertz
kV	kilovolt
L	length
LNA	low noise amplifier
LMS	location and monitoring service
LO	local oscillator
m	meter
MHz	megahertz
NA	not applicable
QP	quasi-peak
RF	radio frequency
Rx	receiver
rms	root mean square
s	second
Tx	transmitter
V	volt
W	width

### Specification references

47CFR part 90: 2002	Private land mobile radio services
ANSI C63.2:96	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4:2001	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.