



HERMON LABORATORIES



Hermon Laboratories Ltd.
P.O.Box 23
Binyamina 30500, Israel
Tel. +972 46288001
Fax. +972 46288277
e-mail: mail@hermonlabs.com

ELECTROMAGNETIC EMISSIONS TEST REPORT

according to 47CFR Part 90, subpart I
for

Telematics Wireless Ltd.

EQUIPMENT UNDER TEST:

Electronic seal

Model:FP100SA915

This report is in conformity with ISO/IEC 17025. The A2LA logo endorsement applies only to the test methods and the standards that are listed in the scope of Hermon Laboratories accreditation.
The test results relate only to the items tested. **This test report must not be reproduced in any form except in full with the approval of Hermon Laboratories Ltd.**

Page 1 of 45

Document ID: TELRAD_FCC.15716_rev1.doc
Date of Issue: February 04



Contents

1 Project information 3

2 Summary and signatures 4

3 EUT description 5

3.1 GENERAL DESCRIPTION..... 5

4 Test results 6

4.1 PEAK OUTPUT POWER TEST ACCORDING TO PART 90 §90.205(k) 6

4.2 OCCUPIED BANDWIDTH ACCORDING TO PART 90 §90.209(5) 9

4.3 EXPOSURE LIMIT ACCORDING TO §2.1091 AND §1.1310 10

4.4 EMISSION MASK AND RADIATED SPURIOUS EMISSIONS TEST ACCORDING TO PART 90 §90.210(k)(3) 11

4.5 UNINTENTIONAL RADIATED EMISSIONS TEST ACCORDING TO §15.109 14

4.6 FREQUENCY STABILITY MEASUREMENT ACCORDING TO §90.213 15

Appendix A Plots 17

Appendix B Test equipment used for tests 30

Appendix C Antenna factors and cable loss..... 32

Appendix D General information 45

TEST FACILITY DESCRIPTION 45

ABBREVIATIONS AND ACRONYMS 45

SPECIFICATION REFERENCES..... 45



1 Project information

Description of equipment under test

Test items : Electronic seal
Manufacturer : Telematics Wireless Ltd.
Types (Models) : FP100SA915

Applicant information

Applicant's responsible person : Mr. Roman Sternberg, VP marketing
Company : Telematics Wireless Ltd.
Address : 26 Hamelacha street
P.O.Box : 1911
City : Holon
Postal code : 58117
Country : Israel
Telephone number : +972-3557 5750
Telefax number : +972-3557 5753

Test performance

Project Number: : 15716
Location : Hermon Laboratories
Receipt date : October 26, 2003
Test started : October 26, 2003
Test completed : February 2, 2004
Purpose of test : Apparatus compliance verification in accordance with emission requirements
Test specification(s) : 47CFR part 90, §§90.205, 90.209, 90.210, 90.213
part 15 §15.109



2 Summary and signatures

The EUT, FP100TA915 mobile transponder, was tested according to FCC part 90 subpart I, §§90.205(k), 90.209, 90.210(k)(3), part 15 §15.109 and found to comply with the standard requirements.

Test description	Specification reference	Tested by	Date tested	Test report paragraph	Verdict
RF output power	90.205(k), 2.1046	Mr. Y. Neuman, test engineer	October 27, 2003	4.1	Pass
Occupied bandwidth	90.209, 2.1049	Mr. Y. Neuman, test engineer	October 26, 2003	4.2	Pass
RF exposure	2.1091	Calculated	NA	4.3	Pass
Emission mask	90.210(k)(3), 2.1053	Mr. Y. Neuman, test engineer	December 1, 2003	4.4	Pass
Radiated spurious emissions	90.210, 2.1053	Mr. Y. Neuman, test engineer	October 27, 2003	4.4	Pass
Radiated emissions	15.109	Mr. Y. Neuman, test engineer	October 26, 2003; February 2, 2004	4.5	Pass
Frequency stability	90.213, 2.1055	Mr. M. Lerman, test engineer	December 1, 2003	4.6	Tested

Test report prepared by:

Mr. Yuri Neuman, MScEE, test engineer

Test report approved by:

Mr. Michael Nikishin, MScEE, group leader

Mr. Edward Usoskin, PhD, C.E.O.




3 EUT description

3.1 General description

The EUT, a small LMS transponder, operating at 915 MHz with unipolar ASK modulation (Manchester encoded) and utilizing an internal antenna, is used as an in-container component which serves for electronic identification and tampering indication of containers. Data bit rate is 500 kbps. The device is powered by 3.6 V internal battery. The frequencies generated or used in the EUT are: 32.768 kHz, 8 MHz.

EUT general view

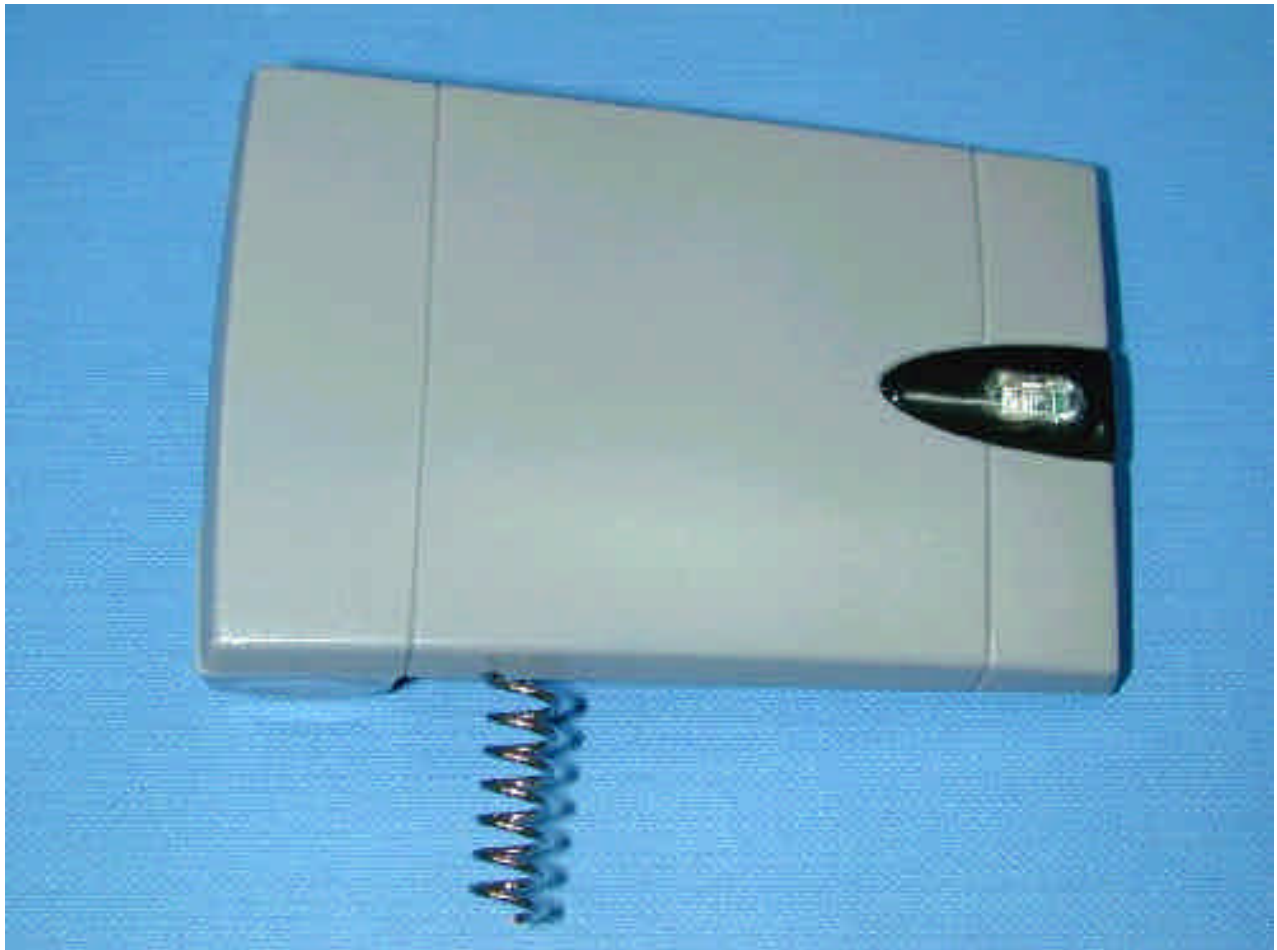



4 Test results

4.1 Peak output power test according to part 90 §90.205(k)

DATE of TEST: October 27, 2003
 AMBIENT TEMPERATURE: 28°C
 RELATIVE HUMIDITY: 49 %
 AIR PRESSURE: 1012 hPa
 MEASUREMENT UNCERTAINTY: ±3.5 dB

Carrier frequency, MHz	Radiated measured result, dB(uV/m)	Generator P _{out} , dBm	Cable loss, dB	Antenna gain, dBd	ERP, dBm	Limit, dBm	Margin, dB	Verdict
914.92	112.9	18.6	2.3	-0.4	15.9	44.7	28.8	Pass

The result recorded in the table was obtained throughout measurements with log periodic antenna in horizontal polarization.

Notes:

Margin= dB below (negative if above) specification limit.

LIMITATION ON POWER

Operating frequency range, MHz	Maximum effective radiated power (ERP)
902 - 927.25	30 W (44.7 dBm)



TEST PROCEDURE

The EUT was set up on a wooden 80 cm height turntable at the OATS as shown in Figure 4.1.1. The measurements were performed at 3 m test distance with log periodic antenna. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.

The EUT was replaced with a substitution dipole antenna connected to a signal generator. The measuring antenna height was changed from 1 to 4 m to find a maximum radiation. The level of the signal generator output was adjusted until the previously recorded field strength maximum reading was obtained as depicted in table above.

The equivalent power was calculated using the equation:

$$ERP \text{ (dBm)} = P_{\text{out gen}} \text{ (dBm)} - \text{cable loss (dB)} + G_a \text{ (dBd)}, \text{ where}$$

$P_{\text{out gen}}$ is the generator output power


G_a is the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.

TEST EQUIPMENT USED:

HL 0034	HL 0038	HL 0091	HL 0287	HL 0415	HL 0661	HL 0812
HL 1430	HL 1565	HL 1947	HL 2400			



Figure 4.1.1
Setup for radiated emissions test

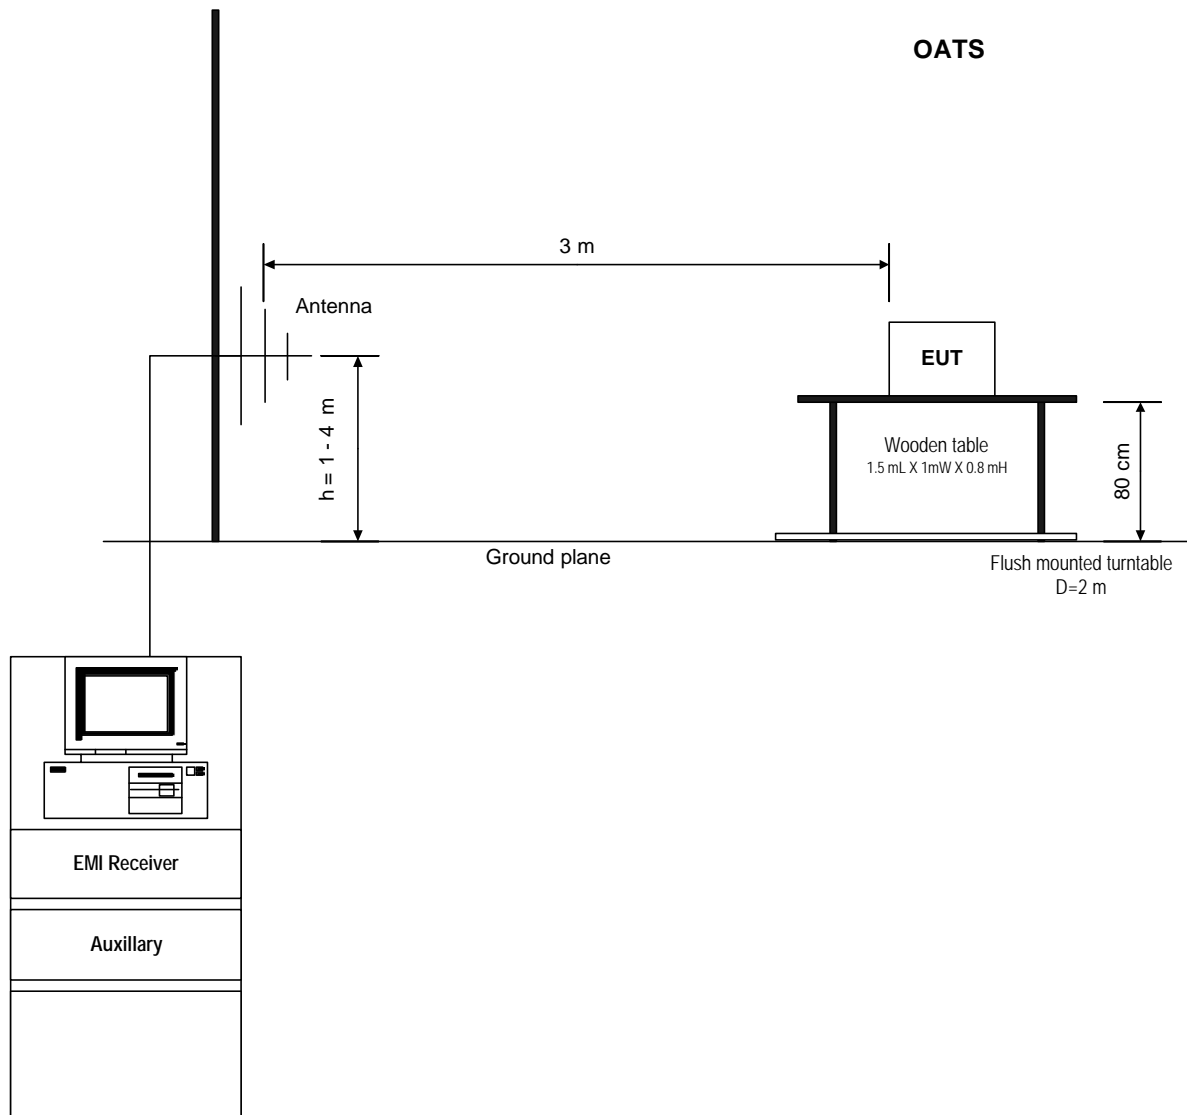



4.2 Occupied bandwidth according to part 90 §90.209(5)

METHOD OF MEASUREMENTS	ANSI C63.4 §13.1.7
DATE of TEST:	October 26, 2003
AMBIENT TEMPERATURE:	25°C
RELATIVE HUMIDITY:	46 %
AIR PRESSURE:	1012 hPa
MEASUREMENT UNCERTAINTY:	±168 Hz
CARRIER FREQUENCY:	914.92 MHz

Measured 26 dB bandwidth, MHz	Authorized bandwidth, MHz	Margin, MHz	Reference to Plots in Appendix A	Verdict
5.68	12	6.32	A1	Pass

LIMIT

Operating frequency range, MHz	Authorized bandwidth, MHz
909.75 – 921.75	12

TEST PROCEDURE

The EUT was set up in anechoic chamber as shown in Figure 4.4.2. The measuring antenna was connected to spectrum analyzer, which settings are shown in plot. The measurements were performed at carrier frequency in continuous transmit mode of operation as frequency band between 26 dBc points.

TEST EQUIPMENT USED:

HL 0521	HL 0589	HL 0592	HL 0593	HL 0594	HL604	HL 1004	HL 2009
---------	---------	---------	---------	---------	-------	---------	---------



4.3 Exposure limit according to §2.1091 and §1.1310

Limit for power density for general population/uncontrolled exposure is $f/1500$ mW/cm² for 300 – 1500 MHz frequency range:

$$P = 915/1500 = 0.61 \text{ mW/cm}^2$$

The power density P (mW/cm²) = $P_T / 4\pi r^2$, where

P_T is the maximum equivalent isotropically radiated power (EIRP), which is equal to:

$$P_T = 15.9 \text{ dBm} + 2.15 \text{ dBi} = 18.05 \text{ dBm} = 63.8 \text{ mW},$$

where 2.15 dBi is the gain of unideal half-wave dipole antenna relative to the isotropical radiator.

The power density at 20 cm (minimum safe distance, required for mobile devices), calculated as follows:

$$63.8 \text{ mW} / 4\pi (20 \text{ cm})^2 = 0.0127 \text{ mW/cm}^2 \ll 0.61 \text{ mW/cm}^2$$

was found far below the limit.

Hence, no safety hazard exists for human being.



4.4 Emission mask and radiated spurious emissions test according to part 90 §90.210(k)(3)

METHOD OF MEASUREMENTS	ANSI 63.4 §13.1.4
DATE of TEST:	October 26, 27, December 1, 2003
AMBIENT TEMPERATURE:	28°C
RELATIVE HUMIDITY:	49 %
AIR PRESSURE:	1012 hPa
FREQUENCY RANGE:	9 kHz – 9.3 GHz
MEASUREMENT UNCERTAINTY:	±4.5 dB

The peak power of any emission shall be attenuated below the power of the highest emission contained within the licensee's sub-band in accordance with the following schedule:

- 1) On any frequency within the authorized bandwidth: zero dB;
- 2) On any frequency outside the licensee's sub-band edges: $55 + 10 \log (P)$ dB, where (P) is the highest emission (in watts) of the transmitter inside the licensee's sub-band.

4.4.1 Test procedure

The test was performed in the anechoic chamber and open area test site. The EUT was set up on the 80 cm height wooden table as shown in Figures 4.1.1, 4.4.1 and 4.4.2. The measurements were performed at 3-m test distance: with the loop antenna in the 9 kHz to 30 MHz range, the biconilog - in the 30 MHz to 1000 MHz range, the log periodic - in the 200 MHz to 1 GHz range, the double ridged guide – in 1 GHz to 9.3 GHz range.

9 kHz – 30 MHz frequency range. The loop antenna was positioned with its plane vertical. The loop center was 1 meter above the ground plane. To find maximum radiation the turntable was rotated 360 and the measuring antenna was rotated around its vertical axis.

30 MHz – 9.2 GHz frequency range. To find maximum radiation the turntable was rotated 360°, measuring antenna height was changed from 1 to 4 m, and the antennas polarization was changed from vertical to horizontal.

The following calculated limit was applied to spurious emissions throughout the testing in transmit mode: the specified limit $55 + 10 \log (P)$ was converted in ERP units: – 25 dBm.

This limit was applied to spurious emissions throughout the following frequency ranges:

9 kHz to 909.75 MHz and 921.75 MHz to 9.3 GHz.

Emissions at the lower band edge and at the higher band edge were tested and provided in Plots A5, A6. The full test results are shown in Plots A2 to A10.

No spurious emissions except harmonics were found in 1 GHz – 9.3 GHz range, which were retested by substitution method at the OATS.

The EUT was replaced with a substitution antenna (double ridge guide for the mentioned range) connected to signal generator. The measuring antenna height was changed from 1 to 4 m to find a maximum radiation. The level of the signal generator output was adjusted until the previously recorded field strength maximum reading was obtained as depicted in Table 4.4.1. For calculation equation refer to section 4.1.



Table 4.4.1
Radiated emissions measurement results

Frequency, MHz	Radiated measured result, dB(uV/m)	Antenna polarization	Generator P _{out} , dBm	Cable loss, dB	Antenna gain, dBd	ERP, dBm	Limit, dBm	Margin, dB	Verdict
909.29	71.32	Horizontal	-23.3	2.3	-0.4	-26	-25	1	Pass
922.27	71.15	Horizontal	-23.4	2.3	-0.4	-26.1	-25	1.1	Pass
1829.85	72.28	Vertical	-32.0	0.7	4.7	-28	-25	3	Pass
2744.75	57.57	Vertical	-47.2	0.9	5.5	-42.6	-25	17.6	Pass
3659.58	56.8	Horizontal	-48.3	1.1	5.5	-43.9	-25	18.9	Pass
4574.22	58.2	Horizontal	-43.8	1.2	4.6	-40.4	-25	15.4	Pass
5489.17	67.17	Horizontal	-31.5	1.3	2.4	-30.4	-25	5.4	Pass
6404.00	61.5	Vertical	-40.3	1.5	3.3	-38.5	-25	13.5	Pass
7318.85	69.5	Horizontal	-31.5	1.6	4.1	-29	-25	4	Pass
8233.74	64.2	Horizontal	-37.0	1.7	3.7	-35	-25	10	Pass
9148.67	60.2	Vertical	-43.8	1.8	7.4	-38.2	-25	13.2	Pass

TEST EQUIPMENT USED IN ANECHOIC CHAMBER:

HL 0446	HL 0465	HL 0521	HL 0589	HL 0592	HL 593	HL 0594
HL 0604	HL 1004	HL 1947	HL 1984	HL 2009		

TEST EQUIPMENT USED AT OPEN AREA TEST SITE:

HL 0034	HL 0038	HL 0091	HL 0287	HL 0415	HL 0661	HL 0812
HL 1116	HL 1200	HL 1424	HL 1430	HL 1565	HL 1942	HL 1947
HL 2254	HL 2259	HL 2400	HL 2432			



Figure 4.4.1

Set up for radiated emissions measurement in 9 kHz to 30 MHz range


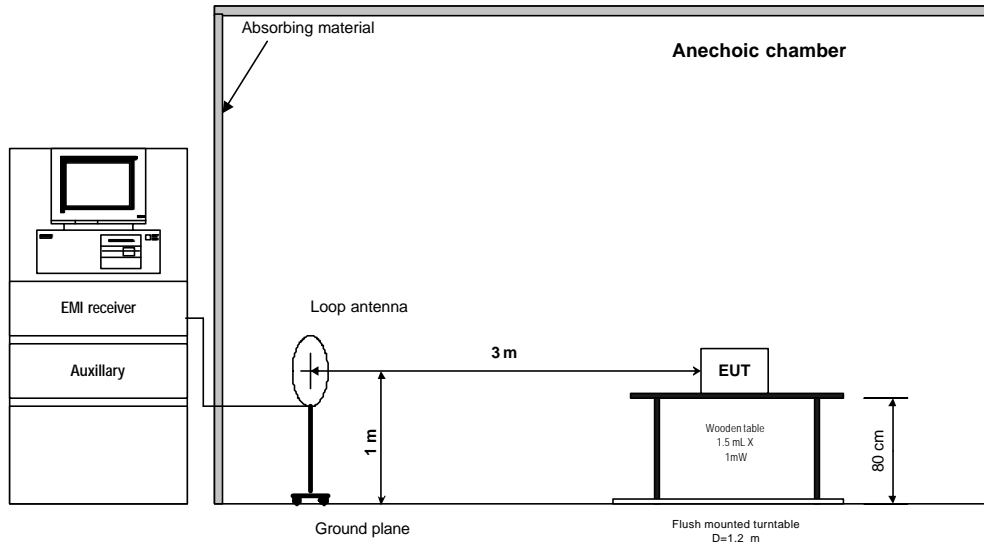


Figure 4.4.2

Set up for radiated emissions measurement above 30 MHz



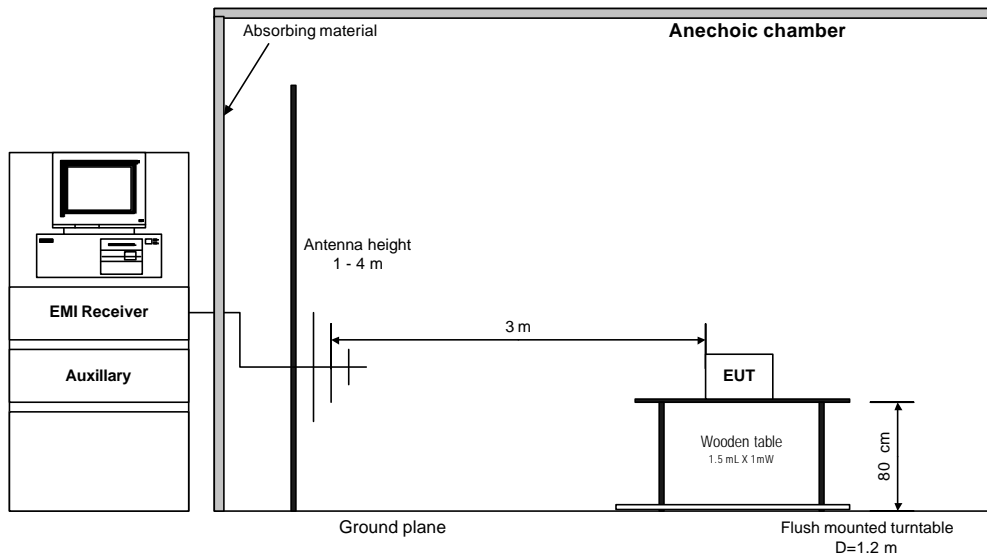

4.5 Unintentional radiated emissions test according to §15.109

METHOD OF MEASUREMENT: ANSI 63.4 §11.6 / ANSI 63.4 §12.1.4
 TEST PERFORMED AT: Anechoic chamber
 DATE of TEST: October 26, 2003; February 2, 2004
 AMBIENT TEMPERATURE: 25°C
 RELATIVE HUMIDITY: 46 %
 AIR PRESSURE: 1012 hPa
 DISTANCE BETWEEN ANTENNA AND EUT: 3 m
 THE EUT WAS TESTED AS: Table-top
 FREQUENCY RANGE: 30 MHz – 5 GHz
 DETECTOR TYPE: Peak
 MEASUREMENT UNCERTAINTY: ± 6 dB max

For test procedure and setup refer to section 4.4.

For full test results refer to plots A11-A13. No radiated emissions from EUT were found.

LIMIT (§ 15.109)

Frequency, MHz	Class B equipment @ 3 m dB(mV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 5000	54.0

TEST EQUIPMENT USED FOR MEASUREMENTS IN 30 – 1000 MHz:

HL 0465	HL 0521	HL 0589	HL 0592	HL 0593	HL 0594	HL 0604
HL 1004	HL 2009					

TEST EQUIPMENT USED FOR MEASUREMENTS IN 1000 MHz- 5 GHz:

HL 1424	HL 1425	HL 1566	HL 1826	HL 1849	HL 1850	HL 1942
HL 1984	HL 2109	HL 2259				



4.6 Frequency stability measurement according to §90.213

DATE of TEST: December 1, 2003
AMBIENT TEMPERATURE: 22°C
RELATIVE HUMIDITY: 37 %
AIR PRESSURE: 1019 hPa

TEST PROCEDURE

The EUT frequency stability was measured with variation of supply voltage or ambient temperature.

Frequency stability test results vs supply voltage

Voltage, V	Frequency, Hz	Displacement, Hz	Time, min
U _{cc} =3.6 V	914,937,218	-305	startup
	914,939,304	1,781	+2
	914,937,973	450	+5
	914,937,523	0	+10
U _{cc} =2.7 V	914,781,590	-155,933	startup
	914,780,092	-157,431	+2
	914,780,954	-156,569	+5
	914,781,046	-156,477	+10
U _{cc} =4.14 V	914,944,931	7,408	startup
	914,943,699	6,176	+2
	914,943,012	5,489	+5
	914,944,108	6,585	+10

Reference frequency: 914937523 Hz

For information only: 2.5 ppm = ± 2287 Hz

TEST EQUIPMENT USED:

HL 0026	HL 0481	HL 0493	HL 0559			



Frequency stability test results vs ambient temperature

Temperature, °C	Frequency, Hz	Displacement, Hz	Time, min
t°=30°C	914,939,127	1,604	startup
	914,933,145	-4,378	+2
	914,933,511	-4,012	+5
	914,935,739	-1,784	+10
t°=40°C	914,592,451	-345,072	startup
	914,935,739	-1,784	+2
	914,922,944	-14,579	+5
	914,924,922	-12,601	+10
t°=50°C	914,909,470	-28,053	startup
	914,909,512	-28,011	+2
	914,807,980	-129,543	+5
	914,809,912	-127,611	+10
t°=10°C	914,440,749	-496,774	startup
	914,927,166	-10,357	+2
	914,928,908	-8,615	+5
	914,930,199	-7,324	+10
t°=0°C	914,910,768	-26,755	startup
	914,911,383	-26,140	+2
	914,911,522	-26,001	+5
	914,912,183	-25,340	+10
t°=-10°C	914,320,593	-616,930	startup
	914,886,556	-50,967	+2
	914,887,247	-50,276	+5
	914,890,618	-46,905	+10
t°=-20°C	914,839,812	-97,711	startup
	914,839,800	-97,723	+2
	914,838,274	-99,249	+5
	914,838,030	-99,493	+10
t°=-30°C	914,823,059	-114,464	startup
	914,822,513	-115,010	+2
	914,821,620	-115,903	+5
	914,821,621	-115,902	+10




Appendix A Plots

Plot A 1

26 dB bandwidth measurement result

11:24:26 OCT 26, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKRΔ 5.6B MHz
-.22 dB

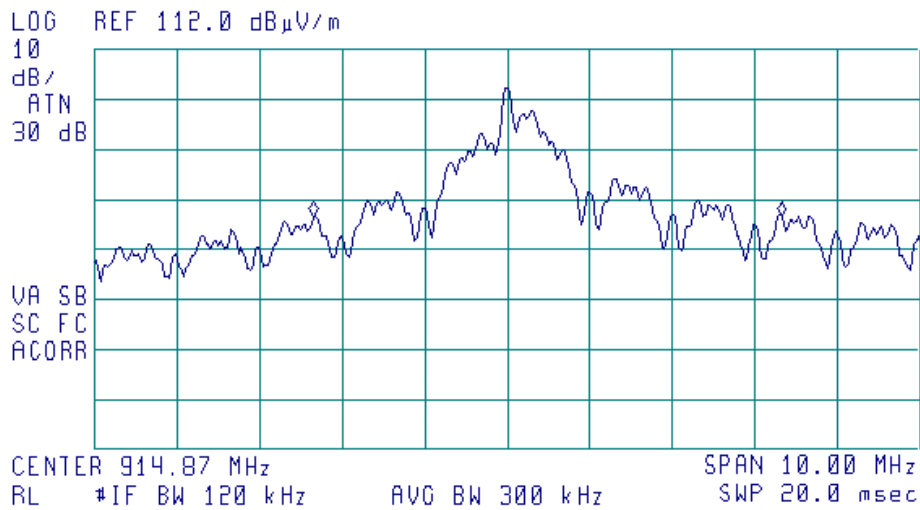

Note: Measurement was performed in continuous transmission mode




Plot A 2

Radiated spurious emission measurements in the anechoic chamber from 9 kHz to 150 kHz

15:13:31 OCT 26, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 10.1 kHz
59.00 dB μ V/m

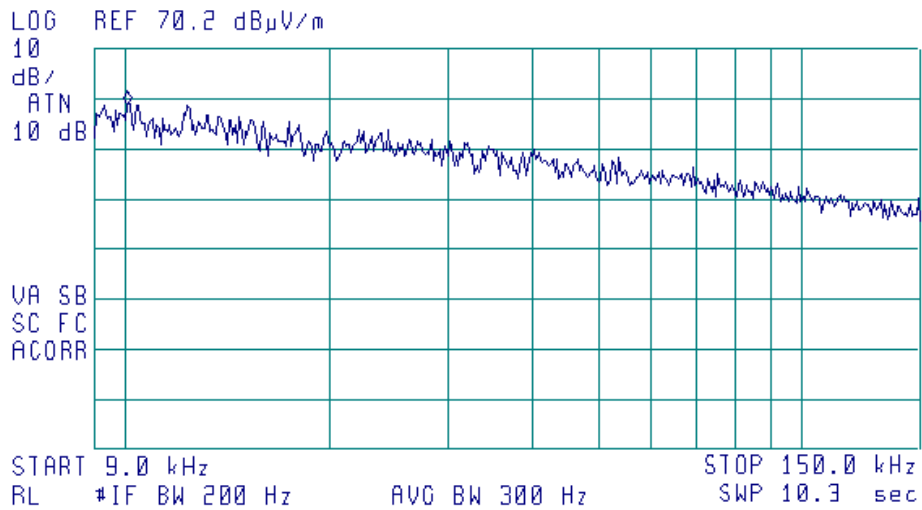

No spurious emissions were found




Plot A 3

Radiated spurious emission measurements in the anechoic chamber from 150 kHz to 30 MHz

15:09:20 OCT 26, 2003

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 150 kHz
55.07 dB μ V/m

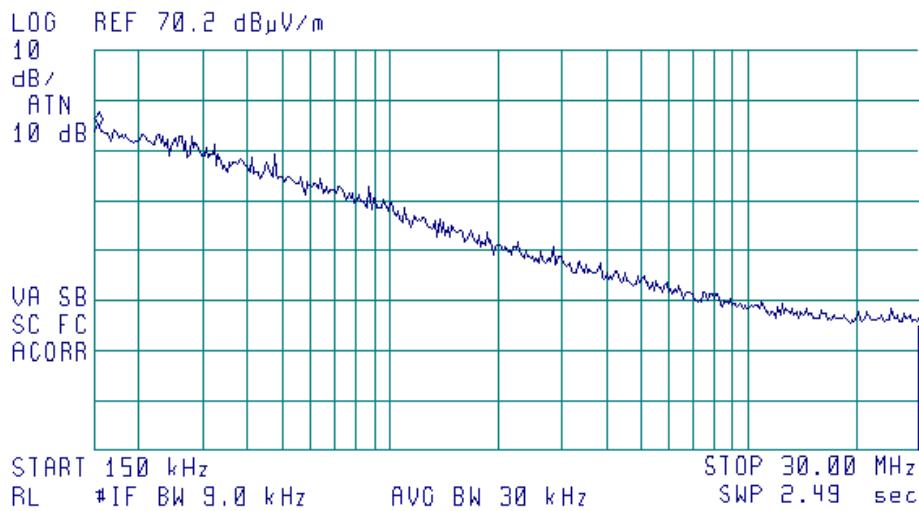

No spurious emissions were found




Plot A 4

Radiated spurious emission measurements in the anechoic chamber from 30 MHz to 1000 MHz

11:33:06 OCT 26, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 914.2 MHz
104.04 dB μ V/m

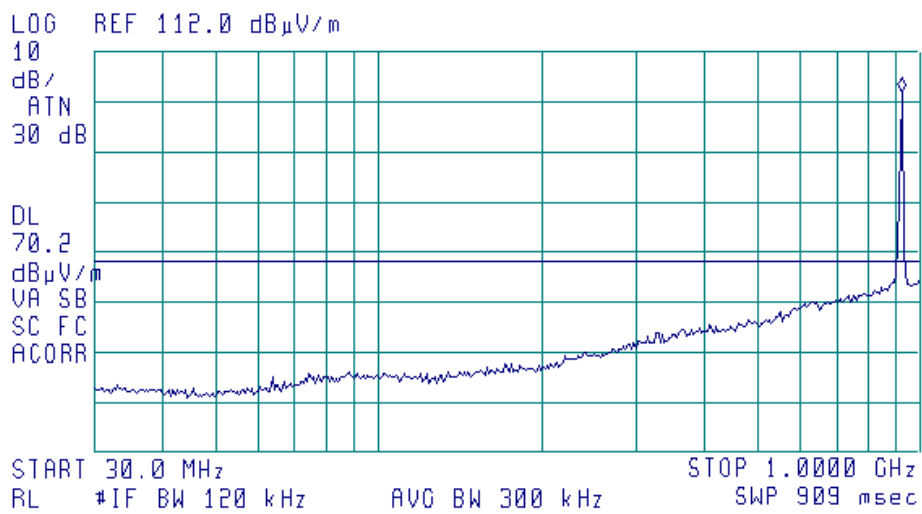

No spurious emissions were found




Plot A 5

Radiated spurious emission measurements at lower band edge (900 MHz to 909.75 MHz) at the OATS

09:51:08 DEC 01, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 909.287 MHz
71.32 dB μ V/m

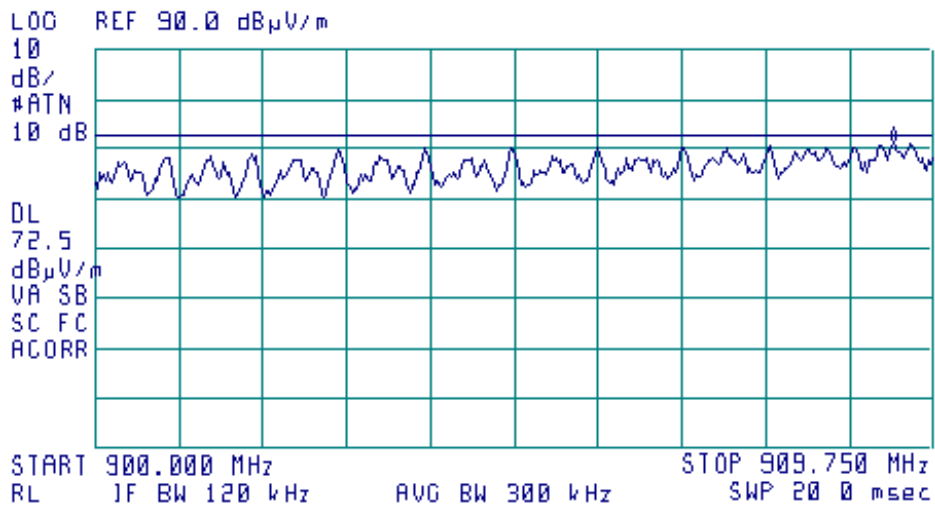




Plot A 6

Radiated spurious emission measurements at higher band edge (921.75 MHz to 945 MHz) at the OATS

09:58:55 DEC 01, 2003

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 922.27 MHz
71.15 dB μ V/m

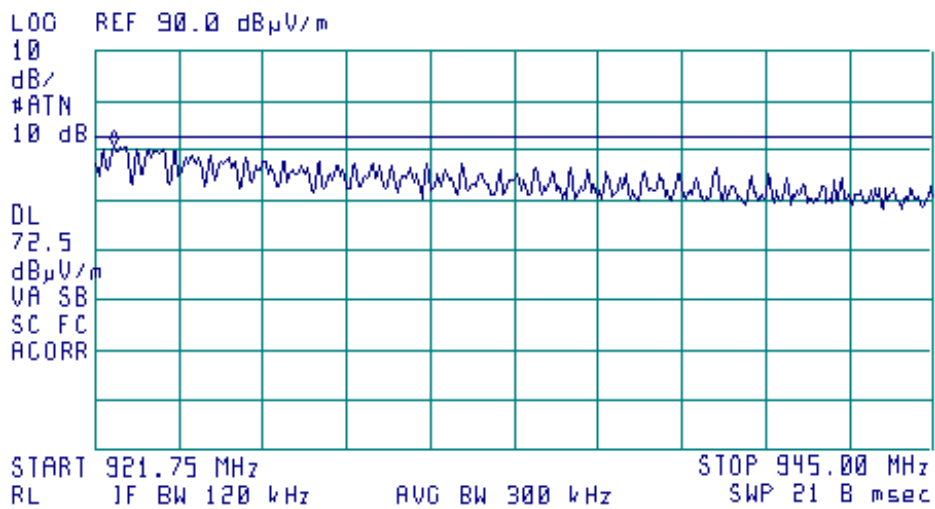




Plot A 7

Radiated spurious emission measurements in the anechoic chamber from 1.000 GHz to 2.900 GHz

16:01:03 OCT 26, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 1.831 GHz
71.59 dB μ V/m

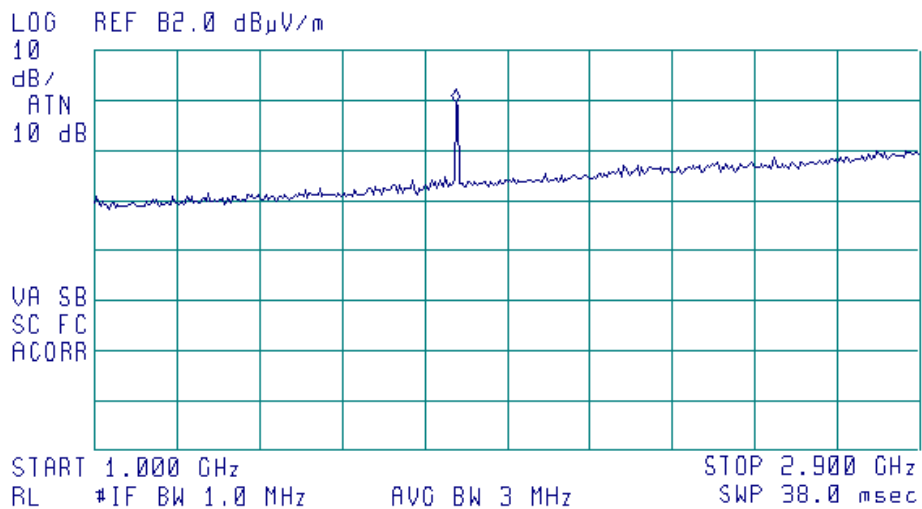

No spurious emissions were found except 2nd harmonic




Plot A 8

Radiated spurious emission measurements in the anechoic chamber from 2.900 GHz to 6.500 GHz

16:09:21 OCT 26, 2003

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 6.401 GHz
62.30 dB μ V/m

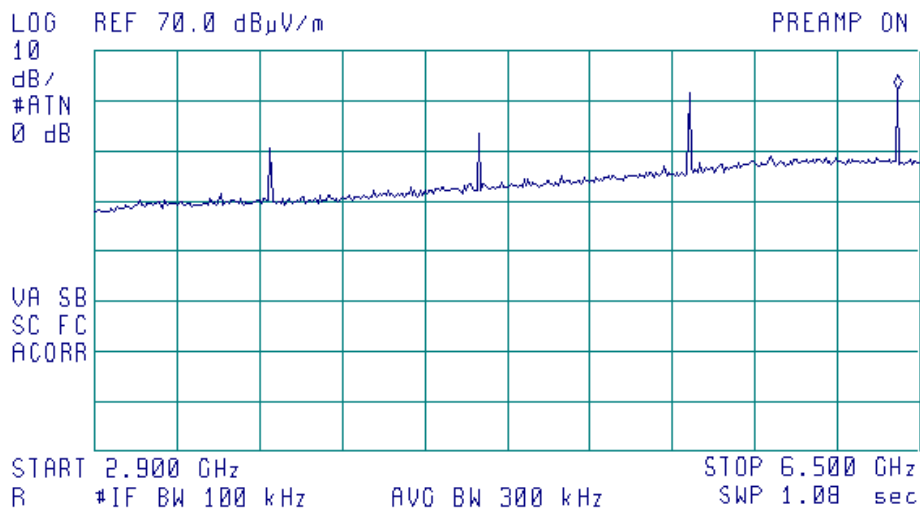


No spurious emissions were found except harmonics.



Plot A 9

Radiated spurious emission measurements in the anechoic chamber from 6.500 GHz to 8.000 GHz

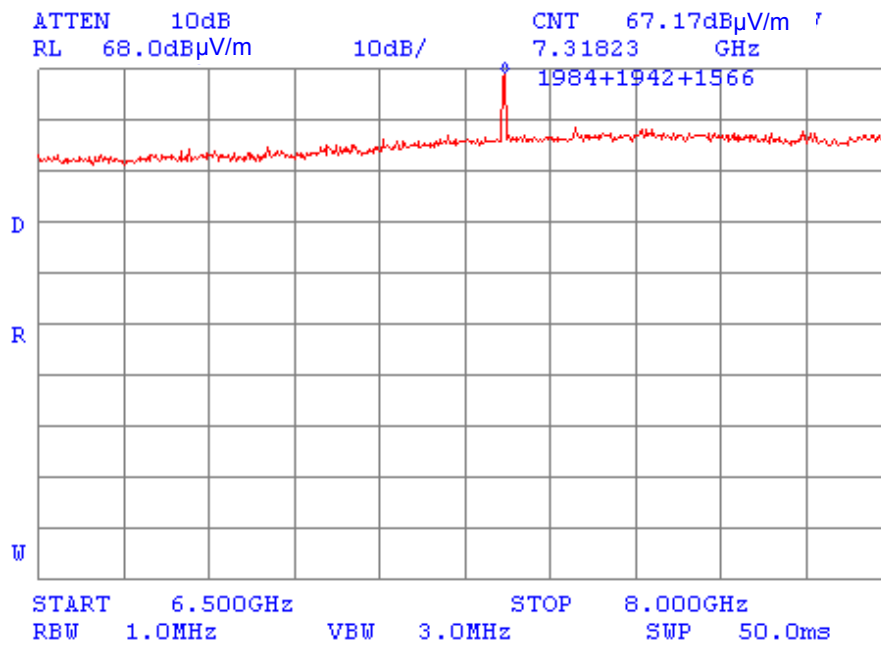


No spurious emissions were found except 8th harmonic.



Plot A 10

Radiated spurious emission measurements in the anechoic chamber from 8.000 GHz to 9.300 GHz

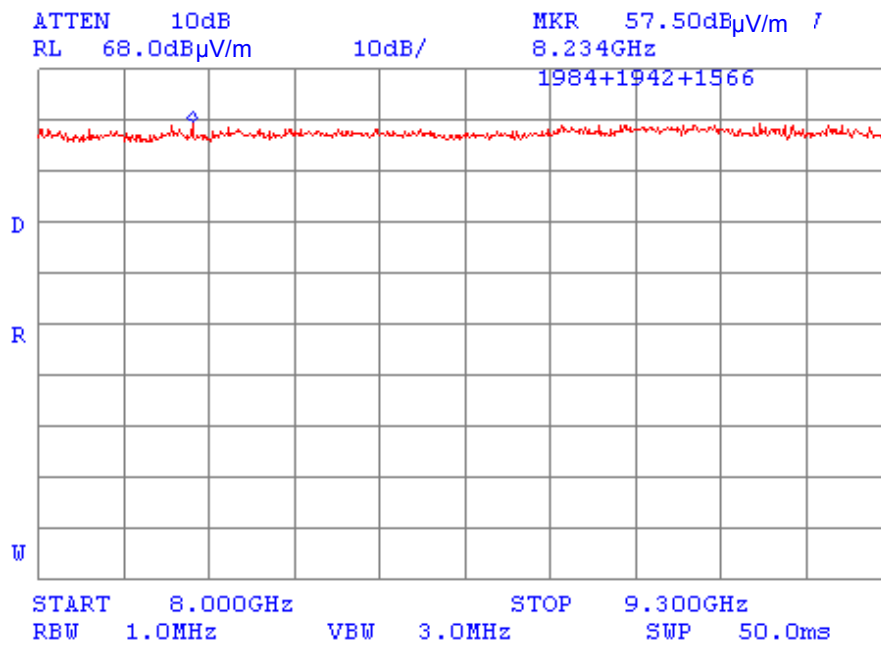




Plot A 11

Radiated emission measurements in the anechoic chamber from 30 MHz to 1 GHz,
test distance 3 m, vertical & horizontal antenna polarization

12:03:17 OCT 26, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 942.8 MHz
32.03 dB μ V/m

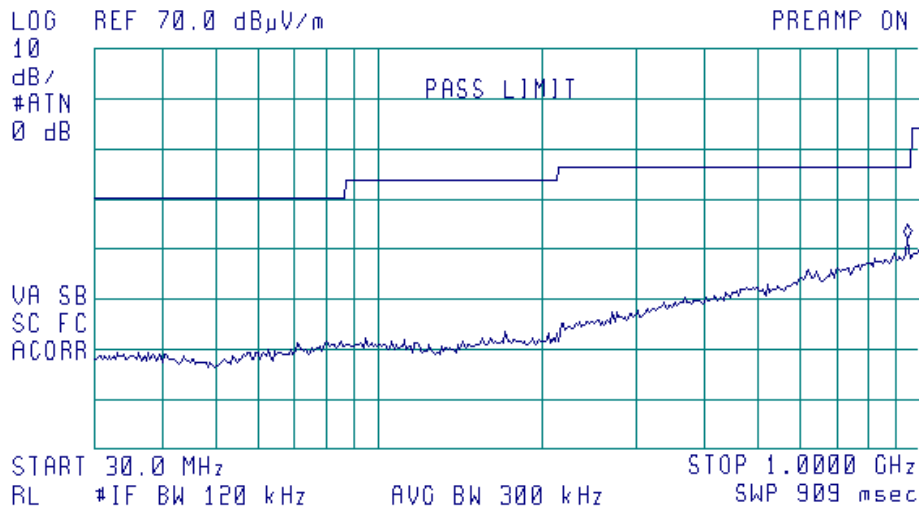

No emissions were found.




Plot A 12

Radiated emission measurements in the anechoic chamber from 1 GHz to 2.5 GHz,
test distance 3 m, vertical & horizontal antenna polarization

18:12:08 FEB 02, 2004


ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 2.493 GHz
41 07 dB μ V/m

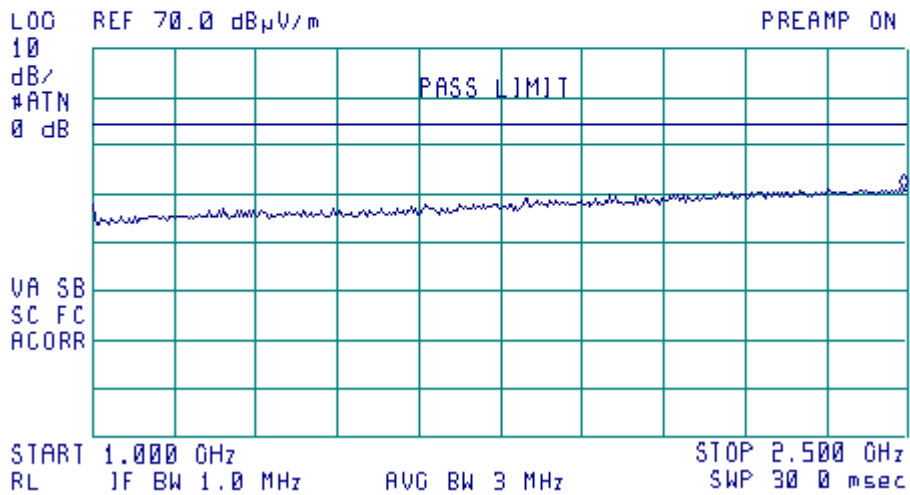



Plot A 13

Radiated emission measurements in the anechoic chamber from 2.5 GHz to 5 GHz,
test distance 3 m, vertical & horizontal antenna polarization

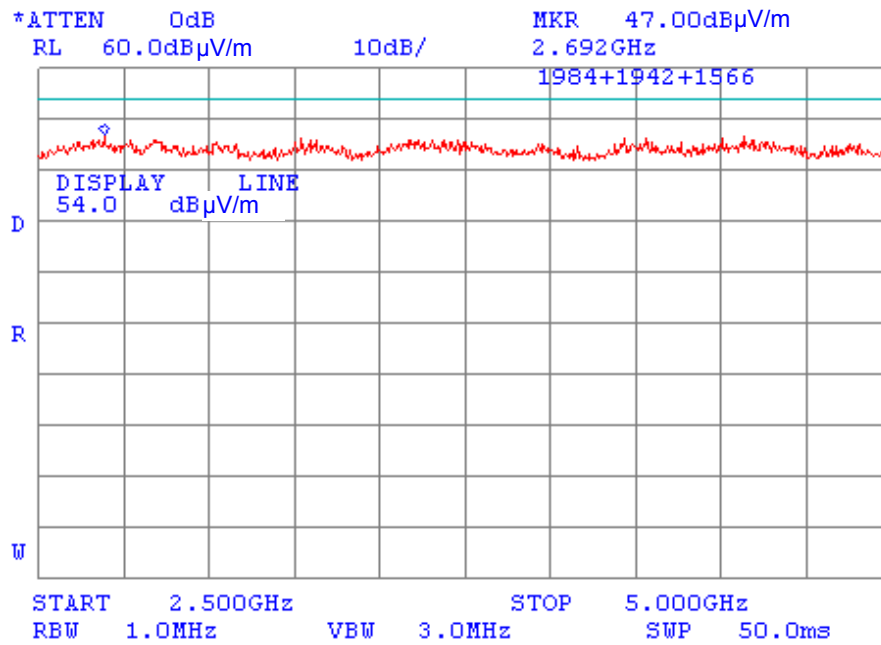

External LNA gain is included in test results



Appendix B Test equipment used for tests

HL Serial No.	Description	Manufacturer information			Due Calibr. Month/year
		Name	Model No.	Serial No.	
0026	Spectrum analyzer, 100 Hz-2.2 GHz	Anritsu	MS 2601A	3460	9/04
0034	Log periodic antenna, 200 – 1000 MHz	Electro-Metrics	LPA 25/30	1988	1/04
0038	Antenna mast, 1-4 m	Hermon Labs	AM-1	028	2/04 check
0091	Position controller for antenna mast + turntable, OFTS	Hermon Labs	CRL-2	091	4/04 check
0287	Turntable, motorized diameter, 2 m	Hermon Labs	TMD-2	042	11/04 check
0415	Cable coax RF, RG-58	Hermon Labs	CC-3	056	5/04
0446	Active loop antenna, 10 kHz-30 MHz	Electro-Mechanics	6502	2857	10/04
0465	Anechoic chamber 9 (L) x 6.5 (W) x 5.5 (H) m	Hermon Labs	AC-1	023	10/05 check
0481	Power supply 40 V/1 A	Horizon Electronics	DHP 40-1	7625	2/04
0493	Oven temperature	Thermotron	S-1.2 Mini-Max	4016	9/04
0521	Spectrum analyzer with RF filter section (EMI receiver 9 kHz - 6.5 GHz)	Hewlett Packard	8546A	0319	9/04
0559	Multimeter digital	Fluke	76	0903	10/04
0589	Cable coaxial, GORE A2POL118.2, 3 m	Hermon Labs	GORE-3	589	11/04
0592	Position controller	Hermon Labs	L2-SR3000	100	5/04 check
0593	Antenna mast, 1-4 m/ 1-6 m Pneumatic	Hermon Labs	AM-F1	101	2/04 check
0594	Turntable for Anechoic Chamber, flush mounted, d=1.2 m, pneumatic	Hermon Labs	WDC1	102	1/04 check
0604	Antenna biconilog log-periodic/T Bow-Tie, 26 - 2000 MHz	EMCO	3141	9611-1011	1/04
0661	Generator swept signal, 10 MHz to 40 GHz+ 10 dBm	Hewlett Packard	83640B	0266	9/04
0812	Cable, coax, RG-214, 11.5 m, N-type connectors	Hermon Labs	C214-11	148	5/04
1004	Cable, coaxial ANDREW PSWJ4, 6 m	Hermon Labs	ANDREW-6	163	12/04
1116	Antenna horn, 1-18 GHz	Hermon Labs	A1-18	186	3/04
1200	Quadruplexer, 1-12 GHz	Elettronica S.p.A. - Roma	UE 84	0240	4/04 check
1424	Spectrum analyzer, 30 Hz - 40 GHz	Agilent Technologies	8564EC	3946A00219	8/04
1425	EMI receiver system, 9 kHz - 2.9 GHz	Agilent Technologies	8542E	3710A00222	9/04
1430	EMI receiver system, 9 kHz - 2.9 GHz	Agilent Technologies	8542E	3807A00262	9/04
1565	Antenna, dipole, tunable, 500 - 1000 MHz	Electro-Metrics	TDS-30-2	334	1/04
1566	Cable RF, 2 m	Huber-Suhner	Sucoflex 104PE	13094/4PE	12/04



HL Serial No.	Description	Manufacturer information			Due Calibr. Month/ year
		Name	Model No.	Serial No.	
1942	Cable 18 GHz, 4 m, blue	Rhophase Microwave Ltd	SPS-1803A-4000-NPS	T4658	10/04
1947	Cable 18 GHz, 6.5 m, blue	Rhophase Microwave Ltd	NPS-1803A-6500-NPS	T4974	10/04
1984	Antenna, double ridged waveguide horn, 1-18 GHz, 300W, N-type	EMC Test Systems	3115	9911-5964	3/04
2009	Cable RF, 8 m	Alpha Wire	RG-214	C-56	12/04
2109	Anechoic chamber 6 (L) x 5.5 (W) x 2.95 (H) m	Hermon Labs	AC-2	NA	12/04 check
2254	Cable 40 GHz, 0.8 m, blue	Rhophase Microwave	KPS-1503A-800-KPS	W4907	11/04
2259	Amplifier Low Noise 2-20 GHz	Sophia Wireless	LNA0220-C	0223	11/04
2400	Cable 40 GHz, 1.5 m, green	Rhophase Microwave Ltd.	KPS-1503A-1500-KPS	X2946	6/04
2432	Antenna, double-ridged waveguide horn, 1-18 GHz	EMC Test Systems	3115	000271777	7/04



Appendix C Antenna factors and cable loss

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Double ridged guide antenna
Hermon Laboratories, model A1-18, S/N 186, HL 1116

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.6
1500.0	26.4
2000.0	29.7
2500.0	31.1
3000.0	31.5
3500.0	32.7
4000.0	36.1
4500.0	36.1
5000.0	39.9
5500.0	40.5
6000.0	40.4
6500.0	41.0
7000.0	41.2
7500.0	41.2
8000.0	44.3
8500.0	40.7
9000.0	39.3
9500.0	41.3
10000.0	42.8
10500.0	43.8
11000.0	47.0
11500.0	46.3
12000.0	43.4
12500.0	41.8
13000.0	41.9
13500.0	44.5
14000.0	44.8
14500.0	44.9
15000.0	44.4
15500.0	43.4
16000.0	42.6
16500.0	43.6
17000.0	42.3
17500.0	45.9
18000.0	45.3

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL 2432

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



**Antenna factor
Log periodic antenna
Electro-Metrics, model LPA-25/30
Ser.No.1988**

Frequency MHz	Antenna Factor dB(1/m)	Frequency MHz	Antenna Factor dB(1/m)
200	12.6	625	20.4
225	12.2	650	20.9
250	13.4	675	22.0
275	14.3	700	22.2
300	15.2	725	22.7
325	15.7	750	22.5
350	15.9	775	22.7
375	16.4	800	22.8
400	17.0	825	23.2
425	17.4	850	23.5
450	17.9	875	23.9
475	18.6	900	24.0
500	19.1	925	24.0
525	19.3	950	24.2
550	19.6	975	24.7
575	19.8	1000	25.1
600	20.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

**Antenna factor
Active Loop Antenna
Model 6502
S/N 2857**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna Factor
Biconilog Antenna EMCO Model 3141
Ser.No.1011

Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8
28	7.8
30	7.8
40	7.2
60	7.1
70	8.5
80	9.4
90	9.8
100	9.7
110	9.3
120	8.8
130	8.7
140	9.2
150	9.8
160	10.2
170	10.4
180	10.4
190	10.3
200	10.6
220	11.6
240	12.4
260	12.8
280	13.7
300	14.7
320	15.2
340	15.4
360	16.1
380	16.4
400	16.6
420	16.7
440	17.0
460	17.7
480	18.1
500	18.5
520	19.1
540	19.5
560	19.8
580	20.6
600	21.3
620	21.5
640	21.2
660	21.4
680	21.9
700	22.2
720	22.2
740	22.1
760	22.3
780	22.6
800	22.7
820	22.9
840	23.1
860	23.4
880	23.8
900	24.1
920	24.1

Frequency, MHz	Antenna Factor, dB(1/m)
940	24.0
960	24.1
980	24.5
1000	24.9
1020	25.0
1040	25.2
1060	25.4
1080	25.6
1100	25.7
1120	26.0
1140	26.4
1160	27.0
1180	27.0
1200	26.7
1220	26.5
1240	26.5
1260	26.5
1280	26.6
1300	27.0
1320	27.8
1340	28.3
1360	28.2
1380	27.9
1400	27.9
1420	27.9
1440	27.8
1460	27.8
1480	28.0
1500	28.5
1520	28.9
1540	29.6
1560	29.8
1580	29.6
1600	29.5
1620	29.3
1640	29.2
1660	29.4
1680	29.6
1700	29.8
1720	30.3
1740	30.8
1760	31.1
1780	31.0
1800	30.9
1820	30.7
1840	30.6
1860	30.6
1880	30.6
1900	30.6
1920	30.7
1940	30.9
1960	31.2
1980	31.6
2000	32.0

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field intensity in dB(μ V/meter).



Cable loss
Cable Coaxial, RG-58/RG-214, s/n 056, HL 0415
+ Cable Coaxial, RG-214, 11.5m, s/n 148, HL 0812

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	20	0.73	±0.12
2	30	0.91	
3	50	1.2	
4	80	1.56	
5	100	1.76	
6	200	2.59	
7	300	3.26	
8	400	3.93	
9	500	4.42	
10	600	4.92	
11	700	5.36	
12	800	5.88	
13	900	6.41	
14	1000	6.71	
15	1500	8.63	
16	2000	10.39	



Cable loss
RF cable 8 m, model RG-214, HL 2009

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	1	0.10	NA	±0.12
2	10	0.14		
3	30	0.25		
4	50	0.34		
5	100	0.53		
6	300	0.99		
7	500	1.31		
8	800	1.73		
9	1000	1.98		
10	1100	2.11		
11	1200	2.21		
12	1300	2.35		
13	1400	2.46		
14	1500	2.55		
15	1600	2.68		
16	1700	2.78		
17	1800	2.88		
18	1900	2.98		
19	2000	3.09		



Cable loss
Cable Coaxial, GORE A2P01POL118, 2.3 m, model:GORE-3, HL 0589
+ Cable Coaxial, ANDREW PSWJ4, 6m, model: ANDREW-6, HL 1004

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	30	0.33	6.5	±0.12
2	50	0.40		
3	100	0.57		
4	300	0.97		
5	500	1.25		
6	800	1.59		
7	1000	1.81		
8	1200	1.97		
9	1400	2.15		
10	1600	2.28		
11	1800	2.43		
12	2000	2.61		
13	2200	2.75		
14	2400	2.89		
15	2600	2.97		
16	2800	3.21	6.5	±0.12
17	3000	3.32		
18	3300	3.47		
19	3600	3.62		
20	3900	3.84		
21	4200	3.92		
22	4500	4.07		
23	4800	4.36		±0.17
24	5100	4.62		
25	5400	4.78		
26	5700	5.16		
27	6000	5.67		
28	6500	5.99		



Cable loss
Cable RF, 2m, model: Sucoflex 104PE, S/N 13094/4PE, HL 1566

No.	Frequency, MHz	Cable loss, dB	Tolerance, dB	Measurement uncertainty, dB
1	30	0.10	5.0	±0.12
2	50	0.13		
3	100	0.20		
4	300	0.33		
5	500	0.45		
6	800	0.60		
7	1000	0.65		
8	1500	0.91		
9	2000	1.08		
10	2500	1.19		
11	3000	1.28		
12	3500	1.49		
13	4000	1.63		
14	4500	1.63	5.0	±0.17
15	5000	1.66		
16	5500	1.88		
17	6000	1.96		
18	6500	1.93		
19	7000	2.07		
20	7500	2.37		
21	8000	2.34		
22	8500	2.64		
23	9000	2.68		
24	9500	2.64		
25	10000	2.70		
26	10500	2.84		
27	11000	2.88		
28	11500	3.19		
29	12000	3.15		
30	12500	3.20	5.0	±0.26
31	13000	3.22		
32	13500	3.47		
33	14000	3.41		
34	14500	3.59		
35	15000	3.79		
36	15500	4.24		
37	16000	4.12		
38	16500	4.46		
39	17000	4.50		
40	17500	4.49		
41	18000	4.45		



Cable loss
Cable 18 GHz, 4 m, blue, model: SPS-1803A-4000-NPS, S/N T4658, HL 1942

Frequency, GHz	Cable loss, dB
0.03	0.21
0.05	0.26
0.10	0.36
0.20	0.50
0.30	0.61
0.40	0.70
0.50	0.78
0.60	0.85
0.70	0.93
0.80	0.99
0.90	1.04
1.00	1.10
1.10	1.16
1.20	1.22
1.30	1.26
1.40	1.31
1.50	1.35
1.60	1.41
1.70	1.45
1.80	1.49
1.90	1.53
2.00	1.57
2.10	1.61
2.20	1.65
2.30	1.69
2.40	1.72
2.50	1.76
2.60	1.79
2.70	1.83
2.80	1.87
2.90	1.90
3.10	1.97
3.30	2.04
3.50	2.11
3.70	2.18
3.90	2.24
4.10	2.31
4.30	2.38
4.50	2.43
4.70	2.53
4.90	2.53
5.10	2.63
5.30	2.65
5.50	2.72
5.70	2.76
5.90	2.79

Frequency, GHz	Cable loss, dB
6.10	2.88
6.30	2.90
6.50	2.97
6.70	3.02
6.90	3.04
7.10	3.07
7.30	3.12
7.50	3.13
7.70	3.19
7.90	3.24
8.10	3.30
8.30	3.36
8.50	3.45
8.70	3.41
8.90	3.45
9.10	3.42
9.30	3.55
9.50	3.48
9.70	3.58
9.90	3.61
10.10	3.66
10.30	3.68
10.50	3.70
10.70	3.70
10.90	3.75
11.10	3.78
11.30	3.86
11.50	3.98
11.70	4.10
11.90	4.12
12.10	4.09
12.40	4.13
13.00	4.23
13.50	4.35
14.00	4.40
14.50	4.44
15.00	4.57
15.50	4.66
16.00	4.64
16.50	4.66
17.00	4.75
17.50	4.85
18.00	4.93



Cable loss
Cable 18 GHz, 6.5 m, blue, model: NPS-1803A-6500-NPS, S/N T4974, HL 1947

Frequency, GHz	Cable loss, dB
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Cable loss, dB
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92



Cable loss
Cable 40 GHz, 0.8 m, blue, model: KPS-1503A-800-KPS, S/N W4907, HL 2254

Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB
0.03	0.04	5.10	0.80	15.00	1.49
0.05	0.07	5.30	0.83	15.50	1.49
0.10	0.09	5.50	0.83	16.00	1.46
0.20	0.15	5.70	0.84	16.50	1.47
0.30	0.19	5.90	0.87	17.00	1.50
0.40	0.25	6.10	0.86	17.50	1.57
0.50	0.29	6.30	0.89	18.00	1.63
0.60	0.33	6.50	0.90	18.50	1.57
0.70	0.37	6.70	0.89	19.00	1.63
0.80	0.41	6.90	0.93	19.50	1.65
0.90	0.44	7.10	0.92	20.00	1.64
1.00	0.45	7.30	0.95	20.50	1.75
1.10	0.48	7.50	0.96	21.00	1.72
1.20	0.51	7.70	0.97	21.50	1.78
1.30	0.53	7.90	1.01	22.00	1.76
1.40	0.54	8.10	1.00	22.50	1.72
1.50	0.57	8.30	1.05	23.00	1.83
1.60	0.59	8.50	1.04	23.50	1.80
1.70	0.04	8.70	1.07	24.00	1.90
1.80	0.07	8.90	1.11	24.50	1.81
1.90	0.09	9.10	1.09	25.00	1.98
2.00	0.15	9.30	1.14	25.50	1.91
2.10	0.19	9.50	1.12	26.00	2.02
2.20	0.25	9.70	1.15	26.50	1.92
2.30	0.29	9.90	1.16	27.00	1.97
2.40	0.33	10.10	1.16	28.00	2.02
2.50	0.37	10.30	1.19	29.00	1.95
2.60	0.41	10.50	1.14	30.00	1.94
2.70	0.44	10.70	1.19	31.00	2.11
2.80	0.45	10.90	1.17	32.00	2.17
2.90	0.48	11.10	1.13	33.00	2.27
3.10	0.61	11.30	1.20	34.00	2.27
3.30	0.64	11.50	1.13	35.00	2.29
3.50	0.65	11.70	1.20	36.00	2.35
3.70	0.68	11.90	1.18	37.00	2.37
3.90	0.69	12.10	1.14	38.00	2.40
4.10	0.71	12.40	1.19	39.00	2.57
4.30	0.73	13.00	1.34	40.00	2.36
4.50	0.75	13.50	1.33		
4.70	0.77	14.00	1.48		
4.90	0.79	14.50	1.45		



Cable loss
Cable coaxial, 40GHz, 1.5 m, green, Rhophase Microwave Limited, model: KPS-1503A-1500-KPS,
HL 2400

Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB	Frequency, GHz	Cable loss, dB
0.03	0.06	6.5	1.46	15.50	2.34
0.05	0.08	6.7	1.49	16.00	2.34
0.1	0.15	6.9	1.50	16.50	2.40
0.2	0.23	7.1	1.51	17.00	2.46
0.3	0.29	7.3	1.55	17.50	2.54
0.5	0.37	7.5	1.56	18.00	2.61
0.7	0.46	7.7	1.58	18.50	2.59
0.9	0.53	7.9	1.60	19.00	2.59
1.1	0.58	8.1	1.61	19.50	2.67
1.3	0.65	8.3	1.68	20.00	2.62
1.5	0.66	8.5	1.68	20.50	2.73
1.7	0.72	8.7	1.75	21.00	2.71
1.9	0.76	8.9	1.74	21.50	2.78
2.1	0.79	9.1	1.81	22.00	2.83
2.3	0.85	9.3	1.79	22.50	2.81
2.5	0.90	9.5	1.86	23.50	2.91
2.7	0.91	9.7	1.85	24.00	2.97
2.9	0.97	9.9	1.87	24.50	2.98
3.1	0.97	10.1	1.88	25.00	2.97
3.3	1.03	10.30	1.82	25.50	3.03
3.5	1.06	10.50	1.92	26.00	3.04
3.7	1.10	10.70	1.86	26.50	3.11
3.9	1.13	10.90	1.96	27.00	2.97
4.1	1.16	11.10	1.90	28.00	3.15
4.3	1.18	11.30	1.99	29.00	3.07
4.5	1.21	11.50	1.95	30.00	3.13
4.7	1.23	11.70	2.00	31.00	3.13
4.9	1.26	11.90	2.01	32.00	3.18
5.1	1.28	12.10	1.99	33.00	3.31
5.3	1.31	12.40	2.06	34.00	3.32
5.5	1.32	13.00	2.11	35.00	3.37
5.7	1.36	13.50	2.17	36.00	3.36
5.9	1.37	14.00	2.36	37.00	3.46
6.1	1.38	14.50	2.32	39.00	3.49
6.3	1.44	15.00	2.30	40.00	3.52



Appendix D General information

Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, telecommunications, environmental, safety standards, and by AMTAC (UK) for safety of medical devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01) and approved by Israel Ministry of environmental protection, radiation hazards department (Permit number 1158).

Address: PO Box 23, Binyamina 30500, Israel.

Telephone: +972 4628 8001

Fax: +972 4628 8277

e-mail: mail@hermonlabs.com

website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, QA manager.

Abbreviations and acronyms

The following abbreviations and acronyms are applicable to this test report:

ASK	amplitude shift keying
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
EMC	electromagnetic compatibility
EUT	equipment under test
GHz	gigahertz
H	height
Hz	hertz
kHz	kilohertz
kV	kilovolt
L	length
LNA	low noise amplifier
LMS	location and monitoring service
m	meter
MHz	megahertz
NA	not applicable
QP	quasi-peak
RF	radio frequency
rms	root mean square
s	second
V	volt
W	width

Specification references

47CFR part 90: 2002	Private land mobile radio services
ANSI C63.2:96	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4:2001	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.