

TEST REPORT

ACCORDING TO: FCC 47 CFR Part 90;
RSS-119 Issue 12:2022, RSS-Gen Issue 5:2021

FOR:

ST Engineering Telematics Wireless Ltd.c
Light Control Unit
Model: LCUN35HGX
FCC ID: NTAN35HG
IC: 4732A-N35HG

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Changes made in EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 90 and RSS-119 requirements	7
7.1	Peak output power test	7
7.2	Occupied bandwidth test	13
7.3	Emission mask test	17
7.4	Radiated spurious emission measurements	22
7.5	Frequency stability test	30
7.6	Transient frequency behaviour test	32
8	APPENDIX A Test equipment and ancillaries used for tests	44
9	APPENDIX B Measurement uncertainties	45
10	APPENDIX C Test laboratory description	46
11	APPENDIX D Specification references	46
12	APPENDIX E Test equipment correction factors	47
13	APPENDIX F Abbreviations and acronyms	57
14	APPENDIX G Manufacturer's declaration	58

1 Applicant information

Client name: ST Engineering Telematics Wireless Ltd.
Address: 26 Hamelacha street, POB 1911, Holon, 5811801, Israel
Telephone: +972 3557 5700
Fax: +972 3557 5703
E-mail: itsikk@tlmw.com
Contact name: Mr. Itsik Kanner

2 Equipment under test attributes

Product name: Light Control Unit
Product type: Transceiver
Model(s): LCUN35HGX
Serial number: 996191900051
Hardware version: REV A
Software release: AU031B
Receipt date 29-Dec-22

3 Manufacturer information

Manufacturer name: ST Engineering Telematics Wireless Ltd.
Address: 26 Hamelacha street, POB 1911, Holon, 5811801, Israel
Telephone: +972 3557 5700
Fax: +972 3557 5703
E-Mail: itsikk@tlmw.com
Contact name: Mr. Itsik Kanner

4 Test details

Project ID: 49486
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 22-Jul-21
Test completed: 26-Feb-23
Test specification(s): FCC 47 CFR Part 90, RSS-119 Issue 12:2022, RSS-Gen Issue 5:2021




5 Tests summary

Test	Status
Transmitter characteristics	
FCC Section 90.205 / RSS-119 Section 5.4, Maximum output power	Pass*
FCC Section 90.209 / RSS-119 Section 5.5, Occupied bandwidth	Pass
FCC Section 90.210 / RSS-119 Section 5.8.4, Emission mask	Pass
FCC Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions	Pass*
FCC Section 90.213 / RSS-119 Section 5.3, Frequency stability	Pass
FCC Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour	Pass
FCC Section 2.1091 / RSS-102 section 2.5, RF radiation exposure evaluation	Pass, the exhibit to the application of certification is provided

This test report is based on the test report TELRAD_FCC.43552 issued by Hermon Laboratories assuming that the original EUT configuration approved under FCC ID: NTAN35GX and IC: 4732A-N35GX was not changed except for few component in AC portion to support power source of 347-480 VAC with no RF card and digital circuitry change as stated in manufacturer's declaration (refer to Appendix G of the test report).

*These tests were performed again as a spot check of retesting at worst case settings as appears in the original test report

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer, EMC & Radio	22-Jul-21 – 26-Feb-23	
Reviewed by:	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	10-Mar-23	
Approved by:	Mr. M. Nikishin, group leader, EMC & Radio	18-Apr-23	

6 EUT description


Note: The following data in this clause is provided by the customer and represents his sole responsibility.

6.1 General information

The EUT, LCU NEMA is a light control unit, installed on top of the luminaire utilizing a standard (twist and lock) NEMA socket.

The LCU NEMA is powered by 347-480 Volt AC and the RF operating frequency band is 450 to 470 MHz. Maximum RF power is 1 Watt, the device utilizes the built in antenna type.

6.2 Test configuration

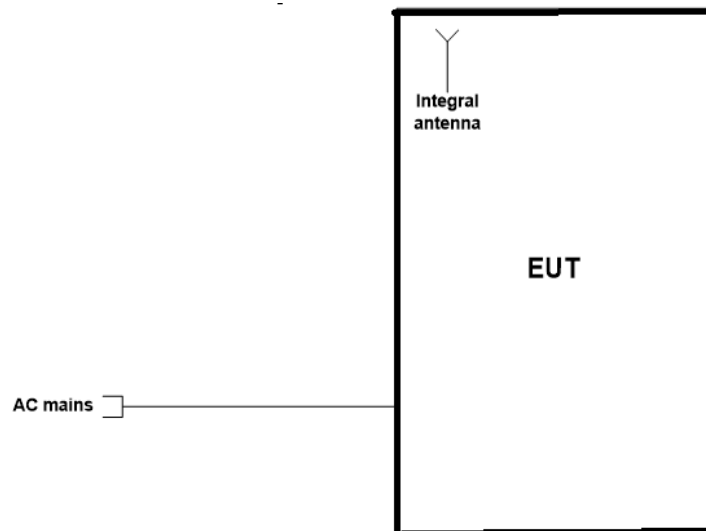

6.3 Changes made in EUT

No changes were implemented in the EUT during testing.



6.4 Transmitter characteristics

Type of equipment						
X	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Intended use		Condition of use				
	fixed	Always at a distance more than 2 m from all people				
X	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
Assigned frequency ranges		450- 470 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector		28.93 dBm		
Is transmitter output power variable?		X	No			
			continuous variable			
			stepped variable with stepsize		dB	
			minimum RF power		dBm	
			maximum RF power		dBm	
Antenna connection						
unique coupling		standard connector		X	integral	
				X	with temporary RF connector	
					without temporary RF connector	
Antenna/s technical characteristics						
Type		Manufacturer		Model number		
Printed		NA		NA		
		Gain				
		-2 dBi at low and mid frequencies				
		-1.5 dBi at high frequency				
Transmitter aggregate data rate/s		4.8 kbps				
Type of modulation		4GFSK				
Modulating test signal (baseband)		PRBS				
Transmitter power source						
	Battery	Nominal rated voltage		Battery type		
	DC	Nominal rated voltage				
X	AC mains	Nominal rated voltage		347-480 VAC	Frequency 60 Hz	



Test specification: Section 90.205 / RSS-119 Section 5.4, Maximum output power			
Test procedure: 47 CFR, Section 2.1046; TIA/EIA-603-E, Section 2.2.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Feb-23 – 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

7 Transmitter tests according to 47CFR part 90 and RSS-119 requirements

7.1 Peak output power test

7.1.1 General

This test was performed to measure effective radiated power emanated by transmitter at carrier frequency. Specification test limits are given in Table 7.1.1

Table 7.1.1 Peak output power limits

Assigned frequency band, MHz	ERP		Equivalent field strength limit @ 3m, dB(µV/m)*
	W	dBm	
FCC			
450.0 – 470.0	2	33.00	130.38
RSS-119 Table 2			
450.0 – 470.0	60	47.78	145.16

* - Equivalent field strength limit was calculated from maximum allowed ERP as follows: $E = \sqrt{30 \times P \times 1.64} / r$, where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

7.1.2 Test procedure for field strength measurements

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was swept throughout the range, specified in

7.1.2.3 Table 7.1.2 and Table 7.1.3, in both vertical and horizontal polarizations.


7.1.2.4 The worst test results (the lowest margins) were recorded in

7.1.2.5 Table 7.1.2 and Table 7.1.3 and shown in the associated plots.



Test specification: Section 90.205 / RSS-119 Section 5.4, Maximum output power			
Test procedure: 47 CFR, Section 2.1046; TIA/EIA-603-E, Section 2.2.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Feb-23 – 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

Figure 7.1.1 Setup for carrier field strength measurements

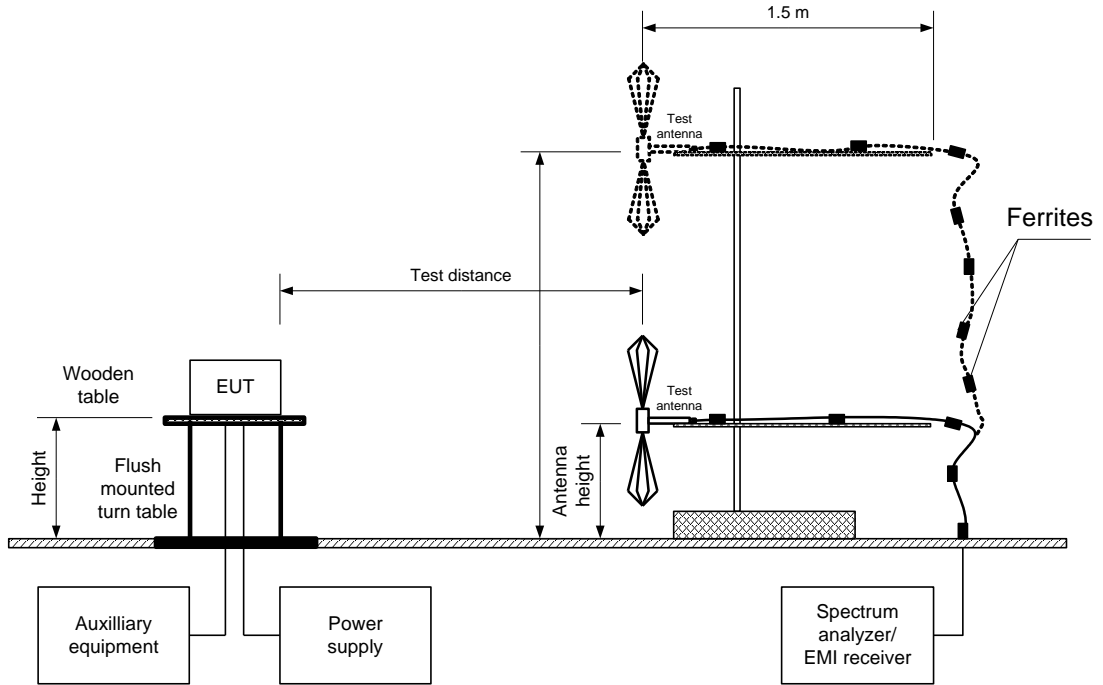



Test specification: Section 90.205 / RSS-119 Section 5.4, Maximum output power			
Test procedure: 47 CFR, Section 2.1046; TIA/EIA-603-E, Section 2.2.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Feb-23 – 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

Table 7.1.2 Transmitter carrier field strength according to FCC rules

ASSIGNED FREQUENCY RANGE: 450 - 470 MHz
TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
EUT HEIGHT: 0.8 m
TEST ANTENNA HEIGHTS RANGE: 1.0 – 4.0 m
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: > Resolution bandwidth
TEST ANTENNA TYPE: Biconilog
MODULATION: 4GFSK
EUT POWER: 480VAC
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees	EUT antenna gain, dBi	Peak output power, dBm*	ERP, dBm**	ERP limit, dBm	Margin, dB***	Verdict
450.0031	120.83	Vertical	1.1	-120	-2	27.63	23.45	33.00	-9.55	Pass
460.0000	122.13	Vertical	1.1	-120	-2	28.93	24.75	33.00	-8.25	Pass
469.9969	121.61	Vertical	1.1	-125	-1.5	27.88	24.23	33.00	-8.77	Pass

*- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance:
Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB
** ERP=Field strength in dB(µV/m) - 97.4 dB
***- Margin = ERP - specification limit.



Test specification: Section 90.205 / RSS-119 Section 5.4, Maximum output power			
Test procedure: 47 CFR, Section 2.1046; TIA/EIA-603-E, Section 2.2.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Feb-23 – 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

Table 7.1.3 Transmitter carrier field strength according to RSS-119 Table 2

ASSIGNED FREQUENCY RANGE:	450 - 470 MHz
TEST SITE:	Semi anechoic chamber
TEST DISTANCE:	3 m
EUT HEIGHT:	0.8 m
TEST ANTENNA HEIGHTS RANGE:	1.0 – 4.0 m
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Biconilog
MODULATION:	4GFSK
EUT POWER:	480VAC
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees	EUT antenna gain, dBi	Peak output power, dBm*	ERP, dBm**	ERP limit, dBm	Margin, dB***	Verdict
450.0031	120.83	Vertical	1.1	-120	-2	27.63	23.45	47.78	-24.33	Pass
460.0000	122.13	Vertical	1.1	-120	-2	28.93	24.75	47.78	-23.03	Pass
469.9969	121.61	Vertical	1.1	-125	-1.5	27.88	24.23	47.78	-23.55	Pass

*- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$,

where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance:
Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB

** ERP=Field strength in dB(μV/m) - 97.4 dB

***- Margin = ERP - specification limit.

Reference numbers of test equipment used

HL 3903	HL 3818	HL 5288	HL 5902				
---------	---------	---------	---------	--	--	--	--



Full description is given in Appendix A.





HERMON LABORATORIES

Test specification: Section 90.205 / RSS-119 Section 5.4, Maximum output power			
Test procedure: 47 CFR, Section 2.1046; TIA/EIA-603-E, Section 2.2.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Feb-23 – 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

Plot 7.1.1 Transmitter carrier field strength at low frequency in vertical and horizontal antenna polarization

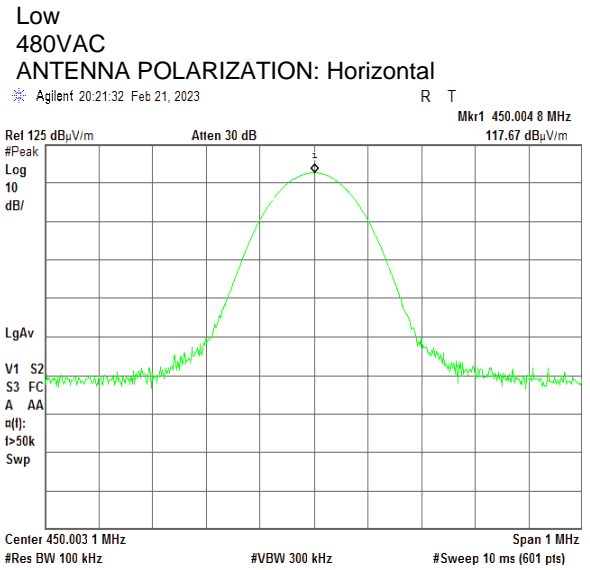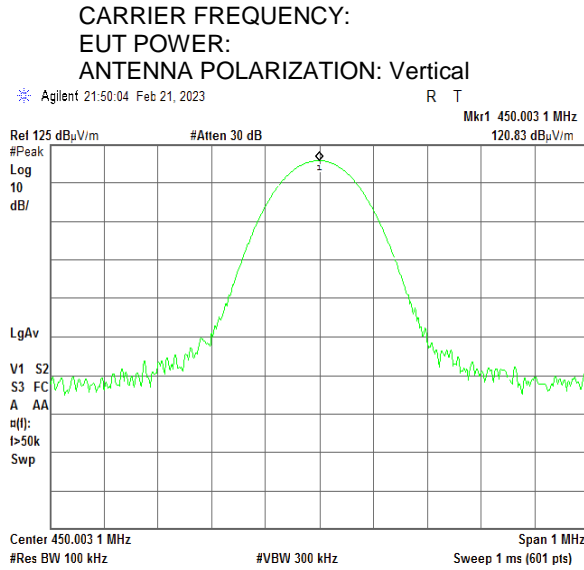

Plot 7.1.2 Transmitter carrier field strength at mid frequency in vertical and horizontal antenna polarization

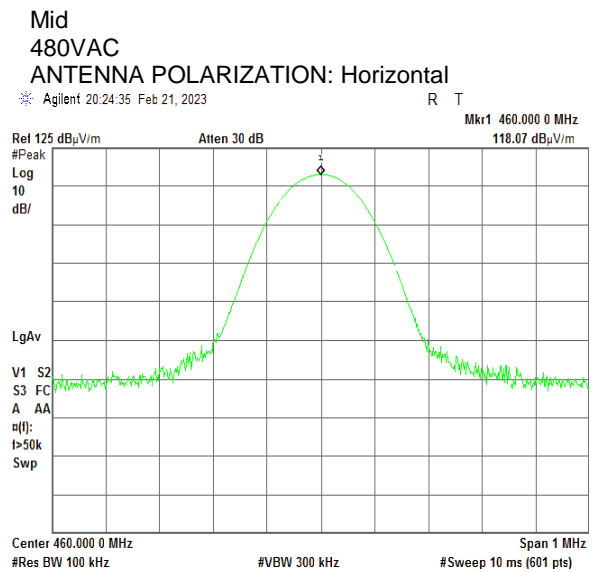
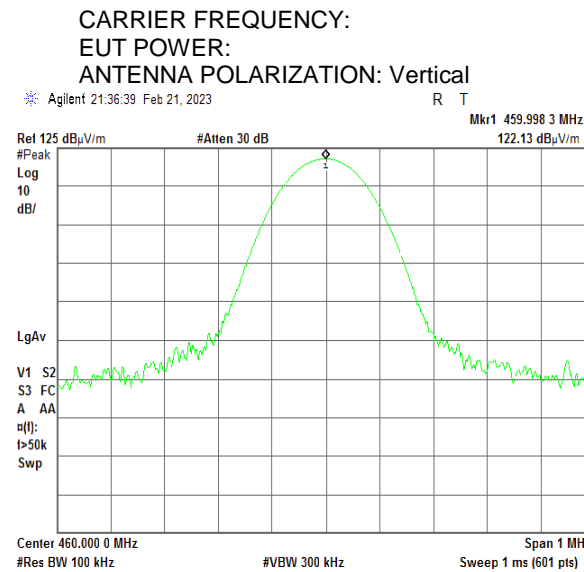




HERMON LABORATORIES

Test specification: Section 90.205 / RSS-119 Section 5.4, Maximum output power			
Test procedure: 47 CFR, Section 2.1046; TIA/EIA-603-E, Section 2.2.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-Feb-23 – 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

Plot 7.1.3 Transmitter carrier field strength at high frequency in vertical and horizontal antenna polarization

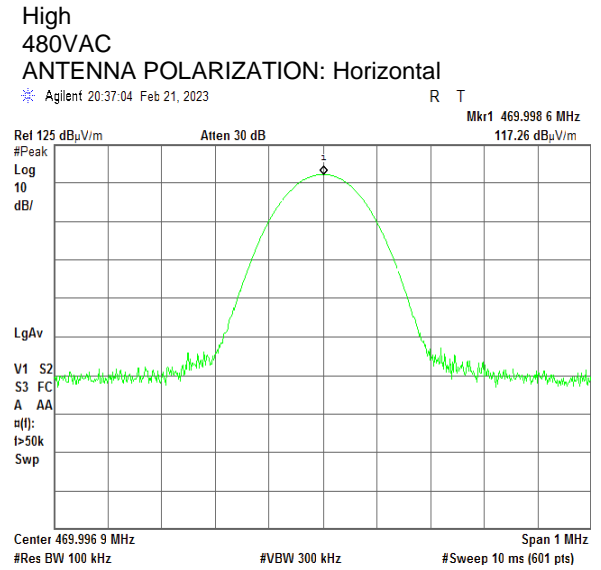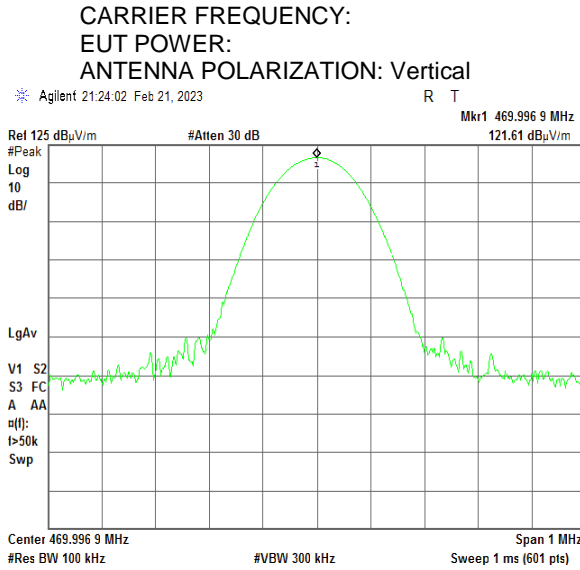



Test specification: Section 90.209 / RSS-119 Section 5.5, Occupied bandwidth			
Test procedure: 47 CFR, Section 2.1049			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Aug-21			
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1005 hPa	Power: 110 VAC, 60 Hz
Remarks:			

7.2 Occupied bandwidth test

7.2.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.2.1, Table 7.2.2.

Table 7.2.1 Occupied bandwidth limits according to FCC requirements

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Maximum allowed bandwidth, kHz
450.0 – 470.0	26	6.00

* - Modulation envelope reference points are provided in terms of attenuation below the unmodulated carrier.

Table 7.2.2 Occupied bandwidth limits according to RSS-119 requirements

Assigned frequency, MHz	Modulation envelope reference points, %	Maximum allowed bandwidth, kHz
450.0 – 470.0	99	6

7.2.2 Test procedure


7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was set to transmit the unmodulated carrier and the reference peak power level was measured.

7.2.2.3 The EUT was set to transmit the normally modulated carrier.

7.2.2.4 The transmitter occupied bandwidth was measured with spectrum analyzer as a frequency delta between the reference points on modulation envelope and provided in Table 7.2.3 and the associated plots.

Figure 7.2.1 Occupied bandwidth test setup





Test specification: Section 90.209 / RSS-119 Section 5.5, Occupied bandwidth			
Test procedure: 47 CFR, Section 2.1049			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Aug-21			
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1005 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Table 7.2.3 Occupied bandwidth test results

DETECTOR USED: Peak hold
RESOLUTION BANDWIDTH: 100 Hz
VIDEO BANDWIDTH: 1 kHz
EUT POWER: 110V 60Hz
MODULATION: 4GFSK
MODULATING SIGNAL: ID code
BIT RATE: 4.8 kbps

Carrier frequency, MHz	Occupied bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
MODULATION ENVELOPE REFERENCE POINTS: 99%				
450.0031	3.899	6.000	-2.101	Pass
460.0000	3.795	6.000	-2.205	Pass
469.9968	3.833	6.000	-2.167	Pass
MODULATION ENVELOPE REFERENCE POINTS: 26 dBc				
450.0031	4.883	6.000	-1.117	Pass
460.0000	4.867	6.000	-1.133	Pass
469.9968	5.049	6.000	-0.951	Pass

Reference numbers of test equipment used

HL 3766	HL 4355	HL 5637					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: Section 90.209 / RSS-119 Section 5.5, Occupied bandwidth			
Test procedure: 47 CFR, Section 2.1049			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Aug-21			
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1005 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.2.1 Occupied bandwidth test result at low frequency

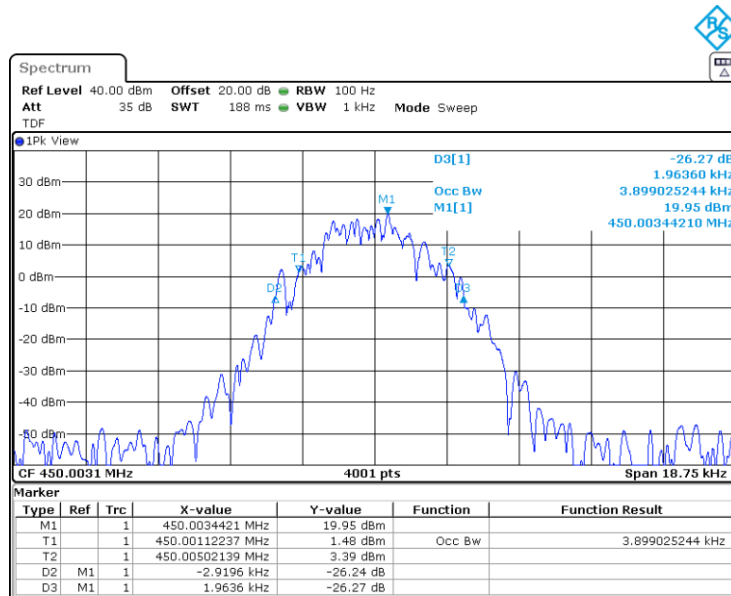

Plot 7.2.2 Occupied bandwidth test result at mid frequency






HERMON LABORATORIES

Test specification: Section 90.209 / RSS-119 Section 5.5, Occupied bandwidth			
Test procedure: 47 CFR, Section 2.1049			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Aug-21			
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1005 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.2.3 Occupied bandwidth test result at high frequency

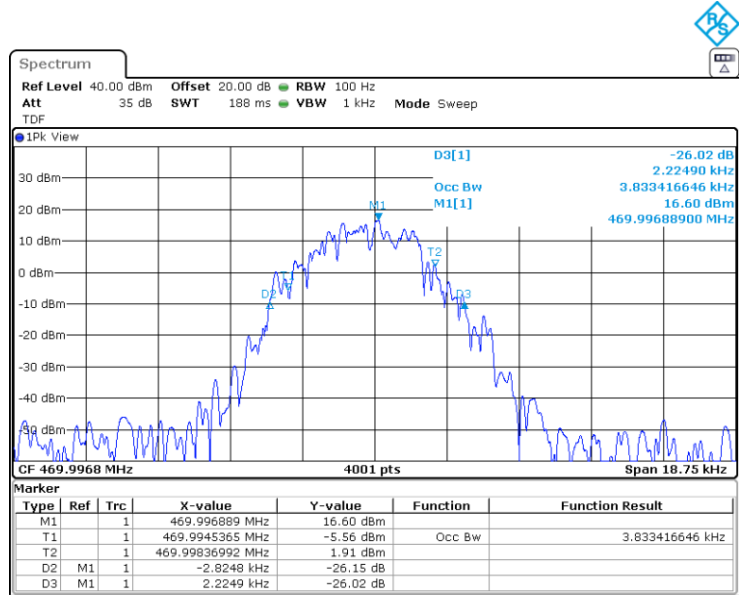



Test specification: Section 90.210 / RSS-119 Section 5.8.4, Emission mask			
Test procedure: 47 CFR, Sections 2.1051, 2.1047 and 90.210(e); TIA/EIA-603-E, Section 2.2.13			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Aug-21			
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1005230 hPa	Power: 110 VAC, 60 Hz
Remarks:			

7.3 Emission mask test

7.3.1 General

This test was performed to measure emission mask at RF antenna connector. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Emission mask limits

Frequency displacement from carrier	Attenuation below carrier, dBc
Emission mask E (Channel bandwidth 6.25 kHz, authorized bandwidth 6.0 kHz)	
0 – 3 kHz	0
3 – 4.6 kHz	30 + 16.67(f _d ** - 3 kHz) or 55+10logP(W) whichever is the lesser
More than 4.6 kHz	55+10logP(W) or 57 whichever is the lesser (RSS119) 55+10logP(W) or 65 whichever is the lesser (FCC210)

* - linearly increase with frequency
** - displacement frequency

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The emission mask was measured with spectrum analyzer as provided in the associated plots.
- 7.3.2.3 The test results are provided in Table 7.3.2 and the associated plots.

Figure 7.3.1 Emission mask test setup




Table 7.3.2 Emission mask test results

Carrier frequency, MHz	Limit	Verdict
450.0031	Emission mask E	Pass
460.0000		
459.9969		

Reference numbers of test equipment used

HL 3766	HL 4355	HL 5409				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.





HERMON LABORATORIES

Test specification: Section 90.210 / RSS-119 Section 5.8.4, Emission mask			
Test procedure: 47 CFR, Sections 2.1051, 2.1047 and 90.210(e); TIA/EIA-603-E, Section 2.2.13			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Aug-21			
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1005230 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.3.1 Emission mask test results at low carrier frequency, FCC part 90.210(e)

OPERATING FREQUENCY RANGE:
DETECTOR USED:
MODULATION:
MODULATING SIGNAL:
TRANSMITTER OUTPUT POWER SETTINGS:



450 – 470 MHz
Peak
4GFSK
PRBS
Maximum

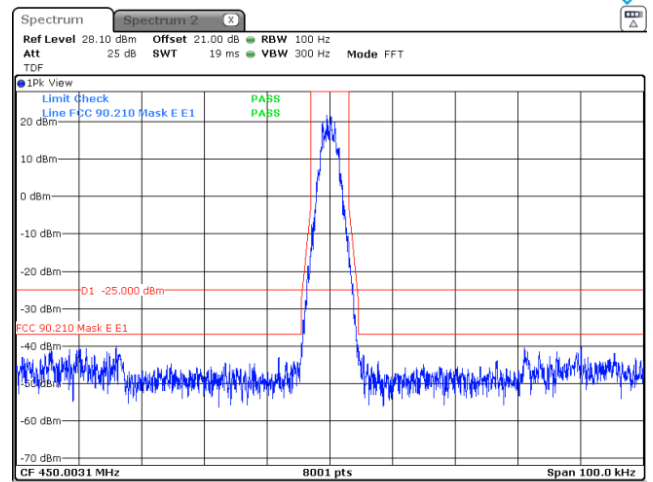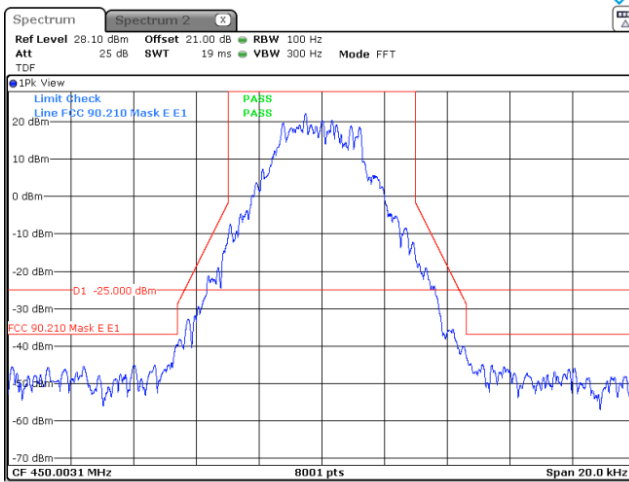

Plot 7.3.2 Emission mask test results at mid carrier frequency, FCC part 90.210(e)

OPERATING FREQUENCY RANGE:
DETECTOR USED:
MODULATION:
MODULATING SIGNAL:
TRANSMITTER OUTPUT POWER SETTINGS:

450 – 470 MHz
Peak
4GFSK
PRBS
Maximum

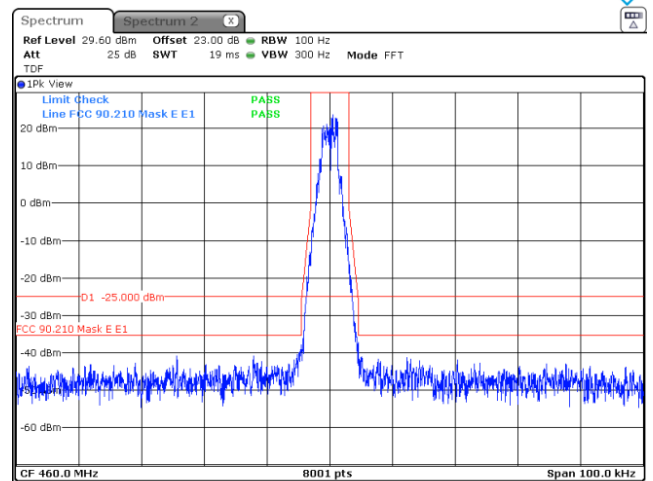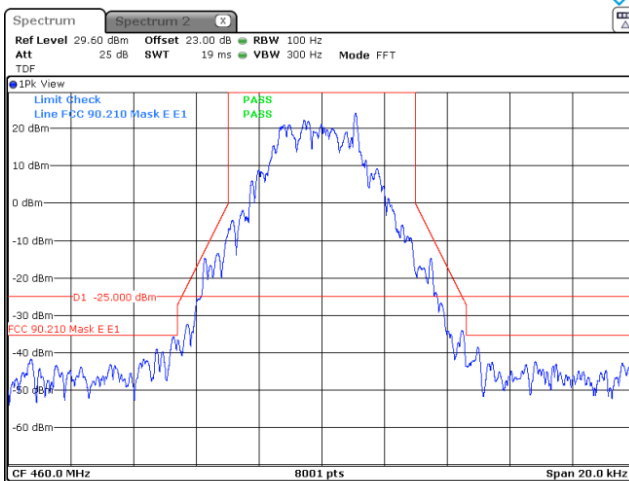





HERMON LABORATORIES

Test specification: Section 90.210 / RSS-119 Section 5.8.4, Emission mask			
Test procedure: 47 CFR, Sections 2.1051, 2.1047 and 90.210(e); TIA/EIA-603-E, Section 2.2.13			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Aug-21			
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1005230 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.3.3 Emission mask test results at high carrier frequency, FCC part 90.210(e)

OPERATING FREQUENCY RANGE:
DETECTOR USED:
MODULATION:
MODULATING SIGNAL:
TRANSMITTER OUTPUT POWER SETTINGS:

450 – 470 MHz
Peak
4GFSK
PRBS
Maximum

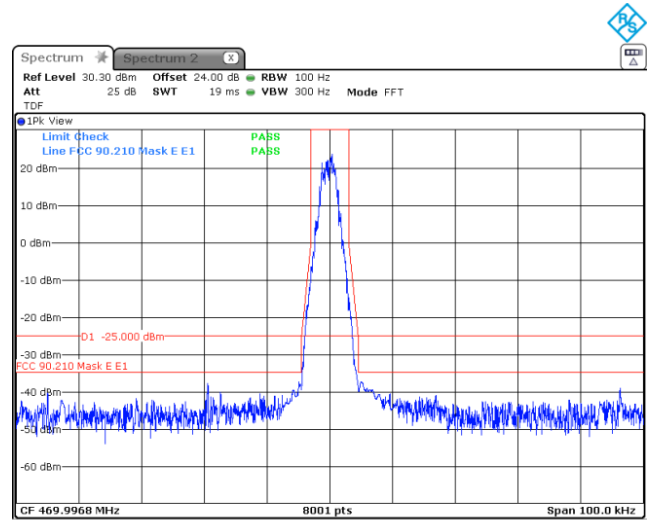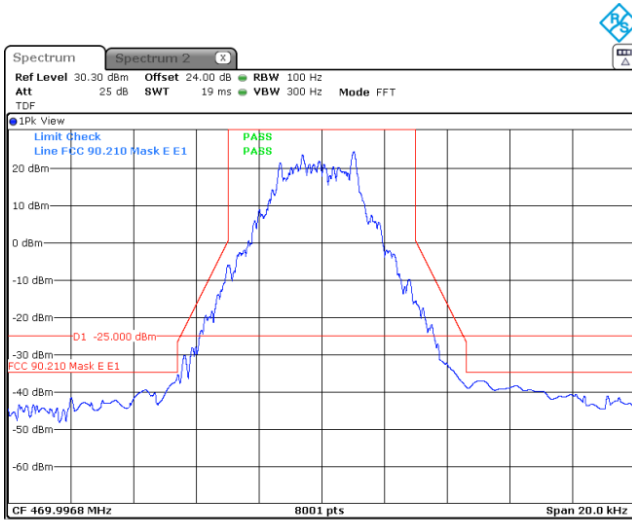





HERMON LABORATORIES

Test specification: Section 90.210 / RSS-119 Section 5.8.4, Emission mask			
Test procedure: 47 CFR, Sections 2.1051, 2.1047 and 90.210(e); TIA/EIA-603-E, Section 2.2.13			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Aug-21			
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1005230 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.3.4 Emission mask test results at low carrier frequency, RSS-119

OPERATING FREQUENCY RANGE:
DETECTOR USED:
MODULATION:
MODULATING SIGNAL:
TRANSMITTER OUTPUT POWER SETTINGS:



450 – 470 MHz
Peak
4GFSK
PRBS
Maximum

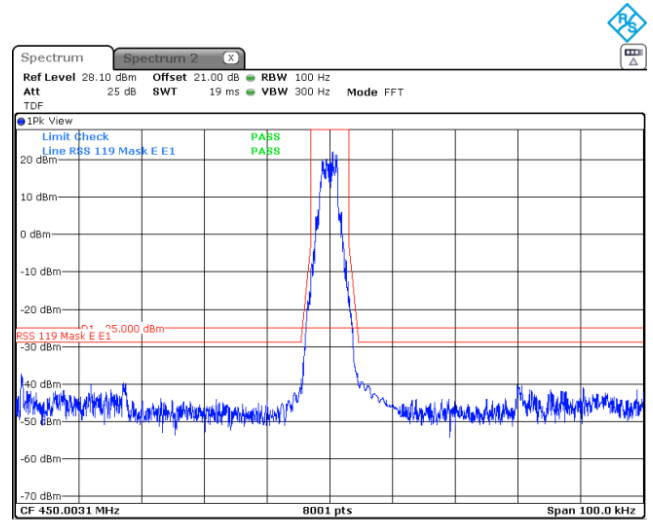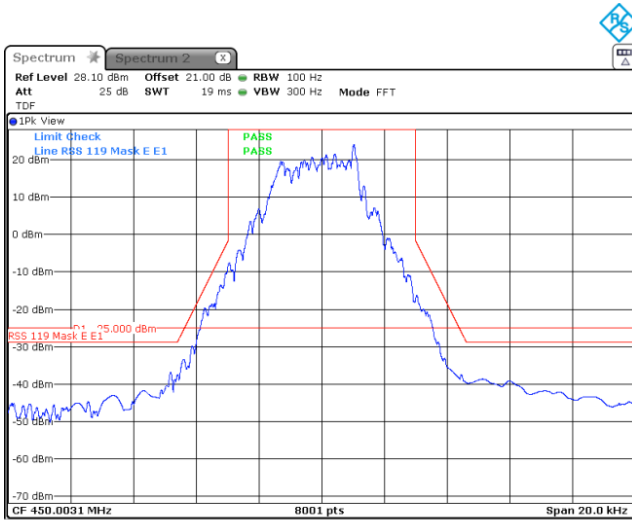

Plot 7.3.5 Emission mask test results at mid carrier frequency, RSS-119

OPERATING FREQUENCY RANGE:
DETECTOR USED:
MODULATION:
MODULATING SIGNAL:
TRANSMITTER OUTPUT POWER SETTINGS:

450 – 470 MHz
Peak
4GFSK
PRBS
Maximum

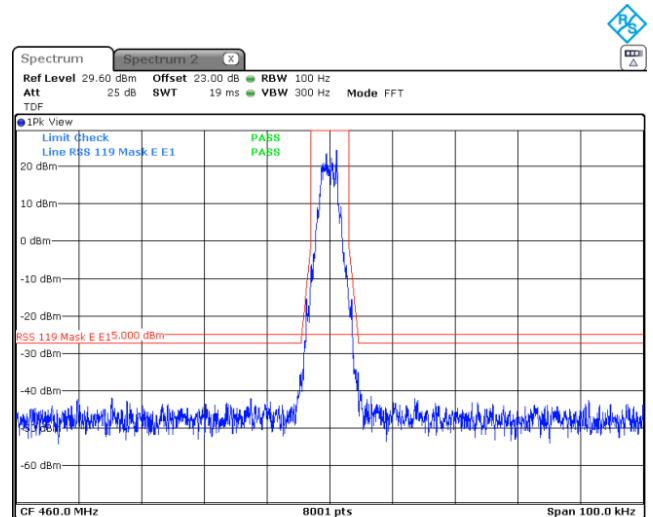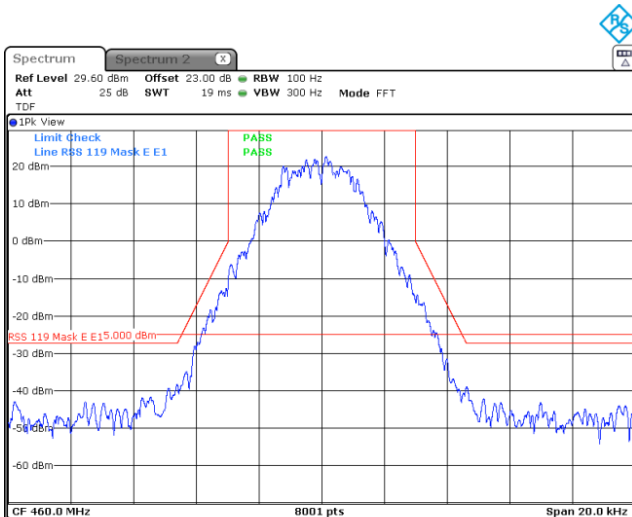





HERMON LABORATORIES

Test specification: Section 90.210 / RSS-119 Section 5.8.4, Emission mask			
Test procedure: 47 CFR, Sections 2.1051, 2.1047 and 90.210(e); TIA/EIA-603-E, Section 2.2.13			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-Aug-21			
Temperature: 25 °C	Relative Humidity: 48 %	Air Pressure: 1005230 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.3.6 Emission mask test results at high carrier frequency, RSS-119

OPERATING FREQUENCY RANGE:
DETECTOR USED:
MODULATION:
MODULATING SIGNAL:
TRANSMITTER OUTPUT POWER SETTINGS:

450 – 470 MHz
Peak
4GFSK
PRBS
Maximum

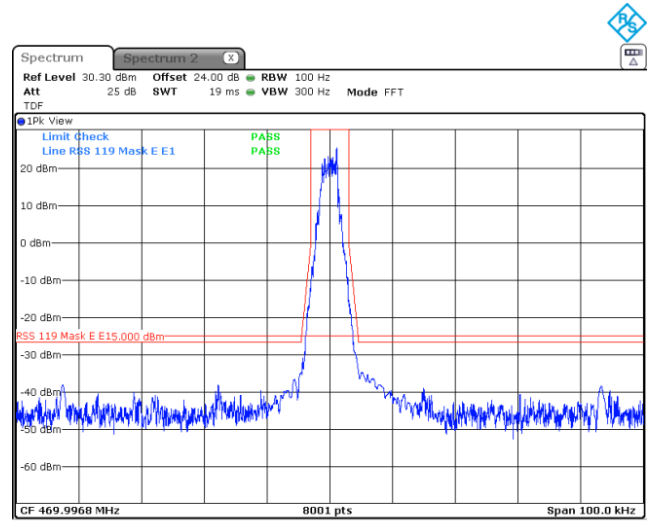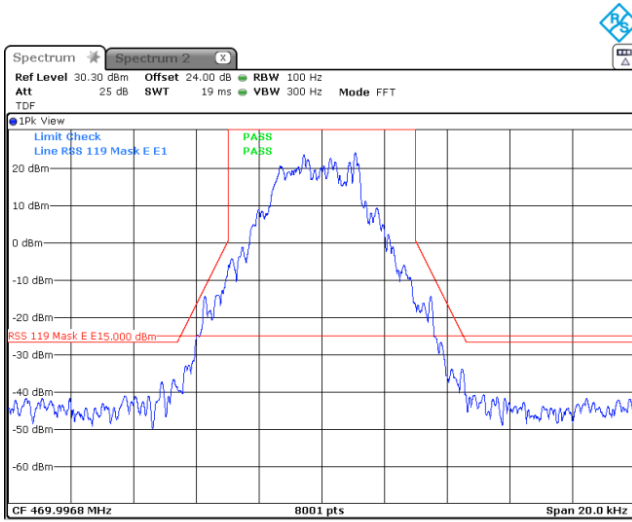



Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions			
Test procedure: 47 CFR, Sections 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

7.4 Radiated spurious emission measurements

7.4.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Radiated spurious emission test limits

Frequency, MHz	Attenuation below carrier, dBc	ERP of spurious, dBm	Equivalent field strength limit @ 3m, dB(μV/m) ^{***}
0.009 – 10th harmonic*	55+10logP ^{**}	-25	72.4

* - Excluding the in band emission within ± 250 % of the authorized bandwidth from the carrier

** - P is transmitter output power in Watts

*** - Equivalent field strength limit was calculated from maximum allowed ERP of spurious as follows: $E = \sqrt{30 \times P \times 1.64} / r$, where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

7.4.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.

7.4.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.4.2.3 The worst test results (the lowest margins) were recorded in Table 7.4.2 and shown in the associated plots.

7.4.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.4.3.1 The EUT was set up as shown in Figure 7.4.2, energized and the performance check was conducted.

7.4.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.

7.4.3.3 The worst test results (the lowest margins) were recorded in Table 7.4.2 and shown in the associated plots.



Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions			
Test procedure: 47 CFR, Sections 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

Figure 7.4.1 Setup for spurious emission field strength measurements in 9 kHz to 30 MHz band


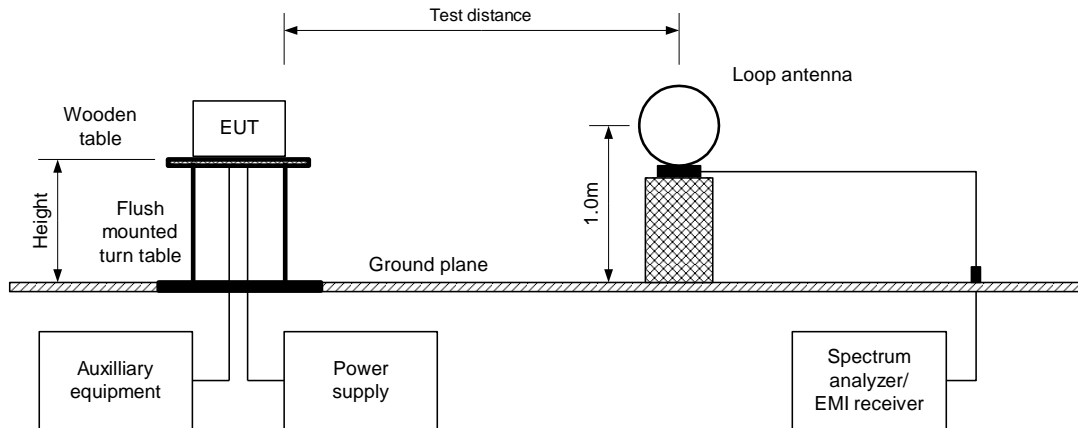


Figure 7.4.2 Setup for spurious emission field strength measurements above 30 MHz



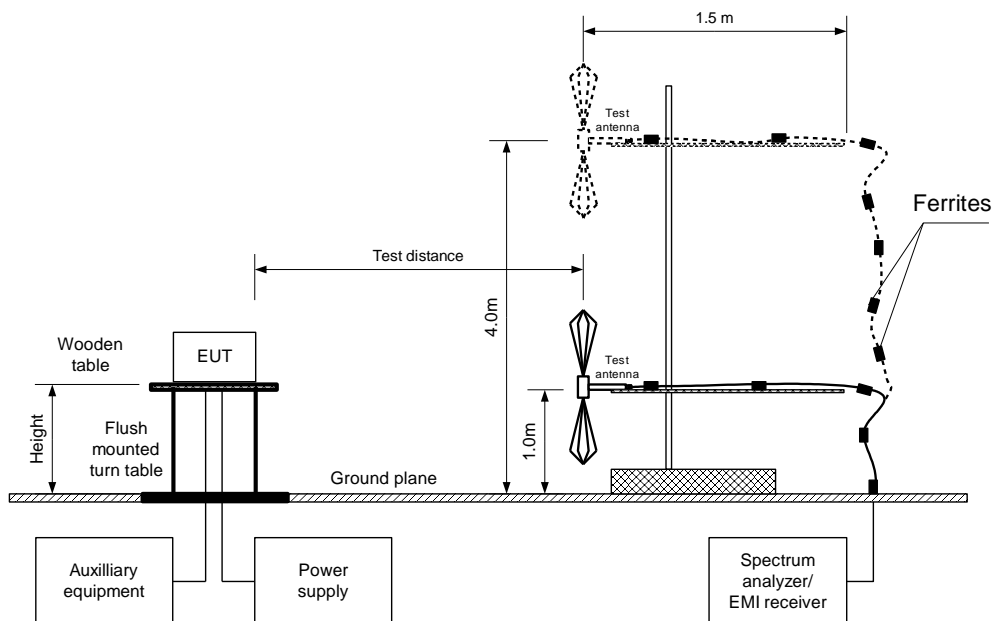

Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions			
Test procedure: 47 CFR, Sections 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

Table 7.4.2 Spurious emission field strength test results

ASSIGNED FREQUENCY RANGE: 450.0 – 470.0 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
INVESTIGATED FREQUENCY RANGE: 0.009 – 5000 MHz
DETECTOR USED: Peak
VIDEO BANDWIDTH: > Resolution bandwidth
TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)

MODULATION: 4GFSK
BIT RATE: 4.8 kbps
TRANSMITTER OUTPUT POWER: Maximum

Frequency, MHz	Field strength, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	RBW, kHz	Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
Low carrier frequency 450.0031 MHz								
All emissions are more than 20 dB below the limit								Pass
Mid carrier frequency 460.0000 MHz								
All emissions are more than 20 dB below the limit								Pass
High carrier frequency 469.9969 MHz								
All emissions are more than 20 dB below the limit								Pass

*- Margin = Field strength of spurious – calculated field strength limit.

** - EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0446	HL 3903	HL 3818	HL 4933	HL 5288	HL7585	HL 4339	HL 5902
---------	---------	---------	---------	---------	--------	---------	---------

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions			
Test procedure: 47 CFR, Sections 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			


Plot 7.4.1 Radiated emission measurements in 9 kHz - 30 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	Low
TEST DISTANCE:	3 m

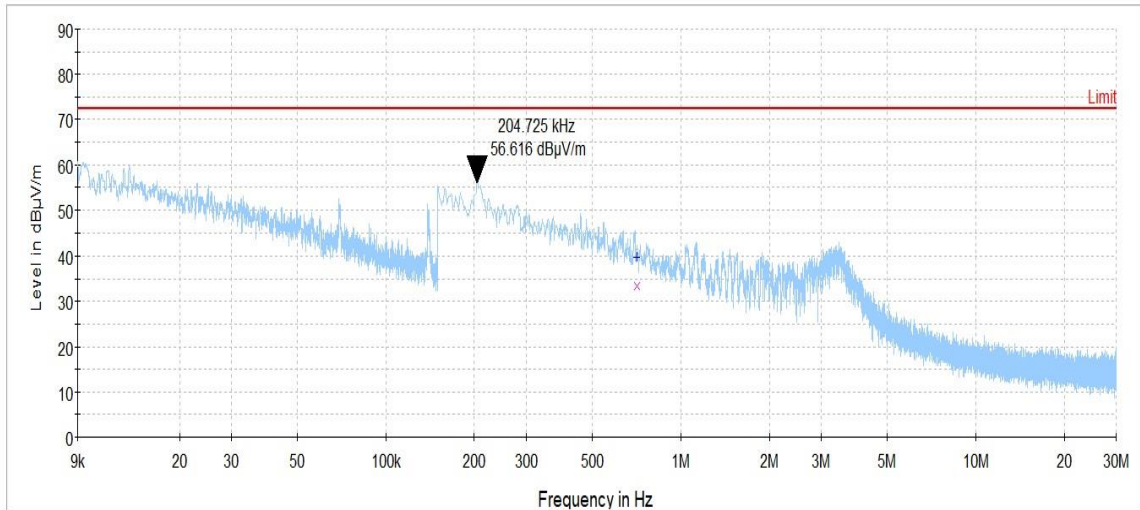

Plot 7.4.2 Radiated emission measurements in 9 kHz - 30 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	Mid
TEST DISTANCE:	3 m

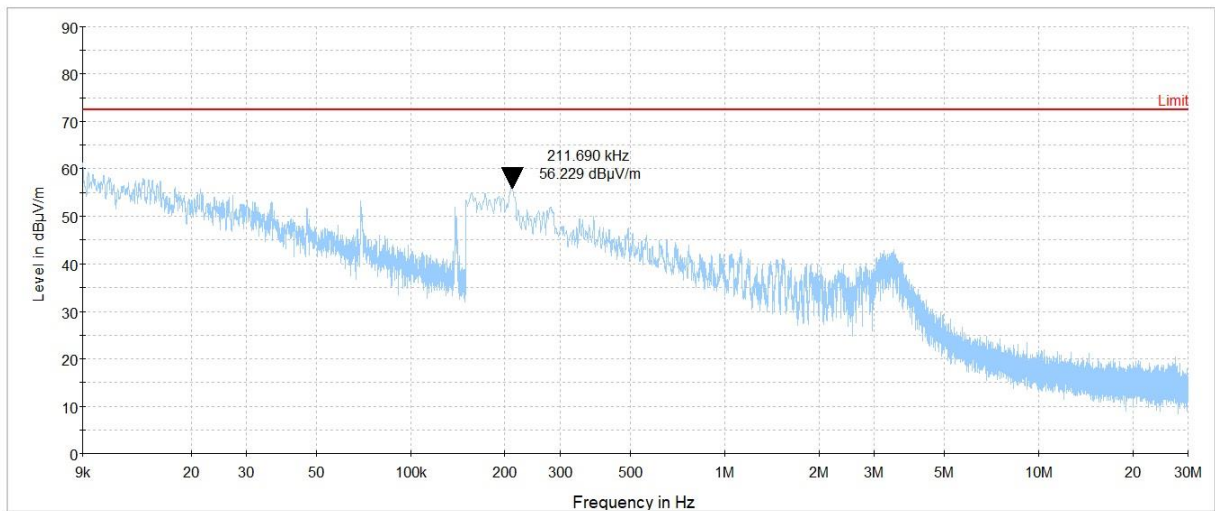




HERMON LABORATORIES

Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions			
Test procedure: 47 CFR, Sections 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

Plot 7.4.3 Radiated emission measurements in 9 kHz - 30 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: High
 TEST DISTANCE: 3 m

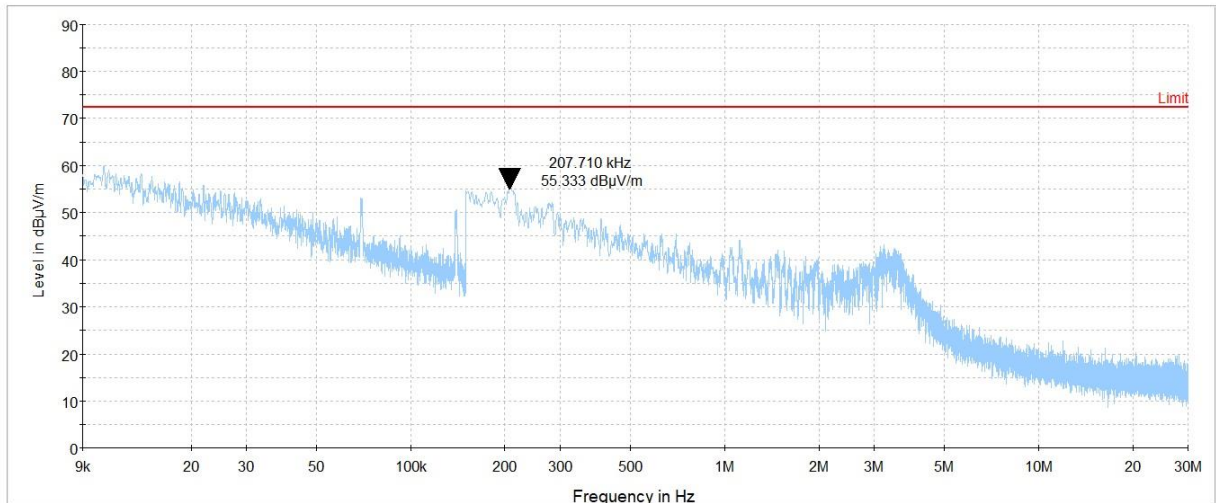


Plot 7.4.4 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Low
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

Agilent 21:51:46 Feb 21, 2023

R T

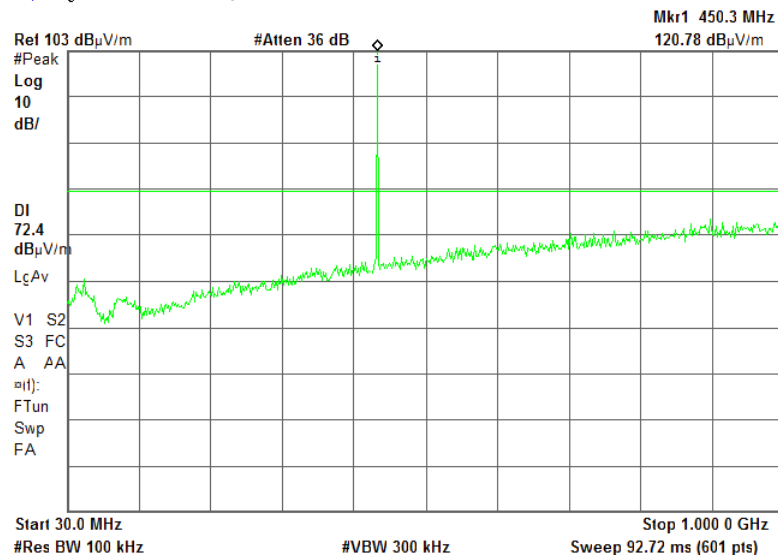



HERMON LABORATORIES


Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions			
Test procedure: 47 CFR, Sections 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

Plot 7.4.5 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: Mid
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

Agilent 21:34:29 Feb 21, 2023

R T

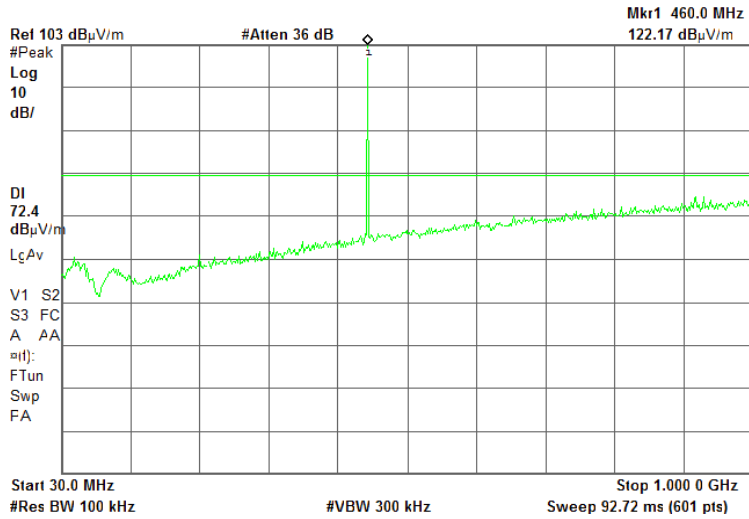


Plot 7.4.6 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE: Semi anechoic chamber
 CARRIER FREQUENCY: High
 ANTENNA POLARIZATION: Vertical and Horizontal
 TEST DISTANCE: 3 m

Agilent 21:20:13 Feb 21, 2023

R T

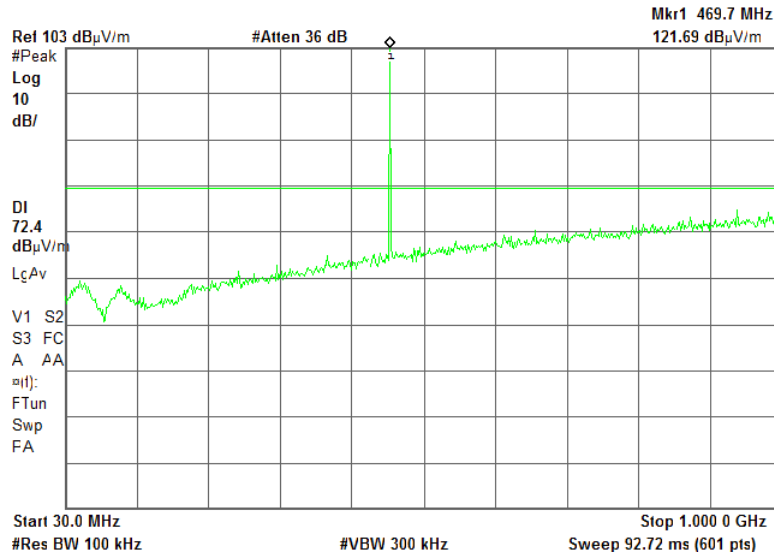




Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions			
Test procedure: 47 CFR, Sections 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			


Plot 7.4.7 Radiated emission measurements in 1000 – 5000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	Low
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

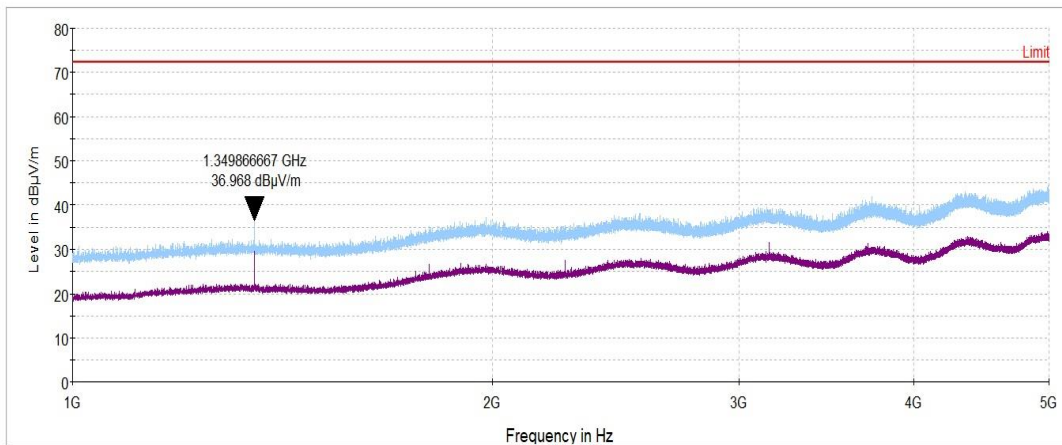

Plot 7.4.8 Radiated emission measurements in 1000 – 5000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	Mid
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

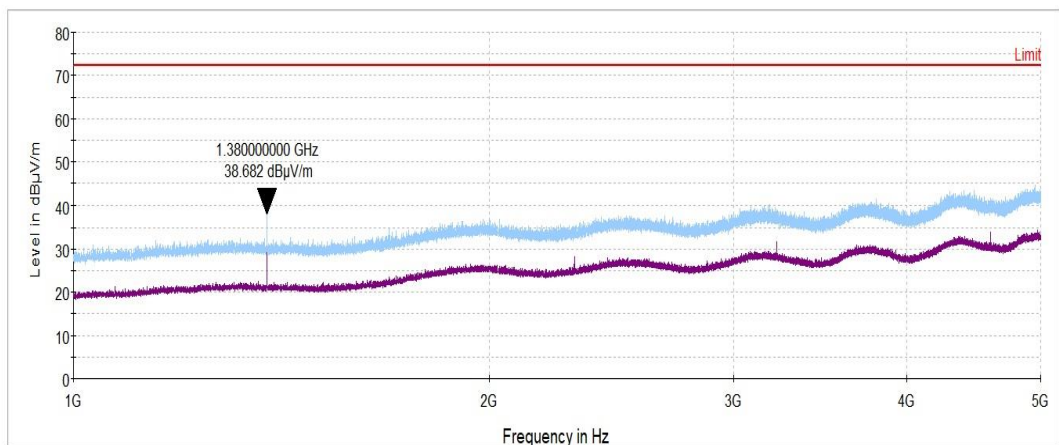




Test specification: Section 90.210 / RSS-119 Section 5.8.4, Radiated spurious emissions			
Test procedure: 47 CFR, Sections 2.1053; TIA/EIA-603-E, Section 2.2.12			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Feb-23			
Temperature: 26 °C	Relative Humidity: 54 %	Air Pressure: 1008 hPa	Power: 480 VAC, 60 Hz
Remarks:			

Plot 7.4.9 Radiated emission measurements in 1000 – 5000 MHz range

TEST SITE:	Semi anechoic chamber
CARRIER FREQUENCY:	High
ANTENNA POLARIZATION:	Vertical and Horizontal
TEST DISTANCE:	3 m

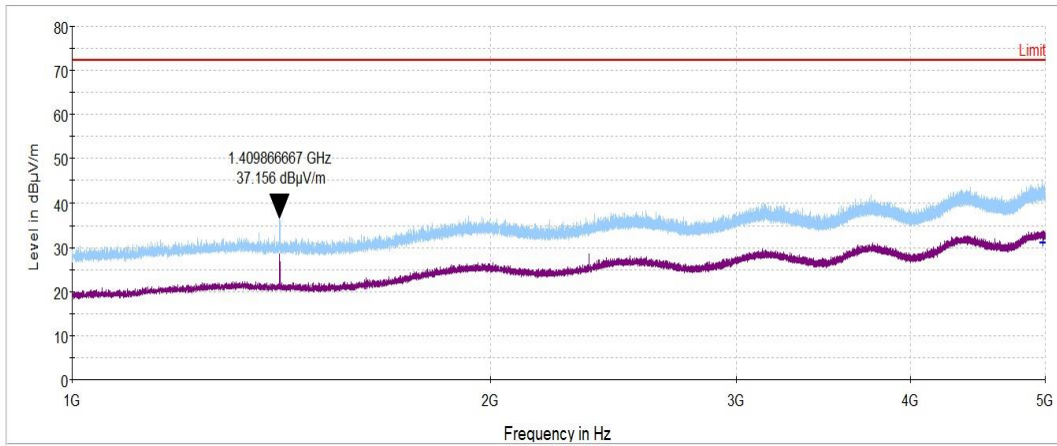



Test specification: Section 90.213 / RSS-119 Section 5.3, Frequency stability			
Test procedure: 47 CFR, Section 2.1055; TIA/EIA-603-E Section 2.2.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 25-Aug-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1002 hPa	Power: 110 VAC, 60 Hz
Remarks:			

7.5 Frequency stability test

7.5.1 General

This test was performed to measure frequency stability of transmitter RF carrier. Specification test limits are given in Table 7.5.1.


Table 7.5.1 Frequency stability limits

Assigned frequency, MHz	Maximum allowed frequency displacement	
	ppm	Hz
450.0031	1.0	450
460.0000		460
469.9969		470

7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The EUT power was turned off. Temperature within test chamber was set to +30°C and a period of time sufficient to stabilize all of the oscillator circuit components was allowed.
- 7.5.2.3 The EUT was powered on and carrier frequency was measured at start up moment and then every minute until frequency had been stabilized or 10 minutes elapsed whichever reached the last. The EUT was powered off.
- 7.5.2.4 The above procedure was repeated at 0°C and at the lowest test temperature.
- 7.5.2.5 The EUT was powered on and carrier frequency was measured at start up moment and at the end of stabilization period at the rest of test temperatures and voltages. The EUT was powered off.
- 7.5.2.6 Frequency displacement was calculated and compared with the limit as provided in Table 7.5.2.
- 7.5.2.7 The test results are provided in Table 7.5.2.

Figure 7.5.1 Frequency stability test setup

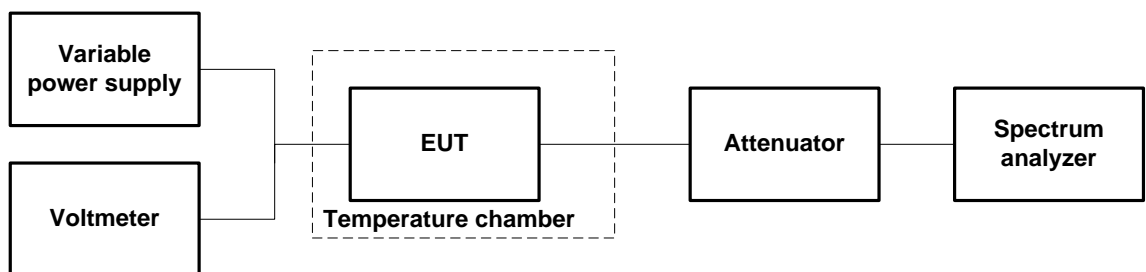



HERMON LABORATORIES

Test specification: Section 90.213 / RSS-119 Section 5.3, Frequency stability			
Test procedure: 47 CFR, Section 2.1055; TIA/EIA-603-E Section 2.2.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 25-Aug-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1002 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Table 7.5.2 Frequency stability test results

OPERATING FREQUENCY: 450 – 470 MHz
 NOMINAL POWER VOLTAGE: 110 VAC 60 Hz
 TEMPERATURE STABILIZATION PERIOD: 20 min
 POWER DURING TEMPERATURE TRANSITION: Off
 SPECTRUM ANALYZER MODE: Counter
 RESOLUTION BANDWIDTH: 10 Hz
 VIDEO BANDWIDTH: 30 Hz
 MODULATION: Unmodulated

T, °C	Voltage, V	Frequency, MHz							Max frequency drift, Hz		Limit, Hz	Margin, Hz	Verdict
		Start up	1 st min	2 nd min	3 rd min	4 th min	5 th min	10 th min	Positive	Negative			
Low frequency 450.0031 MHz													
-30	nominal	450.003062	450.003068	450.003046	450.003030	450.003015	450.002995	450.002962	58	-48	450	-392	Pass
-20	nominal	450.003047	NA	NA	NA	NA	NA	450.003000	37	-10		-413	Pass
-10	nominal	450.003057	NA	NA	NA	NA	NA	450.003047	47	0		-403	Pass
0	nominal	450.003106	450.003106	450.003111	450.003115	450.003118	450.003123	450.003135	125	0		-325	Pass
10	nominal	450.003048	NA	NA	NA	NA	NA	450.003140	130	0		-320	Pass
20	+15%	450.003060	NA	NA	NA	NA	NA	450.003052	50	0		-400	Pass
20	nominal	450.003020	NA	NA	NA	NA	NA	450.003010	10	0		-440	Pass
20	-15%	450.003042	NA	NA	NA	NA	NA	450.003084	74	0		-376	Pass
30	nominal	450.003035	450.003029	450.003033	450.003033	450.003035	450.003035	450.003037	27	0		-423	Pass
40	nominal	450.003039	NA	NA	NA	NA	NA	450.003022	29	0		-421	Pass
50	nominal	450.003058	NA	NA	NA	NA	NA	450.003061	51	0	-399	Pass	
Mid frequency 460.0000MHz													
-30	nominal	460.000016	460.000028	460.000008	460.000002	459.999995	459.999990	459.999958	118	0	460	-342	Pass
-20	nominal	460.000066	NA	NA	NA	NA	NA	460.000065	156	0		-304	Pass
-10	nominal	460.000041	NA	NA	NA	NA	NA	460.000033	131	0		-329	Pass
0	nominal	460.000011	460.000011	460.000013	460.000018	460.000021	460.000025	460.000035	125	0		-335	Pass
10	nominal	460.000002	NA	NA	NA	NA	NA	460.000043	133	0		-327	Pass
20	+15%	459.999928	NA	NA	NA	NA	NA	459.999910	18	0		-442	Pass
20	nominal	459.999914	NA	NA	NA	NA	NA	459.999910	4	0		-456	Pass
20	-15%	459.999914	NA	NA	NA	NA	NA	459.999929	19	0		-441	Pass
30	nominal	459.999963	459.999944	459.999948	459.999949	459.999950	459.999950	459.999953	53	0		-407	Pass
40	nominal	459.999919	NA	NA	NA	NA	NA	459.999904	9	-6		-451	Pass
50	nominal	459.999874	NA	NA	NA	NA	NA	459.999858	0	-52	-408	Pass	
High frequency 469.9969 MHz													
-30	nominal	469.996780	469.996786	469.996762	469.996748	469.996735	469.996725	469.996693	10	-83	470	-387	Pass
-20	nominal	469.996888	NA	NA	NA	NA	NA	469.996895	119	0		-351	Pass
-10	nominal	469.996858	NA	NA	NA	NA	NA	469.996862	86	0		-384	Pass
0	nominal	469.996888	469.996893	469.996905	469.996915	469.996922	469.996930	469.996956	180	0		-290	Pass
10	nominal	469.996825	NA	NA	NA	NA	NA	469.996843	67	0		-403	Pass
20	+15%	469.996742	NA	NA	NA	NA	NA	469.996702	0	-74		-396	Pass
20	nominal	469.996682	NA	NA	NA	NA	NA	469.996776	0	-94		-376	Pass
20	-15%	469.996700	NA	NA	NA	NA	NA	469.996708	0	-76		-394	Pass
30	nominal	469.996670	469.996657	469.996658	469.996656	469.996660	469.996659	469.996661	0	-120		-350	Pass
40	nominal	469.996604	NA	NA	NA	NA	NA	469.996614	0	-172		-298	Pass
50	nominal	469.996620	NA	NA	NA	NA	NA	469.996657	0	-209	-261	Pass	

* - Reference frequency

Reference numbers of test equipment used

HL 0493	HL 3766	HL 4355				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

7.6 Transient frequency behaviour test

7.6.1 General

This test was performed to measure carrier frequency drift as function of time during transmitter start up and shut down. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Transient frequency limits

Channel bandwidth, kHz	Carrier frequency tolerance, kHz	Duration, ms	Time interval*
421.0 – 512.0 MHz band			
6.25	± 6.25	10.0	t ₁
	± 3.125	25.0	t ₂
	± 6.25	10.0	t ₃

* - t_{on} is the instant when a 1 kHz test signal is completely suppressed;

t₁ is the time period immediately following t_{on};

t₂ is the time period immediately following t₁;

t₃ is the time period from the instant when the transmitter is turned off until t_{off};

t_{off} is the instant when the 1 kHz test signal starts to rise.

7.6.2 Test procedure

7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked. Variable attenuator was adjusted to provide signal level approximately 40 dB below the FM receiver maximum allowed level as measured with RF power meter. The EUT was turned off.

7.6.2.2 The signal generator was set to the assigned transmitter frequency modulated with 1 kHz tone at 25 kHz deviation and the output power was adjusted to provide the same as the EUT signal level at the FM receiver input as measured with power meter.

7.6.2.3 The storage oscilloscope was set to provide horizontal sweep rate 10 milliseconds per division. Amplitude control of the storage oscilloscope was adjusted to obtain 1 kHz sinusoidal signal vertically centered with ± 4 divisions amplitude.


7.6.2.4 The variable attenuator was adjusted to increase RF level supplied to splitter by 30 dB and the EUT was consequently turned on and off. Transient frequency during power switching was captured and shown in the associated plots.

7.6.2.5 The test results are provided in Table 7.6.2 and the associated plots.



Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Figure 7.6.1 Transient frequency test setup

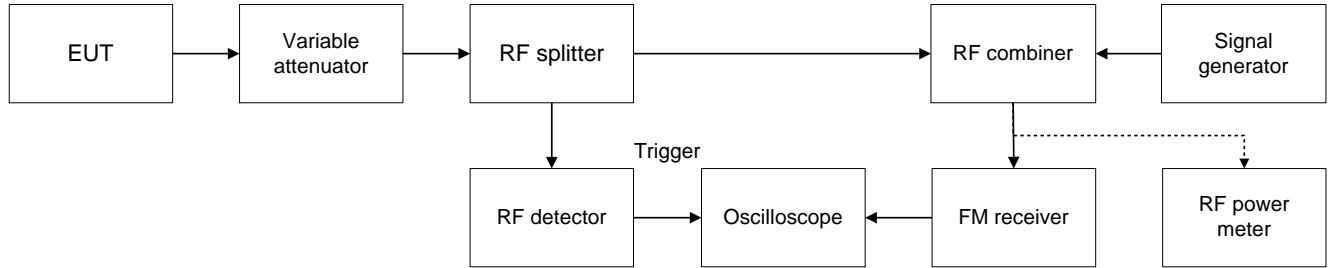



Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Table 7.6.2 Transient frequency behaviour test results

Carrier frequency, MHz	Time interval	Duration, ms	Frequency tolerance, kHz	Limit, kHz	Margin, kHz	Verdict
Channel bandwidth 6.25 kHz						
450.0031	t ₁	10.0	2.075	± 6.25	-4.175	Pass
	t ₂	25.0	1.281	± 3.125	-1.844	
	t ₃	10.0	0.854	± 6.25	-5.396	
460.0000	t ₁	10.0	2.319	± 6.25	-3.931	Pass
	t ₂	25.0	1.831	± 3.125	-1.294	
	t ₃	10.0	0.854	± 6.25	-5.396	
469.9969	t ₁	10.0	2.746	± 6.25	-4.602	Pass
	t ₂	25.0	1.037	± 3.125	-2.088	
	t ₃	10.0	0.915	± 6.25	-5.335	

Reference numbers of test equipment used

HL 2667	HL 3433	HL 3438	HL 5971	HL 3785	HL 4413	HL 4778	HL 4938
HL 5472							

Full description is given in Appendix A.



HERMON LABORATORIES

Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.6.1 Transient frequency during power ON test results at low carrier frequency





Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.6.2 Transient frequency during power ON test results at low carrier frequency





HERMON LABORATORIES

Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.6.3 Transient frequency during power OFF test results at low carrier frequency





HERMON LABORATORIES

Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.6.4 Transient frequency during power ON test results at mid carrier frequency





HERMON LABORATORIES

Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.6.5 Transient frequency during power ON test results at mid carrier frequency





HERMON LABORATORIES

Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.6.6 Transient frequency during power OFF test results at mid carrier frequency





HERMON LABORATORIES

Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.6.7 Transient frequency during power ON test results at high carrier frequency





HERMON LABORATORIES

Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.6.8 Transient frequency during power ON test results at high carrier frequency





HERMON LABORATORIES

Test specification: Section 90.214 / RSS-119 Section 5.9, Transient frequency behaviour			
Test procedure: TIA/EIA-603-E, Section 2.2.19			
Test mode: Compliance		Verdict: PASS	
Date(s): 30-Sep-21			
Temperature: 24 °C	Relative Humidity: 55 %	Air Pressure: 1008 hPa	Power: 110 VAC, 60 Hz
Remarks:			

Plot 7.6.9 Transient frequency during power OFF test results at high carrier frequency



**8 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	28-Feb-22	28-Mar-23
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A0187 7	11-Sep-22	11-Sep-23
1500	Cable RF, 15 m, N/N-type	Suhner Switzerland	RG 214/U	1500	07-Sep-22	07-Sep-23
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY4825028 8	19-Jul-22	19-Jul-23
0493	Temperature Chamber -45...175 deg C	Thermotron	S-1.2 Mini- Max	14016	24-Jun-21	24-Jun-22
2667	Signal generator, 9 kHz - 3.3 GHz	Rohde & Schwarz	SML03	101909	24-Sep-20	24-Oct-21
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY4144476 2	12-May-21	12-Jun-22
3433	Test Cable , DC-18 GHz, 1.5 m, SMA – SMA	Mini-Circuits	CBL-5FT- SMSM+	25679	19-Apr-21	19-Apr-22
3438	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini-Circuits	BW- S10W5+	NA	25-Feb-21	25-Feb-22
3766	Attenuator, N-type, 20 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW- N20W5+	NA	01-Jan-21	01-Jan-22
3785	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini-Circuits	BW- S10W5+	NA	25-Feb-21	25-Feb-22
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1226/2A	07-Apr-22	07-Apr-23
4339	High pass Filter, 50 Ohm, 1000 to 18000 MHz, SMA-FM / SMA-M	Micro-Tronics	HPM50115 -02	001	15-Jun-21	15-Jun-23
5085	Attenuator, 4 dB, DC - 6 GHz, 1 W	Mini-Circuits	UNAT-4+	NA	24-Mar-22	24-Mar-25
4355	Signal and Spectrum Analyzer, 9 kHz to 7 GHz	Rohde & Schwarz	FSV 7	101630	20-Sep-21	20-Sep-22
4413	Resistive divider, DC to 1.5 GHz, 2 W	Microlab	DA-3FN	NA	14-Nov-19	14-Nov-21
4778	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL4777	Hewlett Packard	8542E	30807A002 62, 3427A0012 3	09-Nov-20	09-Nov-21
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	19-Jan-23	19-Jan-24
4938	Test Cable, 50Ω, 1.8 m, DC to 18 GHz	Mini-Circuits	CBL-6FT- SMNM+	NA	19-Apr-21	19-Apr-22
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	24-Mar-22	24-Mar-25
5476	Cable, BNC/BNC, 10.5 m	Western wire	MIL-C-17G	NA	22-May-22	22-May-23
5405	RF cable, 18 GHz, N-N, 6 m	Huber-Suhner	SF118/11N (x2)	500023/118	19-Nov-20	19-Nov-21
5409	RF cable, 40 GHz, SMA-SMA, 2 m	Huber-Suhner	SF102EA/1 1SK/11SK/ 2000MM	503973/2EA	10-Aug-21	10-Aug-22
5472	Power Splitter / Combiner 0.5-1 GHz	Mini Circuits	ZAPD-1	NA	28-Jan-21	28-Jan-23
5637	Cable, 50 Ohm, DC to 18 GHz, 1.8 m, SMA/SMA	Mini Circuits	CBL-6FT- SMSM+	NA	08-Aug-21	08-Aug-22
5902	RF cable, 18 GHz, 6.0m, N-type	Huber-Suhner	SF126EA/1 1N/11N/60 00	NA	08-Dec-22	08-Dec-23
5971	Oscilloscope, 500 MHz, digital 4 channel	Rohde & Schwarz	RTM3004	104883	20-Feb-21	20-Jan-22
7585	EMI Test Receiver, 1 Hz to 44 GHz	Rohde & Schwarz	ESW44	103130	19-May-22	19-May-23



9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Transmitter tests	
Carrier power conducted at antenna connector	± 1.7 dB
Carrier power radiated (substitution method)	± 4.5 dB
Occupied bandwidth	±8%
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Spurious emissions radiated 30 MHz – 40 GHz (substitution method)	± 4.5 dB
Frequency error	30 – 300 MHz: ± 50.5 Hz (1.68 ppm) 300 – 1000 MHz: ± 168 Hz (0.56 ppm)
Transient frequency behaviour	187 Hz ± 13.9 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Unintentional radiator tests	
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

11 APPENDIX D Specification references

FCC 47CFR part 90: 2020	Private land mobile radio services
FCC 47CFR part 2: 2020	Frequency allocations and radio treaty matters; general rules and regulations
ANSI/TIA/EIA-603-E:2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
RSS-119 Issue 12 with_amendment 2022	Land Mobile and Fixed Equipment Operating in the Frequency Range 27.41-960 MHz
RSS-Gen Issue 5 with_amendment_1_2: 2021	General Requirements and Information for the Certification of Radiocommunication Equipment



12 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Measured antenna factor, dBS/m
0.009	-32.5
0.010	-33.4
0.020	-37.9
0.050	-40.6
0.075	-41.0
0.100	-41.2
0.150	-41.2
0.250	-41.2
0.500	-41.3
0.750	-41.3
1.000	-41.4
2.000	-41.4
3.000	-41.4
4.000	-41.5
5.000	-41.5
10.000	-41.8
15.000	-42.2
20.000	-42.9
25.000	-43.9
30.000	-45.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Antenna factor
Trilog antenna
Model ALX-8000E, Frankonia, S/N 00809, HL 5288, 30-1000 MHz

Frequency, MHz	Antenna factor, dB/m		
	Vert Up	Vert Down	Delta
30	-51.19	-51.28	0.09
35	-44.03	-44.12	0.09
40	-43.07	-43.12	0.05
45	-39.61	-39.79	0.18
50	-37.84	-38.14	0.3
60	-34.93	-34.9	0.03
70	-29.76	-29.66	0.1
80	-27.69	-27.82	0.13
90	-29.05	-29.07	0.02
100	-31.19	-31.19	0
120	-31.61	-31.6	0.01
140	-28.13	-28.06	0.07
160	-27.71	-27.75	0.04
180	-26.19	-26.15	0.04
200	-28.2	-28.15	0.05
250	-27.45	-27.47	0.02
300	-29.61	-29.63	0.02
400	-31.77	-31.78	0.01
500	-32.81	-32.81	0
600	-33.64	-33.61	0.03
700	-34.21	-34.21	0
800	-35.66	-35.66	0
900	-36.99	-36.91	0.08
1000	-38	-37.91	0.09

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Active Horn Antenna,
Com-Power Corporation, model: AHA-118, s/n 701046, HL 4933

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



Cable loss
Test Cable, Mini-Circuits, CBL-5FT-SMSM+, SMA-SMA, 18 GHz, 1.5 m, S/N 25679
Mini-Circuits, HL 3433

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10.0	0.06	9000	2.01
100	0.17	9500	2.06
500	0.41	10000	2.05
1000	0.58	10500	2.18
1500	0.72	11000	2.26
2000	0.86	11500	2.28
2500	0.96	12000	2.43
3000	1.04	12500	2.53
3500	1.13	13000	2.52
4000	1.23	13500	2.56
4500	1.31	14000	2.60
5000	1.41	14500	2.59
5500	1.49	15000	2.67
6000	1.55	15500	2.76
6500	1.63	16000	2.86
7000	1.71	16500	2.91
7500	1.78	17000	2.95
8000	1.86	17500	3.02
8500	1.92	18000	3.07



Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 1.5 m, SMA-SMA, S/N 1226/2A
HL 3903

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	-0.02	9500	1.84	21000	2.98
100	0.15	10000	1.86	22000	3.07
500	0.38	10500	1.93	23000	3.13
1000	0.56	11000	1.99	24000	3.21
1500	0.69	11500	2.04	25000	3.26
2000	0.82	12000	2.10	26000	3.48
2500	0.90	12500	2.15	27000	3.44
3000	0.98	13000	2.21	28000	3.53
3500	1.06	13500	2.25	29000	3.59
4000	1.11	14000	2.29	30000	3.66
4500	1.17	14500	2.34	31000	3.70
5000	1.24	15000	2.36	32000	3.79
5500	1.32	15500	2.40	33000	3.88
6000	1.40	16000	2.45	34000	3.94
6500	1.50	16500	2.48	35000	3.91
7000	1.56	17000	2.56	36000	4.05
7500	1.62	17500	2.58	37000	4.22
8000	1.68	18000	2.60	38000	4.25
8500	1.74	19000	2.84	39000	4.27
9000	1.78	20000	2.88	40000	4.33



Cable loss
RF cable, DC to 18 GHz, 1.8m, 50 Ohm, Mini-Circuits,
CBL-6FT-SMNM+, HL 4938

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.16	5100	2.10	10300	3.37	15500	4.59
50	0.23	5200	2.15	10400	3.39	15600	4.61
100	0.29	5300	2.16	10500	3.41	15700	4.64
200	0.38	5400	2.19	10600	3.42	15800	4.66
300	0.46	5500	2.23	10700	3.45	15900	4.71
400	0.53	5600	2.29	10800	3.49	16000	4.72
500	0.59	5700	2.27	10900	3.52	16100	4.73
600	0.64	5800	2.31	11000	3.52	16200	4.80
700	0.69	5900	2.36	11100	3.53	16300	4.83
800	0.74	6000	2.38	11200	3.59	16400	4.82
900	0.78	6100	2.41	11300	3.60	16500	4.86
1000	0.83	6200	2.44	11400	3.59	16600	4.88
1100	0.87	6300	2.49	11500	3.64	16700	4.89
1200	0.91	6400	2.51	11600	3.67	16800	4.95
1300	0.95	6500	2.54	11700	3.67	16900	4.93
1400	0.99	6600	2.58	11800	3.69	17000	4.94
1500	1.03	6700	2.61	11900	3.73	17100	4.97
1600	1.06	6800	2.63	12000	3.74	17200	5.00
1700	1.10	6900	2.66	12100	3.76	17300	5.03
1800	1.13	7000	2.70	12200	3.79	17400	5.03
1900	1.16	7100	2.73	12300	3.83	17500	5.05
2000	1.19	7200	2.76	12400	3.86	17600	5.11
2100	1.23	7300	2.77	12500	3.87	17700	5.12
2200	1.25	7400	2.80	12600	3.94	17800	5.11
2300	1.28	7500	2.83	12700	3.96	17900	5.13
2400	1.31	7600	2.85	12800	3.98	18000	4.87
2500	1.35	7700	2.85	12900	4.05		
2600	1.38	7800	2.88	13000	4.06		
2700	1.40	7900	2.90	13100	4.07		
2800	1.43	8000	2.89	13200	4.13		
2900	1.47	8100	2.92	13300	4.20		
3000	1.49	8200	2.93	13400	4.18		
3100	1.52	8300	2.94	13500	4.24		
3200	1.56	8400	2.95	13600	4.30		
3300	1.59	8500	2.99	13700	4.33		
3400	1.61	8600	2.99	13800	4.37		
3500	1.64	8700	3.01	13900	4.39		
3600	1.69	8800	3.03	14000	4.40		
3700	1.70	8900	3.07	14100	4.38		
3800	1.72	9000	3.08	14200	4.40		
3900	1.76	9100	3.09	14300	4.41		
4000	1.80	9200	3.12	14400	4.42		
4100	1.81	9300	3.15	14500	4.42		
4200	1.84	9400	3.17	14600	4.43		
4300	1.88	9500	3.18	14700	4.46		
4400	1.90	9600	3.22	14800	4.46		
4500	1.93	9700	3.24	14900	4.49		
4600	1.95	9800	3.25	15000	4.49		
4700	1.99	9900	3.27	15100	4.51		
4800	2.01	10000	3.31	15200	4.55		
4900	2.04	10100	3.34	15300	4.56		
5000	2.09	10200	3.34	15400	4.55		



Cable loss
RF Cable, Huber-Suhner, 18 GHz, 6 m,
SF118/11N(x2), S/N 500023/118
HL 5405

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.04	5500	2.61
50	0.24	6000	2.88
100	0.33	6500	2.92
200	0.47	7000	2.97
300	0.57	7500	3.05
400	0.66	8000	3.16
500	0.75	8500	3.28
600	0.81	9000	3.49
700	0.87	9500	3.52
800	0.93	10000	3.63
900	0.99	10500	3.73
1000	1.06	11000	3.84
1100	1.10	11500	3.97
1200	1.15	12000	4.02
1300	1.19	12500	4.13
1400	1.27	13000	4.17
1500	1.31	13500	4.28
1600	1.37	14000	4.35
1700	1.40	14500	4.56
1800	1.42	15000	4.87
1900	1.46	15500	4.76
2000	1.50	16000	4.81
2500	1.71	16500	4.87
3000	1.90	17000	5.01
3500	2.03	17500	5.05
4000	2.23	18000	5.52
4500	2.42		
5000	2.46		



Cable loss
RF Cable, Huber-Suhner, 40 GHz, 2 m, ,
SF102EA/11SK/11SK/2000MM, S/N 503973/2EA
HL 5409

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
100	0.26	20500	3.75
200	0.36	21000	3.80
300	0.45	21500	3.85
500	0.58	22000	3.90
1000	0.82	22500	3.95
1500	0.99	23000	4.00
2000	1.15	23500	4.04
2500	1.28	24000	4.09
3000	1.40	24500	4.13
3500	1.51	25000	4.19
4000	1.61	25500	4.25
4500	1.71	26000	4.30
5000	1.80	26500	4.37
5500	1.89	27000	4.45
6000	1.98	27500	4.47
6500	2.06	28000	4.45
7000	2.14	28500	4.49
7500	2.22	29000	4.57
8000	2.29	29500	4.60
8500	2.36	30000	4.59
9000	2.43	30500	4.63
9500	2.50	31000	4.68
10000	2.58	31500	4.74
10500	2.63	32000	4.81
11000	2.70	32500	4.89
11500	2.76	33000	4.89
12000	2.82	33500	4.92
12500	2.87	34000	4.94
13000	2.94	34500	4.99
13500	3.00	35000	5.07
14000	3.06	35500	5.12
14500	3.11	36000	5.14
15000	3.17	36500	5.22
15500	3.23	37000	5.28
16000	3.29	37500	5.30
16500	3.35	38000	5.39
17000	3.41	38500	5.48
17500	3.47	39000	5.44
18000	3.51	39500	5.45
18500	3.56	40000	5.51
19000	3.60		
19500	3.66		
20000	3.71		



Cable loss
RF Cable, Mini Circuits, DC to 18 GHz, 1.8 m,
CBL-6FT-SMSM+, HL 5637

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.02	8750	2.34
10	0.83	9000	2.35
30	0.49	9250	2.37
50	0.15	9500	2.40
100	0.21	9750	2.40
250	0.33	10000	2.43
500	0.48	10250	2.44
750	0.59	10500	2.45
1000	0.68	10750	2.48
1250	0.77	11000	2.51
1500	0.85	11250	2.55
1750	0.92	11500	2.60
2000	0.99	11750	2.64
2250	1.06	12000	2.68
2500	1.12	12250	2.73
2750	1.19	12500	2.76
3000	1.25	12750	2.80
3250	1.30	13000	2.86
3500	1.36	13250	2.88
3750	1.41	13500	2.92
4000	1.46	13750	2.96
4250	1.52	14000	2.99
4500	1.57	14250	3.03
4750	1.61	14500	3.06
5000	1.65	14750	3.07
5250	1.68	15000	3.14
5500	1.73	15250	3.16
5750	1.77	15500	3.21
6000	1.81	15750	3.26
6250	1.87	16000	3.29
6500	1.92	16250	3.34
6750	1.96	16500	3.36
7000	2.00	16750	3.37
7250	2.07	17000	3.42
7500	2.11	17250	3.42
7750	2.14	17500	3.43
8000	2.21	17750	3.42
8250	2.26	18000	3.43
8500	2.29		



Cable loss
RF cable, 18 GHz, 6.0m, N-type, Huber-Suhner, S/N 511435/126EA,
SF126EA/11N/11N/6000, HL 5902

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.00	4800	3.24	10000	4.82	15200	6.08
1	0.01	4900	3.30	10100	4.85	15300	6.11
10	0.07	5000	3.32	10200	4.87	15400	6.12
30	0.18	5100	3.37	10300	4.91	15500	6.14
50	0.25	5200	3.40	10400	4.93	15600	6.15
100	0.41	5300	3.42	10500	4.95	15700	6.18
200	0.56	5400	3.46	10600	4.99	15800	6.20
300	0.68	5500	3.50	10700	5.01	15900	6.23
400	0.76	5600	3.53	10800	5.03	16000	6.22
500	0.87	5700	3.56	10900	5.06	16100	6.26
600	1.03	5800	3.58	11000	5.08	16200	6.29
700	1.14	5900	3.63	11100	5.12	16300	6.30
800	1.23	6000	3.67	11200	5.13	16400	6.33
900	1.34	6100	3.69	11300	5.16	16500	6.35
1000	1.43	6200	3.73	11400	5.18	16600	6.37
1100	1.51	6300	3.76	11500	5.22	16700	6.40
1200	1.59	6400	3.80	11600	5.24	16800	6.43
1300	1.66	6500	3.81	11700	5.25	16900	6.46
1400	1.73	6600	3.83	11800	5.28	17000	6.47
1500	1.78	6700	3.87	11900	5.32	17100	6.49
1600	1.82	6800	3.91	12000	5.33	17200	6.51
1700	1.87	6900	3.91	12100	5.35	17300	6.53
1800	1.89	7000	3.93	12200	5.38	17400	6.56
1900	1.95	7100	3.95	12300	5.39	17500	6.60
2000	1.99	7200	3.98	12400	5.43	17600	6.62
2100	2.02	7300	4.02	12500	5.46	17700	6.60
2200	2.06	7400	4.04	12600	5.48	17800	6.63
2300	2.11	7500	4.07	12700	5.50	17900	6.64
2400	2.16	7600	4.11	12800	5.52	18000	6.66
2500	2.21	7700	4.15	12900	5.57		
2600	2.29	7800	4.17	13000	5.57		
2700	2.32	7900	4.20	13100	5.60		
2800	2.38	8000	4.22	13200	5.61		
2900	2.44	8100	4.26	13300	5.64		
3000	2.47	8200	4.30	13400	5.67		
3100	2.53	8300	4.32	13500	5.70		
3200	2.57	8400	4.35	13600	5.71		
3300	2.61	8500	4.39	13700	5.73		
3400	2.67	8600	4.43	13800	5.74		
3500	2.71	8700	4.45	13900	5.80		
3600	2.76	8800	4.47	14000	5.82		
3700	2.80	8900	4.49	14100	5.85		
3800	2.85	9000	4.53	14200	5.86		
3900	2.89	9100	4.55	14300	5.87		
4000	2.93	9200	4.57	14400	5.92		
4100	2.98	9300	4.61	14500	5.93		
4200	3.01	9400	4.64	14600	5.95		
4300	3.05	9500	4.68	14700	5.97		
4400	3.10	9600	4.70	14800	6.01		
4500	3.12	9700	4.73	14900	6.04		
4600	3.18	9800	4.78	15000	6.04		
4700	3.21	9900	4.80	15100	6.08		



13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband



14 APPENDIX G Manufacturer's declaration



Declaration of Identity

We, the undersigned,

Declare that the following equipment:

Brand/Item	Type/Model	Short Product description
LCU NEMA	LCUN35GX	The item operates in Galaxy system at 450-470MHz

and

Brand/Item	Type/Model	Short Product description
LCU NEMA	LCUN35HG	The item operates in Galaxy system at 450-470MHz

Have the same RF card that fed from 3.6 V DC.

Model LCUN35GX contains a power supply converter from 110-277 VAC to 3.6 V DC.
Model LCUN35HG contains a power supply converter from 347-480 VAC to 3.6 V DC.

16 Apr. 2023

(date)



(signature)

Itzhak Kanner

(printed name)

RF Manager, R&D

(position)

**ST Engineering
Telematics Wireless Ltd.**

(company stamp)

END OF DOCUMENT