



Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247(DTS)

FOR:

Telematics Wireless Ltd.
Water meter booster
Model:Booster 2

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Transmitter characteristics for operation in 905.55-924.75 MHz.....	6
6.3	Transmitter characteristics for operation @916.3 MHz	7
7	Transmitter tests according to 47CFR part 15 subpart C §15.247 (DTS) requirements.....	8
7.1	Minimum 6 dB bandwidth.....	8
7.2	Peak output power	13
7.3	Peak spectral power density	22
7.4	Field strength of spurious emissions	31
7.5	Antenna requirements.....	104
8	APPENDIX A Test equipment and ancillaries used for tests.....	105
9	APPENDIX B Measurement uncertainties.....	106
10	APPENDIX C Test laboratory description	107
11	APPENDIX D Specification references	107
12	APPENDIX E Test equipment correction factors.....	108
13	APPENDIX F Abbreviations and acronyms.....	116



HERMON LABORATORIES

1 Applicant information

Client name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-mail: slavas@tlmw.com
Contact name: Mr. Slava Snitkovsky

2 Equipment under test attributes

Product name: Water reader (Booster)
Product type: Transceiver
Model(s): Booster 2
Receipt date 1/17/2010

3 Manufacturer information

Manufacturer name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-Mail: slavas@tlmw.com
Contact name: Mr. Slava Snitkovsky

4 Test details

Project ID: 20425
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 1/17/2010
Test completed: 2/04/2010
Test specification(s): FCC 47CFR part 15, subpart C, §15.247



HERMON LABORATORIES

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.247(a)2, 6 dB bandwidth	Pass
Section 15.247(b)3, Peak output power	Pass
Section 15.247(i), RF exposure	Pass
Section 15.247(d), Radiated spurious emissions	Pass
Section 15.247(e), Peak power density	Pass
Section 15.207(a), Conducted emission	Not required

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report replaces the previously issued test report identified by Doc ID: TELRAD_FCC.20425_DTS.

	Name and Title	Date	Signature
Tested by:	Mr. S. Samokha, test engineer	February 4, 2010	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	February 16, 2010	
Approved by:	Mr. M. Nikishin, EMC and radio group manager	February 17, 2010	

6 EUT description

6.1 General information

The EUT, water meter booster (WMB), is a transceiver operating in three transmit modes: 905.55-924.75 MHz range (FHSS and DTS, PSK modulation) and @916.3 MHz (DTS, FSK modulation) without simultaneous operation.

The WMB communicates by a RF channel (path No.2 is Tx with PSK modulation and path No.4 is Rx at 916.3 MHz) with up to 2 meters and collects their data. The collected data is transmitted by the WMB towards the concentrator by the RF channel path No.1 using a Frequency Hopping or Direct Sequence Spread Spectrum techniques. The EUT receives the programming parameters and commands from a programmer and transmits the response (path No.5 is Tx with FSK modulation and path No.3 is Rx at 916.3 MHz).

Figure 6.1.1 EUT operational modes block diagram

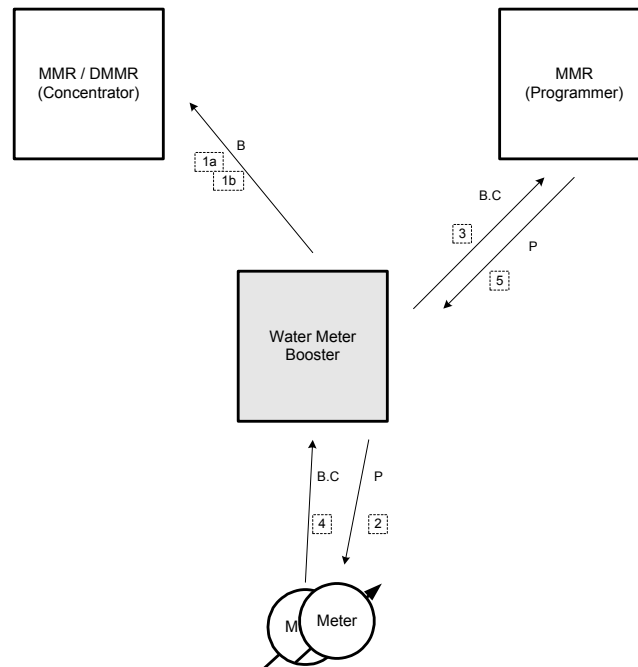


Table 6.1.1 EUT operational modes overview

Modulation technique	Low frequency	Mid frequency	High frequency	Power setting
Frequency-hopping spread spectrum (FHSS), External antenna	905.55	915.00	924.75	85
Direct-Sequence Spread Spectrum (DSSS) FSK, External antenna	–	916.30	–	1E
Direct-Sequence Spread Spectrum (DSSS) FSK, Internal antenna	–	916.30	–	NA
Direct-Sequence Spread Spectrum (DSSS) PSK, External antenna	905.55	915.00	924.75	6A



HERMON LABORATORIES

6.2 Transmitter characteristics for operation in 905.55-924.75 MHz

Type of equipment					
	Stand-alone (Equipment with or without its own control provisions)				
X	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
Intended use		Condition of use			
	fixed	Always at a distance more than 2 m from all people			
X	mobile	Always at a distance more than 20 cm from all people			
	portable	May operate at a distance closer than 20 cm to human body			
Assigned frequency range		902-928 MHz			
Operating frequency range		905.55-924.75 MHz			
RF channel spacing		NA			
Maximum rated output power		At transmitter 50 Ω RF output connector		NA	
		Peak output power		19.42 dBm	
Is transmitter output power variable?		X	No		
			Yes	continuous variable	
				stepped variable with stepsize	dB
				minimum RF power	dBm
				maximum RF power	dBm
Antenna connection					
	unique coupling	standard connector	X	integral	
					with temporary RF connector
					X without temporary RF connector
Antenna/s technical characteristics					
Type	Manufacturer	Model number	Gain		
Unique coupling, "external"	Telematics Wireless	Inverted F antenna	1 dBi		
Transmitter aggregate data rate/s		120 kbps			
Transmitter aggregate symbol (baud) rate/s		NA			
Type of modulation		PSK			
Modulating test signal (baseband)		PRBS			
Maximum transmitter duty cycle in normal use		0.1%			
Transmitter duty cycle supplied for test (DTS)		0.65%	Tx ON time	2.7 msec	Period 418.8 msec
Transmitter power source					
X	Battery	Nominal rated voltage	3.6 VDC	Battery type	Lithium
	DC	Nominal rated voltage	VDC		
	AC mains	Nominal rated voltage	VAC	Frequency	
Common power source for transmitter and receiver			X	yes	no
Spread spectrum technique used		X	Frequency hopping (FHSS)		
		X	Digital transmission system (DTS)		
			Hybrid		
Spread spectrum parameters for transmitters tested per FCC 15.247 only					
DSSS	Chip sequence length	15 bits			
	Spectrum width	2 MHz			



HERMON LABORATORIES

6.3 Transmitter characteristics for operation @916.3 MHz

Type of equipment					
	Stand-alone (Equipment with or without its own control provisions)				
X	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
Intended use		Condition of use			
	fixed	Always at a distance more than 2 m from all people			
X	mobile	Always at a distance more than 20 cm from all people			
	portable	May operate at a distance closer than 20 cm to human body			
Assigned frequency range		902-928 MHz			
Operating frequency range		916.3 MHz			
RF channel spacing		NA			
Maximum rated output power		At transmitter 50 Ω RF output connector			NA
		Peak output power			10.75 dBm
Is transmitter output power variable?		X	No		
			Yes	continuous variable	
				stepped variable with stepsize	
				minimum RF power	dBm
		maximum RF power	dBm		
Antenna connection					
	unique coupling	standard connector	X	integral	with temporary RF connector
					X without temporary RF connector
Antenna/s technical characteristics					
Type	Manufacturer	Model number		Gain	
Unique coupling, "external"	Telematics wireless	Inverted F antenna		1 dBi	
"Internal"	Telematics Wireless	Printed λ/4		1 dBi	
Transmitter aggregate data rate/s		120 kbps			
Transmitter aggregate symbol (baud) rate/s		NA			
Type of modulation		FSK			
Modulating test signal (baseband)		PRBS			
Maximum transmitter duty cycle in normal use		0.1%			
Transmitter duty cycle supplied for test		1.22%	Tx ON time	5.12 msec	Period 418.8 msec
Transmitter power source					
X	Battery	Nominal rated voltage	3.6 VDC	Battery type	Lithium
	DC	Nominal rated voltage	VDC		
	AC mains	Nominal rated voltage	VAC	Frequency	
Common power source for transmitter and receiver			X	yes	no
Spread spectrum technique used			Frequency hopping (FHSS)		
		X	Digital transmission system (DTS)		
			Hybrid		
Spread spectrum parameters for transmitters tested per FCC 15.247 only					
DSSS	Chip sequence length		15 bits		
	Spectrum width		2 MHz		



Test specification:		Section 15.247(a)2, 6 dB bandwidth	
Test procedure:		FR Vol.62, page 26243, Section 15.247(a)2	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/19/2010 9:54:25 AM		
Temperature: 23.5 °C	Air Pressure: 1016 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C §15.247 (DTS) requirements

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 The 6 dB bandwidth test setup





Test specification:		Section 15.247(a)2, 6 dB bandwidth	
Test procedure:		FR Vol.62, page 26243, Section 15.247(a)2	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/19/2010 9:54:25 AM		
Temperature: 23.5 °C	Air Pressure: 1016 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Table 7.1.2 The 6 dB bandwidth test results

ASSIGNED FREQUENCY RANGE: 902 - 928 MHz
DETECTOR USED: Peak
SWEEP MODE: Single
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc
MODULATION: FSK / PSK
MODULATING SIGNAL: PRBS
BIT RATE: 120 kbps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
PSK modulation, external antenna				
Low frequency				
905.55	1050	500	-550	Pass
Mid frequency				
915.00	1015	500	-515	Pass
High frequency				
924.75	1015	500	-515	Pass
FSK modulation, external antenna				
Mid frequency				
916.30	573	500	-73	Pass
FSK modulation, internal antenna				
Mid frequency				
916.30	575	500	-75	Pass

Reference numbers of test equipment used

HL 0521	HL 0604	HL 2870	HL 2871					
---------	---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	FR Vol.62, page 26243, Section 15.247(a)2		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/19/2010 9:54:25 AM		
Temperature: 23.5 °C	Air Pressure: 1016 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.1.1 The 6 dB bandwidth test result at low frequency

Modulation parameters: PSK, 120 kbps
ANTENNA External

11:04:47 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKRΔ 1.050 MHz
.02 dB

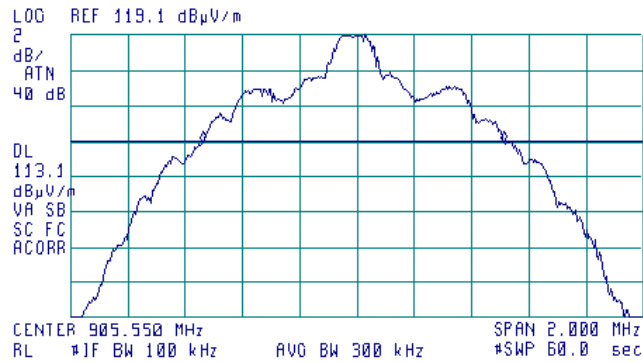


Plot 7.1.2 The 6 dB bandwidth test result at mid frequency

Modulation parameters: PSK, 120 kbps
ANTENNA External

11:13:14 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKRΔ 1.015 MHz
-.07 dB

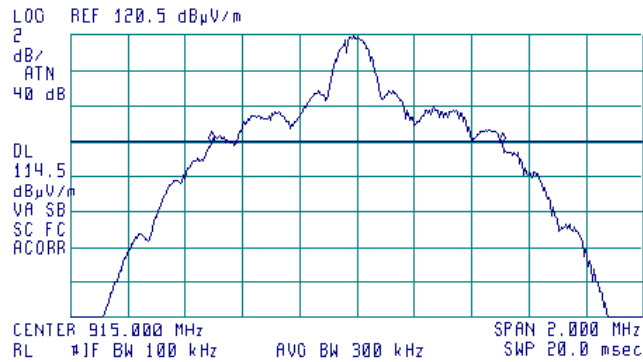



HERMON LABORATORIES


Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	FR Vol.62, page 26243, Section 15.247(a)2		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/19/2010 9:54:25 AM		
Temperature: 23.5 °C	Air Pressure: 1016 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.1.3 The 6 dB bandwidth test result at high frequency

Modulation parameters: PSK, 120 kbps
ANTENNA External

11:19:05 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKRΔ 1.015 MHz
-.03 dB

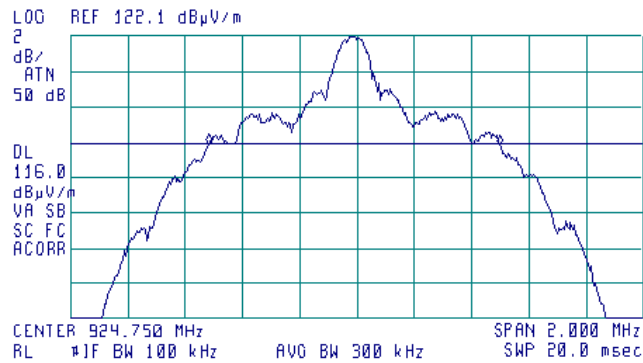


Plot 7.1.4 The 6 dB bandwidth test result at mid frequency

Modulation parameters: FSK, 120 kbps
ANTENNA External

11:21:51 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKRΔ 573 kHz
.19 dB

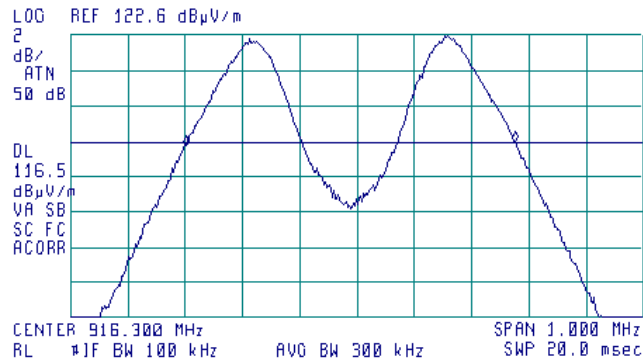



HERMON LABORATORIES


Test specification:	Section 15.247(a)2, 6 dB bandwidth		
Test procedure:	FR Vol.62, page 26243, Section 15.247(a)2		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/19/2010 9:54:25 AM		
Temperature: 23.5 °C	Air Pressure: 1016 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.1.5 The 6 dB bandwidth test result at mid frequency, FSK Internal Antenna

Modulation parameters: FSK, 120 kbps
ANTENNA Internal

11:29:41 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKRΔ 575 kHz
-.09 dB

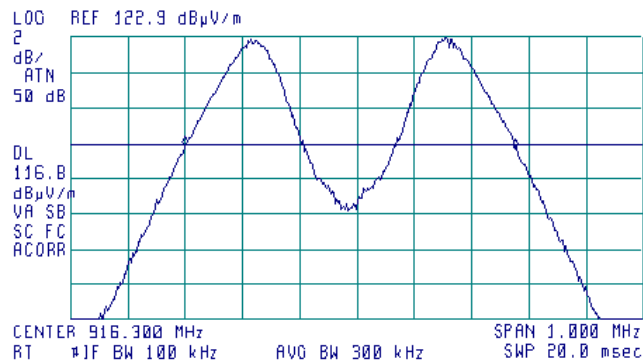



Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:16 PM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

7.2 Peak output power

7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

**- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.2.2 Test procedure

- 7.2.2.1** The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.
- 7.2.2.2** The EUT was adjusted to produce maximum available to end user RF output power.
- 7.2.2.3** The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.2.2.4** The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2, Table 7.2.3 and the associated plots.
- 7.2.2.5** The maximum peak output power was calculated from the field strength of carrier as follows:


$$P = (E \times d)^2 / (30 \times G),$$
where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.
The above equation was converted in logarithmic units for 3 m test distance:
Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi – 95.2 dB.
- 7.2.2.6** The worst test results (the lowest margins) were recorded in Table 7.2.2, Table 7.2.3.



HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:16 PM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Figure 7.2.1 Setup for carrier field strength measurements

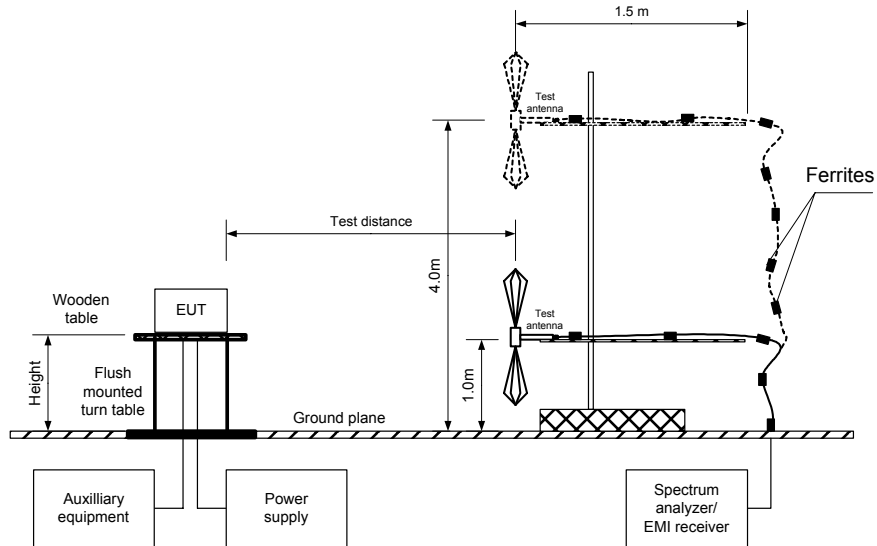



Test specification:		Section 15.247(b)3, Peak output power	
Test procedure:		FR Vol.62, page 26243, Section 15.247(b)	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:16 PM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY RANGE: 902 - 928 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
DETECTOR USED: Peak
TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)

MODULATION: PSK
MODULATING SIGNAL: PRBS
BIT RATE: 120 kbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DETECTOR USED: Peak
EUT 6 dB BANDWIDTH: 1.015 MHz
RESOLUTION BANDWIDTH: 1 MHz
VIDEO BANDWIDTH: 3 MHz
ANTENNA: External

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
905.55	114.10	Vert	1.0	0	1.0	17.87	30.0	-12.13	Pass
915.00	114.81	Vert	1.0	0	1.0	18.58	30.0	-11.42	Pass
924.75	115.65	Vert	1.0	0	1.0	19.42	30.0	-10.58	Pass

*- EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

*** - Margin = Peak output power – specification limit.



Test specification:		Section 15.247(b)3, Peak output power	
Test procedure:		FR Vol.62, page 26243, Section 15.247(b)	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:16 PM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Table 7.2.3 Peak output power test results

ASSIGNED FREQUENCY RANGE: 902 - 928 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
DETECTOR USED: Peak
TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)

MODULATION: FSK
MODULATING SIGNAL: PRBS
BIT RATE: 120 kbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 1 MHz
VIDEO BANDWIDTH: 3 MHz

EUT 6 dB BANDWIDTH: 573 kHz
ANTENNA External

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
916.30	106.98	Vert	1.0	0	1.0	10.75	30.0	-19.25	Pass

EUT 6 dB BANDWIDTH: 575 kHz
ANTENNA Internal

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
916.30	105.85	Vert	1.0	0	1.0	9.62	30.0	-19.38	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 5871	HL 3616				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:16 PM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.2.1 Field strength of carrier at low frequency and Unom

Modulation parameters: PSK, 120 kbps
Antenna polarization: Vertical


08:55:26 JAN 17, 2010

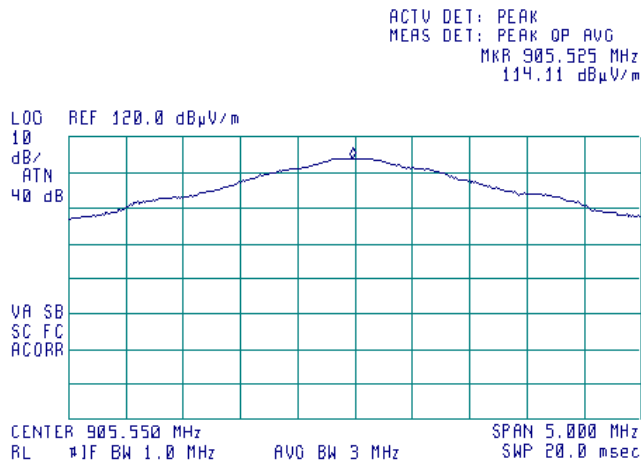

Plot 7.2.2 Field strength of carrier at low frequency and Unom

Modulation parameters: PSK, 120 kbps
Antenna polarization: Horizontal

18:18:36 JAN 24, 2010

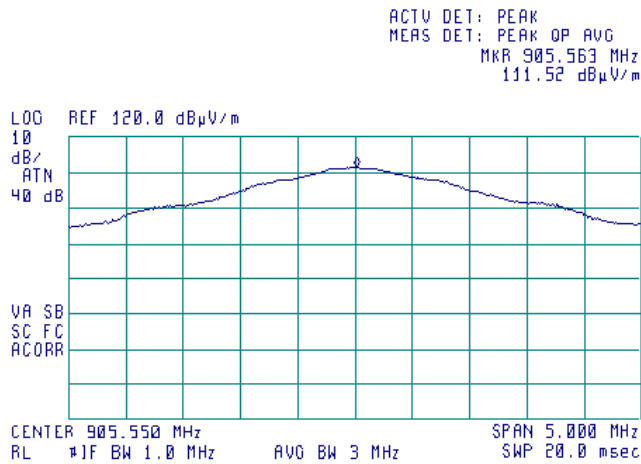




HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:16 PM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.2.3 Field strength of carrier at mid frequency and Unom

Modulation parameters: PSK, 120 kbps
Antenna polarization: Vertical


08:53:26 JAN 17, 2010

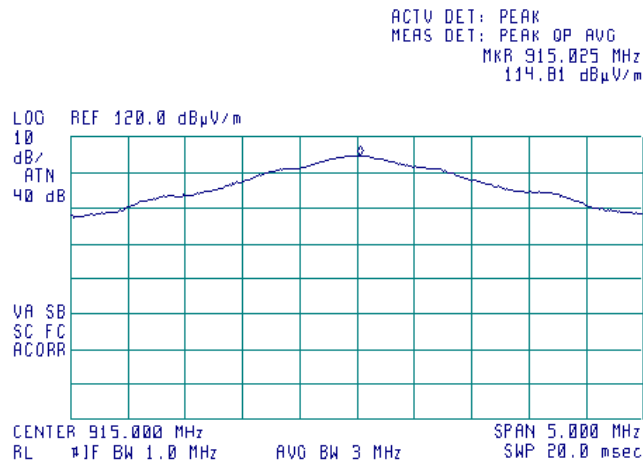

Plot 7.2.4 Field strength of carrier at mid frequency and Unom

Modulation parameters: PSK, 120 kbps
Antenna polarization: Horizontal

15:30:18 JAN 17, 2010

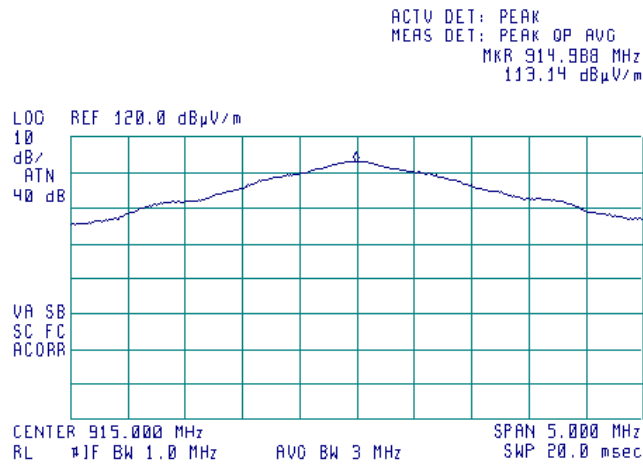




HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:16 PM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.2.5 Field strength of carrier at high frequency and Unom

Modulation parameters: PSK, 120 kbps
Antenna polarization: Vertical


08:48:30 JAN 17, 2010

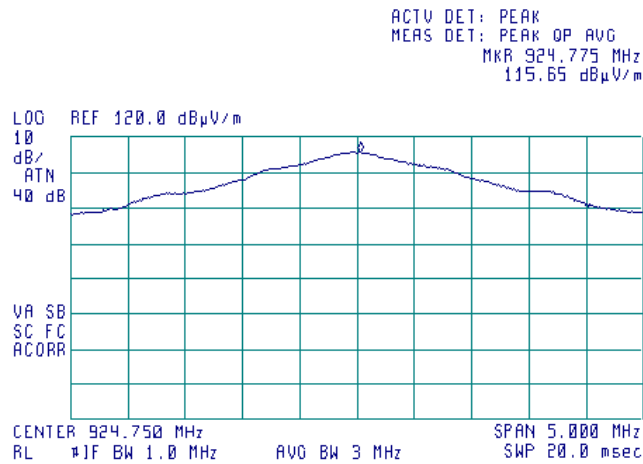

Plot 7.2.6 Field strength of carrier at high frequency and Unom

Modulation parameters: PSK, 120 kbps
Antenna polarization: Horizontal

14:31:16 JAN 17, 2010

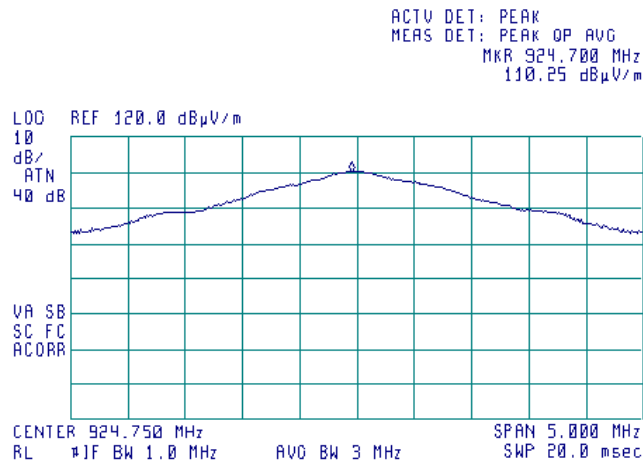




HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:16 PM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.2.7 Field strength of carrier at mid frequency and Unom

Modulation parameters: FSK, 120 kbps
Antenna polarization: Vertical
EUT antenna: External


09:19:14 JAN 17, 2010

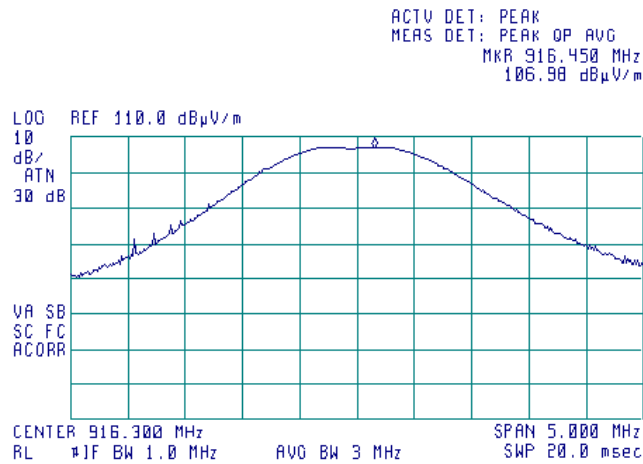

Plot 7.2.8 Field strength of carrier at mid frequency and Unom

Modulation parameters: FSK, 120 kbps
Antenna polarization: Horizontal
EUT antenna: External

15:04:08 JAN 17, 2010

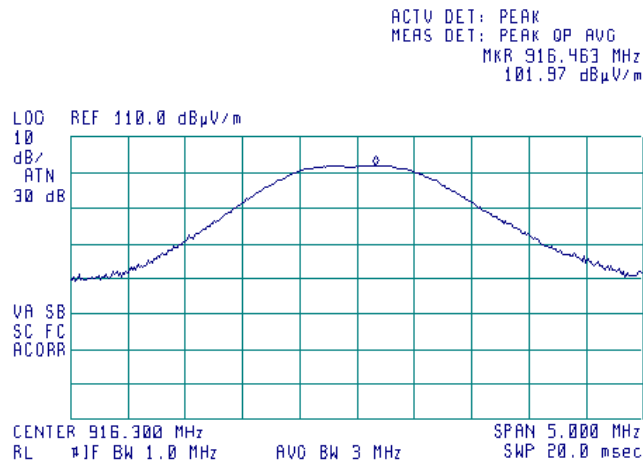




HERMON LABORATORIES

Test specification:	Section 15.247(b)3, Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:16 PM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.2.9 Field strength of carrier at mid frequency and Unom

Modulation parameters: FSK, 120 kbps
Antenna polarization: Vertical
EUT antenna: Internal


09:28:14 JAN 17, 2010

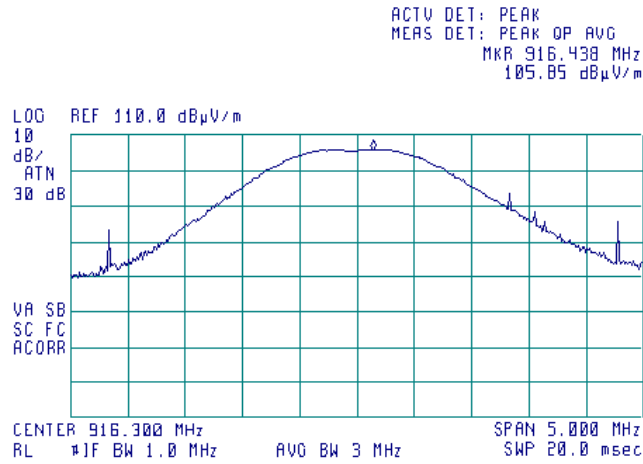

Plot 7.2.10 Field strength of carrier at mid frequency and Unom

Modulation parameters: FSK, 120 kbps
Antenna polarization: Horizontal
EUT antenna: Internal

12:35:04 JAN 17, 2010

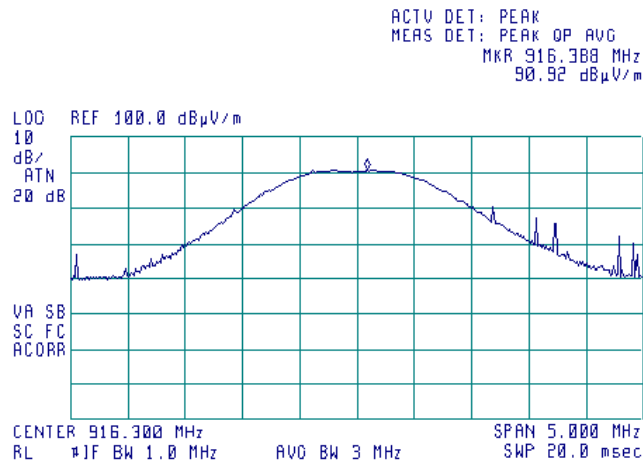



Test specification:	Section 15.247(e), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:26 PM		
Temperature: 23.5°C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

7.3 Peak spectral power density

7.3.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(µV/m)*
902.0 – 928.0	3.0	8.0	103.2
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.3.2 Test procedure for field strength measurements


- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.3.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.3.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.
- 7.3.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.3.2, Table 7.3.3 and the associated plots.



HERMON LABORATORIES

Test specification:	Section 15.247(e), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:26 PM		
Temperature: 23.5°C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Figure 7.3.1 Setup for carrier field strength measurements

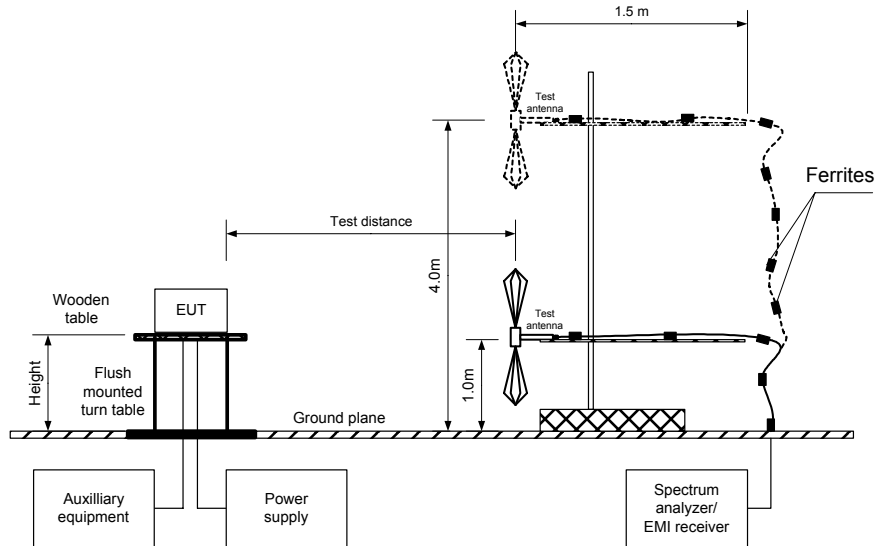



Test specification:		Section 15.247(e), Peak power density	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(d)	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:26 PM		
Temperature: 23.5°C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Table 7.3.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 3 kHz
VIDEO BANDWIDTH: 10 kHz
TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)
MODULATION: PSK
MODULATING SIGNAL: PRBS
BIT RATE: 120 kbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
905.6115	103.39	1.0	103.23	-0.84	Vert	1.0	0
915.0620	103.85	1.0	103.23	-0.38	Vert	1.0	0
924.6635	103.67	1.0	103.23	-0.56	Vert	1.0	0

Verdict: Pass

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

** - EUT front panel refer to 0 degrees position of turntable.



Test specification:		Section 15.247(e), Peak power density	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(d)	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:26 PM		
Temperature: 23.5°C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Table 7.3.3 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 3 kHz
VIDEO BANDWIDTH: 10 kHz
TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)
MODULATION: FSK
MODULATING SIGNAL: PRBS
BIT RATE: 120 kbps
TRANSMITTER OUTPUT POWER: Maximum
ANTENNA: External

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
916.3	103.57	1.0	103.23	-0.66	Vert	1.0	0

ANTENNA: Internal

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
916.3	102.45	1	103.23	-1.78	Vert	1.0	180

Verdict: Pass

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 2871	HL 3616				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.247(e), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:26 PM		
Temperature: 23.5°C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.3.1 Peak spectral power density at low frequency within 6 dB band

Modulation parameters: PSK, 120 kbps
ANTENNA: External

08:12:08 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 905.760 MHz
102.41 dBμV/m

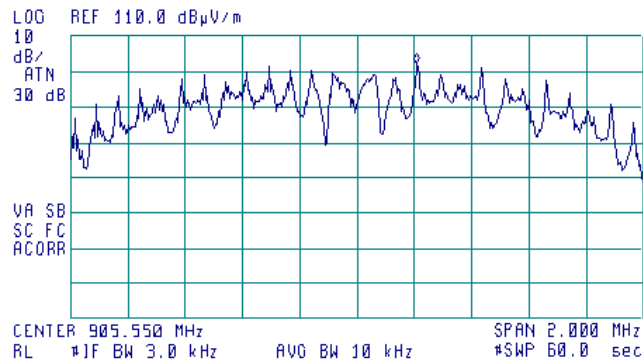


Plot 7.3.2 Peak spectral power density at low frequency zoomed at the peak

Modulation parameters: PSK, 120 kbps
ANTENNA: External

08:21:16 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 905.6115 MHz
103.39 dBμV/m

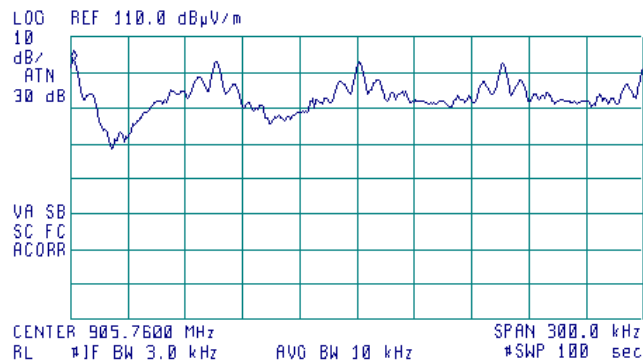



HERMON LABORATORIES


Test specification:	Section 15.247(e), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:26 PM		
Temperature: 23.5°C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.3.3 Peak spectral power density at mid frequency within 6 dB band

Modulation parameters: PSK, 120 kbps
ANTENNA: External

08:00:32 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 915.065 MHz
103.70 dBμV/m

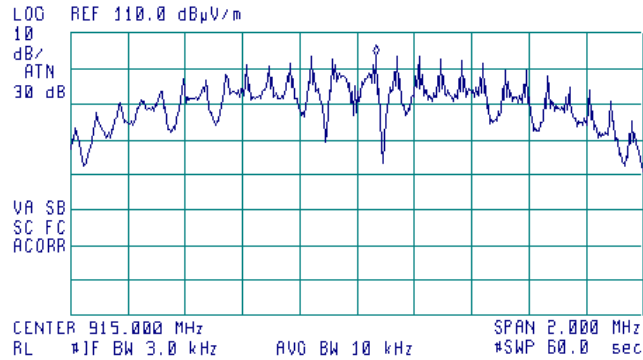


Plot 7.3.4 Peak spectral power density at mid frequency zoomed at the peak

Modulation parameters: PSK, 120 kbps
ANTENNA: External

08:08:11 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 915.0620 MHz
103.85 dBμV/m

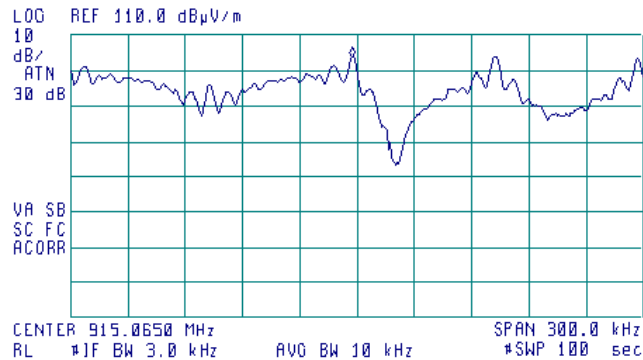



HERMON LABORATORIES


Test specification:	Section 15.247(e), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:26 PM		
Temperature: 23.5°C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.3.5 Peak spectral power density at high frequency within 6 dB band

Modulation parameters: PSK, 120 kbps
ANTENNA: External

08:35:46 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 924.590 MHz
103.10 dBμV/m

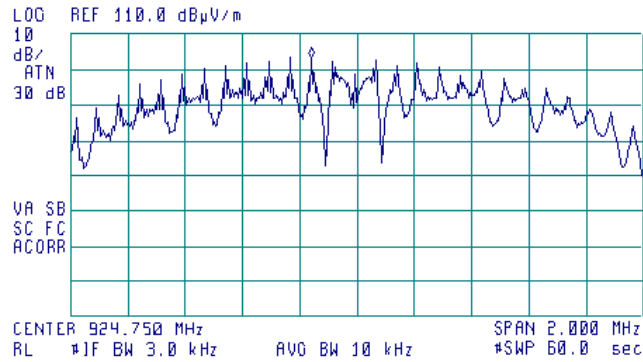


Plot 7.3.6 Peak spectral power density at high frequency zoomed at the peak

Modulation parameters: PSK, 120 kbps
ANTENNA: External

08:43:45 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 924.6635 MHz
103.67 dBμV/m

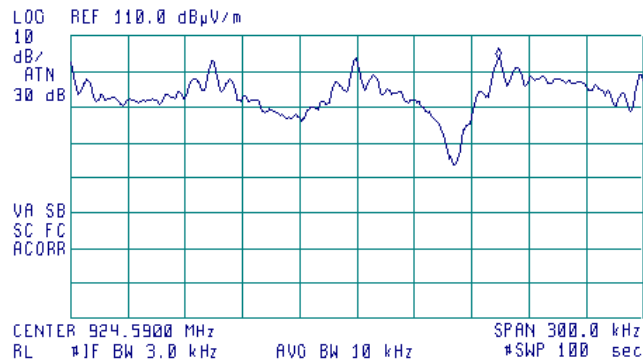



HERMON LABORATORIES


Test specification:	Section 15.247(e), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:26 PM		
Temperature: 23.5°C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.3.7 Peak spectral power density at mid frequency within 6 dB band

Modulation parameters: FSK, 120 kbps
ANTENNA: External

09:05:43 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 916.460 MHz
103.11 dBμV/m

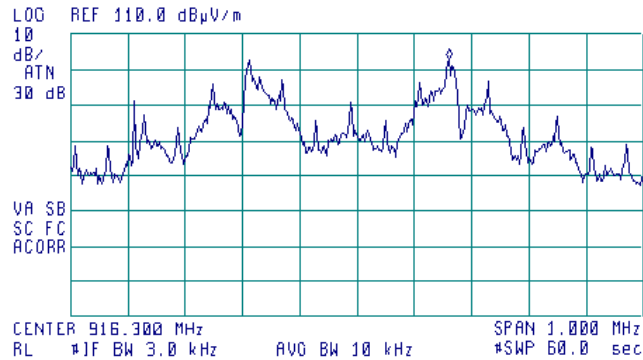


Plot 7.3.8 Peak spectral power density at mid frequency zoomed at the peak

Modulation parameters: FSK, 120 kbps
ANTENNA: External

09:13:58 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 916.4570 MHz
103.57 dBμV/m

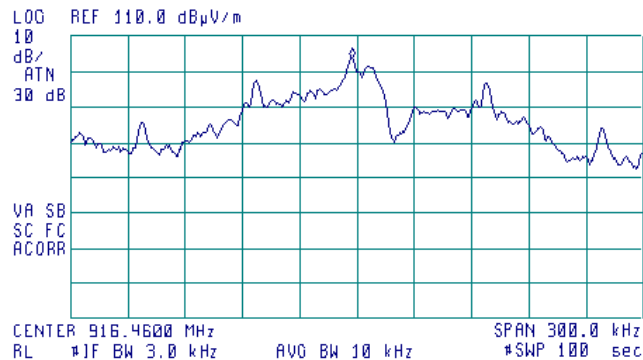




HERMON LABORATORIES

Test specification:	Section 15.247(e), Peak power density		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(d)		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:33:26 PM		
Temperature: 23.5°C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.3.9 Peak spectral power density at mid frequency within 6 dB band

Modulation parameters: FSK, 120 kbps
ANTENNA: Internal


09:33:19 JAN 17, 2010

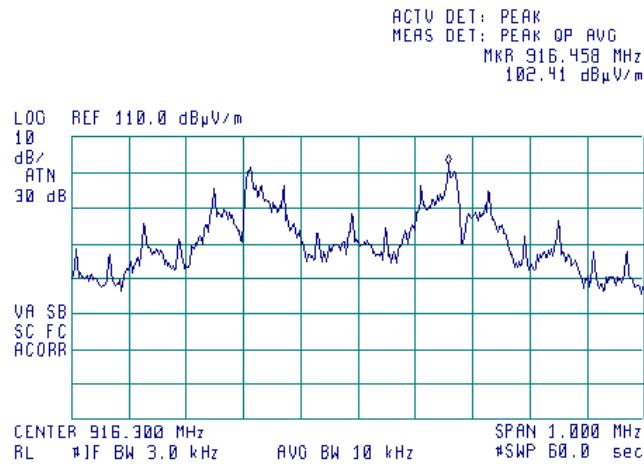

Plot 7.3.10 Peak spectral power density at mid frequency zoomed at the peak

Modulation parameters: FSK, 120 kbps
ANTENNA: Internal

09:41:26 JAN 17, 2010

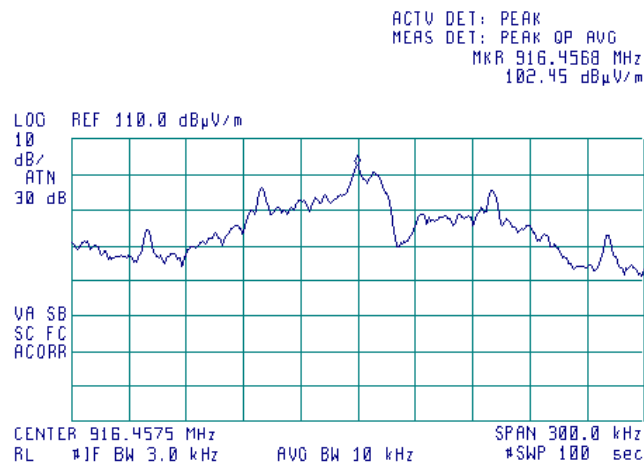



Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

7.4 Field strength of spurious emissions

7.4.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 – 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.4.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.

7.4.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.4.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.4.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.4.3.1 The EUT was set up as shown in Figure 7.4.2, energized and the performance check was conducted.

7.4.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.4.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Figure 7.4.1 Setup for spurious emission field strength measurements below 30 MHz


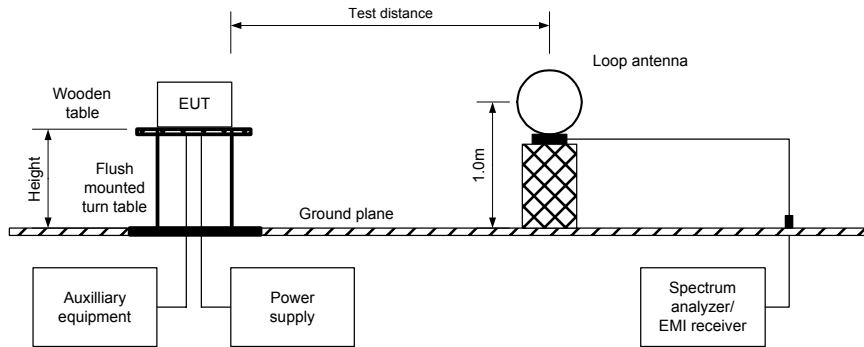


Figure 7.4.2 Setup for spurious emission field strength measurements above 30 MHz



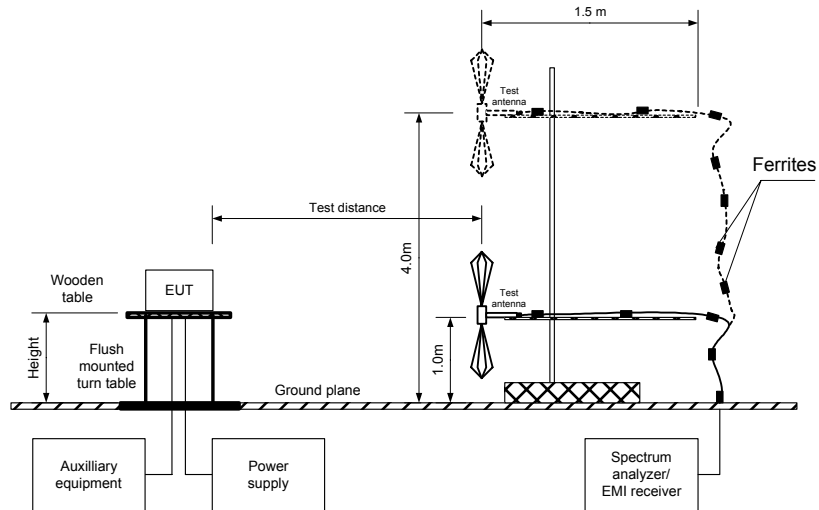

HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Table 7.4.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY RANGE: 902 - 928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 10000 MHz
 TEST DISTANCE: 3 m
 TRANSMITTER OUTPUT POWER: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)
 MODULATION: PSK
 BIT RATE: 120 kbps

Frequency MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
1811.080	64.82	Vert	1.3	350	111.21	46.39	20.0	26.39	Pass
Mid carrier frequency									
1829.990	63.88	Vert	1.3	350	112.71	48.83	20.0	28.83	Pass
High carrier frequency									
1849.470	61.52	Vert	1.3	350	114.19	52.67	20.0	32.67	Pass

MODULATION: FSK
 BIT RATE: 120 kbps

Frequency MHz	Antenna		Azimuth degrees	Peak field strength (VBW=3 MHz)			Average field strength (VBW=1 kHz****)				Verdict
	Polarization	Height m		Measured dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured dB(µV/m)	Calculated dB(µV/m)	Limit, dB(µV/m)	Margin dB***	
External antenna											
No spurious were found										Pass	
Internal antenna											
No spurious were found										Pass	

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions			
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode:	Compliance	Verdict:		PASS	
Date & Time:	2/4/2010 10:05:51 AM				
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery		
Remarks:					

Table 7.4.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 10000 MHz
 TEST DISTANCE: 3 m
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 MODULATION: PSK
 BIT RATE: 120 kbps

frequency MHz	Antenna		Azimuth degrees	Peak field strength(VBW=3 MHz)			Average field strength(VBW=1 kHz****)				Verdict
	Polarization	height m		Measured dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured dB(µV/m)	Calculated dB(µV/m)	Limit, dB(µV/m)	Margin dB***	
Low carrier frequency											
1027.430	Vert	1.0	332	60.72	74.0	-13.28	51.06	19.69	54.0	-34.31	Pass
1435.240	Vert	1.0	332	64.30	74.0	-9.70	49.79	18.42	54.0	-35.58	
3622.220	Vert	1.55	200	59.33	74.0	-14.67	58.33	26.96	54.0	-27.04	
Mid carrier frequency											
1027.950	Vert	1.0	0	60.40	74.0	-13.60	46.1	14.73	54.0	-39.27	Pass
1449.780	Vert	1.0	28	63.11	74.0	-10.89	44.48	13.11	54.0	-40.89	
3659.930	Vert	1.55	200	61.17	74.0	-12.83	59.5	28.13	54.0	-25.87	
High carrier frequency											
1026.180	Vert	1.0	0	60.59	74.0	-13.41	49.08	17.71	54.0	-36.29	Pass
1451.380	Vert	1.0	28	63.02	74.0	-10.98	40.98	9.61	54.0	-44.39	
3698.920	Vert	1.55	200	60.83	74.0	-13.17	58.67	27.3	54.0	-26.70	

MODULATION: FSK
 BIT RATE: 120 kbps

frequency MHz	Antenna		Azimuth degrees	Peak field strength(VBW=3 MHz)			Average field strength(VBW=1 kHz****)				Verdict
	Polarization	height m		Measured dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured dB(µV/m)	Calculated dB(µV/m)	Limit, dB(µV/m)	Margin dB***	
External antenna											
1446.000	Vert	1.0	28	58.10	74.0	-15.90	59.67	33.86	54.0	-20.14	Pass
Internal antenna											
1480.000	Vert	1.0	28	58.27	74.0	-15.73	59.10	33.29	54.0	-20.71	Pass

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Measured field strength - specification limit.
 ***- Margin = Calculated field strength - specification limit,
 where Calculated field strength = Measured field strength + average factor.
 **** - VBW >= 1/T, where T is transmitter ON duration



HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Table 7.4.4 Average factor calculation for DSSS PSK modulation

Transmission pulse		Average factor, dB
Duration, ms	Period, ms	
2.7	418.8	-31.37

Table 7.4.5 Average factor calculation for DSSS FSK modulation

Transmission pulse		Average factor, dB
Duration, ms	Period, ms	
5.12	418.8	-25.81



HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Table 7.4.6 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 1 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 MODULATION: PSK
 BIT RATE: 120 kbps

Frequency MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB				
Low carrier frequency								
405.6475	43.0	39.0	46.0	-7.00	Vert	1.0	120	Pass
407.3449	55.0	15.6	46.0	-30.40	Vert	1.0	0	
608.4587	58.6	39.5	46.0	-6.50	Vert	1.0	206	
970.7085	48.4	41.8	54.0	-12.20	Vert	1.55	14	
Mid carrier frequency								
405.6475	43.2	38.9	46.0	-7.10	Vert	1.0	120	Pass
407.3449	55.0	15.6	46.0	-30.40	Vert	1.0	0	
608.4587	50.2	40.6	46.0	-5.40	Vert	1.0	206	
960.1014	46.6	38.5	54.0	-15.50	Vert	1.6	14	
High carrier frequency								
405.6475	42.8	38.9	46.0	-7.10	Vert	1.0	120	Pass
407.3449	55.0	15.6	46.0	-30.40	Vert	1.0	0	
608.4587	48.0	40.5	46.0	-5.50	Vert	1.0	206	
960.4037	50.2	44.8	54.0	-9.20	Vert	1.55	0	

MODULATION: FSK
 BIT RATE: 120 kbps

Frequency MHz	Antenna		Azimuth degrees	Peak field strength(VBW=3 MHz)			Average field strength(VBW=1 kHz****)				Verdict
	Polarization	Height m		Measured dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured dB(µV/m)	Calculated dB(µV/m)	Limit, dB(µV/m)	Margin dB***	
External antenna											
All spurious were found at least 20 dB below the specified limit											Pass
Internal antenna											
All spurious were found at least 20 dB below the specified limit											Pass

*- Margin = Measured emission - specification limit.
 **- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Table 7.4.7 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

EUT Operational modes overview:

Modulation technique	Low frequency	Mid frequency	High frequency
Direct-Sequence Spread Spectrum (DSSS PSK)	905.55	915.00	924.75
Direct-Sequence Spread Spectrum (DSSS FSK)	NA	916.3	NA

Harmonic distribution:

Harmonic #	Low carrier, MHz	Mid carrier, MHz	High carrier, MHz
1	905.55	915.00	924.75
2	1811.10	1830.00	1849.50
3	2716.65	2745.00	2774.25
4	3622.20	3660.00	3699.00
5	4527.75	4575.00	4623.75
6	5433.30	5490.00	5548.50
7	6338.85	6405.00	6473.25
8	7244.40	7320.00	7398.00
9	8149.95	8235.00	8322.75
10	9055.50	9150.00	9247.50

Legend:

Outside restricted band harmonic
Within restricted band harmonic

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 1424	HL 1984	HL 2909	HL 2870	HL 2871
HL 3616	HL 3883						

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
MODULATION: PSK
OPERATIONAL MODE: DSSS
ANTENNA: External

23:08:41 JAN 25, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 905.545 MHz
111.21 dBµV/m

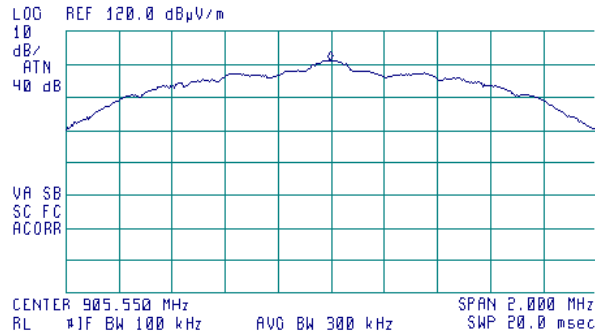




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
MODULATION: PSK
OPERATIONAL MODE: DSSS
ANTENNA: External


23:11:26 JAN 25, 2010

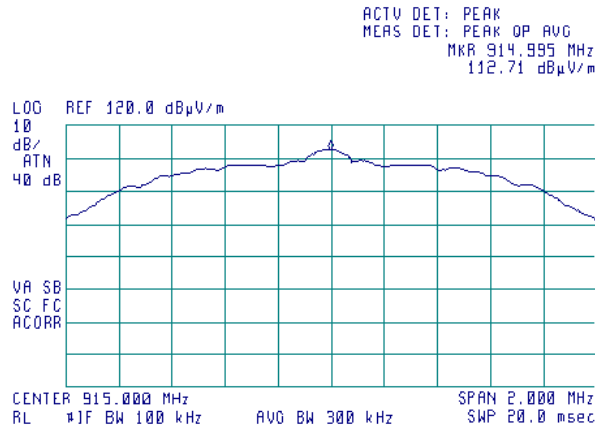

Plot 7.4.3 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
MODULATION: PSK
OPERATIONAL MODE: DSSS
ANTENNA: External

23:15:00 JAN 25, 2010

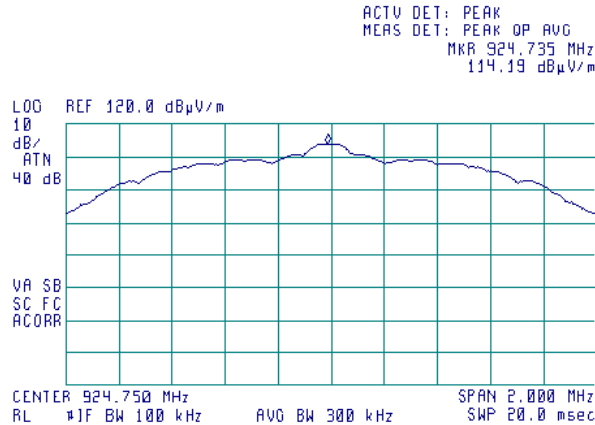




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.4 Radiated emission measurements at the carrier frequency 916.3 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
MODULATION: FSK
ANTENNA: External
OPERATIONAL MODE: DSSS


23:16:39 JAN 25, 2010

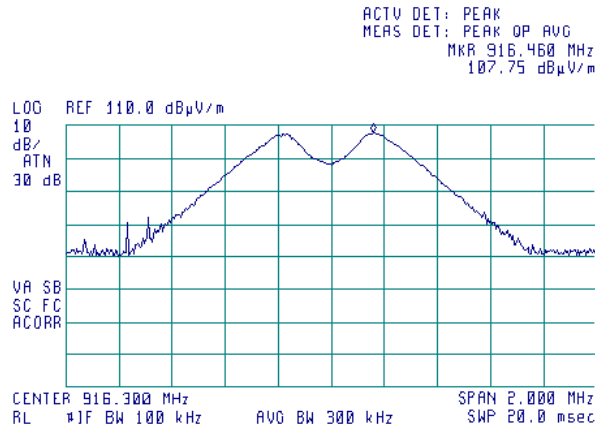

Plot 7.4.5 Radiated emission measurements at the mid carrier frequency 916.3 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
MODULATION: FSK
ANTENNA: Internal
OPERATIONAL MODE: DSSS

23:21:48 JAN 25, 2010

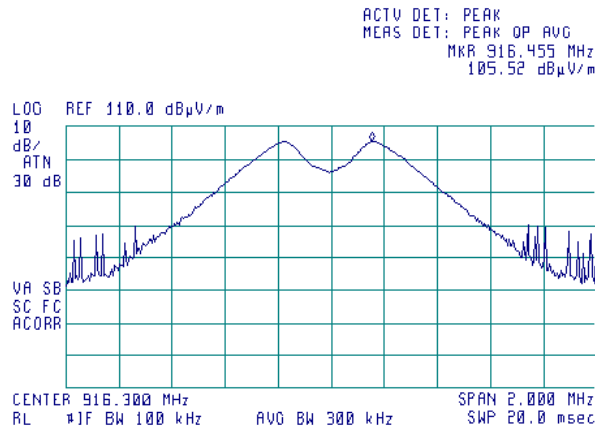



HERMON LABORATORIES


Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.6 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: DSSS PSK

00:00:32 JAN 27, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 15.8 kHz
 76.73 dBµV/m

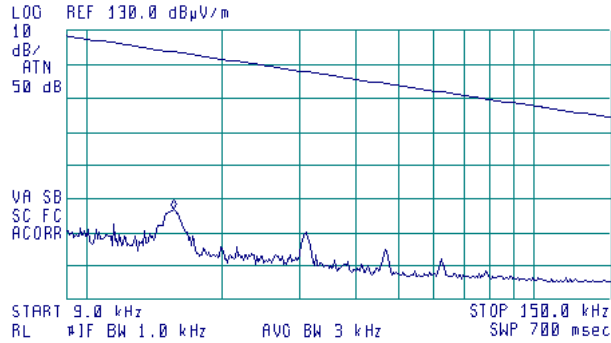


Plot 7.4.7 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: DSSS PSK

23:55:28 JAN 26, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 15.4 kHz
 76.57 dBµV/m

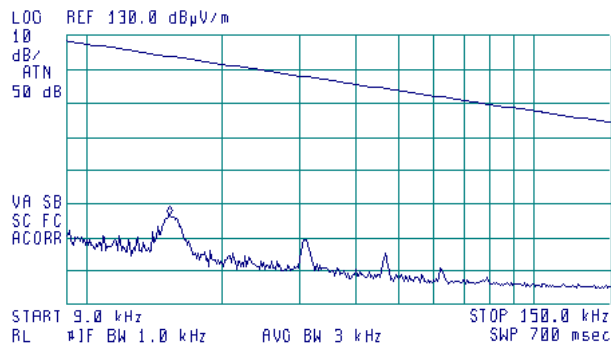



HERMON LABORATORIES


Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.8 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: DSSS PSK

23:53:49 JAN 26, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 15.4 kHz
77.21 dBµV/m

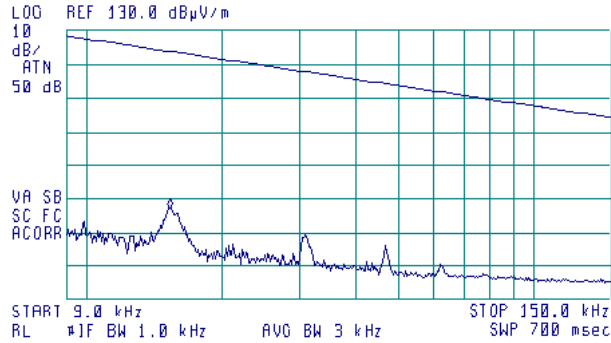


Plot 7.4.9 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: DSSS PSK

23:58:46 JAN 26, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 160 kHz
57.04 dBµV/m

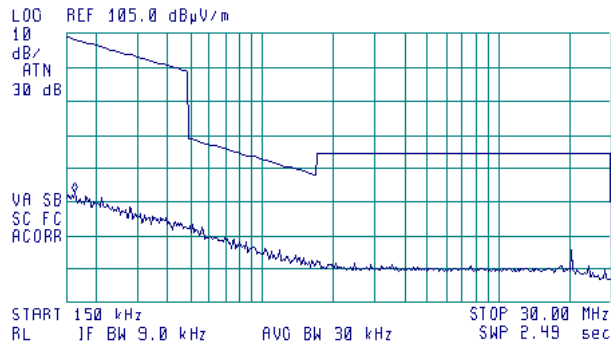



HERMON LABORATORIES


Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.10 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: DSSS PSK

23:57:01 JAN 26, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 160 kHz
57.91 dBµV/m

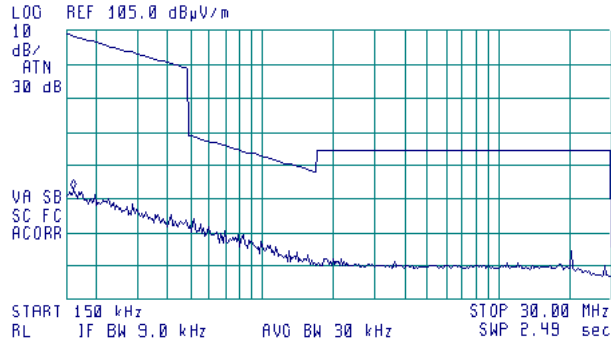


Plot 7.4.11 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: DSSS PSK

23:52:06 JAN 26, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 150 kHz
57.35 dBµV/m

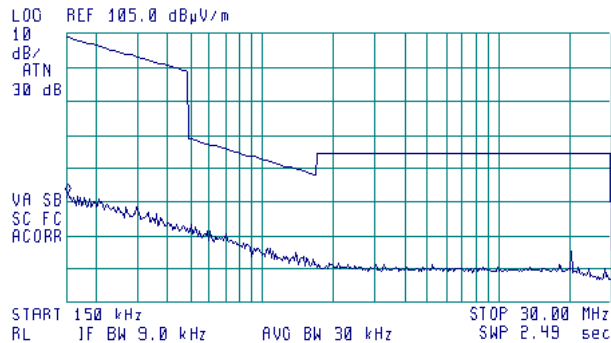




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.12 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK

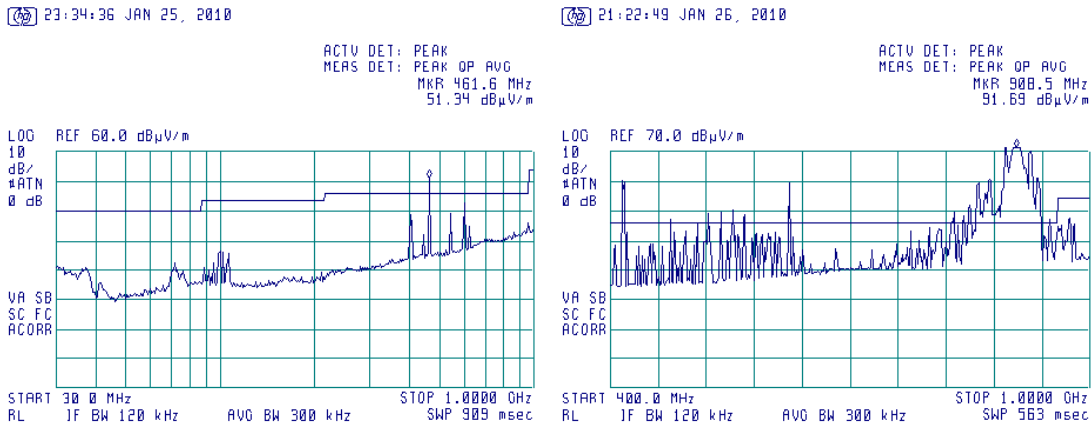

Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 905.55 MHz

Plot 7.4.13 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK

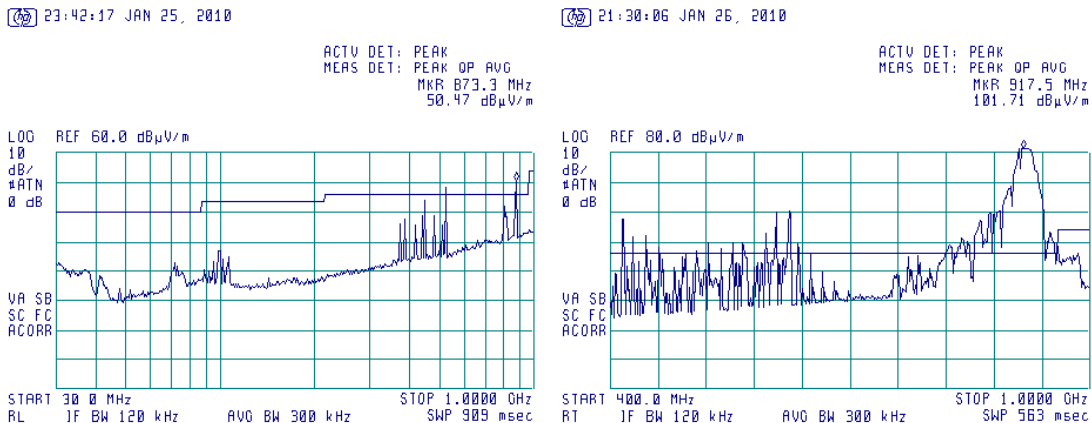

Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 915 MHz



HERMON LABORATORIES



Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.14 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK

23:46:39 JAN 25, 2010

21:37:33 JAN 26, 2010

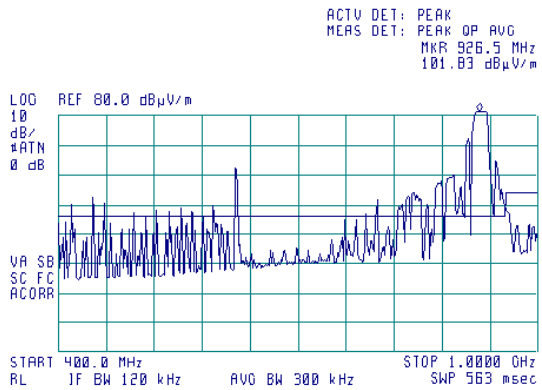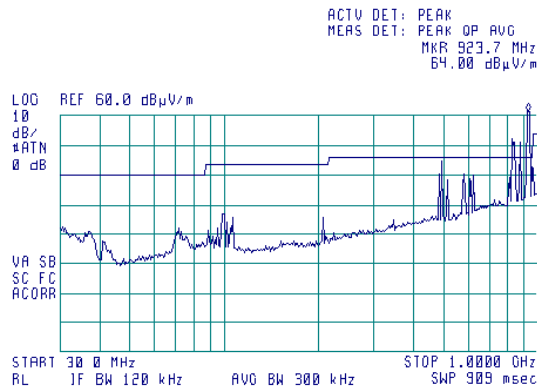

Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 924.75 MHz




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.15 Radiated emission measurements from 1000 to 2900 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak


16:17:14 JAN 21, 2010

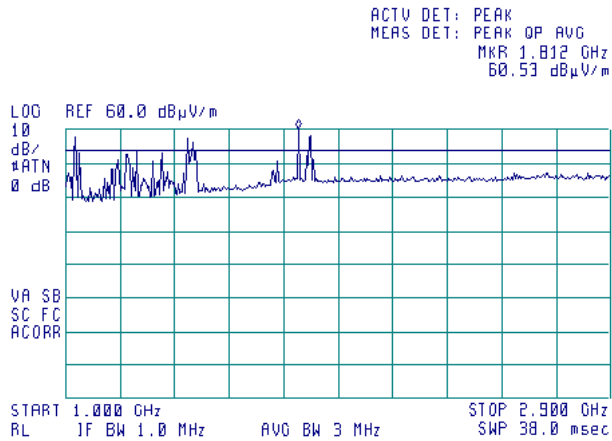

Plot 7.4.16 Radiated emission measurements from 1000 to 2900 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

16:26:14 JAN 21, 2010

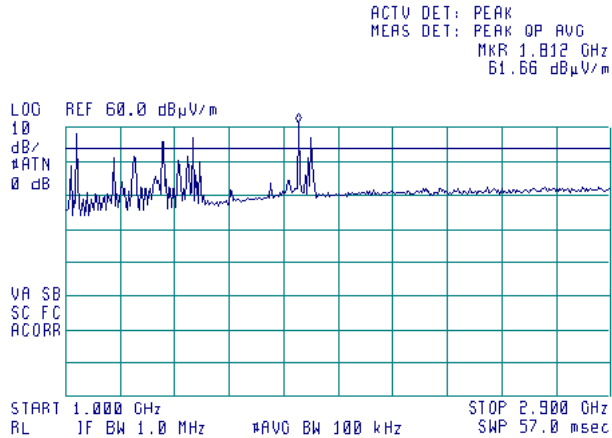



HERMON LABORATORIES


Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.17 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak

16:41:59 JAN 21, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 1.831 GHz
 61.73 dBμV/m

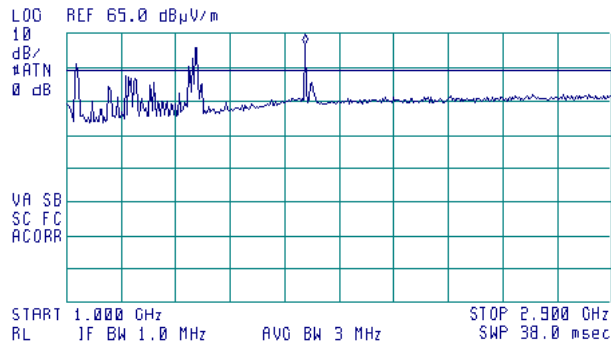


Plot 7.4.18 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

16:35:34 JAN 21, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 1.447 GHz
 61.15 dBμV/m

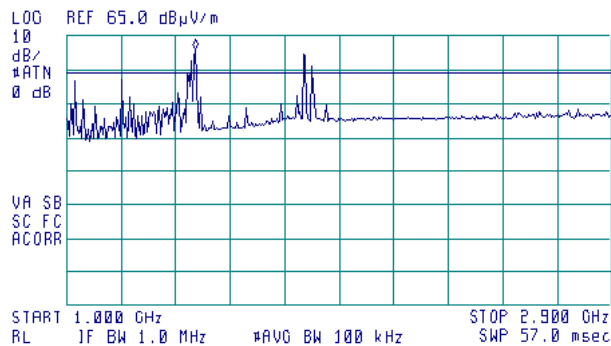



HERMON LABORATORIES


Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.19 Radiated emission measurements from 1000 to 2900 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak

16:50:39 JAN 21, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 1.850 GHz
 62.15 dBμV/m

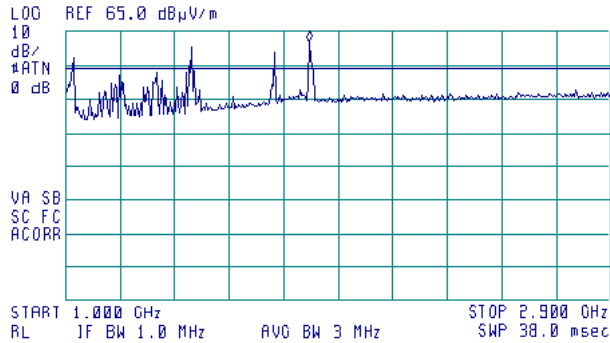


Plot 7.4.20 Radiated emission measurements from 1000 to 2900 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

16:50:50 JAN 21, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 1.451 GHz
 60.20 dBμV/m

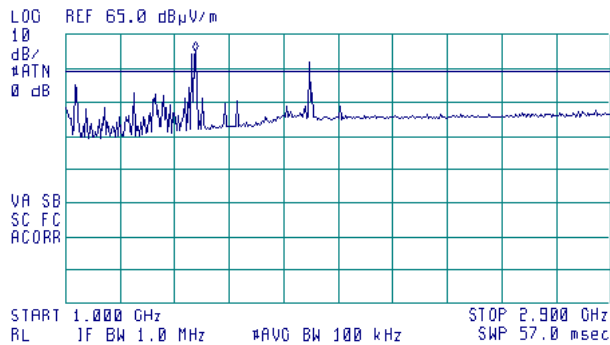




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.21 Radiated emission measurements at 1.030 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak


00:36:23 JAN 25, 2010

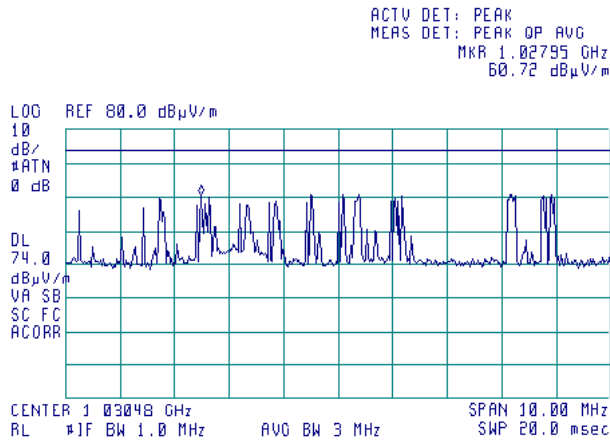

Plot 7.4.22 Radiated emission measurements at 1.030 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

00:38:16 JAN 25, 2010

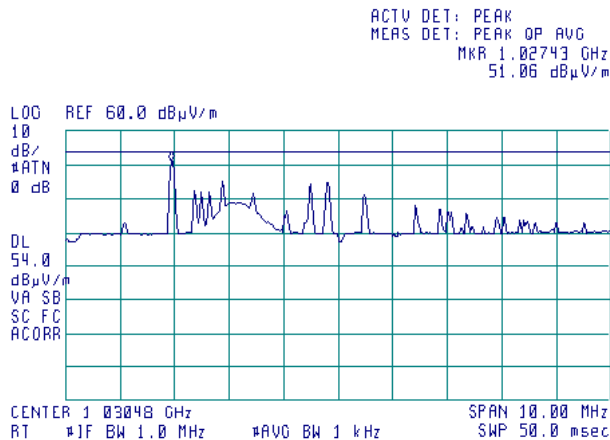



HERMON LABORATORIES


Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.23 Radiated emission measurements at 1.442 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak

23:31:09 JAN 24, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 1.43646 GHz
 64.30 dBμV/m

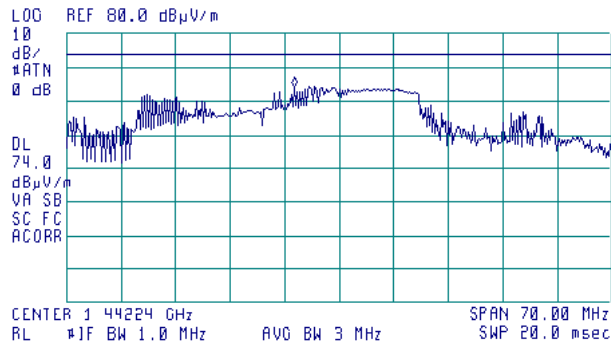


Plot 7.4.24 Radiated emission measurements at 1.442 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

23:35:44 JAN 24, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 1.43524 GHz
 49.79 dBμV/m

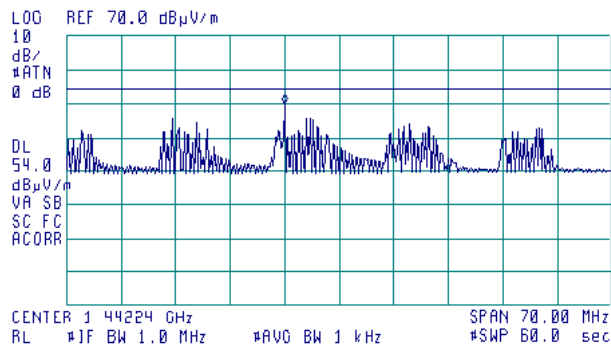




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.25 Radiated emission measurements at 1.03 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak


18:24:58 JAN 25, 2010

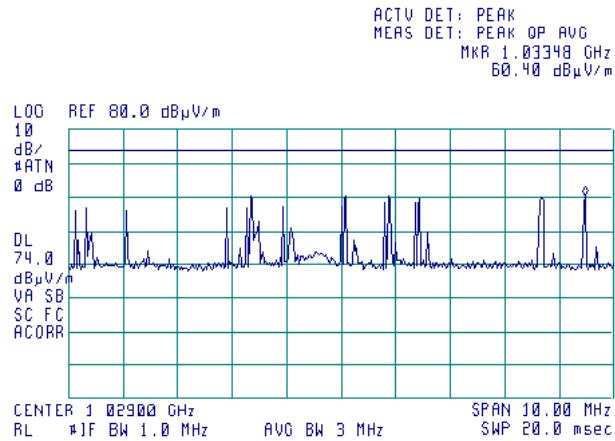

Plot 7.4.26 Radiated emission measurements at 1.03 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

18:23:45 JAN 25, 2010

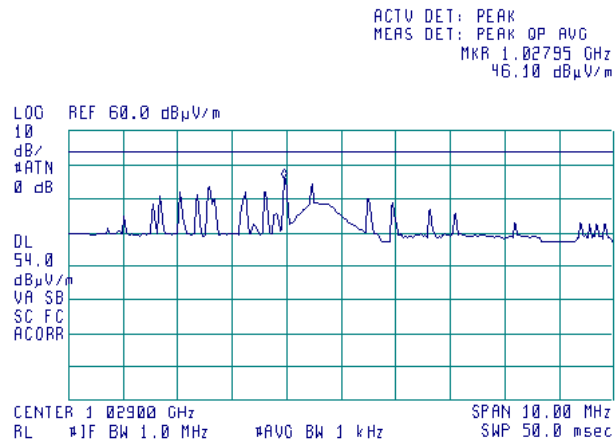




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.27 Radiated emission measurements at 1.448 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: DSSS PSK
DETECTOR: Peak


00:10:51 JAN 25, 2010

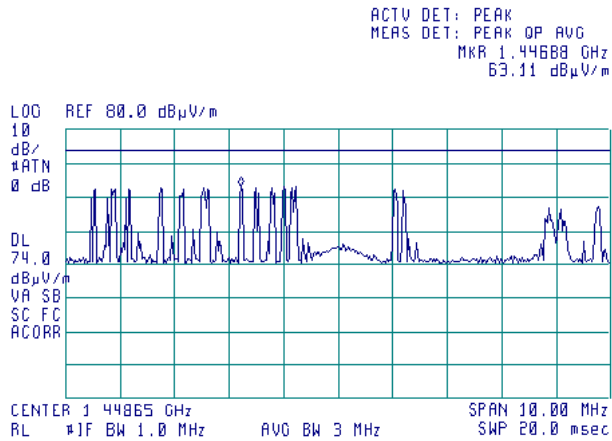

Plot 7.4.28 Radiated emission measurements at 1.448 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: DSSS PSK
DETECTOR: Average

00:09:04 JAN 25, 2010

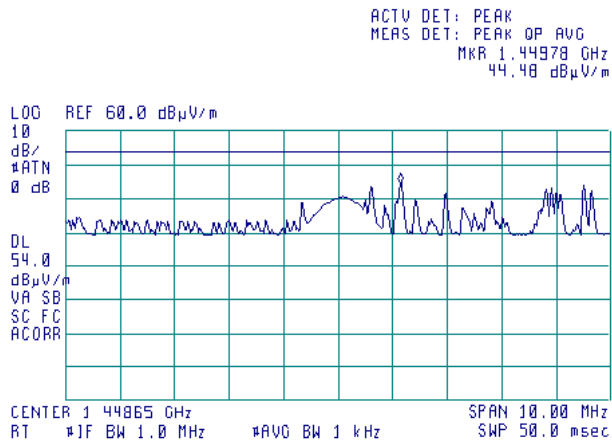




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.29 Radiated emission measurements at 1.029 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak


18:18:21 JAN 25, 2010

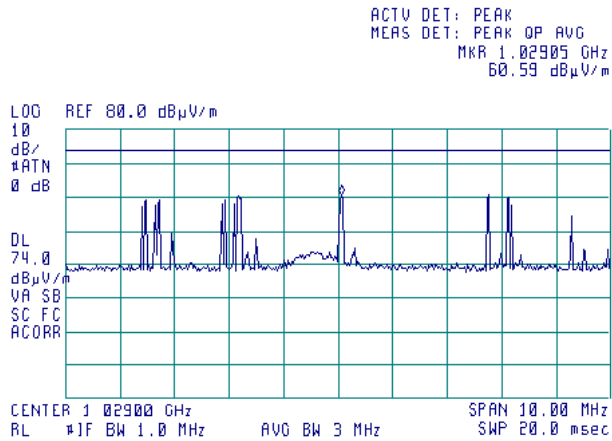

Plot 7.4.30 Radiated emission measurements at 1.029 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

18:21:57 JAN 25, 2010

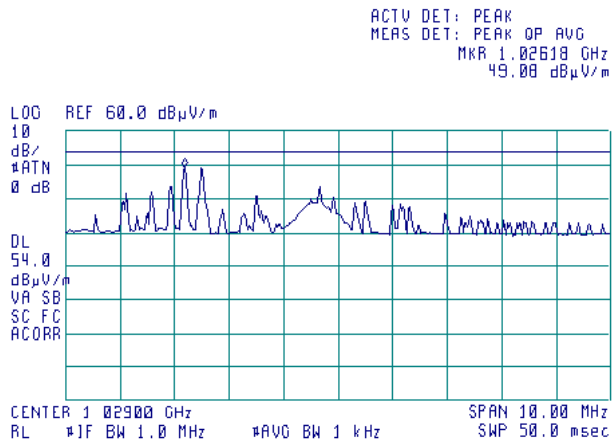




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.31 Radiated emission measurements at 1.442 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak


00:14:02 JAN 25, 2010

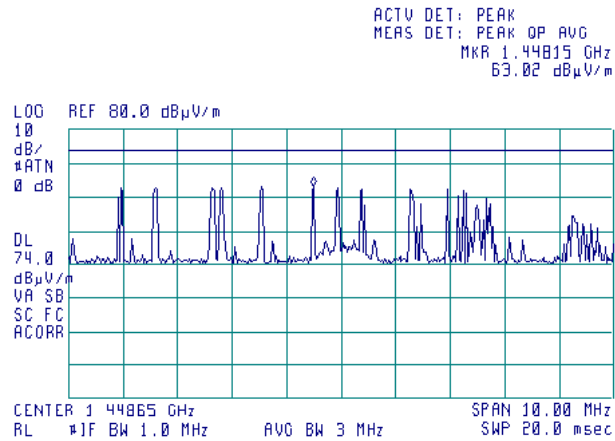

Plot 7.4.32 Radiated emission measurements at 1.442 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

00:15:32 JAN 25, 2010

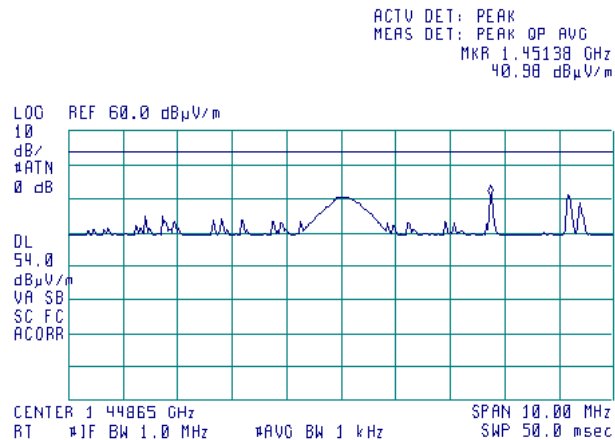




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.33 Radiated emission measurements from 2900 to 6000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK

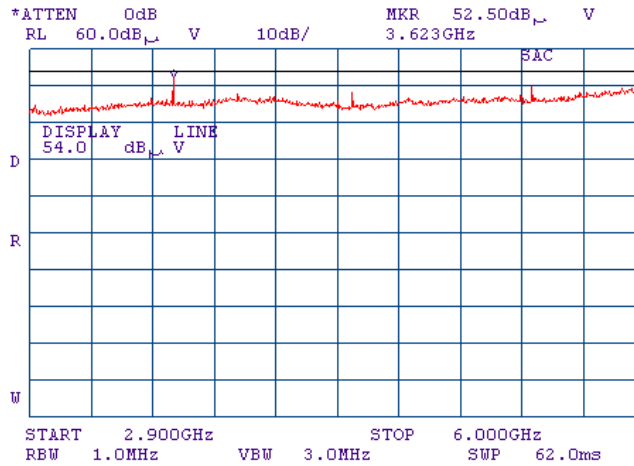

Plot 7.4.34 Radiated emission measurements from 2900 to 6000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK

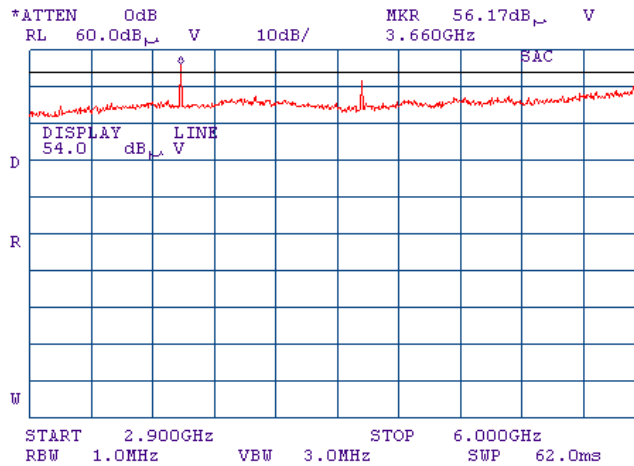




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.35 Radiated emission measurements from 2900 to 6000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK

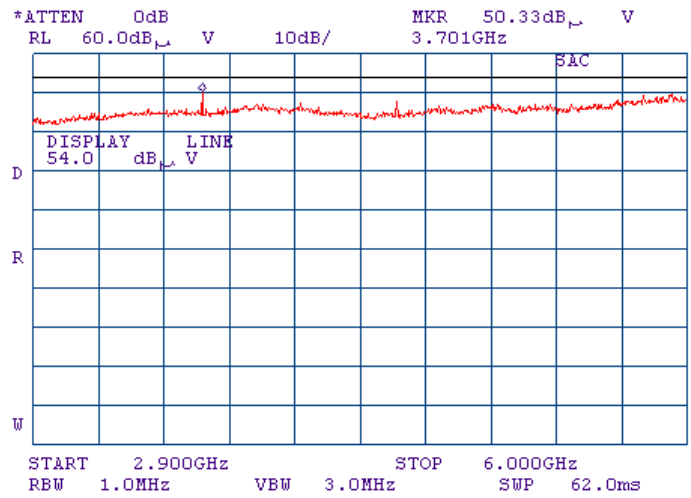




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.36 Radiated emission measurements from 6000 to 8000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak

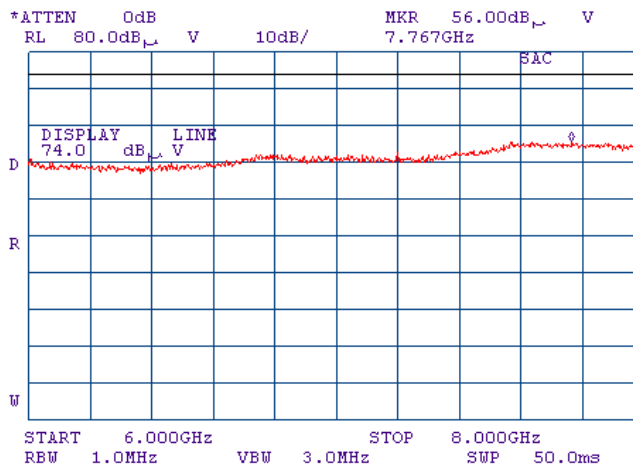

Plot 7.4.37 Radiated emission measurements from 6000 to 8000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

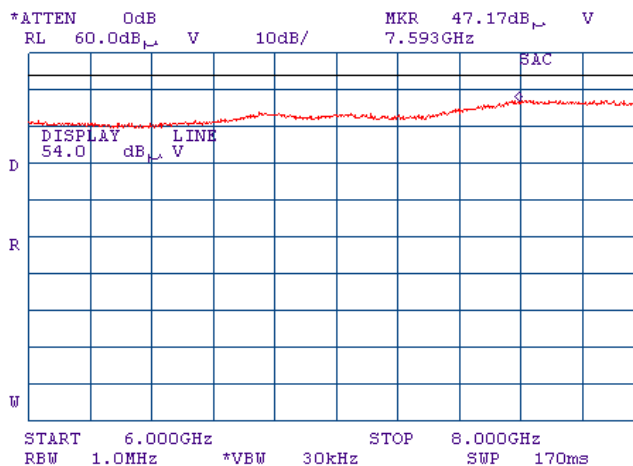




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.38 Radiated emission measurements from 6000 to 8000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak

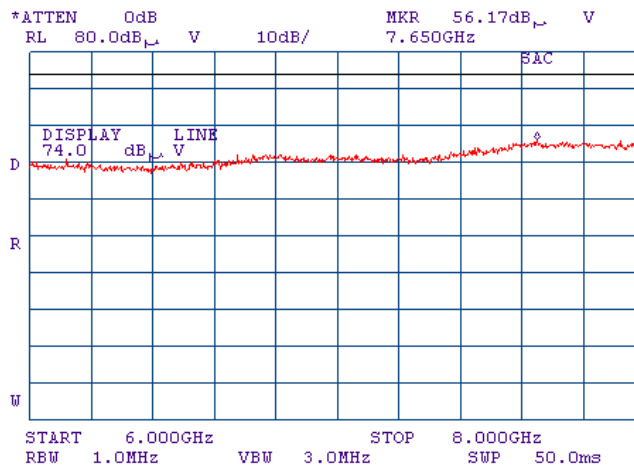

Plot 7.4.39 Radiated emission measurements from 6000 to 8000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

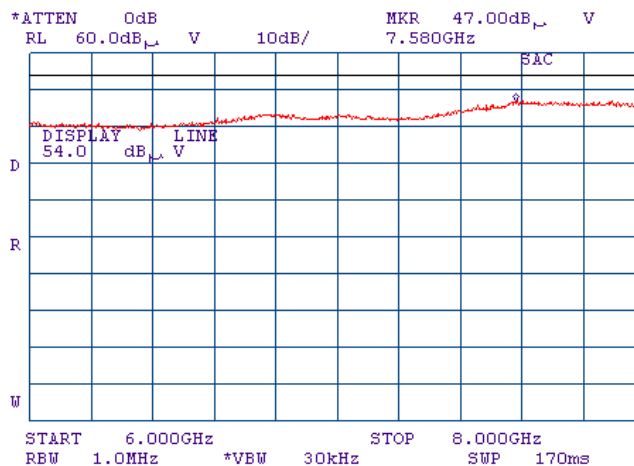




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.40 Radiated emission measurements from 6000 to 8000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak

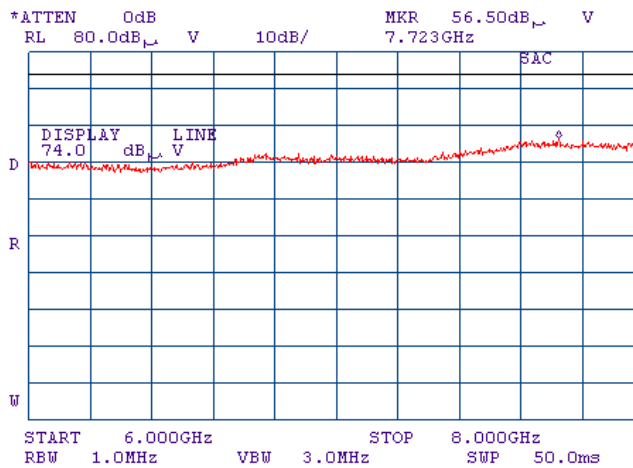

Plot 7.4.41 Radiated emission measurements from 6000 to 8000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

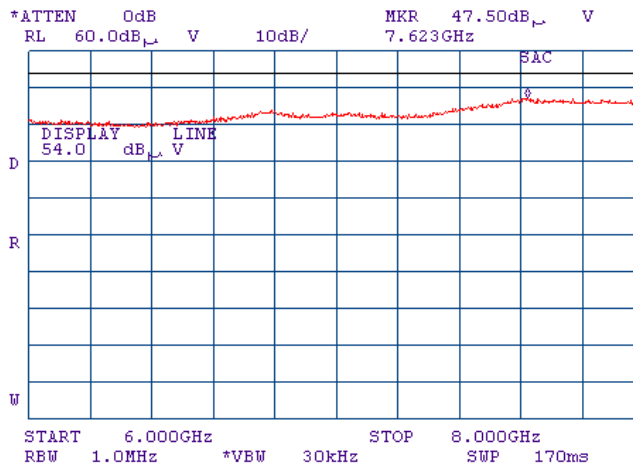




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.42 Radiated emission measurements from 8000 to 10000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak

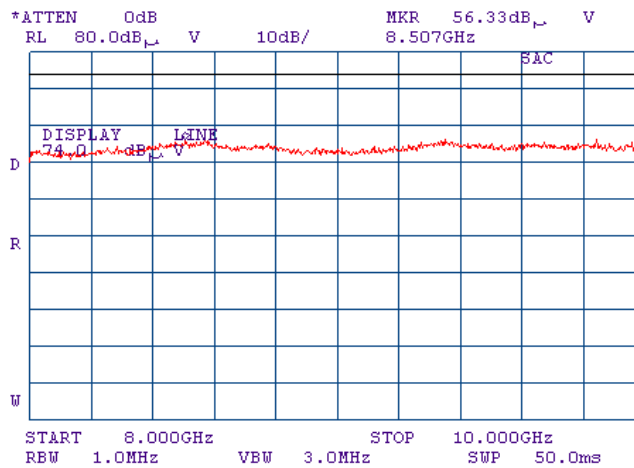

Plot 7.4.43 Radiated emission measurements from 8000 to 10000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

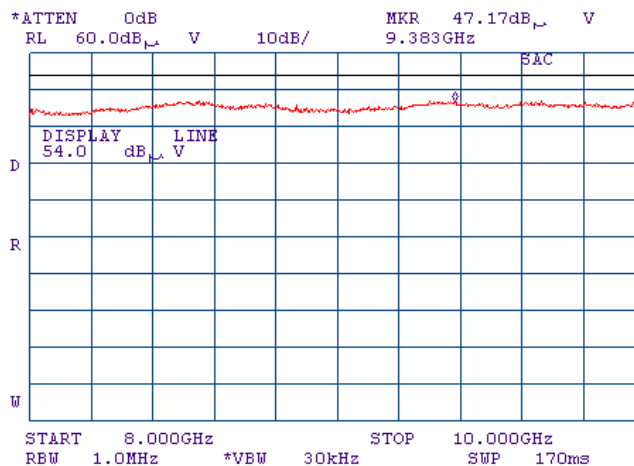




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.44 Radiated emission measurements from 8000 to 10000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak

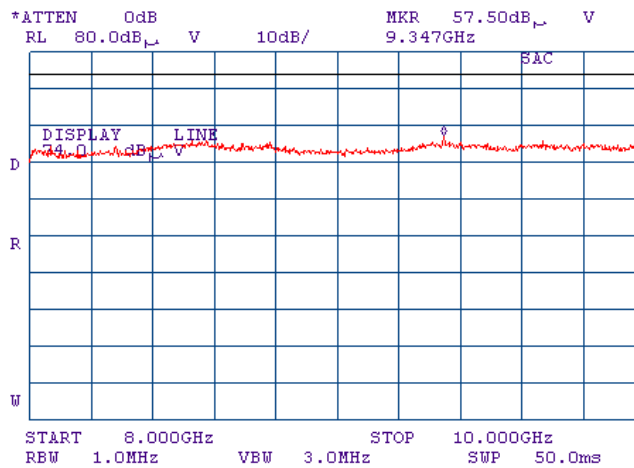

Plot 7.4.45 Radiated emission measurements from 8000 to 10000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

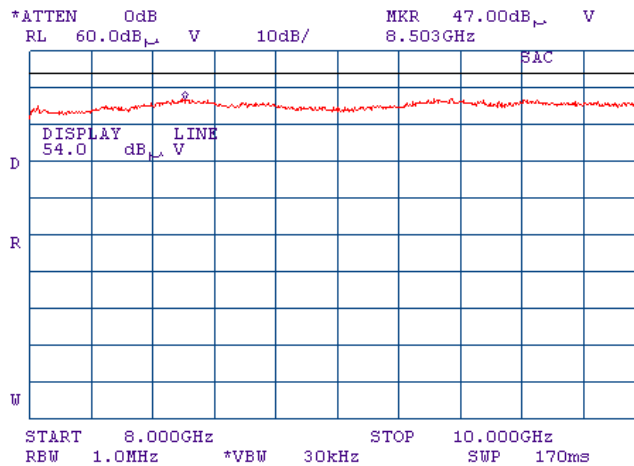




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.46 Radiated emission measurements from 8000 to 10000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Peak

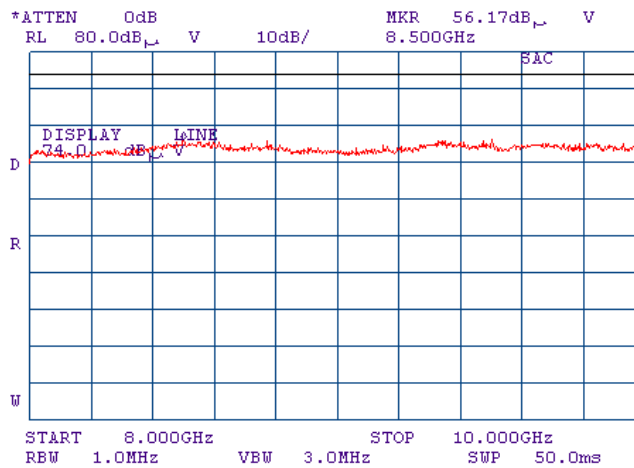

Plot 7.4.47 Radiated emission measurements from 8000 to 10000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS PSK
 DETECTOR: Average

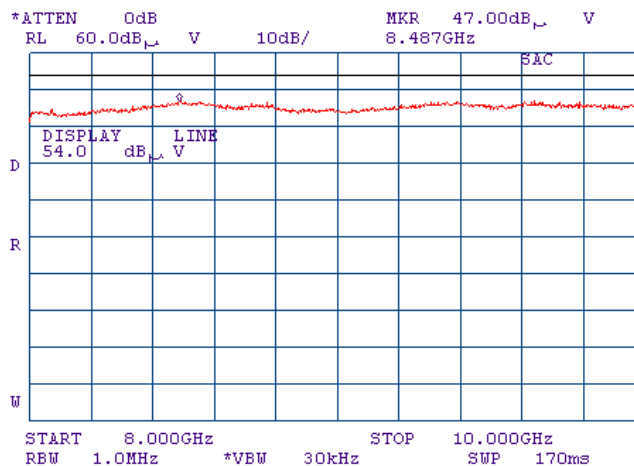




HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.48 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: External


00:02:27 JAN 27, 2010

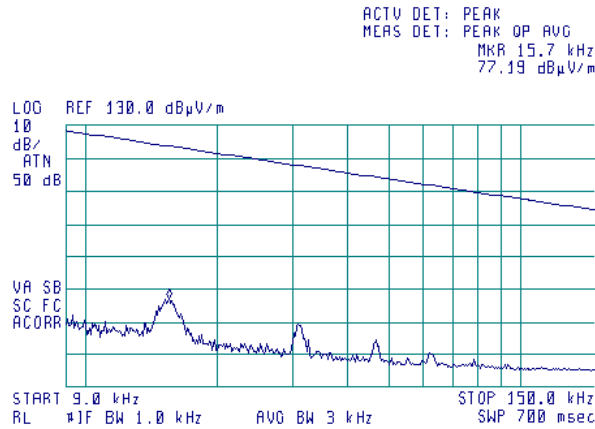

Plot 7.4.49 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: External

00:03:55 JAN 27, 2010

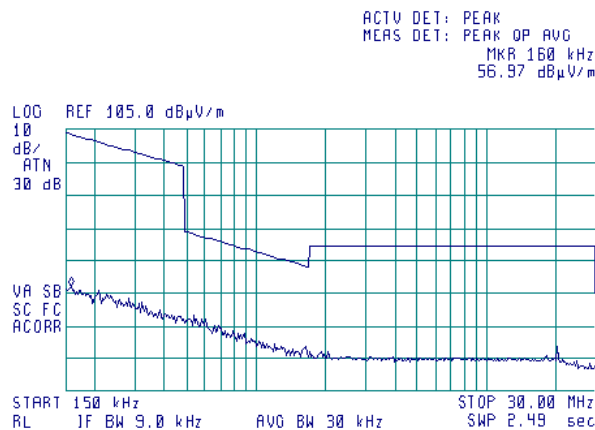




HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.50 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: DSSS
MODULATION: FSK
ANTENNA: External

22:16:52 JAN 25, 2010

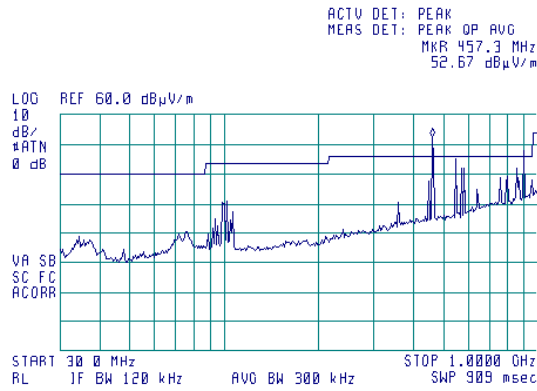

21:13:20 JAN 26, 2010

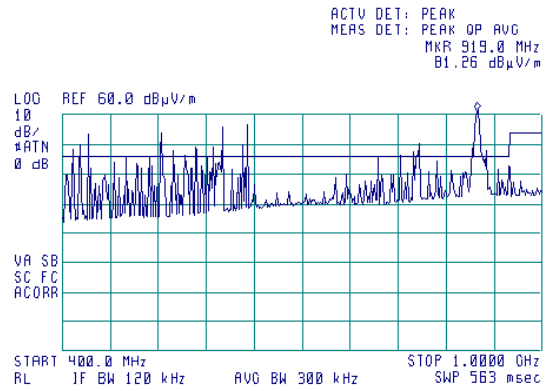




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.51 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: DSSS
MODULATION: FSK
ANTENNA: External
DETECTOR: Peak


16:00:44 JAN 21, 2010

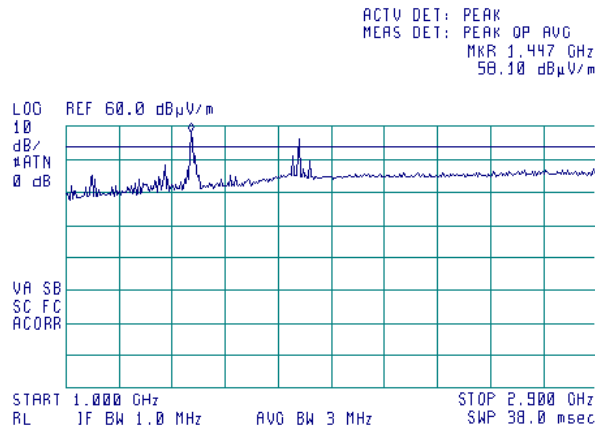

Plot 7.4.52 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: DSSS
MODULATION: FSK
ANTENNA: External
DETECTOR: Average

18:36:34 JAN 21, 2010

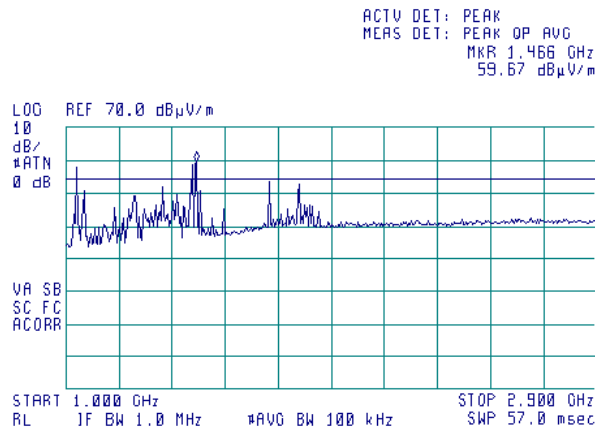




HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.53 Radiated emission measurements from 2900 to 6000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: External

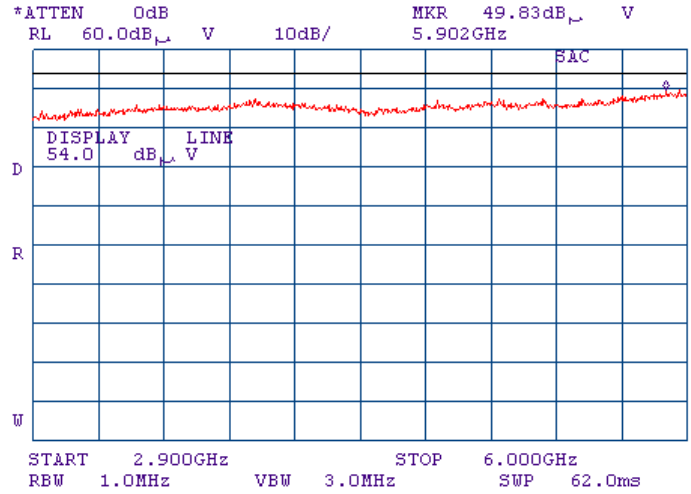




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.54 Radiated emission measurements from 6000 to 8000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: External
 DETECTOR: Peak

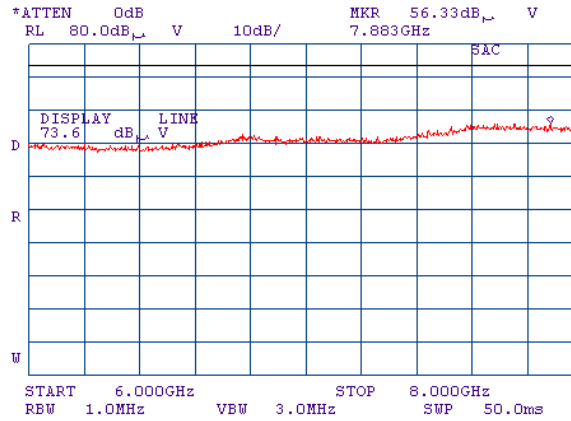

Plot 7.4.55 Radiated emission measurements from 6000 to 8000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: External
 DETECTOR: Average

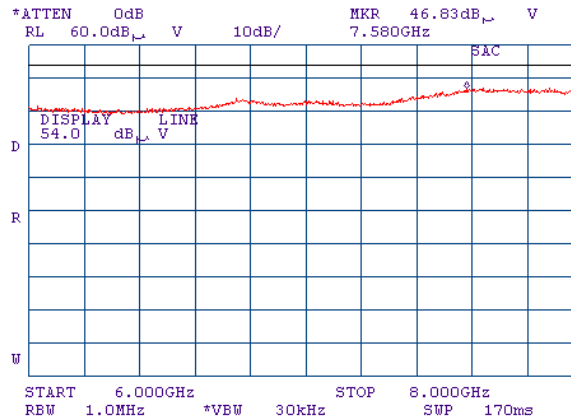




HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.56 Radiated emission measurements from 8000 to 10000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: External
 DETECTOR: Peak

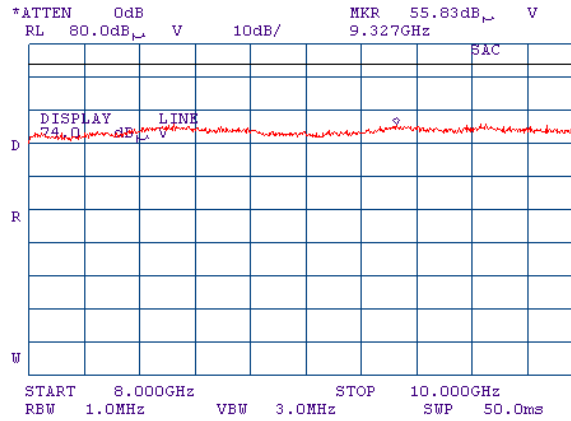

Plot 7.4.57 Radiated emission measurements from 8000 to 10000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: External
 DETECTOR: Average

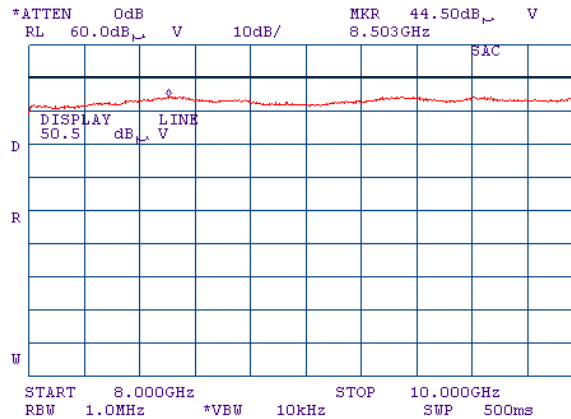




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.58 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal


00:07:31 JAN 27, 2010

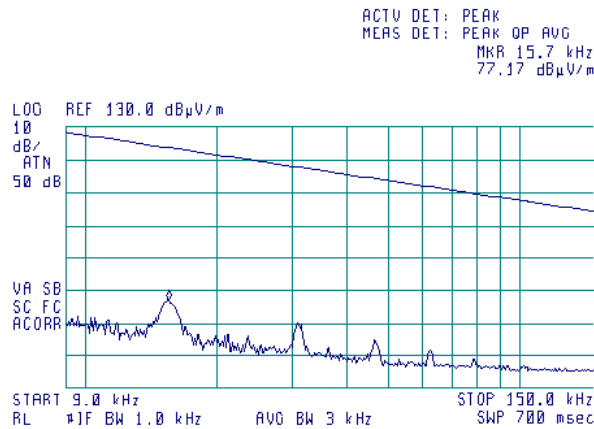

Plot 7.4.59 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal

00:05:44 JAN 27, 2010

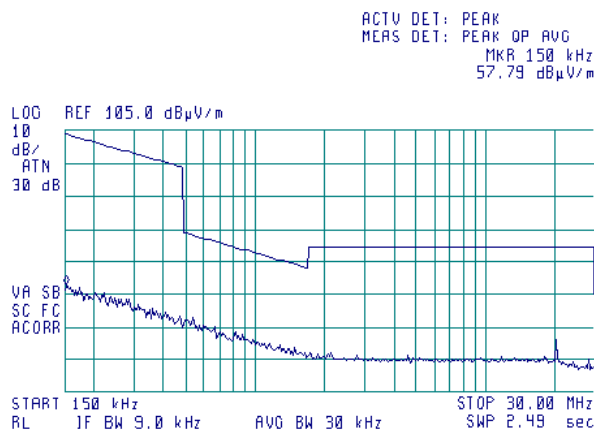



HERMON LABORATORIES



Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.60 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: DSSS
MODULATION: FSK
ANTENNA: Internal

22:12:24 JAN 25, 2010

21:08:40 JAN 25, 2010

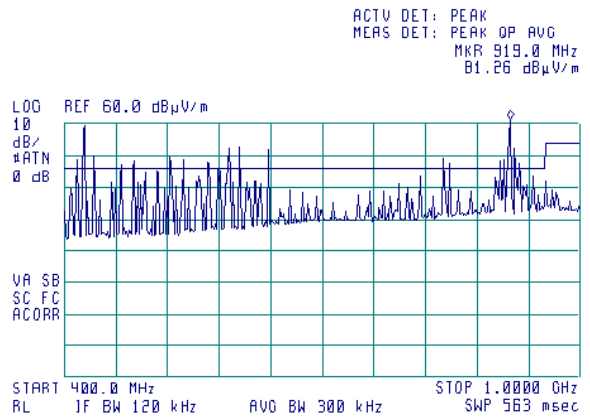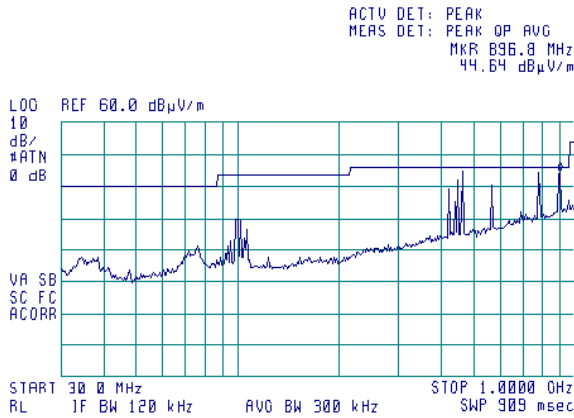




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.61 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: DSSS
MODULATION: FSK
ANTENNA: Internal
DETECTOR: Peak


16:08:48 JAN 21, 2010

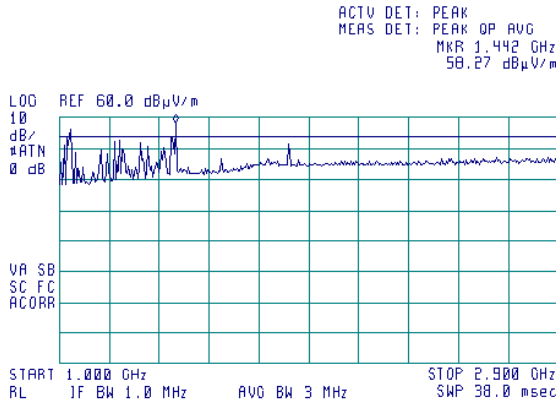

Plot 7.4.62 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: DSSS
MODULATION: FSK
ANTENNA: Internal
DETECTOR: Average

18:29:02 JAN 21, 2010

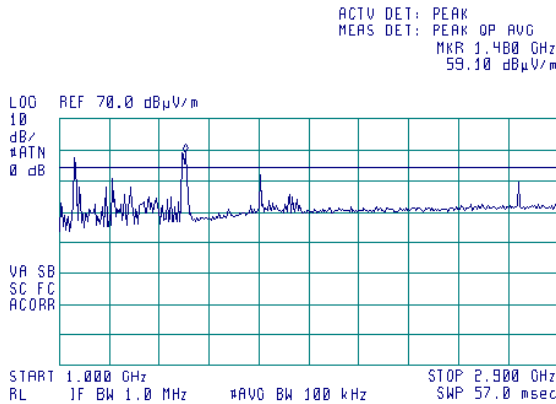




HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.63 Radiated emission measurements from 2900 to 6000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal

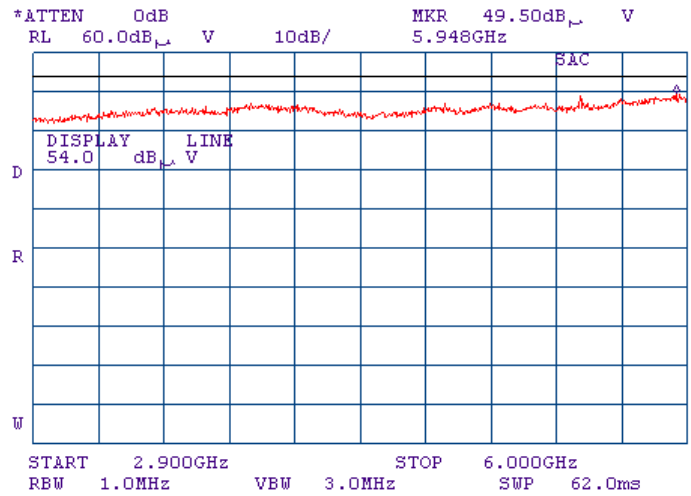




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.64 Radiated emission measurements from 6000 to 8000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: DSSS
DETECTOR: Peak
MODULATION: FSK
ANTENNA: Internal

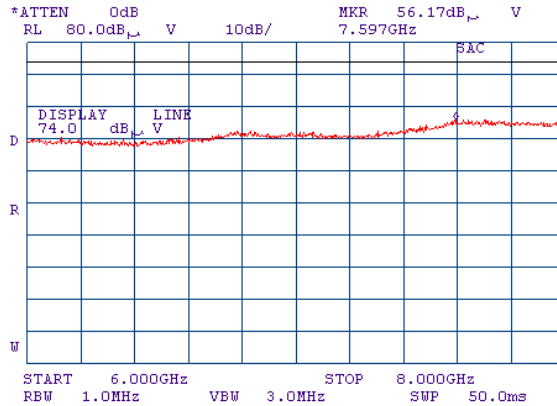

Plot 7.4.65 Radiated emission measurements from 6000 to 8000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: DSSS
DETECTOR: Average
MODULATION: FSK
ANTENNA: Internal

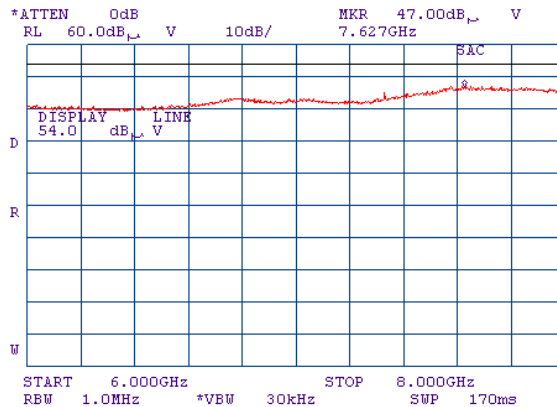




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.66 Radiated emission measurements from 8000 to 10000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS
 DETECTOR: Peak
 MODULATION: FSK
 ANTENNA: Internal

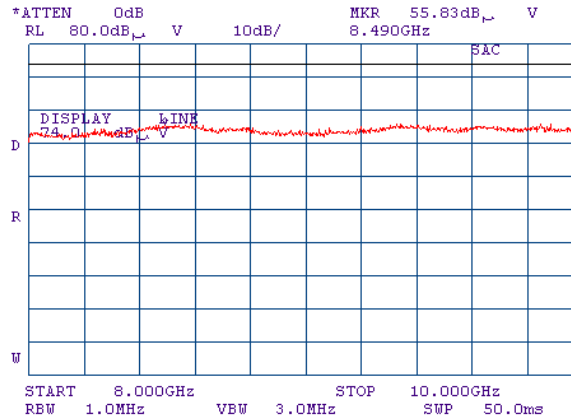

Plot 7.4.67 Radiated emission measurements from 8000 to 10000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: DSSS
 DETECTOR: Average
 MODULATION: FSK
 ANTENNA: Internal

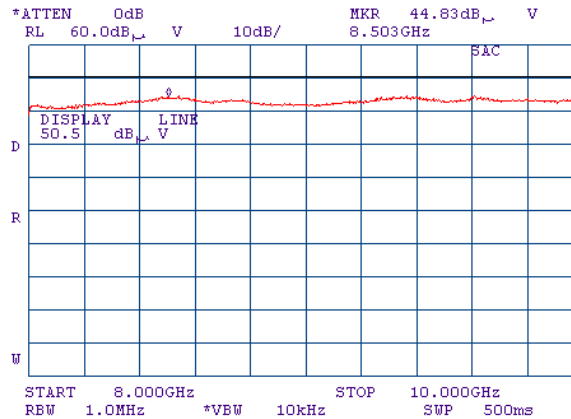




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.68 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Semi-Anechoic chamber
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External


21:16:40 JAN 24, 2010

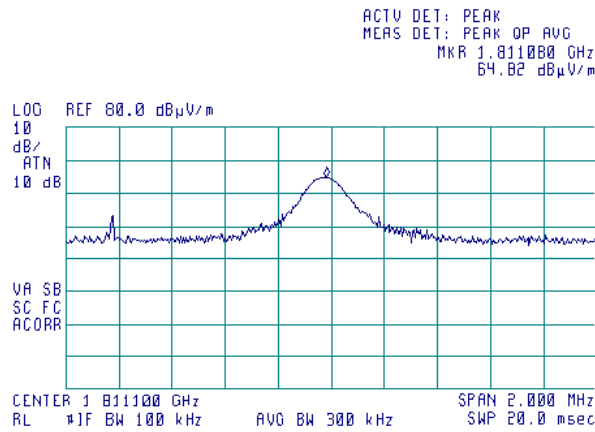

Plot 7.4.69 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Semi-Anechoic chamber
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External

21:20:32 JAN 24, 2010

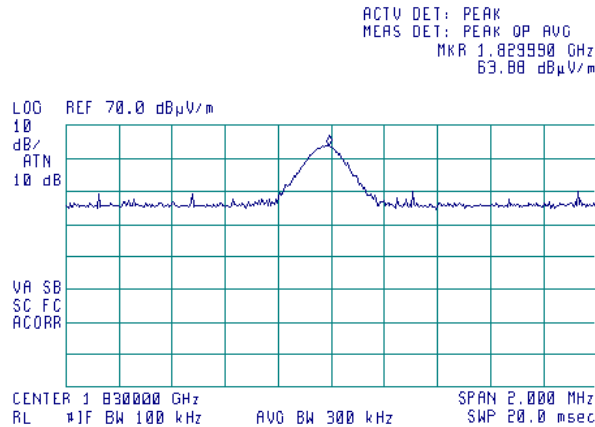



HERMON LABORATORIES


Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.70 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: Semi-Anechoic chamber
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External

21:23:49 JAN 24, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 1.849470 GHz
 61.52 dBµV/m

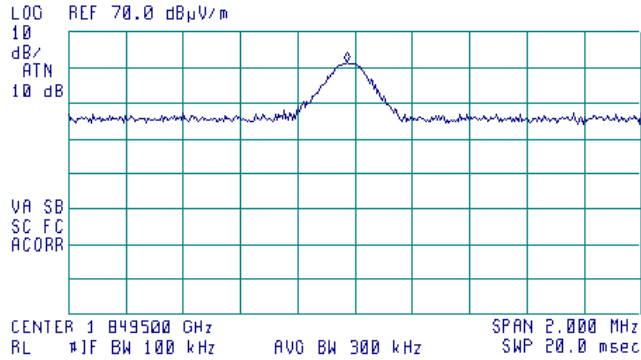




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions	
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode: Compliance	Verdict: PASS
Date & Time: 2/4/2010 10:05:51 AM	
Temperature: 23.2 °C	Air Pressure: 1023 hPa
Relative Humidity: 49 %	Power Supply: Battery
Remarks:	


Plot 7.4.71 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Peak

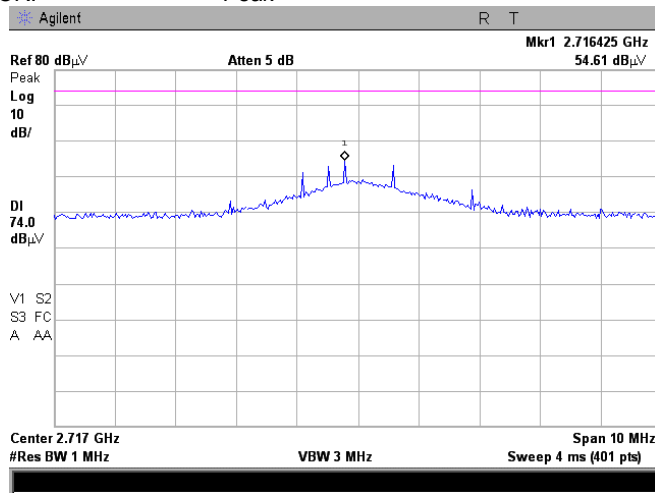

Plot 7.4.72 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Average

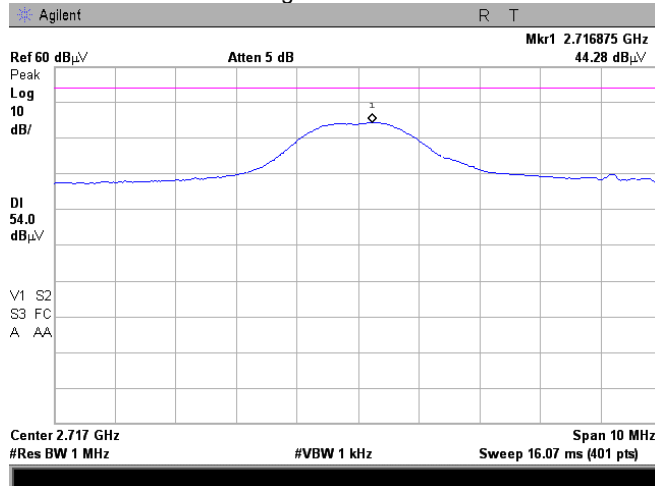




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions	
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode: Compliance	Verdict: PASS
Date & Time: 2/4/2010 10:05:51 AM	
Temperature: 23.2 °C	Air Pressure: 1023 hPa
Relative Humidity: 49 %	Power Supply: Battery
Remarks:	


Plot 7.4.73 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Peak

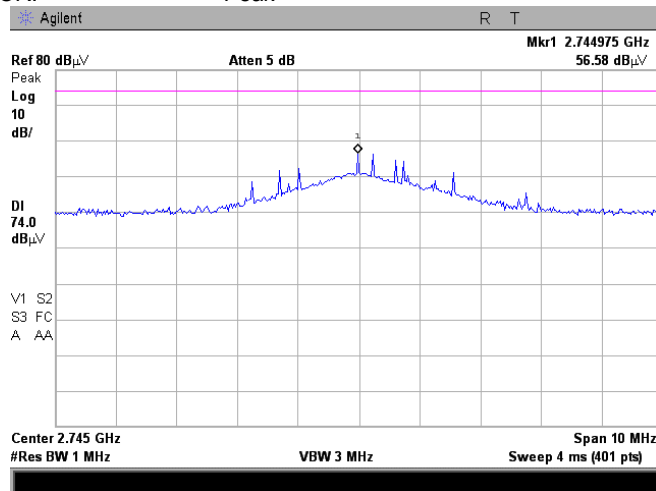

Plot 7.4.74 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Average

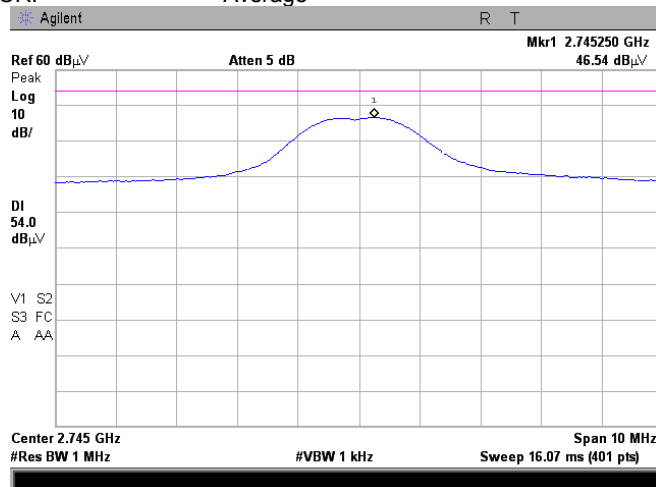




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions	
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode: Compliance	Verdict: PASS
Date & Time: 2/4/2010 10:05:51 AM	
Temperature: 23.2 °C	Air Pressure: 1023 hPa
Relative Humidity: 49 %	Power Supply: Battery
Remarks:	


Plot 7.4.75 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Peak

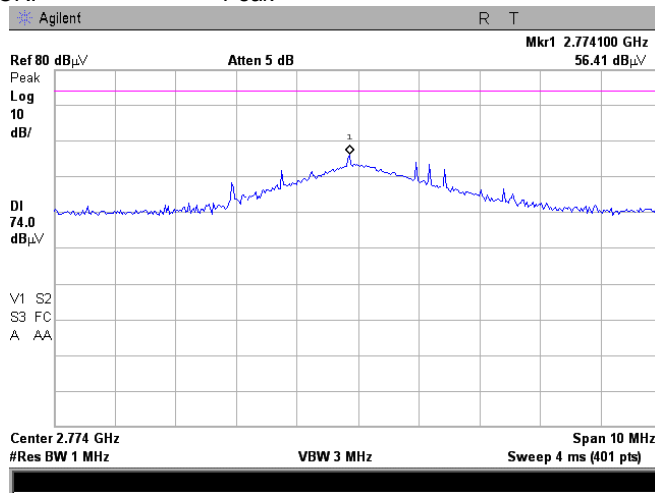

Plot 7.4.76 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Average

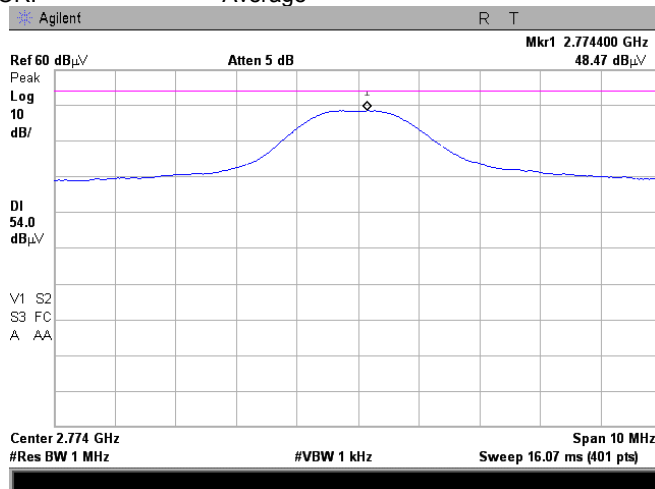




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.77 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Peak

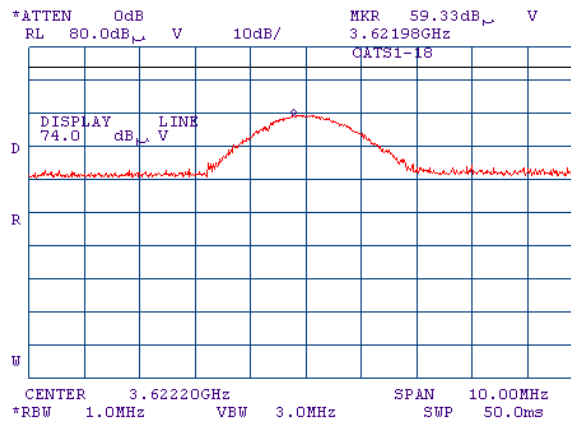

Plot 7.4.78 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Average

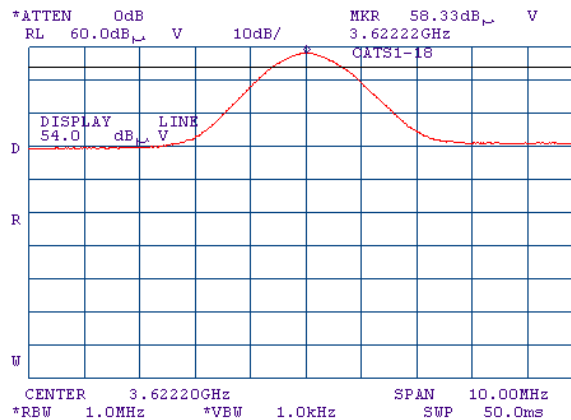




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.79 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Peak

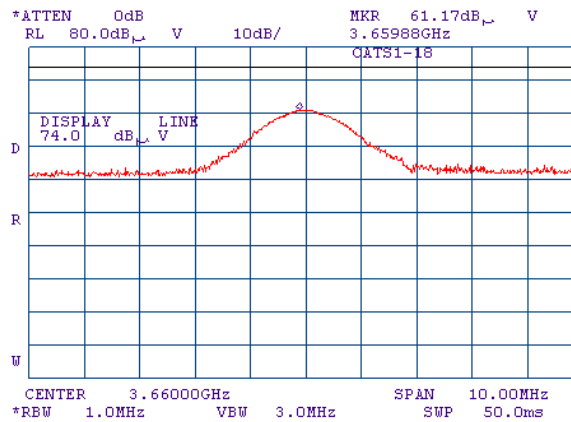

Plot 7.4.80 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Average

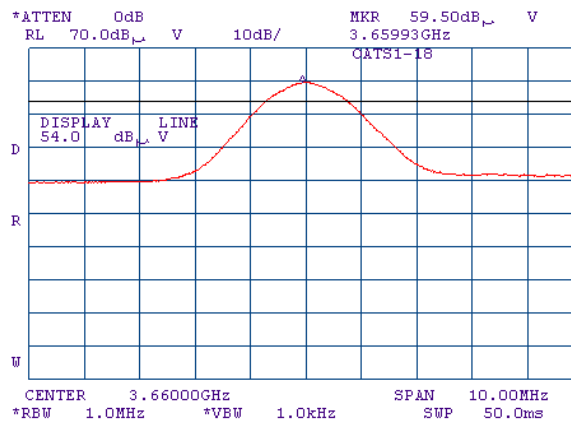




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.81 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: DSSS
MODULATION: PSK
ANTENNA: External
DETECTOR: Peak

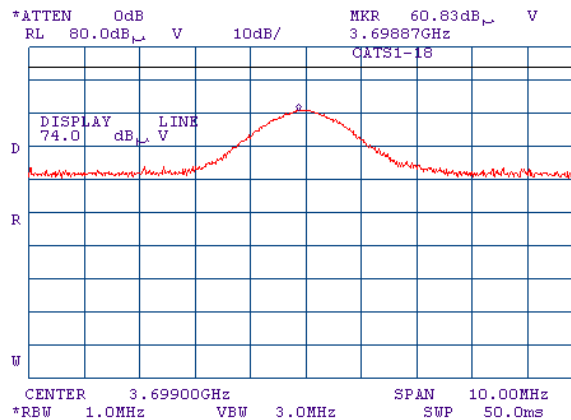

Plot 7.4.82 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: DSSS
MODULATION: PSK
ANTENNA: External
DETECTOR: Average

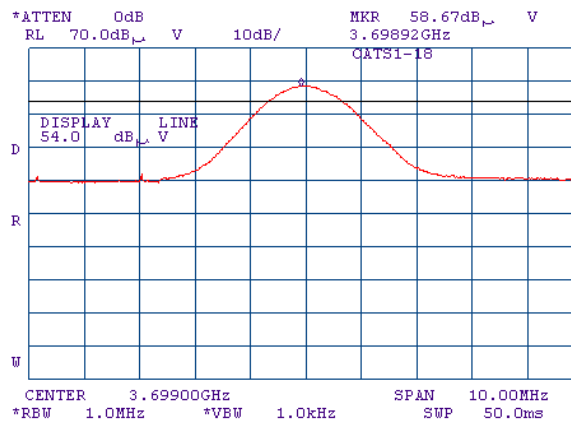




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.83 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Peak

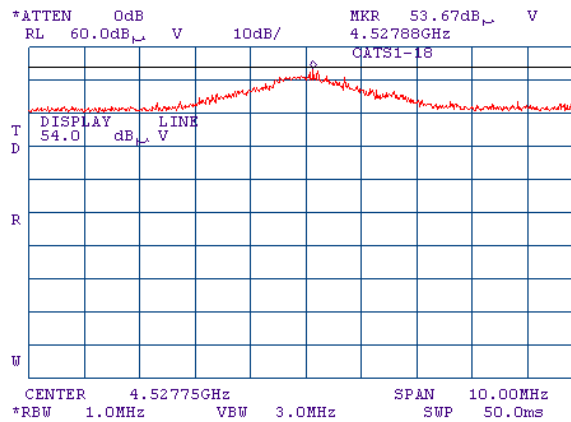

Plot 7.4.84 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Average

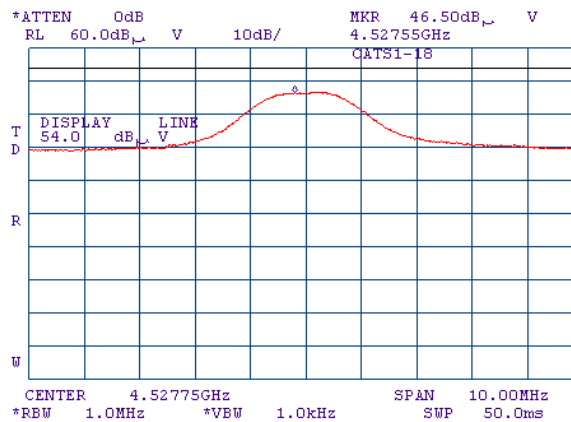




HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.85 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Peak

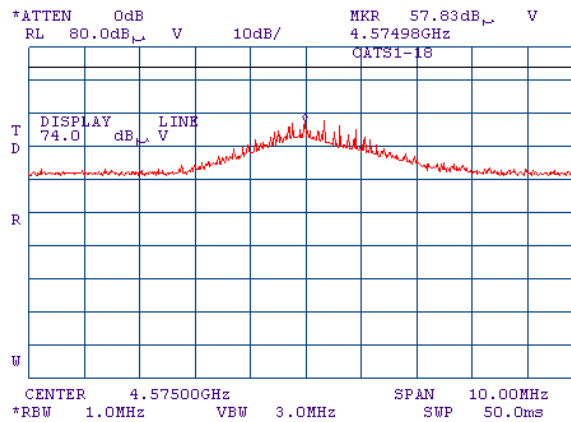

Plot 7.4.86 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Average

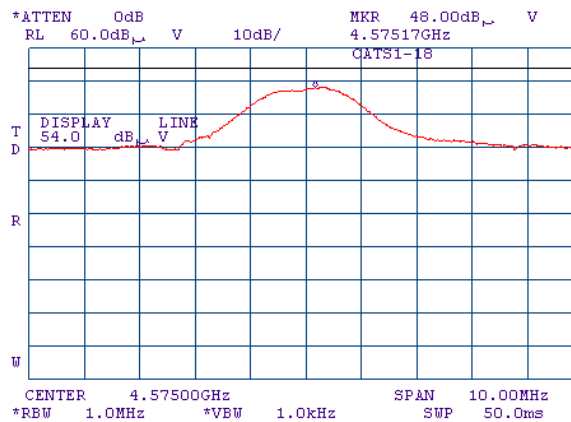




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.87 Radiated emission measurements at the fifth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Peak

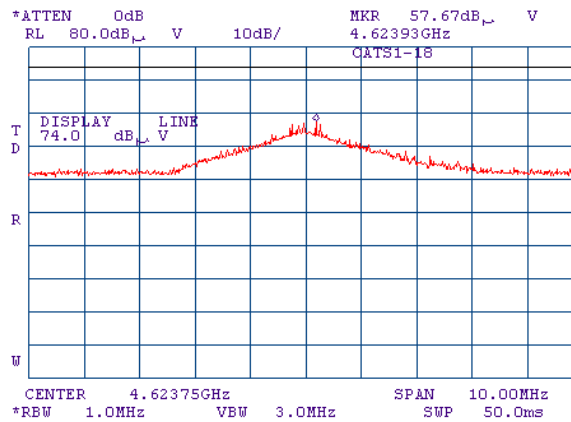

Plot 7.4.88 Radiated emission measurements at the fifth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Average

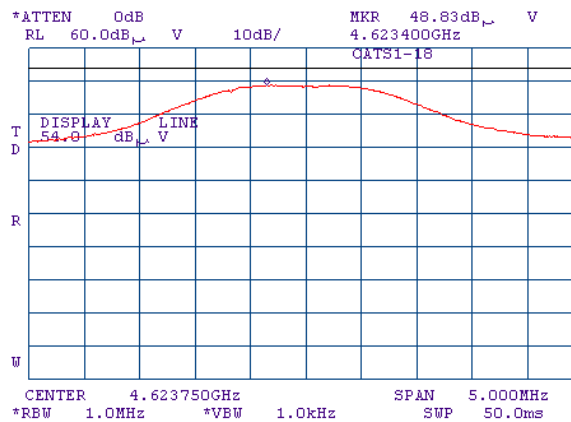




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.89 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: DSSS
MODULATION: PSK
ANTENNA: External
DETECTOR: Peak

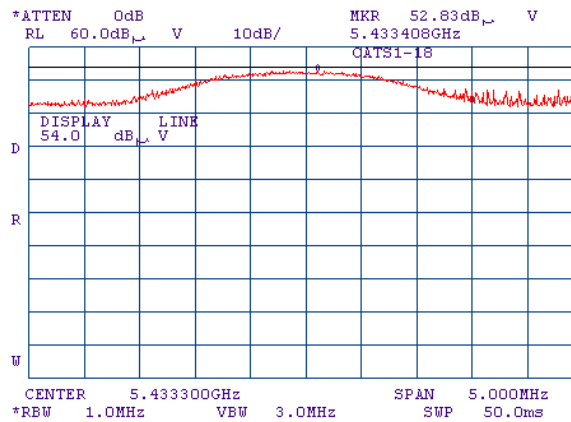

Plot 7.4.90 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: DSSS
MODULATION: PSK
ANTENNA: External
DETECTOR: Peak
DETECTOR: Average

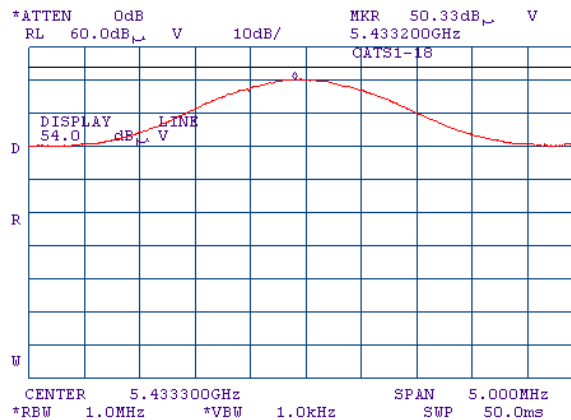




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.91 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Peak

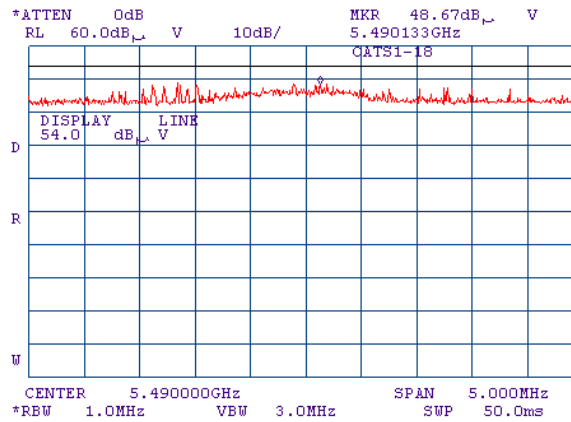

Plot 7.4.92 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: PSK
 ANTENNA: External
 DETECTOR: Average

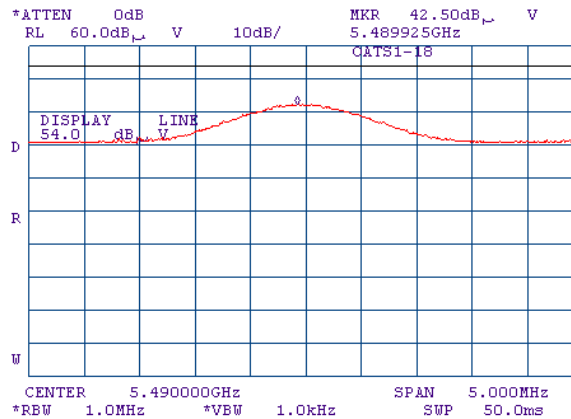




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.93 Radiated emission measurements at the sixth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
MODULATION: PSK DSSS
ANTENNA: External
DETECTOR: Peak

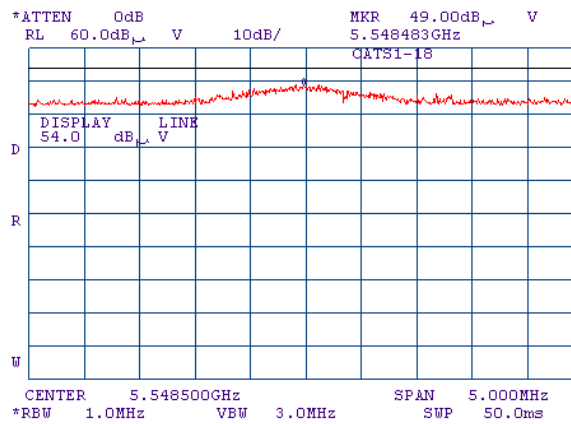

Plot 7.4.94 Radiated emission measurements at the sixth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
MODULATION: PSK DSSS
ANTENNA: External
DETECTOR: Peak
DETECTOR: Average

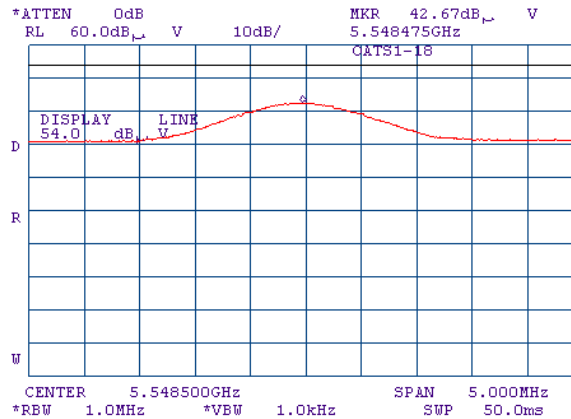




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.95 Radiated emission measurements at the seventh harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK DSSS
 ANTENNA: External

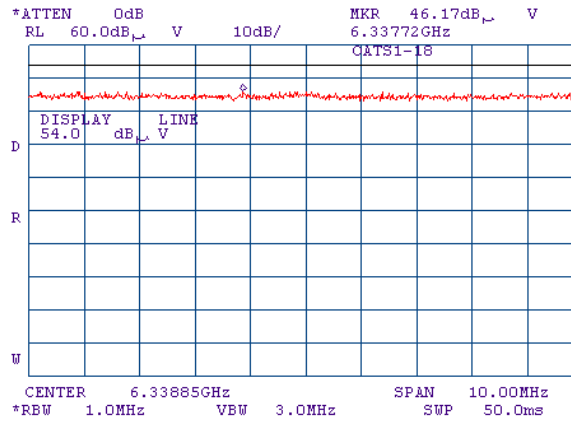

Plot 7.4.96 Radiated emission measurements at the seventh harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK DSSS
 ANTENNA: External

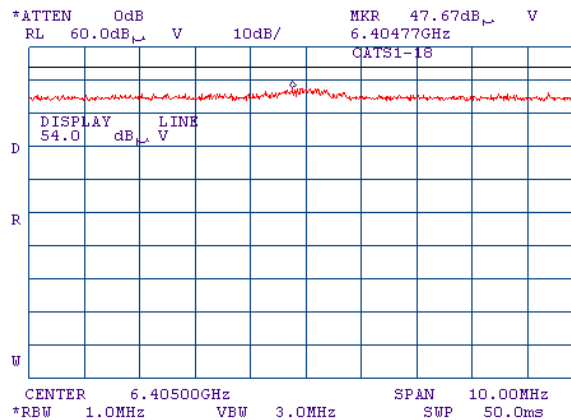




HERMON LABORATORIES

Test specification:		Section 15.247(d), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.97 Radiated emission measurements at the seventh harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK DSSS
 ANTENNA: External

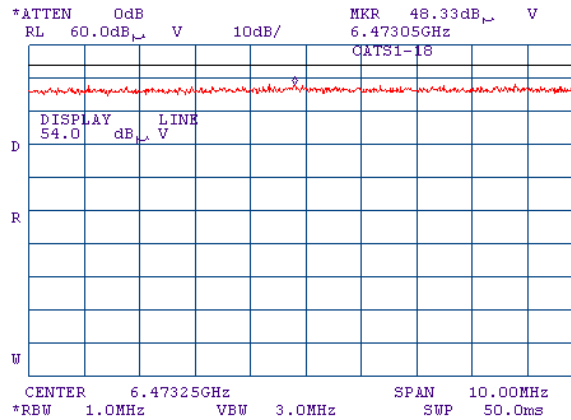

Plot 7.4.98 Radiated emission measurements at the eighth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK DSSS
 ANTENNA: External

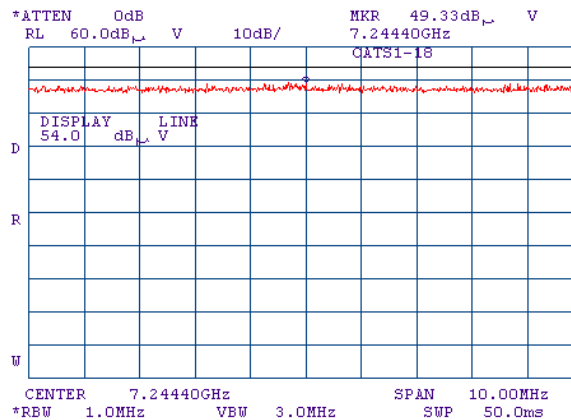




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.99 Radiated emission measurements at the eighth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
MODULATION: PSK DSSS
ANTENNA: External

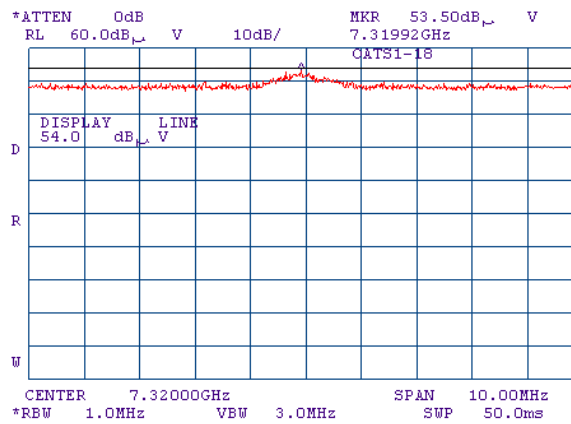




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.100 Radiated emission measurements at the eighth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK DSSS
 ANTENNA: External

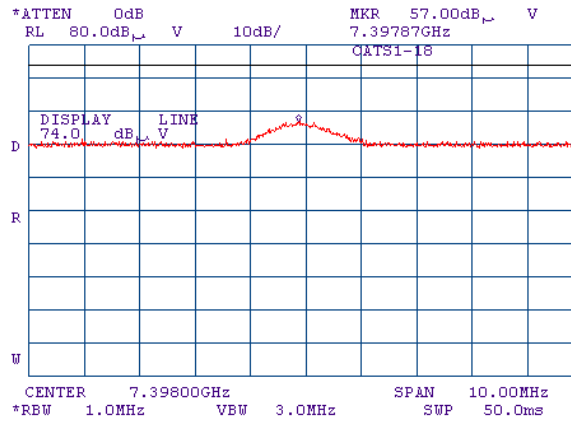

Plot 7.4.101 Radiated emission measurements at the eighth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK DSSS
 ANTENNA: External

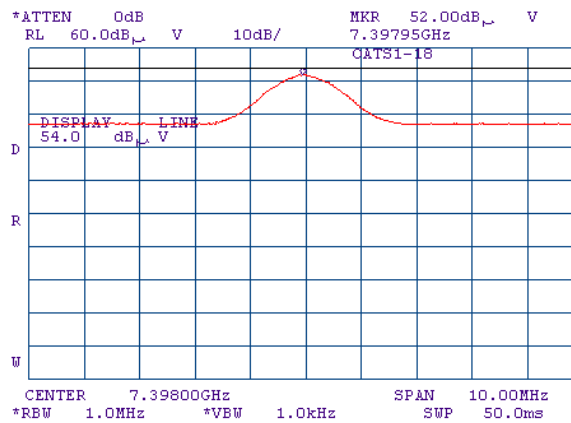




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.102 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Semi-Anechoic chamber
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: External


21:29:40 JAN 24, 2010

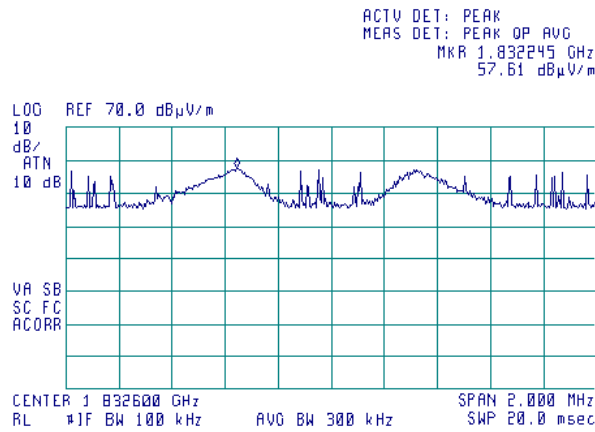

Plot 7.4.103 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 DETECTOR: Peak
 MODULATION: FSK
 ANTENNA: External

23:01:29 JAN 24, 2010

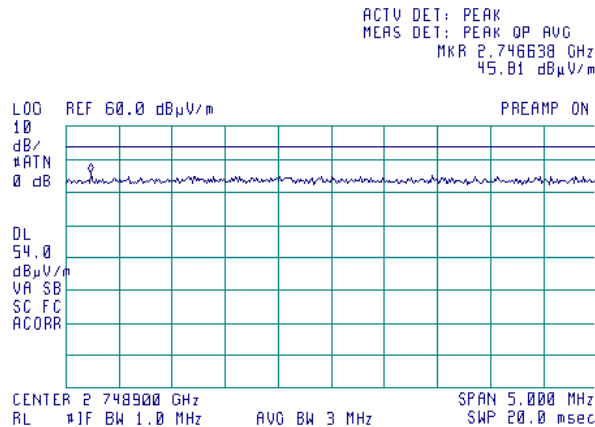




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions	
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode: Compliance	Verdict: PASS
Date & Time: 2/4/2010 10:05:51 AM	
Temperature: 23.2 °C	Air Pressure: 1023 hPa
Relative Humidity: 49 %	Power Supply: Battery
Remarks:	


Plot 7.4.104 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: External

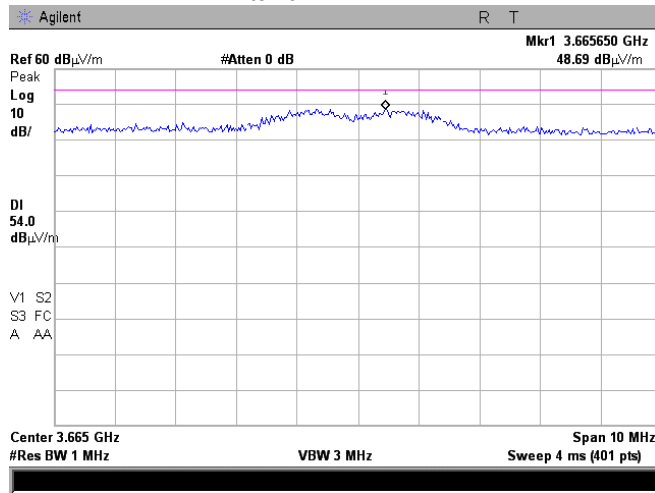

Plot 7.4.105 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: External

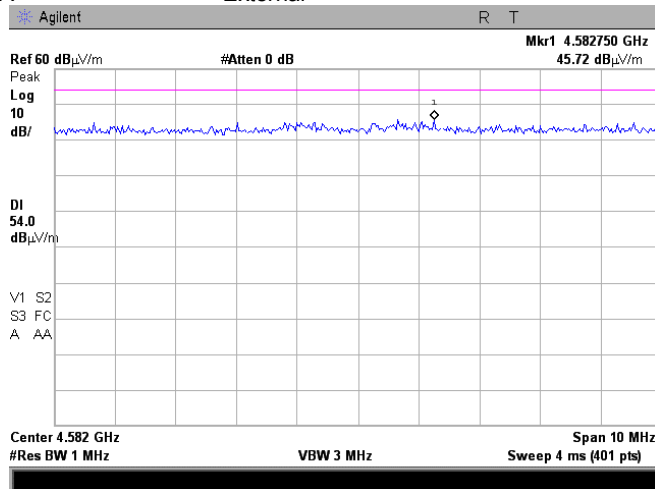




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.106 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: External

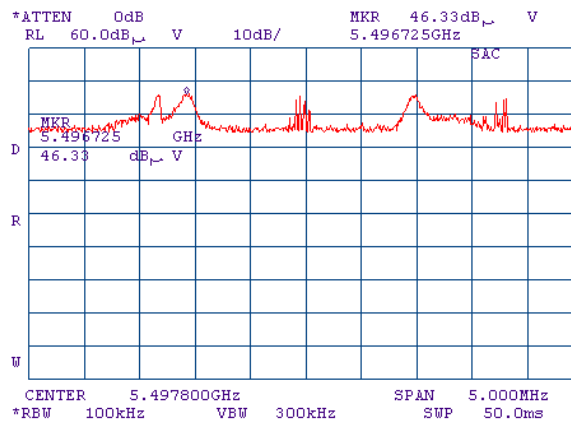


Plot 7.4.107 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Semi-Anechoic chamber
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal

22:29:40 JAN 24, 2010

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 1.832670 GHz
 46.31 dBμV/m

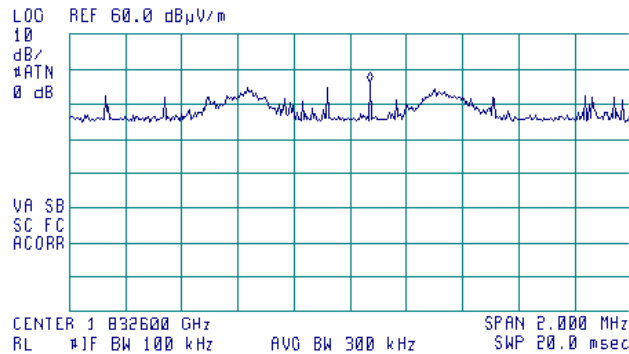




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.108 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 DETECTOR: Peak
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal


22:46:26 JAN 24, 2010

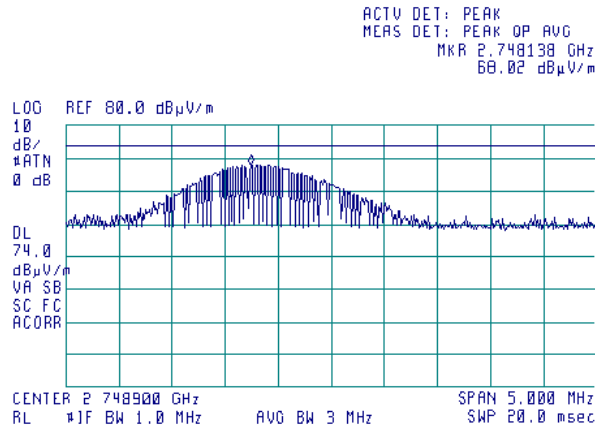

Plot 7.4.109 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 DETECTOR: Average
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal

22:49:13 JAN 24, 2010

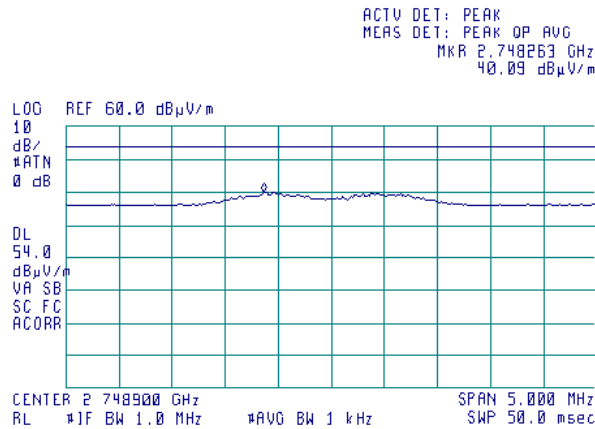




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.110 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal

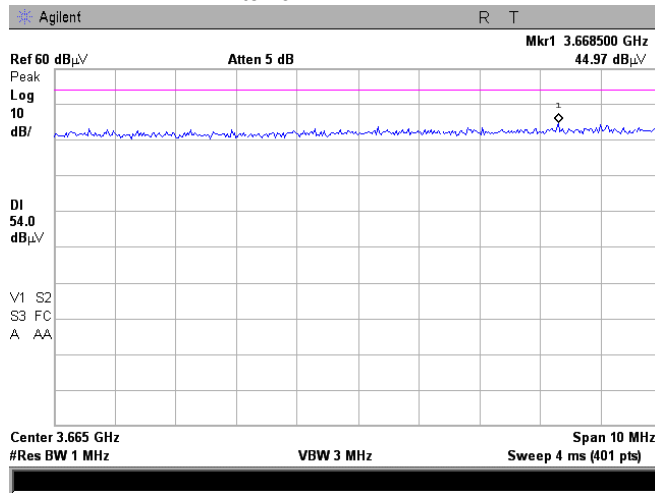

Plot 7.4.111 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal

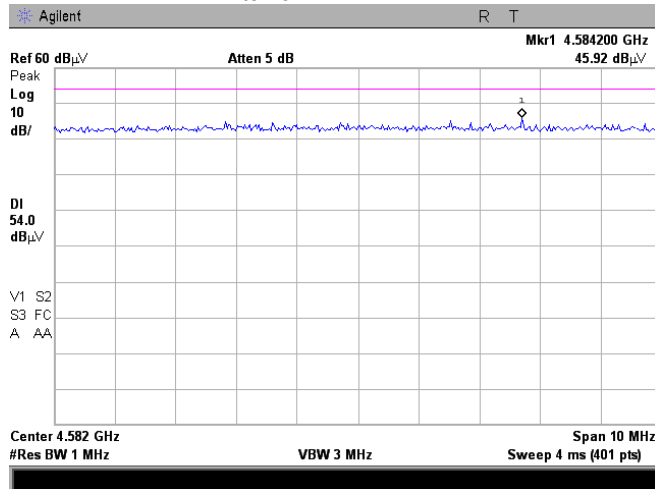




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.112 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal

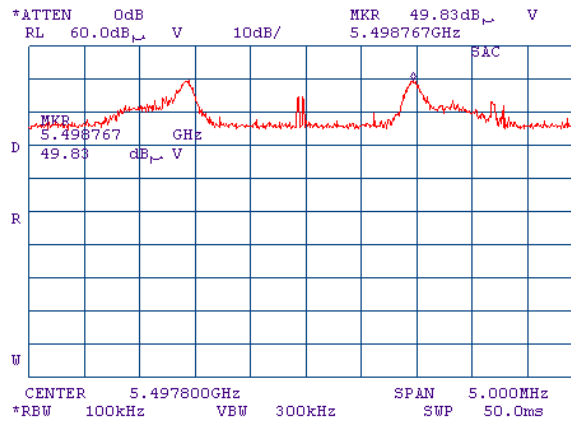

Plot 7.4.113 Radiated emission measurements at the seventh harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal

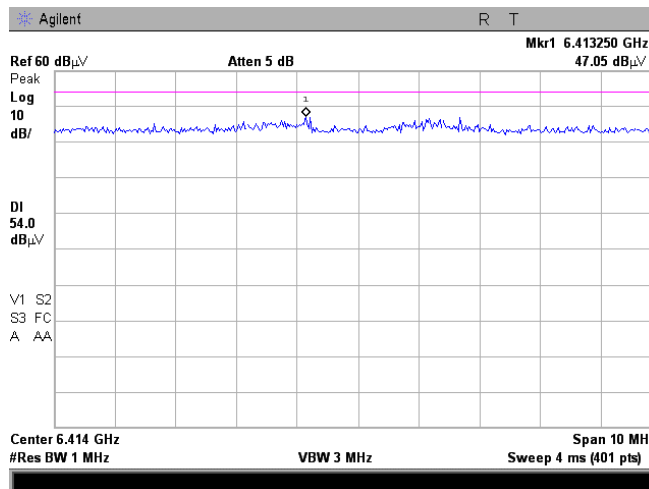




HERMON LABORATORIES

Test specification: Section 15.247(d), Radiated spurious emissions	
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode: Compliance	Verdict: PASS
Date & Time: 2/4/2010 10:05:51 AM	
Temperature: 23.2 °C	Air Pressure: 1023 hPa
Relative Humidity: 49 %	Power Supply: Battery
Remarks:	


Plot 7.4.114 Radiated emission measurements at the eighth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal
 DETECTOR: Peak

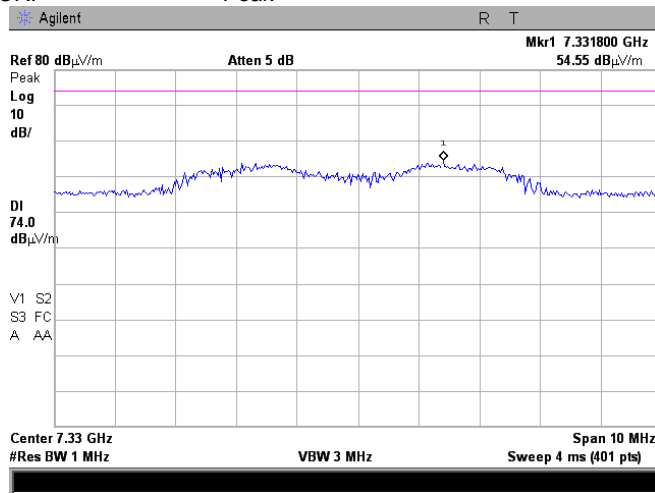

Plot 7.4.115 Radiated emission measurements at the eighth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: DSSS
 MODULATION: FSK
 ANTENNA: Internal
 DETECTOR: Average

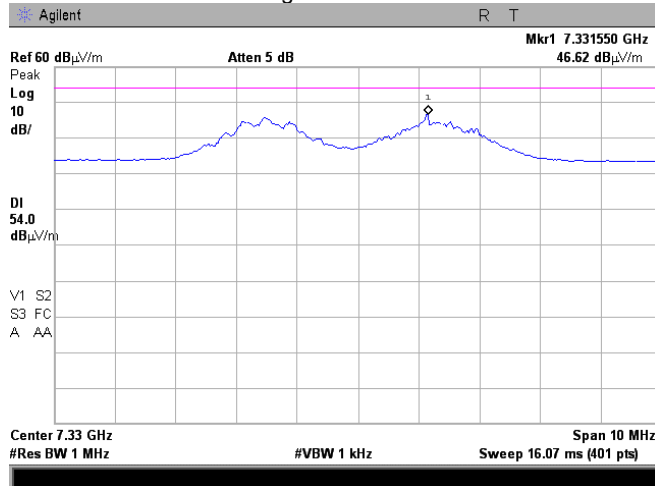




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.4.116 Radiated emission measurements at the ninth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: DSSS
MODULATION: FSK
ANTENNA: Internal

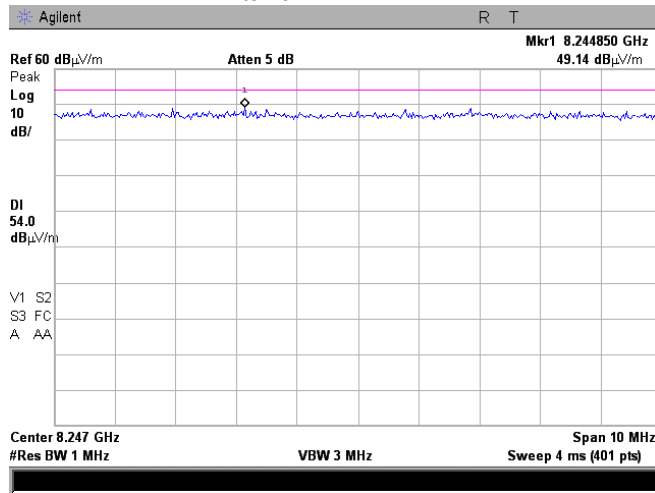

Plot 7.4.117 Radiated emission measurements at the tenth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: DSSS
MODULATION: FSK
ANTENNA: Internal

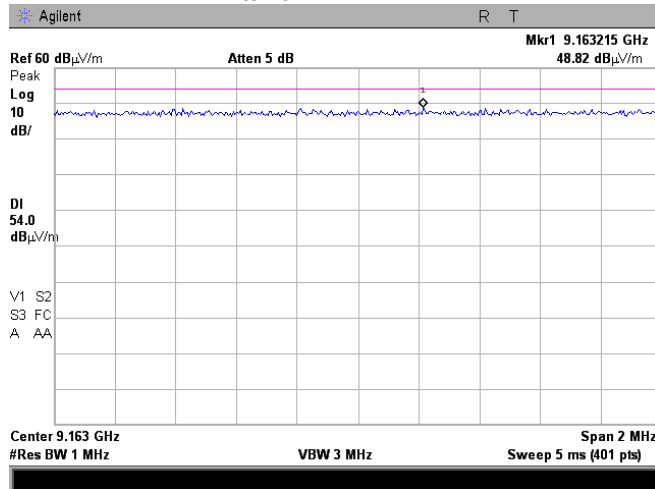




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.118 Transmission pulse duration, DSSS PSK



Plot 7.4.119 Transmission pulse period, DSSS PSK

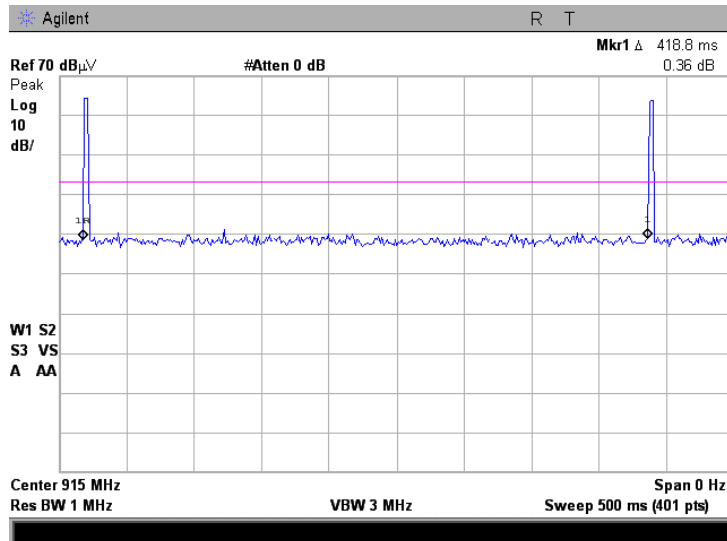





HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.120 Transmission pulse duration, DSSS FSK, External Antenna

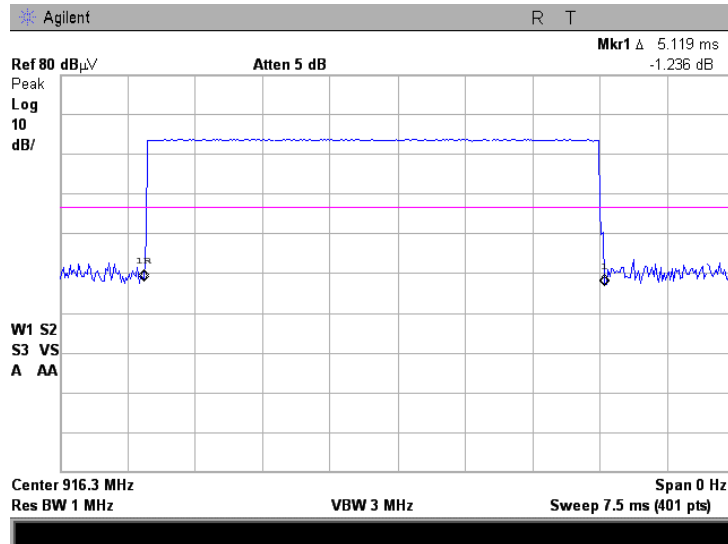

Plot 7.4.121 Transmission pulse period, DSSS FSK, External Antenna

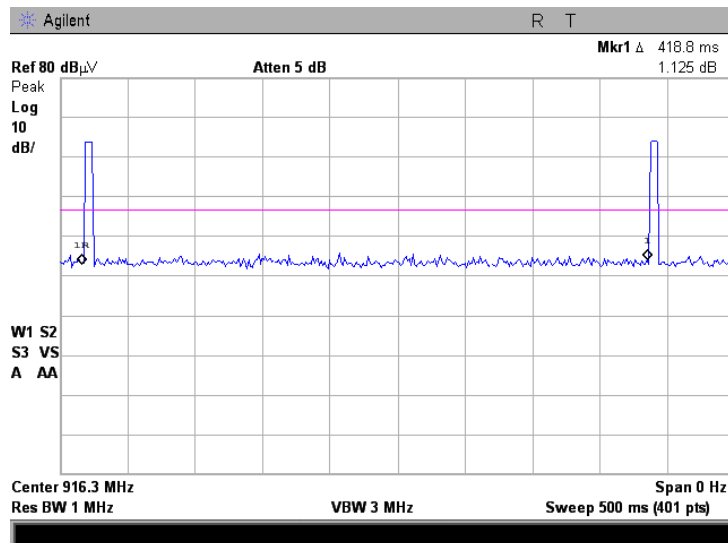




HERMON LABORATORIES

Test specification:	Section 15.247(d), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.122 Transmission pulse duration, DSSS FSK, Internal Antenna



Plot 7.4.123 Transmission pulse period, DSSS FSK, Internal Antenna

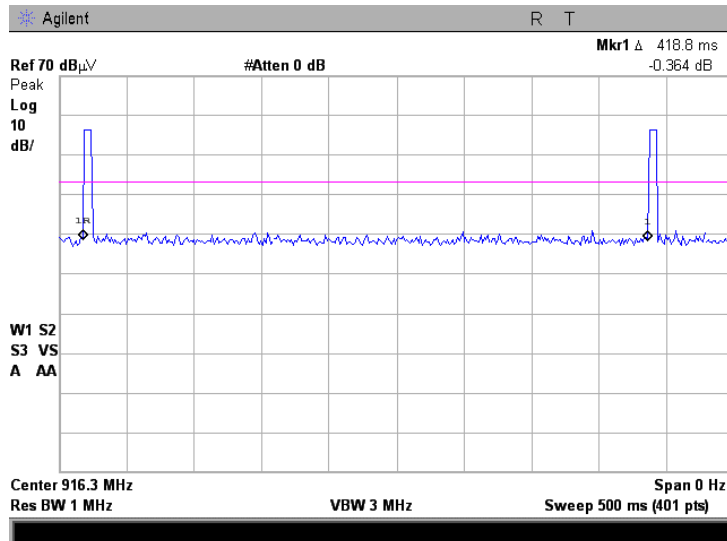



Test specification:	Section 15.203, Antenna requirements		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:07:22 PM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

7.5 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.5.1.

Table 7.5.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

**8 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0337	Probe Set, Hand held, 5 probes	Electro-Metrics	EHFP-30	238	08-Jun-09	08-Jun-10
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	29-Jun-09	29-Jun-10
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Aug-09	27-Aug-10
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-10	11-Jan-11
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies	8564EC	3946A002 19	28-Aug-09	28-Aug-10
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	28-Aug-09	28-Aug-10
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	29-Jan-10	29-Jan-11
2870	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-9155-00	2870	17-Sep-09	17-Sep-10
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	16-Sep-09	16-Sep-10
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	07-May-09	07-May-10
2951	Cable, RF, 18 GHz, 0.9 m, SMA-SMA	Gore	10020014	NA	05-Oct-09	05-Oct-10
2953	Cable, RF, 18 GHz, 1.2 m, SMA-SMA	Gore	10020014	NA	05-Oct-09	05-Oct-10
3616	Cable RF, 6.5 m, N type-N type, DC-6.5 GHz	Suhner Switzerland	Rg 214/U	NA	02-Dec-09	02-Dec-10
3883	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470104 06	13-Jan-10	13-Jan-11

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 15: 2009	Radio Frequency Devices.
FR Vol.62	Federal Register, Volume 62, May 13, 1997
FCC New Guidance:2004	FCC New Guidance on Measurements for DTS
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

12 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field intensity in dB(μV/m).

**Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984**

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-9155-00,
HL 2870

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	5750	2.49	12000	3.71
30	0.17	6000	2.53	12250	3.81
100	0.32	6250	2.58	12500	3.84
250	0.49	6500	2.64	12750	3.88
500	0.70	6750	2.69	13000	3.92
750	0.86	7000	2.75	13250	3.96
1000	1.00	7250	2.80	13500	3.98
1250	1.11	7500	2.87	13750	4.01
1500	1.23	7750	2.93	14000	4.03
1750	1.34	8000	2.94	14250	4.09
2000	1.41	8250	3.00	14500	4.08
2250	1.51	8500	3.04	14750	4.10
2500	1.59	8750	3.08	15000	4.15
2750	1.68	9000	3.14	15250	4.22
3000	1.76	9250	3.16	15500	4.31
3250	1.83	9500	3.22	15750	4.42
3500	1.91	9750	3.26	16000	4.48
3750	1.97	10000	3.36	16250	4.54
4000	2.05	10250	3.41	16500	4.56
4250	2.11	10500	3.46	16750	4.57
4500	2.18	10750	3.50	17000	4.59
4750	2.24	11000	3.54	17250	4.66
5000	2.30	11250	3.58	17500	4.70
5250	2.36	11500	3.63	17750	4.76
5500	2.43	11750	3.66	18000	4.72

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55



Cable loss
Cable coaxial, Gore, 18 GHz, 0.9 m, SMA-SMA, S/N 10020014
HL 2951

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.07	5750	0.77	12000	1.23
30	0.06	6000	0.78	12250	1.25
100	0.09	6250	0.81	12500	1.26
250	0.15	6500	0.83	12750	1.26
500	0.21	6750	0.84	13000	1.30
750	0.27	7000	0.85	13250	1.30
1000	0.31	7250	0.88	13500	1.30
1250	0.36	7500	0.88	13750	1.29
1500	0.38	7750	0.93	14000	1.23
1750	0.42	8000	0.92	14250	1.32
2000	0.44	8250	0.94	14500	1.27
2250	0.47	8500	0.99	14750	1.27
2500	0.50	8750	0.97	15000	1.34
2750	0.52	9000	1.01	15250	1.36
3000	0.54	9250	1.05	15500	1.35
3250	0.57	9500	1.08	15750	1.36
3500	0.58	9750	1.10	16000	1.43
3750	0.61	10000	1.09	16250	1.38
4000	0.63	10250	1.09	16500	1.42
4250	0.66	10500	1.07	16750	1.49
4500	0.68	10750	1.10	17000	1.53
4750	0.70	11000	1.09	17250	1.59
5000	0.71	11250	1.09	17500	1.65
5250	0.74	11500	1.13	17750	1.82
5500	0.77	11750	1.12	18000	2.09

Cable loss
Cable coaxial, Gore, 25.5 GHz, 1.2 m, SMA-SMA, S/N 10020014
HL 2953

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.06	8750	1.28	18000	1.84
30	0.06	9000	1.30	18250	1.91
100	0.12	9250	1.35	18500	1.94
250	0.19	9500	1.34	18750	1.92
500	0.27	9750	1.36	19000	1.95
750	0.34	10000	1.33	19250	2.00
1000	0.40	10250	1.38	19500	1.96
1250	0.45	10500	1.39	19750	2.02
1500	0.50	10750	1.39	20000	1.92
1750	0.54	11000	1.43	20250	2.04
2000	0.57	11250	1.42	20500	2.00
2250	0.60	11500	1.48	20750	2.09
2500	0.64	11750	1.49	21000	2.01
2750	0.67	12000	1.59	21250	2.07
3000	0.70	12250	1.50	21500	2.20
3250	0.74	12500	1.55	21750	2.10
3500	0.76	12750	1.55	22000	2.24
3750	0.80	13000	1.61	22250	2.25
4000	0.83	13250	1.62	22500	2.12
4250	0.85	13500	1.56	22750	2.05
4500	0.87	13750	1.61	23000	2.10
4750	0.91	14000	1.57	23250	2.03
5000	0.92	14250	1.66	23500	2.08
5250	0.96	14500	1.58	23750	2.14
5500	0.99	14750	1.69	24000	2.16
5750	0.99	15000	1.71	24250	2.25
6000	1.03	15250	1.74	24500	2.17
6250	1.05	15500	1.75	24750	2.32
6500	1.07	15750	1.72	25000	2.32
6750	1.08	16000	1.89	25250	2.32
7000	1.12	16250	1.79	25500	2.41
7250	1.13	16500	1.84	25750	2.31
7500	1.15	16750	1.82	26000	2.28
7750	1.20	17000	1.79	26250	2.32
8000	1.20	17250	1.78	26500	2.29
8250	1.23	17500	1.85		
8500	1.27	17750	1.83		

Cable loss
Cable coaxial, RG-214/U, N type-N type, 6.5 m
Suhner Switzerland, HL 3616

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	1750	2.66	3550	4.44	5350	6.08
30	0.25	1800	2.72	3600	4.46	5400	6.12
50	0.32	1850	2.78	3650	4.59	5450	6.17
100	0.48	1900	2.81	3700	4.60	5500	6.25
150	0.60	1950	2.86	3750	4.72	5550	6.31
200	0.71	2000	2.94	3800	4.72	5600	6.35
250	0.81	2050	2.97	3850	4.86	5650	6.41
300	0.91	2100	3.01	3900	4.85	5700	6.50
350	1.00	2150	3.06	3950	4.99	5750	6.52
400	1.07	2200	3.11	4000	4.90	5800	6.57
450	1.14	2250	3.16	4050	5.04	5850	6.61
500	1.23	2300	3.21	4100	5.01	5900	6.71
550	1.30	2350	3.26	4150	5.10	5950	6.70
600	1.37	2400	3.31	4200	5.08	6000	6.75
650	1.44	2450	3.35	4250	5.18	6050	6.74
700	1.50	2500	3.39	4300	5.14	6100	6.84
750	1.58	2550	3.46	4350	5.22	6150	6.87
800	1.64	2600	3.48	4400	5.21	6200	6.93
850	1.69	2650	3.55	4450	5.29	6250	6.96
900	1.77	2700	3.59	4500	5.31	6300	7.02
950	1.79	2750	3.66	4550	5.39	6350	7.04
1000	1.87	2800	3.68	4600	5.41	6400	7.10
1050	1.92	2850	3.75	4650	5.49	6450	7.11
1100	1.98	2900	3.79	4700	5.52	6500	7.19
1150	2.05	2950	3.86	4750	5.60		
1200	2.09	3000	3.89	4800	5.64		
1250	2.15	3050	3.94	4850	5.73		
1300	2.21	3100	3.98	4900	5.70		
1350	2.27	3150	4.03	4950	5.73		
1400	2.33	3200	4.06	5000	5.75		
1450	2.38	3250	4.12	5050	5.83		
1500	2.44	3300	4.14	5100	5.82		
1550	2.48	3350	4.22	5150	5.91		
1600	2.52	3400	4.24	5200	5.92		
1650	2.56	3450	4.31	5250	5.98		
1700	2.62	3500	4.35	5300	6.01		

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT