



Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (FHSS)

FOR:

Telematics Wireless Ltd.
Water meter booster
Model:Booster 2

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C §15.247 (FHSS) requirements	7
7.1	20 dB bandwidth	7
7.2	Carrier frequency separation.....	12
7.3	Number of hopping frequencies	15
7.4	Average time of occupancy	17
7.5	Peak output power	20
7.6	Band edge radiated emissions	26
7.7	Field strength of spurious emissions	31
7.8	Antenna requirements.....	84
8	APPENDIX A Test equipment and ancillaries used for tests.....	85
9	APPENDIX B Measurement uncertainties.....	86
10	APPENDIX C Test laboratory description	87
11	APPENDIX D Specification references	87
12	APPENDIX E Test equipment correction factors.....	88
13	APPENDIX F Abbreviations and acronyms.....	96



HERMON LABORATORIES

1 Applicant information

Client name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-mail: slavas@tlmw.com
Contact name: Mr. Slava Snitkovsky

2 Equipment under test attributes

Product name: Water reader (Booster)
Product type: Transceiver
Model(s): Booster 2
Receipt date 1/17/2010

3 Manufacturer information

Manufacturer name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-Mail: slavas@tlmw.com
Contact name: Mr. Slava Snitkovsky

4 Test details

Project ID: 20425
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 1/17/2010
Test completed: 2/04/2010
Test specification(s): FCC 47CFR part 15, subpart C, §15.247



HERMON LABORATORIES

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.247(a)1, The 20 dB bandwidth	Pass
Section 15.247(a)1, Frequency separation	Pass
Section 15.247(a)1, Number of hopping frequencies	Pass
Section 15.247(a)1, Average time of occupancy	Pass
Section 15.247(b), Peak output power	Pass
Section 15.247(d), Emissions at band edges	Pass
Section 15.247(d), Radiated spurious emissions	Pass
Section 15.203, Antenna requirements	Pass
Section 15.207(a), Conducted emission	Not required
Section 15.247(i), RF exposure	Pass, the exhibit to the application of certification is provided

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
 The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report replaces the previously issued test report identified by Doc ID: TELRAD_FCC.20425_FHSS.

	Name and Title	Date	Signature
Tested by:	Mr. S. Samokha, test engineer	February 4, 2010	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	February 16, 2010	
Approved by:	Mr. M. Nikishin, EMC and radio group manager	February 17, 2010	

6 EUT description

6.1 General information

The EUT, water meter booster (WMB), is a transceiver operating in three transmit modes: 905.55-924.75 MHz range (FHSS and DTS, PSK modulation) and @916.3 MHz (DTS, FSK modulation) without simultaneous operation.

The WMB communicates by a RF channel (path No.2 is Tx with PSK modulation and path No.4 is Rx at 916.3 MHz) with up to 2 meters and collects their data. The collected data is transmitted by the WMB towards the concentrator by the RF channel path No.1 using a Frequency Hopping or Direct Sequence Spread Spectrum techniques. The EUT receives the programming parameters and commands from a programmer and transmits the response (path No.5 is Tx with FSK modulation and path No.3 is Rx at 916.3 MHz).

Figure 6.1.1 EUT operational modes block diagram

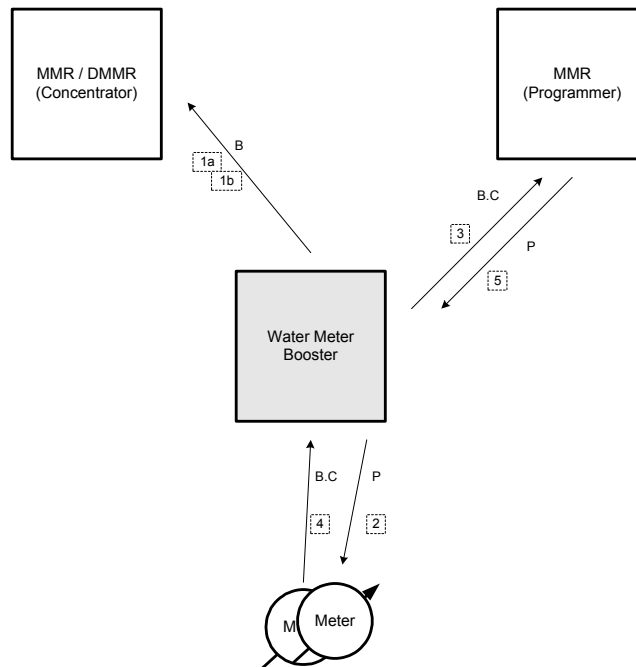


Table 6.1.1 EUT operational modes overview

Modulation technique	Low frequency	Mid frequency	High frequency	Power setting
Frequency-hopping spread spectrum (FHSS), External antenna	905.55	915.00	924.75	85
Direct-Sequence Spread Spectrum (DSSS) FSK, External antenna	–	916.30	–	1E
Direct-Sequence Spread Spectrum (DSSS) FSK, Internal antenna	–	916.30	–	NA
Direct-Sequence Spread Spectrum (DSSS) PSK, External antenna	905.55	915.00	924.75	6A



HERMON LABORATORIES

6.2 Transmitter characteristics

Type of equipment					
	Stand-alone (Equipment with or without its own control provisions)				
X	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
Intended use		Condition of use			
	fixed	Always at a distance more than 2 m from all people			
X	mobile	Always at a distance more than 20 cm from all people			
	portable	May operate at a distance closer than 20 cm to human body			
Assigned frequency range		902-928 MHz			
Operating frequency range		905.55-924.75 MHz			
RF channel spacing		NA			
Maximum rated output power		At transmitter 50 Ω RF output connector		NA	
		Peak output power		29.56 dBm	
Is transmitter output power variable?		X	No		
			Yes	continuous variable	
				stepped variable with stepsize	dB
				minimum RF power	dBm
				maximum RF power	dBm
Antenna connection					
unique coupling		standard connector		X	integral
				X	with temporary RF connector
					without temporary RF connector
Antenna/s technical characteristics					
Type	Manufacturer	Model number		Gain	
Unique coupling, "external"	Telematics Wireless	Inverted F antenna		1 dBi	
Transmitter aggregate data rate/s		60 kbps			
Transmitter aggregate symbol (baud) rate/s		NA			
Modulating test signal (baseband)		PRBS			
Maximum transmitter duty cycle in normal use		0.1%			
Transmitter duty cycle supplied for test (FHSS)		1.22%	Tx ON time	5.12 msec	Period 420 msec
Transmitter power source					
X	Battery	Nominal rated voltage	3.6 VDC	Battery type	Lithium
	DC	Nominal rated voltage	VDC		
	AC mains	Nominal rated voltage	VAC	Frequency	
Spread spectrum parameters for transmitters tested per FCC 15.247 only					
FHSS	Total number of hops		54		
	Bandwidth per hop		237 kHz		
	Max. separation of hops		322 kHz		



Test specification: Section 15.247(a)1, 20 dB bandwidth			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date & Time: 1/19/2010 9:22:11 AM			
Temperature: 22.5 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C §15.247 (FHSS) requirements

7.1 The 20 dB bandwidth

7.1.1 General

This test was performed to measure the 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	500	20
2400.0 – 2483.5	NA	
5725.0 – 5850.0	1000	

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.

7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and the associated plots.

7.1.2.4 The test was repeated for each data rate and each modulation format.

Figure 7.1.1 The 20 dB bandwidth test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	1/19/2010 9:22:11 AM		
Temperature: 22.5 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
DETECTOR USED: Peak
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: ≥ 1% of the 20 dB bandwidth
VIDEO BANDWIDTH: ≥ RBW
MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc
MODULATING SIGNAL: PRBS
FREQUENCY HOPPING: Disabled

Carrier frequency, MHz	Type of modulation	Data rate, Mbps	Symbol rate, Msymbols/s	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency							
905.55	FSK	NA	NA	237	500	263	Pass
Mid frequency							
915.00	FSK	NA	NA	207	500	293	Pass
High frequency							
924.75	FSK	NA	NA	210	500	290	Pass

Reference numbers of test equipment used

HL 0337	HL 1424	HL 2953					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	1/19/2010 9:22:11 AM		
Temperature: 22.5 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Plot 7.1.1 The 20 dB bandwidth test result at low frequency

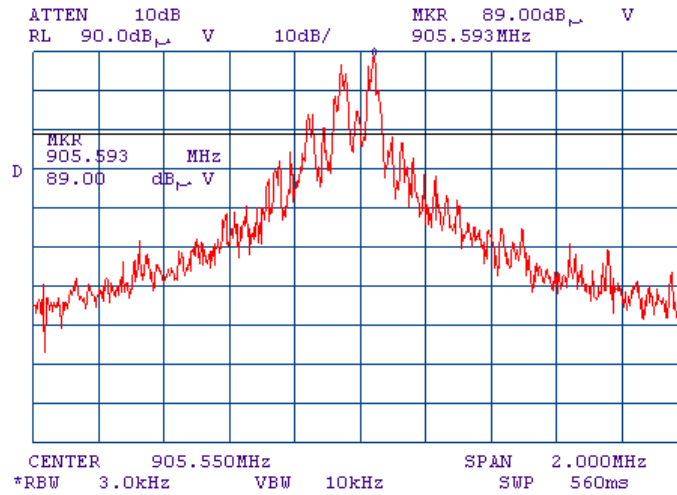


Plot 7.1.2 The 20 dB bandwidth test result at low frequency

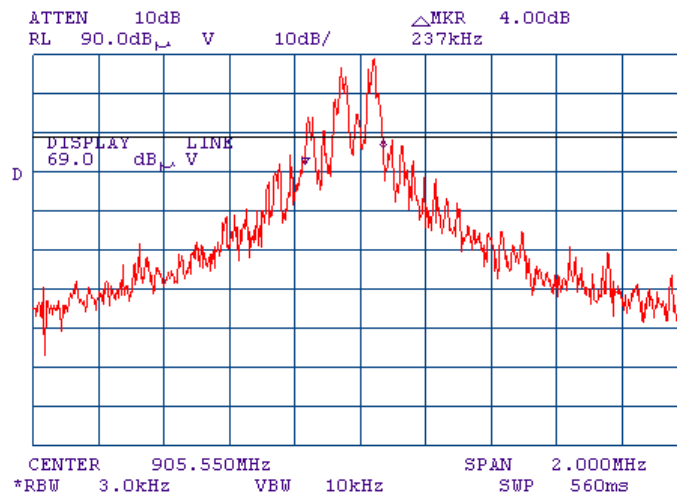




Test specification:	Section 15.247(a)1, 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/19/2010 9:22:11 AM		
Temperature: 22.5 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Plot 7.1.3 The 20 dB bandwidth test result at mid frequency

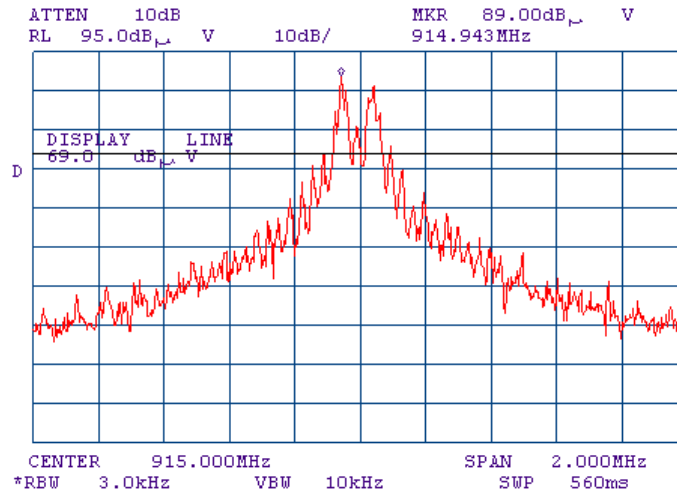


Plot 7.1.4 The 20 dB bandwidth test result at mid frequency

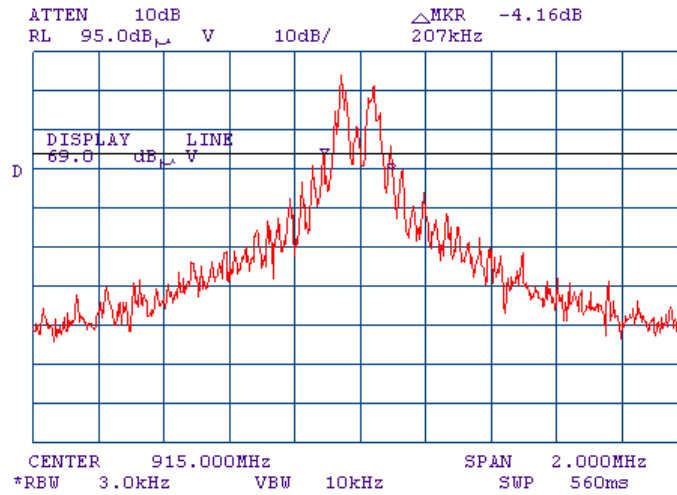




Test specification:		Section 15.247(a)1, 20 dB bandwidth	
Test procedure:		Public notice DA 00-705	
Test mode:		Compliance	Verdict: PASS
Date & Time:		1/19/2010 9:22:11 AM	
Temperature: 22.5 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Plot 7.1.5 The 20 dB bandwidth test result at high frequency

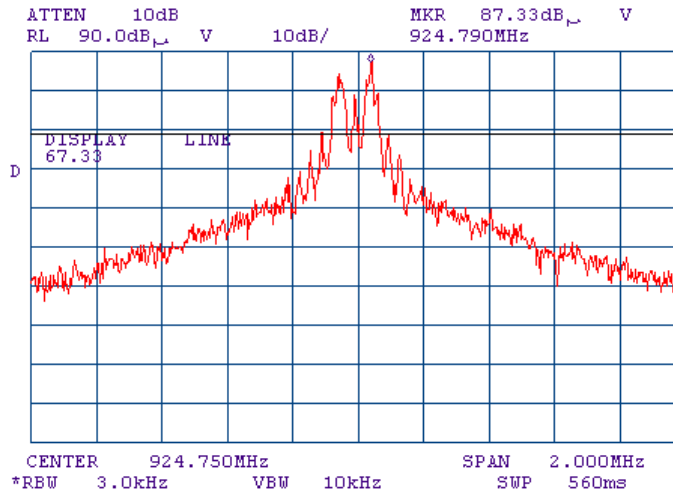

Plot 7.1.6 The 20 dB bandwidth test result at high frequency

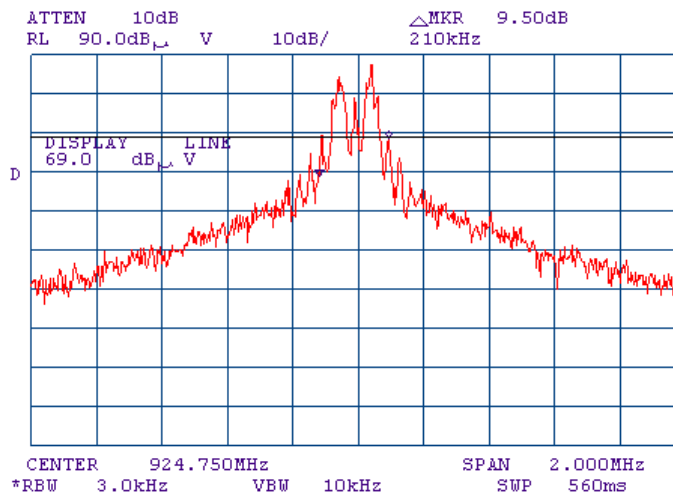



Test specification:	Section 15.247(a)1, Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/19/2010 10:04:17 AM		
Temperature: 22.5 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

7.2 Carrier frequency separation

7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater
2400.0 – 2483.5	
5725.0 – 5850.0	

7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2 The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4 The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and associated plots.

Figure 7.2.1 Carrier frequency separation test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/19/2010 10:04:17 AM		
Temperature: 22.5 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 60 kbps
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: ≥ 1% of the span
 VIDEO BANDWIDTH: ≥ RBW
 FREQUENCY HOPPING: Enabled
 20 dB BANDWIDTH: <250 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
322	237	85	Pass

* - Margin = Carrier frequency separation –limit.

Reference numbers of test equipment used

HL 0337	HL 1424	HL 2953				
---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/19/2010 10:04:17 AM		
Temperature: 22.5 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Plot 7.2.1 Carrier frequency separation

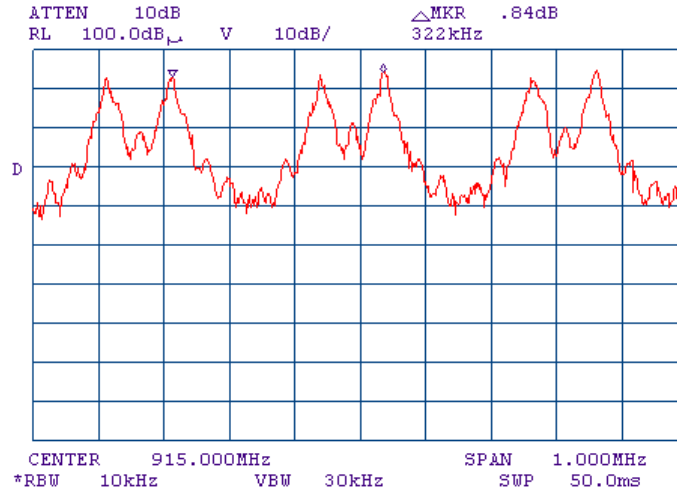

Plot 7.2.2 Carrier frequency separation

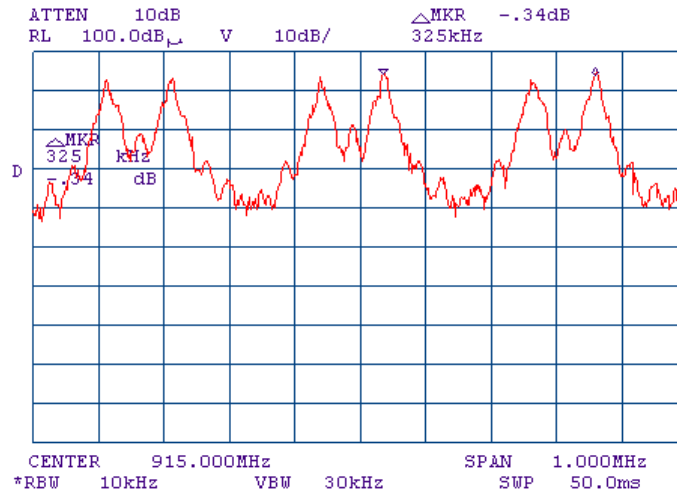



Test specification:	Section 15.247(a)1, Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/20/2010 5:43:27 PM		
Temperature: 22.5 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

7.3 Number of hopping frequencies

7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.

7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.

7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.

7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and the associated plot.

Figure 7.3.1 Hopping frequencies test setup





Test specification:	Section 15.247(a)1, Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	1/20/2010 5:43:27 PM		
Temperature: 22.5 °C	Air Pressure: 1013 hPa	Relative Humidity: 45 %	Power Supply: Battery
Remarks:			

Table 7.3.2 Hopping frequencies test results

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 60 kbps
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: ≥ 1% of the span
 VIDEO BANDWIDTH: ≥ RBW
 FREQUENCY HOPPING: Enabled

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
54	50	4	Pass


* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

Reference numbers of test equipment used

HL 0337	HL 1425						
---------	---------	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.3.1 Number of hopping frequencies

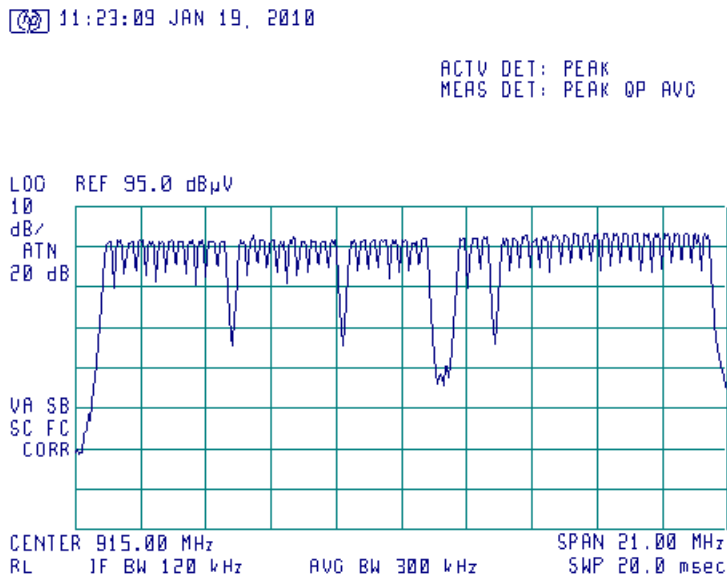



Test specification:		Section 15.247(a)1, Average time of occupancy	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/20/2010 5:43:23 PM		
Temperature: 22.9 °C	Air Pressure: 1014 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

7.4 Average time of occupancy

7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	0.4 × N	N (≥ 15)
5725.0 – 5850.0	0.4	30.0	≥ 75

7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.


7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.

7.4.2.3 The single transmission duration and period were measured with oscilloscope.

7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.

7.4.2.5 The test was repeated at each data rate and modulation type as provided in Table 7.4.2 and the associated plots.

Figure 7.4.1 Average time of occupancy test setup





HERMON LABORATORIES

Test specification:		Section 15.247(a)1, Average time of occupancy	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/20/2010 5:43:23 PM		
Temperature: 22.9 °C	Air Pressure: 1014 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Table 7.4.2 Average time of occupancy test results

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 3 kHz
 VIDEO BANDWIDTH: 10 kHz
 NUMBER OF HOPPING FREQUENCIES: 54
 INVESTIGATED PERIOD: 20 s
 FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single transmission duration, ms	Single transmission period, s	Average time of occupancy*, ms	Limit, ms	Margin, ms**	Verdict
905.55	5.075	22.6	5.075	400	-394.9	Pass

* - Average time of occupancy = (Single transmission duration × Investigated period) / Single transmission period.

** - Margin = Average time of occupancy – specification limit.

Reference numbers of test equipment used

HL 0337	HL 2909	HL 2951				
---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/20/2010 5:43:23 PM		
Temperature: 22.9 °C	Air Pressure: 1014 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.4.1 Single transmission duration

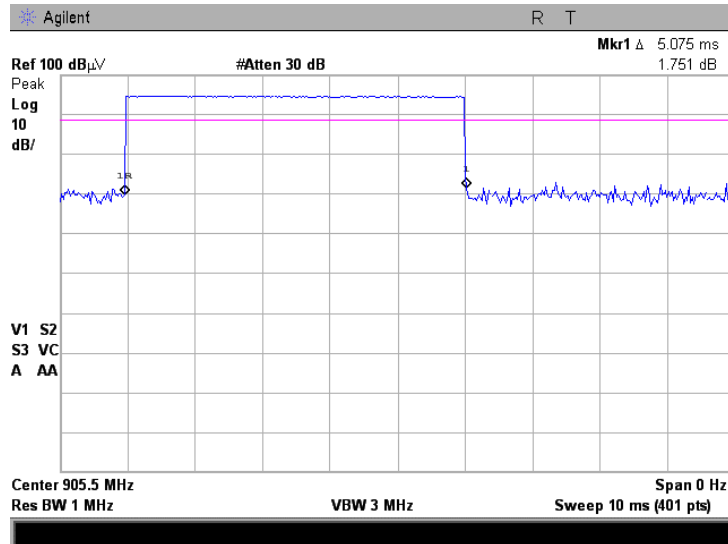

Plot 7.4.2 Single transmission period

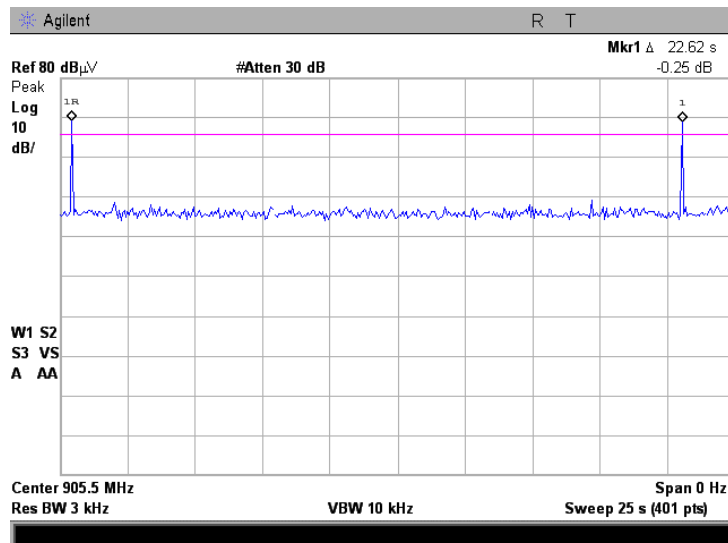



Test specification:		Section 15.247(b), Peak output power	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/21/2010 9:43:40 AM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

7.5 Peak output power

7.5.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range, MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	1.0	30.0	125.23	
2400.0 – 2483.5	0.125 (<75 hopping channels)	21.0 (<75 hopping channels)	122.2 (<75 hopping channels)	6.0*
	1.0 (≥75 hopping channels)	30.0 (≥75 hopping channels)	131.2 (≥75 hopping channels)	
5725.0 – 5850.0	1.0	30.0	131.2	

*- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

** - The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.

7.5.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$


7.5.2.6 The worst test results (the lowest margins) were recorded in Table 7.5.2.



HERMON LABORATORIES

Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/21/2010 9:43:40 AM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

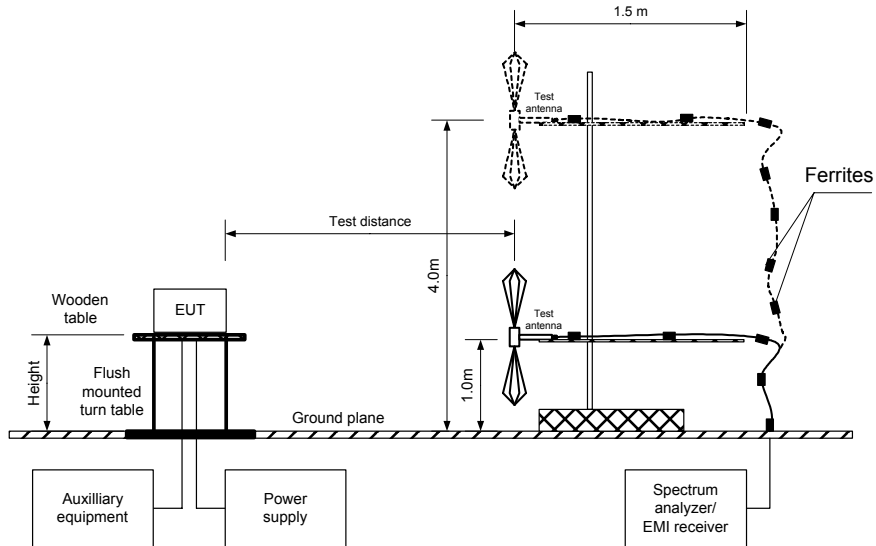



HERMON LABORATORIES

Test specification: Section 15.247(b), Peak output power	
Test procedure: Public notice DA 00-705	
Test mode: Compliance	Verdict: PASS
Date & Time: 1/21/2010 9:43:40 AM	
Temperature: 23.5 °C	Air Pressure: 1015 hPa
Relative Humidity: 47 %	
Power Supply: Battery	
Remarks:	

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY RANGE: 902.0 – 928.0 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
DETECTOR USED: Peak
TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
Double ridged guide (above 1000 MHz)
MODULATION: FSK (FHSS)
MODULATING SIGNAL: PRBS
BIT RATE: 60 kbps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DETECTOR USED: Peak
EUT 20 dB BANDWIDTH: 237 kHz
RESOLUTION BANDWIDTH: 1 MHz
VIDEO BANDWIDTH: 3 MHz
FREQUENCY HOPPING: Disabled
NUMBER OF FREQUENCY HOPPING CHANNELS: 54

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
905.48	125.79	Vert	1.0	0	1.0	29.56	30.0	-0.44	Pass
915.03	124.99	Vert	1.0	0	1.0	28.76	30.0	-1.24	Pass
924.70	124.96	Vert	1.0	0	1.0	28.73	30.0	-1.27	Pass

*- EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

*** - Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 2871	HL 3616				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(b), Peak output power			
Test procedure: Public notice DA 00-705			
Test mode: Compliance	Verdict: PASS		
Date & Time: 1/21/2010 9:43:40 AM			
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.5.1 Field strength of carrier at low frequency and Unom, vertical antenna polarization

06:56:09 JAN 17, 2010


ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 905.48 MHz
125.79 dBµV/m

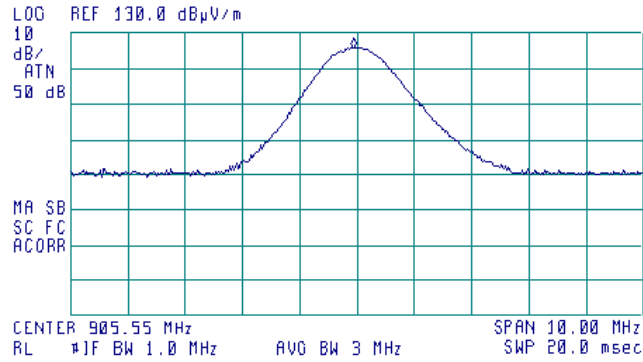

Plot 7.5.2 Field strength of carrier at low frequency and Unom, horizontal antenna polarization

07:08:17 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 905.48 MHz
121.95 dBµV/m

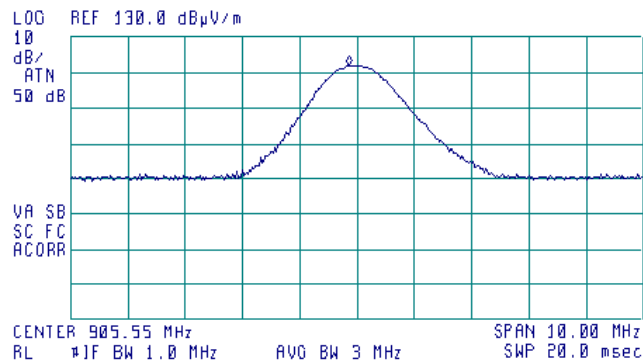




HERMON LABORATORIES

Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/21/2010 9:43:40 AM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.5.3 Field strength of carrier at mid frequency and Unom, vertical antenna polarization

07:20:41 JAN 17, 2010


ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 915.03 MHz
124.99 dBµV/m

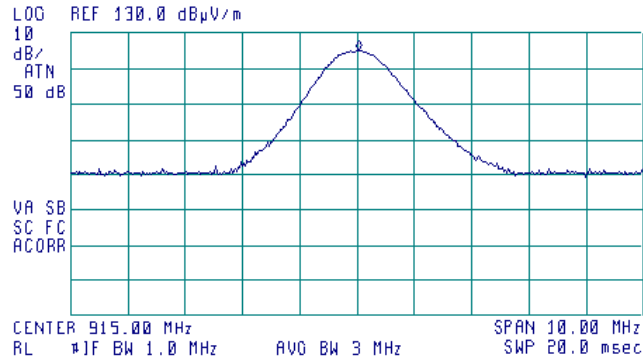

Plot 7.5.4 Field strength of carrier at mid frequency and Unom, horizontal antenna polarization

07:11:22 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 915.05 MHz
122.68 dBµV/m

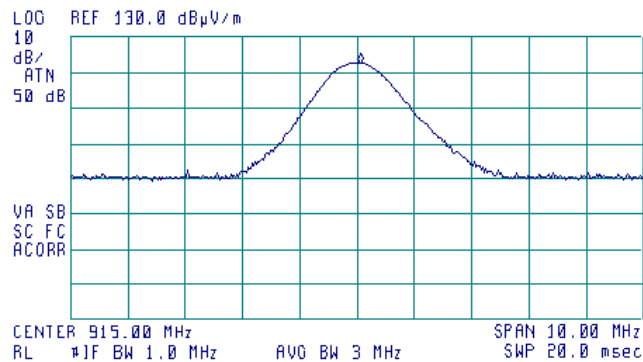




HERMON LABORATORIES

Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/21/2010 9:43:40 AM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.5.5 Field strength of carrier at high frequency and Unom, vertical antenna polarization

07:18:07 JAN 17, 2010


ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 924.78 MHz
124.96 dBµV/m

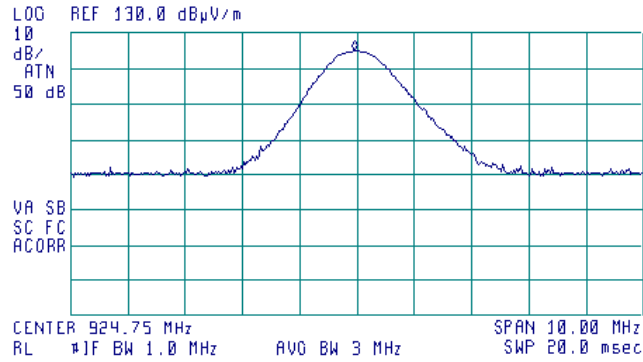

Plot 7.5.6 Field strength of carrier at high frequency and Unom, horizontal antenna polarization

07:14:14 JAN 17, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 924.78 MHz
123.01 dBµV/m

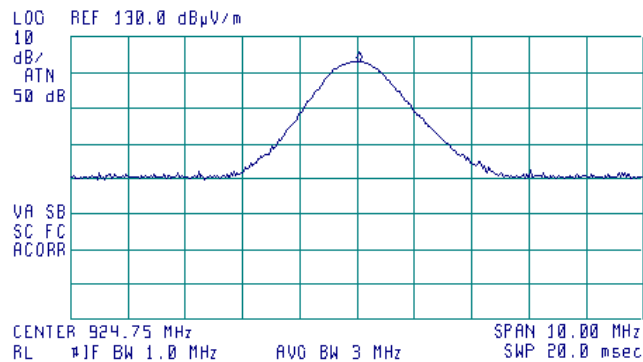



Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/21/2010 12:34:48 PM		
Temperature: 22.0 °C	Air Pressure: 1020 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

7.6 Band edge radiated emissions

7.6.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μV/m)	
		Peak	Average
902.0 – 928.0	20.0	74.0	54.0
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.6.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.6.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.6.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.6.2 and the associated plots and referenced to the highest emission level measured within the authorized band.
- 7.6.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.6.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.6.1 Band edge emission test setup





HERMON LABORATORIES

Test specification:		Section 15.247(c), Emissions at band edges	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/21/2010 12:34:48 PM		
Temperature: 22.0 °C	Air Pressure: 1020 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

Table 7.6.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
DETECTOR USED: Peak
MODULATION: FSK
MODULATING SIGNAL: PRBS
BIT RATE: 60 kbps
TRANSMITTER OUTPUT POWER: Maximum
RESOLUTION BANDWIDTH: ≥ 1% of the span
VIDEO BANDWIDTH: ≥ RBW

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled						
905.210	63.50	85.50	22.00	20.0	2.00	Pass
925.053	66.67	87.50	20.83	20.0	0.83	Pass
Frequency hopping enabled						
904.819	64.00	85.50	21.50	20.0	1.50	Pass
925.120	66.33	87.50	21.17	20.0	1.17	Pass

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 0337	HL 1424	HL 2953				
---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/21/2010 12:34:48 PM		
Temperature: 22.0 °C	Air Pressure: 1020 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

Plot 7.6.1 The highest emission level within the assigned band at low carrier frequency

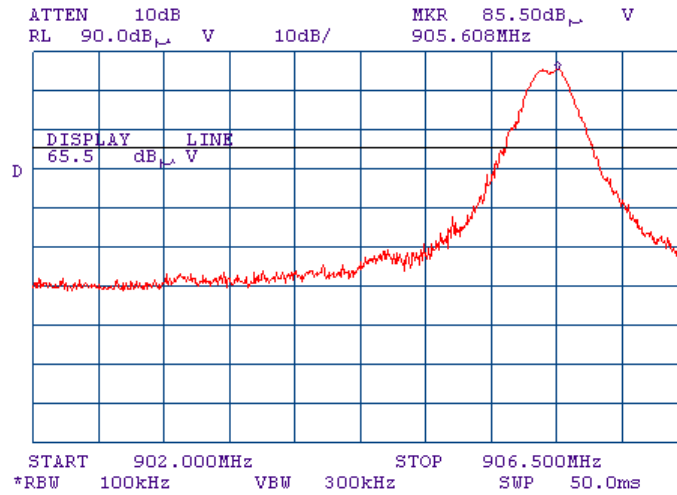

Plot 7.6.2 The highest emission level within the assigned band at high carrier frequency

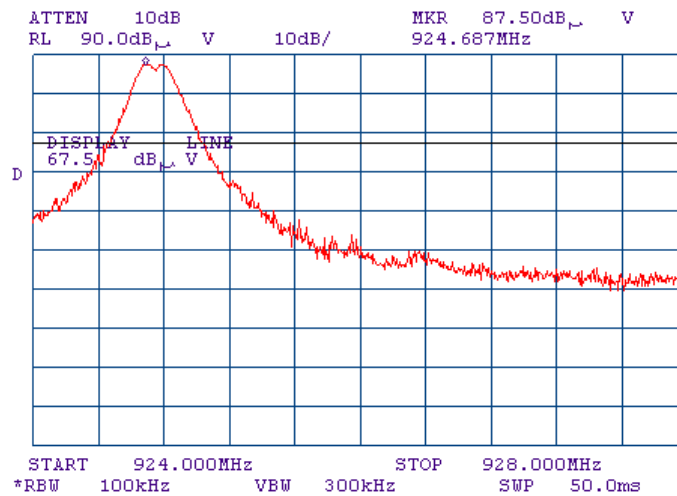





HERMON LABORATORIES

Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/21/2010 12:34:48 PM		
Temperature: 22.0 °C	Air Pressure: 1020 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

Plot 7.6.3 The highest band edge emission at low carrier frequency with hopping function disabled

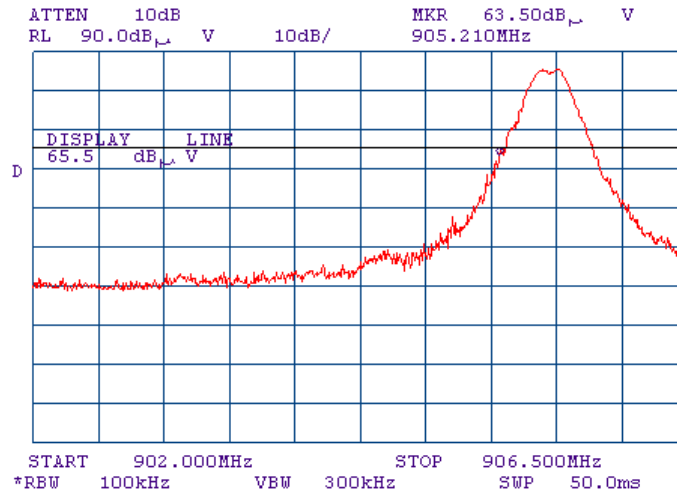

Plot 7.6.4 The highest band edge emission at high carrier frequency with hopping function disabled

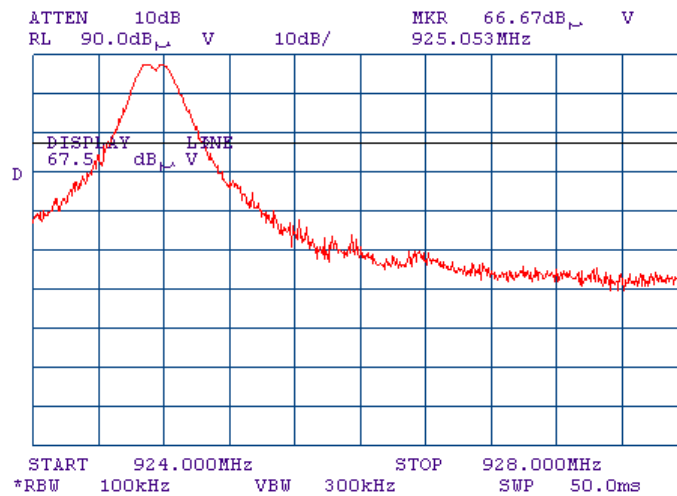





HERMON LABORATORIES

Test specification:	Section 15.247(c), Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	1/21/2010 12:34:48 PM		
Temperature: 22.0 °C	Air Pressure: 1020 hPa	Relative Humidity: 51 %	Power Supply: Battery
Remarks:			

Plot 7.6.5 The highest band edge emission at low carrier frequency with hopping function enabled

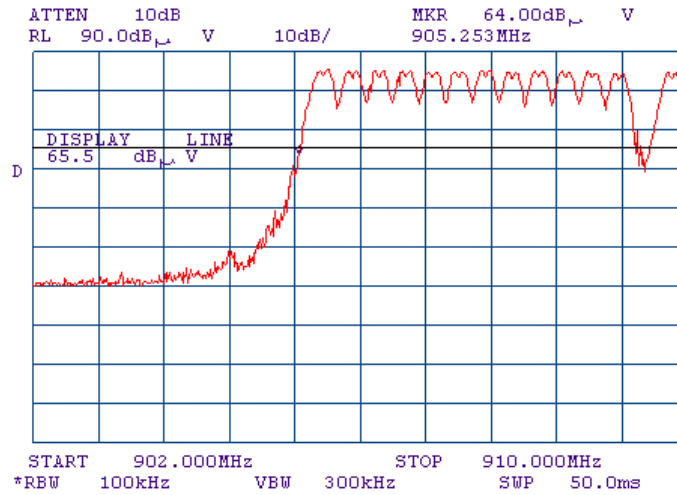

Plot 7.6.6 The highest band edge emission at high carrier frequency with hopping function enabled

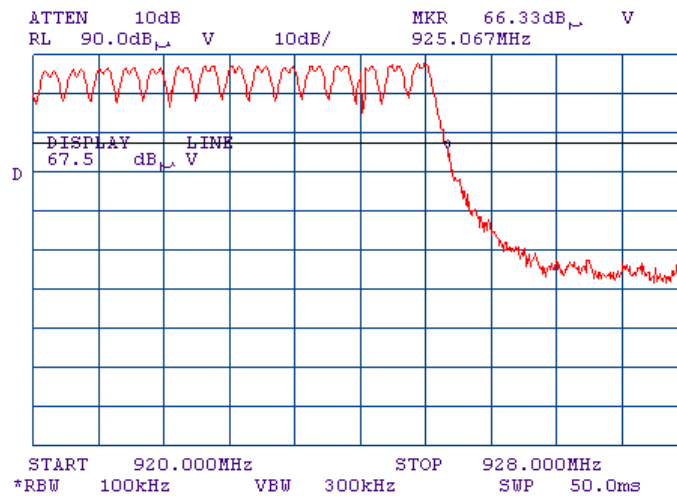



Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

7.7 Field strength of spurious emissions

7.7.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 – 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.

7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.7.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.7.3.1 The EUT was set up as shown in Figure 7.7.2, energized and the performance check was conducted.

7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.7.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Figure 7.7.1 Setup for spurious emission field strength measurements below 30 MHz


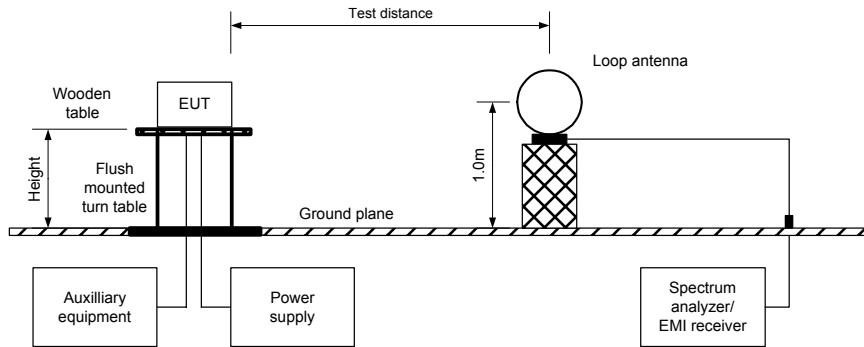


Figure 7.7.2 Setup for spurious emission field strength measurements above 30 MHz



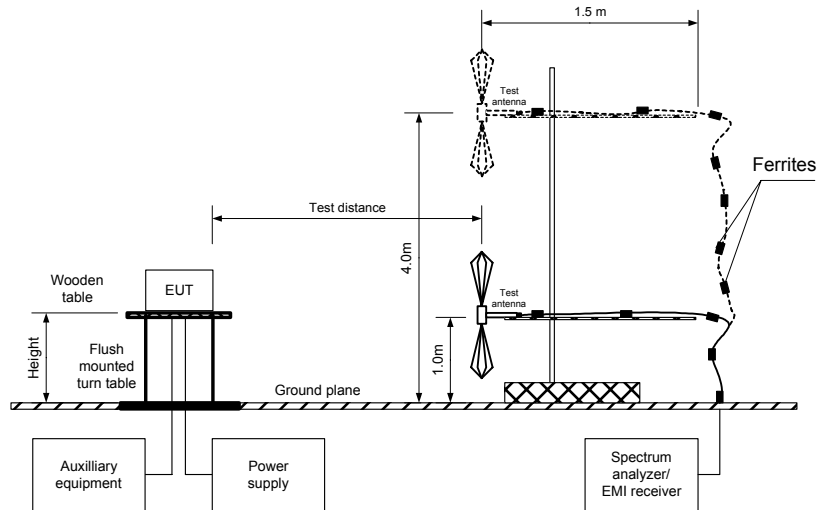

HERMON LABORATORIES

Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Table 7.7.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY RANGE: 902 - 928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 10000 MHz
 TEST DISTANCE: 3 m
 MODULATION: FHSS
 BIT RATE: 60 kbps
 MODULATING SIGNAL: PRBS
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)
 FREQUENCY HOPPING: Disabled

Frequency MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
1811.170	75.59	Vert	1.3	350	125.1	49.51	20.0	29.51	Pass
6339.083	59.17	Vert	1.05	55		65.93		45.93	
7243.942	59.50	Vert	1.0	0		65.60		45.60	
Mid carrier frequency									
1829.900	74.48	Vert	1.3	350	126.0	51.52	20.0	31.52	Pass
5489.630	59.00	Vert	1.0	76		67.00		47.00	
6405.275	59.17	Vert	1.05	55		66.83		46.83	
High carrier frequency									
1849.580	74.26	Vert	1.3	350	125.7	51.44	20.0	31.44	Pass
5548.130	56.33	Vert	1.1	90		69.37		49.37	
6473.508	61.17	Vert	1.05	55		64.53		44.53	

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

Test specification:		Section 15.247(c), Radiated spurious emissions			
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode:		Compliance		Verdict: PASS	
Date & Time:		2/4/2010 10:05:51 AM			
Temperature: 23.2 °C		Air Pressure: 1023 hPa		Relative Humidity: 49 %	
Power Supply: Battery					
Remarks:					

Table 7.7.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 10000 MHz
 TEST DISTANCE: 3 m
 MODULATION: FHSS
 MODULATING SIGNAL: PRBS
 BIT RATE: 60 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 FREQUENCY HOPPING: Disabled

frequency MHz	Antenna		Azimuth degrees	Peak field strength(VBW=3 MHz)			Average field strength(VBW=1 kHz****)				Verdict
	Polarization	height m		Measured dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured dB(µV/m)	Calculated dB(µV/m)	Limit, dB(µV/m)	Margin dB***	
Low carrier frequency											
1405.250	Vert	1.0	0	63.47	74.0	-10.53	40.88	15.07	54.0	-38.93	Pass
2716.575	Vert	1.0	28	59.80	74.0	-14.20	56.88	31.07	54.0	-22.93	
3622.170	Vert	1.35	230	71.00	74.0	-3.00	69.33	43.52	54.0	-10.48	
4527.880	Vert	1.45	180	68.50	74.0	-5.50	62.83	37.02	54.0	-16.98	
5433.533	Vert	1.0	330	58.00	74.0	-16.00	56.33	30.52	54.0	-23.48	
Mid carrier frequency											
1401.580	Vert	1.0	0	63.35	74.0	-10.65	46.84	21.03	54.0	-32.97	Pass
2744.975	Vert	1.0	28	60.99	74.0	-13.01	60.26	34.45	54.0	-19.55	
3660.130	Vert	1.35	230	71.33	74.0	-2.67	70.17	44.36	54.0	-9.64	
4575.220	Vert	1.45	0	68.17	74.0	-5.83	62.17	36.36	54.0	-17.64	
7320.330	Vert	1.0	0	64.67	74.0	-9.33	63	37.19	54.0	-16.81	
High carrier frequency											
1403.650	Vert	1.0	0	63.69	74.0	-10.31	44.38	18.57	54.0	-35.43	Pass
2774.250	Vert	1.0	28	64.05	74.0	-9.95	63.46	37.65	54.0	-16.35	
3698.820	Vert	1.55	230	72.83	74.0	-1.17	70.83	45.02	54.0	-8.98	
4623.850	Vert	1.45	0	68.33	74.0	-5.67	63.83	38.02	54.0	-15.98	
7398.250	Vert	1.05	0	66.83	74.0	-7.17	65.83	40.02	54.0	-13.98	

Table 7.7.4 Average factor calculation for FHSS modulation

Transmission pulse		Average factor, dB
Duration, ms	Period, ms	
5.12	420	-25.81

*- Average factor was calculated as follows

for pulse train shorter than 100 ms: $Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$

for pulse train longer than 100 ms: $Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$



Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Table 7.7.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: FHSS
 MODULATING SIGNAL: PRBS
 BIT RATE: 60 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 FREQUENCY HOPPING: Disabled

Frequency MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB'				
Low carrier frequency								
405.6475	43.5	38.2	46.0	-7.80	Vert	1.0	116	Pass
407.3449	55.0	15.6	46.0	-30.40	Vert	1.0	0	
608.4587	45.6	40.0	46.0	-6.00	Vert	1.0	206	
963.5435	47.8	38.2	54.0	-15.80	Vert	1.4	0	
Mid carrier frequency								
405.6475	43.8	37.9	46.0	-8.10	Vert	1.0	116	Pass
407.3449	55.0	15.6	46.0	-30.40	Vert	1.0	0	
608.4587	45.8	40.0	46.0	-6.00	Vert	1.0	206	
968.3080	52.3	45.4	54.0	-8.60	Vert	1.4	20	
High carrier frequency								
405.6475	43.6	38.1	46.0	-7.90	Vert	1.0	116	Pass
407.3449	55.0	15.6	46.0	-30.40	Vert	1.0	0	
608.4587	46.3	40.5	46.0	-5.50	Vert	1.0	206	
978.0528	45.0	37.1	54.0	-16.90	Vert	1.4	22	

*- Margin = Measured emission - specification limit.
 **- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions				
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4				
Test mode:	Compliance	Verdict:		PASS	
Date & Time:	2/4/2010 10:05:51 AM				
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery		
Remarks:					

Table 7.7.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Harmonic distribution:

Harmonic #	Low carrier, MHz	Mid carrier, MHz	High carrier, MHz
1	905.55	915.00	924.75
2	1811.10	1830.00	1849.50
3	2716.65	2745.00	2774.25
4	3622.20	3660.00	3699.00
5	4527.75	4575.00	4623.75
6	5433.30	5490.00	5548.50
7	6338.85	6405.00	6473.25
8	7244.40	7320.00	7398.00
9	8149.95	8235.00	8322.75
10	9055.50	9150.00	9247.50

Legend:

Outside restricted band harmonic
Within restricted band harmonic

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 1424	HL 1984	HL 2909	HL 2870	HL 2871
HL 3616	HL 3883						

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and horizontal
 OPERATIONAL MODE: FHSS
 ANTENNA: External


23:06:13 JAN 25, 2010

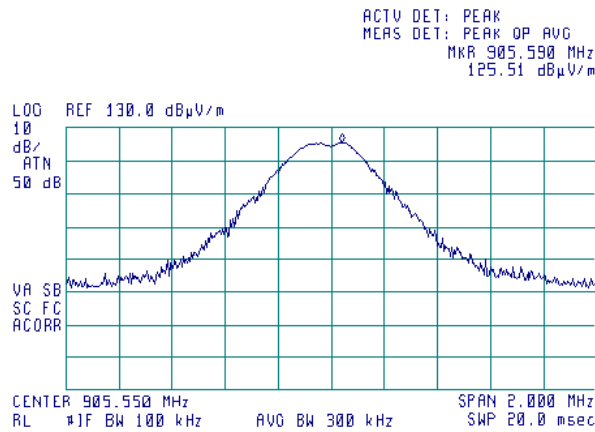

Plot 7.7.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and horizontal
 OPERATIONAL MODE: FHSS
 ANTENNA: External

23:04:04 JAN 25, 2010

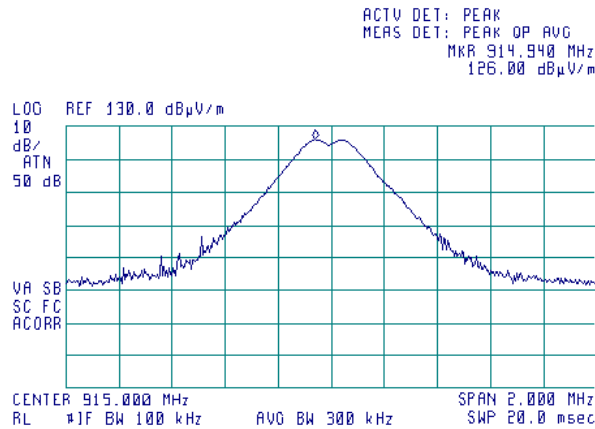



HERMON LABORATORIES


Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.3 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal
OPERATIONAL MODE: FHSS
ANTENNA: External

23:01:46 JAN 25, 2010

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 924.690 MHz
125.70 dBµV/m

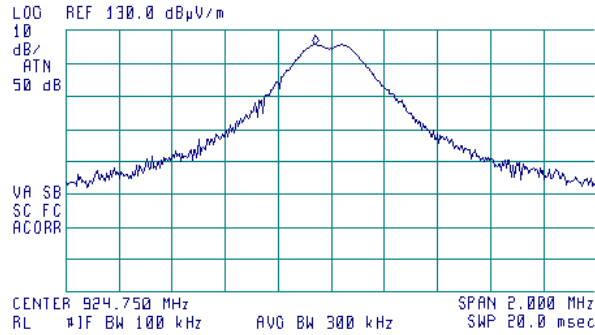




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.4 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: FHSS


23:41:05 JAN 26, 2010

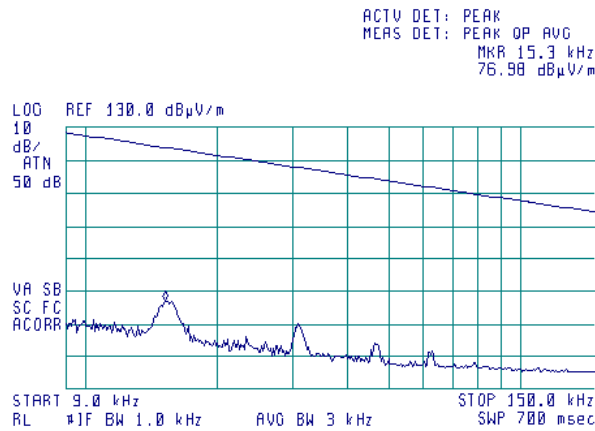

Plot 7.7.5 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: FHSS

23:46:48 JAN 26, 2010

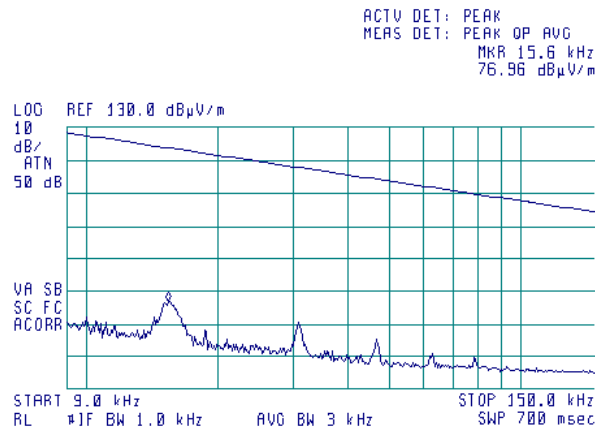




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.6 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: FHSS


23:48:34 JAN 26, 2010

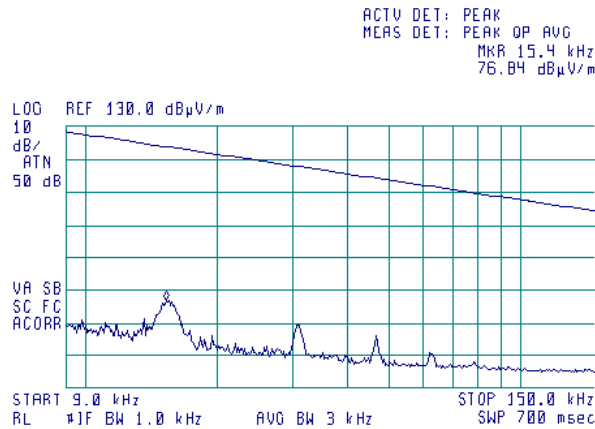

Plot 7.7.7 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: FHSS

23:43:15 JAN 26, 2010

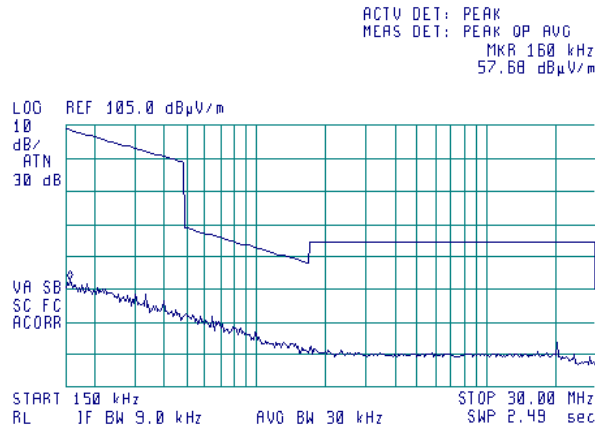




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.8 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: FHSS


23:45:05 JAN 26, 2010

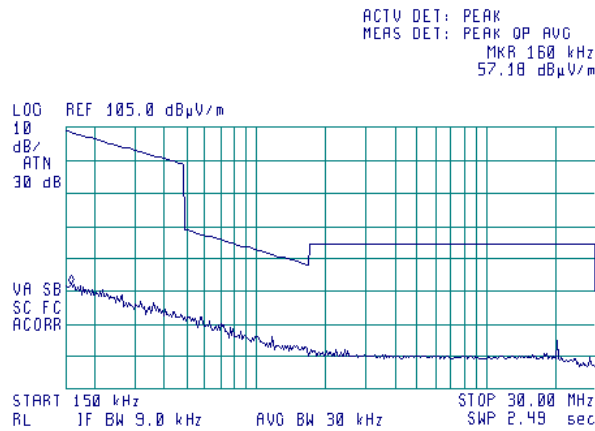

Plot 7.7.9 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: FHSS

23:50:11 JAN 26, 2010

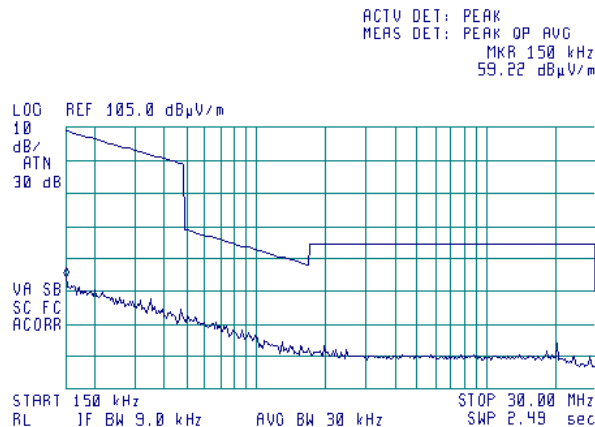




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.10 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: FHSS

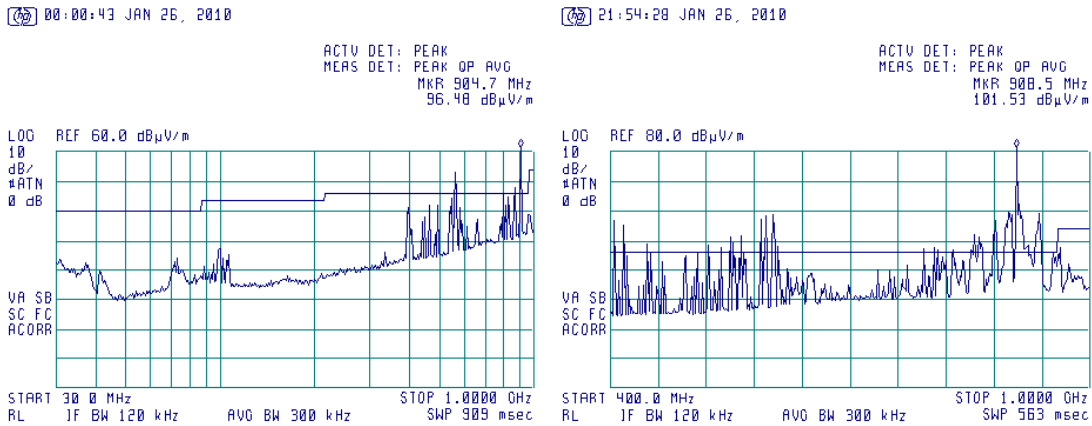

Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 905.55 MHz

Plot 7.7.11 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: FHSS

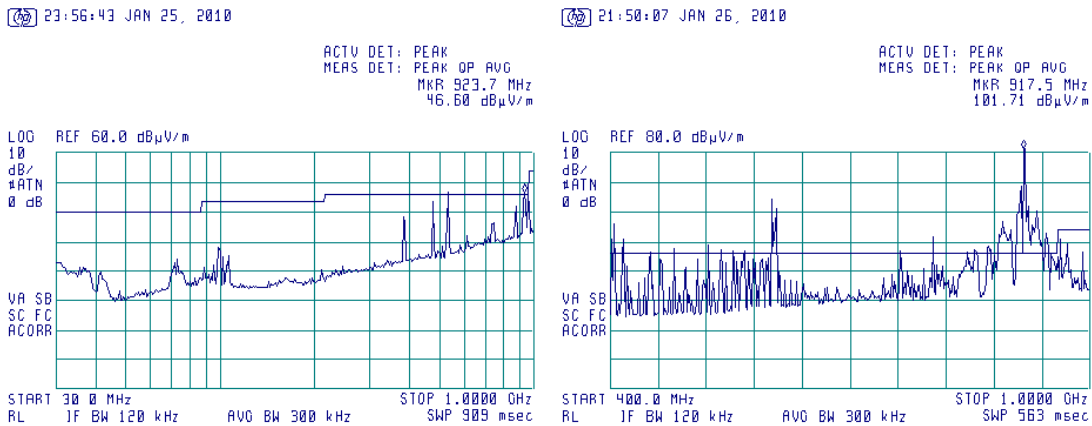

Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 915 MHz



HERMON LABORATORIES



Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.12 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS

23:52:02 JAN 25, 2010

21:45:13 JAN 26, 2010

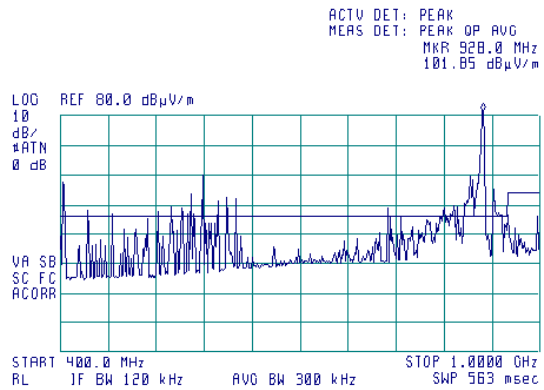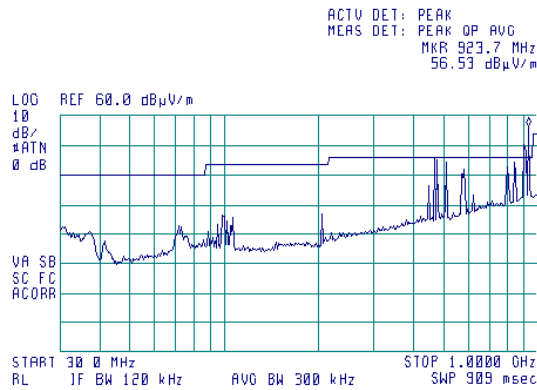

Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 924.75 MHz




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.13 Radiated emission measurements from 1000 to 2900 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak


18:51:52 JAN 24, 2010

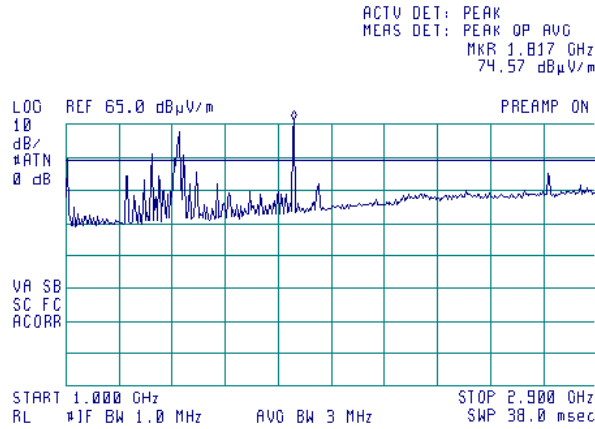

Plot 7.7.14 Radiated emission measurements from 1000 to 2900 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

19:18:09 JAN 24, 2010

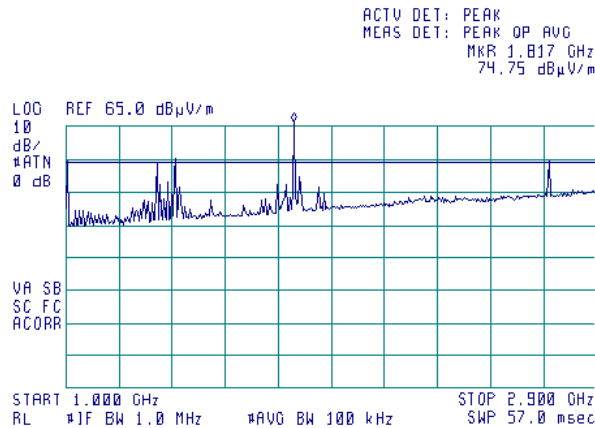




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.15 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak


19:00:27 JAN 24, 2010

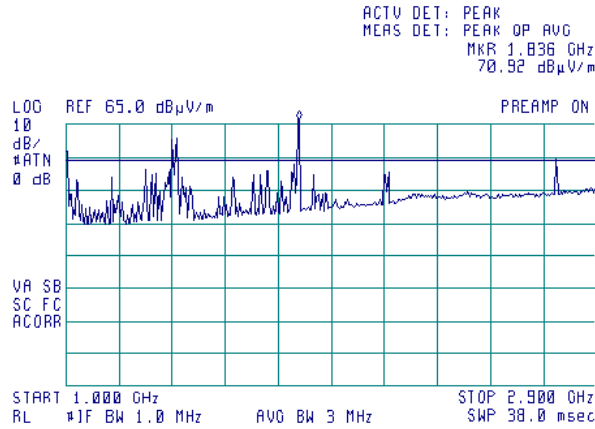

Plot 7.7.16 Radiated emission measurements from 1000 to 2900 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

19:05:11 JAN 24, 2010

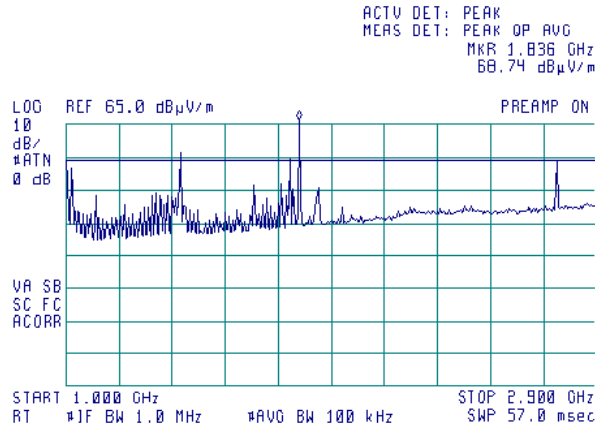




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.17 Radiated emission measurements from 1000 to 2900 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak


19:13:50 JAN 24, 2010

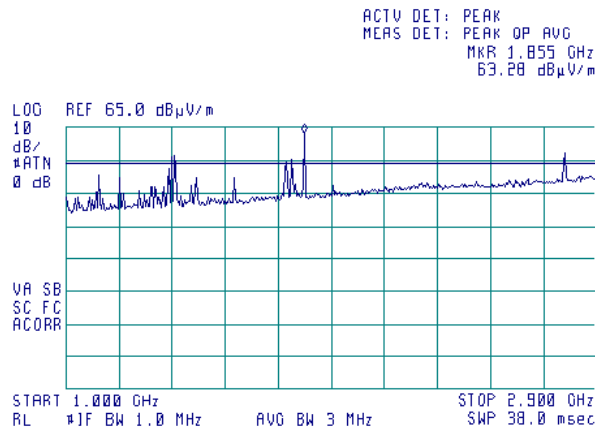

Plot 7.7.18 Radiated emission measurements from 1000 to 2900 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

19:09:57 JAN 24, 2010

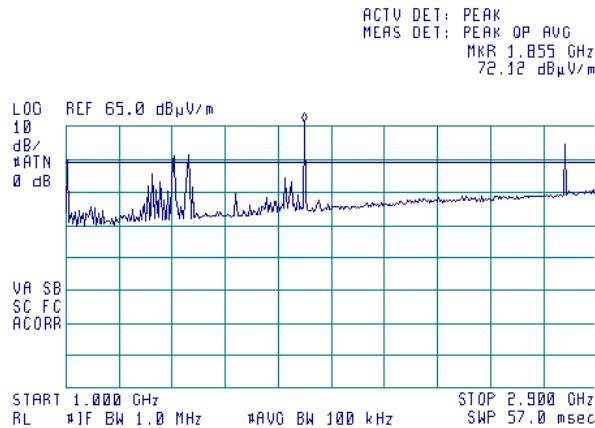




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.19 Radiated emission measurements at 1.405 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak


23:54:38 JAN 24, 2010

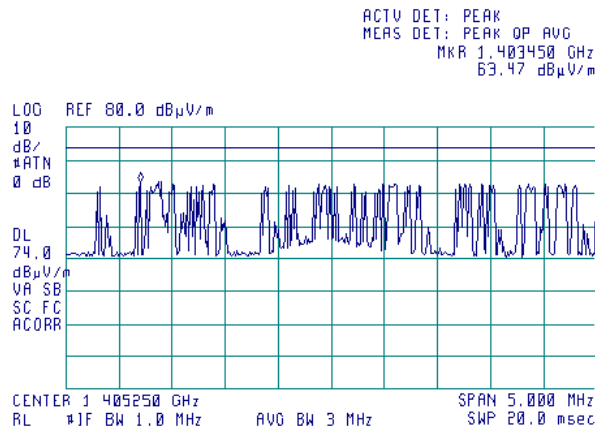

Plot 7.7.20 Radiated emission measurements at 1.405 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

23:46:27 JAN 24, 2010

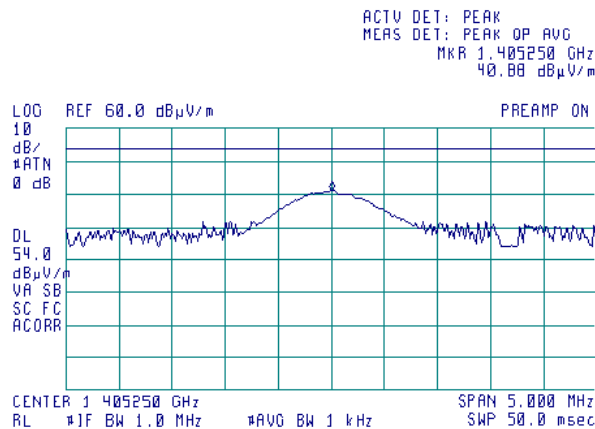




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.21 Radiated emission measurements at 1.401 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak


23:56:04 JAN 24, 2010

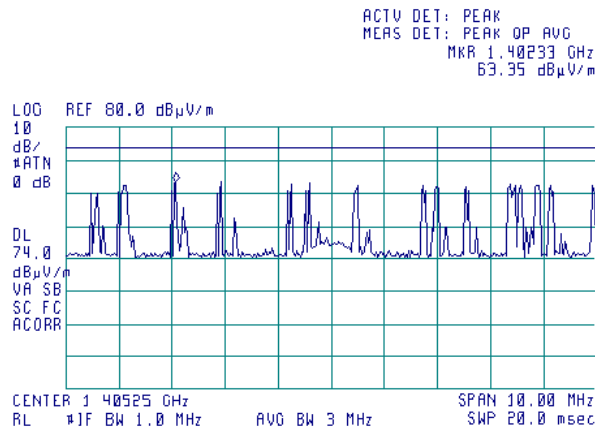

Plot 7.7.22 Radiated emission measurements at 1.401 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

00:00:58 JAN 25, 2010

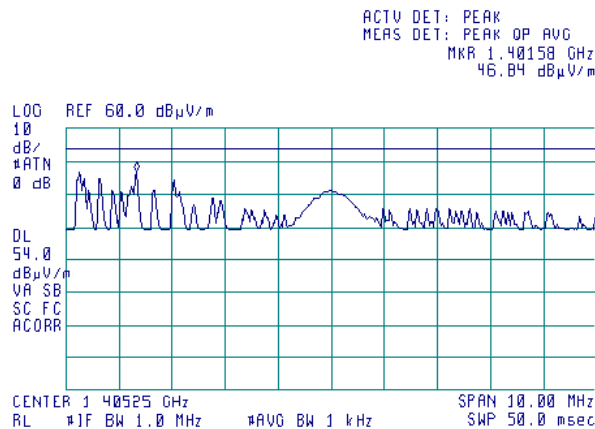




HERMON LABORATORIES

Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.23 Radiated emission measurements at 1.403 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak


00:22:35 JAN 25, 2010

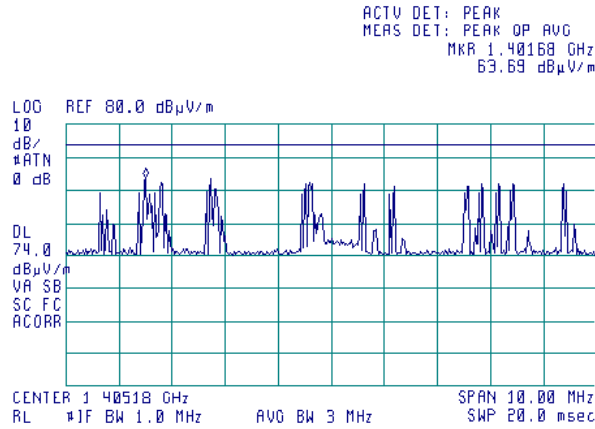

Plot 7.7.24 Radiated emission measurements at 1.403 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

00:24:17 JAN 25, 2010

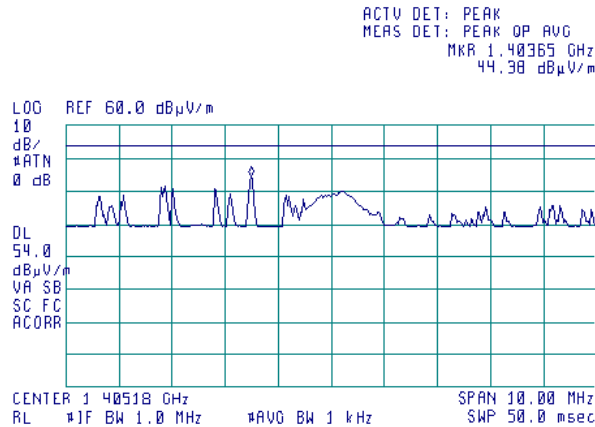




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.25 Radiated emission measurements at 1.448GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak


00:19:15 JAN 25, 2010

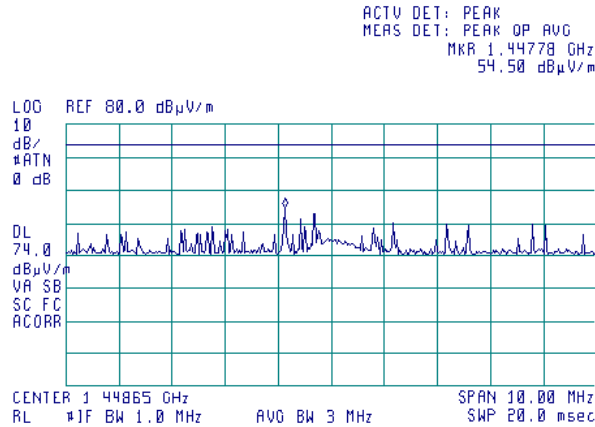

Plot 7.7.26 Radiated emission measurements at 1.448 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

00:17:29 JAN 25, 2010

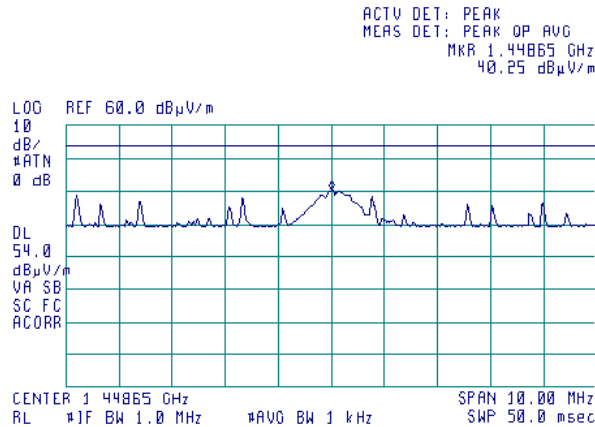




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.27 Radiated emission measurements from 2900 to 6000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: FHSS
DETECTOR: Peak

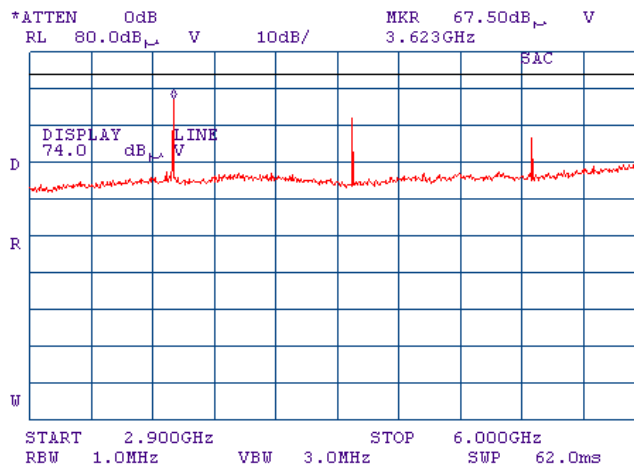

Plot 7.7.28 Radiated emission measurements from 2900 to 6000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: FHSS
DETECTOR: Average

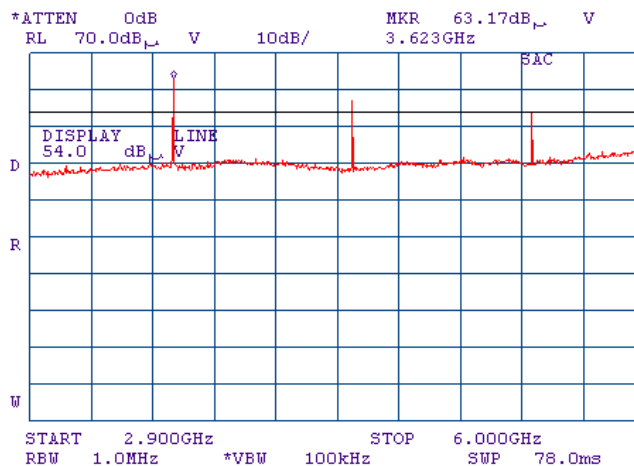




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.29 Radiated emission measurements from 2900 to 6000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

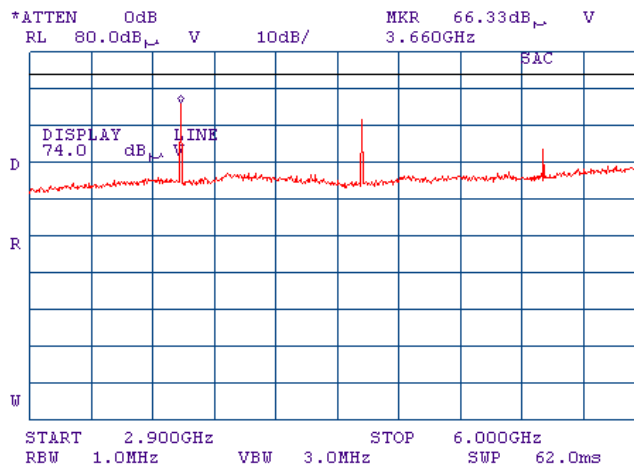

Plot 7.7.30 Radiated emission measurements from 2900 to 6000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

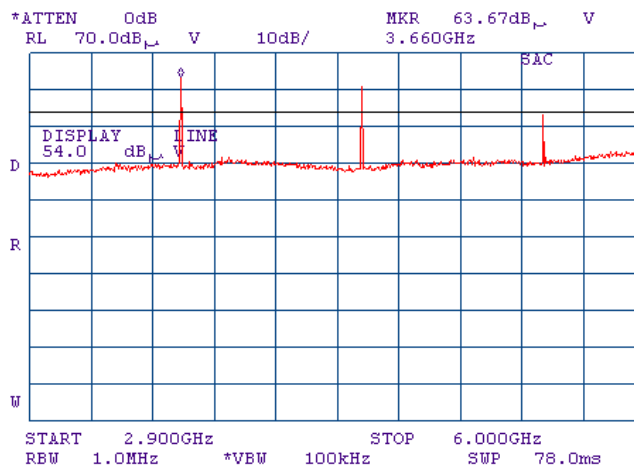




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.31 Radiated emission measurements from 2900 to 6000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

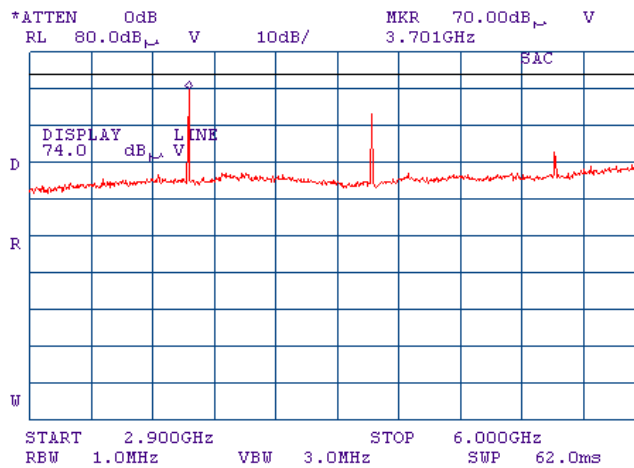

Plot 7.7.32 Radiated emission measurements from 2900 to 6000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

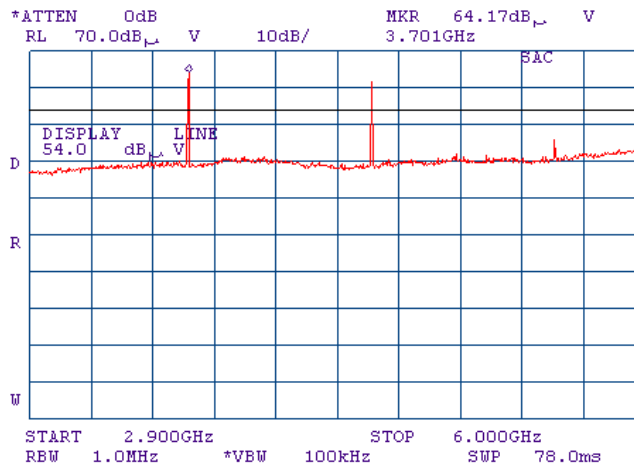




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.33 Radiated emission measurements from 6000 to 8000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

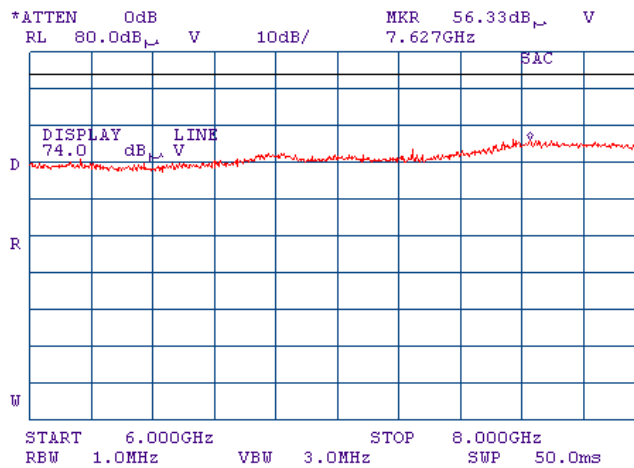

Plot 7.7.34 Radiated emission measurements from 6000 to 8000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

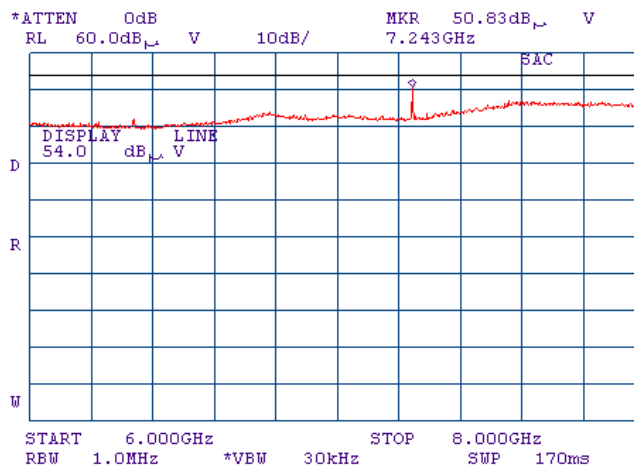




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.35 Radiated emission measurements from 6000 to 8000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

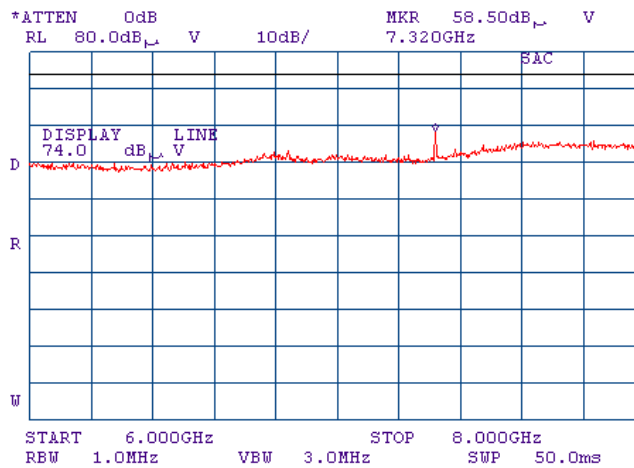

Plot 7.7.36 Radiated emission measurements from 6000 to 8000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

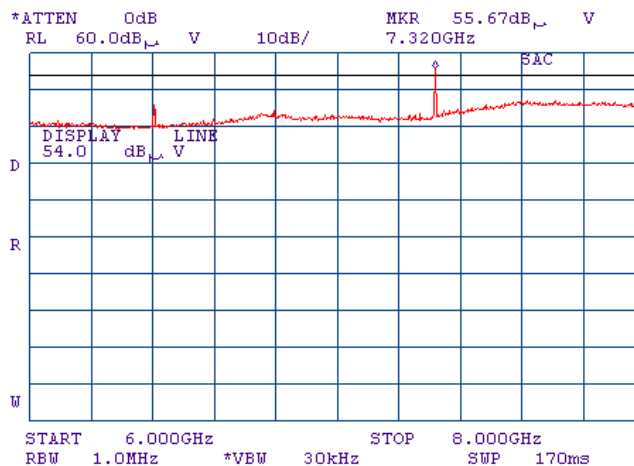




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.37 Radiated emission measurements from 6000 to 8000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

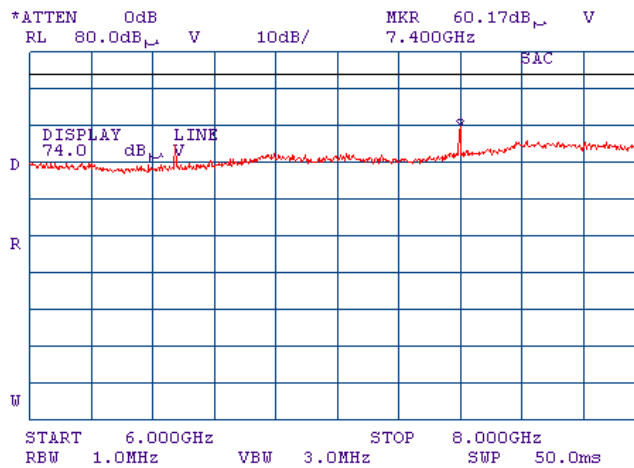

Plot 7.7.38 Radiated emission measurements from 6000 to 8000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

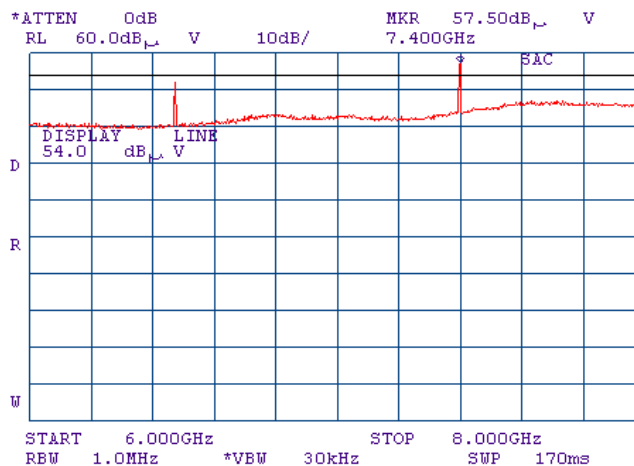




Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.39 Radiated emission measurements from 8000 to 10000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

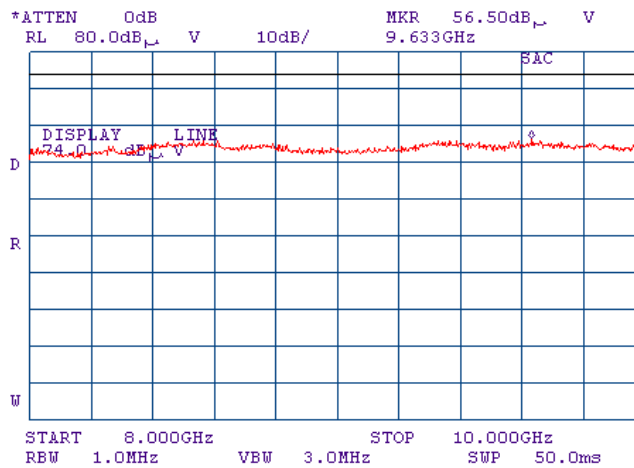

Plot 7.7.40 Radiated emission measurements from 8000 to 10000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

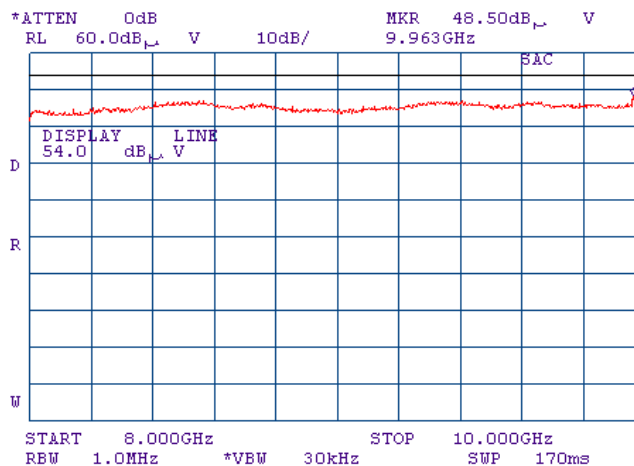




Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.41 Radiated emission measurements from 8000 to 10000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

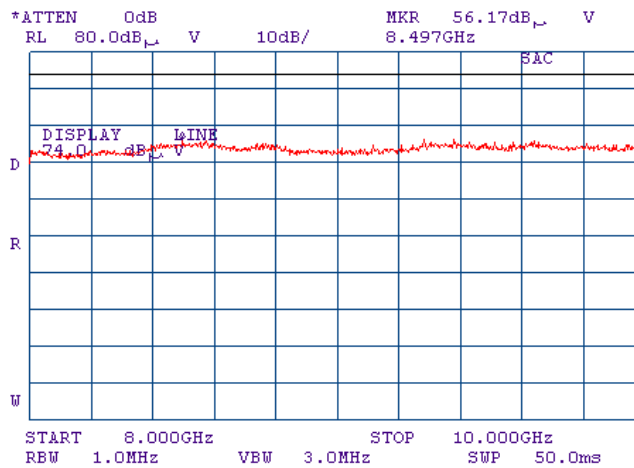

Plot 7.7.42 Radiated emission measurements from 8000 to 10000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

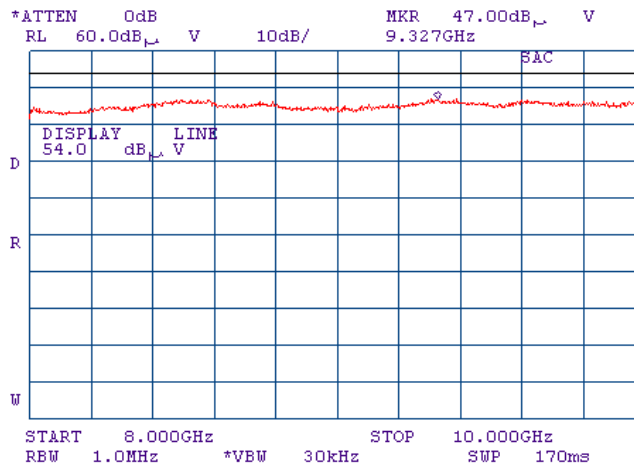




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.43 Radiated emission measurements from 8000 to 10000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

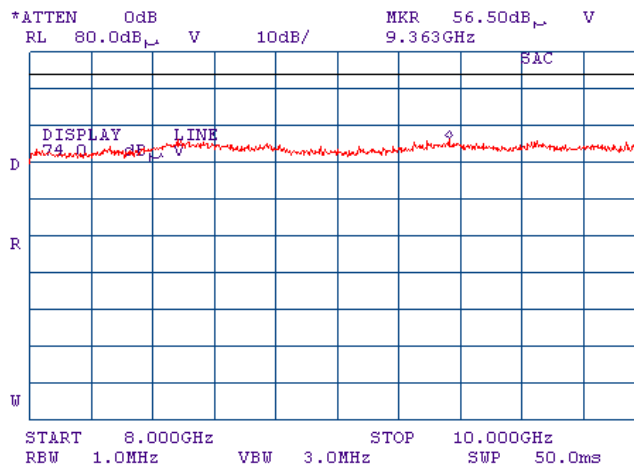

Plot 7.7.44 Radiated emission measurements from 8000 to 10000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

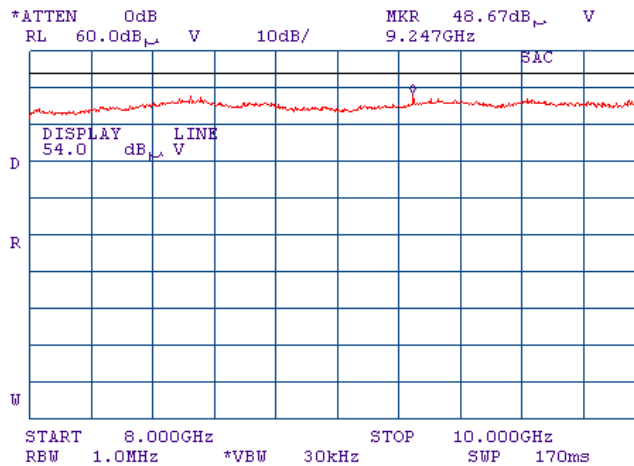




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.45 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS


21:07:25 JAN 24, 2010

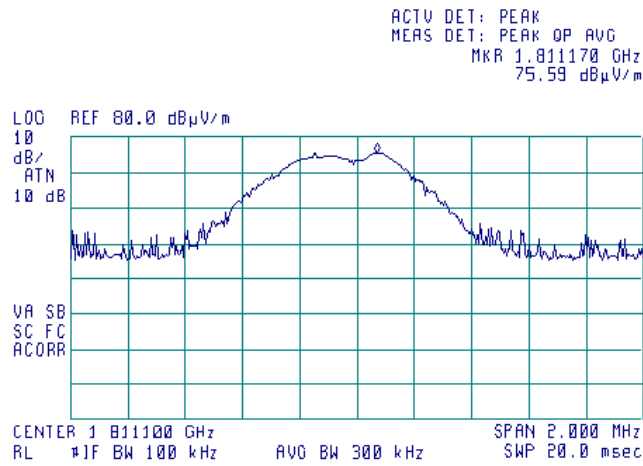

Plot 7.7.46 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS

21:11:15 JAN 24, 2010

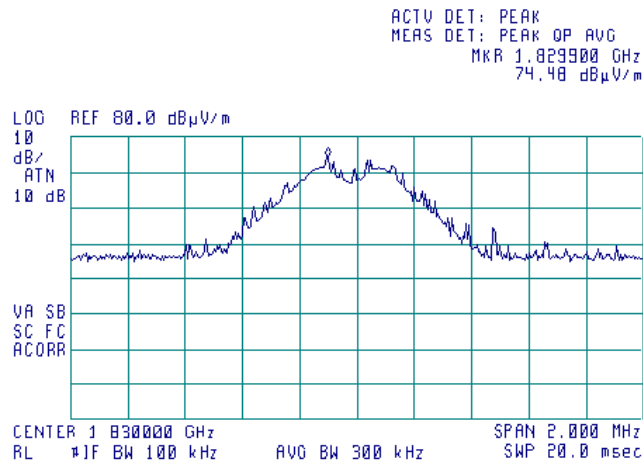



HERMON LABORATORIES


Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.47 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS

21:26:26 JAN 24, 2010

ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 1.849500 GHz
74.26 dBµV/m

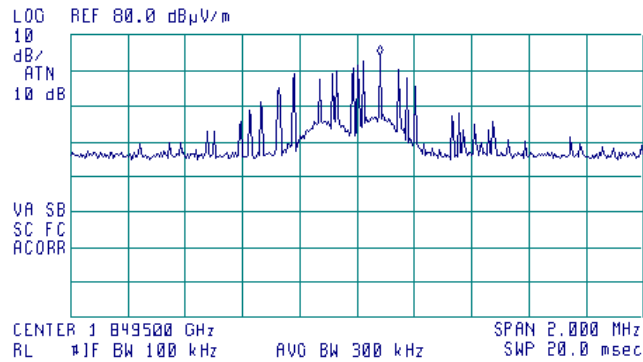




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions	
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode: Compliance	Verdict: PASS
Date & Time: 2/4/2010 10:05:51 AM	
Temperature: 23.2 °C	Air Pressure: 1023 hPa
Relative Humidity: 49 %	Power Supply: Battery
Remarks:	


Plot 7.7.48 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

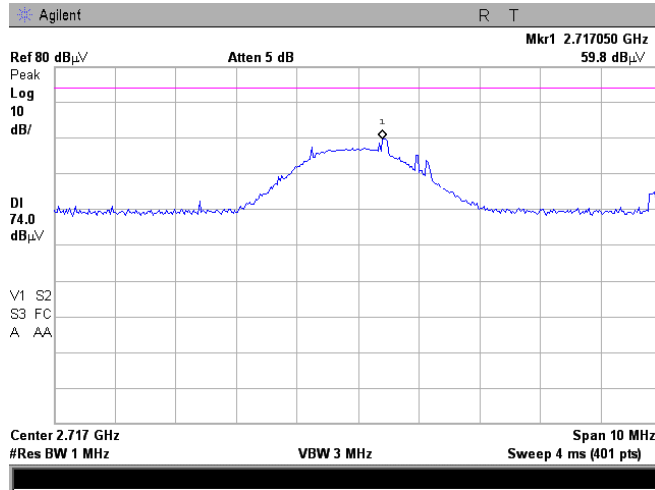

Plot 7.7.49 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

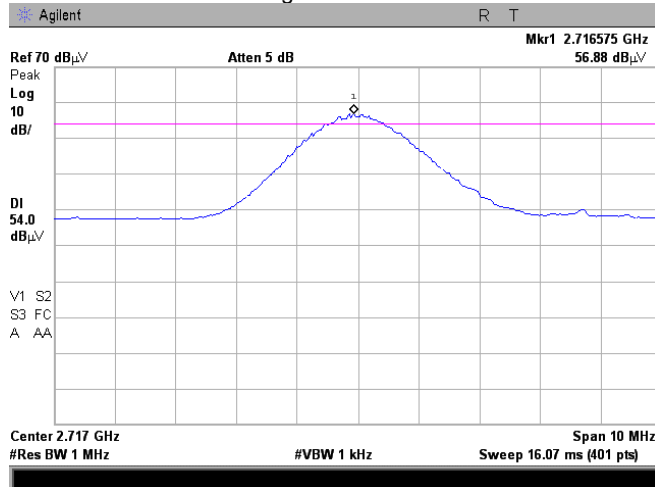




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.50 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

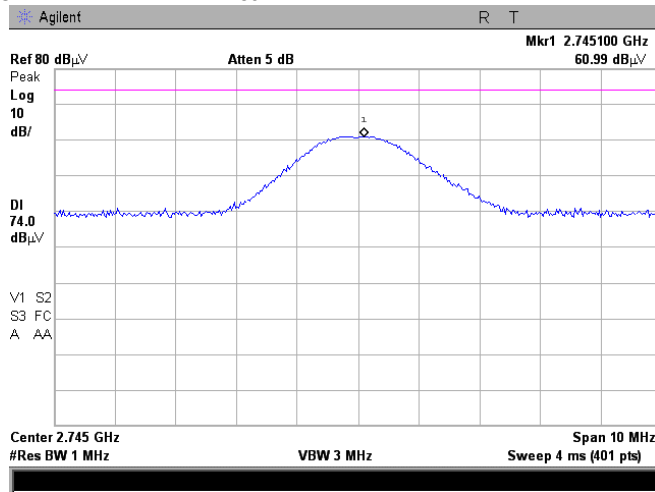

Plot 7.7.51 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

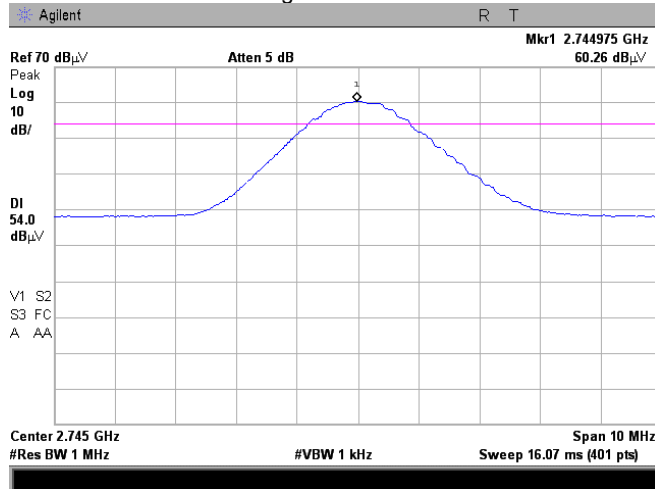




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.52 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

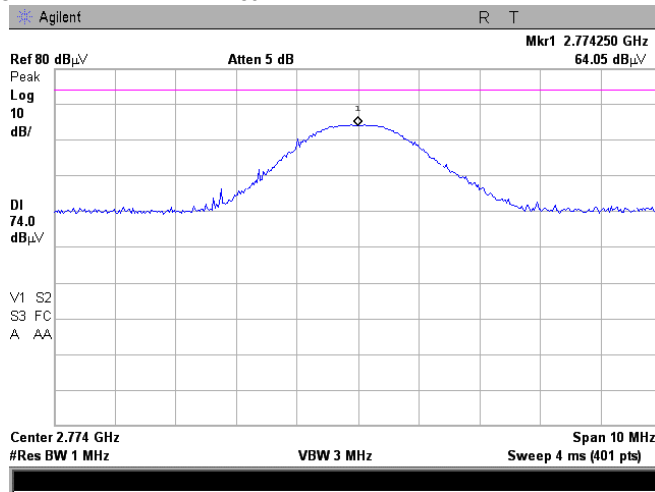

Plot 7.7.53 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

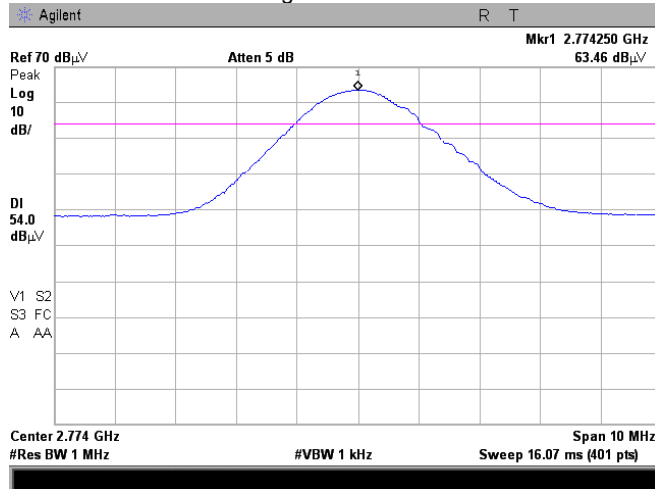




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.54 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

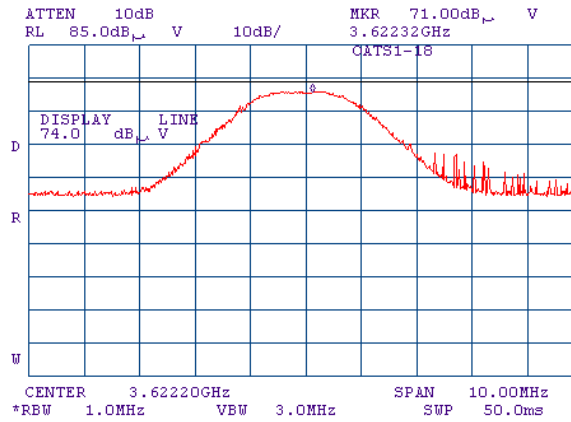

Plot 7.7.55 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

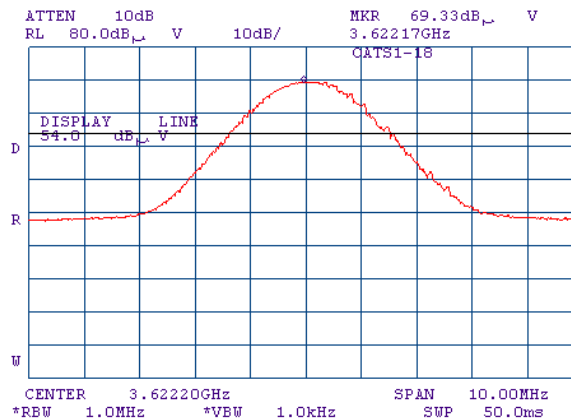




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.56 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS
DETECTOR: Peak

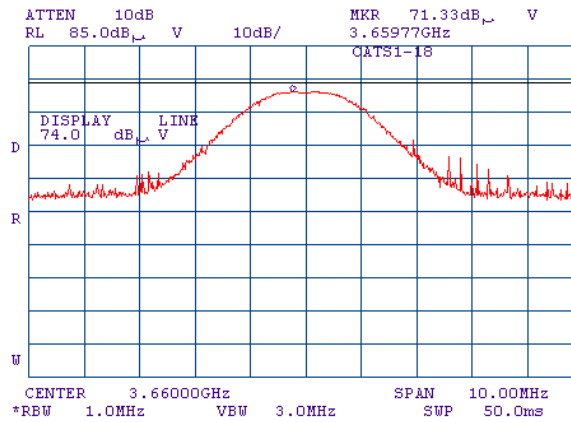

Plot 7.7.57 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS
DETECTOR: Average

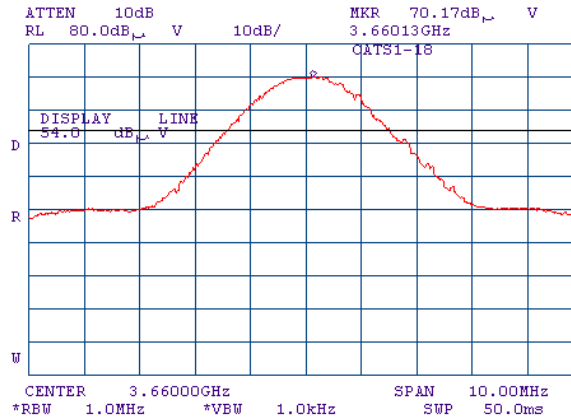




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.58 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS
DETECTOR: Peak

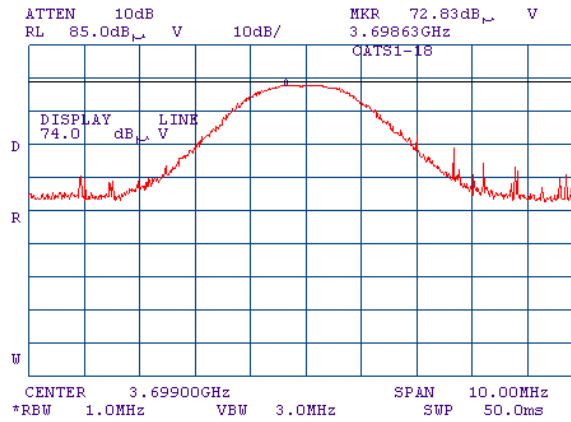

Plot 7.7.59 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS
DETECTOR: Average

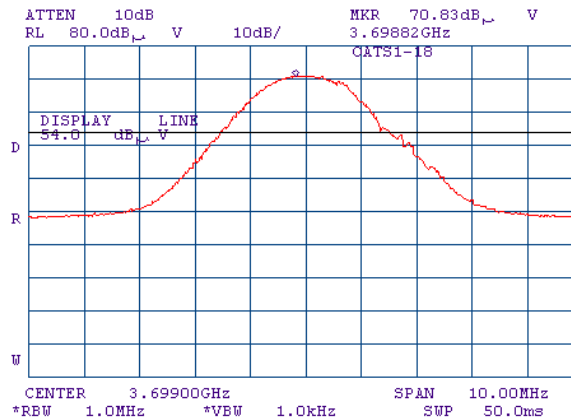




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.60 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

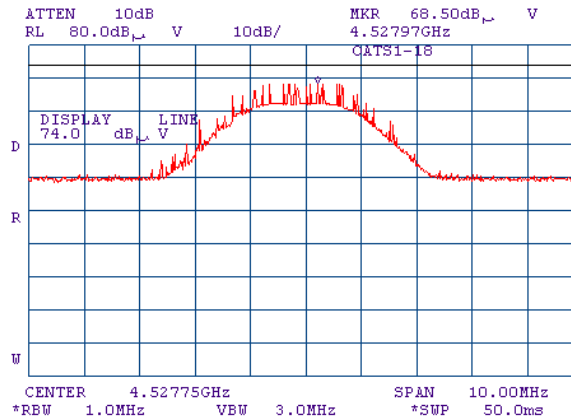

Plot 7.7.61 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

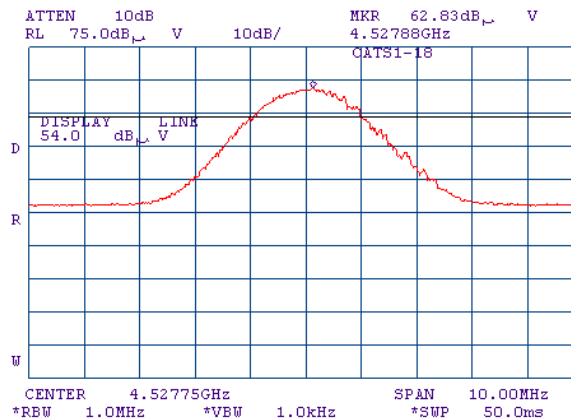




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.62 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

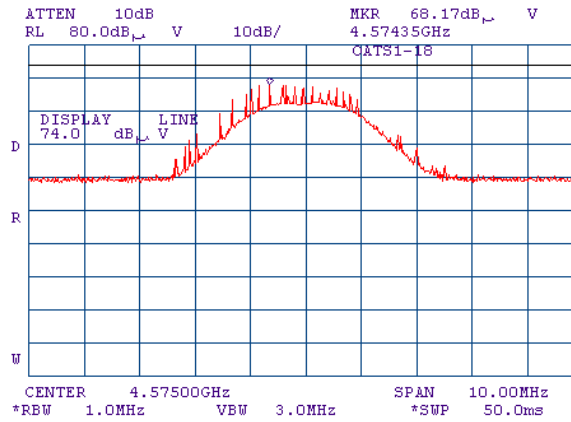

Plot 7.7.63 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

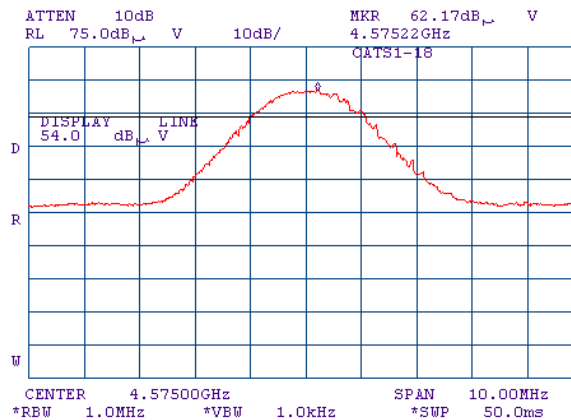




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.64 Radiated emission measurements at the fifth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

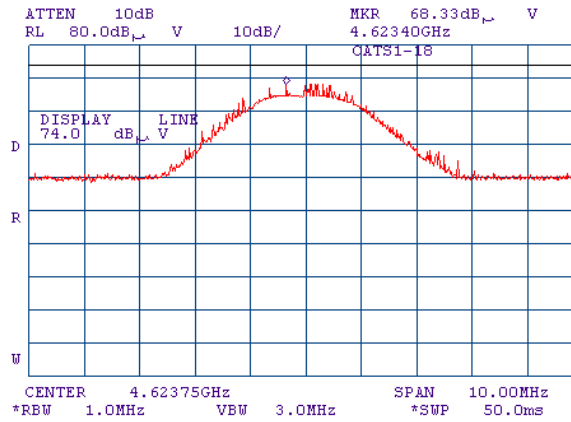

Plot 7.7.65 Radiated emission measurements at the fifth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

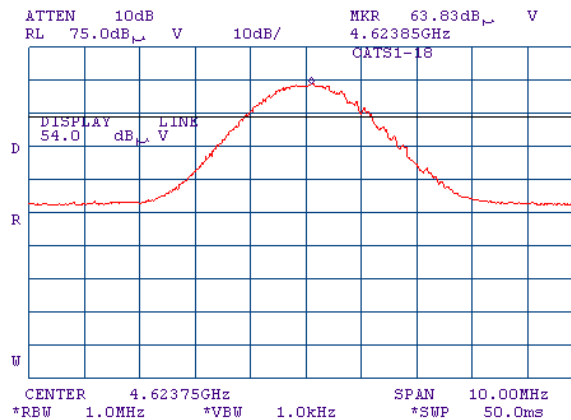




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.66 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

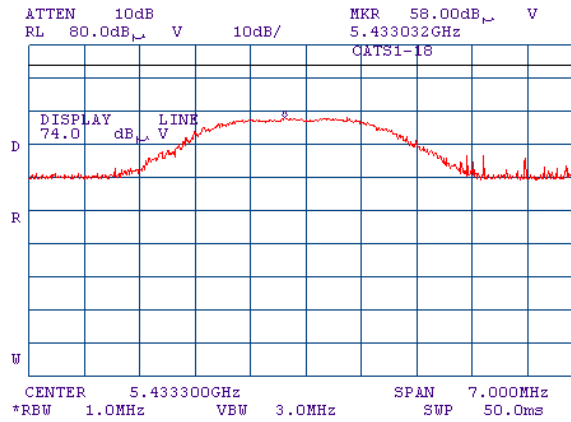

Plot 7.7.67 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

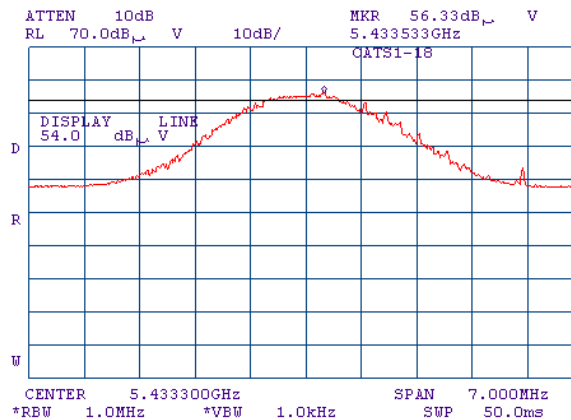




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.68 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS

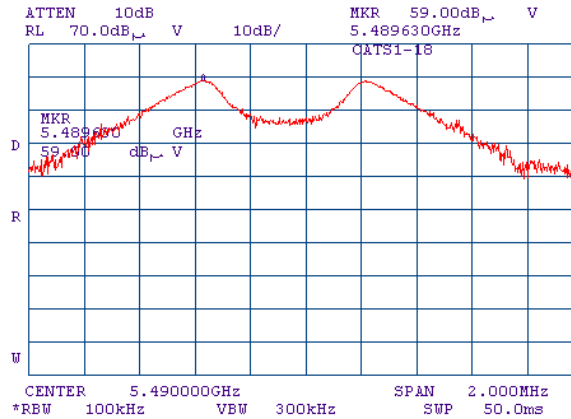

Plot 7.7.69 Radiated emission measurements at the sixth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS

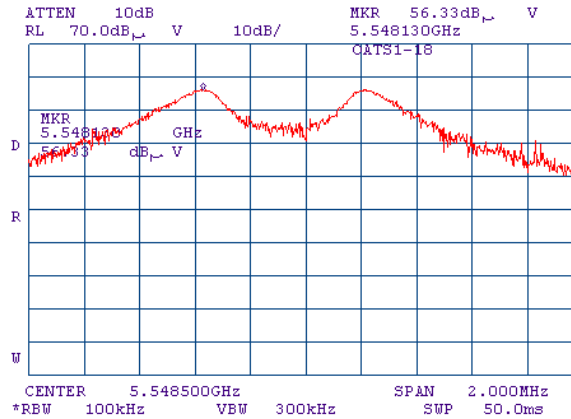




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.70 Radiated emission measurements at the seventh harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS

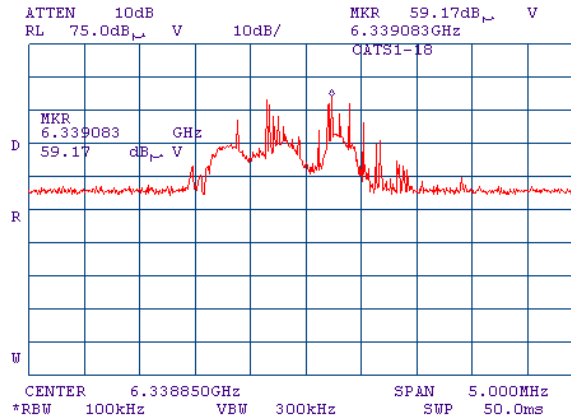

Plot 7.7.71 Radiated emission measurements at the seventh harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS

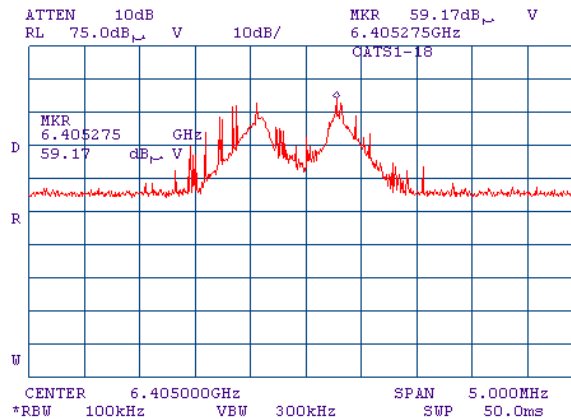




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.72 Radiated emission measurements at the seventh harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS

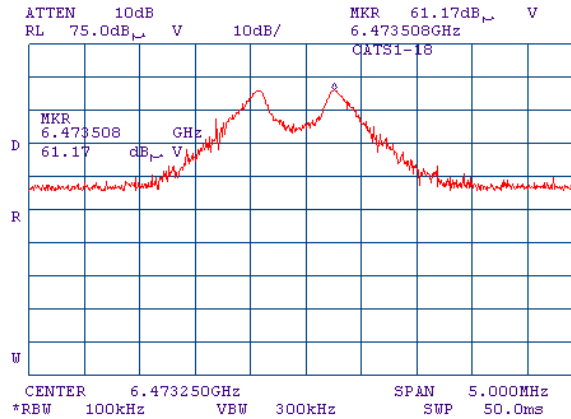

Plot 7.7.73 Radiated emission measurements at the eighth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS
DETECTOR: Peak

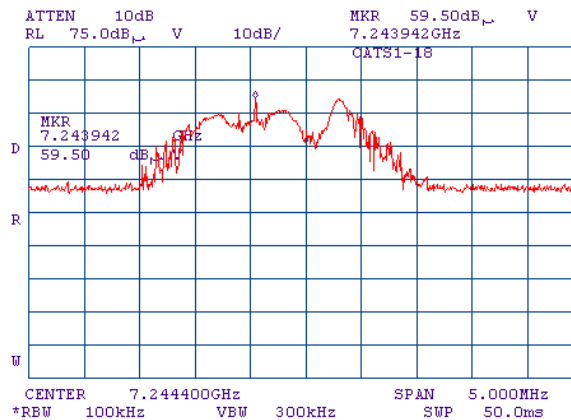




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.74 Radiated emission measurements at the eighth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS
DETECTOR: Peak

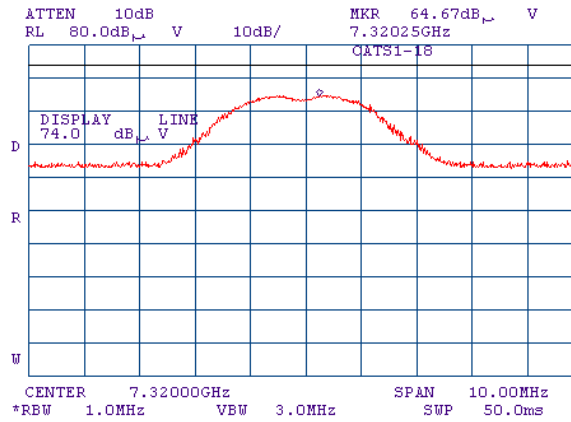

Plot 7.7.75 Radiated emission measurements at the eighth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
OPERATIONAL MODE: FHSS
DETECTOR: Average

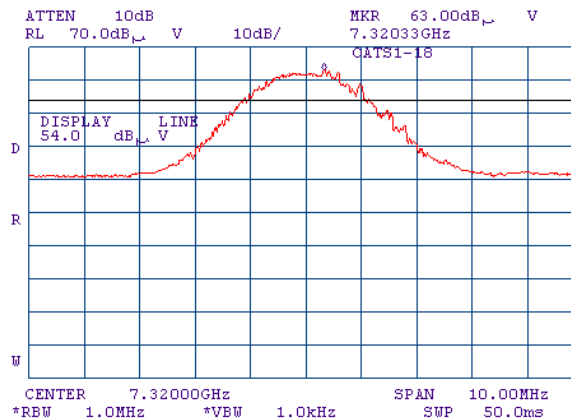




HERMON LABORATORIES

Test specification: Section 15.247(c), Radiated spurious emissions			
Test procedure: Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 2/4/2010 10:05:51 AM			
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.76 Radiated emission measurements at the eighth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

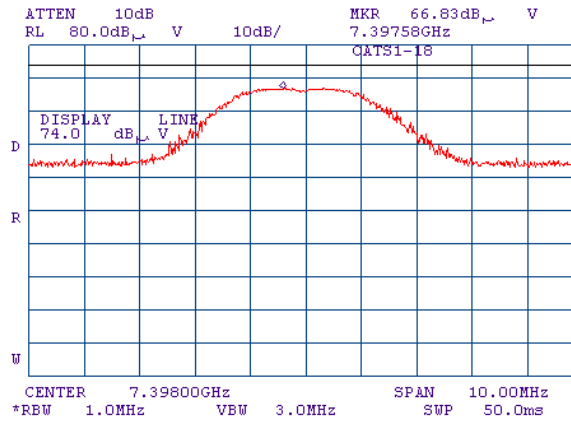

Plot 7.7.77 Radiated emission measurements at the eighth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

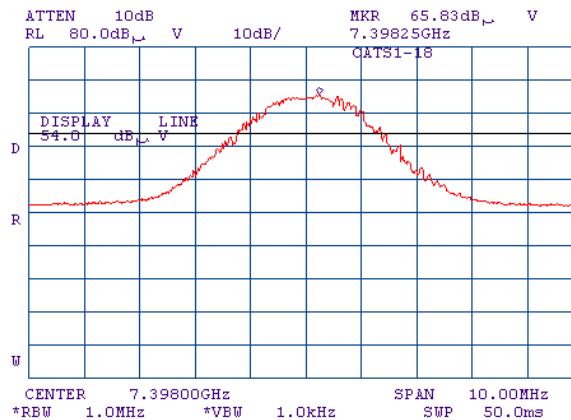




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.78 Radiated emission measurements at the ninth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

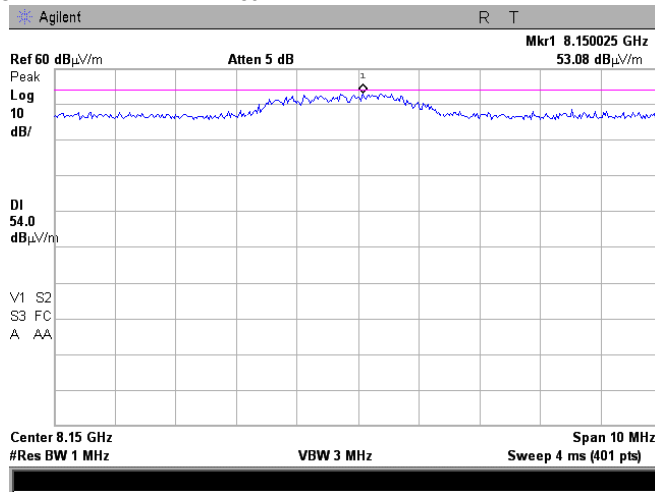

Plot 7.7.79 Radiated emission measurements at the ninth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

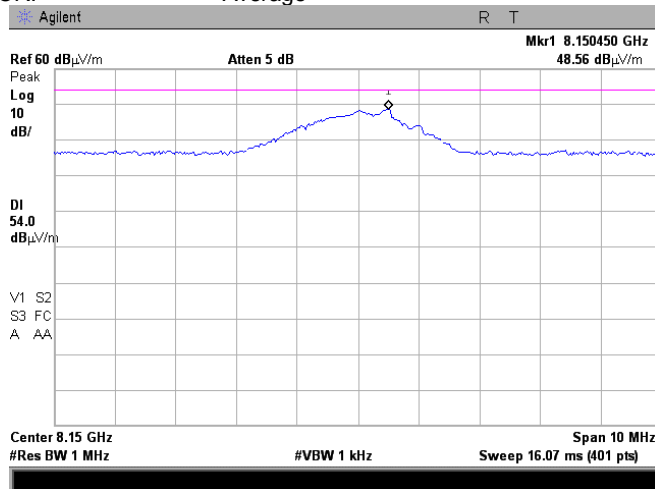




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.80 Radiated emission measurements at the ninth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

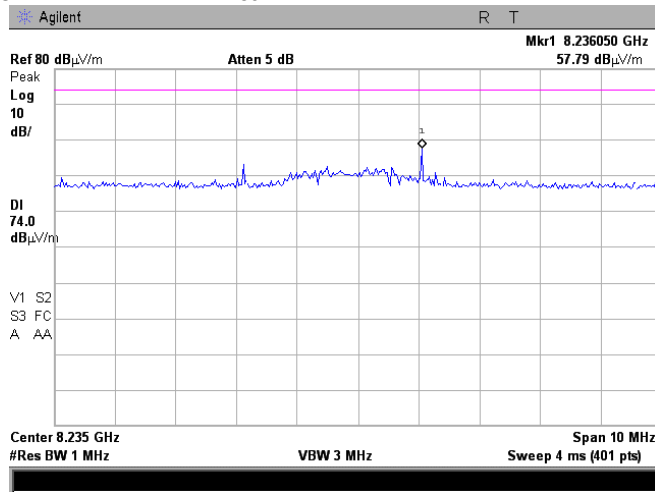

Plot 7.7.81 Radiated emission measurements at the ninth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

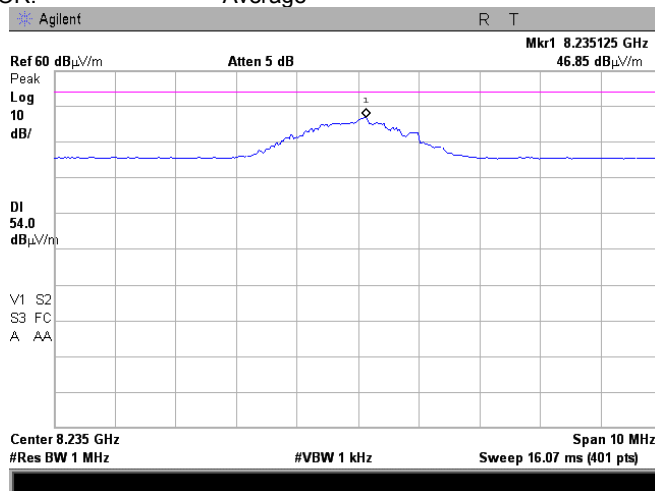




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.82 Radiated emission measurements at the ninth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

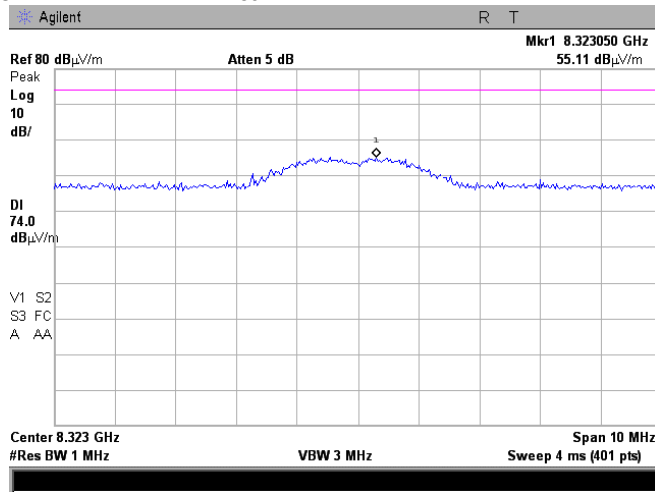

Plot 7.7.83 Radiated emission measurements at the ninth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

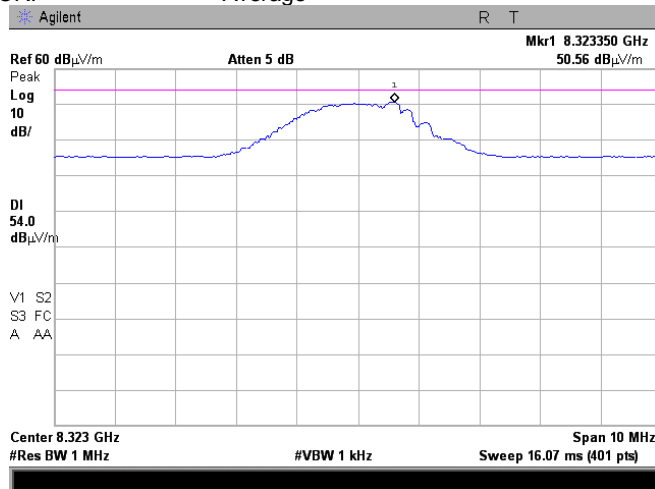




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.84 Radiated emission measurements at the tenth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

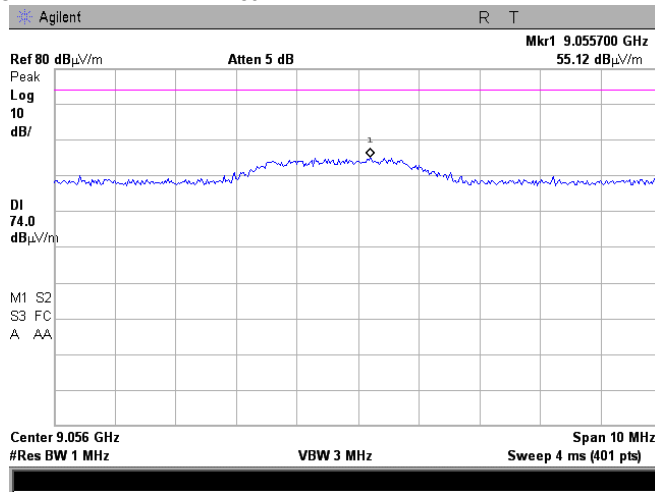

Plot 7.7.85 Radiated emission measurements at the tenth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

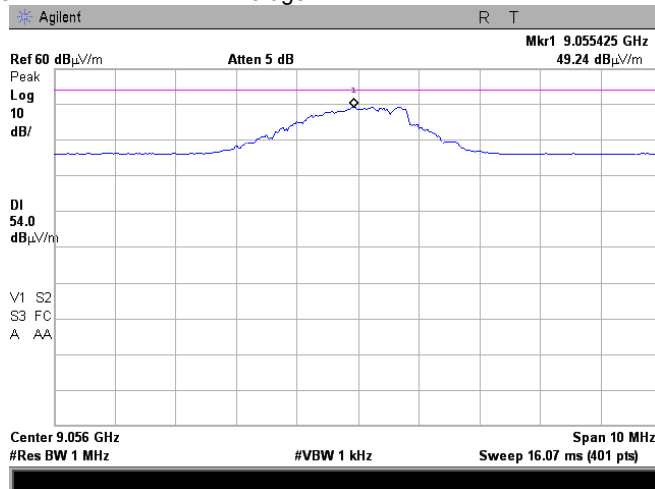




HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			


Plot 7.7.86 Radiated emission measurements at the tenth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Peak

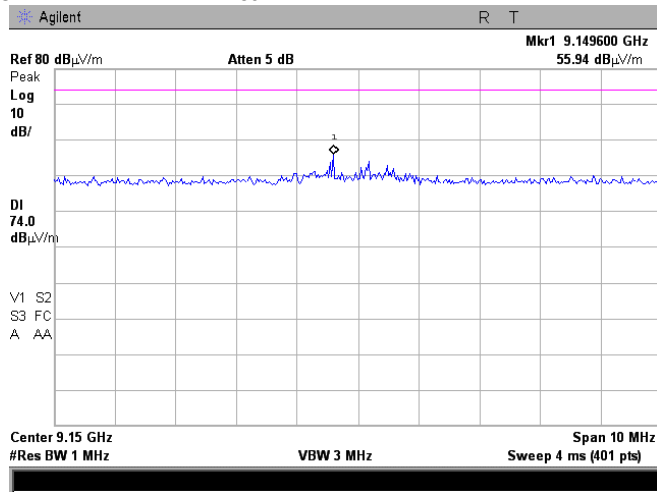

Plot 7.7.87 Radiated emission measurements at the tenth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS
 DETECTOR: Average

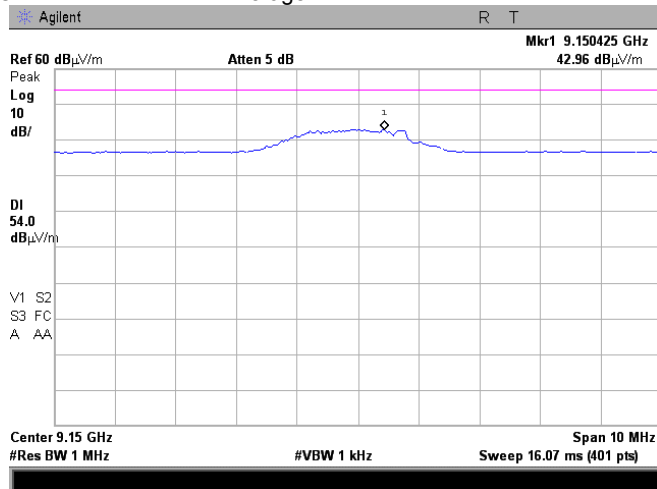




HERMON LABORATORIES

Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.88 Radiated emission measurements at the tenth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 OPERATIONAL MODE: FHSS

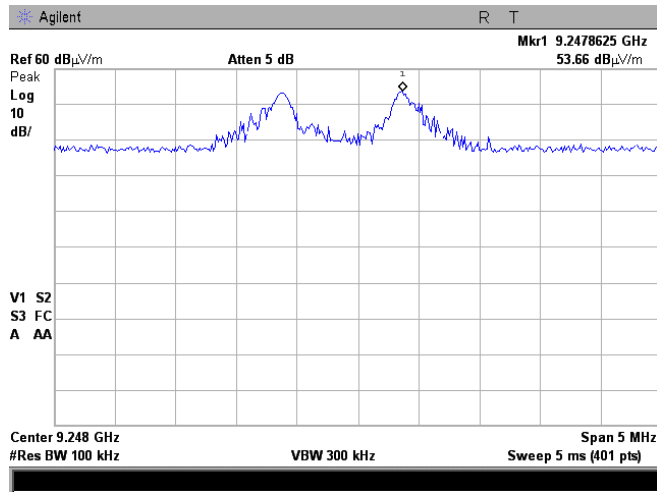





HERMON LABORATORIES

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/4/2010 10:05:51 AM		
Temperature: 23.2 °C	Air Pressure: 1023 hPa	Relative Humidity: 49 %	Power Supply: Battery
Remarks:			

Plot 7.7.89 Transmission pulse duration, FHSS

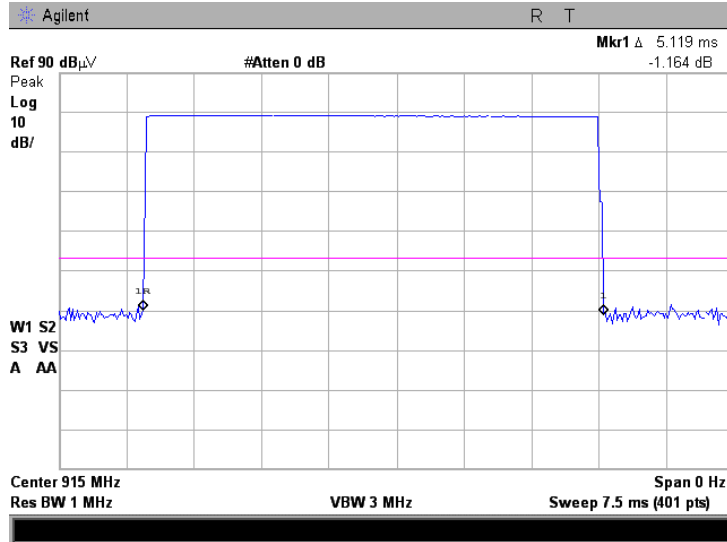

Plot 7.7.90 Transmission pulse period, FHSS

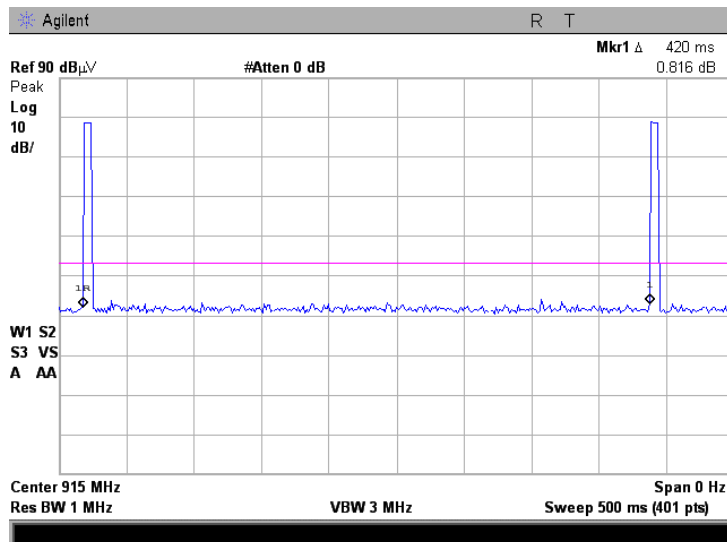



Test specification:	Section 15.203, Antenna requirements		
Test procedure:	Visual inspection / supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	2/2/2010 4:07:22 PM		
Temperature: 23.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

7.8 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.8.1.

Table 7.8.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

**8 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0337	Probe Set, Hand held, 5 probes	Electro-Metrics	EHFP-30	238	08-Jun-09	08-Jun-10
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	29-Jun-09	29-Jun-10
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Aug-09	27-Aug-10
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-10	11-Jan-11
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies	8564EC	3946A002 19	28-Aug-09	28-Aug-10
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	28-Aug-09	28-Aug-10
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	29-Jan-10	29-Jan-11
2870	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-9155-00	2870	17-Sep-09	17-Sep-10
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	16-Sep-09	16-Sep-10
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	07-May-09	07-May-10
2951	Cable, RF, 18 GHz, 0.9 m, SMA-SMA	Gore	10020014	NA	05-Oct-09	05-Oct-10
2953	Cable, RF, 18 GHz, 1.2 m, SMA-SMA	Gore	10020014	NA	05-Oct-09	05-Oct-10
3616	Cable RF, 6.5 m, N type-N type, DC-6.5 GHz	Suhner Switzerland	Rg 214/U	NA	02-Dec-09	02-Dec-10
3883	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470104 06	13-Jan-10	13-Jan-11

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 15: 2009	Radio Frequency Devices.
FR Vol.62	Federal Register, Volume 62, May 13, 1997
FCC New Guidance:2004	FCC New Guidance on Measurements for DTS
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

12 APPENDIX E Test equipment correction factors

**Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field intensity in dB(μV/m).

**Antenna factor
 Double-ridged wave guide horn antenna
 Model 3115, S/N 9911-5964, HL1984**

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-9155-00,
HL 2870

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	5750	2.49	12000	3.71
30	0.17	6000	2.53	12250	3.81
100	0.32	6250	2.58	12500	3.84
250	0.49	6500	2.64	12750	3.88
500	0.70	6750	2.69	13000	3.92
750	0.86	7000	2.75	13250	3.96
1000	1.00	7250	2.80	13500	3.98
1250	1.11	7500	2.87	13750	4.01
1500	1.23	7750	2.93	14000	4.03
1750	1.34	8000	2.94	14250	4.09
2000	1.41	8250	3.00	14500	4.08
2250	1.51	8500	3.04	14750	4.10
2500	1.59	8750	3.08	15000	4.15
2750	1.68	9000	3.14	15250	4.22
3000	1.76	9250	3.16	15500	4.31
3250	1.83	9500	3.22	15750	4.42
3500	1.91	9750	3.26	16000	4.48
3750	1.97	10000	3.36	16250	4.54
4000	2.05	10250	3.41	16500	4.56
4250	2.11	10500	3.46	16750	4.57
4500	2.18	10750	3.50	17000	4.59
4750	2.24	11000	3.54	17250	4.66
5000	2.30	11250	3.58	17500	4.70
5250	2.36	11500	3.63	17750	4.76
5500	2.43	11750	3.66	18000	4.72



Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55



Cable loss
Cable coaxial, Gore, 18 GHz, 0.9 m, SMA-SMA, S/N 10020014
HL 2951

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.07	5750	0.77	12000	1.23
30	0.06	6000	0.78	12250	1.25
100	0.09	6250	0.81	12500	1.26
250	0.15	6500	0.83	12750	1.26
500	0.21	6750	0.84	13000	1.30
750	0.27	7000	0.85	13250	1.30
1000	0.31	7250	0.88	13500	1.30
1250	0.36	7500	0.88	13750	1.29
1500	0.38	7750	0.93	14000	1.23
1750	0.42	8000	0.92	14250	1.32
2000	0.44	8250	0.94	14500	1.27
2250	0.47	8500	0.99	14750	1.27
2500	0.50	8750	0.97	15000	1.34
2750	0.52	9000	1.01	15250	1.36
3000	0.54	9250	1.05	15500	1.35
3250	0.57	9500	1.08	15750	1.36
3500	0.58	9750	1.10	16000	1.43
3750	0.61	10000	1.09	16250	1.38
4000	0.63	10250	1.09	16500	1.42
4250	0.66	10500	1.07	16750	1.49
4500	0.68	10750	1.10	17000	1.53
4750	0.70	11000	1.09	17250	1.59
5000	0.71	11250	1.09	17500	1.65
5250	0.74	11500	1.13	17750	1.82
5500	0.77	11750	1.12	18000	2.09

Cable loss
Cable coaxial, Gore, 25.5 GHz, 1.2 m, SMA-SMA, S/N 10020014
HL 2953

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.06	8750	1.28	18000	1.84
30	0.06	9000	1.30	18250	1.91
100	0.12	9250	1.35	18500	1.94
250	0.19	9500	1.34	18750	1.92
500	0.27	9750	1.36	19000	1.95
750	0.34	10000	1.33	19250	2.00
1000	0.40	10250	1.38	19500	1.96
1250	0.45	10500	1.39	19750	2.02
1500	0.50	10750	1.39	20000	1.92
1750	0.54	11000	1.43	20250	2.04
2000	0.57	11250	1.42	20500	2.00
2250	0.60	11500	1.48	20750	2.09
2500	0.64	11750	1.49	21000	2.01
2750	0.67	12000	1.59	21250	2.07
3000	0.70	12250	1.50	21500	2.20
3250	0.74	12500	1.55	21750	2.10
3500	0.76	12750	1.55	22000	2.24
3750	0.80	13000	1.61	22250	2.25
4000	0.83	13250	1.62	22500	2.12
4250	0.85	13500	1.56	22750	2.05
4500	0.87	13750	1.61	23000	2.10
4750	0.91	14000	1.57	23250	2.03
5000	0.92	14250	1.66	23500	2.08
5250	0.96	14500	1.58	23750	2.14
5500	0.99	14750	1.69	24000	2.16
5750	0.99	15000	1.71	24250	2.25
6000	1.03	15250	1.74	24500	2.17
6250	1.05	15500	1.75	24750	2.32
6500	1.07	15750	1.72	25000	2.32
6750	1.08	16000	1.89	25250	2.32
7000	1.12	16250	1.79	25500	2.41
7250	1.13	16500	1.84	25750	2.31
7500	1.15	16750	1.82	26000	2.28
7750	1.20	17000	1.79	26250	2.32
8000	1.20	17250	1.78	26500	2.29
8250	1.23	17500	1.85		
8500	1.27	17750	1.83		

Cable loss
Cable coaxial, RG-214/U, N type-N type, 6.5 m
Suhner Switzerland, HL 3616

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	1750	2.66	3550	4.44	5350	6.08
30	0.25	1800	2.72	3600	4.46	5400	6.12
50	0.32	1850	2.78	3650	4.59	5450	6.17
100	0.48	1900	2.81	3700	4.60	5500	6.25
150	0.60	1950	2.86	3750	4.72	5550	6.31
200	0.71	2000	2.94	3800	4.72	5600	6.35
250	0.81	2050	2.97	3850	4.86	5650	6.41
300	0.91	2100	3.01	3900	4.85	5700	6.50
350	1.00	2150	3.06	3950	4.99	5750	6.52
400	1.07	2200	3.11	4000	4.90	5800	6.57
450	1.14	2250	3.16	4050	5.04	5850	6.61
500	1.23	2300	3.21	4100	5.01	5900	6.71
550	1.30	2350	3.26	4150	5.10	5950	6.70
600	1.37	2400	3.31	4200	5.08	6000	6.75
650	1.44	2450	3.35	4250	5.18	6050	6.74
700	1.50	2500	3.39	4300	5.14	6100	6.84
750	1.58	2550	3.46	4350	5.22	6150	6.87
800	1.64	2600	3.48	4400	5.21	6200	6.93
850	1.69	2650	3.55	4450	5.29	6250	6.96
900	1.77	2700	3.59	4500	5.31	6300	7.02
950	1.79	2750	3.66	4550	5.39	6350	7.04
1000	1.87	2800	3.68	4600	5.41	6400	7.10
1050	1.92	2850	3.75	4650	5.49	6450	7.11
1100	1.98	2900	3.79	4700	5.52	6500	7.19
1150	2.05	2950	3.86	4750	5.60		
1200	2.09	3000	3.89	4800	5.64		
1250	2.15	3050	3.94	4850	5.73		
1300	2.21	3100	3.98	4900	5.70		
1350	2.27	3150	4.03	4950	5.73		
1400	2.33	3200	4.06	5000	5.75		
1450	2.38	3250	4.12	5050	5.83		
1500	2.44	3300	4.14	5100	5.82		
1550	2.48	3350	4.22	5150	5.91		
1600	2.52	3400	4.24	5200	5.92		
1650	2.56	3450	4.31	5250	5.98		
1700	2.62	3500	4.35	5300	6.01		

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT