



Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (DTS),
RSS-210 issue 8 Annex 8

FOR:

Telematics Wireless Ltd.
Wired booster
Model: 2WB-LG

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Changes made in the EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements.....	7
7.1	Minimum 6 dB bandwidth	7
7.2	Minimum 99% bandwidth	11
7.3	Peak output power.....	15
7.4	Field strength of spurious emissions.....	20
7.5	Peak spectral power density	78
7.6	Antenna requirements	84
8	APPENDIX A Test equipment and ancillaries used for tests.....	85
9	APPENDIX B Measurement uncertainties	86
10	APPENDIX C Test laboratory description.....	87
11	APPENDIX D Specification references	87
12	APPENDIX E Test equipment correction factors.....	88
13	APPENDIX F Abbreviations and acronyms	95

1 Applicant information

Client name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-mail: slavas@tlmw.com
Contact name: Mr. Slava Snitkovsky

2 Equipment under test attributes

Product name: Wired booster
Product type: Transceiver
Model(s): 2WB-LG
Serial number: 06535059
Hardware version: B
Software release: 1.020
Receipt date: 7/4/2011

3 Manufacturer information

Manufacturer name: Telematics Wireless Ltd.
Address: 26 Hamelaha street, POB 1911, Holon, 58117, Israel
Telephone: +972 3557 5767
Fax: +972 3557 5753
E-Mail: slavas@tlmw.com
Contact name: Mr. Slava Snitkovsky




4 Test details

Project ID: 21915
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 4/7/2011
Test completed: 6/26/2011
Test specification(s): FCC 47CFR part 15:2010, subpart C §15.247 (DTS); RSS-210 issue 8 Annex 8

5 Tests summary

Test	Status
Transmitter characteristics	
FCC Section 15.247(a)2 / RSS-210 section A8.2(a), 6 dB bandwidth	Pass
FCC Section 15.247(b)3/ RSS-210 section A8.4(4), Peak output power	Pass
FCC section 15.247(i) / RSS-Gen section 5.6, RF exposure	Pass, the exhibit to the application of certification is provided
FCC Section 15.247(d) / RSS-210 section A8.5, Radiated spurious emissions	Pass
FCC Section 15.247(e) / RSS-210 section A8.2(b), Peak power density	Pass
FCC section 15.203 / RSS-Gen section 7.1.2, Antenna requirement	Pass
FCC section 15.207(a) / RSS-Gen section 7.2.4, Conducted emission	Not required

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. S. Samokha, test engineer	June 26, 2011	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	July 12, 2011	
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	July 31, 2011	




6 EUT description

6.1 General information

The EUT, model name 2WB-LG, is a 2Way wired booster endpoint. The 2WB-LG is compatible with the Landis & Gear network. The 2-Way transceiver is battery powered and connected to a pulse/encoder meter unit via a cable. A microcontroller provides the timing, control and data processing. The unit includes a built in antenna that is inaccessible to the user.

6.2 Test configuration

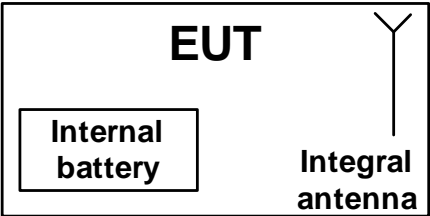

6.3 Changes made in the EUT

No changes were implemented in the EUT.

6.4 Transmitter characteristics

Type of equipment						
	Stand-alone (Equipment with or without its own control provisions)					
X	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Intended use		Condition of use				
	fixed	Always at a distance more than 2 m from all people				
X	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
Assigned frequency range		902-928 MHz				
Operating frequency range		905.43 - 924.75 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector		NA		
		Peak output power		16.71 dBm		
Is transmitter output power variable?		X	No			
			Yes	continuous variable		
			Yes	stepped variable with stepsize		dB
			Yes	minimum RF power		dBm
			Yes	maximum RF power		dBm
Antenna connection						
	unique coupling	standard connector	X	integral	with temporary RF connector	
					X without temporary RF connector	
Antenna/s technical characteristics						
Type	Manufacturer	Model number		Gain		
Integral	Telematics Wireless Ltd.	Printed inverted F antenna		3 dBi		
Transmitter aggregate data rate/s		60 kbps				
Type of modulation		BPSK				
Modulating test signal (baseband)		PRBS				
Maximum transmitter duty cycle in normal use		1%				
Transmitter duty cycle supplied for test		0.6%				
Transmitter power source						
X	Battery	Nominal rated voltage	3.6VDC	Battery type	Lithium	
	DC	Nominal rated voltage	VDC			
	AC mains	Nominal rated voltage	VAC	Frequency	Hz	
Common power source for transmitter and receiver				X	yes	
					no	
Spread spectrum parameters for transmitters tested per FCC 15.247 only						
DSSS	Chip rate	900 kChip/sec				
	Spectrum width	0.9 MHz				

Test specification: Section 15.247(a)2, RSS-210 section A8.2(a), 6 dB bandwidth			
Test procedure: FR Vol.62, page 26243, Section 15.247(a)2			
Test mode: Compliance	Verdict: PASS		
Date: 5/8/2011			
Temperature: 23 °C	Air Pressure: 1013 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 8 requirements

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 The 6 dB bandwidth test setup





Test specification:		Section 15.247(a)2, RSS-210 section A8.2(a), 6 dB bandwidth	
Test procedure:		FR Vol.62, page 26243, Section 15.247(a)2	
Test mode:	Compliance	Verdict:	PASS
Date:	5/8/2011		
Temperature: 23 °C	Air Pressure: 1013 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Table 7.1.2 The 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
DETECTOR USED: Peak
SWEEP MODE: Max hold
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc
MODULATION: PSK
BIT RATE: 900 bps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency				
905.43	885	500	385	Pass
Mid frequency				
915	765	500	265	Pass
High frequency				
924.75	870	500	370	Pass


Reference numbers of test equipment used

HL 0521	HL 0604	HL 2871	HL 3623					
---------	---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.

Test specification:		Section 15.247(a)2, RSS-210 section A8.2(a), 6 dB bandwidth	
Test procedure:		FR Vol.62, page 26243, Section 15.247(a)2	
Test mode:	Compliance	Verdict:	PASS
Date:	5/8/2011		
Temperature: 23 °C	Air Pressure: 1013 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.1.1 The 6 dB bandwidth test result at low frequency

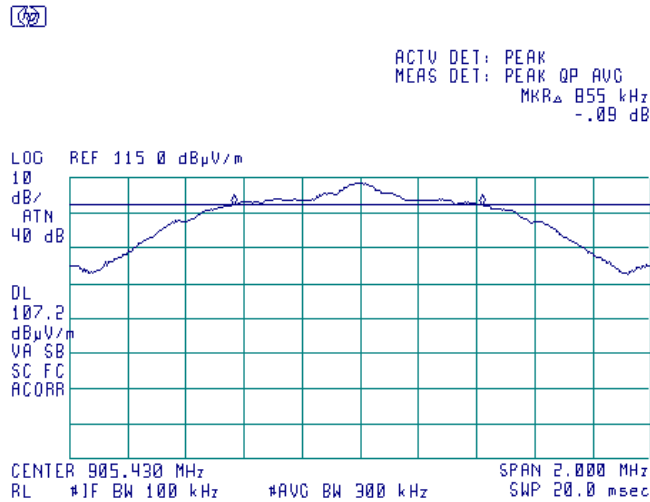

Plot 7.1.2 The 6 dB bandwidth test result at mid frequency

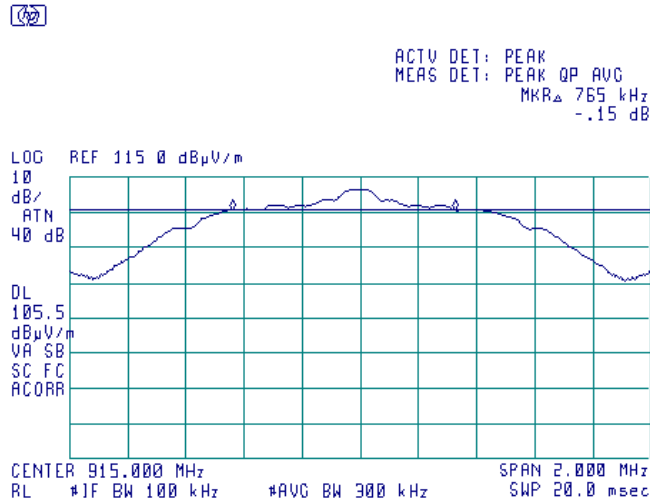




HERMON LABORATORIES

Test specification:	Section 15.247(a)2, RSS-210 section A8.2(a), 6 dB bandwidth		
Test procedure:	FR Vol.62, page 26243, Section 15.247(a)2		
Test mode:	Compliance	Verdict:	PASS
Date:	5/8/2011		
Temperature: 23 °C	Air Pressure: 1013 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks:			

Plot 7.1.3 The 6 dB bandwidth test result at high frequency

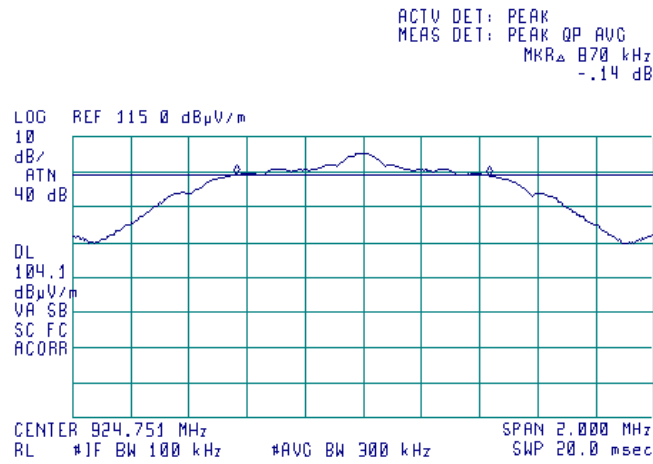

Test specification: RSS-Gen, 99% power bandwidth	
Test procedure: RSS-Gen section 4.6	
Test mode: Compliance	Verdict: PASS
Date: 6/19/2011	
Temperature: 22.4 °C	Air Pressure: 1010 hPa
Relative Humidity: 47 %	
Power Supply: Battery	
Remarks: for IC	

7.2 Minimum 99% bandwidth

7.2.1 General

This test was performed to measure 99% bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.2.1.

Table 7.2.1 99% bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points	Limit, kHz
902.0 – 928.0	99%	NA
2400.0 – 2483.5		
5725.0 – 5850.0		

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was set to transmit modulated carrier.

7.2.2.3 The transmitter minimum 99% bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.2.2 and the associated plot.

Figure 7.2.1 Occupied bandwidth test setup





Test specification: RSS-Gen, 99% power bandwidth	
Test procedure: RSS-Gen section 4.6	
Test mode: Compliance	Verdict: PASS
Date: 6/19/2011	
Temperature: 22.4 °C	Air Pressure: 1010 hPa
Relative Humidity: 47 %	
Power Supply: Battery	
Remarks: for IC	

Table 7.2.2 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND: 902-928 MHz
DETECTOR USED: Peak
SWEEP MODE: Max hold
SWEEP TIME: Auto
RESOLUTION BANDWIDTH: 30 kHz
VIDEO BANDWIDTH: 100 kHz
MODULATION ENVELOPE REFERENCE POINTS: 99% OBW
BIT RATE: 0.9 kbps

Carrier frequency, MHz	99% bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency				
905.43	1675	NA	NA	Pass
Mid frequency				
915	1635	NA	NA	Pass
High frequency				
924.75	1630	NA	NA	Pass


Reference numbers of test equipment used

HL0521	HL0604	HL2871	HL3623					
--------	--------	--------	--------	--	--	--	--	--


Full description is given in Appendix A.

Test specification: RSS-Gen, 99% power bandwidth			
Test procedure: RSS-Gen section 4.6			
Test mode: Compliance	Verdict: PASS		
Date: 6/19/2011			
Temperature: 22.4 °C	Air Pressure: 1010 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks: for IC			

Plot 7.2.1 Occupied bandwidth test result at low frequency

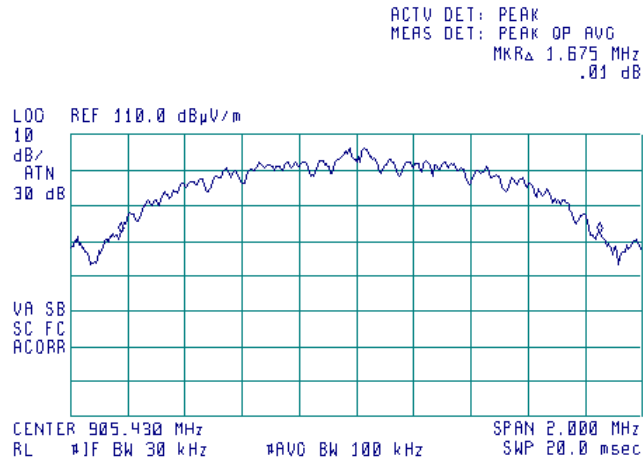

Plot 7.2.2 Occupied bandwidth test result at mid frequency

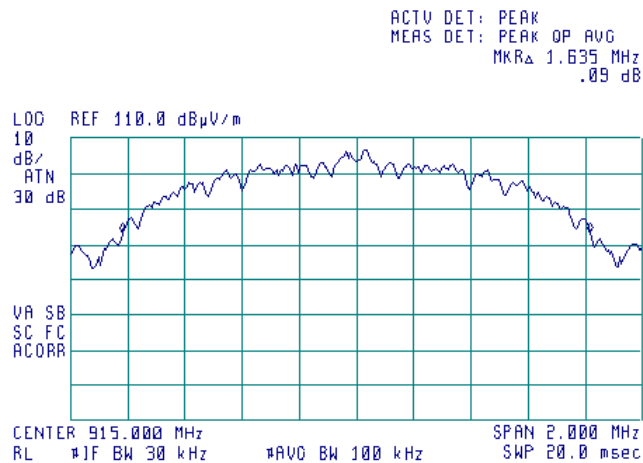




HERMON LABORATORIES

Test specification: RSS-Gen, 99% power bandwidth			
Test procedure: RSS-Gen section 4.6			
Test mode: Compliance	Verdict: PASS		
Date: 6/19/2011			
Temperature: 22.4 °C	Air Pressure: 1010 hPa	Relative Humidity: 47 %	Power Supply: Battery
Remarks: for IC			

Plot 7.2.3 Occupied bandwidth test result at high frequency



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKRΔ 1.630 MHz
-1.13 dB

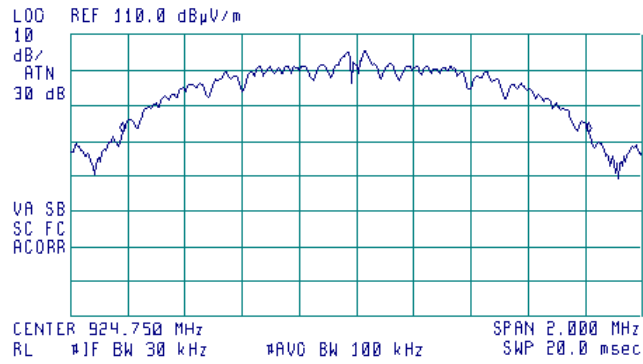

Test specification:		Section 15.247(b)3, RSS-210 section A8.4(4), Peak output power	
Test procedure:		FR Vol.62, page 26243, Section 15.247(b)	
Test mode:	Compliance	Verdict:	PASS
Date:	5/5/2011		
Temperature: 22.3 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

7.3 Peak output power

7.3.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

**- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{(30 \times P \times G)/r}$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.3.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.3.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.3.2 and associated plots.

7.3.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.


The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.3.2.6 The worst test results (the lowest margins) were recorded in Table 7.3.2.

Test specification:	Section 15.247(b)3, RSS-210 section A8.4(4), Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict:	PASS
Date:	5/5/2011		
Temperature: 22.3 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Figure 7.3.1 Setup for carrier field strength measurements

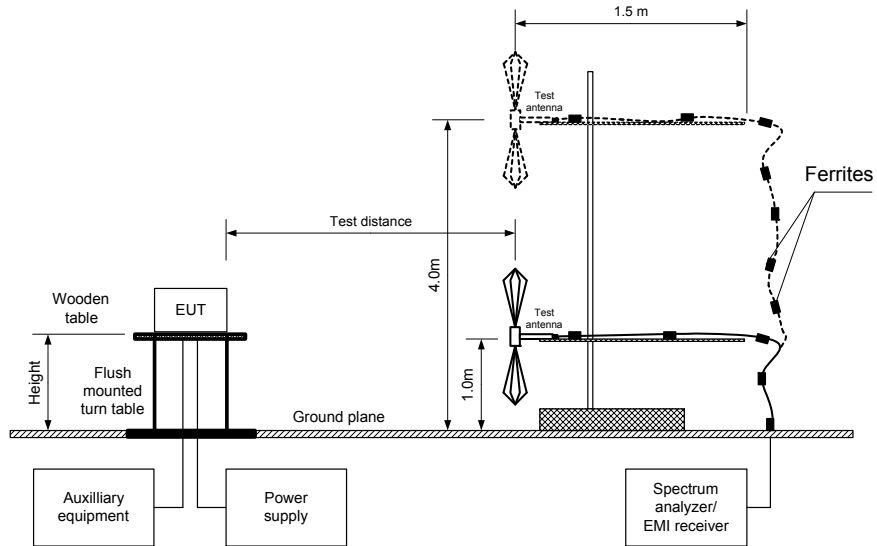

Test specification: Section 15.247(b)3, RSS-210 section A8.4(4), Peak output power			
Test procedure: FR Vol.62, page 26243, Section 15.247(b)			
Test mode: Compliance	Verdict: PASS		
Date: 5/5/2011			
Temperature: 22.3 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Table 7.3.2 Peak output power test results

ASSIGNED FREQUENCY: 902 - 928 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
DETECTOR USED: Peak
TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
MODULATION: PSK
BIT RATE: 900 bps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
DETECTOR USED: Peak
EUT 6 dB BANDWIDTH: 0.88 MHz
RESOLUTION BANDWIDTH: 1 MHz
VIDEO BANDWIDTH: 3 MHz

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
905.43	114.02	Vertical	1	8	3.0	15.79	30.0	-14.21	Pass
915.00	114.94	Vertical	1	357	3.0	16.71	30.0	-13.29	Pass
924.75	114.53	Vertical	1	8	3.0	16.30	30.0	-13.70	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**-. Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.


Reference numbers of test equipment used

HL 0521	HL 0604	HL 2871	HL 3623				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.

Test specification:		Section 15.247(b)3, RSS-210 section A8.4(4), Peak output power	
Test procedure: FR Vol.62, page 26243, Section 15.247(b)			
Test mode: Compliance		Verdict: PASS	
Date: 5/5/2011			
Temperature: 22.3 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.3.1 Field strength of carrier at low frequency

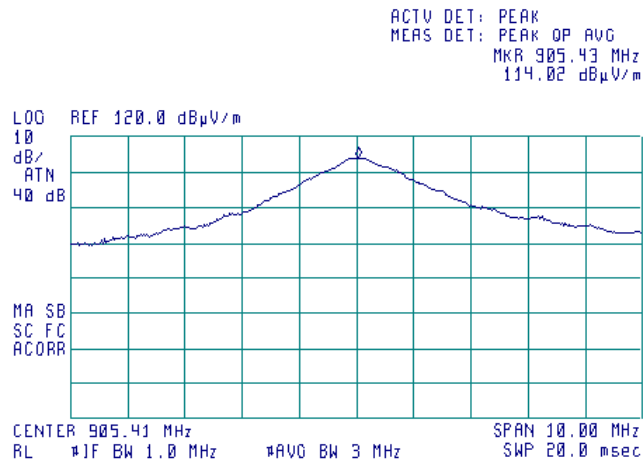

Plot 7.3.2 Field strength of carrier at mid frequency

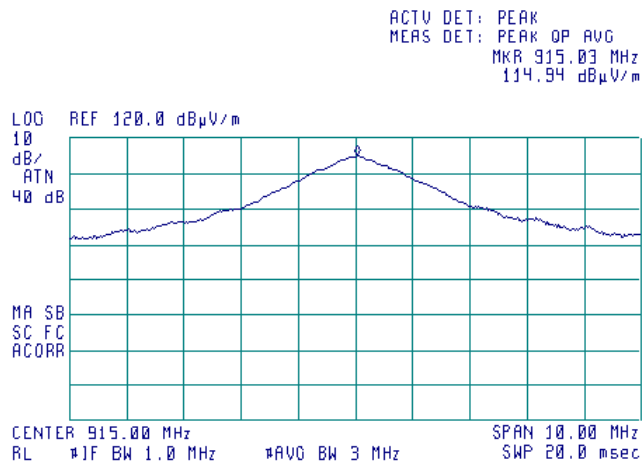




HERMON LABORATORIES

Test specification:		Section 15.247(b)3, RSS-210 section A8.4(4), Peak output power	
Test procedure:		FR Vol.62, page 26243, Section 15.247(b)	
Test mode:	Compliance	Verdict:	PASS
Date:	5/5/2011		
Temperature: 22.3 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.3.3 Field strength of carrier at high frequency

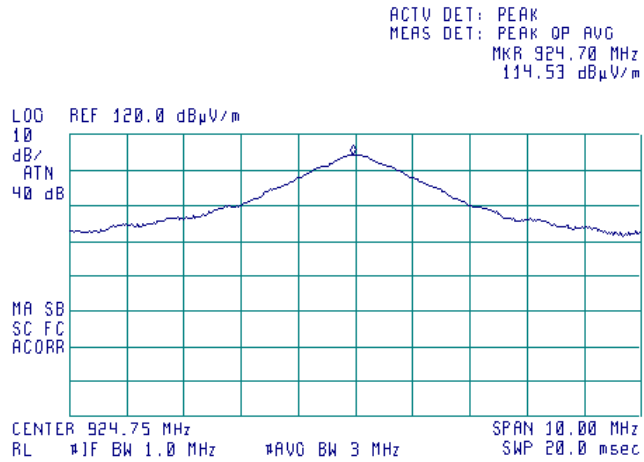

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

7.4 Field strength of spurious emissions

7.4.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 – 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.4.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and the performance check was conducted.

7.4.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.4.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.4.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.4.3.1 The EUT was set up as shown in Figure 7.4.2, energized and the performance check was conducted.

7.4.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.4.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Figure 7.4.1 Setup for spurious emission field strength measurements below 30 MHz


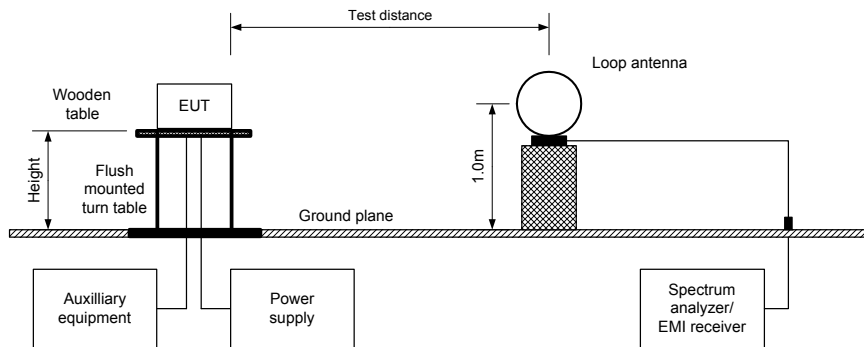


Figure 7.4.2 Setup for spurious emission field strength measurements above 30 MHz



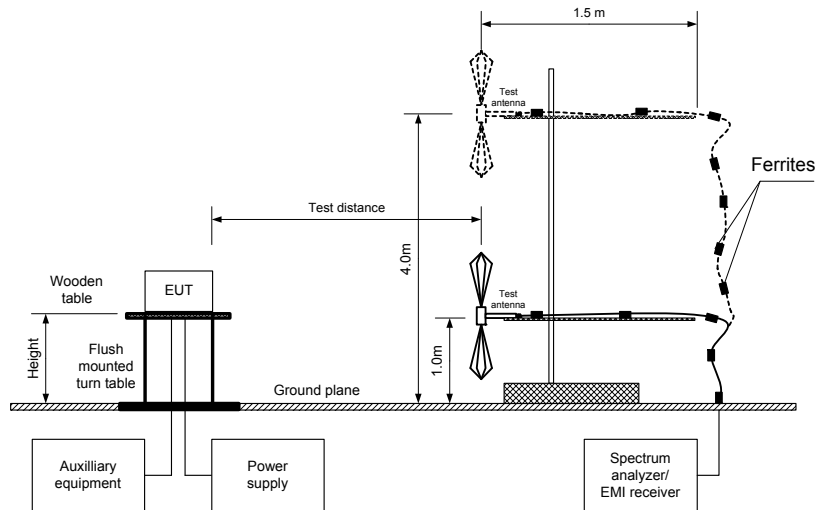

HERMON LABORATORIES

Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Table 7.4.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 902 - 928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 9300 MHz
 TEST DISTANCE: 3 m
 MODULATION: BPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 900 bps
 DUTY CYCLE: 0.6 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
1810.838	78.69	Vert	1.0	208	112.55	33.86	20.0	13.86	Pass
6338.000	60.41	Vert	1.0	68	112.55	52.14		32.14	
7243.430	59.22	Vert	1.0	175	112.55	53.33		33.33	
Mid carrier frequency									
1830.025	79.00	Vert	1.0	160	112.52	33.52	20.0	13.52	Pass
5489.990	61.48	Vert	1.0	43	112.52	51.04		31.04	
6405.010	55.89	Hor	1.0	32	111.77	55.88		35.88	
High carrier frequency									
1849.425	79.30	Vert	1.0	208	112.82	33.52	20.0	13.52	Pass
5548.495	57.87	Vert	1.0	43	112.82	54.95		34.95	
6473.250	54.45	Vert	1.2	75	112.82	58.37		38.37	
9247.475	53.30	Vert	1.1	90	112.82	59.52		39.52	

*- EUT front panel refers to 0 degrees position of turntable.

** - Margin = Attenuation below carrier – specification limit.

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Table 7.4.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902 – 928 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 9300 MHz
 TEST DISTANCE: 3 m
 MODULATION: BPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 900 bps
 DUTY CYCLE: 0.6 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide

Frequency MHz	Antenna			Peak field strength(VBW=3 MHz)			Average field strength(VBW=1 kHz)				Verdict
	Polarization	Height m	Azimuth degrees	Measured dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured dB(μV/m)	Calculated dB(μV/m)	Limit, dB(μV/m)	Margin dB***	
Low carrier frequency											
2715.793	Vert	1.1	200	58.33	74.0	-15.67	57.33	24.94	54.0	-29.06	Pass
3621.575	Vert	1.1	200	71.17	74.0	-2.83	69.67	37.28	54.0	-16.72	
4526.900	Vert	1.2	0	71.99	74.0	-2.01	68.94	36.55	54.0	-17.45	
5432.550	Vert	1.0	23	64.28	74.0	-9.72	58.90	26.51	54.0	-27.49	
8149.820	Vert	1.2	90	65.94	74.0	-8.06	61.06	28.67	54.0	-25.33	
9054.300	Vert	1.1	90	60.32	74.0	-13.68	58.31	25.92	54.0	-28.08	
Mid carrier frequency											
2744.493	Vert	1.1	170	58.58	74.0	-15.42	57.83	25.44	54.0	-28.56	Pass
3659.867	Vert	1.1	210	70.67	74.0	-3.33	69.83	37.44	54.0	-16.56	
4575.230	Vert	1.2	18	71.80	74.0	-2.20	68.75	36.36	54.0	-17.64	
7319.970	Vert	1.0	28	66.96	74.0	-7.04	65.43	33.04	54.0	-20.96	
8235.100	Vert	1.2	90	65.48	74.0	-8.52	61.43	29.04	54.0	-24.96	
High carrier frequency											
2773.793	Vert	1.1	60	58.67	74.0	-15.33	58.17	25.78	54.0	-28.22	Pass
3698.917	Vert	1.1	200	71.17	74.0	-2.83	68.00	35.61	54.0	-18.39	
4623.970	Vert	1.2	0	69.02	74.0	-4.98	65.94	33.55	54.0	-20.45	
7398.005	Vert	1.0	29	63.03	74.0	-10.97	60.88	28.49	54.0	-25.51	
8322.675	Vert	1.1	90	59.04	74.0	-14.96	54.63	22.24	54.0	-31.76	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

Table 7.4.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
2.4	417.5	NA	NA	NA	-32.4

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$$

for pulse train longer than 100 ms:

$$Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100ms} \times Number\ of\ bursts\ within\ 100ms \right)$$

Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Table 7.4.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902 - 928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: BPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 900 bps
 DUTY CYCLE: 0.6 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB'				
Low carrier frequency								
No emissions were found								Pass
Mid carrier frequency								
No emissions were found								Pass
High carrier frequency								
960.0528	50.29	40.81	54.0	-13.19	Vert	1.0	0	Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Table 7.4.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used

HL 0446	HL 0604	HL 1984	HL 2780	HL 2871	HL 3123	HL 3531	HL 3533
HL 3623	HL 3818	HL 3901					



Full description is given in Appendix A.

Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.1 Radiated emission measurements at the low carrier frequency

TEST SITE:
TEST DISTANCE:
MODULATION
ANTENNA POLARIZATION: Vertical



Semi anechoic chamber
3 m
PSK
ANTENNA POLARIZATION: Horizontal

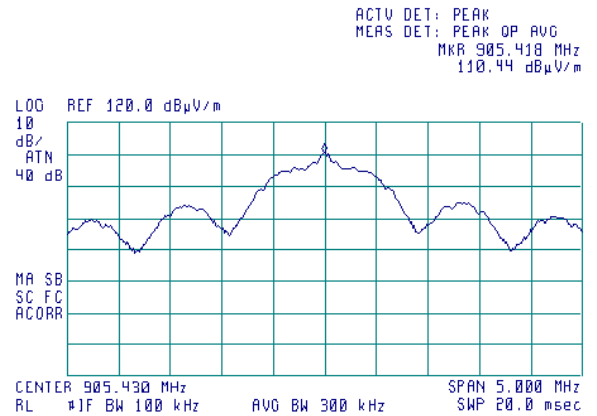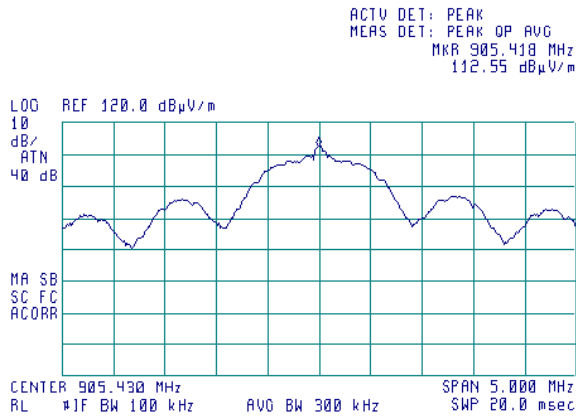

Plot 7.4.2 Radiated emission measurements at the mid carrier frequency

TEST SITE:
TEST DISTANCE:
MODULATION
ANTENNA POLARIZATION: Vertical

Semi anechoic chamber
3 m
PSK
ANTENNA POLARIZATION: Horizontal

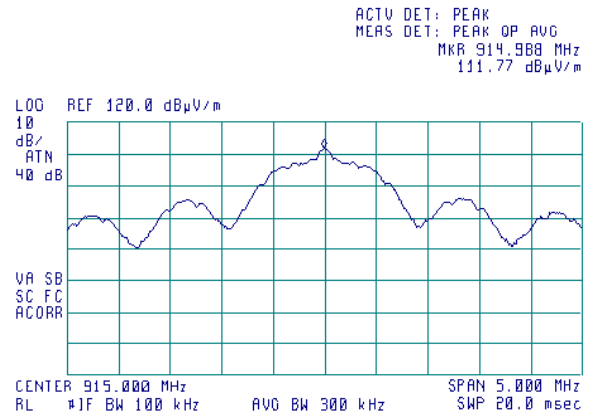
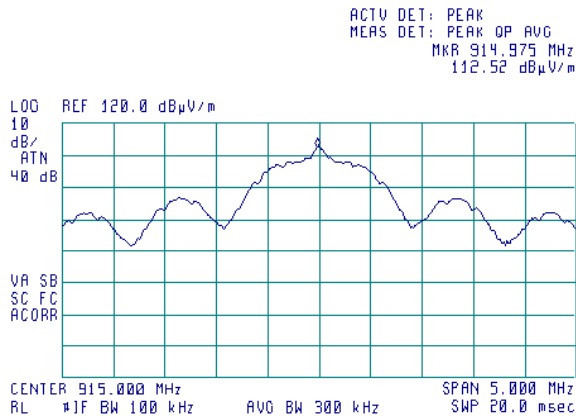


Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.3 Radiated emission measurements at the high carrier frequency

TEST SITE:
TEST DISTANCE:
MODULATION
ANTENNA POLARIZATION: Vertical


Semi anechoic chamber
3 m
PSK
ANTENNA POLARIZATION: Horizontalcal

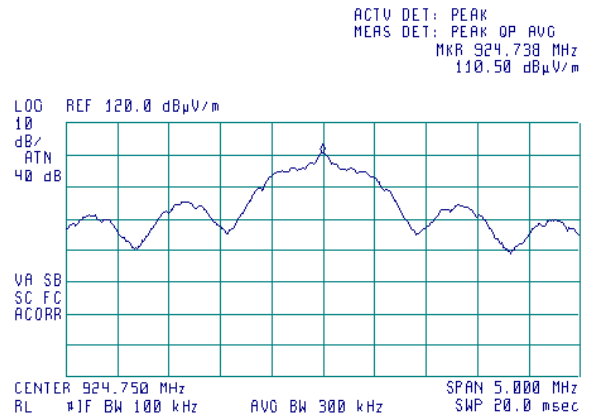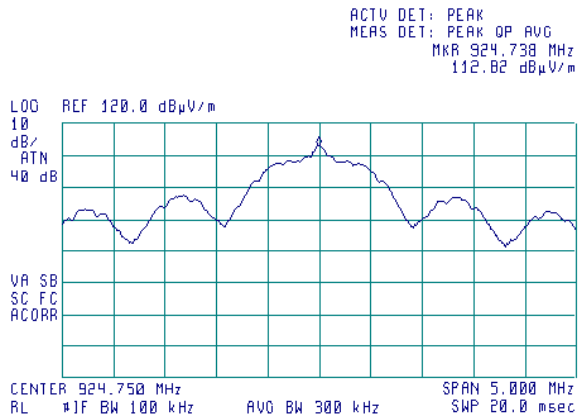

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.4 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: PSK

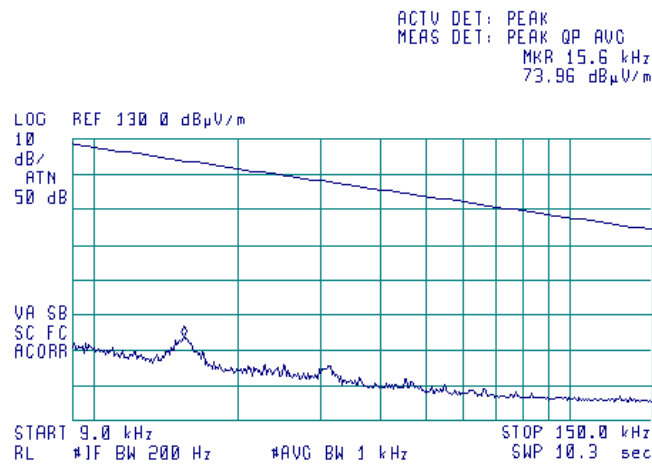

Plot 7.4.5 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: PSK

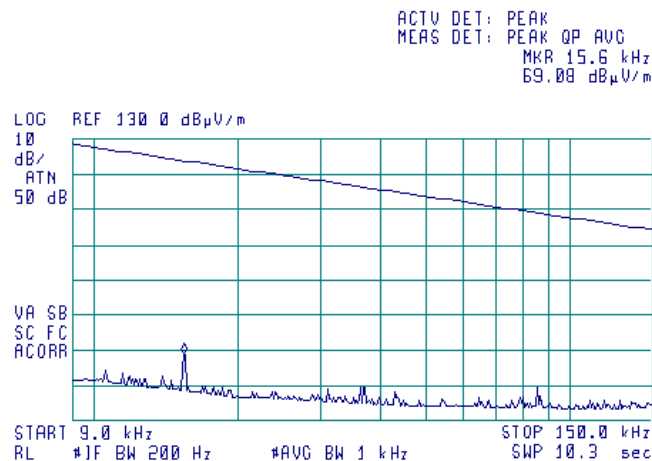

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.6 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: PSK

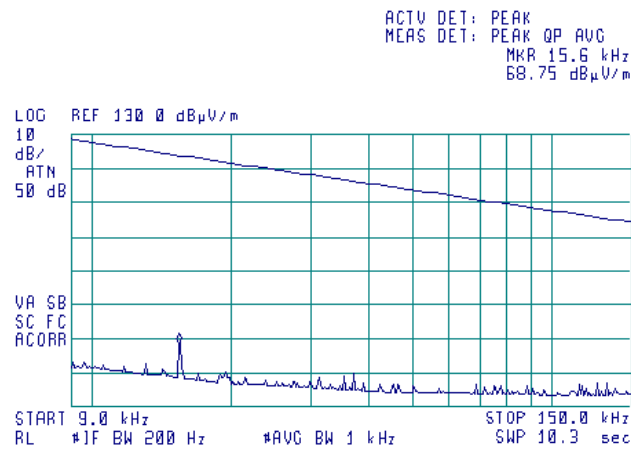

Plot 7.4.7 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: PSK

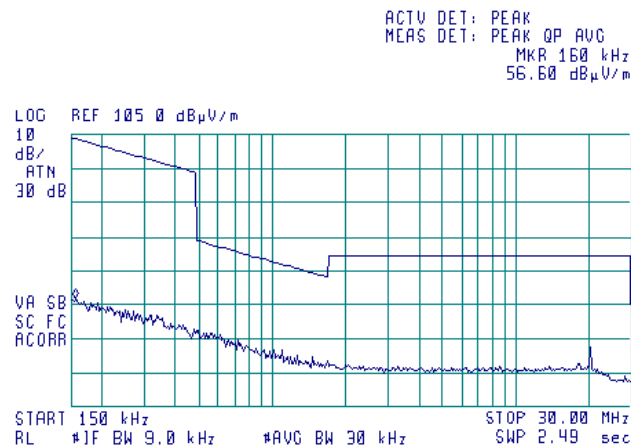

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.8 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: PSK

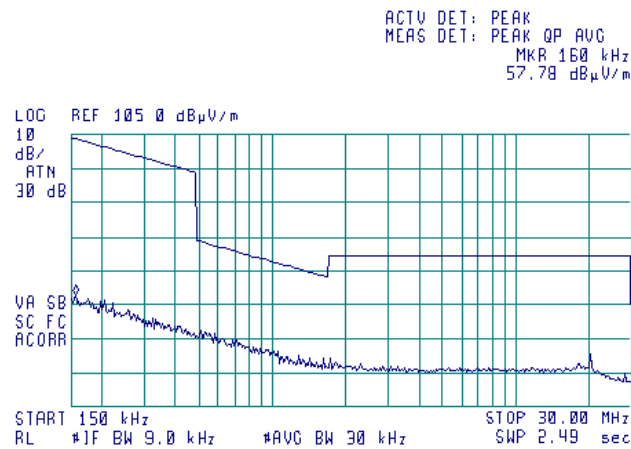

Plot 7.4.9 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: PSK

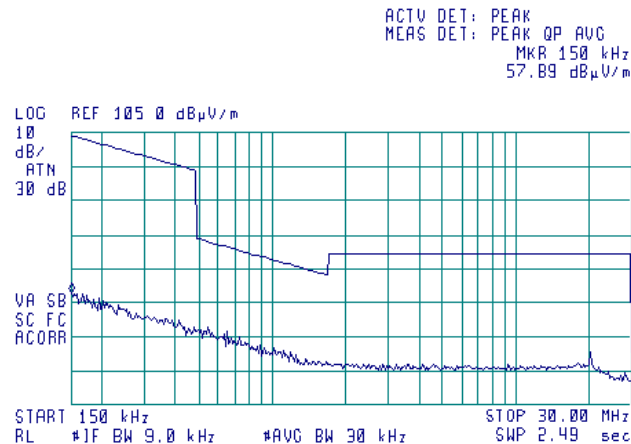

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.10 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: PSK

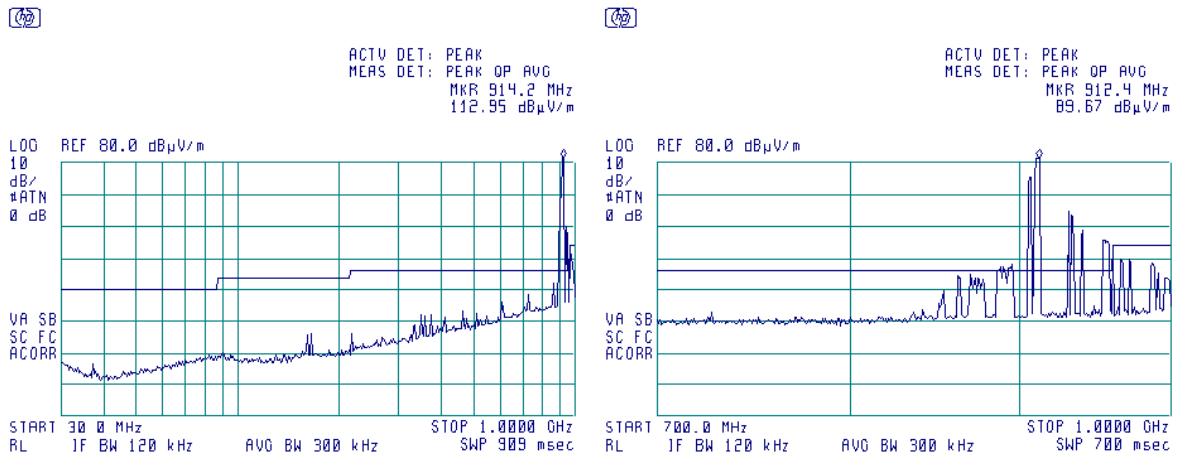

Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 905.43 MHz

Plot 7.4.11 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
OPERATIONAL MODE: PSK

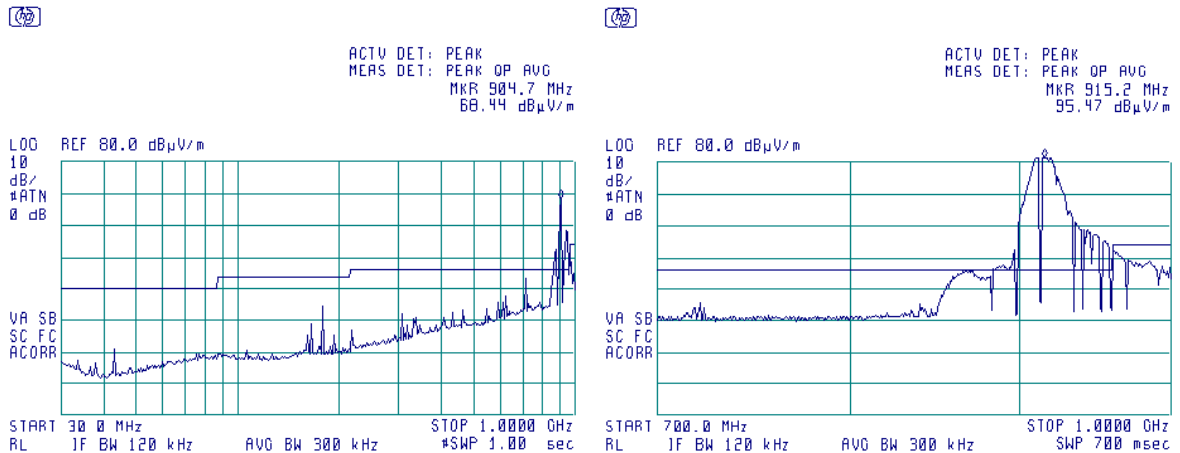

Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 915 MHz




HERMON LABORATORIES

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.12 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK

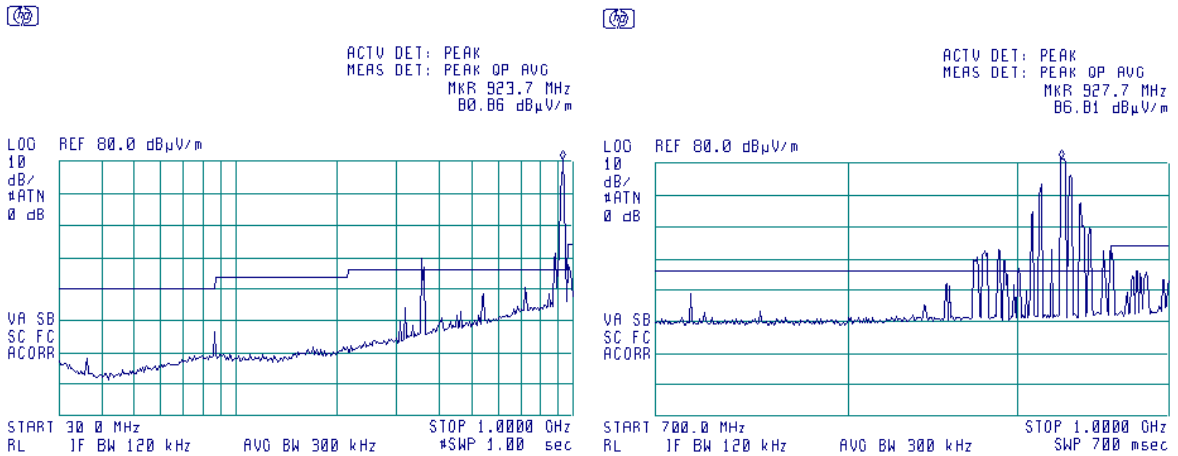


Note: Due to large span used, the frequency is shifted. Actual frequency of fundamental is 924.75 MHz

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.13 Radiated emission measurements from 1000 to 4000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

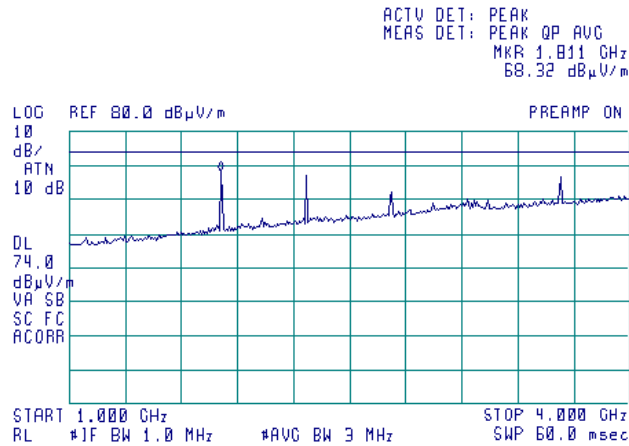

Plot 7.4.14 Radiated emission measurements from 1000 to 4000 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Average

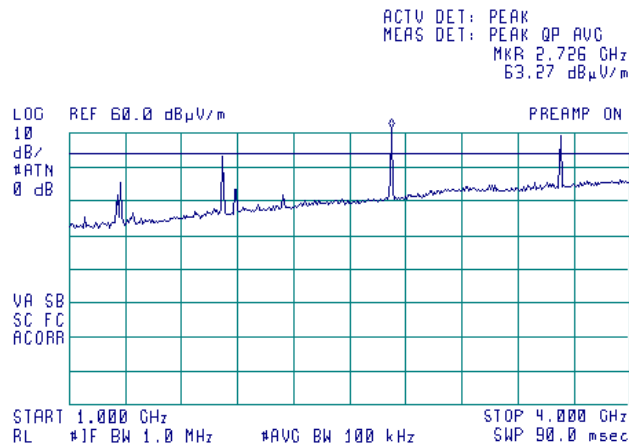

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.15 Radiated emission measurements from 1000 to 4000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

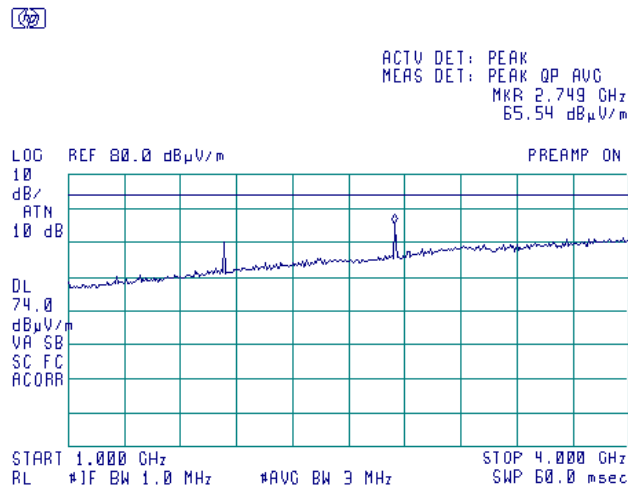

Plot 7.4.16 Radiated emission measurements from 1000 to 4000 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Average

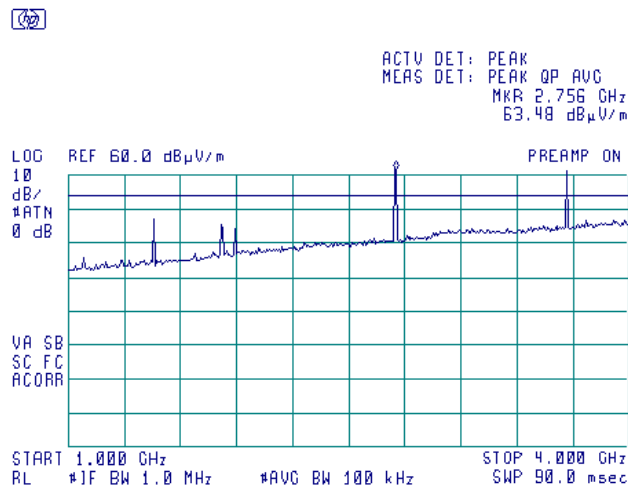

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.17 Radiated emission measurements from 1000 to 4000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

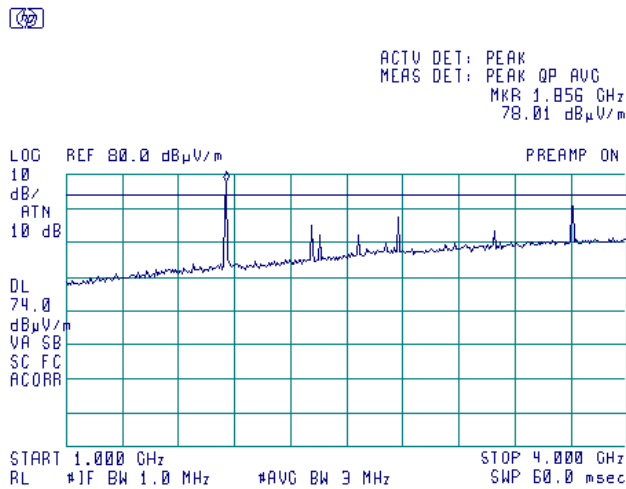

Plot 7.4.18 Radiated emission measurements from 1000 to 4000 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Average

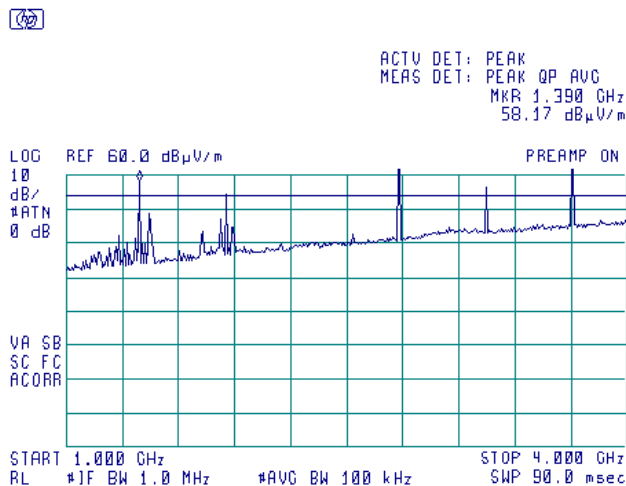

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.19 Radiated emission measurements from 4000 to 7000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

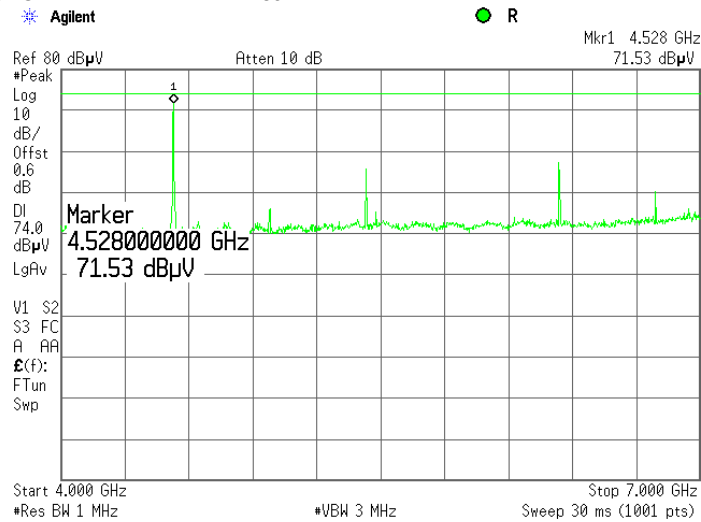

Plot 7.4.20 Radiated emission measurements from 4000 to 7000 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Average

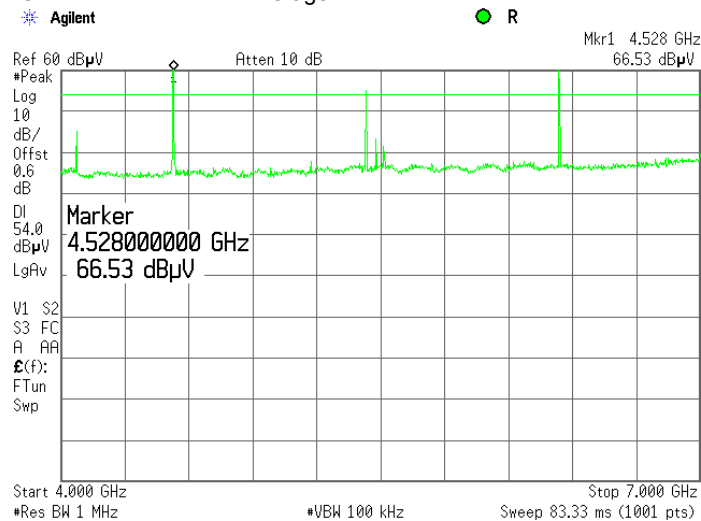

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.21 Radiated emission measurements from 4000 to 7000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

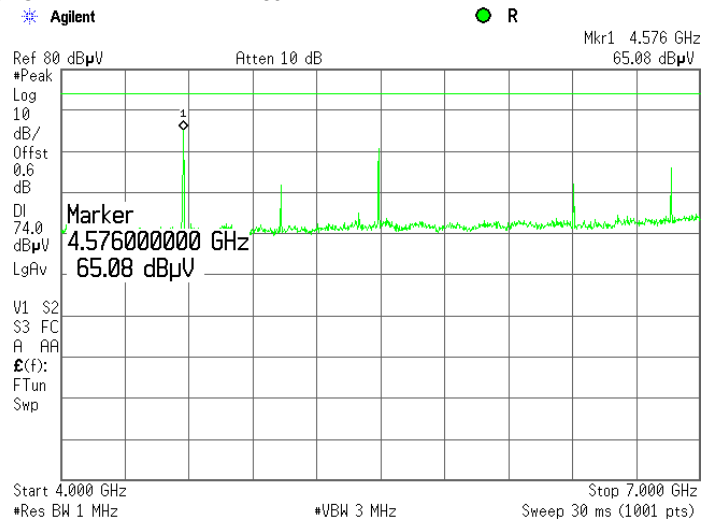

Plot 7.4.22 Radiated emission measurements from 4000 to 7000 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Average

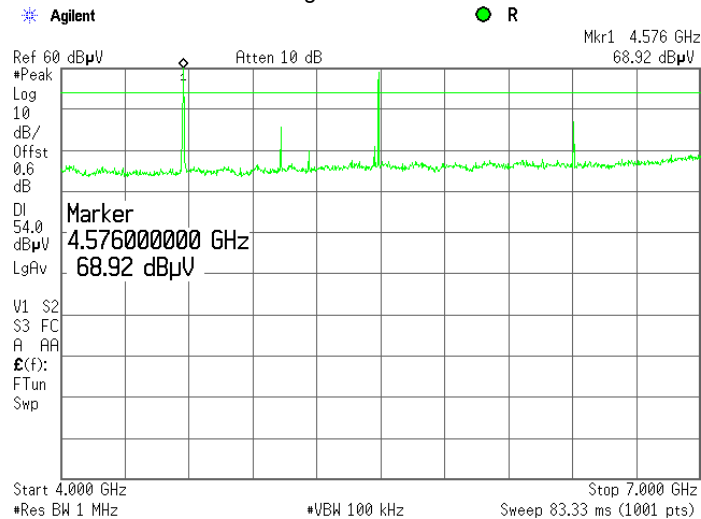

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.23 Radiated emission measurements from 4000 to 7000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

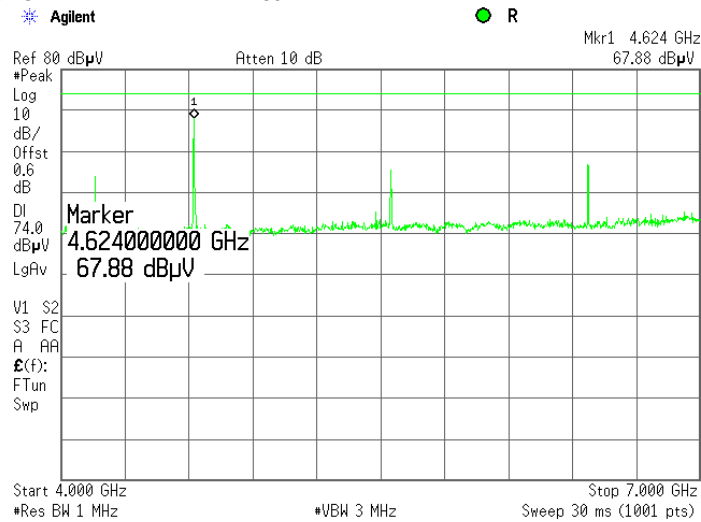

Plot 7.4.24 Radiated emission measurements from 4000 to 7000 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Average

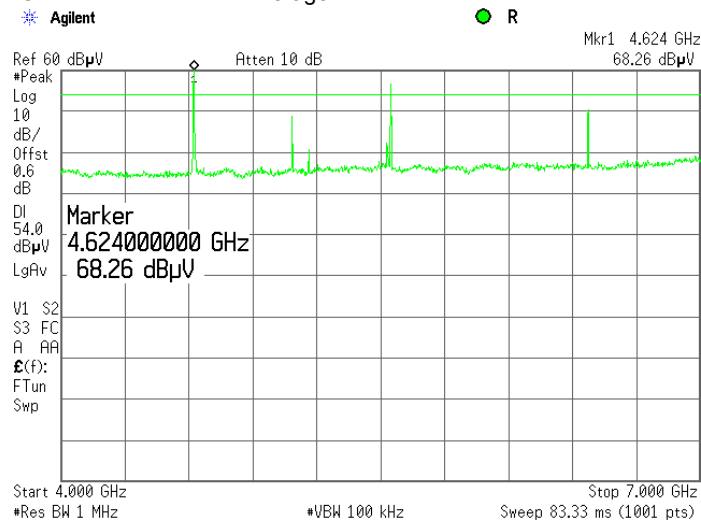

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.25 Radiated emission measurements from 7000 to 9300 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

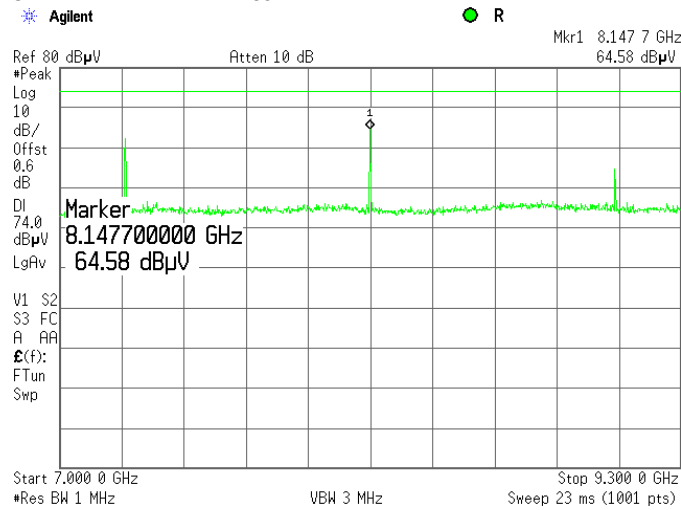

Plot 7.4.26 Radiated emission measurements from 7000 to 9300 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Average

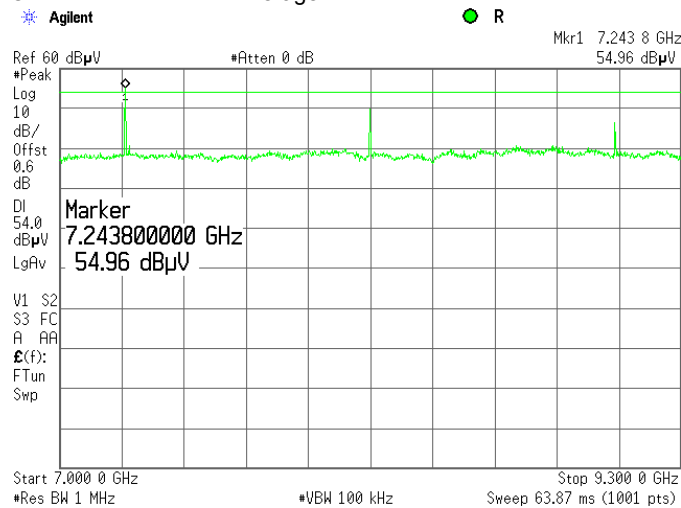

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.27 Radiated emission measurements from 7000 to 9300 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

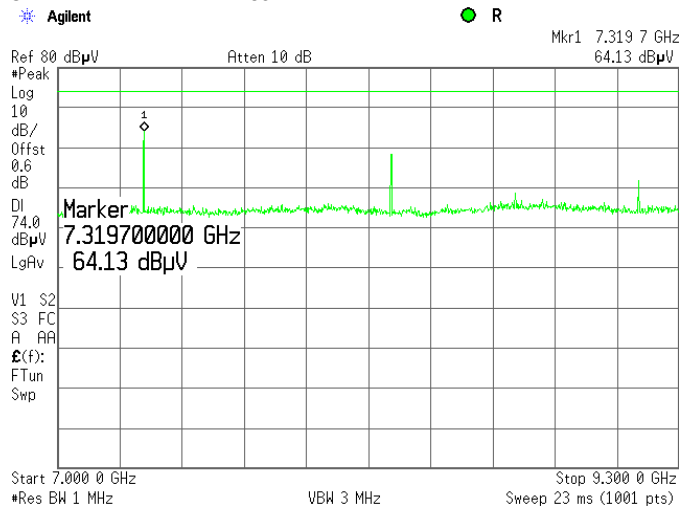

Plot 7.4.28 Radiated emission measurements from 7000 to 9300 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Average

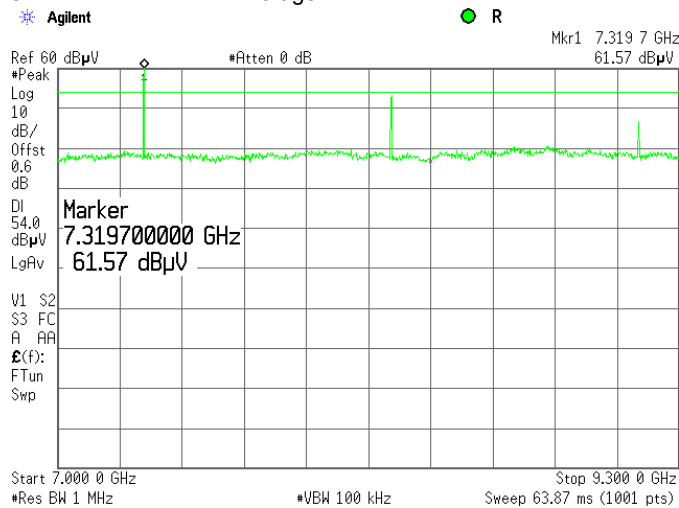

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.29 Radiated emission measurements from 7000 to 9300 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

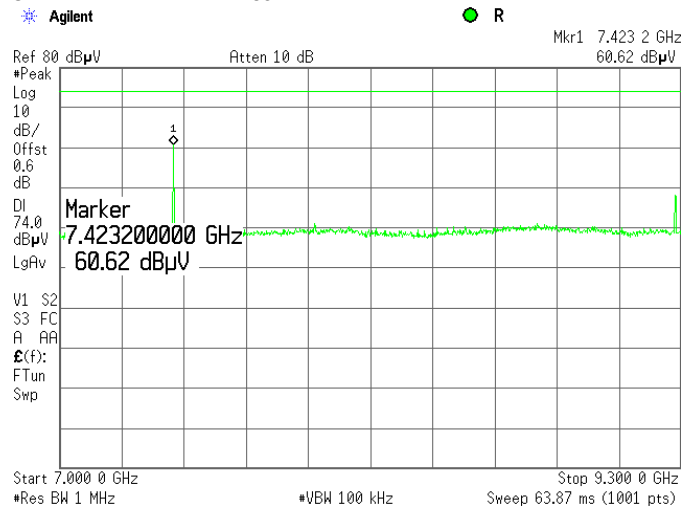

Plot 7.4.30 Radiated emission measurements from 7000 to 9300 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Average

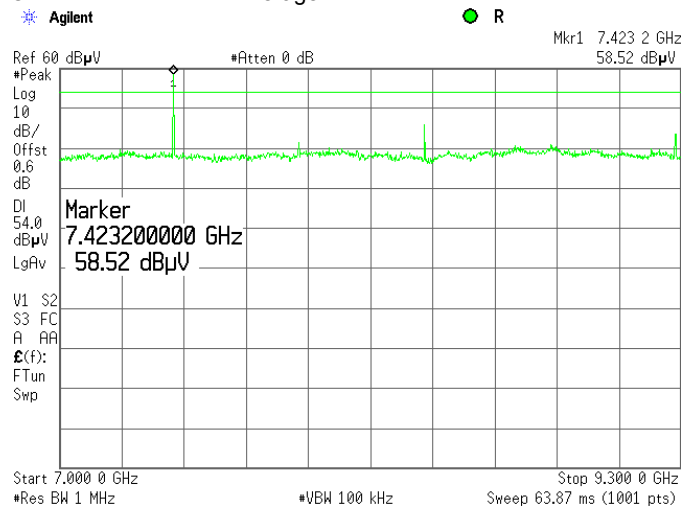

Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.31 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Semi-Anechoic chamber
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal

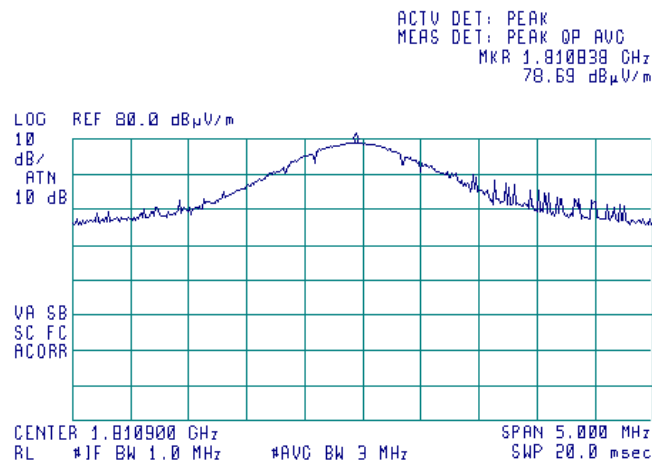

Plot 7.4.32 Radiated emission measurements at the second harmonic of mid carrier frequency


TEST SITE: Semi-Anechoic chamber
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal

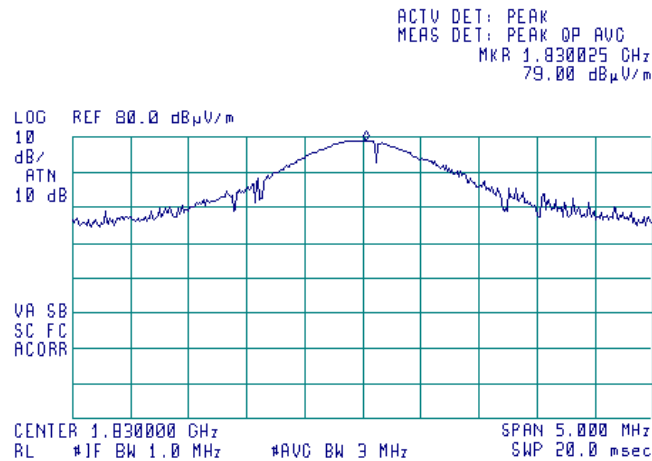

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.33 Radiated emission measurements at the second harmonic of high carrier frequency


TEST SITE: Semi-Anechoic chamber
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal

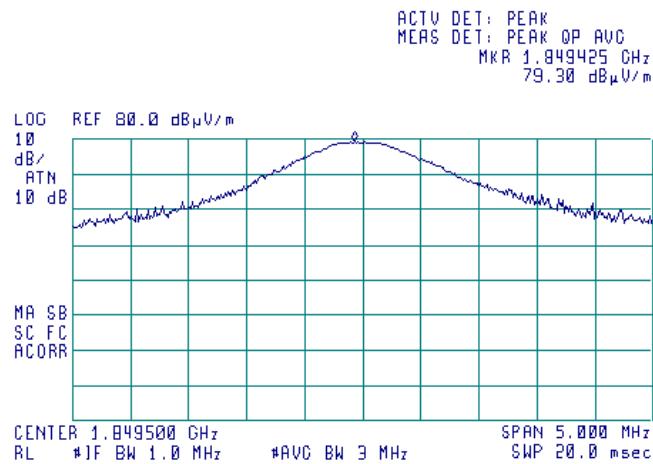

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.34 Radiated emission measurements at the third harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal
 DETECTOR: Peak

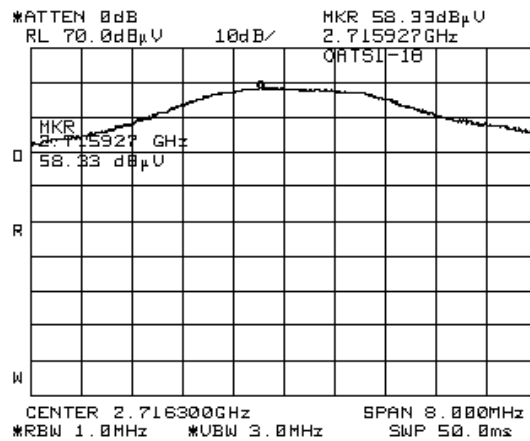

Plot 7.4.35 Radiated emission measurements at the third harmonic of low carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal
 DETECTOR: Average

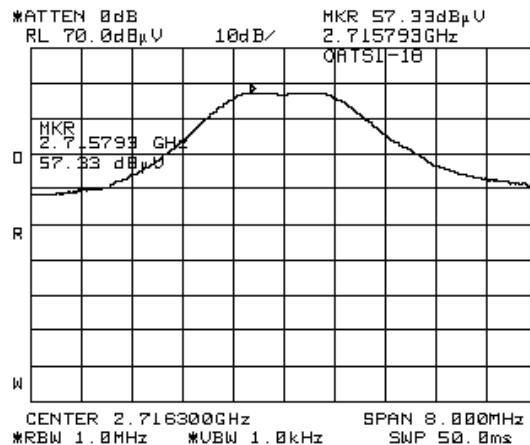

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.36 Radiated emission measurements at the third harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal
 DETECTOR: Peak

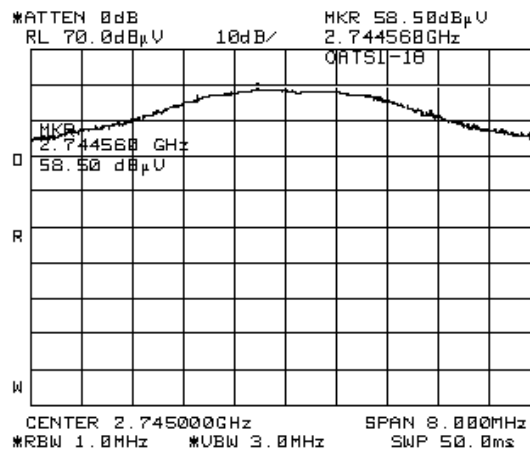

Plot 7.4.37 Radiated emission measurements at the third harmonic of mid carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal
 DETECTOR: Average

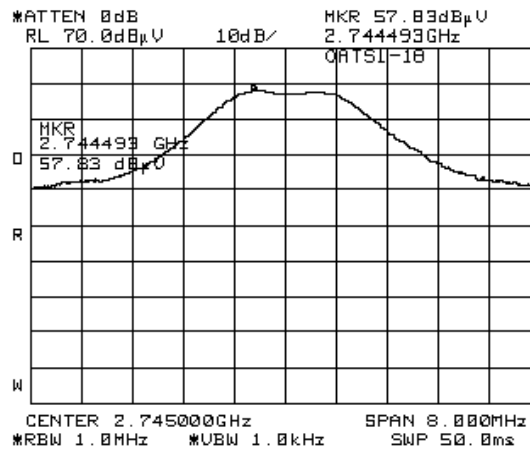

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.38 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal
 DETECTOR: Peak

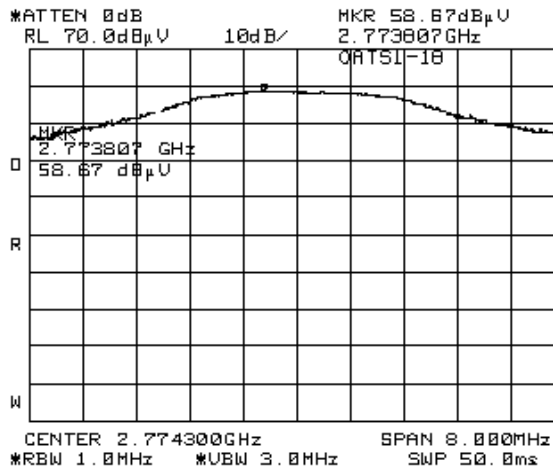

Plot 7.4.39 Radiated emission measurements at the third harmonic of high carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal
 DETECTOR: Average

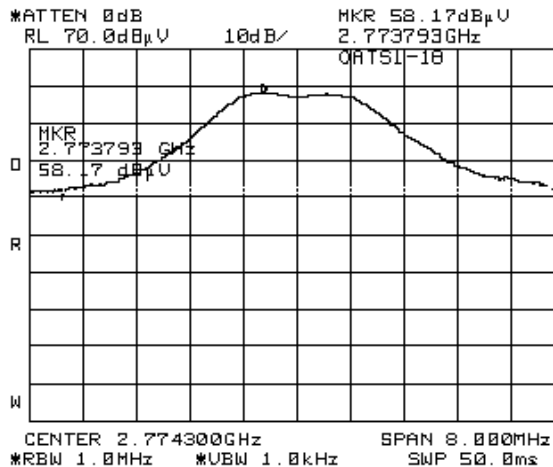

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.40 Radiated emission measurements at the fourth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
MODULATION: PSK
ANTENNA POLARIZATION: Vertical and Horizontal
DETECTOR: Peak

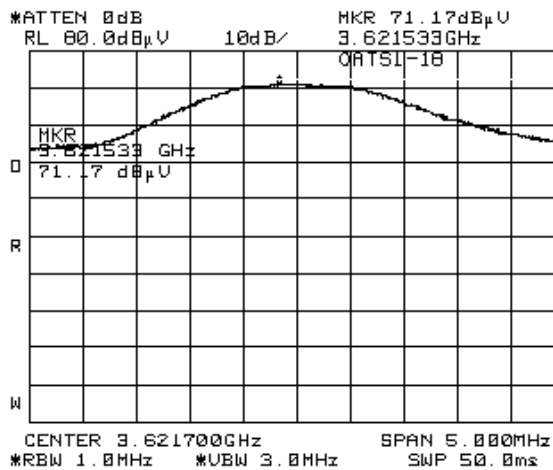

Plot 7.4.41 Radiated emission measurements at the fourth harmonic of low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
MODULATION: PSK
ANTENNA POLARIZATION: Vertical and Horizontal
DETECTOR: Average

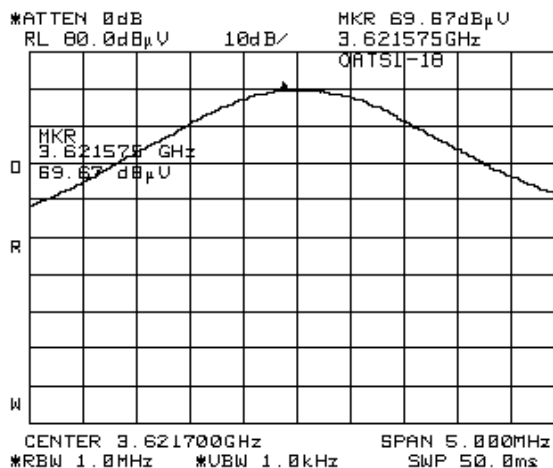

Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.42 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal
 DETECTOR: Peak

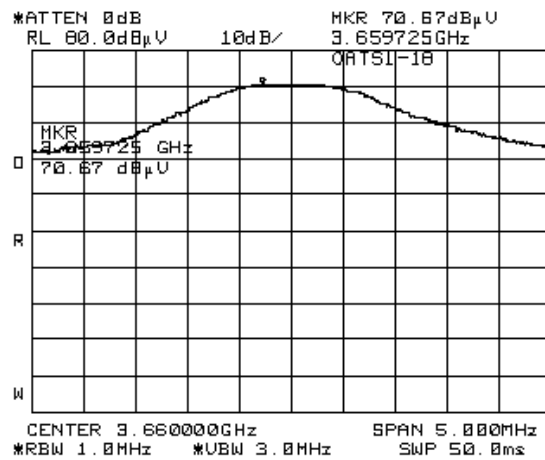

Plot 7.4.43 Radiated emission measurements at the fourth harmonic of mid carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal
 DETECTOR: Average

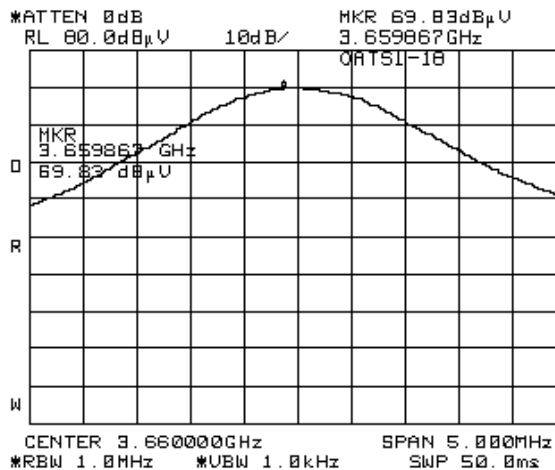

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.44 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal
 DETECTOR: Peak

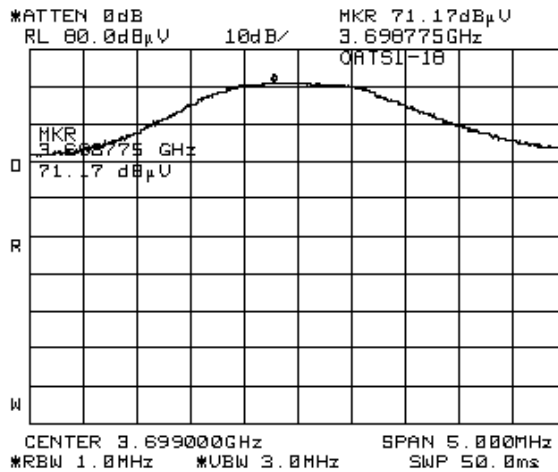

Plot 7.4.45 Radiated emission measurements at the fourth harmonic of high carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 MODULATION: PSK
 ANTENNA POLARIZATION: Vertical and Horizontal
 DETECTOR: Average

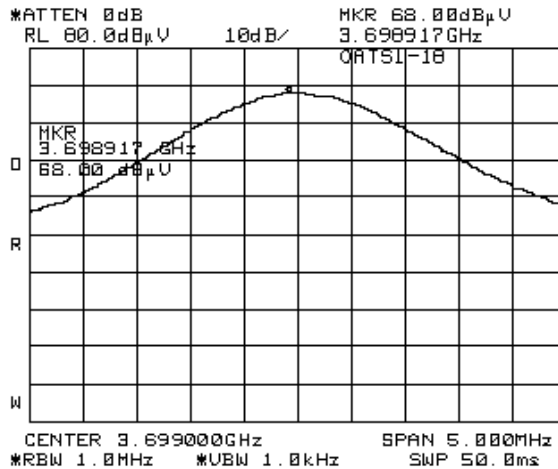

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.46 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK
DETECTOR: Peak

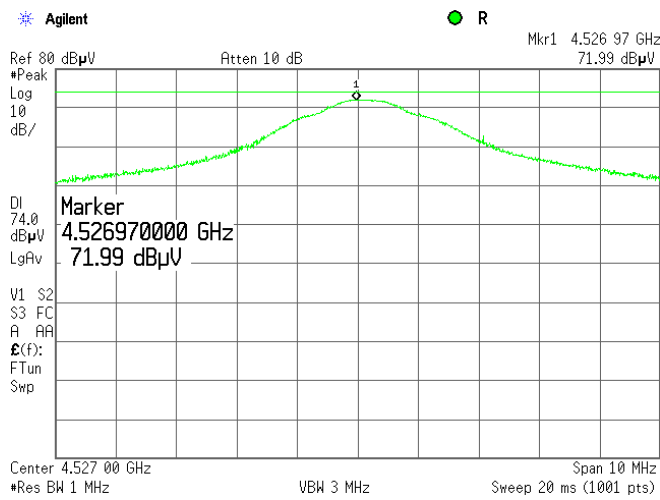

Plot 7.4.47 Radiated emission measurements at the fifth harmonic of low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK
DETECTOR: Average

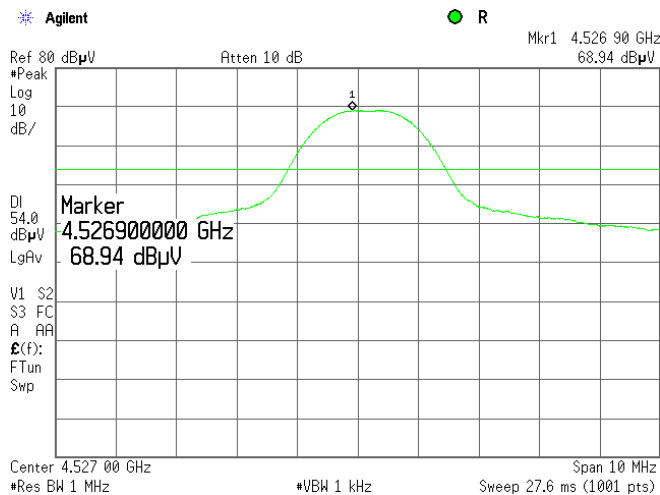

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.48 Radiated emission measurements at the fifth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 MODULATION: PSK
 DETECTOR: Peak

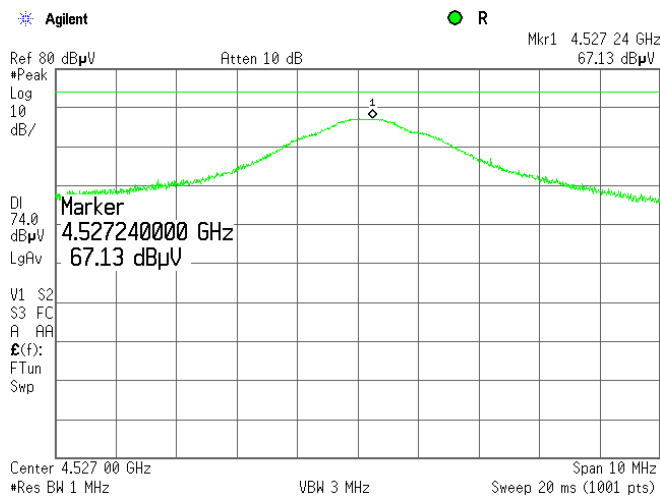

Plot 7.4.49 Radiated emission measurements at the fifth harmonic of low carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK
 DETECTOR: Average

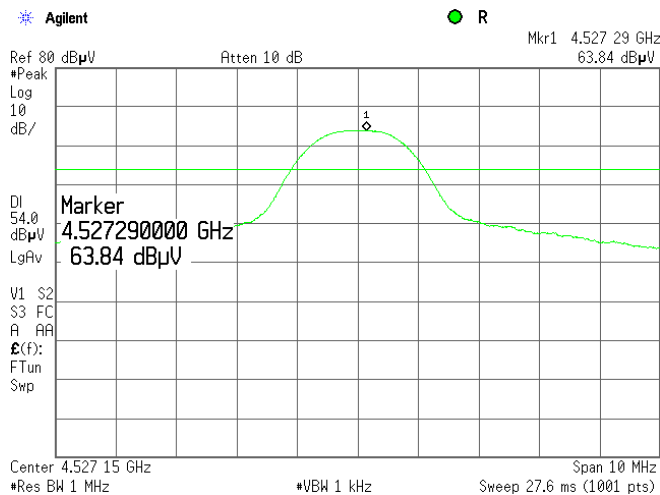

Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.50 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK
 DETECTOR: Peak

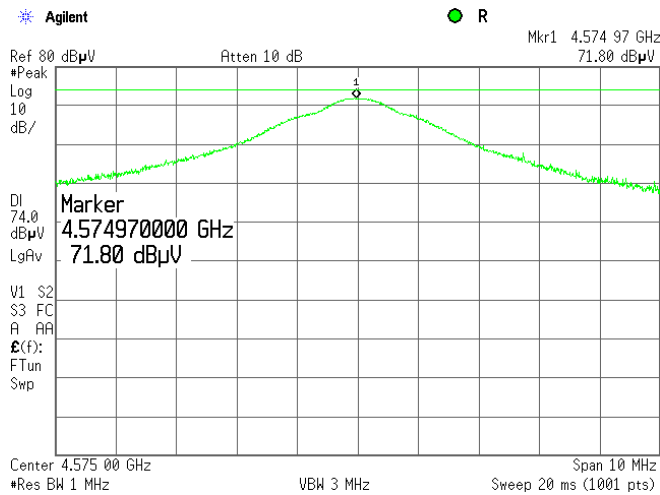

Plot 7.4.51 Radiated emission measurements at the fifth harmonic of mid carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK
 DETECTOR: Average

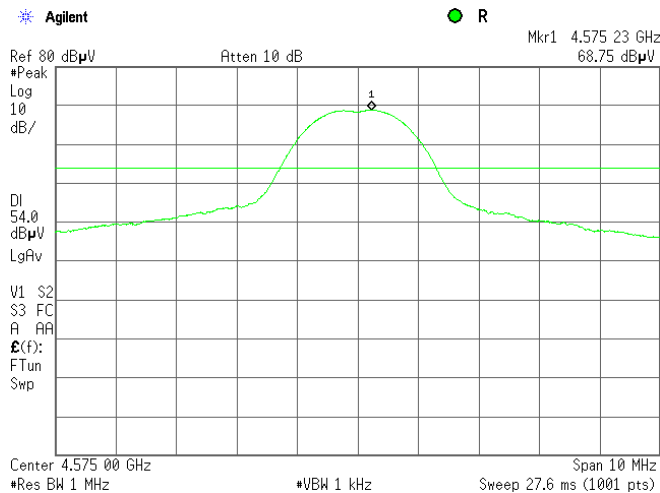

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.52 Radiated emission measurements at the fifth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK
DETECTOR: Peak

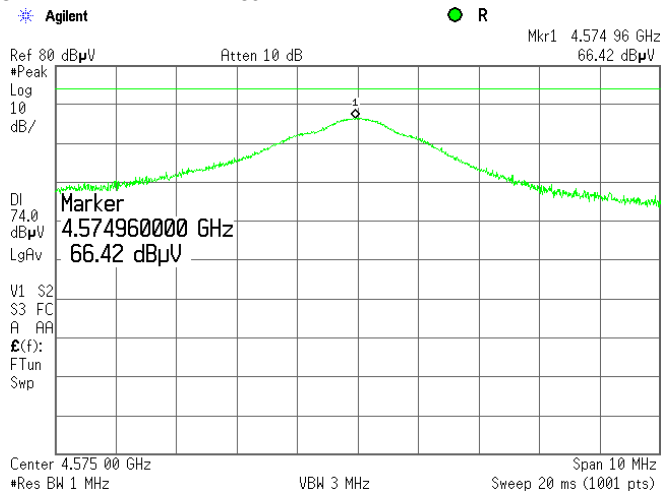

Plot 7.4.53 Radiated emission measurements at the fifth harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK
DETECTOR: Average

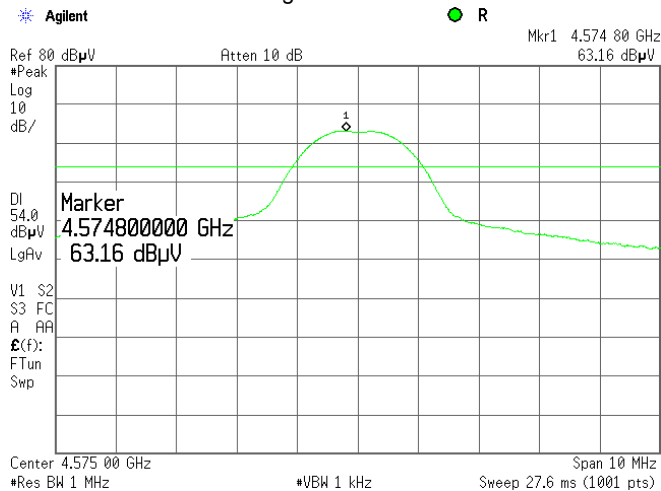

Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.54 Radiated emission measurements at the fifth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK
 DETECTOR: Peak

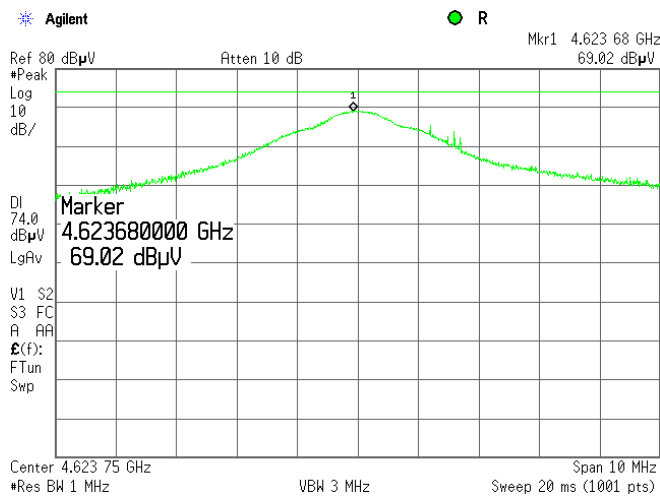

Plot 7.4.55 Radiated emission measurements at the fifth harmonic of high carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK
 DETECTOR: Average

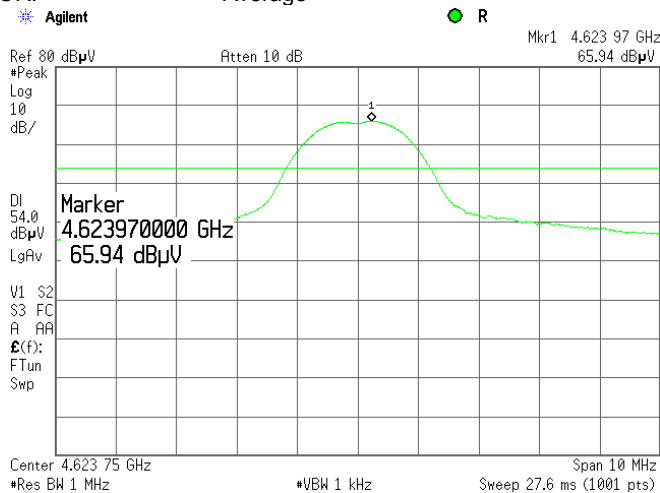

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.56 Radiated emission measurements at the fifth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK
DETECTOR: Peak

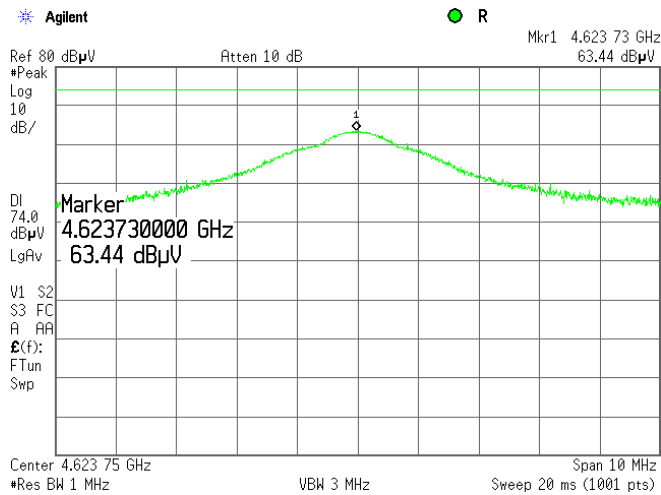

Plot 7.4.57 Radiated emission measurements at the fifth harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK
DETECTOR: Average

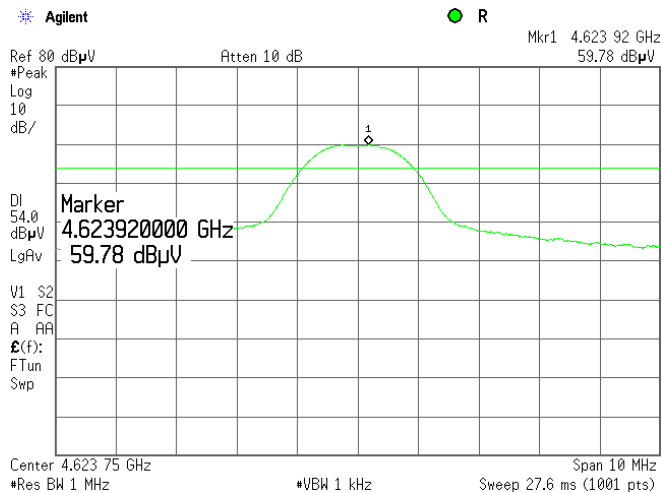

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.58 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK
 DETECTOR: Peak

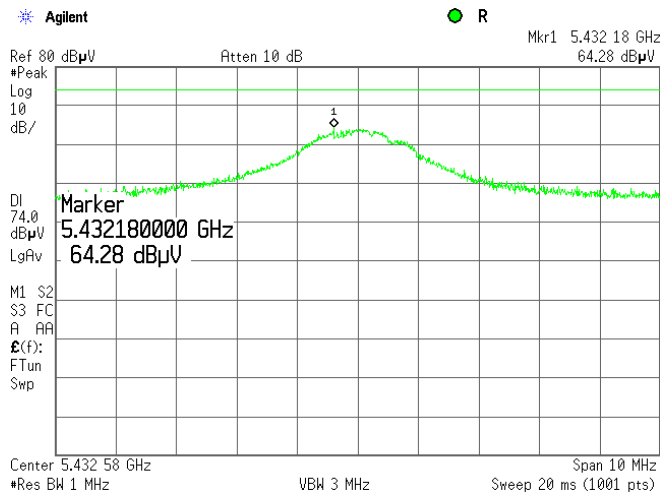

Plot 7.4.59 Radiated emission measurements at the sixth harmonic of low carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK
 DETECTOR: Average

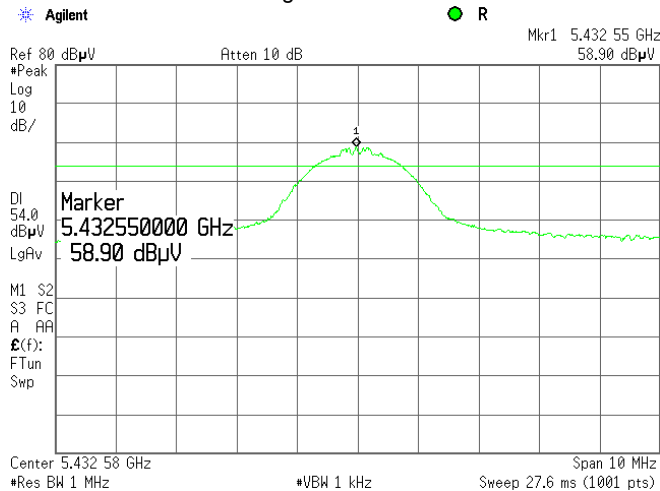

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.60 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 MODULATION: PSK
 DETECTOR: Peak

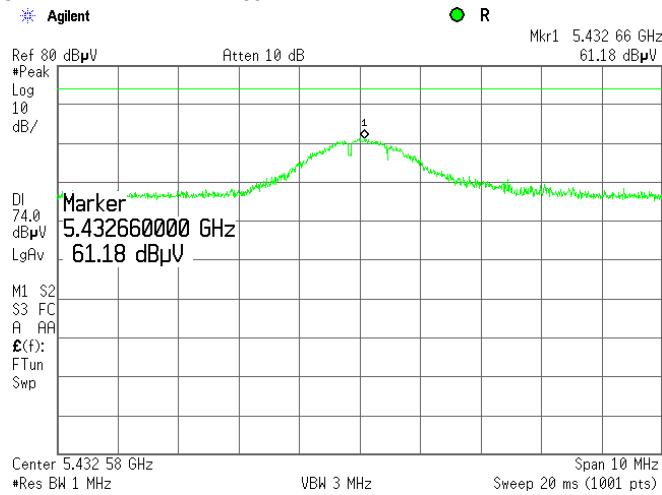

Plot 7.4.61 Radiated emission measurements at the sixth harmonic of low carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 MODULATION: PSK
 DETECTOR: Average

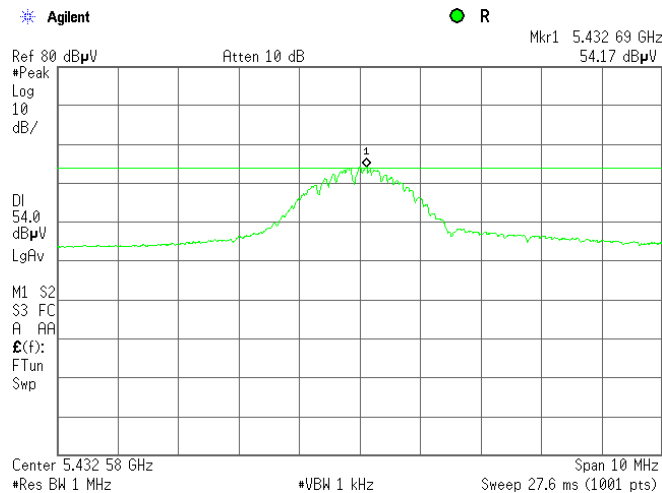

Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.62 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK

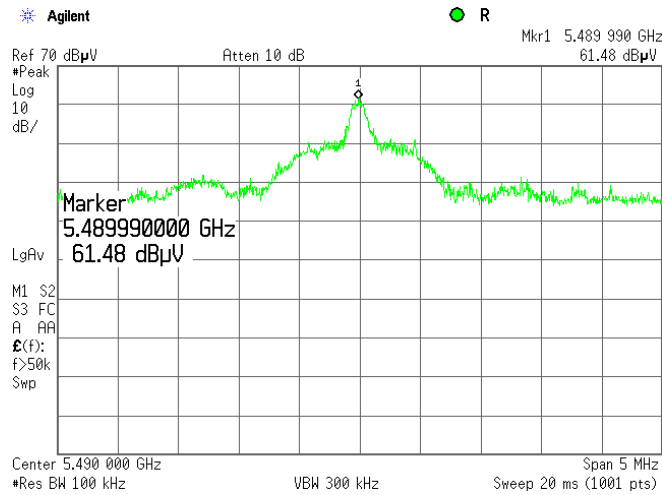

Plot 7.4.63 Radiated emission measurements at the sixth harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK

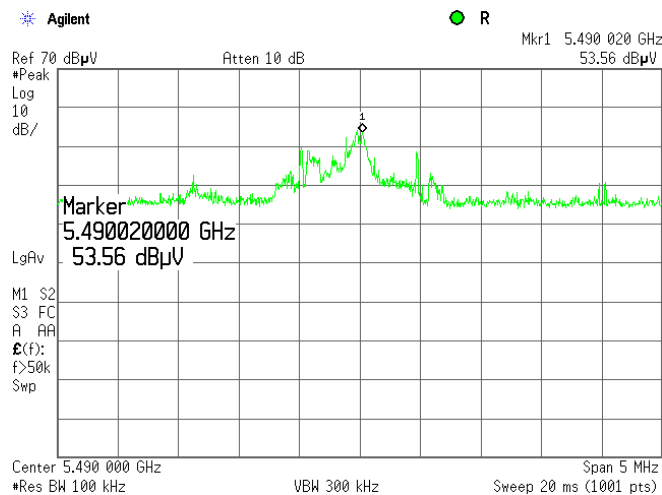

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.64 Radiated emission measurements at the sixth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK

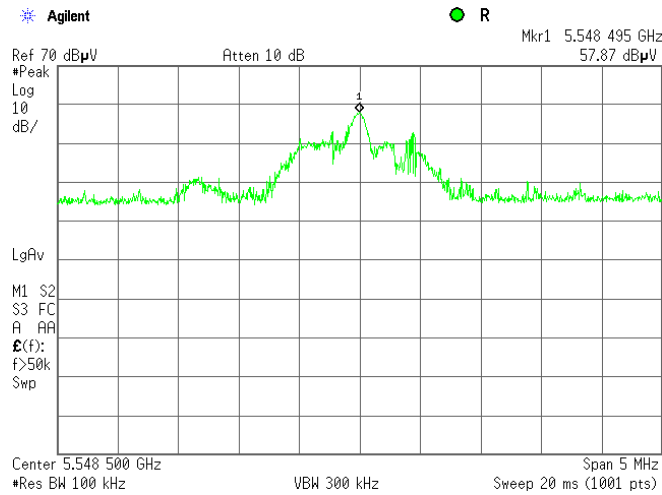

Plot 7.4.65 Radiated emission measurements at the sixth harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK

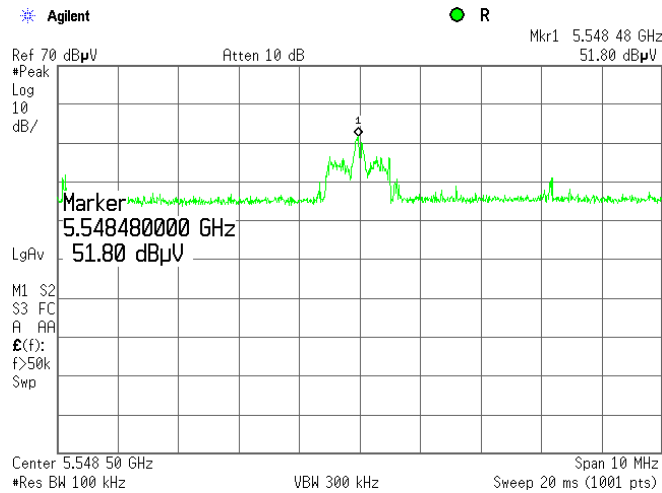

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.66 Radiated emission measurements at the seventh harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK

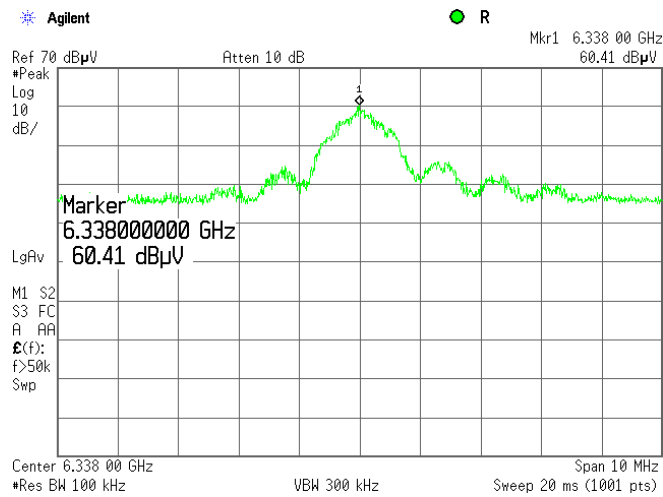

Plot 7.4.67 Radiated emission measurements at the seventh harmonic of low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK

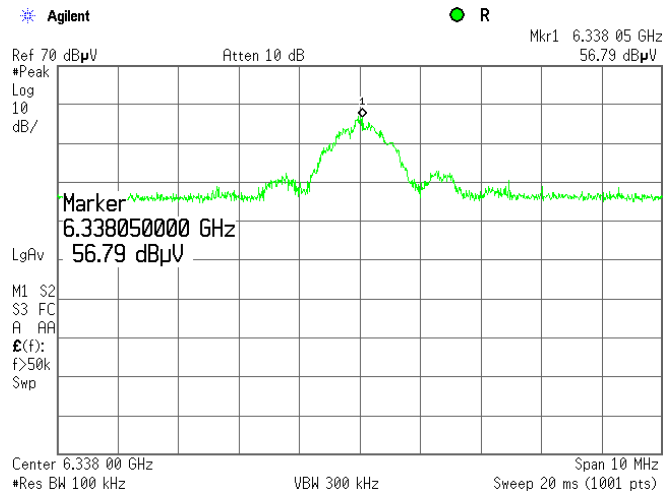

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.68 Radiated emission measurements at the seventh harmonic of mid carrier frequency

TEST SITE: Semi
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK

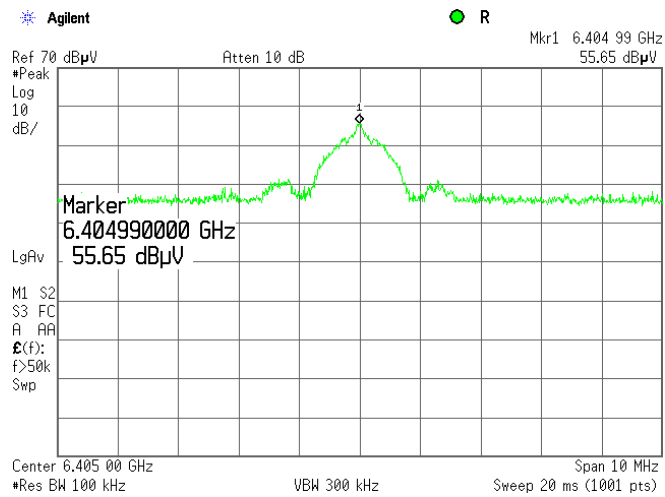

Plot 7.4.69 Radiated emission measurements at the seventh harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK

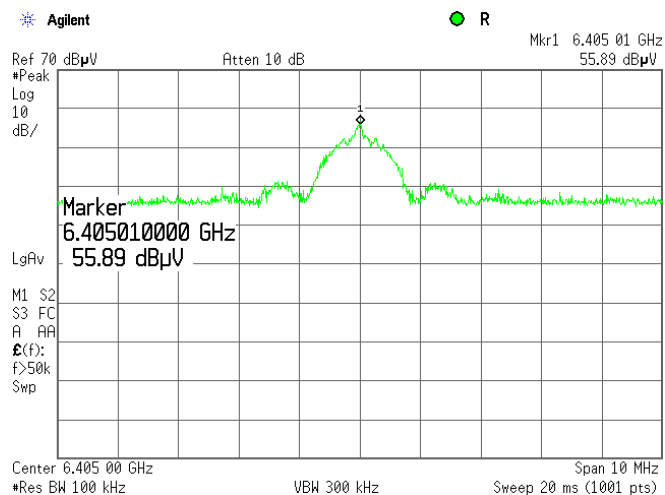

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.70 Radiated emission measurements at the seventh harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK

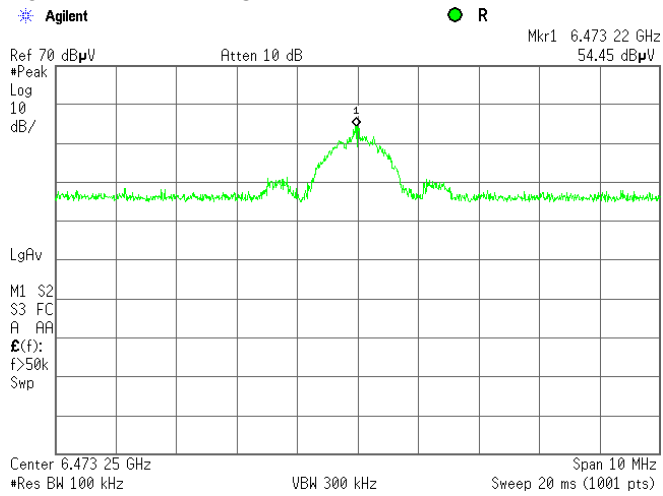

Plot 7.4.71 Radiated emission measurements at the seventh harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK

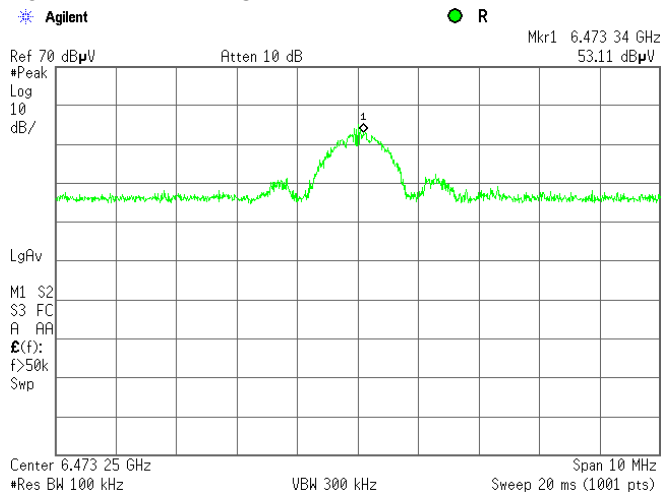

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.72 Radiated emission measurements at the eighth harmonic of low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK

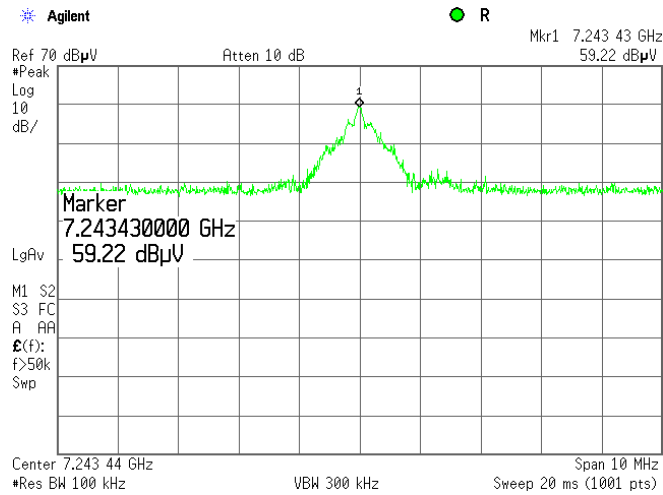

Plot 7.4.73 Radiated emission measurements at the eighth harmonic of low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK

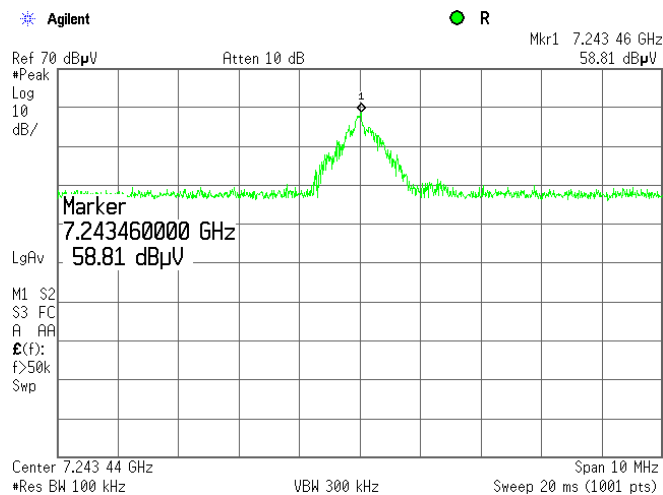

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.74 Radiated emission measurements at the eighth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK
 VBW: 3 MHz

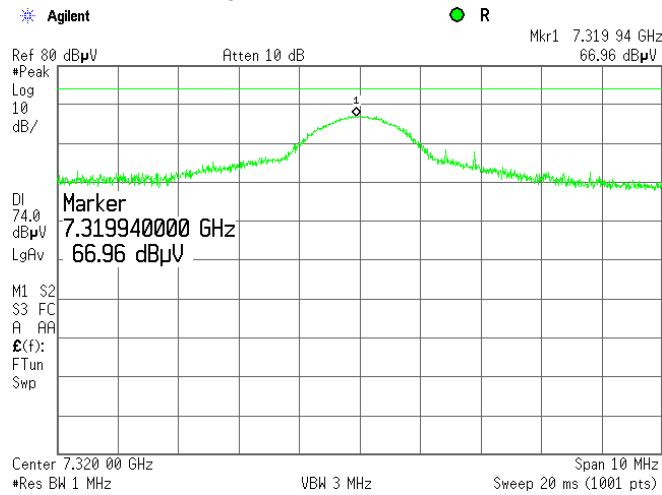

Plot 7.4.75 Radiated emission measurements at the eighth harmonic of mid carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 MODULATION: PSK
 VBW: 1 kHz

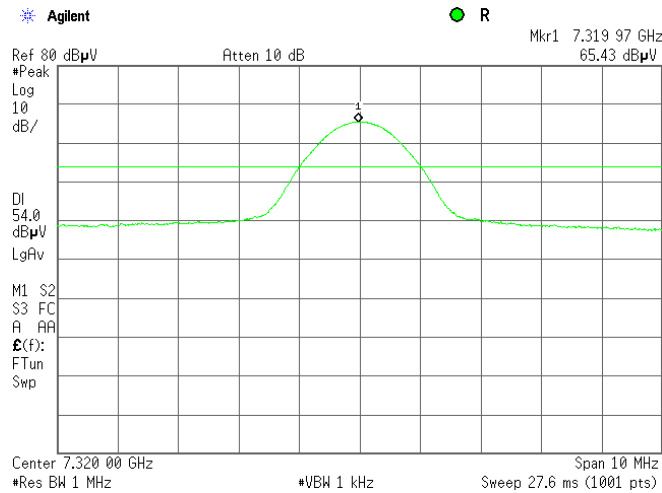

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.76 Radiated emission measurements at the eighth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 MODULATION: PSK
 VBW: 3 MHz

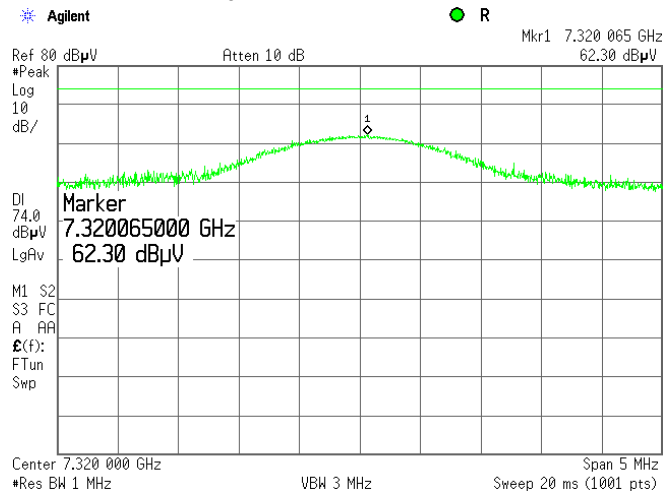

Plot 7.4.77 Radiated emission measurements at the eighth harmonic of mid carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 MODULATION: PSK
 VBW: 1 kHz

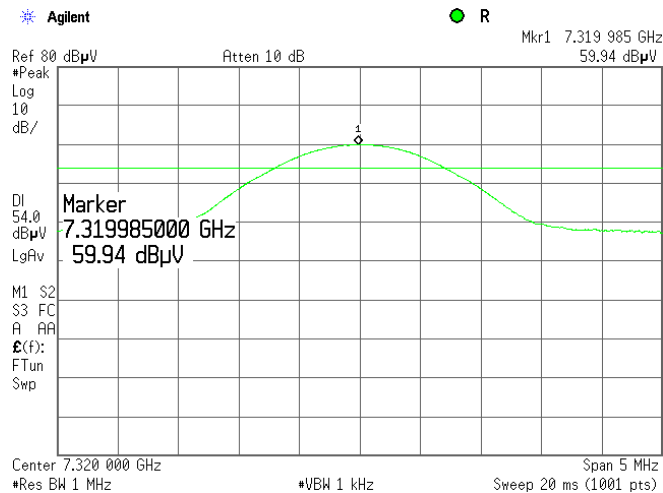

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.78 Radiated emission measurements at the eighth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK
VBW: 3 MHz

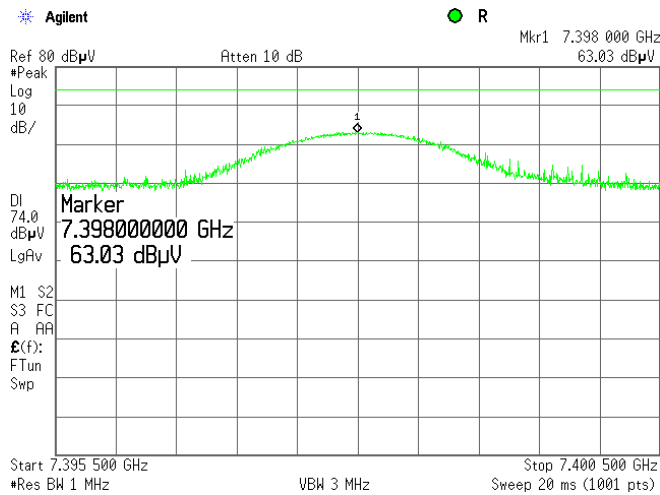

Plot 7.4.79 Radiated emission measurements at the eighth harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
MODULATION: PSK
VBW: 1 kHz

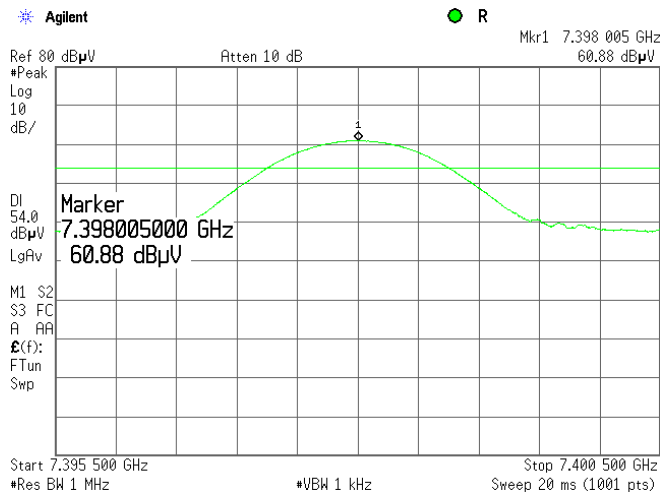

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.80 Radiated emission measurements at the eighth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK
VBW: 3 MHz

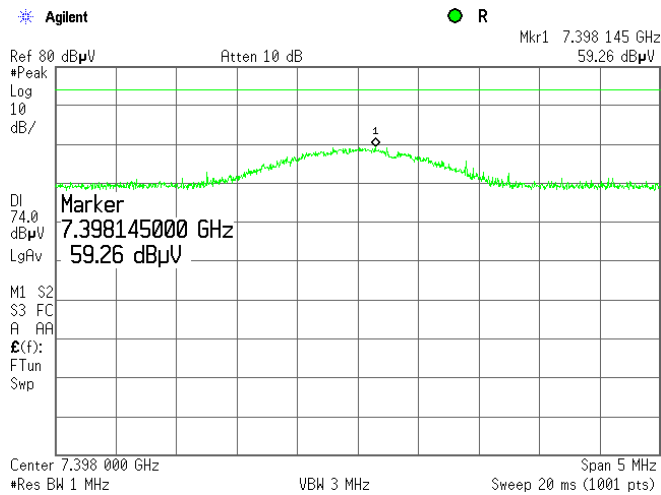

Plot 7.4.81 Radiated emission measurements at the eighth harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
MODULATION: PSK
VBW: 1 kHz

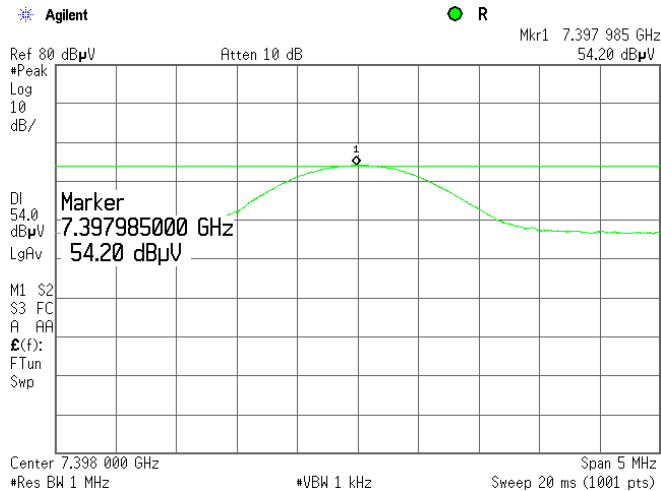

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.82 Radiated emission measurements at the ninth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

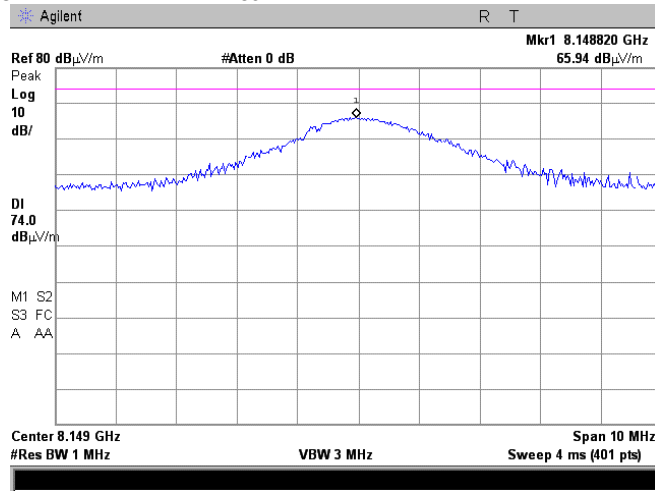

Plot 7.4.83 Radiated emission measurements at the ninth harmonic of low carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: PSK
 DETECTOR: Average

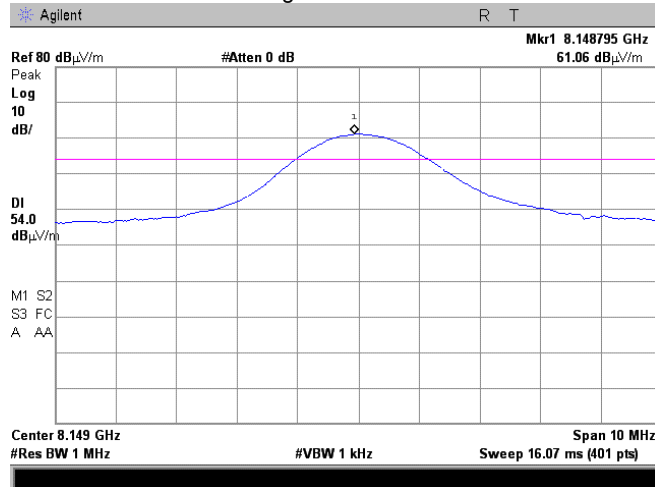

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.84 Radiated emission measurements at the ninth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

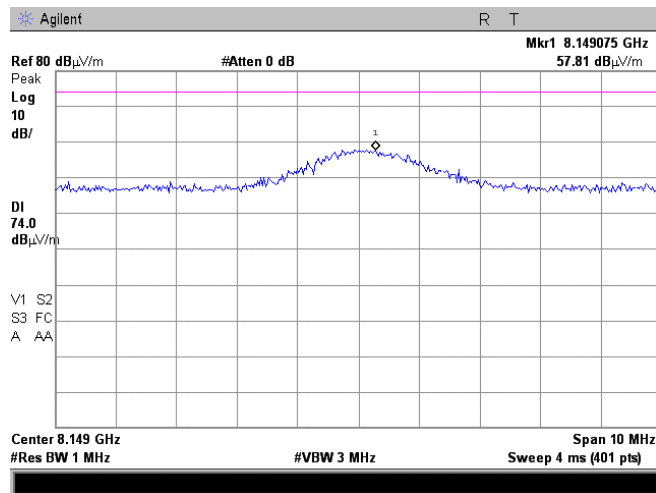

Plot 7.4.85 Radiated emission measurements at the ninth harmonic of low carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Average

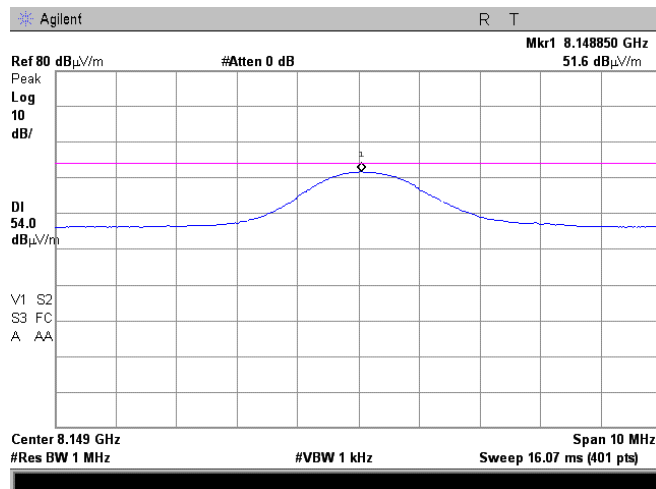

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.86 Radiated emission measurements at the ninth harmonic of mid carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

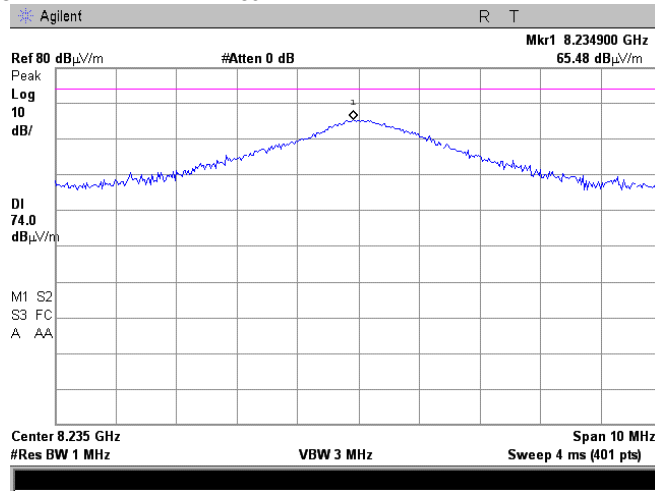

Plot 7.4.87 Radiated emission measurements at the ninth harmonic of mid carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: PSK
 DETECTOR: Average

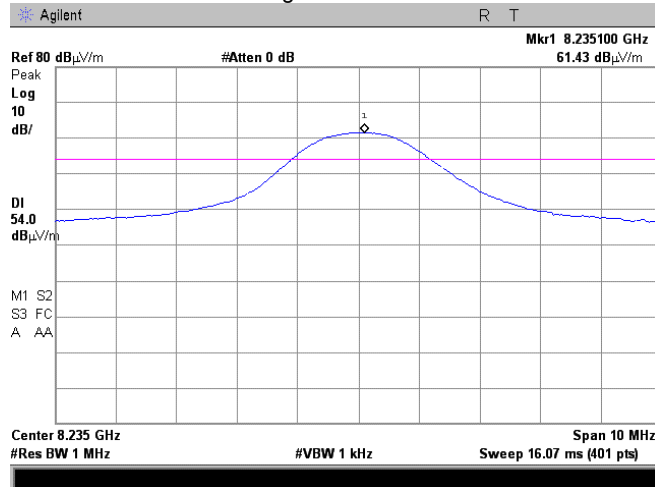

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.88 Radiated emission measurements at the ninth harmonic of mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
OPERATIONAL MODE: PSK
DETECTOR: Peak

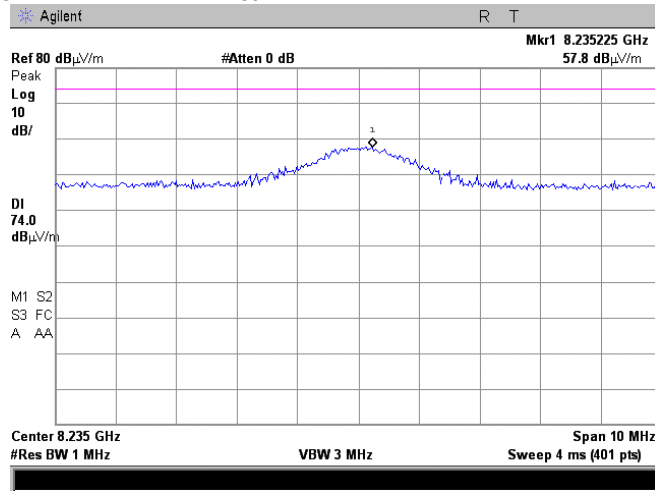

Plot 7.4.89 Radiated emission measurements at the ninth harmonic of mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
OPERATIONAL MODE: PSK
DETECTOR: Average

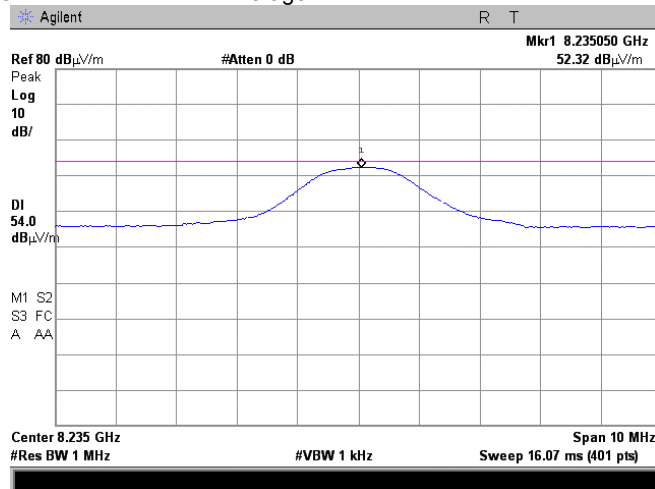

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.90 Radiated emission measurements at the ninth harmonic of high carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

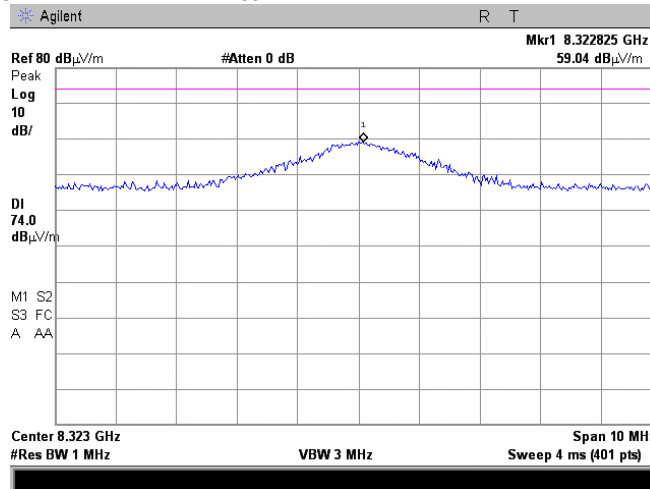

Plot 7.4.91 Radiated emission measurements at the ninth harmonic of high carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: PSK
 DETECTOR: Average

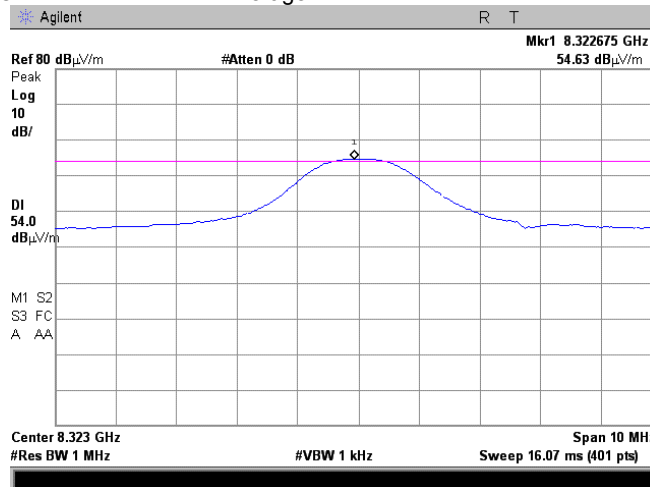

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.92 Radiated emission measurements at the ninth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
OPERATIONAL MODE: PSK
DETECTOR: Peak

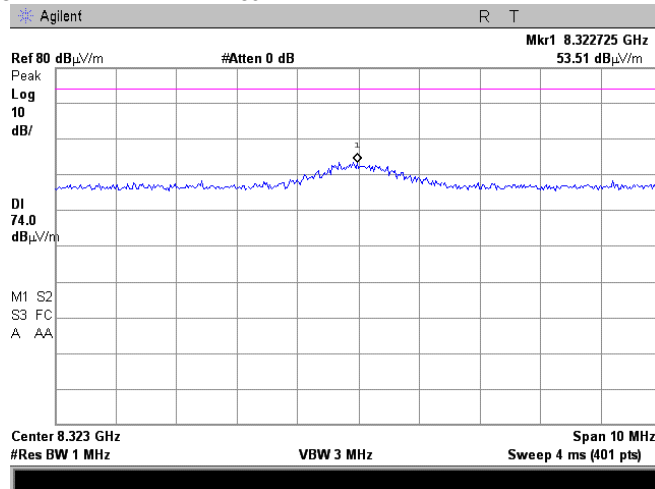

Plot 7.4.93 Radiated emission measurements at the ninth harmonic of high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
OPERATIONAL MODE: PSK
DETECTOR: Average

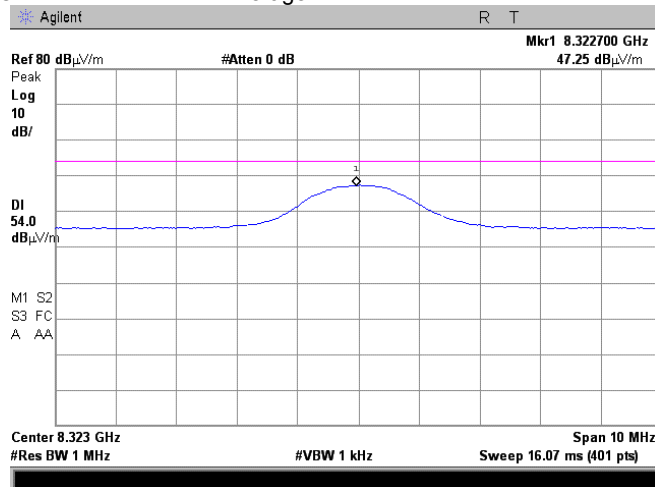

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.94 Radiated emission measurements at the tenth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

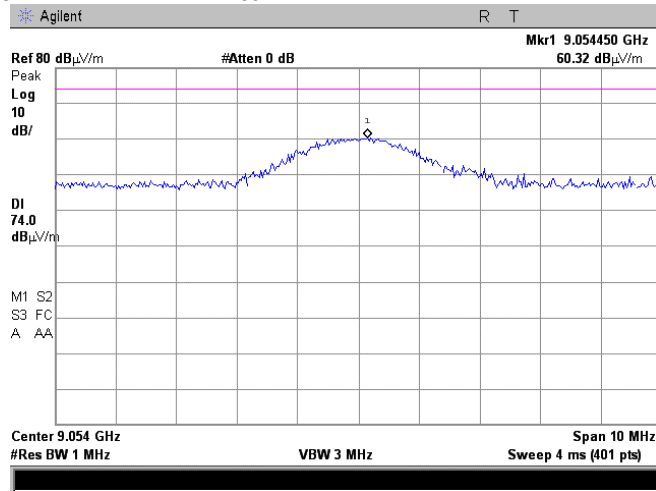

Plot 7.4.95 Radiated emission measurements at the tenth harmonic of low carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical
 OPERATIONAL MODE: PSK
 DETECTOR: Average

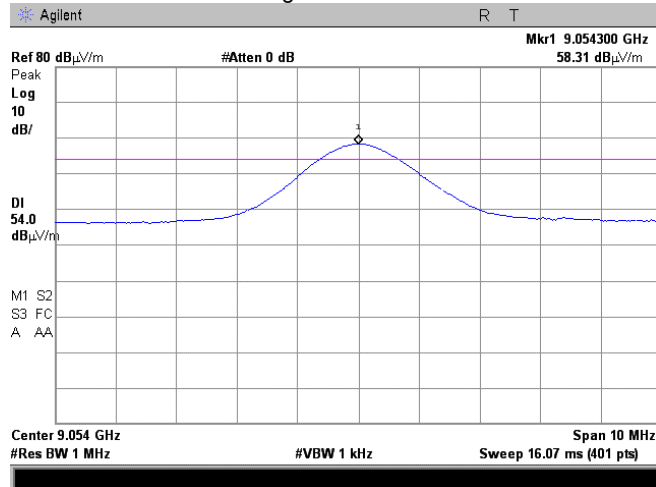

Test specification: Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions			
Test procedure: FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/1/2011 - 6/15/2011			
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.96 Radiated emission measurements at the tenth harmonic of low carrier frequency

TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

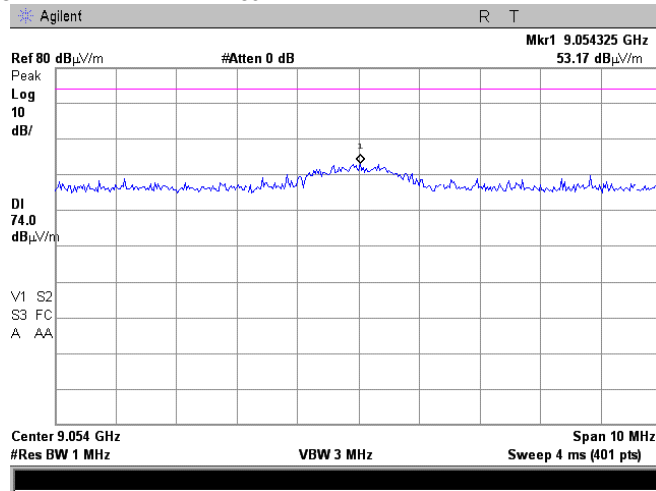

Plot 7.4.97 Radiated emission measurements at the tenth harmonic of low carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Average

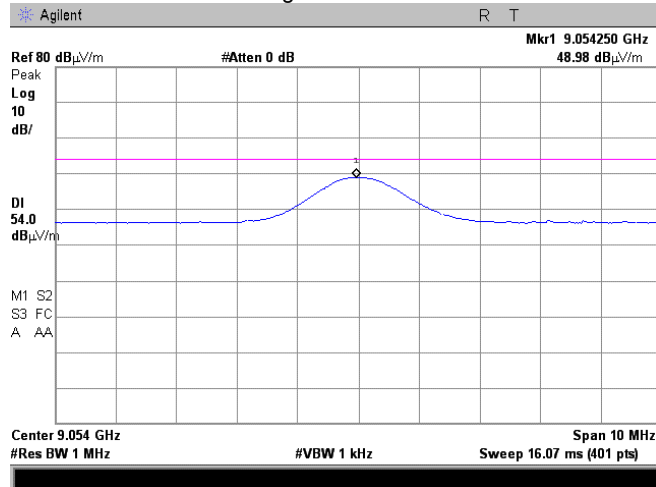

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.98 Radiated emission measurements at the tenth harmonic of mid carrier frequency


TEST SITE: OATS
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal
 OPERATIONAL MODE: PSK
 DETECTOR: Peak

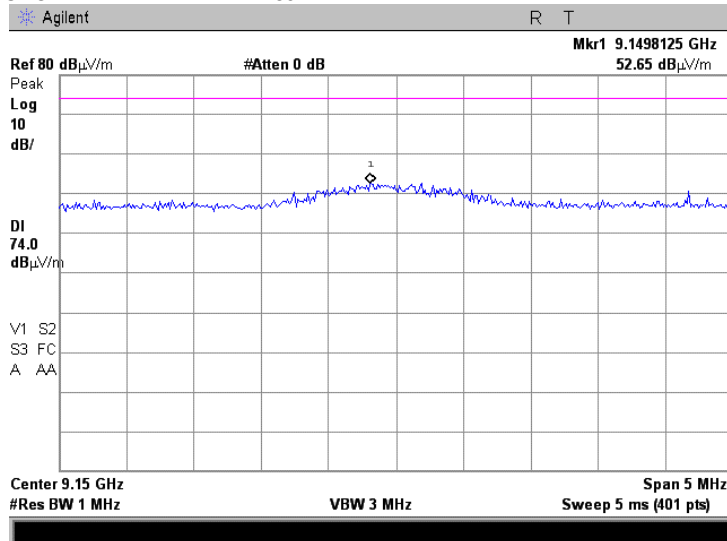

Test specification:		Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			


Plot 7.4.99 Radiated emission measurements at the tenth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
OPERATIONAL MODE: PSK

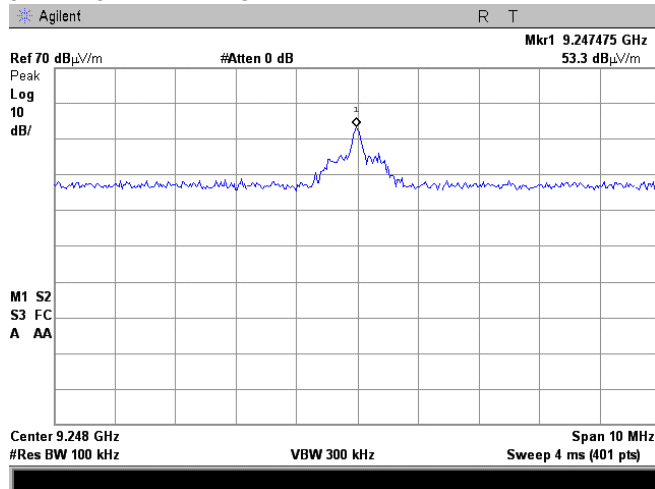


Plot 7.4.100 Radiated emission measurements at the tenth harmonic of high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
OPERATIONAL MODE: PSK

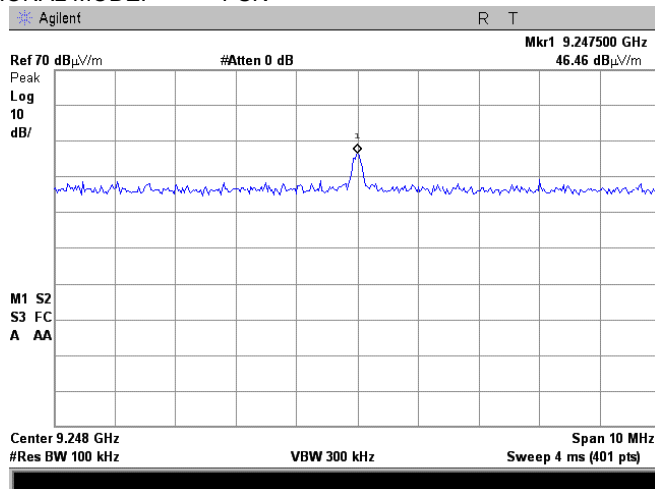


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date:	6/1/2011 - 6/15/2011		
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.4.101 Transmission pulse duration, modulation PSK

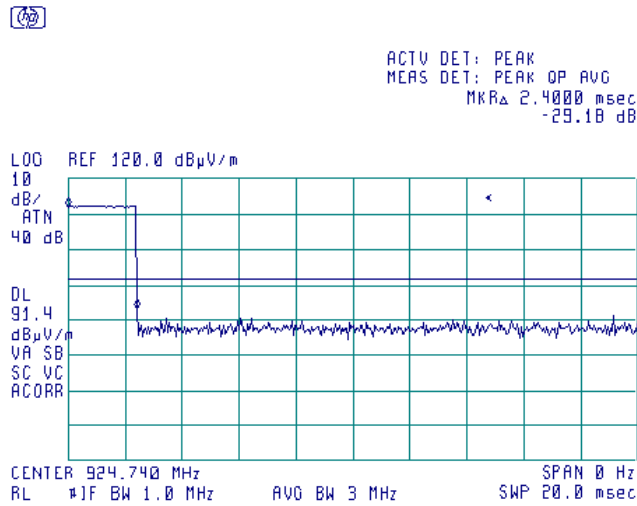

Plot 7.4.102 Transmission pulse period, modulation PSK

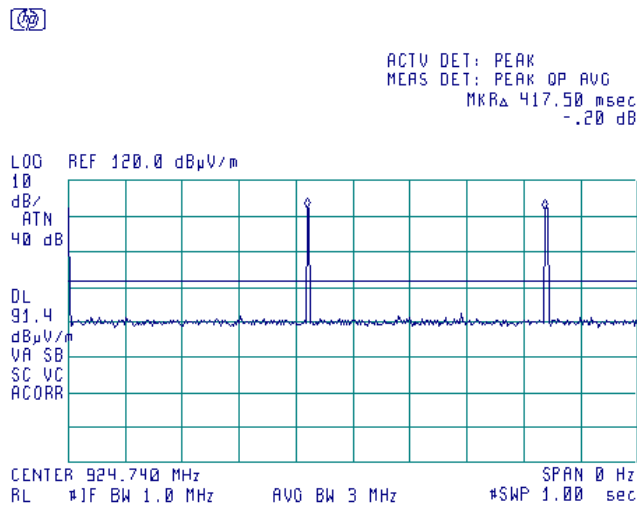

Test specification:		Section 15.247(e), RSS-210 section A8.2(b), Peak power density	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(d)	
Test mode:	Compliance	Verdict:	PASS
Date:	5/5/2011		
Temperature: 22.3 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

7.5 Peak spectral power density

7.5.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μV/m)*
902.0 – 928.0	3.0	8.0	103.2
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.5.2 Test procedure for field strength measurements

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.


7.5.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.

7.5.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.5.2 and associated plots.

Test specification:		Section 15.247(e), RSS-210 section A8.2(b), Peak power density	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(d)	
Test mode:	Compliance	Verdict:	PASS
Date:	5/5/2011		
Temperature: 22.3 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

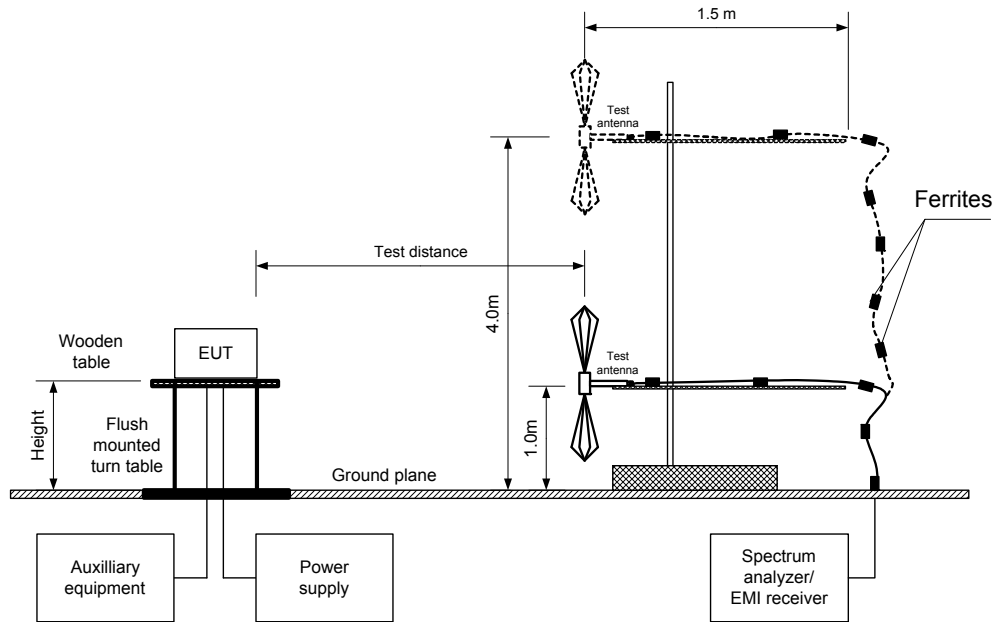

Test specification: Section 15.247(e), RSS-210 section A8.2(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode:	Compliance	Verdict: PASS	
Date:	5/5/2011		
Temperature: 22.3 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Table 7.5.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY: 902 - 928 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 3 kHz
VIDEO BANDWIDTH: 10 kHz
TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
MODULATION: PSK
MODULATING SIGNAL: PRBS
BIT RATE: 900bps
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, μB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
905.43	102.17	3.0	103.23	-4.06	Vertical	1	8	Pass
915.00	103.63	3.0	103.23	-2.60	Vertical	1	357	Pass
924.75	102.71	3.0	103.23	-3.52	Vertical	1	8	Pass

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

** - EUT front panel refer to 0 degrees position of turntable.


Reference numbers of test equipment used

HL 0521	HL 0604	HL 2871	HL 3623			
---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.

Test specification:		Section 15.247(e), RSS-210 section A8.2(b), Peak power density	
Test procedure:		FR Vol. 62, page 26243, Section 15.247(d)	
Test mode:	Compliance	Verdict:	PASS
Date:	5/5/2011		
Temperature: 22.3 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.5.1 Peak spectral power density at low frequency within 6 dB band

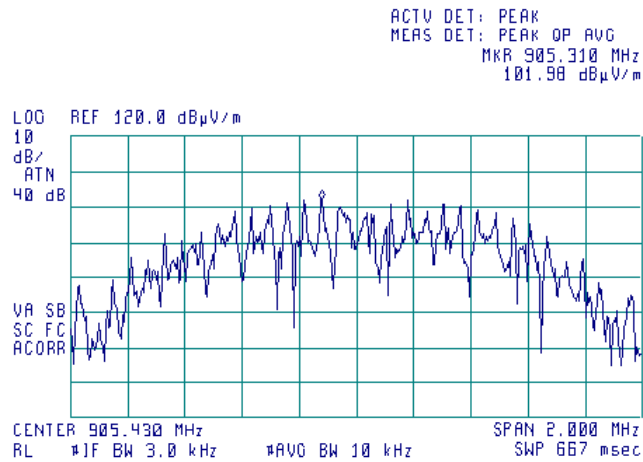

Plot 7.5.2 Peak spectral power density at low frequency zoomed at the peak

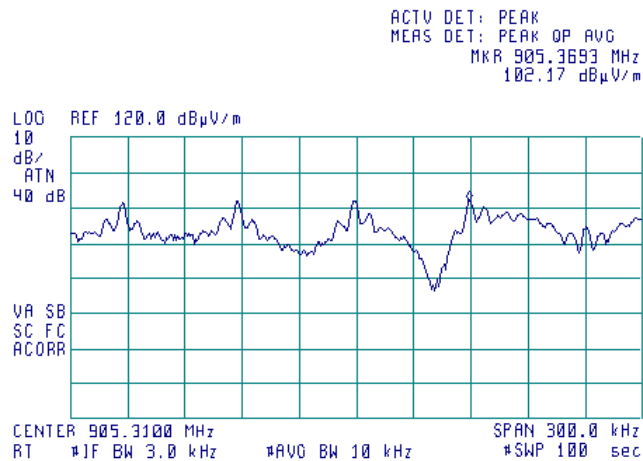





HERMON LABORATORIES

Test specification: Section 15.247(e), RSS-210 section A8.2(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance	Verdict: PASS		
Date: 5/5/2011			
Temperature: 22.3 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.5.3 Peak spectral power density at mid frequency within 6 dB band

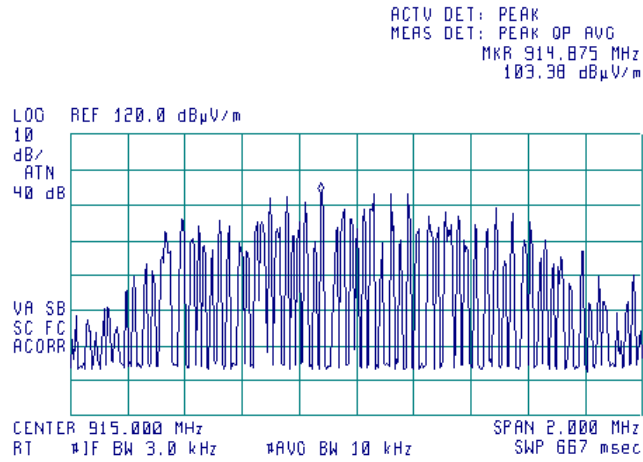


Plot 7.5.4 Peak spectral power density at mid frequency zoomed at the peak

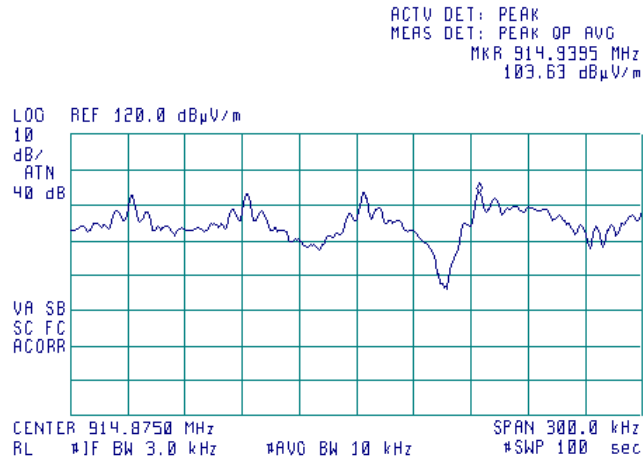


Test specification: Section 15.247(e), RSS-210 section A8.2(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance	Verdict: PASS		
Date: 5/5/2011			
Temperature: 22.3 °C	Air Pressure: 1011 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

Plot 7.5.5 Peak spectral power density at high frequency within 6 dB band

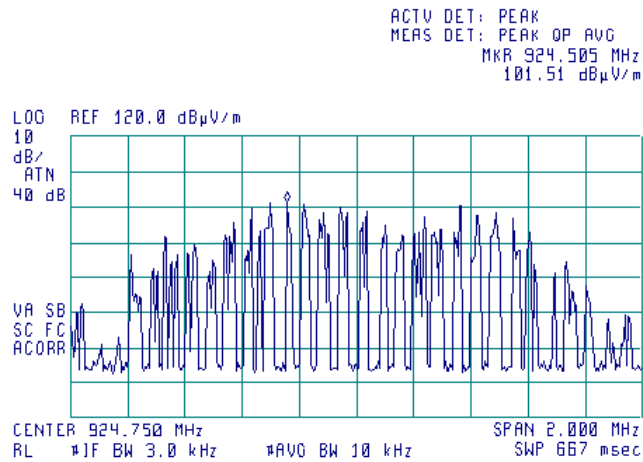

Plot 7.5.6 Peak spectral power density at at high frequency zoomed at the peak

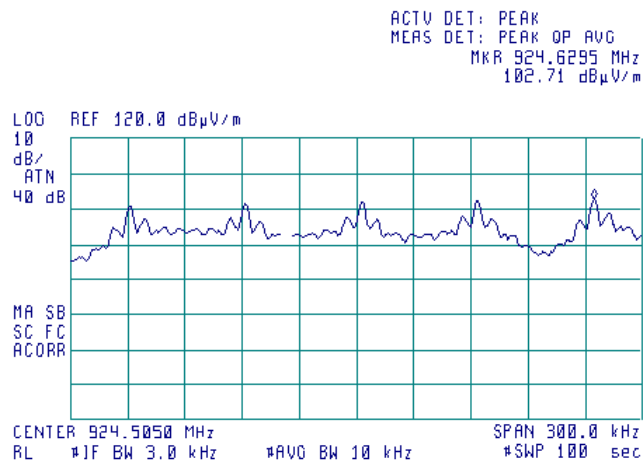



Test specification:		Section 15.203, RSS-Gen section 7.1.2, Antenna requirement	
Test procedure:		Visual inspection	
Test mode:		Compliance	
Date:		6/26/2010	
		Verdict: PASS	
Temperature: 22.3 °C	Air Pressure: 1013 hPa	Relative Humidity: 44 %	Power Supply: Battery
Remarks:			

7.6 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	03-Jul-11	03-Jul-12
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	25-Aug-10	25-Aug-11
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-11	11-Jan-12
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	16-Nov-10	16-Nov-11
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	07-Jul-11	07-Jul-12
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	14-Sep-10	14-Sep-11
3123	Microwave Cable Assembly, 18 GHz, 5.0 m, SMA - SMA	Huber-Suhner	198-9155-00	3123	09-Jun-11	09-Jun-12
3531	Amplifier, low noise, 2 to 8 GHz	Quinstar Technology	QLJ-02084040-J0	111590020 02	23-Dec-10	23-Dec-11
3533	Amplifier, low noise, 6 to 18 GHz	Quinstar Technology	QLJ-06184040-J0	111590010 01	23-Dec-10	23-Dec-11
3623	Cable RF, 6.0 m, N type-N type, DC-6.5 GHz	Belden	MIL C-17	NA	19-May-11	19-May-12
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	25-Sep-09	25-Sep-11
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLE X 102A	1225/2A	07-Feb-11	07-Feb-12

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 15: 2010	Radio Frequency Devices
Public notice DA 00- 705: 2000	Filing and measurement guidelines for frequency hopping spread spectrum systems.
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment

12 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

**Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984**

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

Cable loss
Microwave Cable Assembly, 18 GHz, 6.4 m, SMA – SMA, Huber-Suhner, model 198-9155-00
HL 3123

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.11	3600	1.97	7400	3.12	11200	3.90	15100	4.74
30	0.17	3700	1.97	7500	3.13	11300	3.93	15200	4.70
50	0.25	3800	2.03	7600	3.16	11400	3.88	15300	4.73
100	0.32	3900	2.04	7700	3.18	11500	3.87	15400	4.78
200	0.46	4000	2.10	7800	3.20	11600	3.90	15500	4.75
300	0.58	4100	1.97	7900	3.23	11700	3.86	15600	4.76
400	0.65	4200	1.97	8000	3.25	11800	3.88	15700	4.75
500	0.74	4300	2.03	8100	3.26	11900	3.86	15800	4.78
600	0.82	4400	2.04	8200	3.28	12000	3.89	15900	4.79
700	0.89	4500	2.10	8300	3.31	12100	3.94	16000	4.73
800	0.95	4600	1.97	8400	3.31	12200	3.92	16100	4.78
900	1.01	4700	1.97	8500	3.32	12300	3.96	16200	4.84
1000	1.07	4800	2.03	8600	3.34	12400	4.01	16300	4.90
1100	1.11	4900	2.04	8700	3.35	12500	4.07	16400	4.87
1200	1.17	5000	2.10	8800	3.37	12600	4.08	16500	4.90
1300	1.22	5100	2.53	8900	3.39	12700	4.17	16600	4.98
1400	1.27	5200	2.55	9000	3.42	12800	4.26	16700	5.05
1500	1.29	5300	2.60	9100	3.43	12900	4.16	16800	5.04
1600	1.35	5400	2.61	9200	3.51	13000	4.21	16900	5.02
1700	1.40	5500	2.64	9300	3.52	13100	4.24	17000	5.09
1800	1.44	5600	2.70	9400	3.54	13200	4.27	17100	5.07
1900	1.51	5700	2.67	9500	3.63	13300	4.31	17200	5.10
2000	1.49	5800	2.71	9600	3.61	13400	4.33	17300	5.13
2100	1.55	5900	2.74	9700	3.71	13500	4.25	17400	5.23
2200	1.58	6000	2.80	9800	3.66	13600	4.27	17500	5.21
2300	1.62	6100	2.79	9900	3.77	13700	4.33	17600	5.22
2400	1.72	6200	2.81	10000	3.75	13800	4.33	17700	5.36
2500	1.76	6300	2.83	10100	3.77	13900	4.31	17800	5.35
2600	1.78	6400	2.86	10200	3.80	14000	4.30	17900	5.45
2700	1.80	6500	2.88	10300	3.79	14100	4.30	18000	5.43
2800	1.86	6600	2.90	10400	3.87	14200	4.31		
2900	1.90	6700	2.92	10500	3.83	14300	4.37		
3000	1.90	6800	2.98	10600	3.88	14400	4.35		
3100	1.97	6900	2.98	10700	3.86	14600	4.53		
3200	1.97	7000	3.00	10800	3.87	14700	4.50		
3300	2.03	7100	3.02	10900	3.90	14800	4.62		
3400	2.04	7200	3.04	11000	3.84	14900	4.65		
3500	2.10	7300	3.06	11100	3.88	15000	4.79		

Cable loss
Cable coaxial, MIL C-17, N type-N type, 6 m
Belden, HL 3623

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	2600	4.38	5400	7.76
30	0.25	2700	4.53	5500	7.79
50	0.33	2800	4.64	5600	7.88
100	0.49	2900	4.79	5700	7.93
200	0.76	3000	4.93	5800	8.05
300	0.97	3100	5.02	5900	8.03
400	1.18	3200	5.18	6000	8.07
500	1.38	3300	5.27	6100	8.14
600	1.54	3400	5.41	6200	8.21
700	1.71	3500	5.57	6300	8.28
800	1.88	3600	5.65	6400	8.35
900	2.04	3700	5.82	6500	8.43
1000	2.19	3800	5.89		
1100	2.38	3900	6.02		
1200	2.61	4000	6.15		
1300	2.63	4100	6.26		
1400	2.79	4200	6.37		
1500	2.90	4300	6.52		
1600	3.08	4400	6.63		
1700	3.21	4500	6.74		
1800	3.31	4600	6.86		
1900	3.47	4700	6.98		
2000	3.59	4800	7.09		
2100	3.74	4900	7.17		
2200	3.86	5000	7.30		
2300	3.98	5100	7.41		
2400	4.12	5200	7.59		
2500	4.24	5300	7.71		

Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT