



Hermon Laboratories Ltd.
P.O. Box 23, Binyamina 3055001, Israel
Tel. +972 4628 8001
Fax. +972 4628 8277
E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (DTS) and subpart B,
RSS-247 issue 2, RSS-Gen issue 5, ICES-003 Issue 6:2016

FOR:

Telematics Wireless Ltd.
Water meter
Model:DTMW3C
FCC ID:NTAXMETER22
IC:4732A-XMETER22

This report is in conformity with ISO/IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Changes made in EUT	5
6.3	Test configuration	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-247/RSS-Gen requirements	7
7.1	Minimum 6 dB bandwidth and 99% occupied bandwidth	7
7.2	Maximum peak output power	11
7.3	Field strength of spurious emissions	16
7.4	Band edge radiated emissions	41
7.5	Maximum power spectral density (PSD)	45
7.6	Antenna requirements	50
8	Unintentional emissions	51
8.1	Radiated emission measurements	51
9	APPENDIX A Test equipment and ancillaries used for tests	55
10	APPENDIX B Measurement uncertainties	56
11	APPENDIX C Test laboratory description	57
12	APPENDIX D Specification references	57
13	APPENDIX E Test equipment correction factors	58
14	APPENDIX F Abbreviations and acronyms	69

1 Applicant information

Client name: Telematics Wireless Ltd.
Address: 26 Hamelacha street, POB 1911, Holon, 5811801, Israel
Telephone: +972 3557 5700
Fax: +972 3557 5703
E-mail: Emzari.Roketlishvili@telematics-wireless.com
Contact name: Mr. Emzari Roketlishvili

2 Equipment under test attributes

Product name: Water meter
Product type: Transceiver
Model(s): DTMW3C
Serial number: 12632657
Hardware version: Rev. A
Software release: 02A360
Receipt date 15-May-18

3 Manufacturer information

Manufacturer name: Telematics Wireless Ltd.
Address: 26 Hamelacha street, POB 1911, Holon, 5811801, Israel
Telephone: +972 3557 5700
Fax: +972 3557 5703
E-Mail: Emzari.Roketlishvili@telematics-wireless.com
Contact name: Mr. Emzari Roketlishvili




4 Test details

Project ID: 30843
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 15-May-18
Test completed: 22-May-18
Test specification(s): FCC 47CFR part 15 subpart C § 15.247 (DTS) and subpart B;
RSS-247 issue 2, RSS-Gen issue 5, ICES-003 Issue 6:2016

5 Tests summary

Test	Status
Transmitter characteristics	
FCC section 15.247(a)2 / RSS-247 section 5.2(a), 6 dB bandwidth and RSS-Gen section 6.7, 99% occupied bandwidth	Pass
FCC section 15.247(b)3/ RSS-247 section 5.4(d), Maximum peak output power	Pass
FCC section 15.247(i) / RSS-102 section 2.5.2, RF exposure	Pass, the exhibit to the application of certification is provided
FCC section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
FCC section 15.247(d)/ RSS-247 section 5.5, Emissions at band edges	Pass
FCC section 15.247(e) / RSS-247 section 5.2(b), Maximum power spectral density	Pass
FCC section 15.203 / RSS-Gen section 6.8, Antenna requirement	Pass
FCC section 15.207(a) / RSS-Gen section 8.8, Conducted emission	Not required
Unintentional emissions	
FCC section 15.107, ICES-003, section 6.1, Class B, Conducted emission at AC power port	Not required
FCC section 15.109, ICES-003, section 6.2, Class B, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer	May 22, 2018	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	July 9, 2018	
Approved by:	Mr. K. Zushchuk, Projects & Customer Manager, EMC & Radio	December 24, 2018	

6 EUT description

6.1 General information

The EUT is a water meter, powered from two 3.6 VDC lithium internal batteries.

The EUT supports the following modes of operation:


- 1) DTS- BPSK in 905.43 – 923.55 MHz
- 2) DTS- FSK at 916.3 MHz

No simultaneous operation is allowed.

6.2 Changes made in EUT

No changes were implemented in the EUT during the testing.

6.3 Test configuration

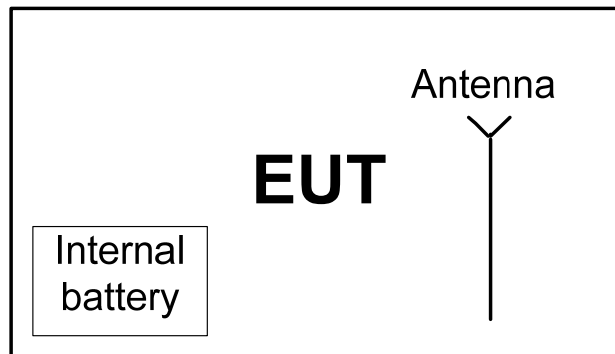



6.4 Transmitter characteristics

Type of equipment						
	Stand-alone (Equipment with or without its own control provisions)					
X	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Intended use			Condition of use			
	fixed	Always at a distance more than 2 m from all people				
X	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
Assigned frequency range		902-928 MHz				
Operating frequency range		905.43 - 923.55 MHz (BPSK modulation) 916.3 MHz (FSK modulation)				
Maximum rated output power		At transmitter 50 Ω RF output connector		NA		
		Peak output power		19.0 dBm –BPSK 13.3 dBm - FSK		
Is transmitter output power variable?		X	No			
			Yes	continuous variable		
			Yes	stepped variable with stepsize		dB
			Yes	minimum RF power		dBm
	Yes	maximum RF power		dBm		
Antenna connection						
unique coupling		standard connector		X	integral	
				X	with temporary RF connector without temporary RF connector	
Antenna/s technical characteristics						
Type		Manufacturer		Model number		
Integral		Arad Technologies		Printed inverted F antenna		
				Gain		
				0 dBi		
Transmitter aggregate data rate/s		BPSK - 900 kcps (c=chip, 60 kbps data), FSK - 120 kbps (60 kbps code Manchester)				
Type of modulation		BPSK; FSK				
Modulating test signal (baseband)		PRBS				
Transmitter power source						
X	Battery	Nominal rated voltage	3.6 VDC	Battery type	Lithium	
	DC	Nominal rated voltage	VDC			
	AC mains	Nominal rated voltage	VAC	Frequency	Hz	
Common power source for transmitter and receiver				X	yes	
					no	



Test specification: Section 15.247(a)2 / RSS-247 section 5.2(a), 6 dB bandwidth and RSS-Gen section 6.7, 99% occupied bandwidth	
Test procedure: ANSI C63.10 section 11.8.1	
Test mode: Compliance	Verdict: PASS
Date(s): 21-May-18	
Temperature: 23 °C	Relative Humidity: 55 %
Remarks:	

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-247/RSS-Gen requirements

7.1 Minimum 6 dB bandwidth and 99% occupied bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth and 99% occupied bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1, Table 7.1.2.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

Table 7.1.2 The 99% bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points	Limit, kHz
902.0 – 928.0	99%	NA
2400.0 – 2483.5		
5725.0 – 5850.0		

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.3 and the associated plots.

7.1.2.4 The transmitter 99% occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.4 and the associated plots.

Figure 7.1.1 The 6 dB bandwidth and 99% occupied bandwidth test setup





Test specification:	Section 15.247(a)2 / RSS-247 section 5.2(a), 6 dB bandwidth and RSS-Gen section 6.7, 99% occupied bandwidth		
Test procedure:	ANSI C63.10 section 11.8.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	21-May-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: Battery
Remarks:			

Table 7.1.3 The 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902-928 MHz
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc
MODULATION: FSK

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
916.3020	603.75	500	103.75	Pass

MODULATION BPSK

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
905.4375	513.75	500	13.75	Pass
916.3020	521.25	500	21.25	Pass
923.5462	510.00	500	10.00	Pass

Table 7.1.4 The 99% bandwidth test results

ASSIGNED FREQUENCY BAND: 902-928 MHz
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 30 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION ENVELOPE REFERENCE POINTS: 99% BW
MODULATION: FSK

Carrier frequency, MHz	99% bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
916.3020	697.1	500	197.1	Pass

MODULATION BPSK

Carrier frequency, MHz	99% bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
905.4375	1430.4	500	930.4	Pass
916.3020	1421.0	500	921.0	Pass
923.5462	1418.3	500	918.3	Pass

Reference numbers of test equipment used

HL 2697	HL 2909	HL 5107	HL 5110				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(a)2 / RSS-247 section 5.2(a), 6 dB bandwidth and RSS-Gen section 6.7, 99% occupied bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance	Verdict: PASS		
Date(s): 21-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: Battery
Remarks:			

Plot 7.1.1 The 6 dB bandwidth and 99% occupied bandwidth test results at FSK modulation

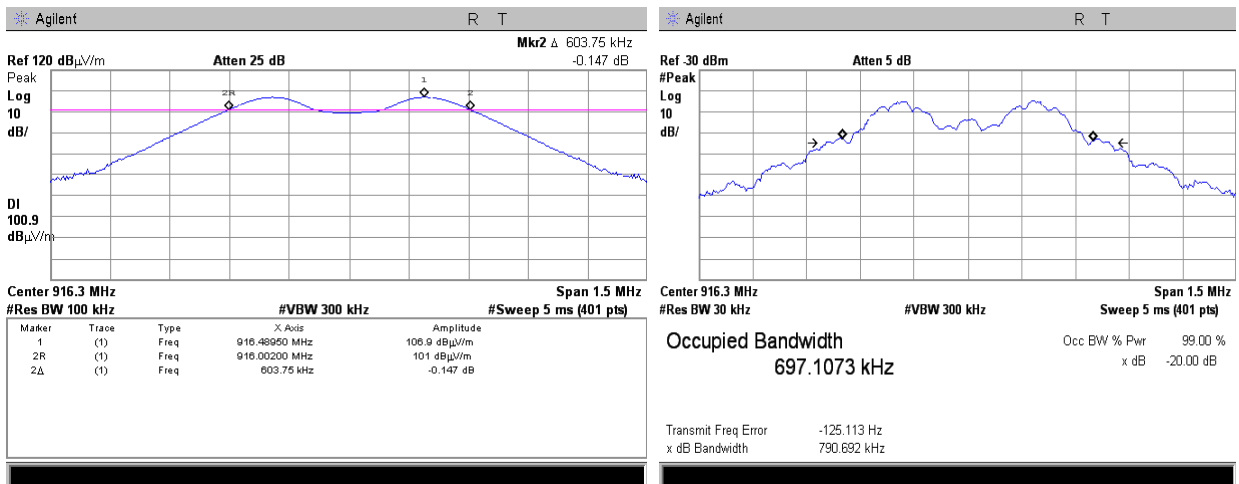

Plot 7.1.2 The 6 dB bandwidth and 99% occupied bandwidth test results at low frequency, BPSK modulation


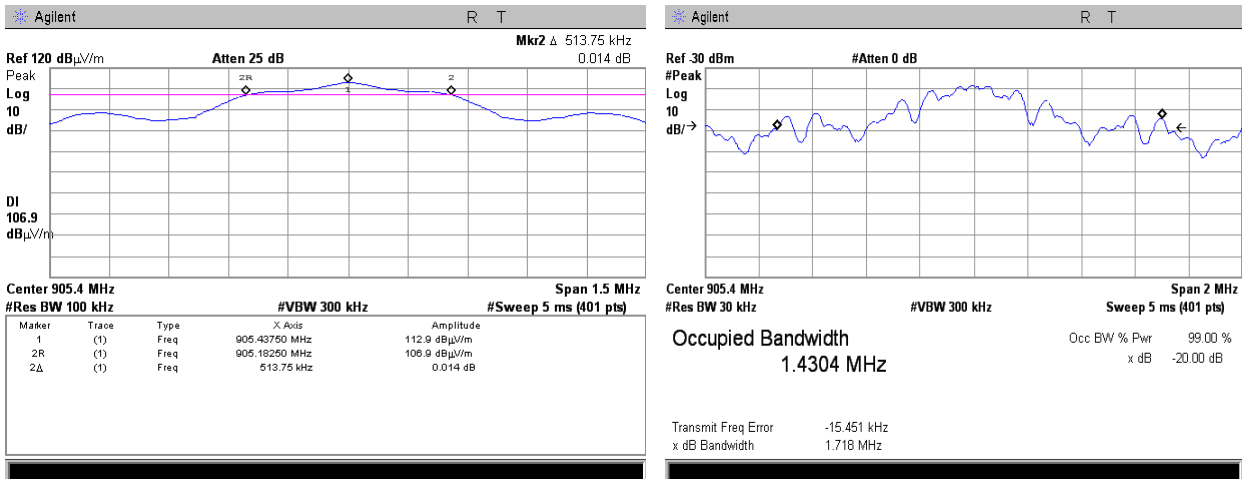






HERMON LABORATORIES

Test specification: Section 15.247(a)2 / RSS-247 section 5.2(a), 6 dB bandwidth and RSS-Gen section 6.7, 99% occupied bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance	Verdict: PASS		
Date(s): 21-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: Battery
Remarks:			

Plot 7.1.3 The 6 dB bandwidth and 99% occupied bandwidth test results at mid frequency, BPSK modulation

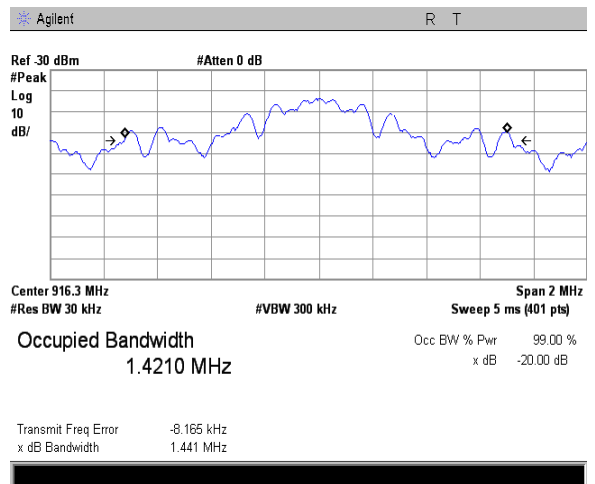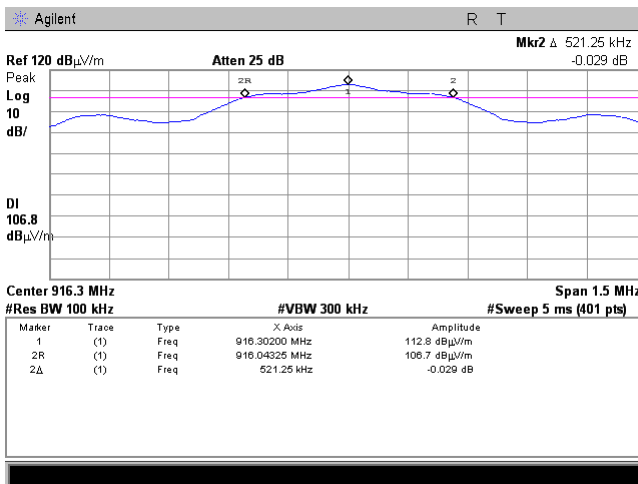

Plot 7.1.4 The 6 dB bandwidth and 99% occupied bandwidth test results at high frequency, BPSK modulation

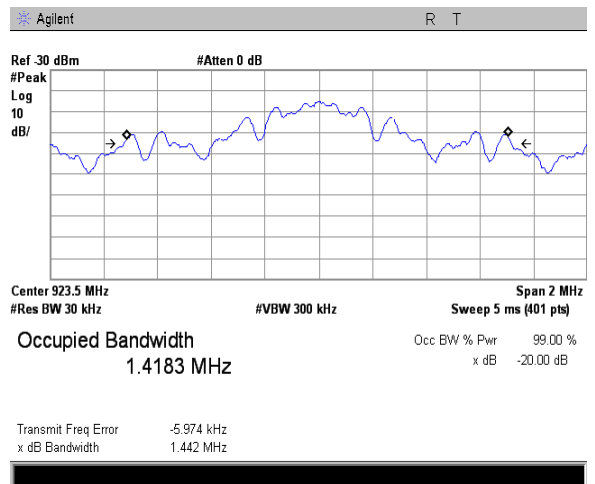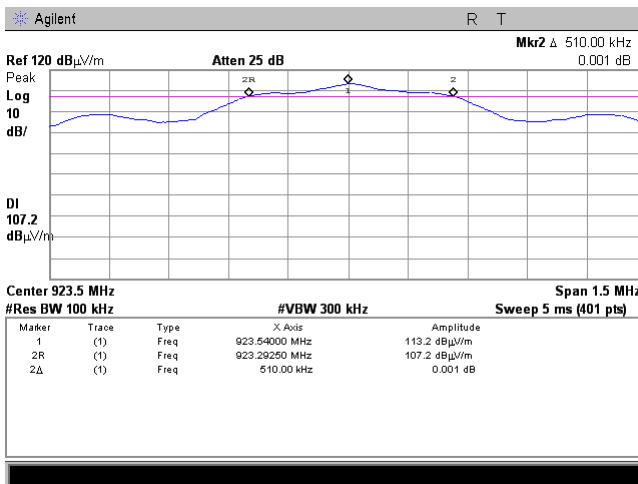



Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Maximum peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 50 %	Air Pressure: 1008 hPa	Power: Battery
Remarks:			

7.2 Maximum peak output power

7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

** - Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$


7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.



HERMON LABORATORIES

Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Maximum peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance	Verdict: PASS		
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 50 %	Air Pressure: 1008 hPa	Power: Battery
Remarks:			

Figure 7.2.1 Setup for carrier field strength measurements

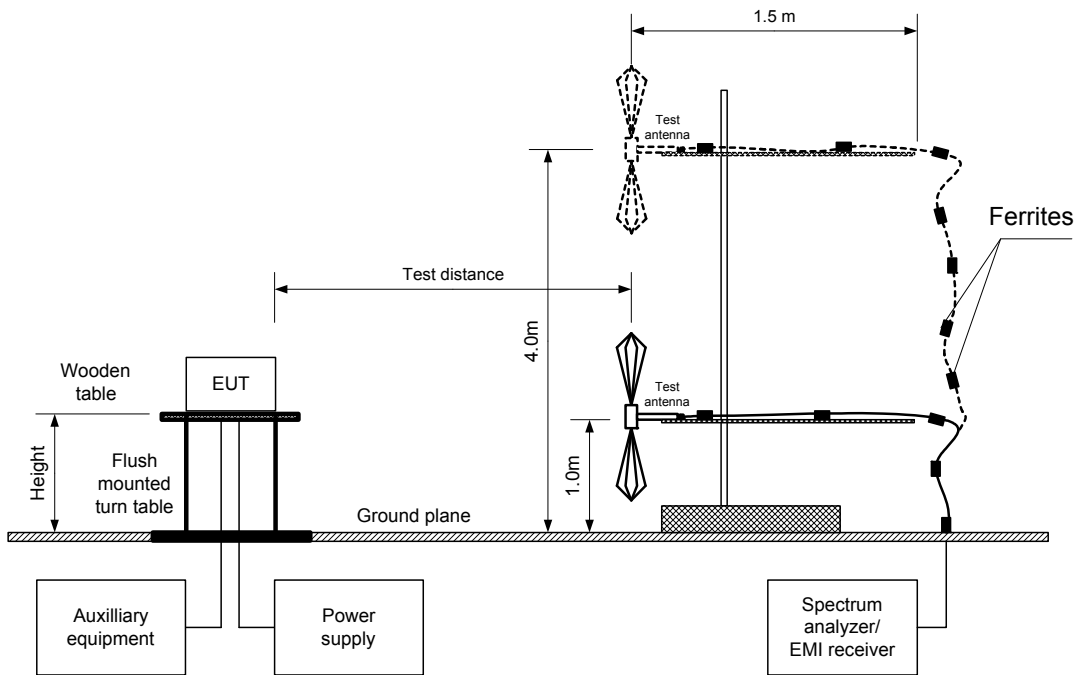



Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Maximum peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 50 %	Air Pressure: 1008 hPa	Power: Battery
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY RANGE: 902-928 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 0.8 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)
 MODULATION: FSK
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 EUT 6 dB BANDWIDTH: 603.75 kHz
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz

Carrier frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
916.3020	108.5	Vertical	1.1	90	0	13.3	30	-16.7	Pass

MODULATION: BPSK
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 EUT 6 dB BANDWIDTH: 521.25 kHz
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz

Carrier frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
905.4375	113.8	Vertical	1.1	90	0	18.6	30	-11.4	Pass
916.3020	114.2	Vertical	1.1	90	0	19.0	30	-11.0	Pass
923.5462	113.9	Vertical	1.1	90	0	18.7	30	-11.3	Pass

*- EUT front panel refer to 0 degrees position of turntable.

** - Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

*** - Margin = Peak output power – specification limit.

Reference numbers of test equipment used

HL 2909	HL 3615	HL 4276	HL 5288				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Maximum peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 50 %	Air Pressure: 1008 hPa	Power: Battery
Remarks:			

Plot 7.2.1 Field strength of carrier at FSK modulation

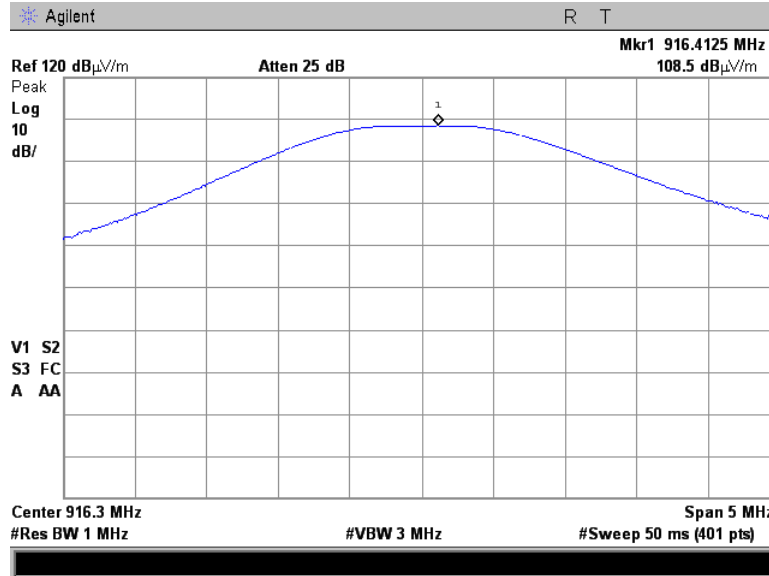

Plot 7.2.2 Field strength of carrier at low frequency, BPSK modulation

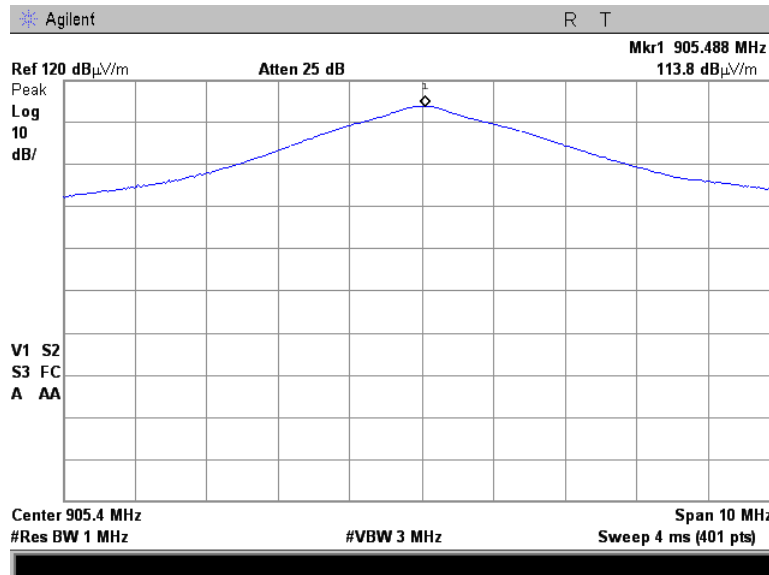





HERMON LABORATORIES

Test specification: Section 15.247(b)3/ RSS-247 section 5.4(d), Maximum peak output power			
Test procedure: ANSI C63.10 section 11.9.1.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 50 %	Air Pressure: 1008 hPa	Power: Battery
Remarks:			

Plot 7.2.3 Field strength of carrier at mid frequency, BPSK modulation

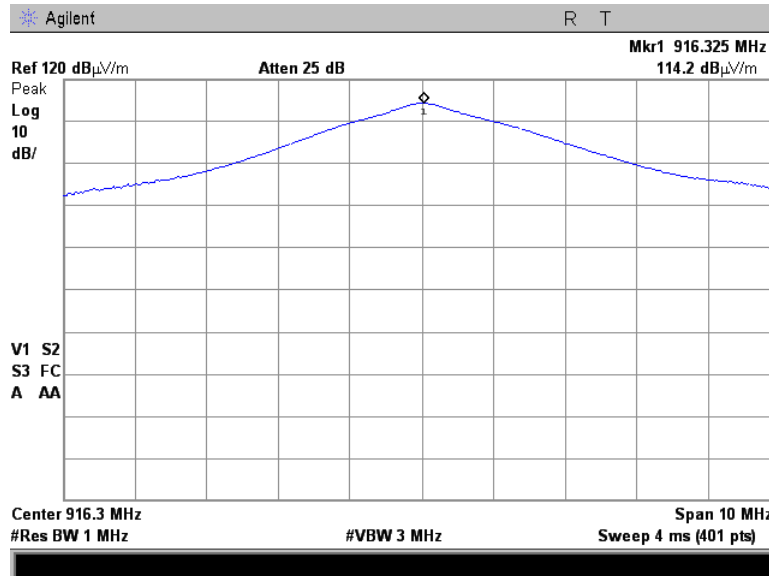

Plot 7.2.4 Field strength of carrier at high frequency, BPSK modulation

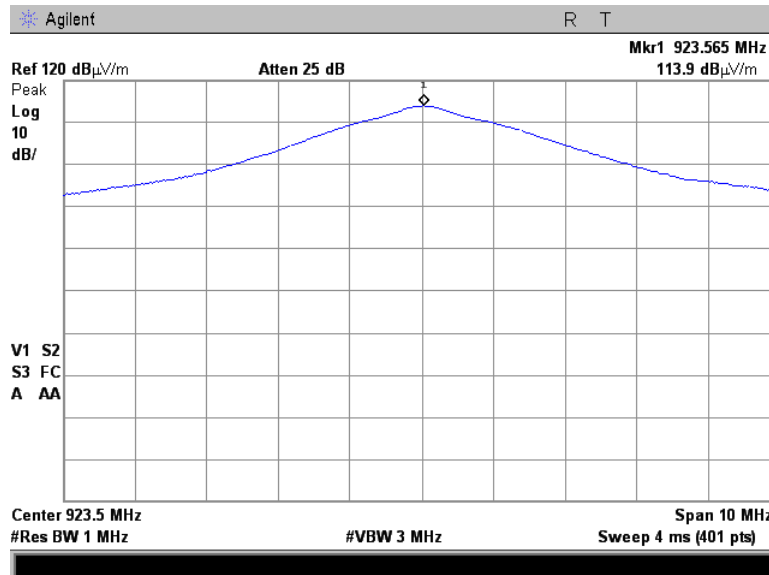



Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

7.3 Field strength of spurious emissions

7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log (S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, Figure 7.3.3, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz


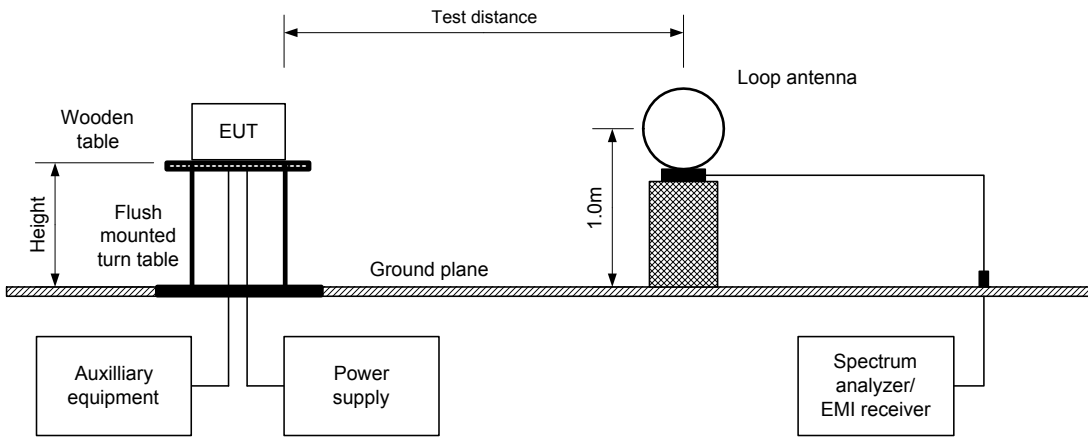



Figure 7.3.2 Setup for spurious emission field strength measurements in 30 – 1000 MHz



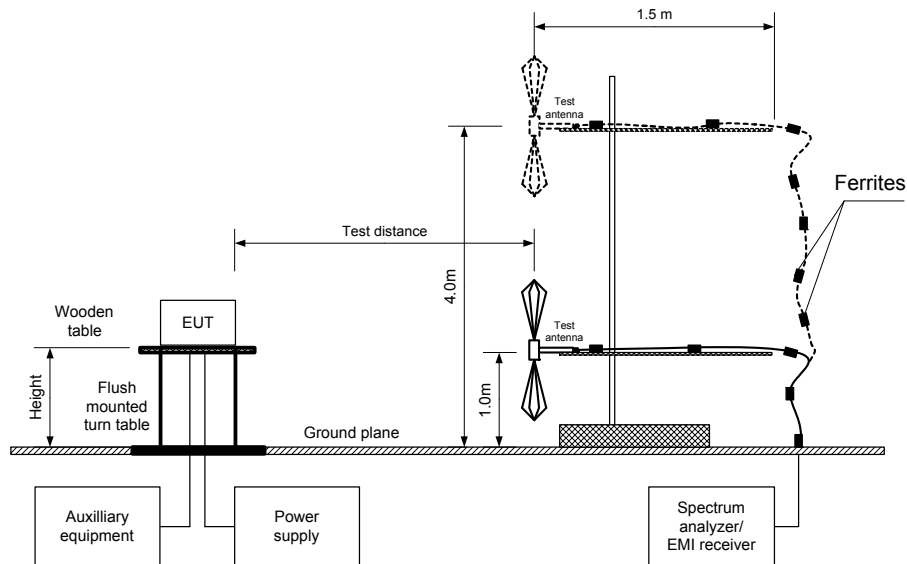

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Figure 7.3.3 Setup for spurious emission field strength measurements above 1000 MHz

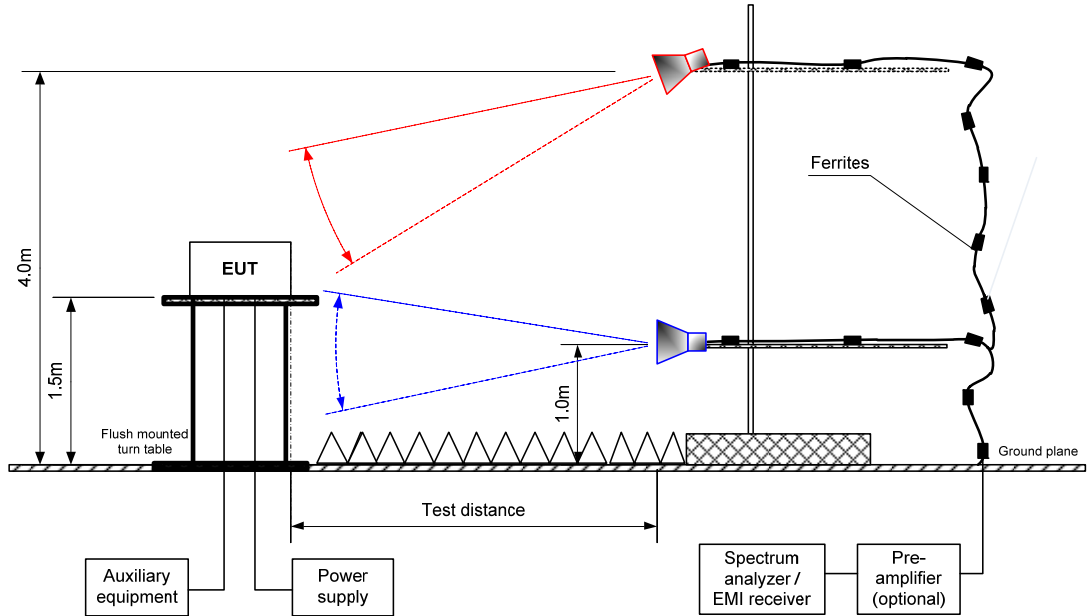



Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Table 7.3.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 9500 MHz
 TEST DISTANCE: 3 m
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak

MODULATION: FSK

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
1833.12	43.48	Vertical	1.5	0	107.4	63.92	20.0	43.92	Pass
5496.77	50.75	Vertical	1.5	0		56.65		36.65	
6412.72	39.59	Vertical	1.5	0		67.81		47.81	

MODULATION: BPSK

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
1810.93	47.23	Vertical	1.5	0	113.0	65.77	20.0	45.77	Pass
6338.08	41.35	Vertical	1.5	180		71.65		51.65	
Mid carrier frequency									
1832.67	53.18	Vertical	1.5	0	114.0	60.82	20.0	40.82	Pass
5497.80	55.2	Vertical	1.5	150		58.80		38.80	
6414.12	44.09	Vertical	1.5	180		69.91		49.91	
High carrier frequency									
1847.17	57.16	Vertical	1.5	0	113.3	56.14	20.0	36.14	Pass
5541.13	52.79	Vertical	1.5	150		60.51		40.51	
6464.82	44.02	Vertical	1.5	180		69.28		49.28	

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Attenuation below carrier – specification limit.

Table 7.3.3 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: FSK / BPSK
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 1.0 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 100 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No signals were found								Pass

*- Margin = Measured emission - specification limit.
 **- EUT front panel refer to 0 degrees position of turntable.



Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Table 7.3.4 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 – 9500 MHz
 TEST DISTANCE: 3 m
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide

MODULATION FSK

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Polariz.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
2748.535	Vertical	1.5	200	45.12	74	-28.88	45.12	19.12	54	-34.88	Pass
3664.505	Vertical	1.5	230	50.08	74	-23.92	50.08	24.08	54	-29.92	
4582.630	Vertical	1.5	190	51.22	74	-22.78	51.22	25.22	54	-28.78	

MODULATION: BPSK

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength			Average field strength				Verdict
	Polariz.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency											
2716.26	Vertical	1.5	200	51.62	74	-22.38	51.62	25.62	54	-28.38	Pass
3621.81	Vertical	1.5	240	55.37	74	-18.63	55.37	29.37	54	-24.63	
4527.11	Vertical	1.5	190	49.74	74	-24.26	49.74	23.74	54	-30.26	
5432.59	Vertical	1.5	154	55.24	74	-18.76	55.24	29.24	54	-24.76	
Mid carrier frequency											
2748.85	Vertical	1.5	200	49.87	74	-24.13	49.87	23.87	54	-30.13	Pass
3665.25	Vertical	1.5	250	56.09	74	-17.91	56.09	30.09	54	-23.91	
4581.52	Vertical	1.5	200	51.21	74	-22.79	51.21	25.21	54	-28.79	
High carrier frequency											
2770.56	Vertical	1.5	200	51.79	74	-22.21	51.79	25.79	54	-28.21	Pass
3694.21	Vertical	1.5	240	56.31	74	-17.69	56.31	30.31	54	-23.69	
4617.79	Vertical	1.5	190	57.69	74	-16.31	57.69	31.69	54	-22.31	

*- EUT front panel refers to 0 degrees position of turntable.
 **- Margin = Measured field strength - specification limit.
 ***- Margin = Calculated field strength - specification limit,
 where Calculated field strength = Measured field strength + average factor.

Table 7.3.5 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Number of pulses during 100 msec	Duration, ms	Period, ms		
5	1	NA	NA	NA	-26

*- Average factor was calculated as follows
 for pulse train shorter than 100 ms: $Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$
 for pulse train longer than 100 ms: $Average\ factor = 20 \times \log_{10} \left(\frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Table 7.3.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Table 7.3.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 0446	HL 2432	HL 2909	HL 3901	HL 4114	HL 4920	HL 5107	HL 5110
HL 5288							


Full description is given in Appendix A.



Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.1 Radiated emission measurements from 9 to 150 kHz, FSK modulation

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

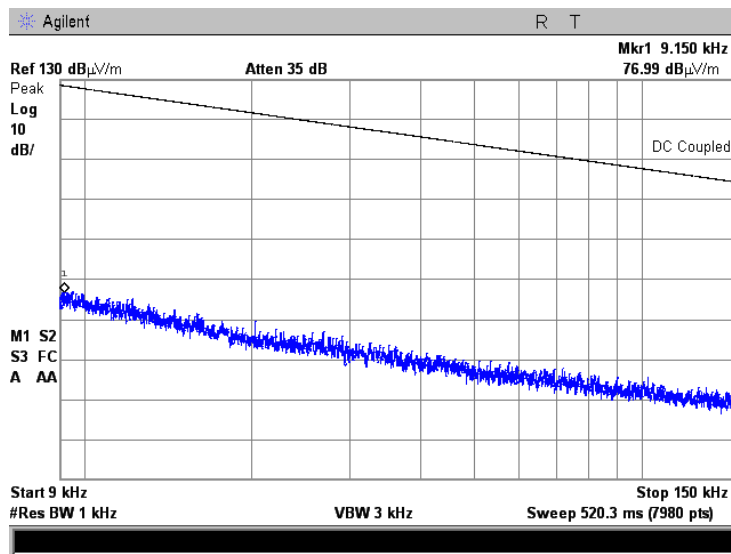

Plot 7.3.2 Radiated emission measurements from 9 to 150 kHz at the low, mid, high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
MODULATION TYPE: BPSK

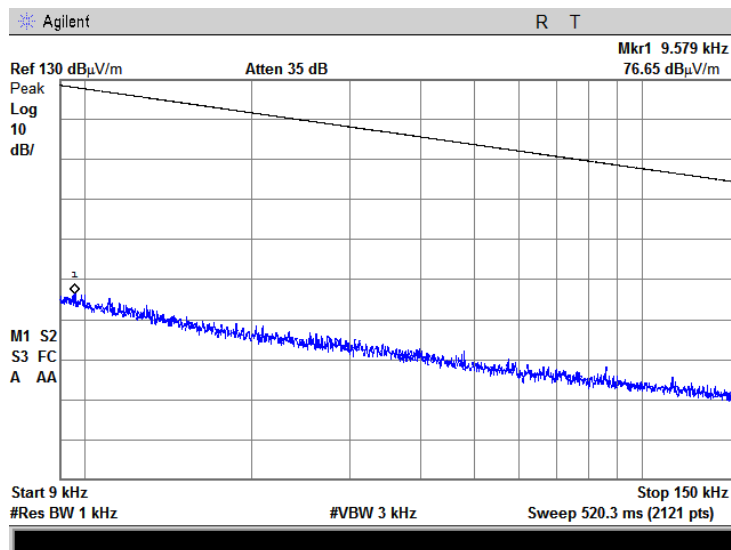




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.3 Radiated emission measurements from 0.15 to 30 MHz, FSK modulation

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

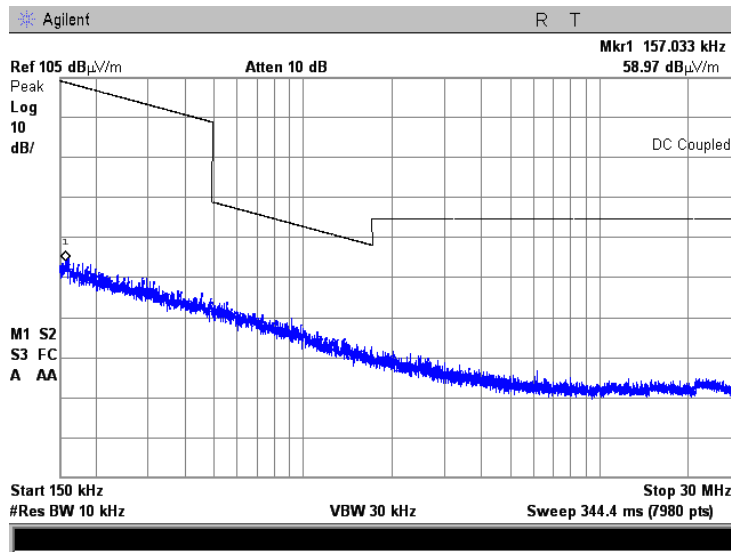

Plot 7.3.4 Radiated emission measurements from 0.15 to 30 MHz at the low, mid, high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
MODULATION TYPE: BPSK

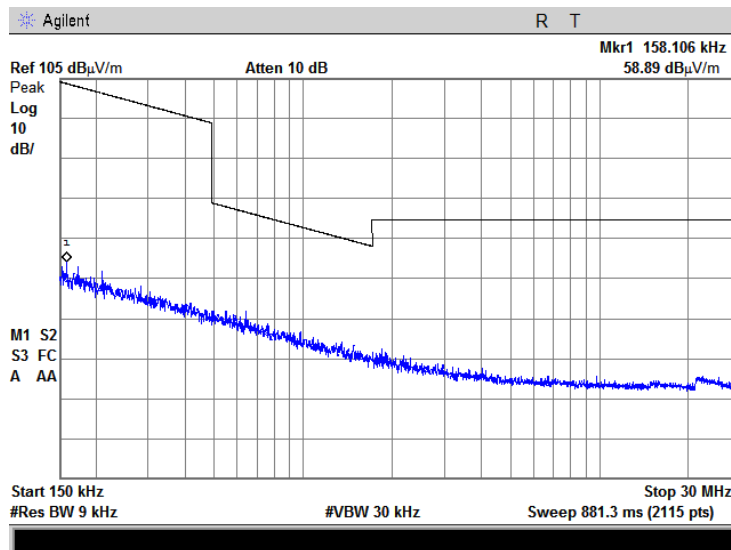




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.5 Radiated emission measurements from 30 to 1000 MHz, FSK modulation

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

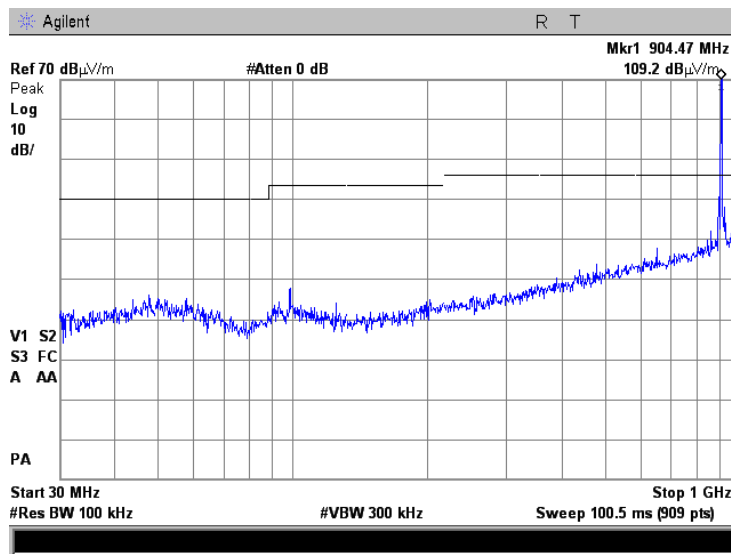

Plot 7.3.6 Radiated emission measurements from 30 to 1000 MHz at low carrier frequency, BPSK modulation

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

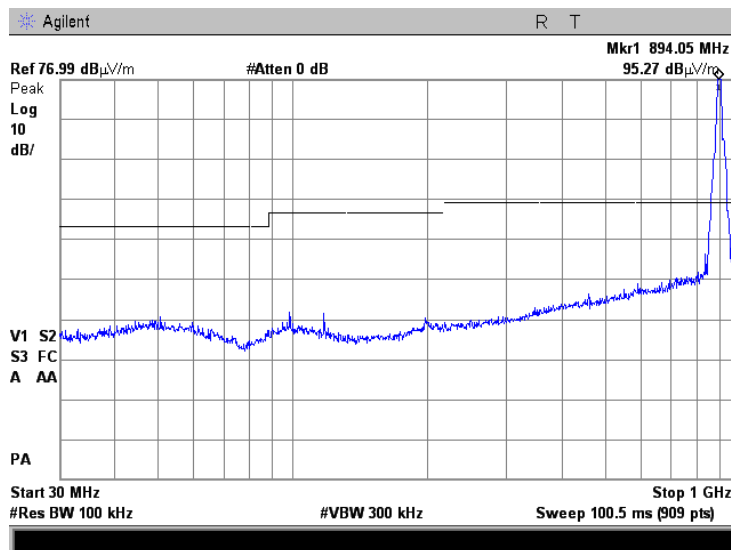




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.7 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency, BPSK modulation

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

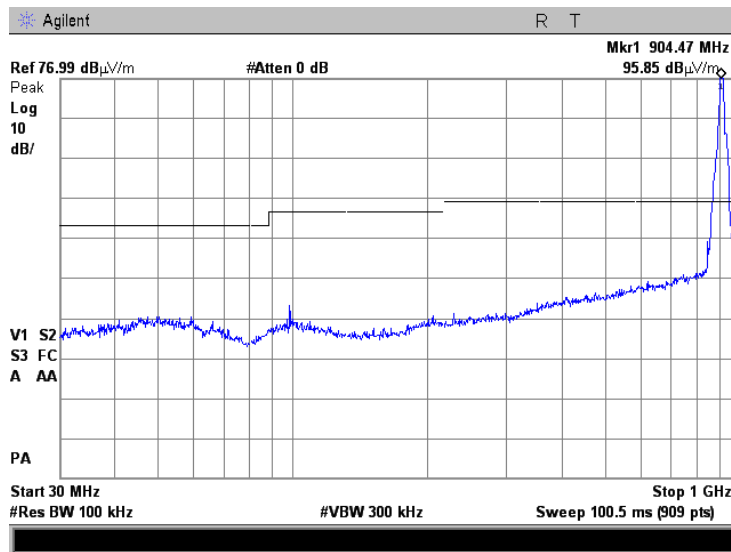

Plot 7.3.8 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency, BPSK modulation

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

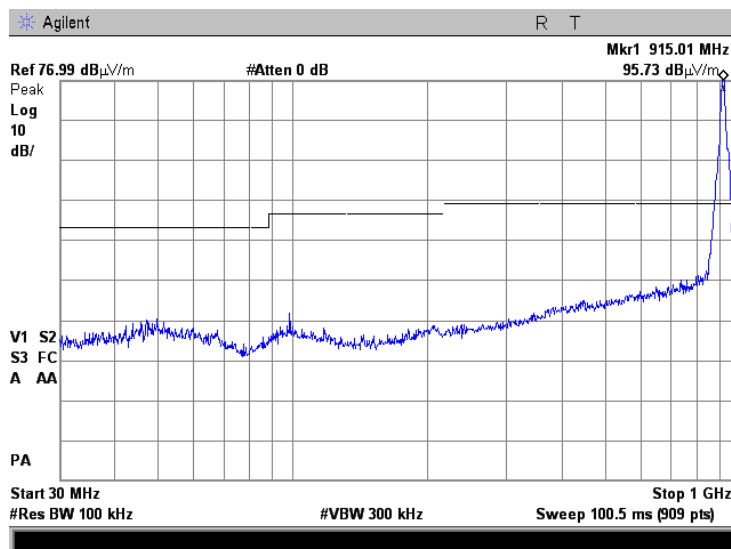




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.9 Radiated emission measurements from 1000 to 9500 MHz, FSK modulation

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

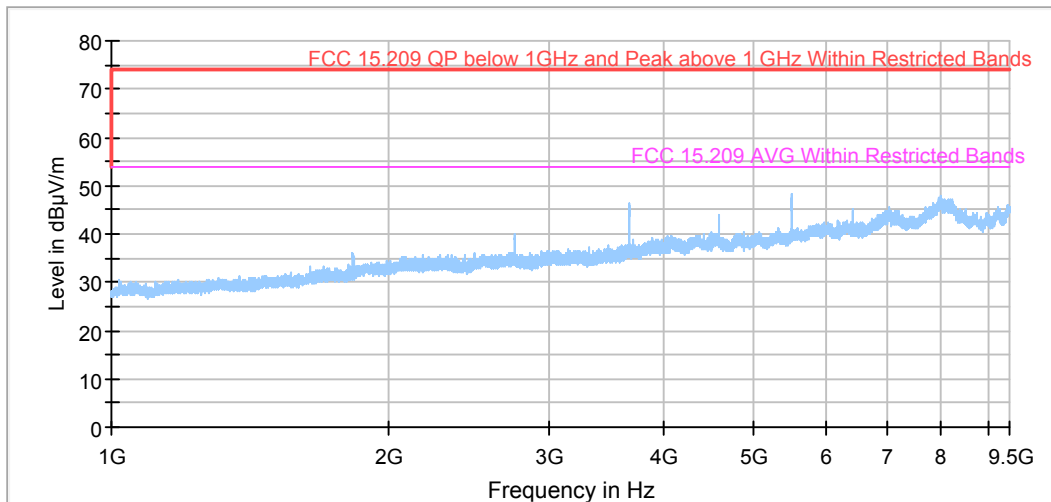

Plot 7.3.10 Radiated emission measurements from 1000 to 9500 MHz at the low carrier frequency, BPSK modulation

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

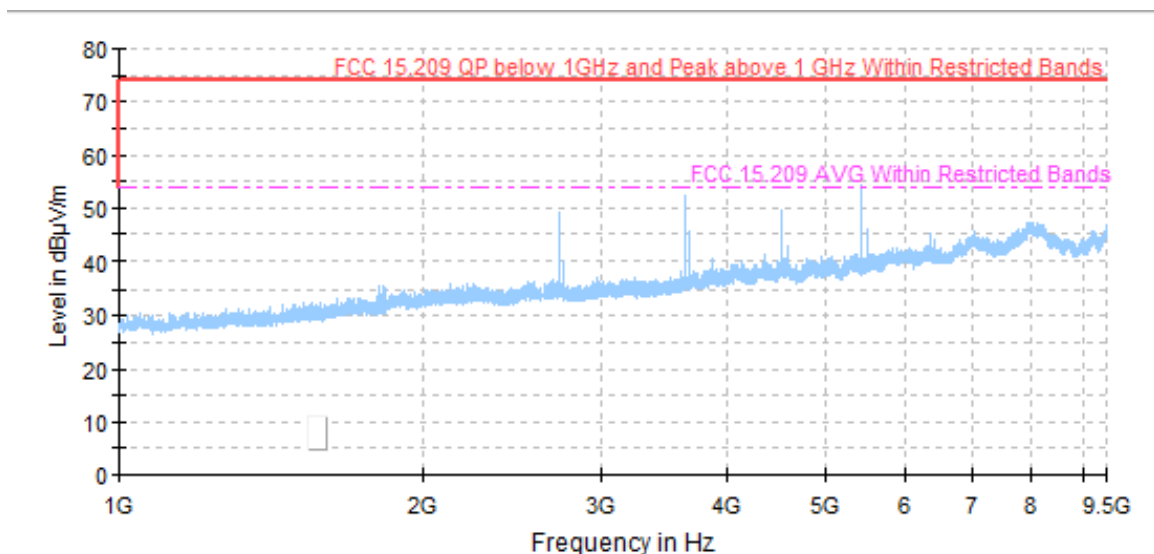




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1		Verdict: PASS	
Test mode: Compliance		Date(s): 22-May-18	
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.11 Radiated emission measurements from 1000 to 9500 MHz at the mid carrier frequency, BPSK modulation

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

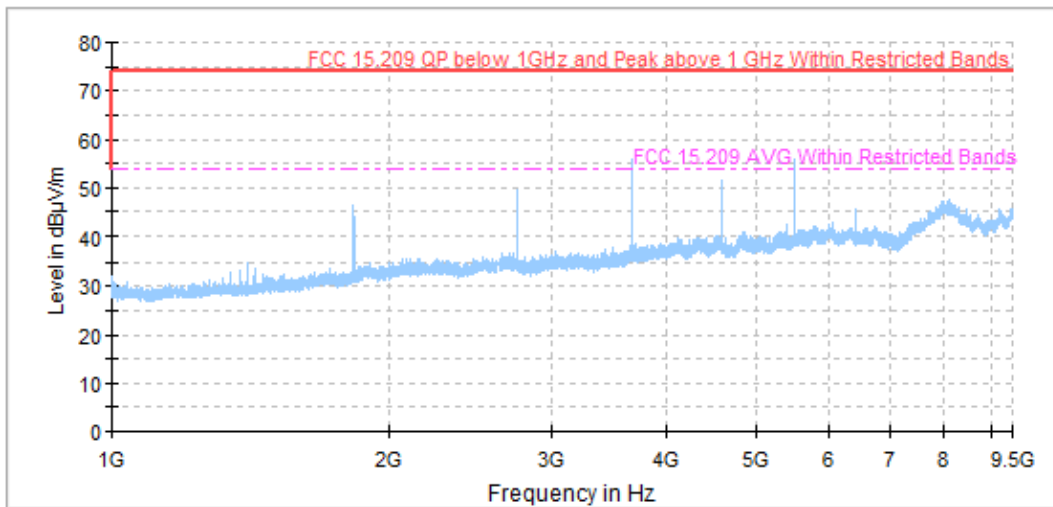

Plot 7.3.12 Radiated emission measurements from 1000 to 9500 MHz at the high carrier frequency, BPSK modulation

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

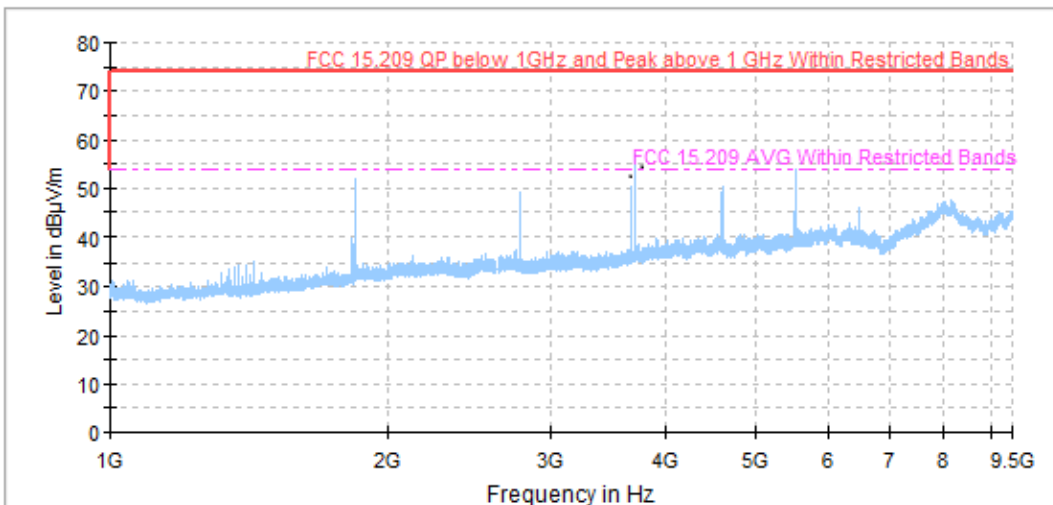




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.13 Radiated emission measurements at the second harmonic, FSK modulation

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

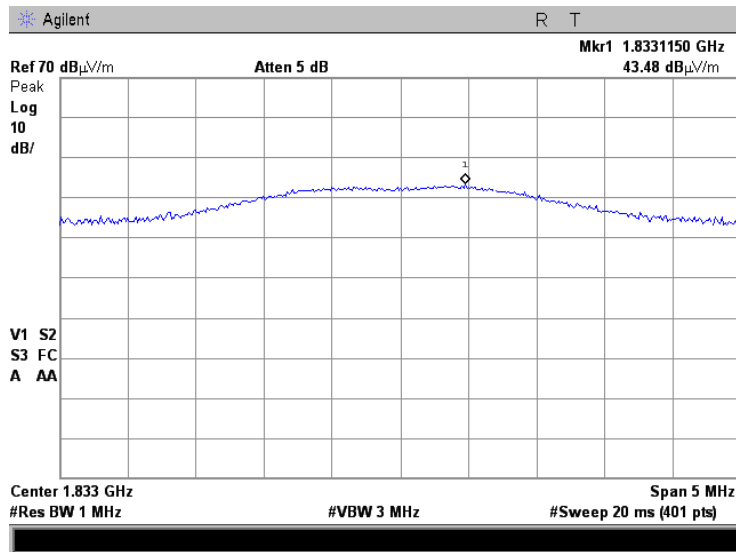

Plot 7.3.14 Radiated emission measurements at the second harmonic of low carrier frequency, BPSK modulation

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

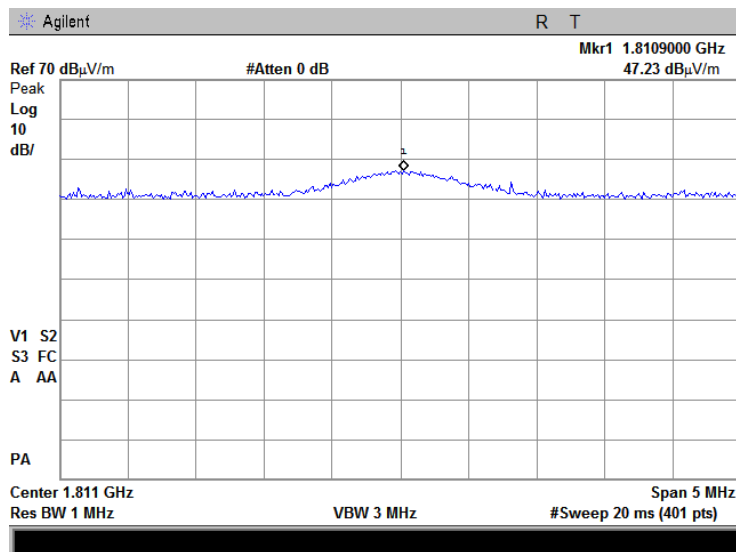




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.15 Radiated emission measurements at the second harmonic of mid carrier frequency, BPSK modulation

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

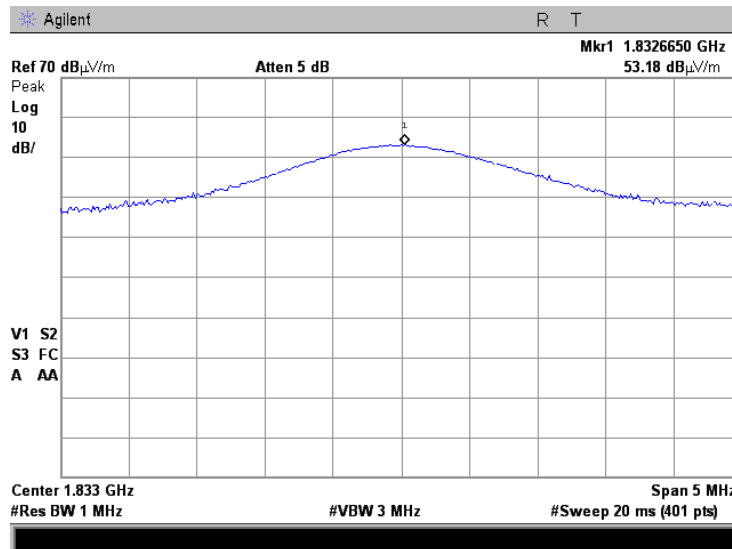

Plot 7.3.16 Radiated emission measurements at the second harmonic of high carrier frequency, BPSK modulation

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

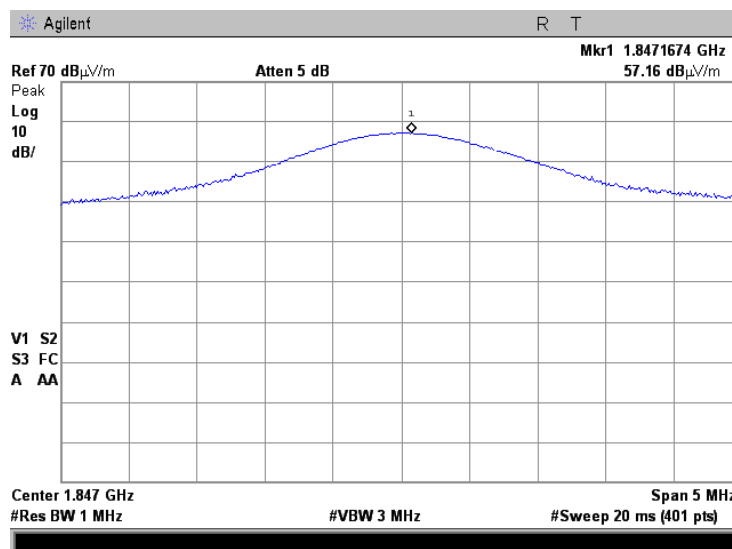




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.17 Radiated emission measurements at the third harmonic, FSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

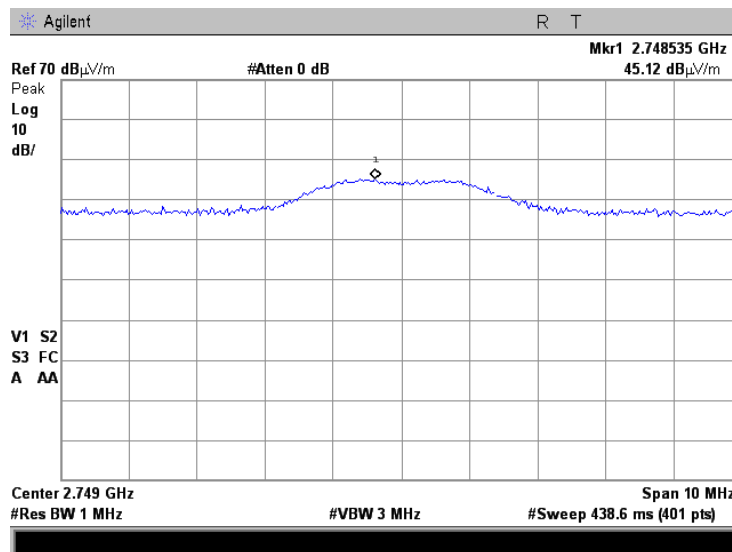

Plot 7.3.18 Radiated emission measurements at the third harmonic of low carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

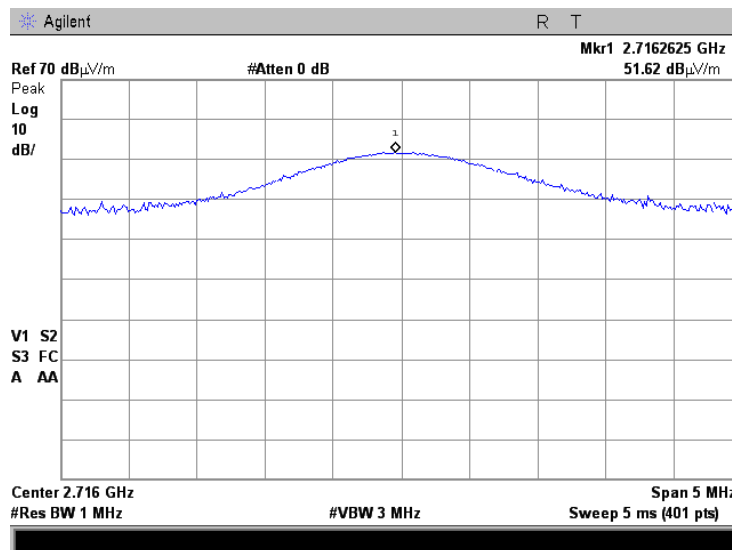




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.19 Radiated emission measurements at the third harmonic of mid carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

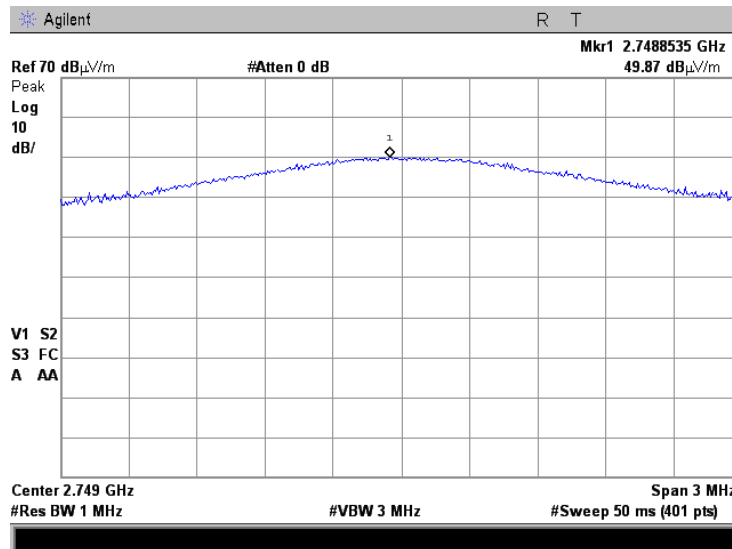

Plot 7.3.20 Radiated emission measurements at the third harmonic of high carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

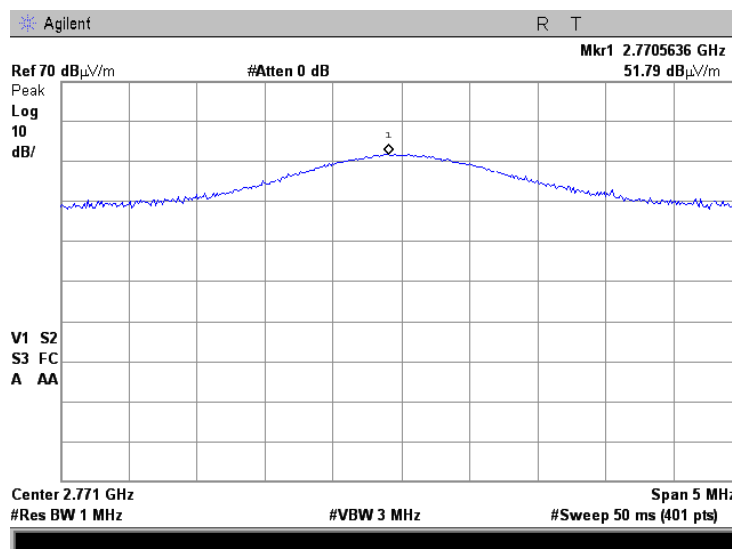




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.21 Radiated emission measurements at the fourth harmonic, FSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

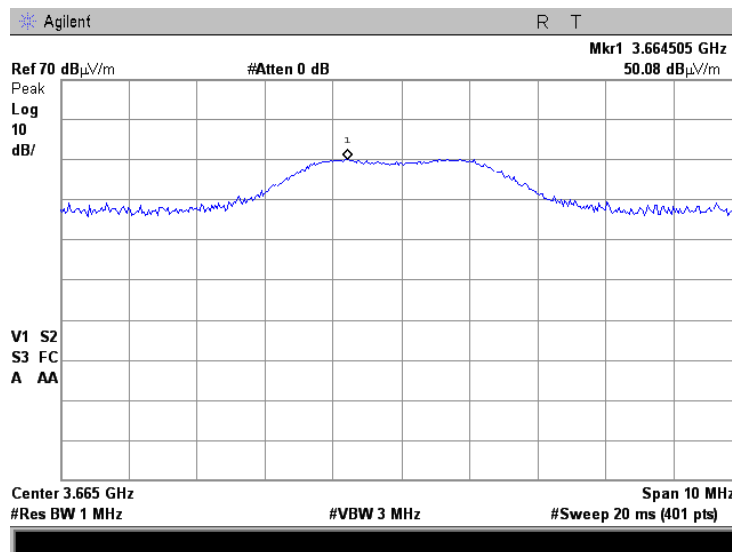

Plot 7.3.22 Radiated emission measurements at the fourth harmonic of low carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

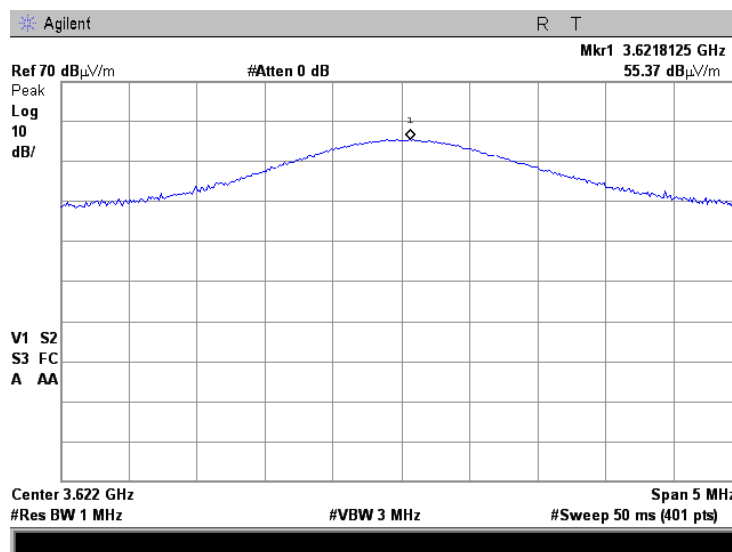




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.23 Radiated emission measurements at the fourth harmonic of mid carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

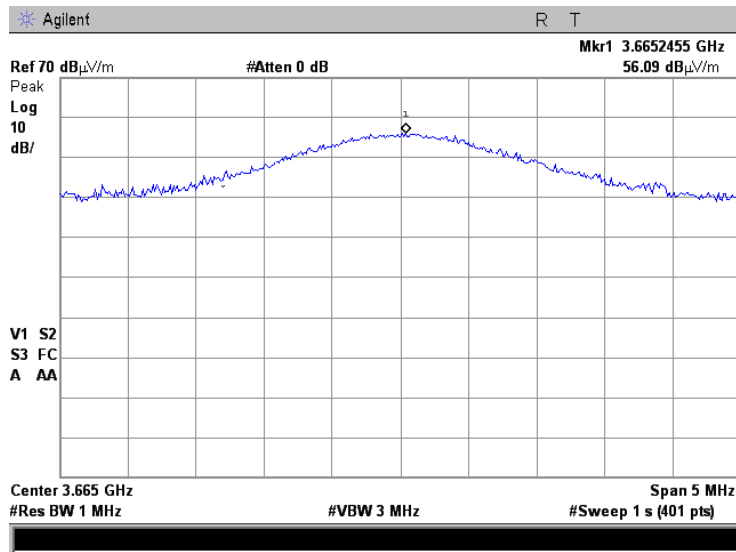

Plot 7.3.24 Radiated emission measurements at the fourth harmonic of high carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

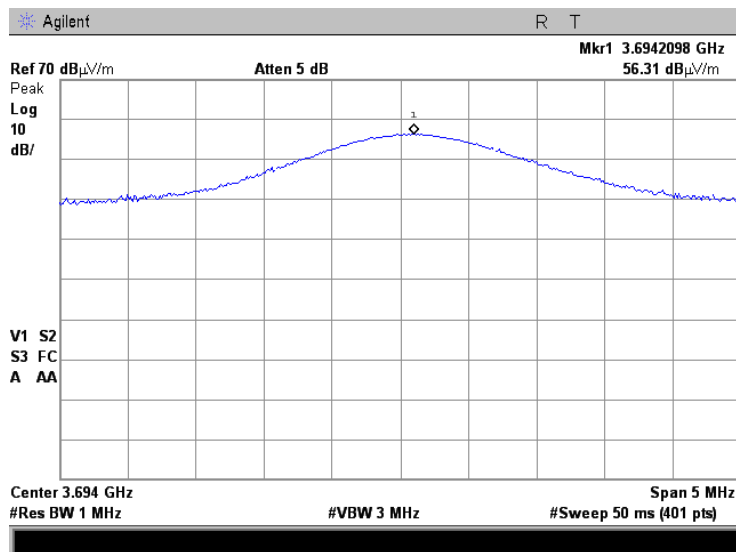




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.25 Radiated emission measurements at the fifth harmonic, FSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

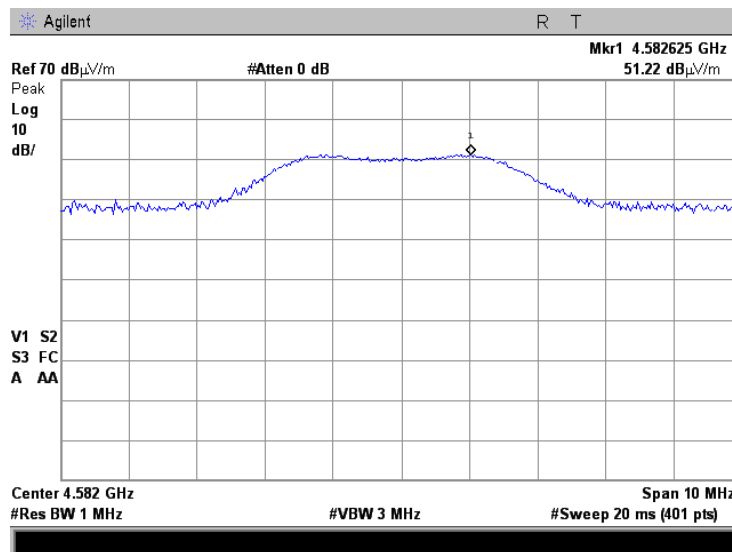

Plot 7.3.26 Radiated emission measurements at the fifth harmonic of low carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

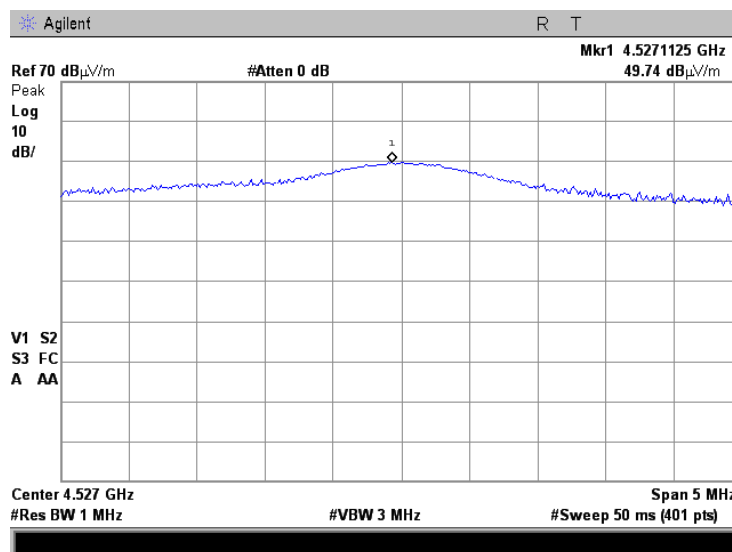




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.27 Radiated emission measurements at the fifth harmonic of mid carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

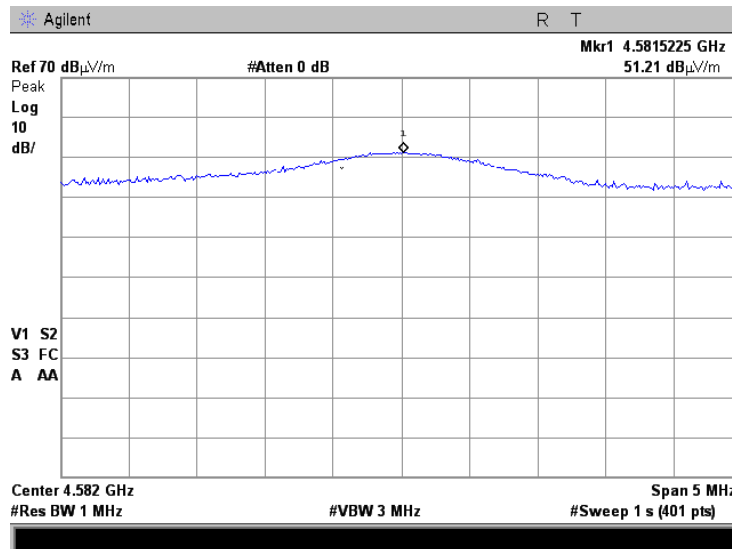

Plot 7.3.28 Radiated emission measurements at the fifth harmonic of high carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

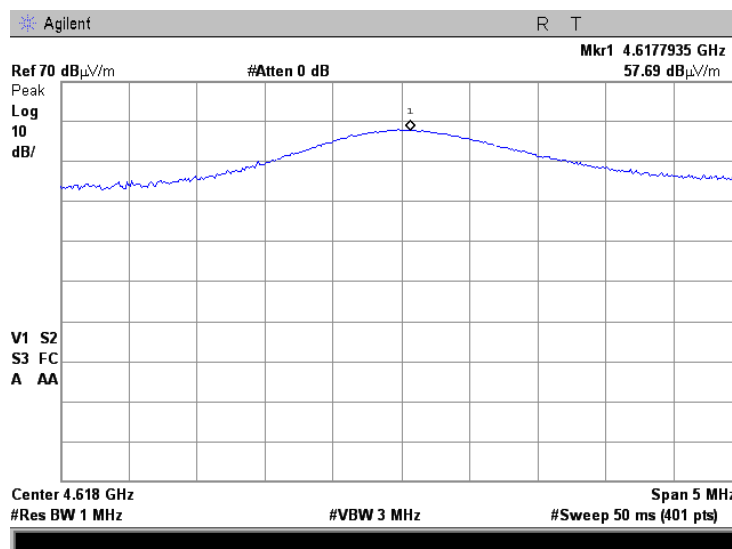




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.29 Radiated emission measurements at the sixth harmonic, FSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

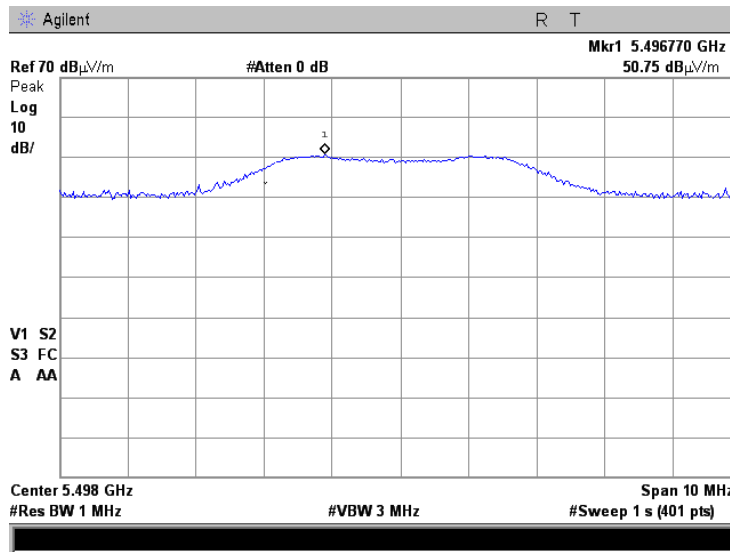

Plot 7.3.30 Radiated emission measurements at the sixth harmonic of low carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

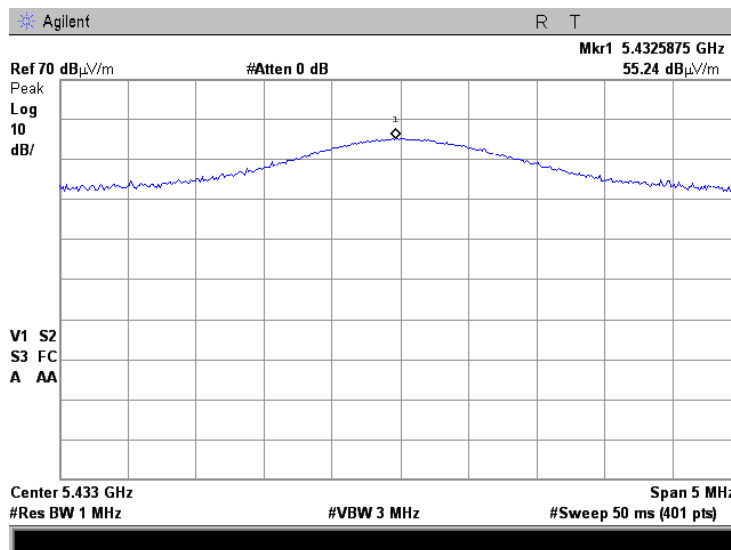




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.31 Radiated emission measurements at the sixth harmonic of mid carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

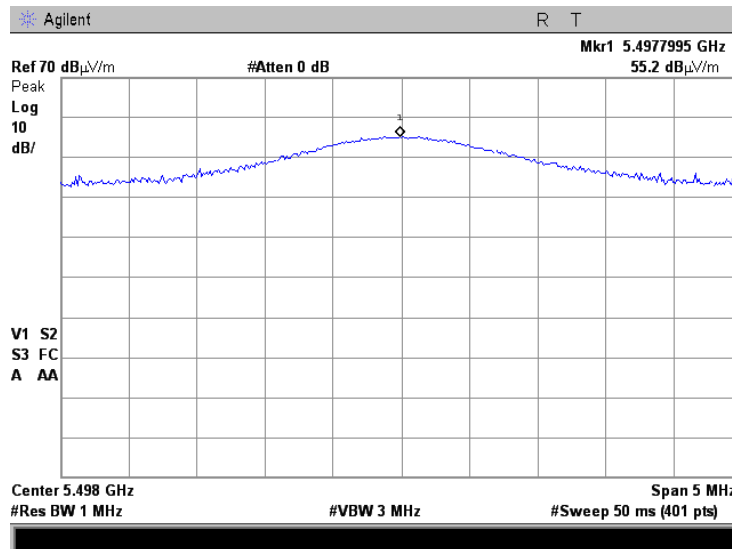

Plot 7.3.32 Radiated emission measurements at the sixth harmonic of high carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

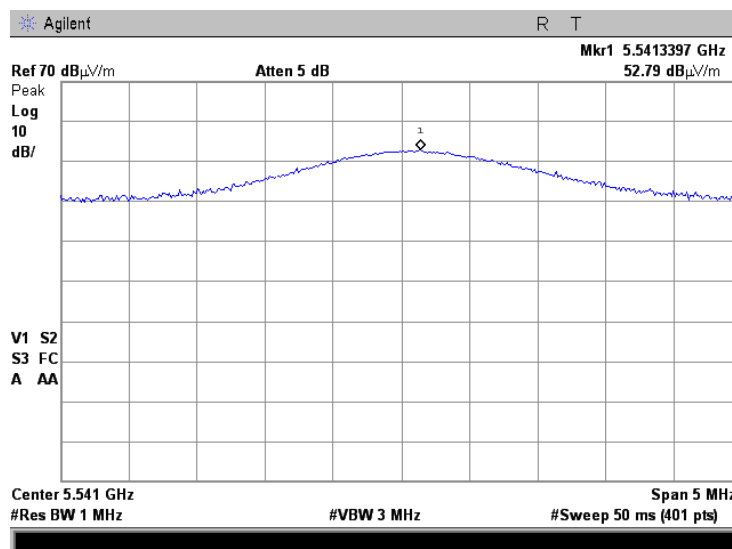




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.33 Radiated emission measurements at the seventh harmonic, FSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

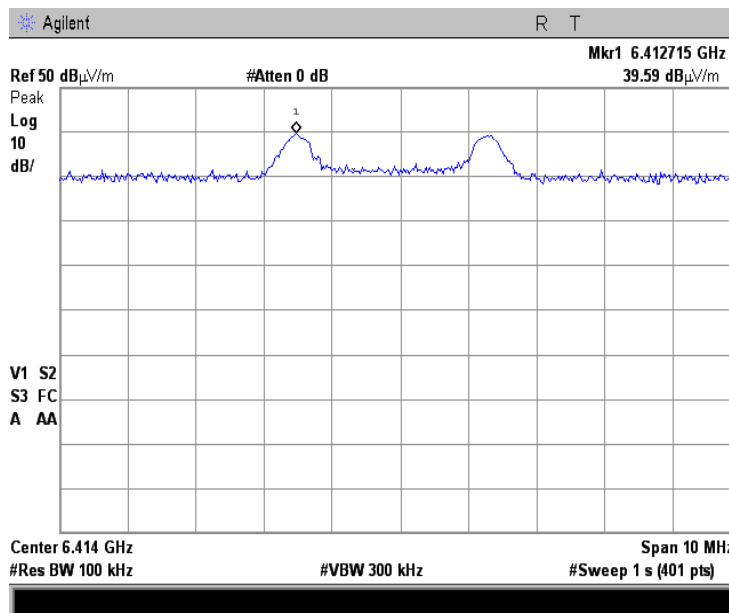

Plot 7.3.34 Radiated emission measurements at the seventh harmonic of low carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

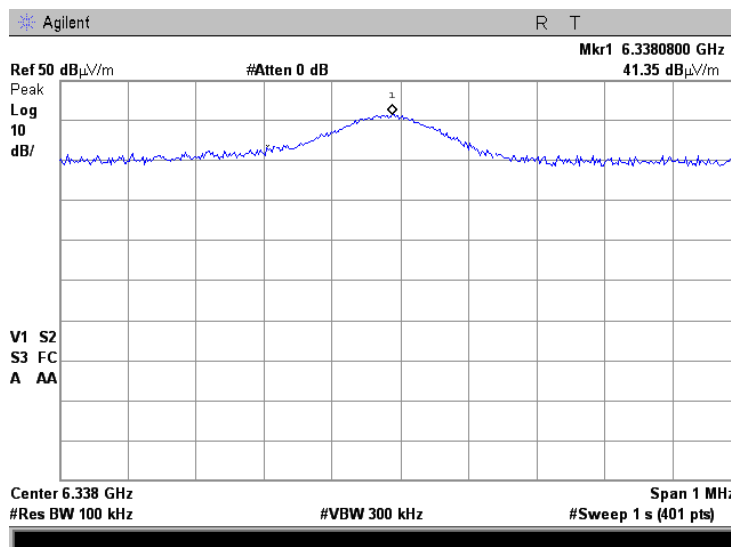




Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			


Plot 7.3.35 Radiated emission measurements at the seventh harmonic of mid carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

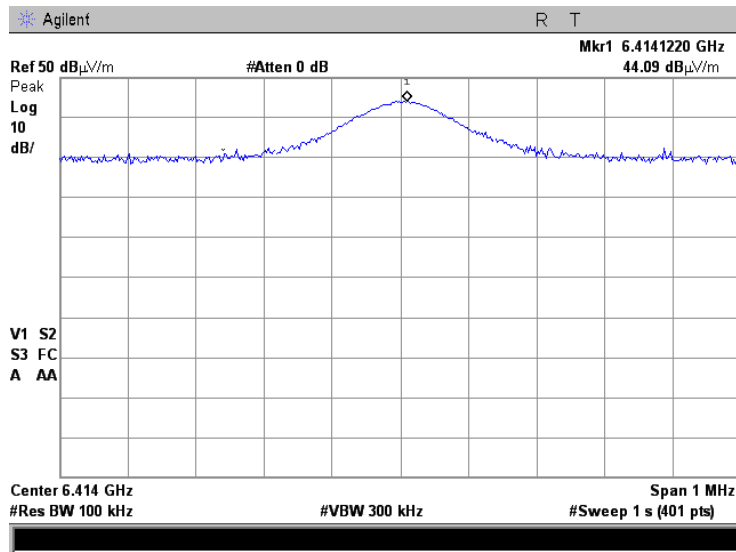

Plot 7.3.36 Radiated emission measurements at the seventh harmonic of high carrier frequency, BPSK modulation

TEST SITE: OATS
TEST DISTANCE: 3 m

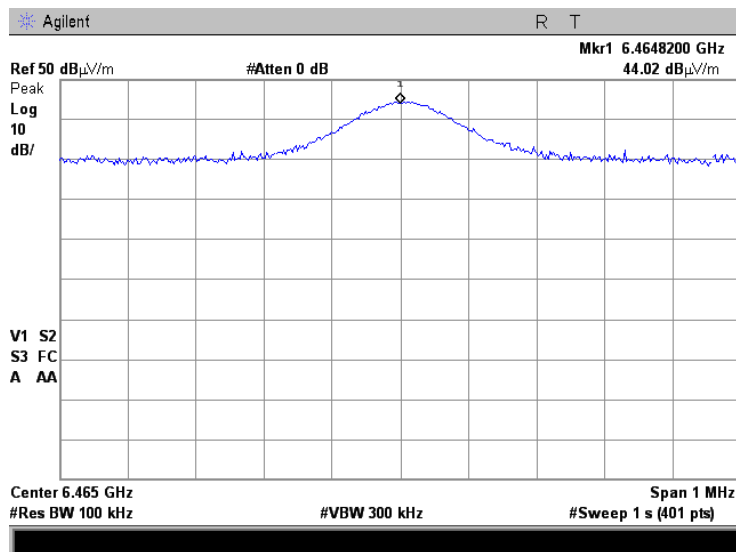





HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Plot 7.3.37 Transmission pulse duration

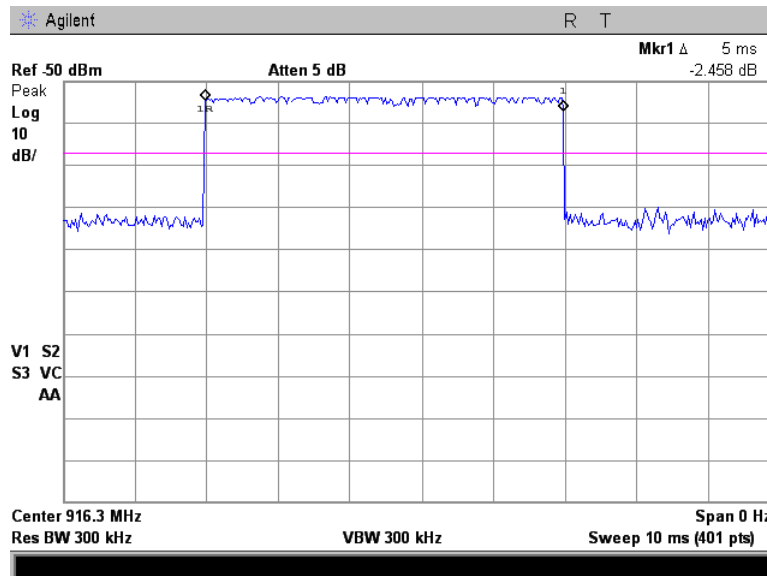

Plot 7.3.38 Transmission pulse period

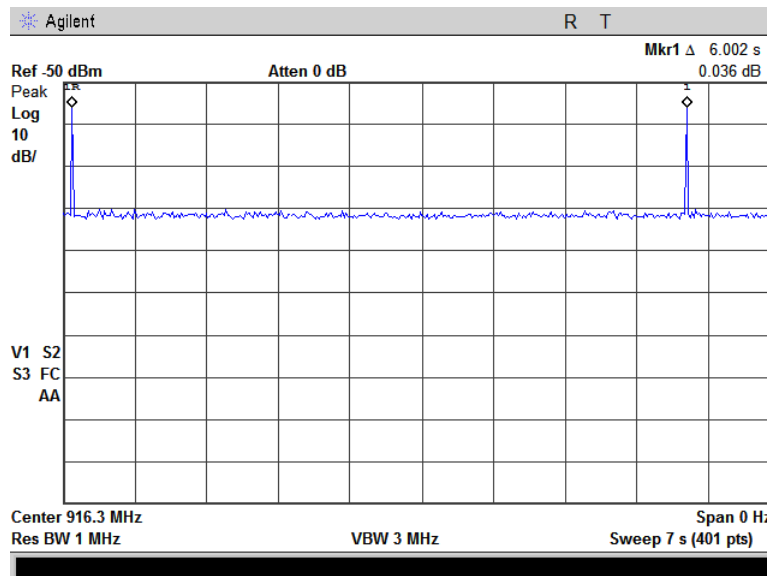



Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

7.4 Band edge radiated emissions

7.4.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
			Peak	Average
Peak	902.0 – 928.0	20.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			
Averaged over a time interval	902.0 – 928.0	30.0	74.0	54.0
	2400.0 – 2483.5			
	5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.4.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.4.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.4.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.4.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.4.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.

Figure 7.4.1 Band edge emission test setup





Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Table 7.4.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 902-928 MHz
DETECTOR USED: Peak
TRANSMITTER OUTPUT POWER SETTINGS: Maximum
VIDEO BANDWIDTH: ≥ RBW
MODULATION: FSK

Frequency, MHz	Band edge emission, dB(μV/m)	Emission at carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
902.00	65.98	107.5	41.52	20.0	21.52	Pass
928.00	64.34		43.16		23.16	

MODULATION: BPSK

Frequency, MHz	Band edge emission, dB(μV/m)	Emission at carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
901.80	82.41	113.0	30.59	20.0	10.59	Pass
928.00	81.14	113.3	32.16		12.16	

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 2909	HL 3615	HL 4276	HL 5288				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Plot 7.4.1 The highest low band edge emission, FSK modulation

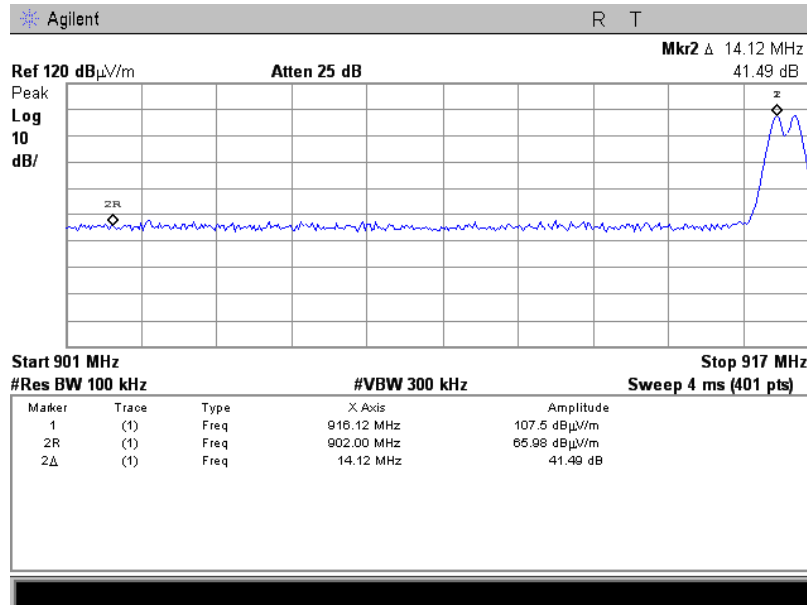

Plot 7.4.2 The highest high band edge emission, FSK modulation

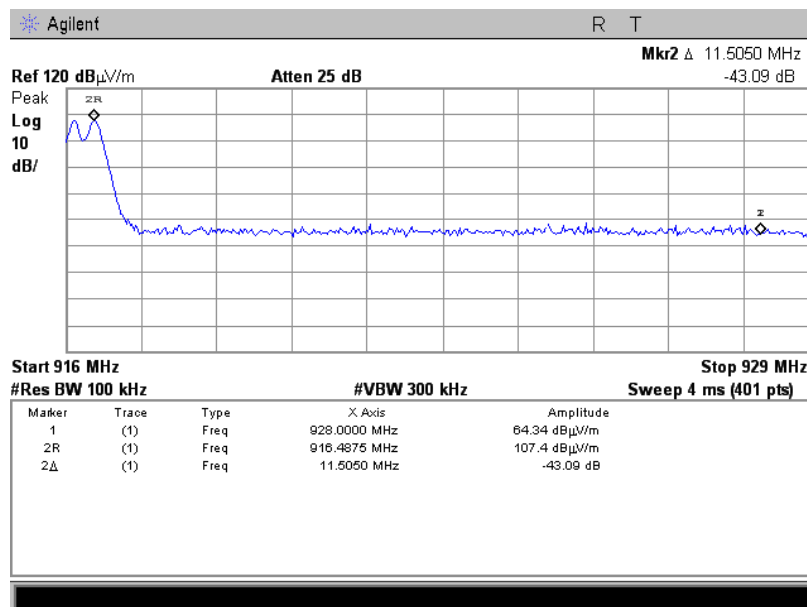





HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 21-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Plot 7.4.1 The highest band edge emission at low carrier frequency, BPSK modulation

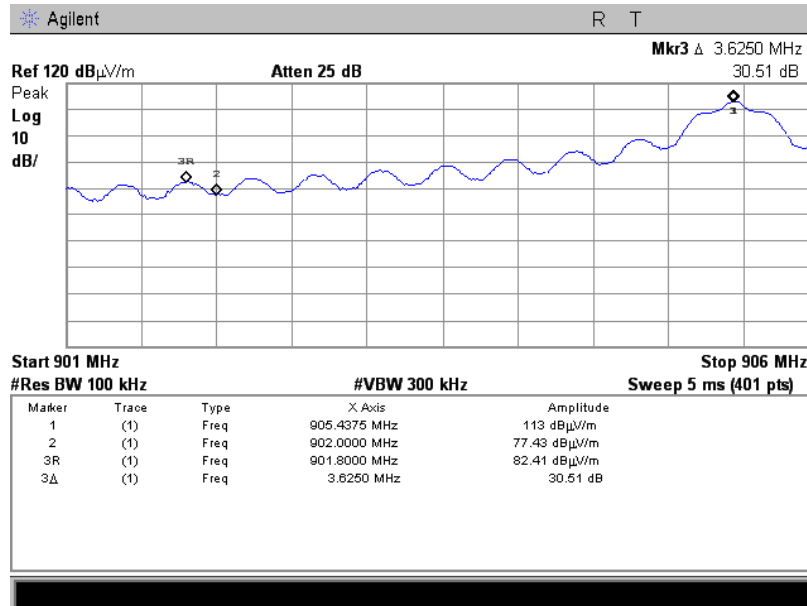

Plot 7.4.2 The highest band edge emission at high carrier frequency, BPSK modulation

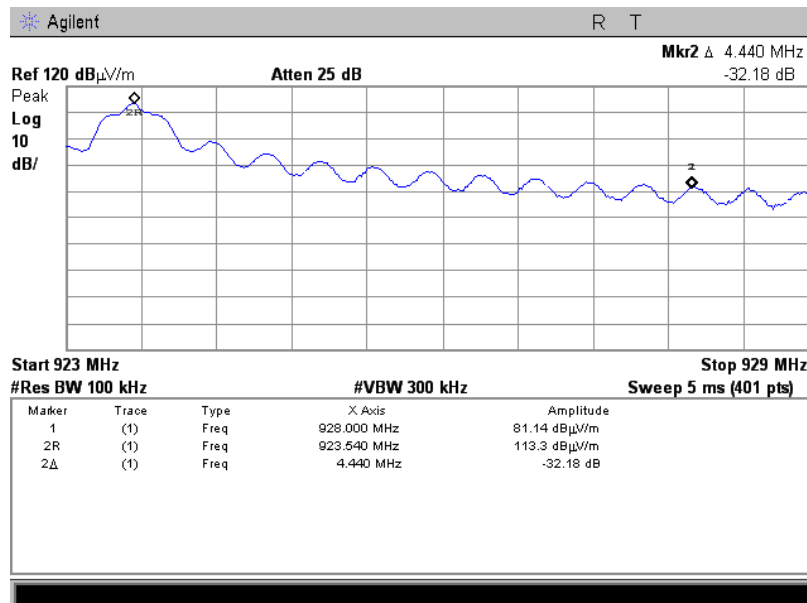



Test specification: Section 15.247(e) / RSS-247 section 5.2(b), Maximum power density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-May-18 - 21-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

7.5 Maximum power spectral density (PSD)

7.5.1 General

This test was performed to measure the peak power spectral density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(µV/m)*
902.0 – 928.0	3.0	8.0	103.2
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator.

7.5.2 Test procedure for field strength measurements

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth ≥ 3 RBW, auto sweep time and sufficient number of sweeps was allowed for trace stabilization.


7.5.2.5 The peak spectral power density was measured as provided in Table 7.5.2 and the associated plots.



HERMON LABORATORIES

Test specification: Section 15.247(e) / RSS-247 section 5.2(b), Maximum power density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-May-18 - 21-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

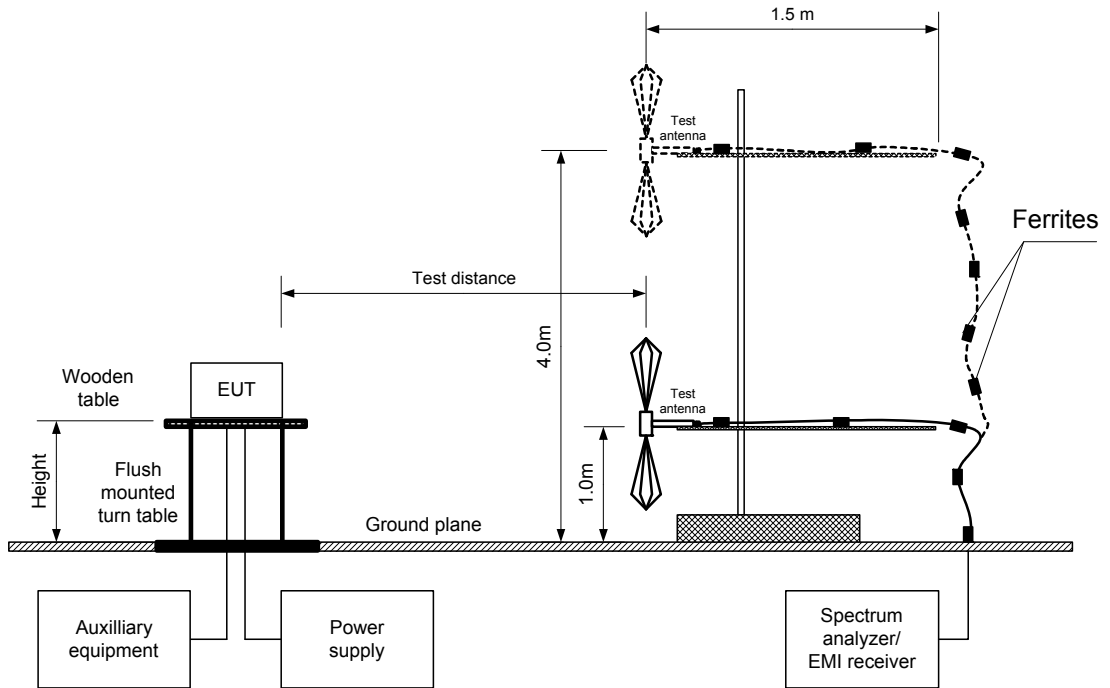



Test specification: Section 15.247(e) / RSS-247 section 5.2(b), Maximum power density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-May-18 - 21-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Table 7.5.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY RANGE: 902-928 MHz
TEST DISTANCE: 3 m
TEST SITE: Semi anechoic chamber
EUT HEIGHT: 0.8 m
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 3 kHz
VIDEO BANDWIDTH: 10 kHz
TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

MODULATION**FSK**

Carrier frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
916.3020	102.2	0	103.2	-1.0	Vertical	1.5	90

MODULATION**BPSK**

Carrier frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
905.4375	102.4	0	103.2	-0.8	Vertical	1.5	90
916.3020	102.6	0	103.2	-0.6	Vertical	1.5	90
923.5462	102.4	0	103.2	-0.8	Vertical	1.5	90

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 2909	HL 3615	HL 4276	HL 5288				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(e) / RSS-247 section 5.2(b), Maximum power density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-May-18 - 21-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Plot 7.5.1 Peak spectral power density at FSK modulation

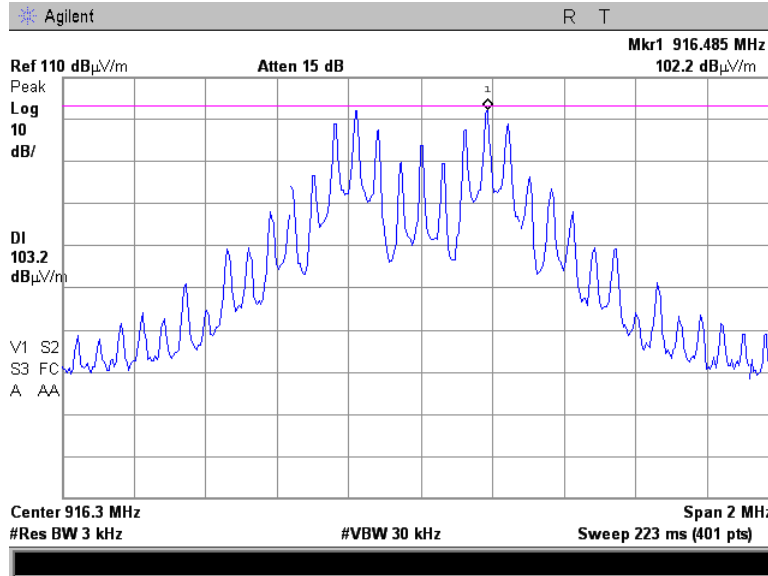

Plot 7.5.2 Peak spectral power density at low frequency, BPSK modulation

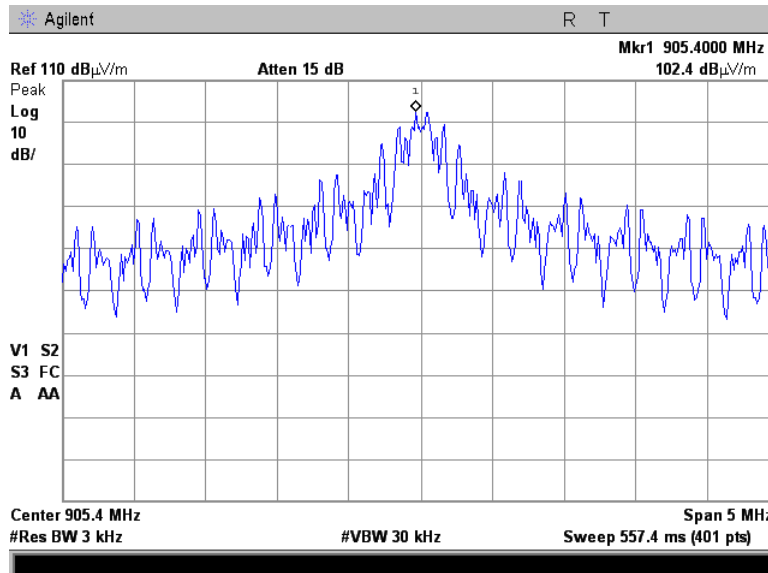





HERMON LABORATORIES

Test specification: Section 15.247(e) / RSS-247 section 5.2(b), Maximum power density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 15-May-18 - 21-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power: Battery
Remarks:			

Plot 7.5.3 Peak spectral power density at mid frequency, BPSK modulation

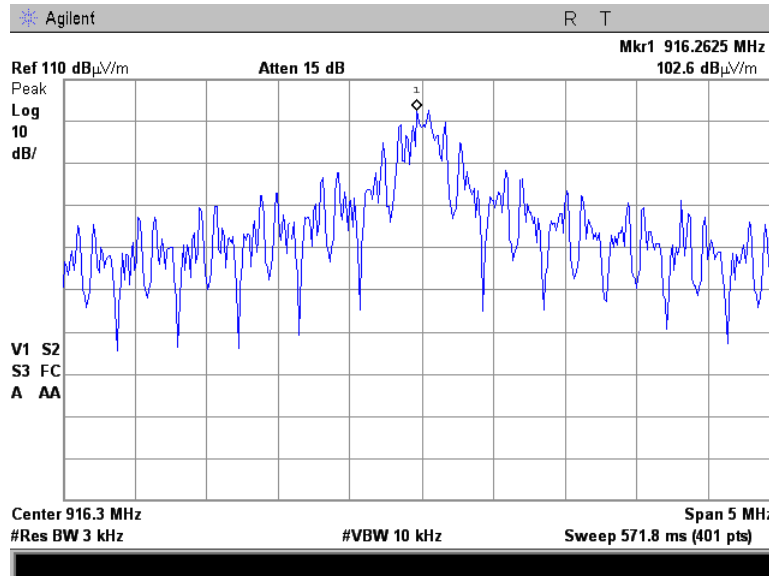

Plot 7.5.4 Peak spectral power density at high frequency, BPSK modulation

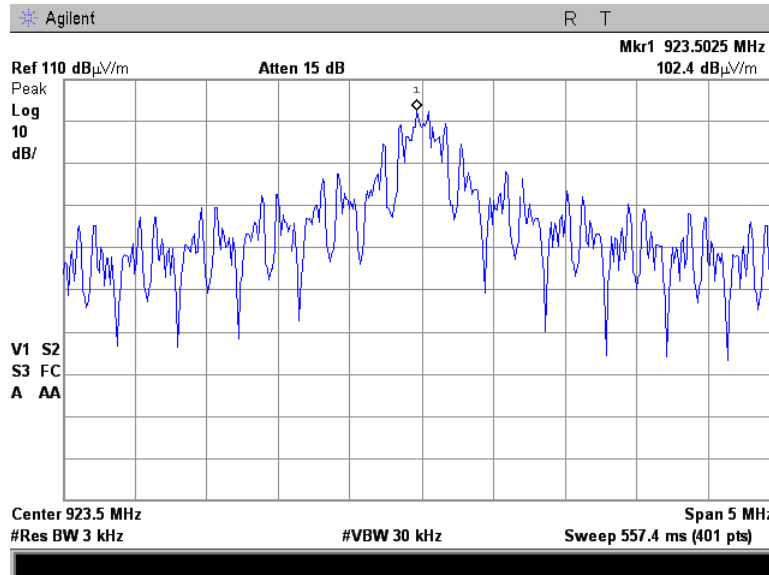



Test specification:	FCC Part 15, Section 203 / RSS-Gen, Section 6.8, Antenna requirements		
Test procedure:	Visual inspection		
Test mode:	Compliance	Verdict:	PASS
Date(s):	21-May-18		
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1009 hPa	Power Supply: Battery
Remarks:			

7.6 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters. The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	



Test specification: FCC section 15.109, ICES-003 section 6.2, Class B, Radiated emission			
Test procedure: ANSI C63.4, Section 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: Battery
Remarks:			

8 Unintentional emissions

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μ V/m)		Class A limit, dB(μ V/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $Lim_{S_2} = Lim_{S_1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.1.2 Test procedure

8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph/s, energized and the performance check was conducted.


8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.




Test specification: FCC section 15.109, ICES-003 section 6.2, Class B, Radiated emission			
Test procedure: ANSI C63.4, Section 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: Battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

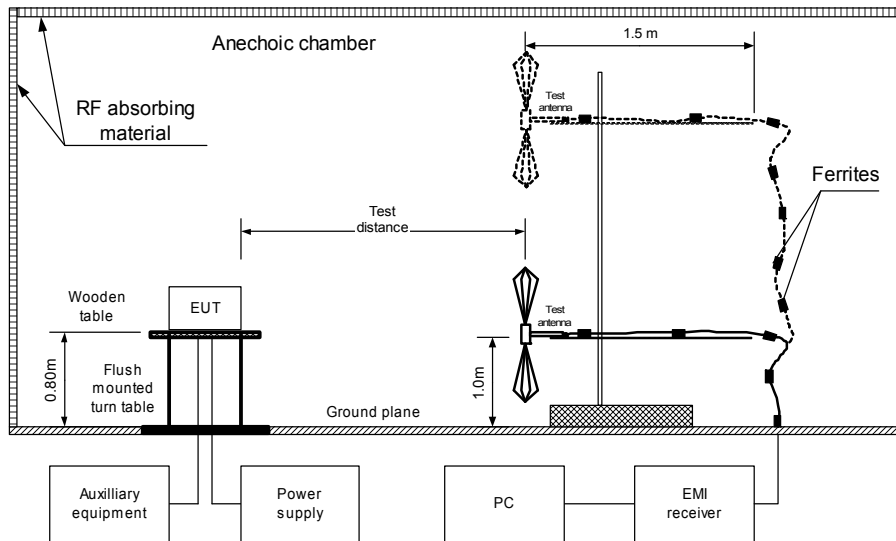

Photograph 8.1.1 Setup for radiated emission measurements

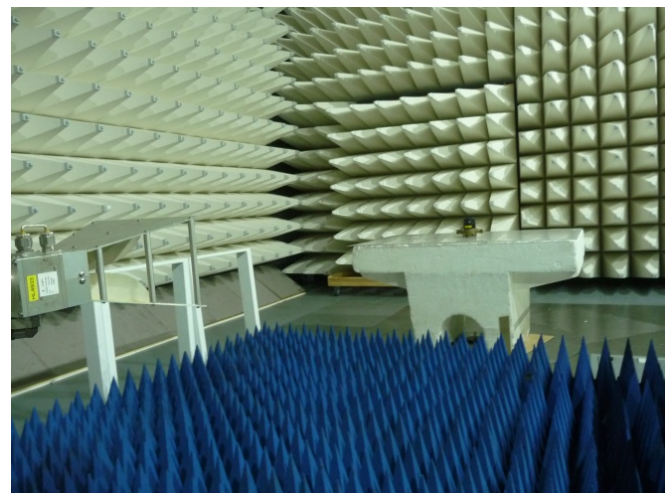



Test specification: FCC section 15.109, ICES-003 section 6.2, Class B, Radiated emission			
Test procedure: ANSI C63.4, Section 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: Battery
Remarks:			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No signals were found								Pass

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 MHz – 5000 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No signals were found										Pass

*- Margin = Measured emission - specification limit.
**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 2909	HL 3615	HL 3901	HL 4276	HL 4360	HL 4933	HL 5288	
---------	---------	---------	---------	---------	---------	---------	--


Full description is given in Appendix A.



Test specification: FCC section 15.109, ICES-003 section 6.2, Class B, Radiated emission			
Test procedure: ANSI C63.4, Section 12.2.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 22-May-18			
Temperature: 23 °C	Relative Humidity: 55 %	Air Pressure: 1010 hPa	Power: Battery
Remarks:			


Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range,

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT OPERATING MODE: Receive

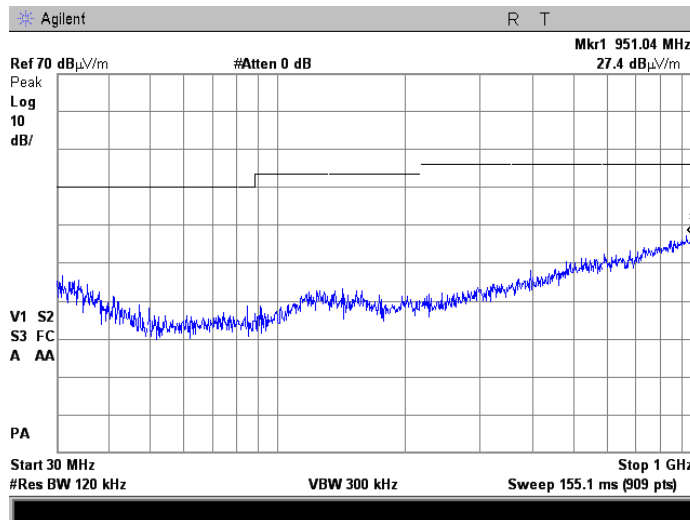

Plot 8.1.2 Radiated emission measurements in 1000 – 5000 MHz

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical & Horizontal
EUT OPERATING MODE: Receive

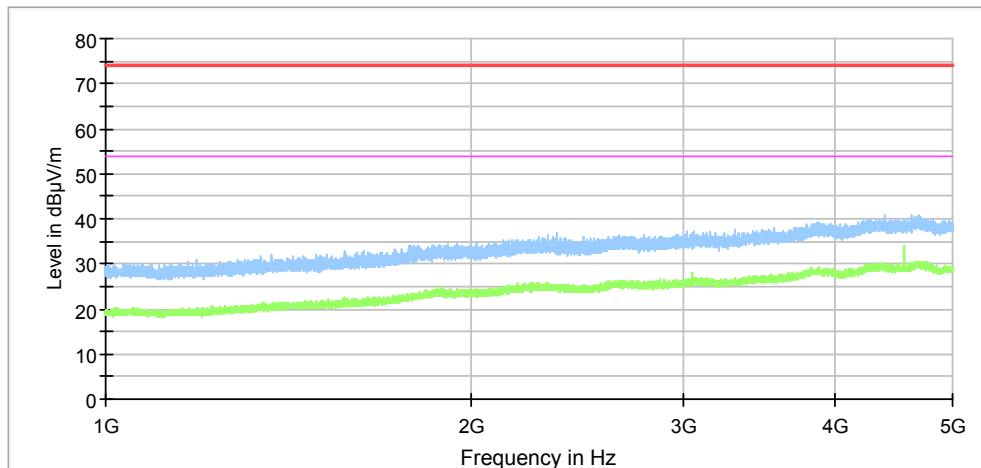

**9 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	11-Feb-18	11-Feb-19
2432	Antenna, Double-Ridged Waveguide Horn 1 to 18 GHz	EMC Test Systems	3115	00027177	18-Jan-18	18-Jan-19
2697	Antenna, 30 MHz - 3.0 GHz	Sunol Sciences. Corp. Pleasanton, California USA	JB3	A022805	03-Jun-18	03-Jun-19
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY41444762	27-Mar-18	27-Mar-19
3615	Cable RF, 6.5 m, N type-N type, DC-6 GHz	Suhner Switzerland	RG 214/U	NA	10-Jun-18	10-Jun-19
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLEX 102A	1225/2A	07-Feb-18	07-Feb-19
4114	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz	ETS Lindgren	3117	00123515	04-Jan-18	04-Jan-19
4276	Test Cable , DC-18 GHz, 3.05 m, N/M - N/M	Mini-Circuits	APC-10FT-NMNM+	0747A	24-Aug-17	24-Aug-18
4360	EMI Test Receiver, 20 Hz to 40 GHz	Rohde & Schwarz	ESU40	100322	26-Dec-17	26-Dec-18
4920	High Pass Filter, 50 Ohm, 3900 to 9800 MHz, SMA-FM / SMA-M	Mini-Circuits	VHF-3500+	NA	14-May-18	14-May-19
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	04-Jan-18	04-Jan-19
5107	RF cable, 18 GHz, 4.5 m, N-type	Huber-Suhner	SF106A/11N/11N/4500MM	500845/6A	27-Jul-17	27-Jul-18
5110	RF cable, 18 GHz, 3 m, N-type	Huber-Suhner	ST18A/Nm/Nm/3000	600818/18A	27-Jul-17	27-Jul-18
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	21-Jan-18	21-Jan-19



10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-10808 for OATS, R-1082 for anechoic chamber, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager

12 APPENDIX D Specification references

FCC 47CFR part 15: 2017	Radio Frequency Devices
ANSI C63.10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-247 Issue 2: 2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices
RSS-Gen Issue 5: 2018	General Requirements for Compliance of Radio Apparatus
ICES-003 Issue 6: 2016	Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement



13 APPENDIX E Test equipment correction factors

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL 2432

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).



Antenna calibration
Sunlo Sciences Inc., model JB3, serial number A022805, HL 2697

Frequency, MHz	ACF, dB	Gain, dBi	Num gain	Frequency, MHz	ACF, dB	Gain, dBi	Num gain	Frequency, MHz	ACF, dB	Gain, dBi	Num gain	Frequency, MHz	ACF, dB	Gain, dBi	Num gain	Frequency, MHz	ACF, dB	Gain, dBi	Num gain
30	22.2	-22.5	0.01	620	19.7	6.3	4.27	1215	24.9	7.0	5.05	1810	28.3	7.1	5.08	2405	30.9	6.9	4.89
35	18.5	-17.4	0.02	625	19.7	6.5	4.42	1220	24.9	7.0	4.99	1815	28.5	6.9	4.91	2410	30.9	6.9	4.89
40	14.7	-12.5	0.06	630	19.6	6.6	4.57	1225	25.1	6.9	4.91	1820	28.6	6.8	4.74	2415	31.0	6.9	4.85
45	11.3	-8.1	0.16	635	19.7	6.5	4.48	1230	25.2	6.8	4.82	1825	28.7	6.8	4.75	2420	31.0	6.8	4.82
45	11.3	-8.1	0.16	640	19.9	6.4	4.40	1235	25.1	7.0	4.96	1830	28.7	6.8	4.76	2425	31.1	6.8	4.81
50	8.9	-4.7	0.34	645	19.9	6.5	4.45	1240	25.0	7.1	5.09	1835	28.7	6.7	4.72	2430	31.0	6.9	4.87
55	7.9	-2.8	0.52	650	19.9	6.5	4.51	1245	25.0	7.1	5.12	1840	28.8	6.7	4.69	2435	31.0	6.9	4.86
60	7.8	-2.1	0.82	655	19.9	6.6	4.60	1250	25.0	7.1	5.15	1845	28.8	6.9	4.90	2440	31.2	6.8	4.74
65	8.5	-2.0	0.63	660	19.9	6.7	4.69	1255	25.0	7.2	5.25	1850	28.4	7.1	5.12	2445	31.1	6.9	4.91
70	9.0	-1.9	0.64	665	19.9	6.7	4.70	1260	24.9	7.3	5.36	1855	28.5	7.0	5.07	2450	31.0	7.0	4.96
75	8.8	-1.1	0.78	670	20.0	6.7	4.71	1265	25.0	7.3	5.31	1860	28.6	7.0	5.01	2455	31.0	7.0	5.01
80	8.4	-0.2	0.97	675	20.1	6.7	4.71	1270	25.1	7.2	5.26	1865	28.5	7.1	5.17	2460	30.9	7.2	5.19
85	8.0	0.8	1.20	680	20.1	6.7	4.71	1275	25.3	7.0	5.05	1870	28.4	7.3	5.33	2465	31.1	6.9	4.95
90	8.2	1.1	1.29	685	20.1	6.8	4.79	1280	25.5	6.8	4.94	1875	28.4	7.2	5.32	2470	31.3	6.8	4.76
95	9.2	0.5	1.13	690	20.1	6.9	4.88	1285	25.4	7.0	4.97	1880	28.5	7.2	5.32	2475	31.4	6.7	4.69
100	10.6	-0.4	0.92	695	20.2	6.8	4.82	1290	25.3	7.1	5.10	1885	28.5	7.2	5.22	2480	31.3	6.8	4.79
110	12.6	-1.6	0.70	705	20.4	6.8	4.75	1300	25.2	7.3	5.33	1895	28.6	7.2	5.24	2490	31.1	7.0	4.99
120	13.9	-2.1	0.62	715	20.5	6.8	4.80	1310	25.5	7.1	5.09	1905	28.5	7.3	5.36	2500	30.9	7.2	5.27
125	14.2	-2.0	0.63	720	20.5	6.9	4.85	1315	25.4	7.2	5.23	1910	28.5	7.4	5.45	2505	31.1	7.1	5.15
130	14.2	-1.7	0.68	725	20.6	6.8	4.81	1320	25.3	7.3	5.36	1915	28.5	7.3	5.38	2510	31.0	7.2	5.22
140	13.4	-0.3	0.94	735	20.9	6.7	4.85	1330	25.6	7.0	5.08	1925	28.5	7.3	5.35	2520	31.2	7.0	5.05
150	12.9	0.8	1.21	745	21.0	6.6	4.59	1340	25.7	7.1	5.09	1935	28.5	7.4	5.54	2530	31.0	7.3	5.37
160	12.7	1.6	1.44	755	21.0	6.8	4.74	1350	25.7	7.1	5.17	1945	28.5	7.5	5.59	2540	31.2	7.1	5.09
165	12.5	2.0	1.59	760	21.0	6.8	4.83	1355	25.8	7.0	5.06	1950	28.6	7.4	5.48	2545	31.0	7.3	5.43
170	12.2	2.6	1.83	765	21.1	6.8	4.73	1360	25.9	6.9	4.95	1955	28.6	7.5	5.57	2550	31.0	7.3	5.39
175	11.8	3.3	2.13	770	21.3	6.7	4.64	1365	26.0	6.9	4.95	1960	28.6	7.5	5.65	2555	31.1	7.2	5.30
180	11.6	3.7	2.36	775	21.3	6.7	4.68	1370	26.0	7.0	4.98	1965	28.7	7.4	5.47	2560	31.0	7.4	5.47
185	11.5	4.0	2.54	780	21.3	6.7	4.72	1375	26.0	7.0	5.01	1970	28.6	7.2	5.29	2565	31.2	7.0	5.05
190	11.6	4.2	2.61	785	21.3	6.8	4.77	1380	26.0	7.0	5.06	1975	28.9	7.2	5.22	2570	31.1	7.3	5.37
200	13.1	3.2	2.07	795	21.4	6.8	4.79	1390	26.1	6.9	4.92	1985	29.1	7.1	5.11	2580	31.6	6.9	4.87
205	12.0	4.4	2.76	800	21.5	6.8	4.77	1395	26.2	6.9	4.94	1990	29.1	7.0	5.06	2585	31.6	6.8	4.79
210	11.0	5.6	3.66	805	21.6	6.7	4.71	1400	26.2	7.0	4.96	1995	29.1	7.1	5.09	2590	31.6	6.9	4.88
215	11.3	5.6	3.59	810	21.7	6.7	4.65	1405	26.1	7.0	5.02	2000	29.1	7.1	5.11	2595	31.5	7.0	4.97
220	11.6	5.5	3.52	815	21.7	6.7	4.72	1410	26.1	7.1	5.09	2005	29.1	7.1	5.16	2600	31.6	6.9	4.86
225	11.7	5.5	3.45	820	21.7	6.8	4.80	1415	26.2	7.0	5.02	2010	29.2	7.1	5.15	2605	31.3	7.2	5.30
230	11.9	5.6	3.57	825	21.7	6.8	4.82	1420	26.3	7.0	4.96	2015	29.2	7.1	5.13	2610	31.4	7.1	5.15
235	12.1	5.5	3.56	830	21.7	6.9	4.85	1425	26.2	7.1	5.10	2020	29.2	7.1	5.18	2615	31.7	6.9	4.88
240	12.3	5.5	3.54	835	21.8	6.8	4.82	1430	26.1	7.2	5.25	2025	29.3	7.1	5.08	2620	31.6	7.0	4.97
245	12.3	5.7	3.71	840	21.9	6.8	4.80	1435	26.1	7.2	5.24	2030	29.3	7.0	5.05	2625	31.4	7.1	5.17
250	12.3	5.9	3.88	845	21.9	6.8	4.83	1440	26.2	7.2	5.24	2035	29.3	7.1	5.07	2630	31.6	7.0	5.00
255	12.5	5.9	3.85	850	21.9	6.9	4.86	1445	26.3	1	5.11	2040	29.3	7.1	5.13	2635	31.8	6.8	4.82
260	12.7	5.8	3.83	855	22.0	6.8	4.80	1450	26.5	7.0	4.98	2045	29.2	7.2	5.23	2640	31.7	7.0	4.98
265	13.2	5.5	3.54	860	22.0	6.8	4.74	1455	26.4	7.1	5.07	2050	29.2	7.2	5.27	2645	31.7	6.9	4.93
270	13.7	5.2	3.32	865	22.0	6.9	4.92	1460	26.4	7.1	5.17	2055	29.3	7.2	5.21	2650	31.8	6.9	4.85
275	13.7	5.3	3.39	870	21.9	7.1	5.11	1465	26.4	7.2	5.19	2060	29.5	7.0	5.02	2655	31.8	6.9	4.85
280	13.7	5.4	3.50	875	22.0	7.1	5.08	1470	26.4	7.2	5.22	2065	29.4	7.1	5.08	2660	31.7	7.0	5.02
285	13.7	5.6	3.61	880	22.1	7.0	5.05	1475	26.4	7.1	5.17	2070	29.4	7.1	5.10	2665	32.0	6.7	4.71
290	13.7	5.7	3.72	885	22.1	7.0	5.06	1480	26.5	7.1	5.12	2075	29.5	7.0	5.01	2670	32.0	6.7	4.67
295	13.8	5.8	3.77	890	22.1	7.0	5.06	1485	26.5	7.1	5.14	2080	29.6	6.8	4.76	2675	31.9	6.8	4.81
300	13.9	5.8	3.81	895	22.2	7.1	5.09	1490	26.5	7.1	5.17	2085	29.7	6.9	4.89	2680	31.7	7.0	5.04
305	14.0	5.9	3.85	900	22.2	7.1	5.12	1495	26.5	7.2	5.24	2090	29.7	6.9	4.86	2685	31.9	6.8	4.83
310	14.1	5.9	3.88	905	22.3	7.1	5.09	1500	26.5	7.2	5.31	2095	29.8	6.8	4.78	2690	32.1	6.7	4.72
315	14.3	5.8	3.89	910	22.3	7.0	5.05	1505	26.5	7.2	5.27	2100	29.8	6.8	4.75	2695	32.1	6.7	4.71
320	14.4	5.8	3.90	915	22.4	7.0	4.99	1510	26.6	7.2	5.23	2105	29.8	6.8	4.81	2700	32.0	6.8	4.81
325	14.5	5.9	3.92	920	22.6	6.9	4.92	1515	26.6	7.2	5.30	2110	29.9	6.8	4.78	2705	32.0	6.8	4.80
330	14.6	5.9	3.93	925	22.7	6.9	4.85	1520	26.5	7.3	5.38	2115	29.9	6.8	4.76	2710	32.1	6.8	4.79
335	14.7	6.0	4.02	930	22.8	6.8	4.77	1525	26.6	7.3	5.37	2120	29.9	6.8	4.84	2715	32.1	6.7	4.71
340	14.7	6.2	4.12	935	22.8	6.8	4.83	1530	26.6	7.3	5.36	2125	29.9	6.9	4.89	2720	32.4	6.5	4.47
345	14.9	6.1	4.06	940	22.8	6.9	4.89	1535	26.6	7.4	5.44	2130	29.9	6.9	4.90	2725	32.2	6.7	4.63
350	15.1	6.0	3.99	945	22.8	6.9	4.87	1540	26.5	7.4	5.53	2135	29.8	6.9	4.94	2730	31.9	7.0	5.05
355	15.3	5.9	3.88	950	22.9	6.9	4.85	1545	26.5	7.5	5.58	2140	29.8	7.1	5.08	2735	31.6	7.4	5.44
360	15.6	5.8	3.78	955	23.0	6.8	4.81	1550	26.5	7.5	5.63	2145	29.8	6.9	4.92	2740	31.8	7.1	5.45
365	15.5	5.9	3.80	960	23.1	6.8	4.77	1555	26.7	7.3	5.39	2150	29.9	7.0	4.98	2745	31.9	7.0	5.06
370	15.5	6.0	4.01	965	23.1	6.7	4.73	1560	26.9	7.1	5.18	2155	29.8	7.1	5.10	2750	32.0	6.9	4.94
375	15.6	6.1	4.03	970	23.2	6.7	4.69	1565	26.9	7.2	5.23	2160	29.8	7.1	5.09	2755	32.0	7.0	4.98
380	15.7	6.1	4.05	975	23.3	6.6	4.62	1570	26.9	7.2	5.30	2165	29.9	7.0	5.00	2760	32.0	7.0	5.06
385	15.7	6.2	4.15	980	23.5	6.6	4.54	1575	27.0	7.2	5.23	2170	29.9	7.1	5.07	2765	32.2	6.8	4.80
390	15.7	6.3	4.25	985	23.5	6.6	4.52												



Antenna factor
Double-ridged waveguide horn antenna
ETS Lindgren, Model 3117, serial number: 00123515, HL 4114

Frequency, MHz	Antenna factor, dB/m		
	Measured	Manufacturer	Deviation
1000	28.0	28.4	-0.4
1500	28.0	27.4	0.6
2000	31.2	30.9	0.3
2500	32.5	33.4	-0.9
3000	32.9	32.6	0.3
3500	32.7	32.8	-0.1
4000	33.1	33.4	-0.3
4500	33.8	33.9	-0.1
5000	33.8	34.1	-0.3
5500	34.4	34.5	-0.1
6000	35.0	35.2	-0.2
6500	35.4	35.5	-0.1
7000	35.7	35.7	0.0
7500	35.9	35.7	0.2
8000	35.8	35.8	0.0
8500	35.9	35.8	0.1
9000	36.3	36.2	0.1
9500	36.6	36.6	0.0
10000	37.1	37.1	0.0
10500	37.6	37.5	0.1
11000	37.9	37.7	0.2
11500	38.5	38.1	0.4
12000	39.2	38.7	0.5
12500	39.0	38.9	0.1
13000	39.1	39.1	0.0
13500	38.9	38.8	0.1
14000	39.0	38.8	0.2
14500	39.6	39.9	-0.3
15000	39.9	39.7	0.2
15500	39.9	40.1	-0.2
16000	40.7	40.8	-0.1
16500	41.3	41.8	-0.5
17000	42.5	42.1	0.4
17500	41.3	41.2	0.1
18000	41.4	40.9	0.5

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field strength in dB(μ V/meter)



Active Horn Antenna,
Com-Power Corporation, model: AHA-118, s/n 701046, HL 4933

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in



**Antenna factor
Trilog antenna
Model ALX-8000E, Frankonia, S/N 00809, HL 5288**

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert to field strength in dB(μ V/meter)



Cable loss
Cable coaxial, RG-214/U, N type-N type, 6.5 m
Suhner Switzerland, HL 3615

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	1750	2.47	3550	4.10	5350	5.76
30	0.24	1800	2.53	3600	4.17	5400	5.84
50	0.31	1850	2.59	3650	4.21	5450	5.88
100	0.47	1900	2.61	3700	4.23	5500	5.90
150	0.58	1950	2.66	3750	4.33	5550	5.96
200	0.68	2000	2.74	3800	4.36	5600	6.02
250	0.77	2050	2.76	3850	4.38	5650	6.02
300	0.86	2100	2.80	3900	4.46	5700	6.09
350	0.94	2150	2.84	3950	4.52	5750	6.14
400	1.01	2200	2.89	4000	4.48	5800	6.15
450	1.08	2250	2.94	4050	4.52	5850	6.22
500	1.16	2300	2.98	4100	4.64	5900	6.29
550	1.21	2350	3.03	4150	4.62	5950	6.32
600	1.28	2400	3.07	4200	4.69	6000	6.39
650	1.35	2450	3.11	4250	4.75	6050	6.40
700	1.41	2500	3.15	4300	4.79	6100	6.48
750	1.48	2550	3.21	4350	4.83	6150	6.57
800	1.54	2600	3.25	4400	4.90	6200	6.62
850	1.58	2650	3.29	4450	4.95	6250	6.68
900	1.65	2700	3.33	4500	4.98	6300	6.74
950	1.67	2750	3.39	4550	5.04	6350	6.79
1000	1.74	2800	3.45	4600	5.08	6400	6.82
1050	1.79	2850	3.48	4650	5.12	6450	6.83
1100	1.84	2900	3.51	4700	5.15	6500	6.91
1150	1.91	2950	3.58	4750	5.22		
1200	1.94	3000	3.62	4800	5.26		
1250	1.99	3050	3.65	4850	5.29		
1300	2.06	3100	3.69	4900	5.33		
1350	2.11	3150	3.75	4950	5.36		
1400	2.16	3200	3.77	5000	5.38		
1450	2.21	3250	3.80	5050	5.46		
1500	2.25	3300	3.85	5100	5.49		
1550	2.30	3350	3.90	5150	5.56		
1600	2.35	3400	3.94	5200	5.58		
1650	2.38	3450	4.00	5250	5.64		
1700	2.42	3500	4.03	5300	5.69		



Cable loss
Microwave Cable Assembly, Huber-Suhner, 40 GHz, 3.5 m, SMA-SMA, S/N 1225/2A
HL 3901

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	9500	4.29	21000	6.67
100	0.41	10000	4.40	22000	6.92
500	0.93	10500	4.52	23000	7.00
1000	1.33	11000	4.64	24000	7.18
1500	1.63	11500	4.76	25000	7.29
2000	1.90	12000	4.87	26000	7.55
2500	2.12	12500	4.99	27000	7.70
3000	2.33	13000	5.11	28000	7.88
3500	2.50	13500	5.20	29000	8.02
4000	2.67	14000	5.31	30000	8.15
4500	2.82	14500	5.42	31000	8.35
5000	2.99	15000	5.51	32000	8.40
5500	3.16	15500	5.58	33000	8.62
6000	3.32	16000	5.68	34000	8.73
6500	3.51	16500	5.78	35000	8.78
7000	3.65	17000	5.91	36000	8.94
7500	3.79	17500	5.99	37000	9.21
8000	3.92	18000	6.07	38000	9.37
8500	4.04	19000	6.36	39000	9.45
9000	4.18	20000	6.49	40000	9.52



Cable loss
Test cable, Mini-Circuits, S/N 0747A, 18 GHz, 3.05 m, N/M - N/M
APC-10FT-NMNM+, HL 4276

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.11	4500	2.81	9300	4.30	14100	5.59
30	0.19	4600	2.85	9400	4.33	14200	5.61
50	0.25	4700	2.88	9500	4.36	14300	5.63
100	0.36	4800	2.92	9600	4.39	14400	5.66
150	0.44	4900	2.95	9700	4.42	14500	5.68
200	0.52	5000	3.00	9800	4.46	14600	5.70
300	0.64	5100	3.03	9900	4.49	14700	5.72
400	0.75	5200	3.08	10000	4.53	14800	5.75
500	0.84	5300	3.11	10100	4.56	14900	5.77
600	0.93	5400	3.13	10200	4.60	15000	5.80
700	1.01	5500	3.16	10300	4.64	15100	5.82
800	1.08	5600	3.20	10400	4.66	15200	5.85
900	1.15	5700	3.22	10500	4.68	15300	5.88
1000	1.22	5800	3.26	10600	4.70	15400	5.91
1100	1.28	5900	3.30	10700	4.73	15500	5.93
1200	1.34	6000	3.34	10800	4.75	15600	5.97
1300	1.40	6100	3.39	10900	4.77	15700	5.99
1400	1.46	6200	3.42	11000	4.80	15800	6.02
1500	1.51	6300	3.47	11100	4.83	15900	6.07
1600	1.57	6400	3.50	11200	4.86	16000	6.08
1700	1.62	6500	3.52	11300	4.88	16100	6.11
1800	1.68	6600	3.55	11400	4.90	16200	6.12
1900	1.72	6700	3.58	11500	4.92	16300	6.14
2000	1.77	6800	3.60	11600	4.94	16400	6.17
2100	1.82	6900	3.62	11700	4.96	16500	6.19
2200	1.87	7000	3.64	11800	4.98	16600	6.21
2300	1.92	7100	3.66	11900	5.01	16700	6.22
2400	1.96	7200	3.68	12000	5.03	16800	6.24
2500	2.01	7300	3.71	12100	5.06	16900	6.26
2600	2.05	7400	3.74	12200	5.09	17000	6.28
2700	2.10	7500	3.78	12300	5.12	17100	6.31
2800	2.14	7600	3.81	12400	5.15	17200	6.33
2900	2.18	7700	3.84	12500	5.17	17300	6.36
3000	2.23	7800	3.87	12600	5.20	17400	6.39
3100	2.27	7900	3.90	12700	5.22	17500	6.42
3200	2.31	8000	3.93	12800	5.25	17600	6.45
3300	2.35	8100	3.96	12900	5.28	17700	6.48
3400	2.39	8200	4.00	13000	5.32	17800	6.50
3500	2.42	8300	4.03	13100	5.35	17900	6.52
3600	2.46	8400	4.06	13200	5.38	18000	6.55
3700	2.50	8500	4.08	13300	5.40		
3800	2.54	8600	4.11	13400	5.42		
3900	2.58	8700	4.13	13500	5.44		
4000	2.61	8800	4.16	13600	5.46		
4100	2.65	8900	4.18	13700	5.48		
4200	2.69	9000	4.21	13800	5.51		
4300	2.73	9100	4.24	13900	5.53		
4400	2.77	9200	4.27	14000	5.56		



Cable loss
RF Cable, Huber-Suhner, 18 GHz, 6 m, N- type,
SF106A/11N/11N/4500MM, S/N 500845/6A
HL 5107

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.01	5500	1.75
50	0.16	6000	1.84
100	0.22	6500	1.92
200	0.31	7000	2.00
300	0.38	7500	2.07
400	0.44	8000	2.15
500	0.49	8500	2.23
600	0.54	9000	2.29
700	0.58	9500	2.38
800	0.63	10000	2.43
900	0.67	10500	2.50
1000	0.71	11000	2.57
1100	0.74	11500	2.63
1200	0.77	12000	2.69
1300	0.81	12500	2.76
1400	0.84	13000	2.82
1500	0.87	13500	2.87
1600	0.91	14000	2.93
1700	0.93	14500	3.00
1800	0.96	15000	3.06
1900	0.99	15500	3.12
2000	1.01	16000	3.18
2500	1.14	16500	3.22
3000	1.26	17000	3.28
3500	1.37	17500	3.36
4000	1.47	18000	3.43
4500	1.57		
5000	1.66		



Cable loss
RF Cable, Huber-Suhner, 18 GHz, 3 m, N- type,
ST18A/Nm/Nm/3000, S/N 600818/18A
HL 5110

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
0.1	0.01	5500	1.99
50	0.17	6000	2.10
100	0.24	6500	2.20
200	0.34	7000	2.29
300	0.42	7500	2.38
400	0.48	8000	2.47
500	0.54	8500	2.57
600	0.59	9000	2.65
700	0.64	9500	2.74
800	0.69	10000	2.83
900	0.73	10500	2.91
1000	0.77	11000	2.99
1100	0.82	11500	3.07
1200	0.86	12000	3.14
1300	0.89	12500	3.22
1400	0.93	13000	3.29
1500	0.96	13500	3.37
1600	1.00	14000	3.45
1700	1.03	14500	3.52
1800	1.06	15000	3.59
1900	1.10	15500	3.66
2000	1.13	16000	3.74
2500	1.28	16500	3.80
3000	1.41	17000	3.88
3500	1.54	17500	4.00
4000	1.66	18000	4.02
4500	1.78		
5000	1.89		



14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT