

Test specification: Section 15.247(d), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance	Verdict: PASS		
Date: 6/29/2010			
Temperature: 24.2 °C	Air Pressure: 1006 hPa	Relative Humidity: 46 %	Power Supply: 3.6 V battery
Remarks:			

7.4 Peak spectral power density

7.4.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μ V/m)*
902.0 – 928.0	3.0	8.0	103.2


* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.4.2 Test procedure for field strength measurements

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.4.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.4.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.
- 7.4.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.4.2 and associated plots.

Test specification: Section 15.247(d), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date: 6/29/2010			
Temperature: 24.2 °C	Air Pressure: 1006 hPa	Relative Humidity: 46 %	Power Supply: 3.6 V battery
Remarks:			

Figure 7.4.1 Setup for carrier field strength measurements

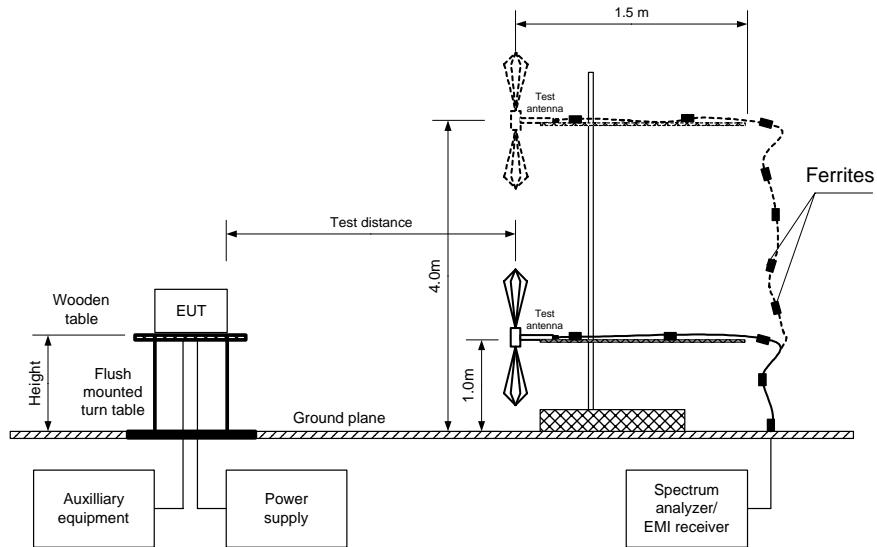



Test specification: Section 15.247(d), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance	Verdict: PASS		
Date: 6/29/2010			
Temperature: 24.2 °C	Air Pressure: 1006 hPa	Relative Humidity: 46 %	Power Supply: 3.6 V battery
Remarks:			

Table 7.4.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY BAND: 902.0 – 928.0 MHz
 TEST DISTANCE: 3 m
 TEST SITE: Semi anechoic chamber
 EUT HEIGHT: 0.8 m
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 3 kHz
 VIDEO BANDWIDTH: 10 kHz
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)
 MODULATION: FSK / PSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 60 kbps
 TRANSMITTER OUTPUT POWER: Low carrier frequency: 18.61 dBm (PSK) / 16.48 (FSK)
 Mid carrier frequency: 18.67 dBm (PSK) / 16.03 (FSK)
 High carrier frequency: 19.27 dBm (PSK) / 16.50 (FSK)

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
PSK modulation							
905.43	103.81	1.5	103.2	-0.89	V	1.10	350
914.50	104.01	1.5	103.2	-0.69	V	1.10	350
923.55	104.15	1.5	103.2	-0.55	V	1.10	350
FSK modulation							
905.43	103.93	1.5	103.2	-0.77	V	1.10	350
914.50	104.12	1.5	103.2	-0.58	V	1.10	350
923.55	104.19	1.5	103.2	-0.51	V	1.10	350

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 2871	HL 3616				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification: Section 15.247(d), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date: 6/29/2010			
Temperature: 24.2 °C	Air Pressure: 1006 hPa	Relative Humidity: 46 %	Power Supply: 3.6 V battery
Remarks:			

Plot 7.4.1 Power spectral lines, PSK modulation

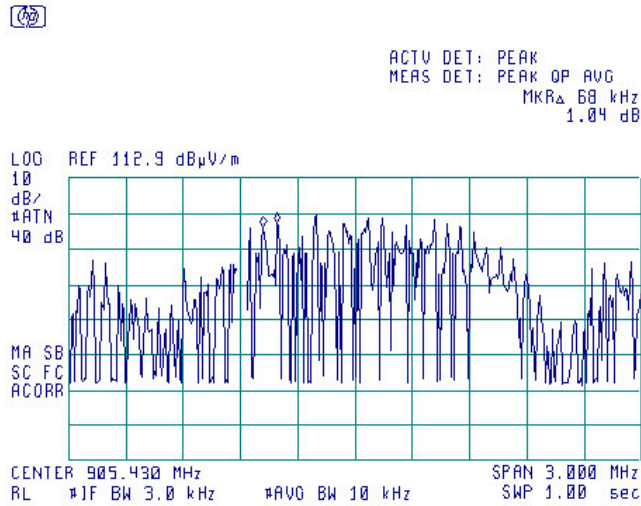

Plot 7.4.2 Power spectral lines, FSK modulation

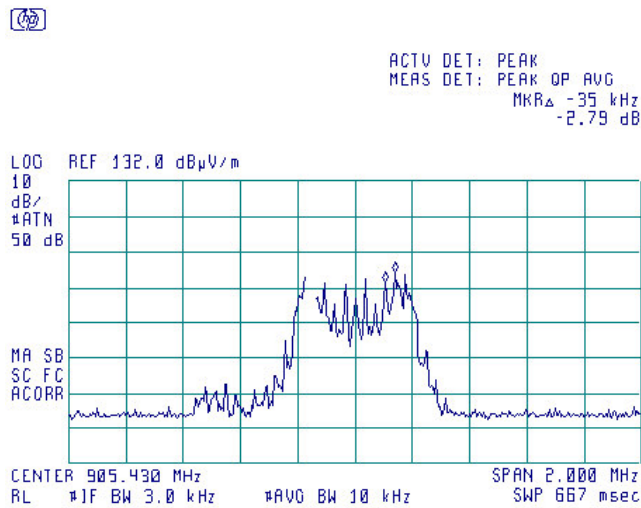





HERMON LABORATORIES

Test specification: Section 15.247(d), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date: 6/29/2010			
Temperature: 24.2 °C	Air Pressure: 1006 hPa	Relative Humidity: 46 %	Power Supply: 3.6 V battery
Remarks:			

Plot 7.4.3 Peak spectral power density at low frequency within 6 dB band, PSK modulation

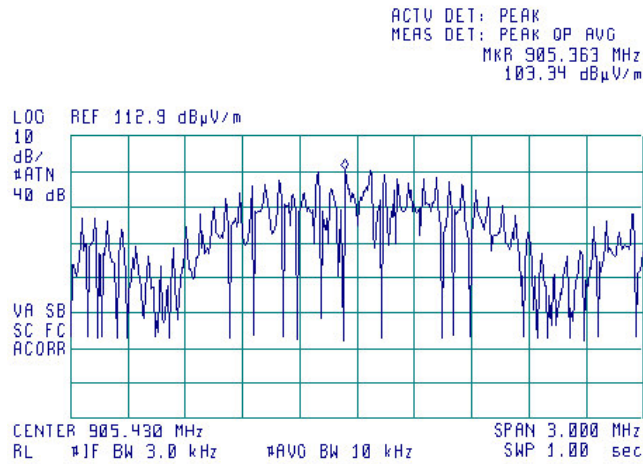

Plot 7.4.4 Peak spectral power density at low frequency zoomed at the peak, PSK modulation

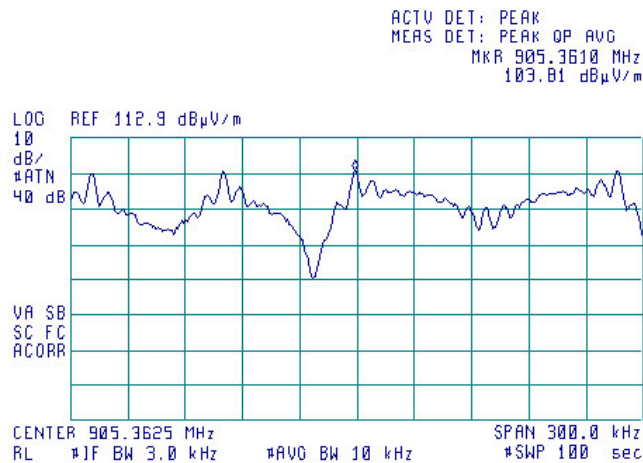





HERMON LABORATORIES

Test specification: Section 15.247(d), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date: 6/29/2010			
Temperature: 24.2 °C	Air Pressure: 1006 hPa	Relative Humidity: 46 %	Power Supply: 3.6 V battery
Remarks:			

Plot 7.4.5 Peak spectral power density at mid frequency within 6 dB band, PSK modulation

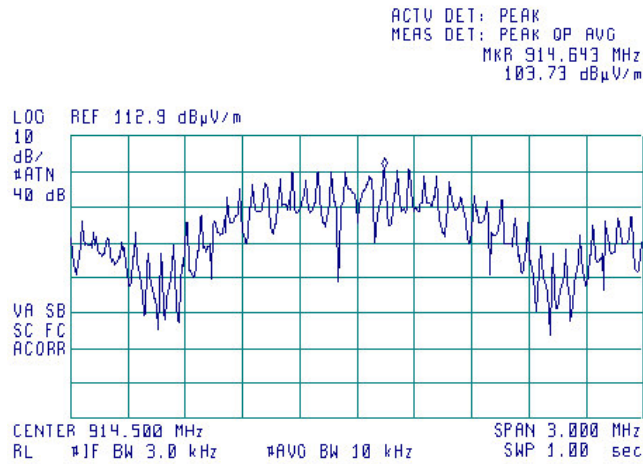

Plot 7.4.6 Peak spectral power density at mid frequency zoomed at the peak, PSK modulation

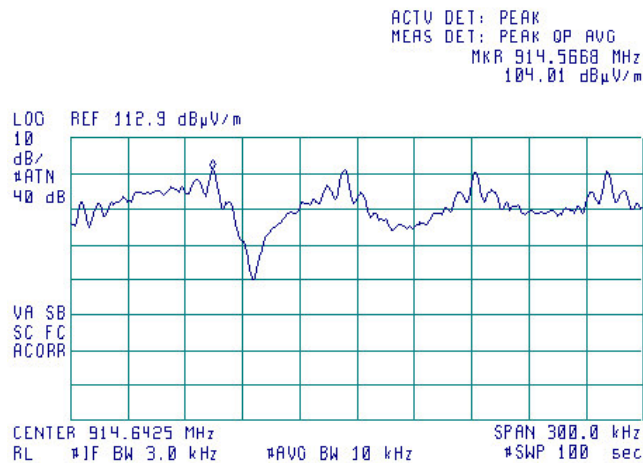





HERMON LABORATORIES

Test specification: Section 15.247(d), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance			Verdict: PASS
Date: 6/29/2010			
Temperature: 24.2 °C	Air Pressure: 1006 hPa	Relative Humidity: 46 %	Power Supply: 3.6 V battery
Remarks:			

Plot 7.4.7 Peak spectral power density at high frequency within 6 dB band, PSK modulation

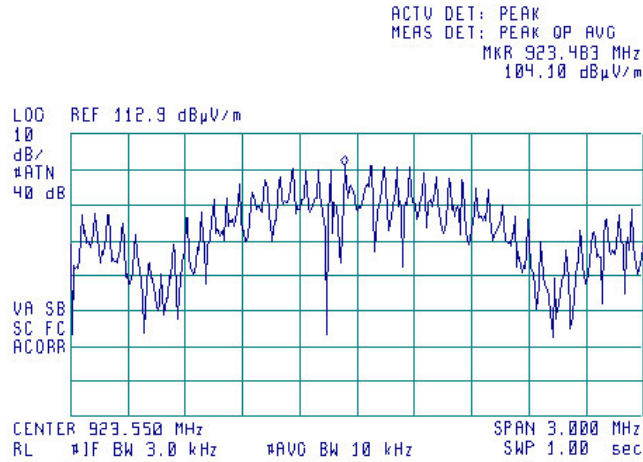

Plot 7.4.8 Peak spectral power density at high frequency zoomed at the peak, PSK modulation

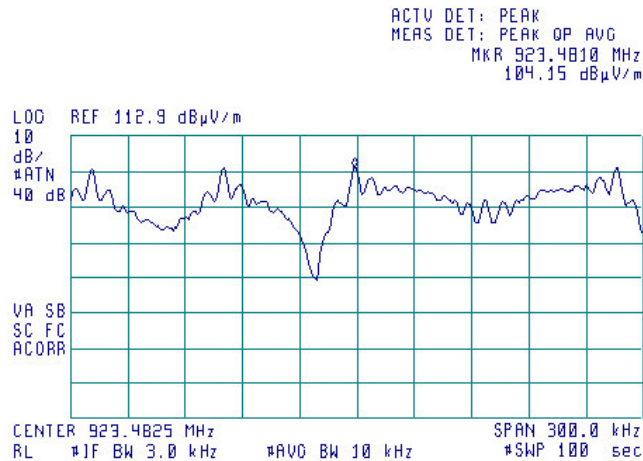





HERMON LABORATORIES

Test specification: Section 15.247(d), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date: 6/29/2010			
Temperature: 24.2 °C	Air Pressure: 1006 hPa	Relative Humidity: 46 %	Power Supply: 3.6 V battery
Remarks:			

Plot 7.4.9 Peak spectral power density at low frequency within 6 dB band, FSK modulation

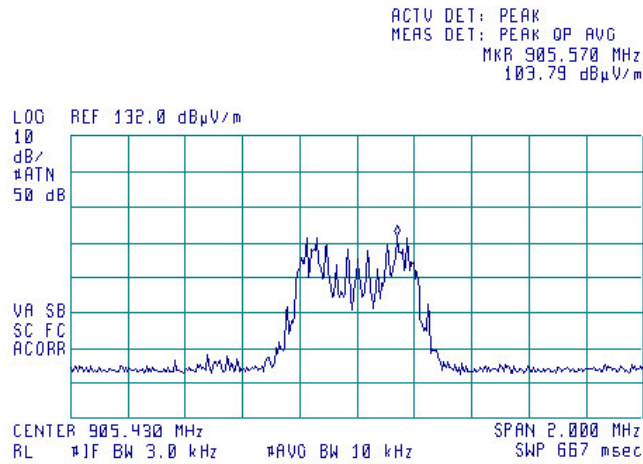

Plot 7.4.10 Peak spectral power density at low frequency zoomed at the peak, FSK modulation

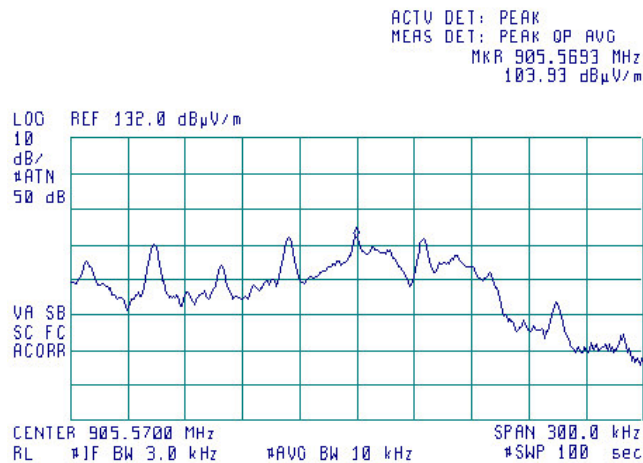





HERMON LABORATORIES

Test specification: Section 15.247(d), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance			Verdict: PASS
Date: 6/29/2010			
Temperature: 24.2 °C	Air Pressure: 1006 hPa	Relative Humidity: 46 %	Power Supply: 3.6 V battery
Remarks:			

Plot 7.4.11 Peak spectral power density at mid frequency within 6 dB band, FSK modulation

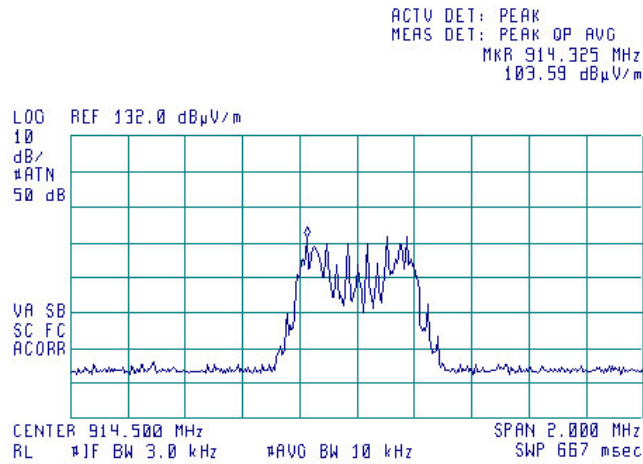

Plot 7.4.12 Peak spectral power density at mid frequency zoomed at the peak, FSK modulation

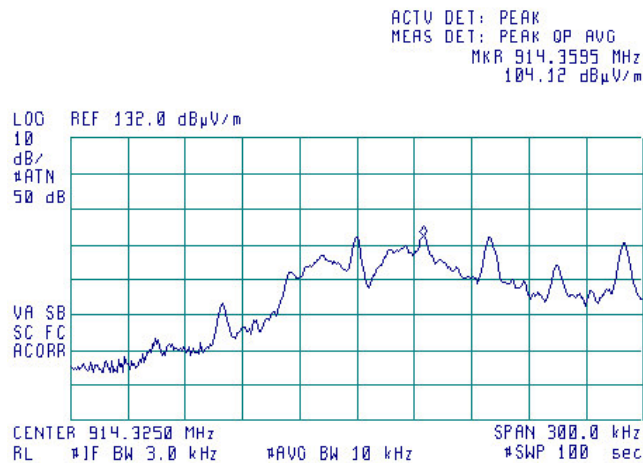





HERMON LABORATORIES

Test specification: Section 15.247(d), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance			Verdict: PASS
Date: 6/29/2010			
Temperature: 24.2 °C	Air Pressure: 1006 hPa	Relative Humidity: 46 %	Power Supply: 3.6 V battery
Remarks:			

Plot 7.4.13 Peak spectral power density at high frequency within 6 dB band, FSK modulation

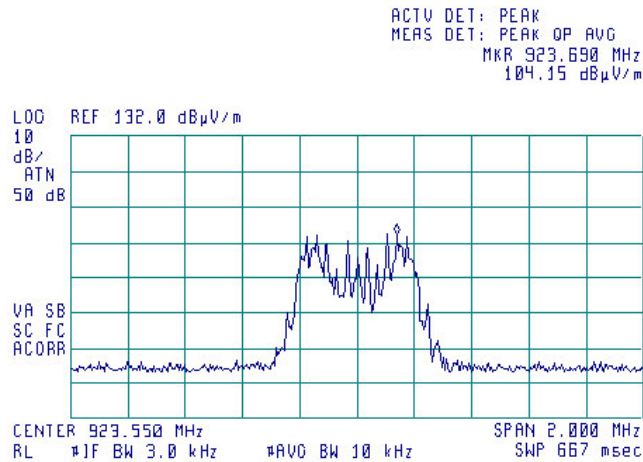

Plot 7.4.14 Peak spectral power density at high frequency zoomed at the peak, FSK modulation

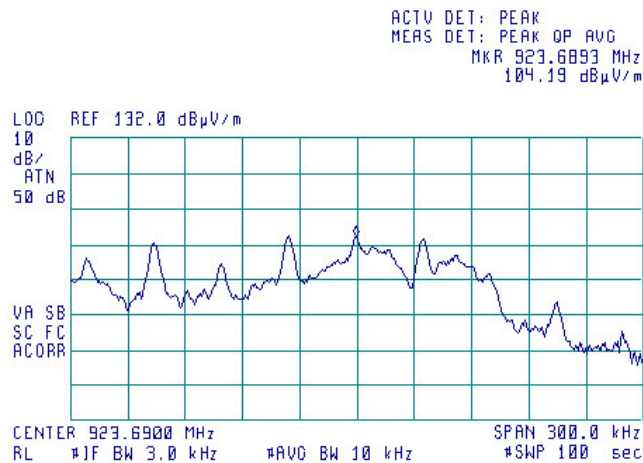

Test specification: Section 15.203, Antenna requirement	
Test procedure:	Visual inspection
Test mode:	Compliance
Date:	7/12/2010
Temperature: 25°C	Air Pressure: 1014 hPa
Verdict: PASS	
	Relative Humidity: 53 %
	Power Supply: 3.6 V battery
Remarks:	

7.5 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.5.1.

Table 7.5.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/28/2010			
Temperature: 24.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 3.6 V battery
Remarks:			

8 Emission tests according to 47CFR part 15 subpart B requirements

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1.

Table 8.1.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $Lim_{S_2} = Lim_{S_1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

8.1.2 Test procedure for measurements in semi-anechoic chamber


8.1.2.1 The EUT was set up as shown in Figure 8.1.1, energized and the performance check was conducted.

8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.2 and shown in the associated plots.

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date: 6/28/2010			
Temperature: 24.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 3.6 V battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

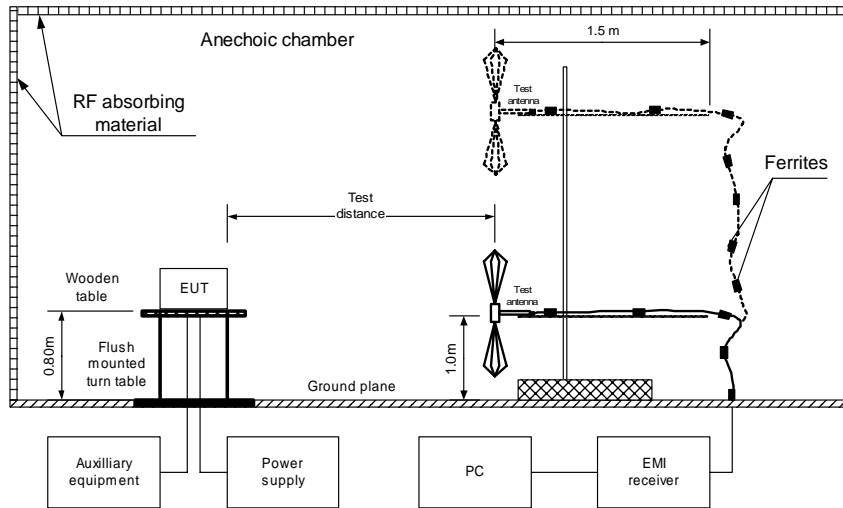



Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance	Verdict: PASS		
Date: 6/28/2010			
Temperature: 24.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 3.6 V battery
Remarks:			

Table 8.1.2 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found								Pass

TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / AVERAGE
FREQUENCY RANGE: 1000 – 10000 MHz
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
No emissions were found										Pass

*- Margin = Measured emission - specification limit.
**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 2432	HL 2871	HL 3616	HL 3818	HL 3883	
---------	---------	---------	---------	---------	---------	---------	--

Full description is given in Appendix A.





HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date: 6/28/2010			
Temperature: 24.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 3.6 V battery
Remarks:			

Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range

TEST SITE:
LIMIT:
TEST DISTANCE:
EUT OPERATING MODE:
ANTENNA POLARIZATION: Vertical

Semi anechoic chamber
Class B
3 m
Receive / Stand-by
ANTENNA POLARIZATION: Horizontal

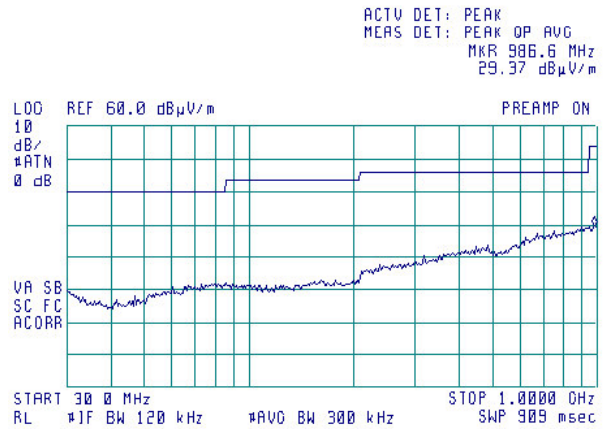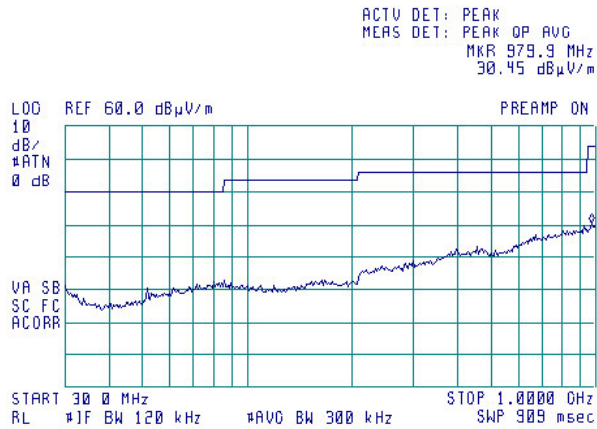



HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date: 6/28/2010			
Temperature: 24.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 3.6 V battery
Remarks:			

Plot 8.1.2 Radiated emission measurements in 1000 - 2900 MHz range

TEST SITE:

Semi anechoic chamber

LIMIT:

Class B

TEST DISTANCE:

3 m

EUT OPERATING MODE:



Receive / Stand-by

DETECTOR:

Peak

ANTENNA POLARIZATION: Vertical

ANTENNA POLARIZATION: Horizontal

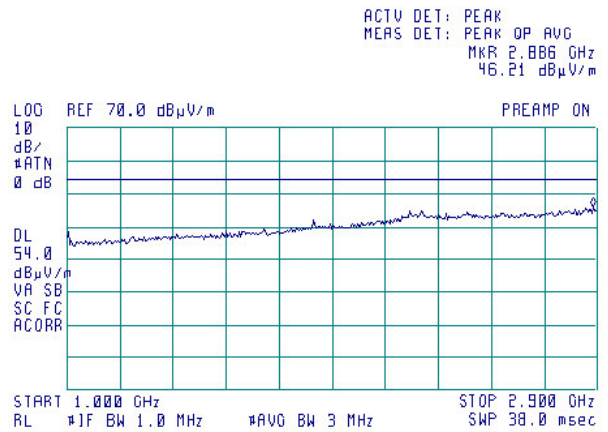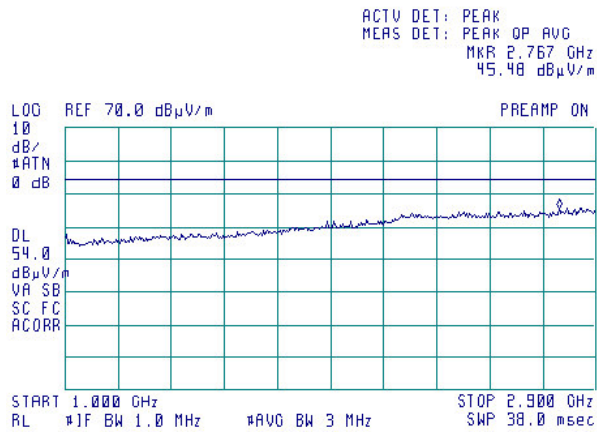



HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date: 6/28/2010			
Temperature: 24.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 3.6 V battery
Remarks:			

Plot 8.1.3 Radiated emission measurements in 1000 - 2900 MHz range

TEST SITE:

Semi anechoic chamber

LIMIT:

Class B

TEST DISTANCE:

3 m

EUT OPERATING MODE:



Receive / Stand-by

DETECTOR:

Average

ANTENNA POLARIZATION: Vertical

ANTENNA POLARIZATION: Horizontal

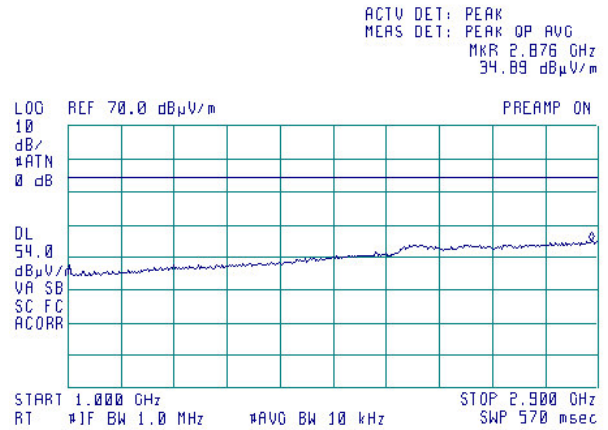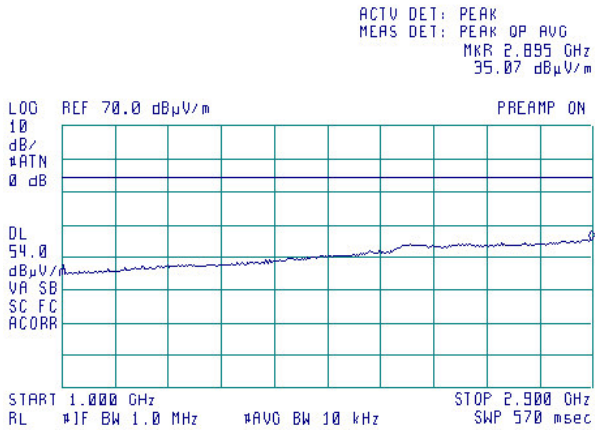



HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance			Verdict: PASS
Date: 6/28/2010			
Temperature: 24.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 3.6 V battery
Remarks:			

Plot 8.1.4 Radiated emission measurements in 2900 - 6500 MHz range

TEST SITE:

Semi anechoic chamber

LIMIT:

Class B

TEST DISTANCE:

3 m

EUT OPERATING MODE:



Receive / Stand-by

DETECTOR:

Peak

ANTENNA POLARIZATION: Vertical

ANTENNA POLARIZATION: Horizontal

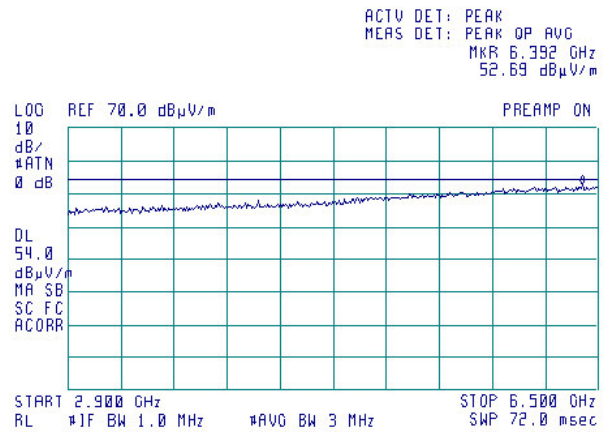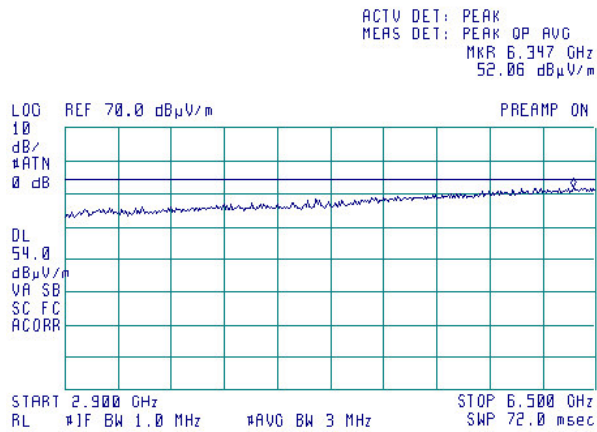



HERMON LABORATORIES

Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date: 6/28/2010			
Temperature: 24.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 3.6 V battery
Remarks:			



Plot 8.1.5 Radiated emission measurements in 2900 - 6500 MHz range

TEST SITE:
LIMIT:
TEST DISTANCE:
EUT OPERATING MODE:
DETECTOR:

Semi anechoic chamber
Class B
3 m
Receive / Stand-by
Average

ANTENNA POLARIZATION: Vertical

ANTENNA POLARIZATION: Horizontal

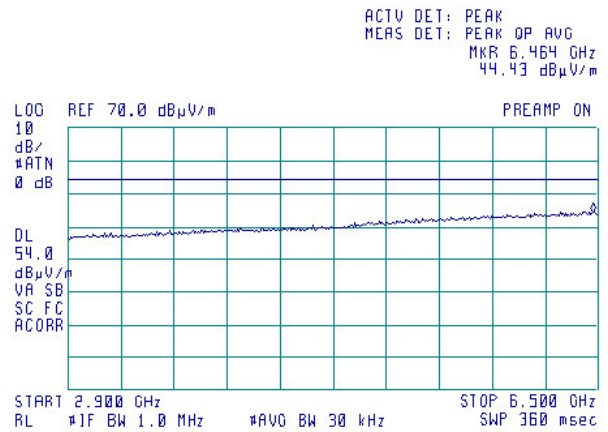
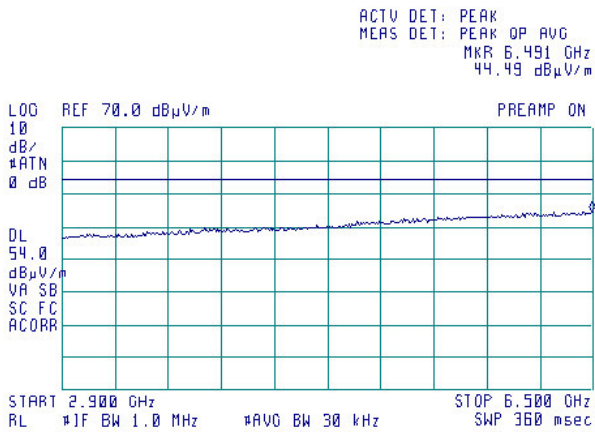


Test specification: Section 15.109, Radiated emission			
Test procedure: ANSI C63.4, Sections 11.6 and 12.1.4			
Test mode: Compliance		Verdict: PASS	
Date: 6/28/2010			
Temperature: 24.3 °C	Air Pressure: 1008 hPa	Relative Humidity: 42 %	Power Supply: 3.6 V battery
Remarks:			

Plot 8.1.6 Radiated emission measurements in 6500 - 10000 MHz range

TEST SITE:
LIMIT:
TEST DISTANCE:
EUT OPERATING MODE:
DETECTOR:



Semi anechoic chamber
Class B
3 m
Receive / Stand-by
Peak

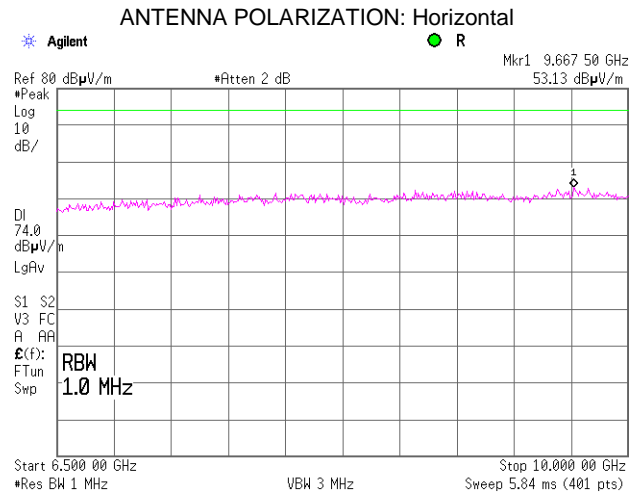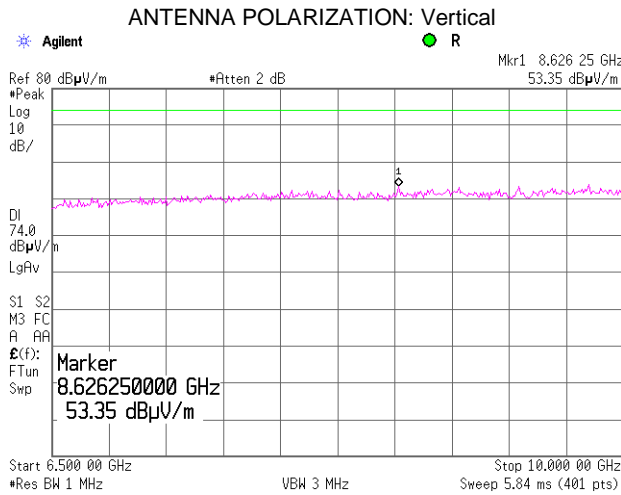

Plot 8.1.7 Radiated emission measurements in 6500 - 10000 MHz range

TEST SITE:
LIMIT:
TEST DISTANCE:
EUT OPERATING MODE:
DETECTOR:

Semi anechoic chamber
Class B
3 m
Receive / Stand-by
Average

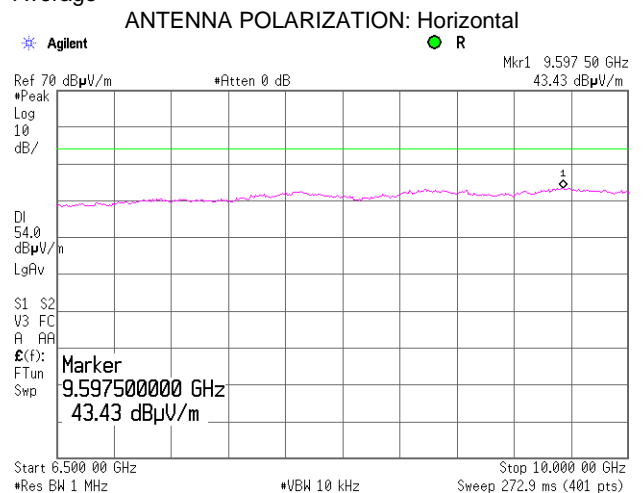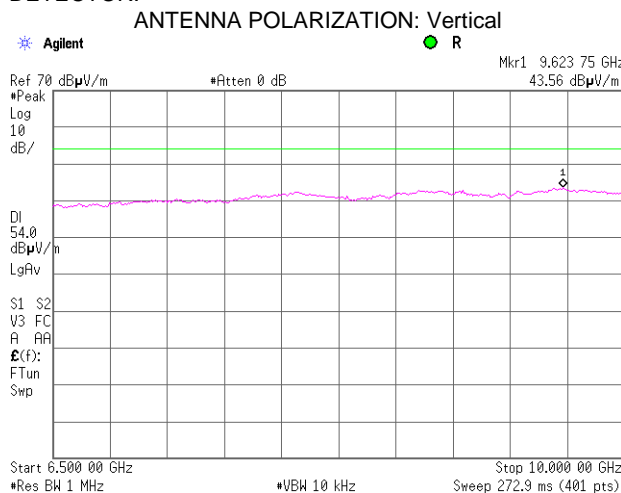

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	29-Jun-10	29-Jun-11
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Aug-09	27-Aug-10
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-10	11-Jan-11
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	11-Jun-10	11-Jun-11
2870	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-9155-00	2870	17-Sep-09	17-Sep-10
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	15-Sep-09	15-Sep-10
3342	High Pass Filter, 50 Ohm, 2000 to 5200 MHz.	Mini-Circuits	VHF-1910+	NA	05-Oct-09	05-Oct-10
3344	High Pass Filter, 50 Ohm, 3400 to 9900 MHz.	Mini-Circuits	VHF-3100+	NA	05-Oct-09	05-Oct-10
3616	Cable RF, 6.5 m, N type-N type, DC-6.5 GHz	Suhner Switzerland	Rg 214/U	NA	27-May-10	27-May-11
3622	Cable RF, 6.0 m, N type-N type, DC-6.5 GHz	Alpha Wire	RG 214/U	NA	27-May-10	27-May-11
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	25-Sep-09	25-Sep-10
3883	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out	Agilent Technologies	87405C	MY470104 06	13-Jan-10	13-Jan-11

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2009	Radio Frequency Devices.
FR Vol.62	Federal Register, Volume 62, May 13, 1997
FCC New Guidance:2004	FCC New Guidance on Measurements for DTS
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

13 APPENDIX E Test equipment correction factors

Antenna Factor
Active Loop Antenna
EMC Test Systems, model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic Antenna Factor, dB(S/m)	Electric Antenna Factor, dB(1/m)
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.7
0.750	-41.9	9.6
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.1
4.000	-41.4	10.1
5.000	-41.5	10.0
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(S/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ A/m).
Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

**Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL 2432**

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-9155-00,
HL 2870

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	5750	2.49	12000	3.71
30	0.17	6000	2.53	12250	3.81
100	0.32	6250	2.58	12500	3.84
250	0.49	6500	2.64	12750	3.88
500	0.70	6750	2.69	13000	3.92
750	0.86	7000	2.75	13250	3.96
1000	1.00	7250	2.80	13500	3.98
1250	1.11	7500	2.87	13750	4.01
1500	1.23	7750	2.93	14000	4.03
1750	1.34	8000	2.94	14250	4.09
2000	1.41	8250	3.00	14500	4.08
2250	1.51	8500	3.04	14750	4.10
2500	1.59	8750	3.08	15000	4.15
2750	1.68	9000	3.14	15250	4.22
3000	1.76	9250	3.16	15500	4.31
3250	1.83	9500	3.22	15750	4.42
3500	1.91	9750	3.26	16000	4.48
3750	1.97	10000	3.36	16250	4.54
4000	2.05	10250	3.41	16500	4.56
4250	2.11	10500	3.46	16750	4.57
4500	2.18	10750	3.50	17000	4.59
4750	2.24	11000	3.54	17250	4.66
5000	2.30	11250	3.58	17500	4.70
5250	2.36	11500	3.63	17750	4.76
5500	2.43	11750	3.66	18000	4.72

Cable loss
Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

Cable loss
Cable coaxial, RG-214/U, N type-N type, 6.5 m
Suhner Switzerland, HL 3616

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	1750	2.66	3550	4.44	5350	6.08
30	0.25	1800	2.72	3600	4.46	5400	6.12
50	0.32	1850	2.78	3650	4.59	5450	6.17
100	0.48	1900	2.81	3700	4.60	5500	6.25
150	0.60	1950	2.86	3750	4.72	5550	6.31
200	0.71	2000	2.94	3800	4.72	5600	6.35
250	0.81	2050	2.97	3850	4.86	5650	6.41
300	0.91	2100	3.01	3900	4.85	5700	6.50
350	1.00	2150	3.06	3950	4.99	5750	6.52
400	1.07	2200	3.11	4000	4.90	5800	6.57
450	1.14	2250	3.16	4050	5.04	5850	6.61
500	1.23	2300	3.21	4100	5.01	5900	6.71
550	1.30	2350	3.26	4150	5.10	5950	6.70
600	1.37	2400	3.31	4200	5.08	6000	6.75
650	1.44	2450	3.35	4250	5.18	6050	6.74
700	1.50	2500	3.39	4300	5.14	6100	6.84
750	1.58	2550	3.46	4350	5.22	6150	6.87
800	1.64	2600	3.48	4400	5.21	6200	6.93
850	1.69	2650	3.55	4450	5.29	6250	6.96
900	1.77	2700	3.59	4500	5.31	6300	7.02
950	1.79	2750	3.66	4550	5.39	6350	7.04
1000	1.87	2800	3.68	4600	5.41	6400	7.10
1050	1.92	2850	3.75	4650	5.49	6450	7.11
1100	1.98	2900	3.79	4700	5.52	6500	7.19
1150	2.05	2950	3.86	4750	5.60		
1200	2.09	3000	3.89	4800	5.64		
1250	2.15	3050	3.94	4850	5.73		
1300	2.21	3100	3.98	4900	5.70		
1350	2.27	3150	4.03	4950	5.73		
1400	2.33	3200	4.06	5000	5.75		
1450	2.38	3250	4.12	5050	5.83		
1500	2.44	3300	4.14	5100	5.82		
1550	2.48	3350	4.22	5150	5.91		
1600	2.52	3400	4.24	5200	5.92		
1650	2.56	3450	4.31	5250	5.98		
1700	2.62	3500	4.35	5300	6.01		

Cable loss
Cable coaxial, RG-214/U, N type-N type, 6 m
Alpha Wire, HL 3622

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.13	2100	2.95	4400	4.99
30	0.24	2200	2.99	4500	5.00
50	0.32	2300	3.11	4600	5.17
100	0.47	2400	3.16	4700	5.18
200	0.70	2500	3.31	4800	5.33
300	0.88	2600	3.36	4900	5.34
400	1.05	2700	3.46	5000	5.50
500	1.21	2800	3.52	5100	5.56
600	1.36	2900	3.65	5200	5.76
700	1.49	3000	3.70	5300	5.76
800	1.63	3100	3.82	5400	5.85
900	1.72	3200	3.88	5500	5.88
1000	1.84	3300	3.99	5600	5.96
1100	1.96	3400	4.08	5700	6.02
1200	2.06	3500	4.19	5800	6.06
1300	2.15	3600	4.28	5900	6.14
1400	2.28	3700	4.42	6000	6.17
1500	2.35	3800	4.40	6100	6.28
1600	2.43	3900	4.51	6200	6.36
1700	2.57	4000	4.62	6300	6.47
1800	2.62	4100	4.70	6400	6.51
1900	2.75	4200	4.78	6500	6.65
2000	2.80	4300	4.83		

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
CBW	channel bandwidth
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
DC	direct current
EBW	emission bandwidth
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
QP	quasi-peak
PM	pulse modulation
PS	power supply
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
VA	volt-ampere

END OF DOCUMENT