

# TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 and subpart B

FOR:

**Telematics Wireless Ltd.**

**Water meter**

**Model: ETMW-LCD**

This report is in conformity with ISO/IEC 17025. The A2LA logo endorsement applies only to the test methods and the standards that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information.....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Changes made in the EUT .....	5
6.3	Test configuration.....	5
6.4	Transmitter characteristics .....	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements .....	7
7.1	Minimum 6 dB bandwidth.....	7
7.2	Peak output power .....	11
7.3	Field strength of spurious emissions .....	16
7.4	Peak spectral power density .....	63
7.5	Radiated emission measurements .....	70
8	APPENDIX A Test equipment and ancillaries used for tests.....	74
9	APPENDIX B Measurement uncertainties.....	75
10	APPENDIX C Test facility description .....	76
11	APPENDIX D Specification references .....	76
12	APPENDIX E Abbreviations and acronyms.....	77
13	APPENDIX F Test equipment correction factors.....	78

## 1 Applicant information

**Client name:** Telematics Wireless Ltd.  
**Address:** 26 Hamelaha, POB 1911, Holon, 58117, Israel  
**Telephone:** +972 3557 5767  
**Fax:** +972 3557 5753  
**E-mail:** slavas@tadiran-telematics.com  
**Contact name:** Mr. Slava Snitkovsky

## 2 Equipment under test attributes

**Product name:** Water meter  
**Product type:** Transceiver  
**Model(s):** ETMW-LCD  
**Serial number:** 11215208  
**Receipt date** 5/18/2006

## 3 Manufacturer information

**Manufacturer name:** Telematics Wireless Ltd.  
**Address:** 26 Hamelaha, POB 1911, Holon, 58117, Israel  
**Telephone:** +972 3557 5767  
**Fax:** +972 3557 5753  
**E-Mail:** slavas@tadiran-telematics.com  
**Contact name:** Mr. Slava Snitkovsky

## 4 Test details




**Project ID:** 17136  
**Location:** Hermon Laboratories Ltd. P.O.Box 23, Binyamina 30500, Israel  
**Test started:** 5/18/2006  
**Test completed:** 5/30/2006  
**Test specification(s):** FCC 47CFR part 15:2005, subpart C §§15.247, 15.209, subpart B § 15.109  
**Test suite:** FCC\_15.247\_DTS\_without\_RF\_connector (5/3/2004 5:43:35 PM, modified)

## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
Section 15.247(a)2, 6 dB bandwidth	Pass
Section 15.247(b)3, Peak output power	Pass
Section 15.247(e)(i), RF exposure	Pass, the exhibit to the application of certification is provided
Section 15.247(c), Radiated spurious emissions	Pass
Section 15.247(d), Peak power density	Pass
Section 15.207(a), Conducted emission	Not required
<b>Unintentional emissions</b>	
Section 15.107, Conducted emission at AC power port	Not required
Section 15.109, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested.  
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

**This test report replaces the previously issued test report identified by Doc ID: TELRAD\_FCC.17136\_rev1.**

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. A. Lane, test engineer	May 30, 2006	
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	June 6, 2006	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and Radio group leader	June 7, 2006	

## 6 EUT description

### 6.1 General information

The EUT, ETMW- LCD, is actually a water odometer, offering Automatic Meter Reading – AMR. The device is a 2-Way RF communicator built-in water meter.

The EUT consists of the following units: RF transmitter & receiver with integral antenna and a microcontroller plus simple digital logic, which control the operational modes of the unit. The meter readings are displayed on an internal LCD unit and are transmitted by its RF part to a collecting unit. In addition the specific parameters can be programmed via the RF link.

The EUT is powered from 3.6 VDC supplied by two lithium internal batteries.

### 6.2 Changes made in the EUT

No changes were implemented.

### 6.3 Test configuration



## 6.4 Transmitter characteristics

<b>Type of equipment</b>						
	Stand-alone (Equipment with or without its own control provisions)					
X	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
<b>Intended use</b>		<b>Condition of use</b>				
	fixed	Always at a distance more than 2 m from all people				
X	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
<b>Assigned frequency range</b>		902 - 928 MHz				
<b>Operating frequency range</b>		905.43 – 923.55 MHz (PSK modulation), 916.3 MHz (FSK modulation)				
<b>RF channel spacing</b>		3.62 MHz				
<b>Maximum rated output power</b>		At transmitter 50 $\Omega$ RF output connector			dBm	
		Equivalent isotropically radiated power (for equipment with no RF connector)			19.20 dBm (FSK) 21.91 dBm (PSK)	
<b>Is transmitter output power variable?</b>		No				
		X	Yes	continuous variable		
				stepped variable with stepsize		dB
				minimum RF power		dBm
maximum RF power		dBm				
<b>Antenna connection</b>						
unique coupling		standard connector		X	integral	
				X	with temporary RF connector without temporary RF connector	
<b>Antenna/s technical characteristics</b>						
<b>Type</b>		<b>Manufacturer</b>		<b>Model number</b>		
Integral		Telematics Wireless		Printed inverted F antenna		
				Gain		
				3 dBi		
<b>Transmitter aggregate data rate/s</b>		60 kbps (PSK modulated), 120 kbps (FSK modulated)				
<b>Transmitter aggregate symbol (baud) rate/s</b>		0.9 Msymbols per second (MBaud) (PSK modulated)				
<b>Type of modulation</b>		PSK, FSK				
<b>Modulating test signal (baseband)</b>		PRBS				
<b>Maximum transmitter duty cycle in normal use</b>		0.10 %				
<b>Transmitter duty cycle supplied for test</b>		44 % (PSK)				
		34 % (FSK)				
<b>Transmitter power source</b>						
X	Battery	<b>Nominal rated voltage</b>	3.6 VDC	<b>Battery type</b>	Lithium	
	DC	<b>Nominal rated voltage</b>	VDC			
	AC mains	<b>Nominal rated voltage</b>	VAC	<b>Frequency</b>	Hz	
<b>Common power source for transmitter and receiver</b>				X	yes	no

<b>Test specification:</b>	<b>Section 15.247(a)2, 6 dB bandwidth</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(a)2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 10:41:22 AM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 15 subpart C requirements

### 7.1 Minimum 6 dB bandwidth

#### 7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0

\* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

#### 7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 The 6 dB bandwidth test setup



<b>Test specification:</b>		<b>Section 15.247(a)2, 6 dB bandwidth</b>	
<b>Test procedure:</b>		FR Vol.62, page 26243, Section 15.247(a)2	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	5/21/2006 10:41:22 AM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Table 7.1.2 The 6 dB bandwidth test results**

ASSIGNED FREQUENCY BAND: 902 - 928 MHz  
DETECTOR USED: Peak  
SWEEP MODE: Single  
SWEEP TIME: Auto  
RESOLUTION BANDWIDTH: 100 kHz  
VIDEO BANDWIDTH: 300 kHz  
MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc

MODULATION: PSK  
MODULATING SIGNAL: PRBS  
BIT RATE: 60 kBps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency				
905.437	983	500.0	483	Pass
Mid frequency				
916.300	977	500.0	477	Pass
High frequency				
923.546	940	500.0	440	Pass

MODULATION: FSK  
MODULATING SIGNAL: PRBS  
BIT RATE: 120 kBps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Mid frequency				
916.300	860	500.0	360	Pass

**Reference numbers of test equipment used**


HL 2660							
---------	--	--	--	--	--	--	--

Full description is given in Appendix A.




<b>Test specification:</b>	<b>Section 15.247(a)2, 6 dB bandwidth</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(a)2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 10:41:22 AM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Plot 7.1.1 The 6 dB bandwidth test result at low frequency, PSK modulation**

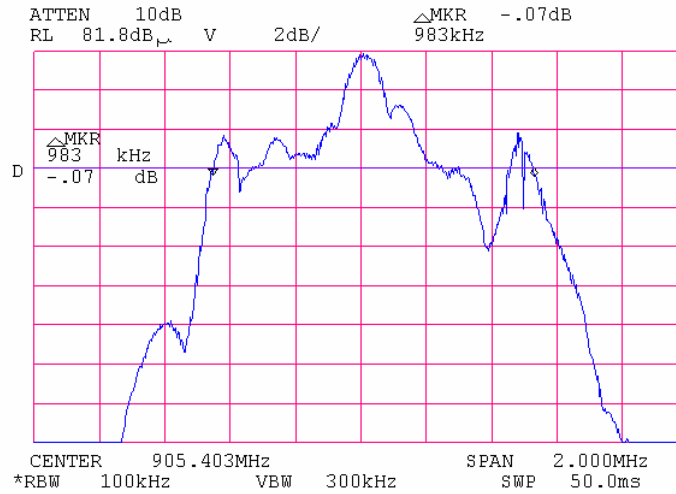


**Plot 7.1.2 The 6 dB bandwidth test result at mid frequency, PSK modulation**

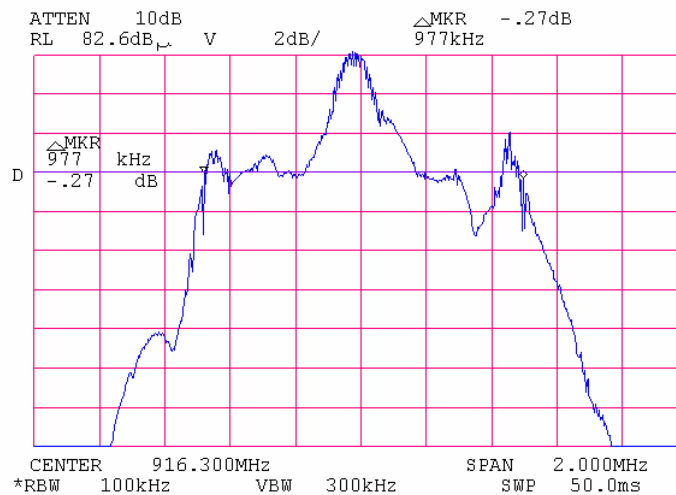


<b>Test specification:</b>	<b>Section 15.247(a)2, 6 dB bandwidth</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(a)2		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 10:41:22 AM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Plot 7.1.3 The 6 dB bandwidth test result at high frequency, PSK modulation**

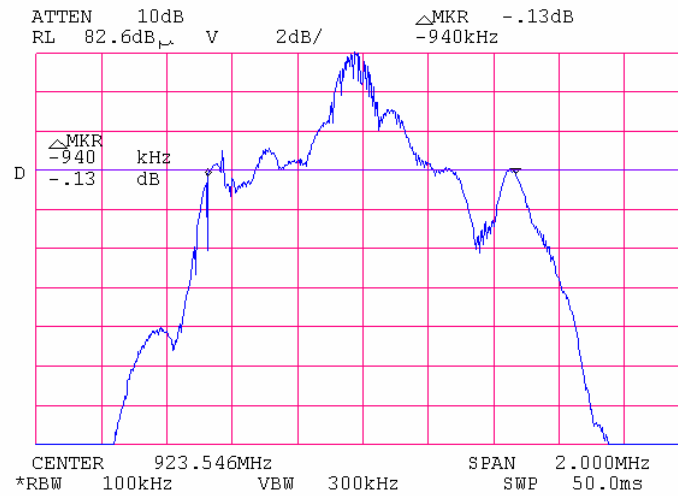

**Plot 7.1.4 The 6 dB bandwidth test result at mid frequency, FSK modulation**

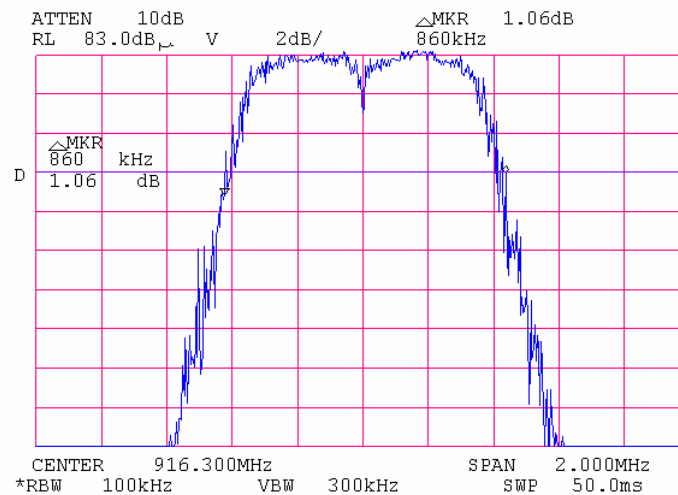

<b>Test specification:</b>		<b>Section 15.247(b)3, Peak output power</b>	
<b>Test procedure:</b>		FR Vol.62, page 26243, Section 15.247(b)	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	5/18/2006 10:40:48 AM		
<b>Temperature:</b> 22 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

## 7.2 Peak output power

### 7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2

\*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

\*\* - Equivalent field strength limit was calculated from the peak output power as follows:  $E = \sqrt{30 \times P \times G} / r$ , where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

### 7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.


The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.

<b>Test specification:</b>	<b>Section 15.247(b)3, Peak output power</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(b)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/18/2006 10:40:48 AM		
<b>Temperature:</b> 22 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Figure 7.2.1 Setup for carrier field strength measurements

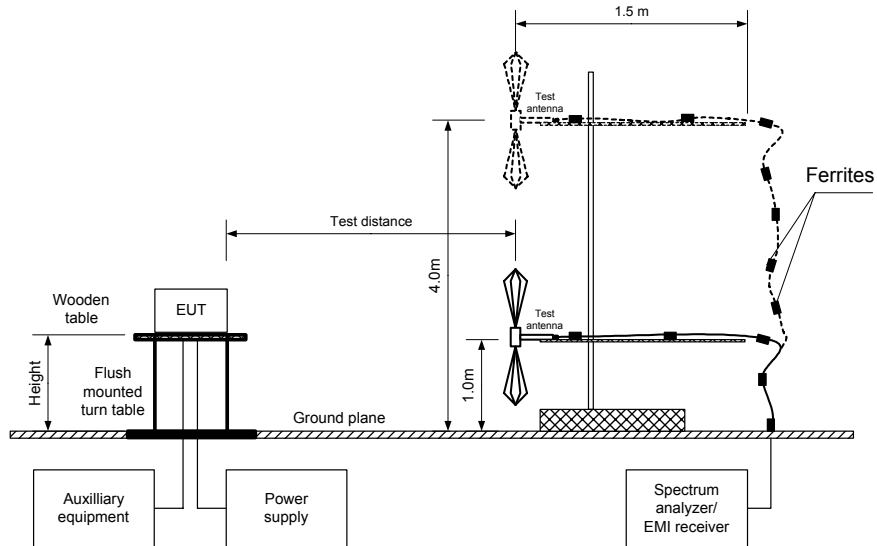

<b>Test specification:</b>		<b>Section 15.247(b)3, Peak output power</b>	
<b>Test procedure:</b> FR Vol.62, page 26243, Section 15.247(b)			
<b>Test mode:</b>	Compliance	<b>Verdict:</b> PASS	
<b>Date &amp; Time:</b>	5/18/2006 10:40:48 AM		
<b>Temperature:</b> 22 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Table 7.2.2 Peak output power test results**

ASSIGNED FREQUENCY: 902 - 928 MHz  
 TEST DISTANCE: 3 m  
 TEST SITE: Semi anechoic chamber  
 EUT HEIGHT: 0.8 m  
 DETECTOR USED: Peak  
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 3.0 MHz  
 VIDEO BANDWIDTH: 3.0 MHz

EUT 6 dB BANDWIDTH: 0.983 MHz  
 MODULATION: PSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 60 kBps

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
905.4375	117.14	Vertical	1.0	165	3	18.91	30	-11.09	Pass
916.3000	116.78	Vertical	1.0	170	3	18.55	30	-11.45	Pass
923.5462	115.90	Vertical	1.0	170	3	17.67	30	-12.33	Pass

EUT 6 dB BANDWIDTH: 0.86 MHz  
 MODULATION: FSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 120 kBps

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
916.3000	114.43	Vertical	1.0	170	3	16.20	30	-13.80	Pass

\*- EUT front panel refer to 0 degrees position of turntable.

\*\* - Peak output power was calculated from the field strength of carrier as follows:  $P = (E \times d)^2 / (30 \times G)$ , where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

\*\*\* - Margin = Peak output power – specification limit.


**Reference numbers of test equipment used**

HL 0521	HL 0589	HL 0592	HL 0593	HL 0594	HL 0604	HL 2009	
---------	---------	---------	---------	---------	---------	---------	--


Full description is given in Appendix A.

<b>Test specification:</b>	<b>Section 15.247(b)3, Peak output power</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(b)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/18/2006 10:40:48 AM		
<b>Temperature:</b> 22 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Plot 7.2.1 Field strength of carrier at low frequency, PSK modulation

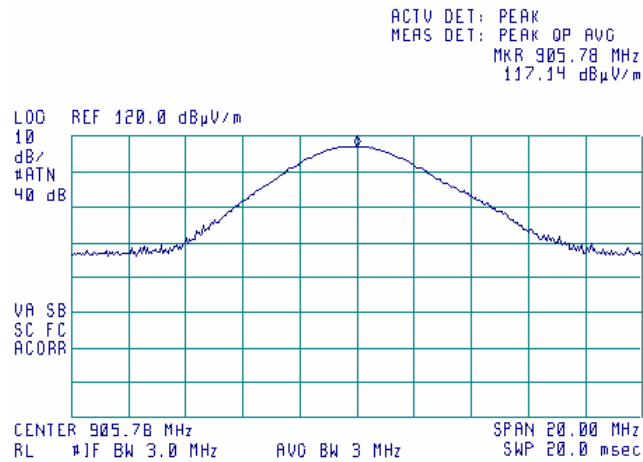


Plot 7.2.2 Field strength of carrier at mid frequency, PSK modulation

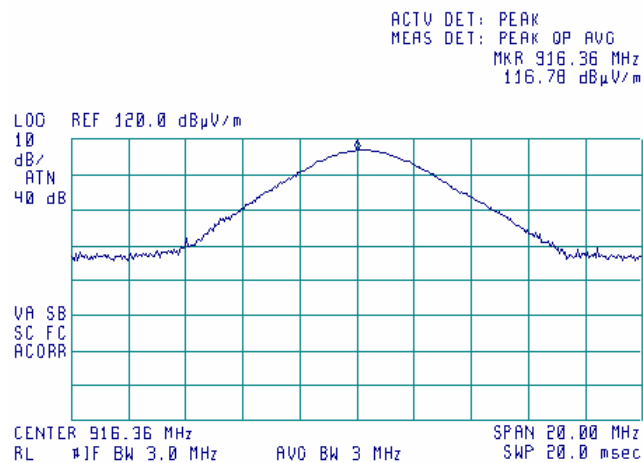


<b>Test specification:</b>	<b>Section 15.247(b)3, Peak output power</b>		
<b>Test procedure:</b>	FR Vol.62, page 26243, Section 15.247(b)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/18/2006 10:40:48 AM		
<b>Temperature:</b> 22 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Plot 7.2.3 Field strength of carrier at high frequency, PSK modulation

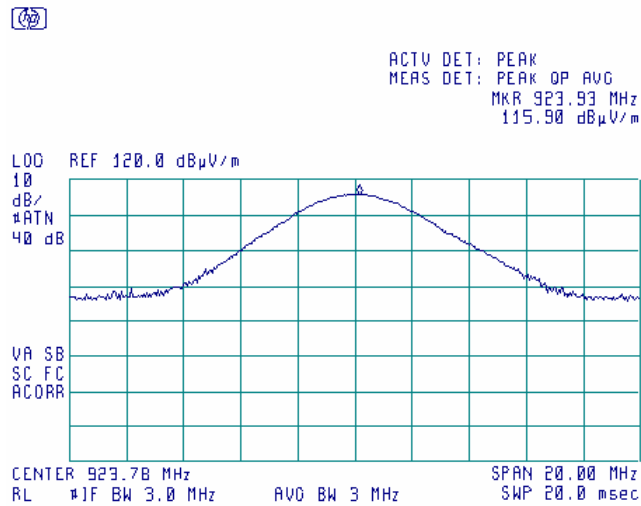

Plot 7.2.4 Field strength of carrier at mid frequency, FSK modulation

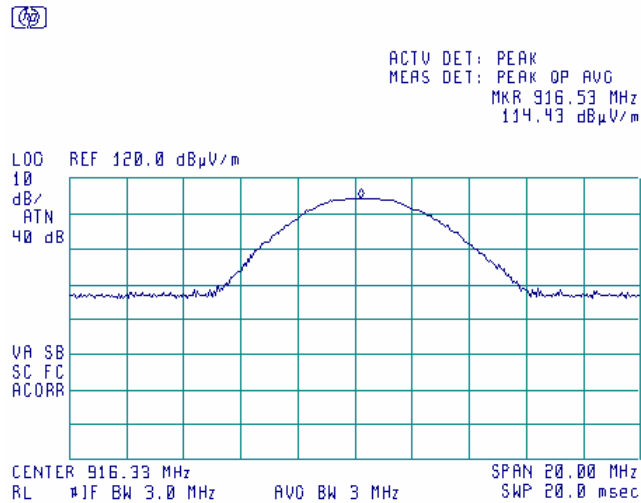

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

## 7.3 Field strength of spurious emissions

### 7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 – 1000		54.0		
1000 – 10 <sup>th</sup> harmonic	74.0	NA	54.0	

\*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:  

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log(S_1/S_2),$$

where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

\*\* - The limit decreases linearly with the logarithm of frequency.

\*\*\* - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

### 7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

### 7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz


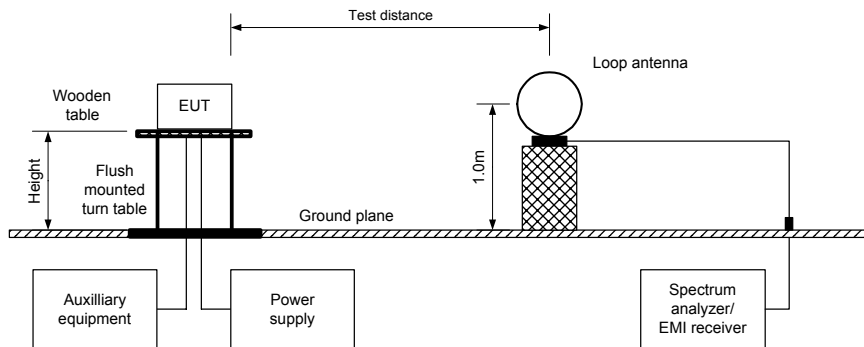


Figure 7.3.2 Setup for spurious emission field strength measurements above 30 MHz

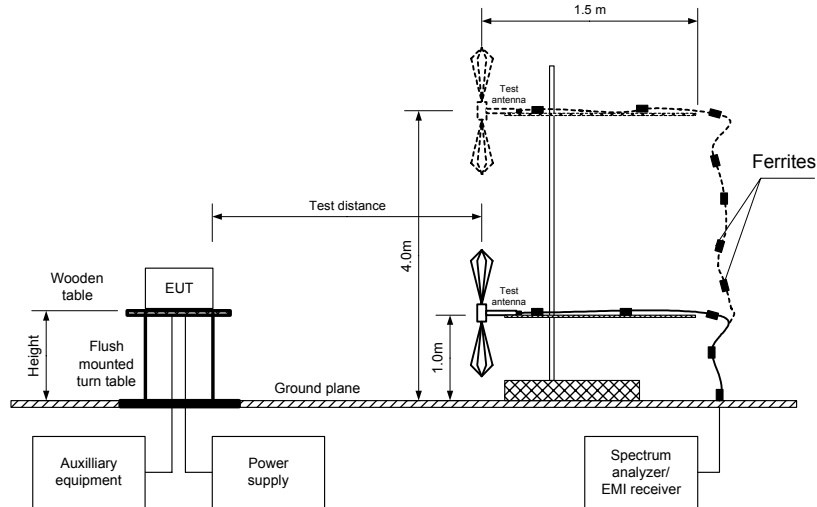

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Table 7.3.2 Field strength of emissions outside restricted bands**

ASSIGNED FREQUENCY: 902-928 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 9500 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: PSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 60 kbps  
 DUTY CYCLE: 44%  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 TRANSMITTER OUTPUT POWER: 18.91 dBm at low carrier frequency  
 18.55 dBm at mid carrier frequency  
 17.67 dBm at high carrier frequency

DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 100 kHz  
 VIDEO BANDWIDTH: 300 kHz  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconical (30 MHz – 200 MHz)  
 Log periodic (200 MHz – 1000 MHz)  
 Biconilog (30 MHz – 1000 MHz)  
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
<b>Low carrier frequency</b>									
All spurious are more than 20 dB below limit					115.56	>20	20.0	NA	Pass
<b>Mid carrier frequency</b>									
All spurious are more than 20 dB below limit					115.06	>20	20.0	NA	Pass
<b>High carrier frequency</b>									
All spurious are more than 20 dB below limit					113.03	>20	20.0	NA	Pass

MODULATION: FSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 120 kbps  
 DUTY CYCLE: 34%  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 TRANSMITTER OUTPUT POWER: 16.20 dBm at mid carrier frequency

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
<b>Mid carrier frequency</b>									
All spurious are more than 20 dB below limit					114.46	>20	20.0	NA	Pass

\*- EUT front panel refers to 0 degrees position of turntable.  
 \*\*- Margin = Attenuation below carrier – specification limit.

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands**

ASSIGNED FREQUENCY: 902-928 MHz  
 INVESTIGATED FREQUENCY RANGE: 1000 -9500 MHz  
 TEST DISTANCE: 3 m  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 1000 kHz  
 TEST ANTENNA TYPE: Double ridged guide

MODULATION: PSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 60 kbps  
 DUTY CYCLE: 44%  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 TRANSMITTER OUTPUT POWER: 18.91 dBm at low carrier frequency  
 18.55 dBm at mid carrier frequency  
 17.67 dBm at high carrier frequency

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=300 Hz)				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
<b>Low carrier frequency</b>											
2716	V	1.4	270	56.00	74	-18.00	47.50	40.35	54.00	-13.65	Pass
3621	V	1.5	270	61.50	74	-12.50	45.33	38.28	54.00	-15.72	
4527	V	1.4	265	62.00	74	-12.00	37.17	30.02	54.00	-23.98	
<b>Mid carrier frequency</b>											
2748	V	1.4	260	51.83	74.00	-22.17	46.33	38.05	54.00	-15.95	Pass
3665	V	1.4	275	59.50	74.00	-14.50	44.17	35.89	54.00	-18.11	
4581	V	1.3	260	58.33	74.00	-15.67	37.17	30.02	54.00	-23.98	
<b>High carrier frequency</b>											
2770	V	1.5	270	56.50	74.0	-17.50	45.50	37.22	54.00	-16.78	Pass
3694	V	1.4	270	61.33	74.00	-12.67	49.67	41.39	54.00	-12.61	

Note: average factor = -7.15 dB

MODULATION: FSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 120 kbps  
 DUTY CYCLE: 34%  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 TRANSMITTER OUTPUT POWER: 16.20 dBm at mid carrier frequency

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=300Hz)				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
<b>Mid carrier frequency</b>											
2748	V	1.4	260	52.00	74.00	-22.00	45.50	36.08	54.00	-17.92	Pass
3665	V	1.4	275	60.67	74.00	-13.33	41.17	31.75	54.00	-22.25	
4581	V	1.3	260	55.83	74.00	-18.17	38.67	29.25	54.00	-24.75	

Note: average factor = -9.42 dB

\*- EUT front panel refers to 0 degrees position of turntable.  
 \*\*- Margin = Measured field strength - specification limit.  
 \*\*\*- Margin = Calculated field strength - specification limit,  
 where Calculated field strength = Measured field strength + average factor.

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Table 7.3.4 Average factor calculation PSK modulation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
4.3	9.8	200	1040	NA	-7.15

Average factor:  $20 \log (4.3/9.8) = -7.15$

Table 7.3.5 Average factor calculation FSK modulation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
3.6	10.65	225	1012.5	NA	-9.42

Average factor:  $20 \log (3.6/10.65) = -9.42$

\*- Average factor was calculated as follows

for pulse train shorter than 100 ms:  $Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{Train\ duration} \times Number\ of\ bursts\ within\ pulse\ train \right)$

for pulse train longer than 100 ms:  $Average\ factor = 20 \times \log_{10} \left( \frac{Pulse\ duration}{Pulse\ period} \times \frac{Burst\ duration}{100\ ms} \times Number\ of\ bursts\ within\ 100\ ms \right)$

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Table 7.3.6 Field strength of spurious emissions below 1 GHz within restricted bands**

ASSIGNED FREQUENCY: 902-928 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz  
 TEST DISTANCE: 3 m  
 MODULATION: FSK & PSK  
 MODULATING SIGNAL: PRBS  
 DUTY CYCLE: 9%  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum  
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)  
 9.0 kHz (150 kHz – 30 MHz)  
 120 kHz (30 MHz – 1000 MHz)  
 VIDEO BANDWIDTH: > Resolution bandwidth

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict***
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
<b>Low carrier frequency</b>								
All spurious are at least 20 dB below limit								
<b>Mid carrier frequency</b>								
All spurious are at least 20 dB below limit								
<b>High carrier frequency</b>								
All spurious are at least 20 dB below limit								

\*- Margin = Measured emission - specification limit.

\*\* - EUT front panel refer to 0 degrees position of turntable.

\*\*\*Verdict: Pass

**Table 7.3.7 Restricted bands**

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

**Reference numbers of test equipment used**


HL 0446	HL 0465	HL 0521	HL 0589	HL 0592	HL 0593	HL 0594	HL 0604
HL 1200	HL 2259	HL 2432	HL 2660				

Full description is given in Appendix A.

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.1 Radiated emission measurements at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical  
 MODULATION: PSK

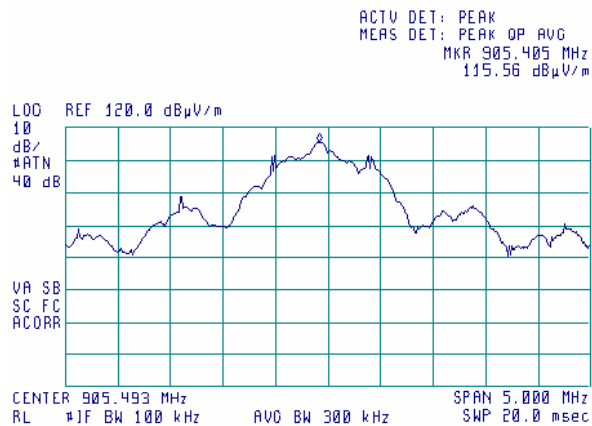

**Plot 7.3.2 Radiated emission measurements at the low carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: horizontal  
 MODULATION: PSK

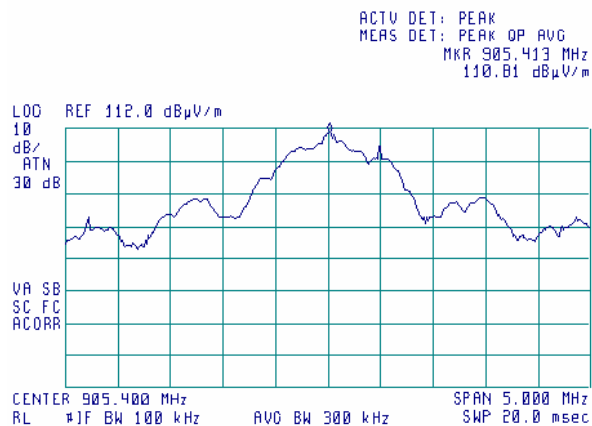

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.3 Radiated emission measurements at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical  
 MODULATION: PSK

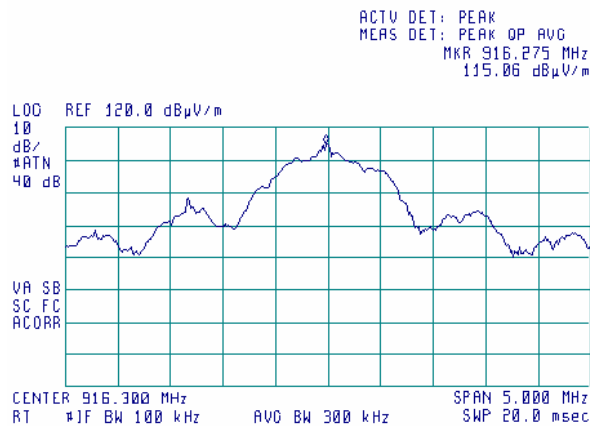

**Plot 7.3.4 Radiated emission measurements at the mid carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: horizontal  
 MODULATION: PSK

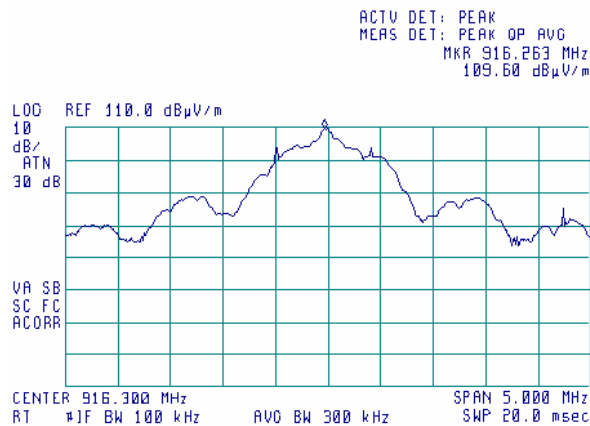

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.5 Radiated emission measurements at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical  
 MODULATION: FSK

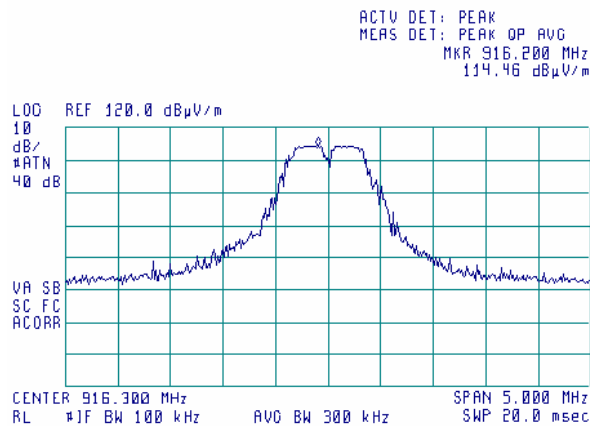

**Plot 7.3.6 Radiated emission measurements at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: horizontal  
 MODULATION: FSK

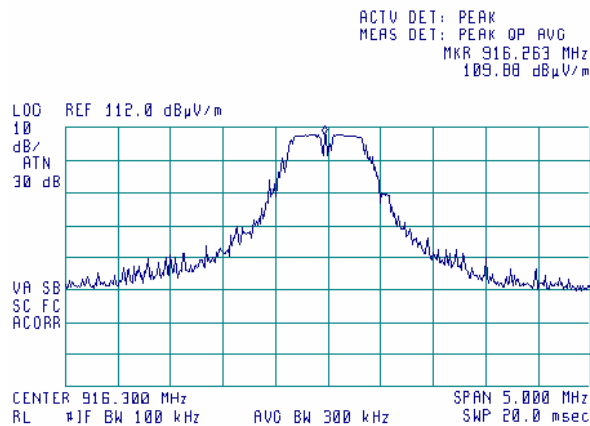




<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.7 Radiated emission measurements at the high carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical  
 MODULATION: PSK

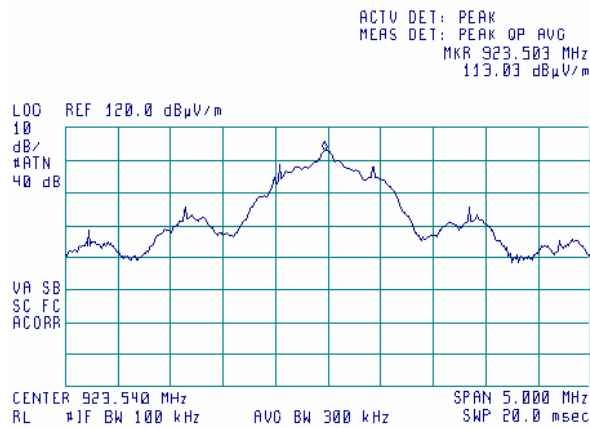

**Plot 7.3.8 Radiated emission measurements at the high carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: horizontal  
 MODULATION: PSK

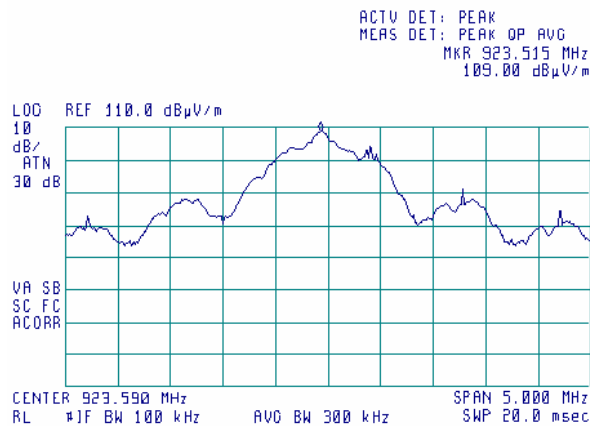

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.9 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

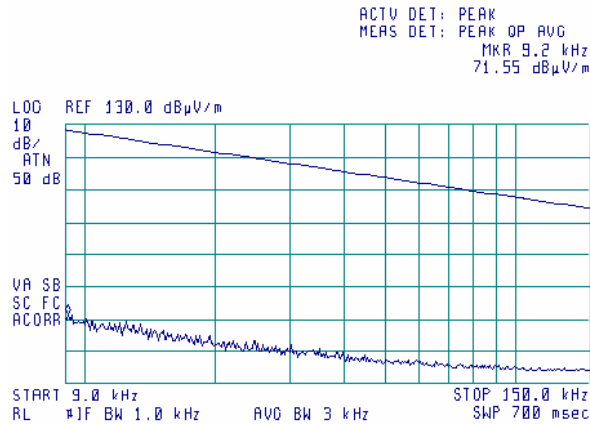

**Plot 7.3.10 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

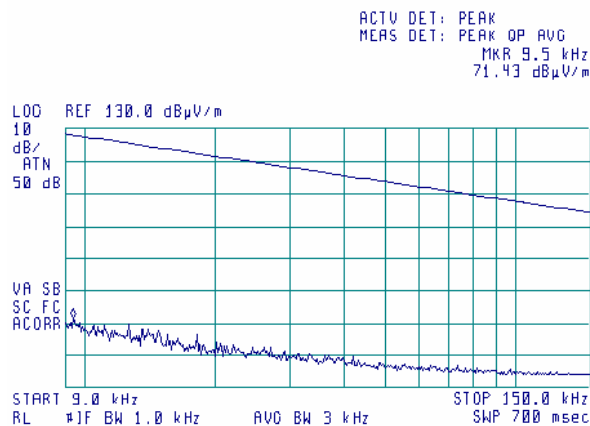

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.11 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK

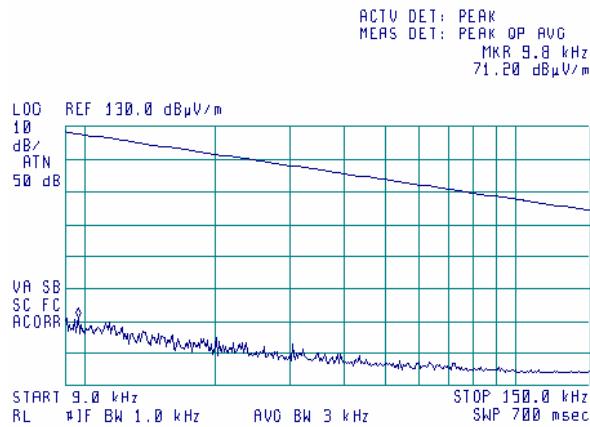

**Plot 7.3.12 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

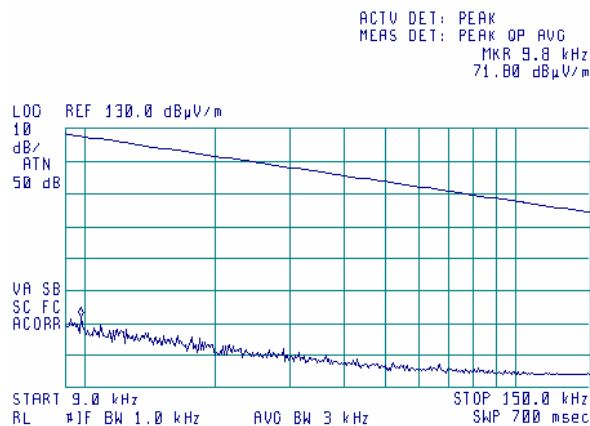

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.13 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

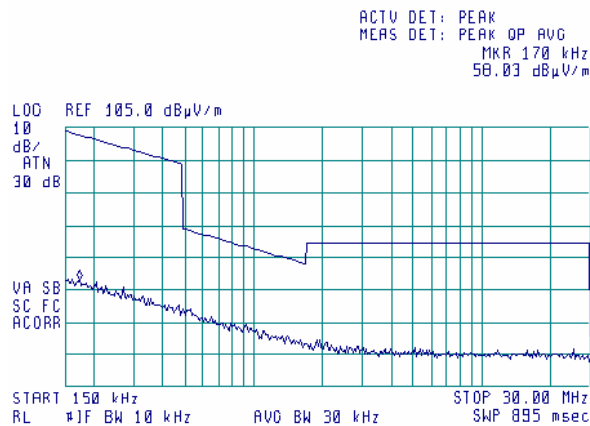

**Plot 7.3.14 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

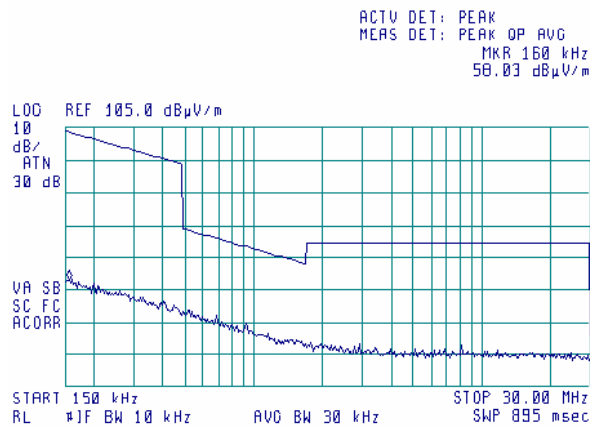

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.15 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: FSK

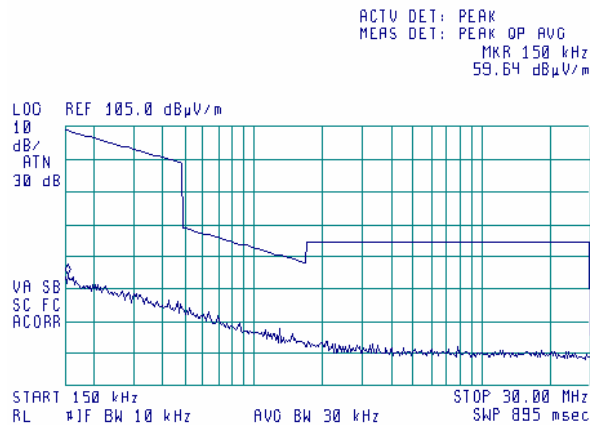

**Plot 7.3.16 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency**


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: PSK

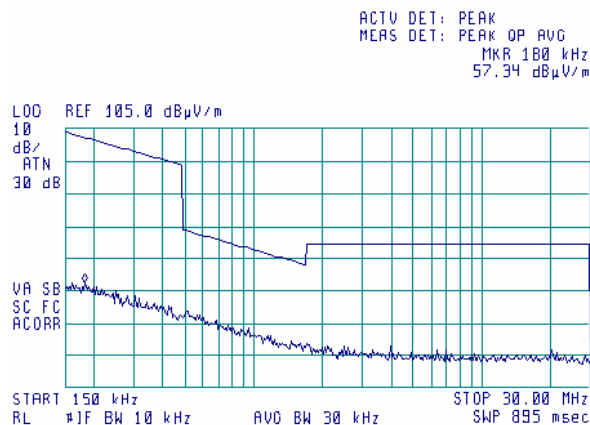

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


Plot 7.3.17 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

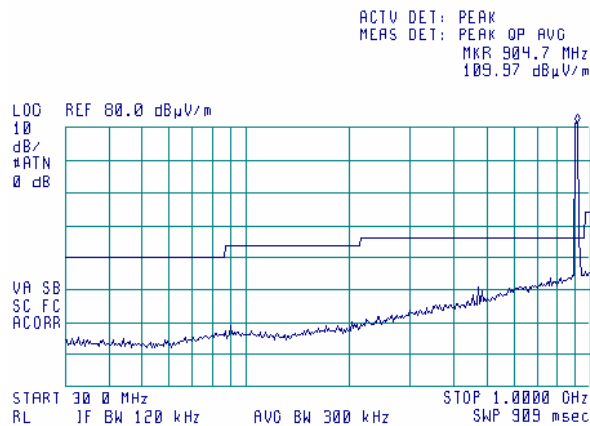

Plot 7.3.18 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

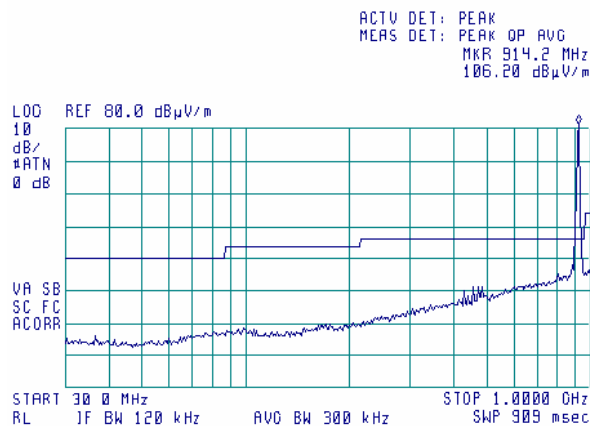

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


Plot 7.3.19 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: FSK

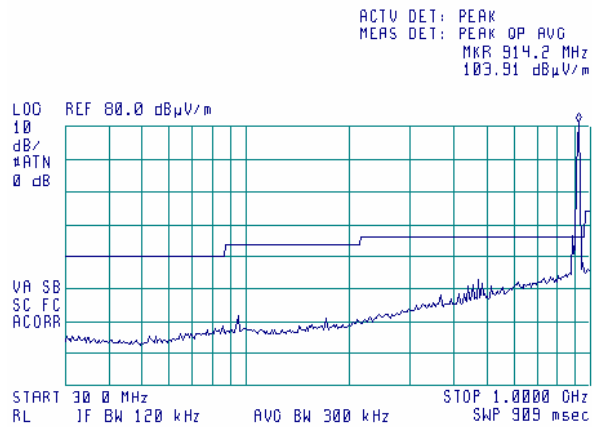

Plot 7.3.20 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: PSK

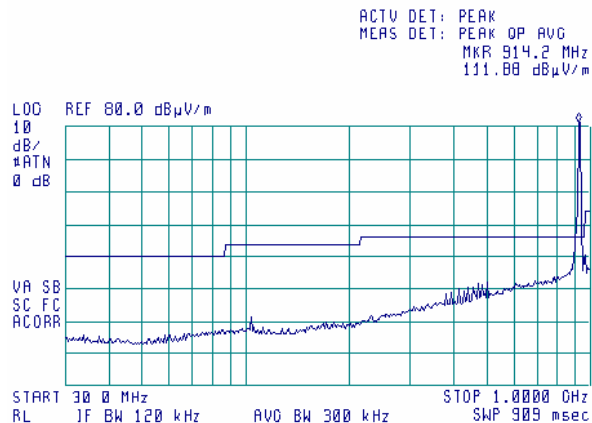

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Plot 7.3.21 Radiated emission measurements from 1000 to 2000 MHz at the low carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

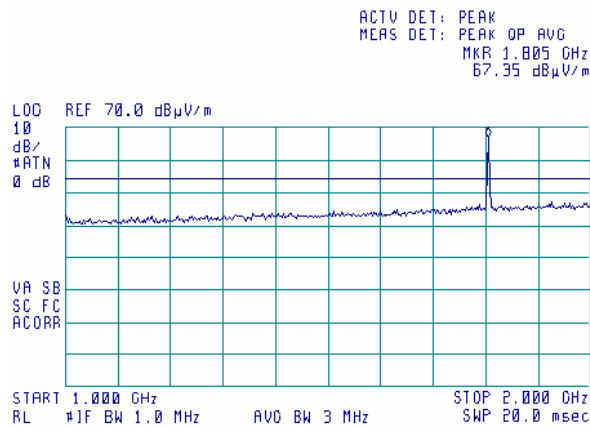

2<sup>nd</sup> harmonic at non-restricted band more than 20dB bellow limit (95dBuV/m)

**Plot 7.3.22 Radiated emission measurements from 1000 to 2000 MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

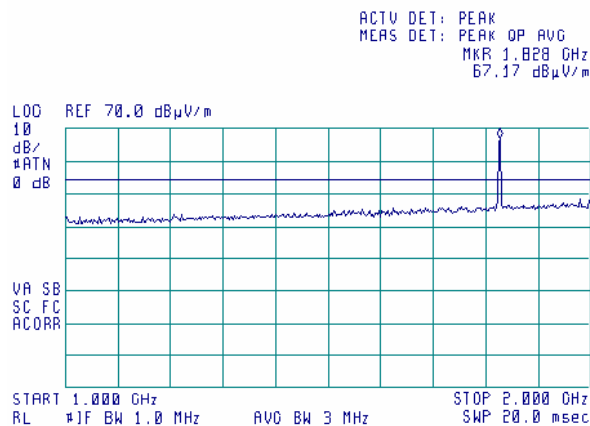


2<sup>nd</sup> harmonic at non-restricted band more than 20dB bellow limit (95dBuV/m)



<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Plot 7.3.23 Radiated emission measurements from 1000 to 2000 MHz at the mid carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK

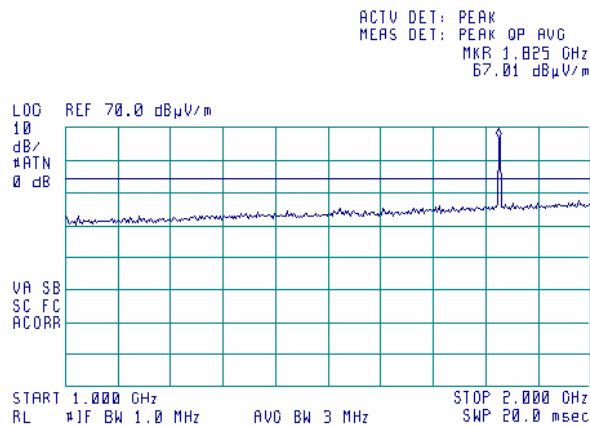

2<sup>nd</sup> harmonic at non-restricted band more than 20dB below limit (95dBuV/m)

**Plot 7.3.24 Radiated emission measurements from 1000 to 2000 MHz at the high carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

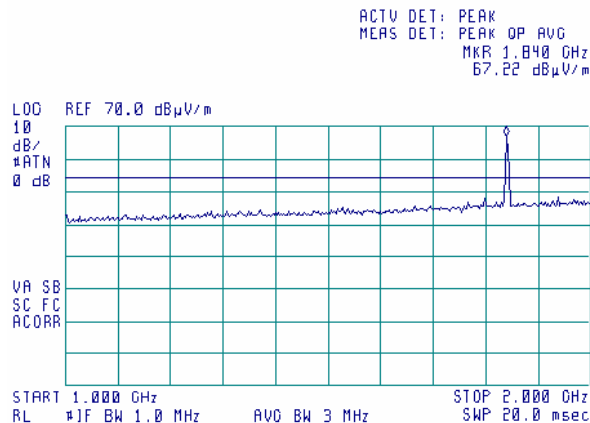


2<sup>nd</sup> harmonic at non-restricted band more than 20dB below limit (95dBuV/m)

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.25 Radiated emission measurements from 2000 to 4000MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

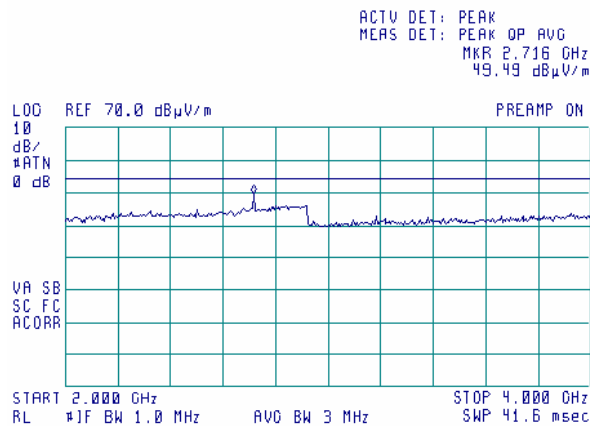

**Plot 7.3.26 Radiated emission measurements from 2000 to 4000MHz at the mid carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

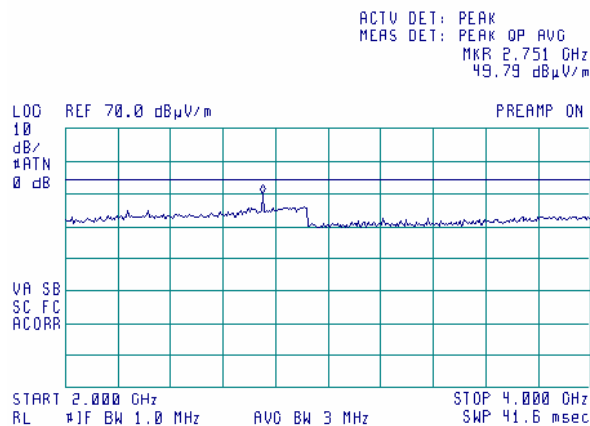

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


Plot 7.3.27 Radiated emission measurements from 2000 to 4000MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: FSK

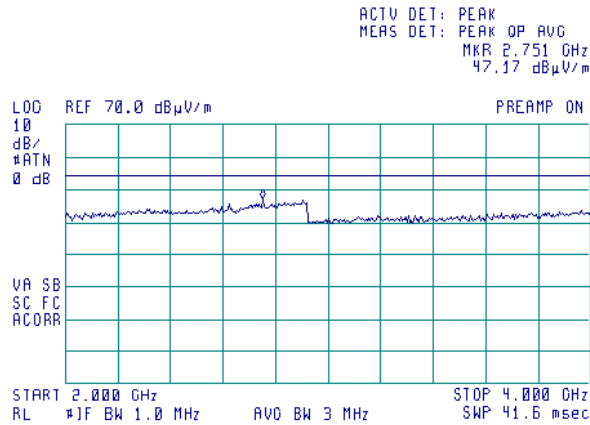

Plot 7.3.28 Radiated emission measurements from 2000 to 4000MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: PSK

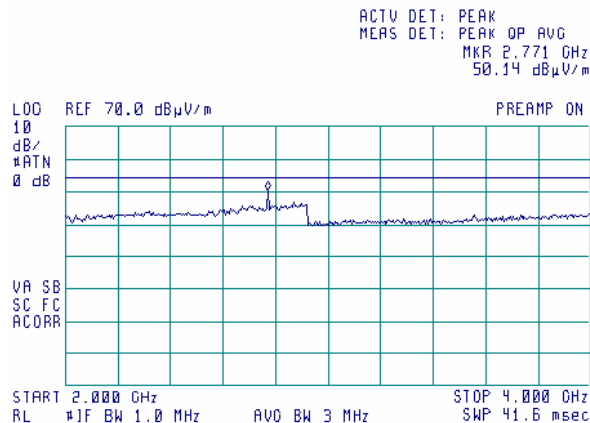

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.29 Radiated emission measurements from 4000 to 6500MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

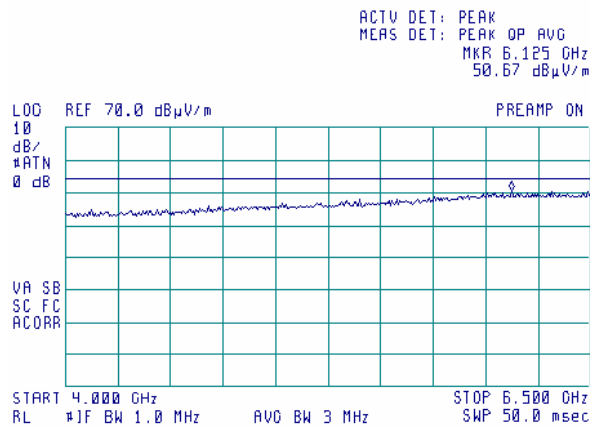

**Plot 7.3.30 Radiated emission measurements from 4000 to 6500MHz at the mid carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

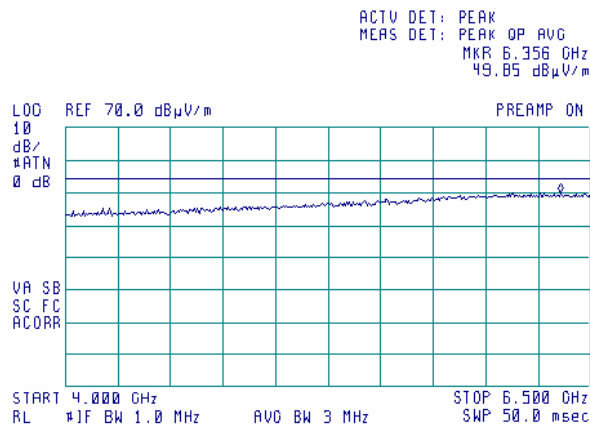

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.31 Radiated emission measurements from 4000 to 6500MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK

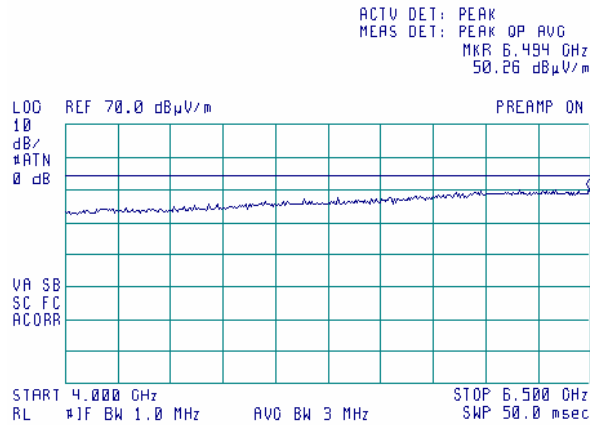

**Plot 7.3.32 Radiated emission measurements from 4000 to 6500MHz at the high carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

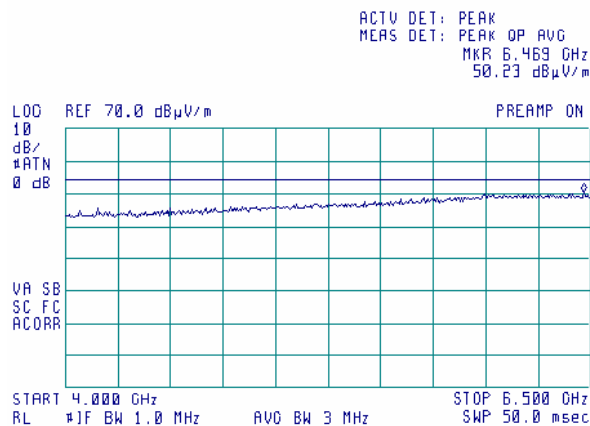

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


Plot 7.3.33 Radiated emission measurements from 6500 to 8000MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: PSK

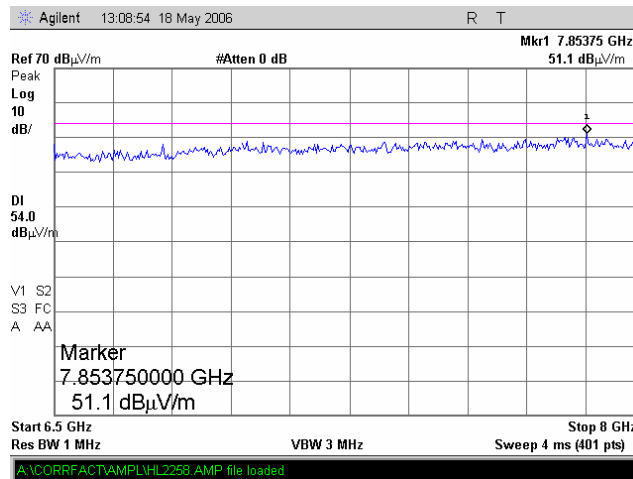

Plot 7.3.34 Radiated emission measurements from 6500 to 8000MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: PSK

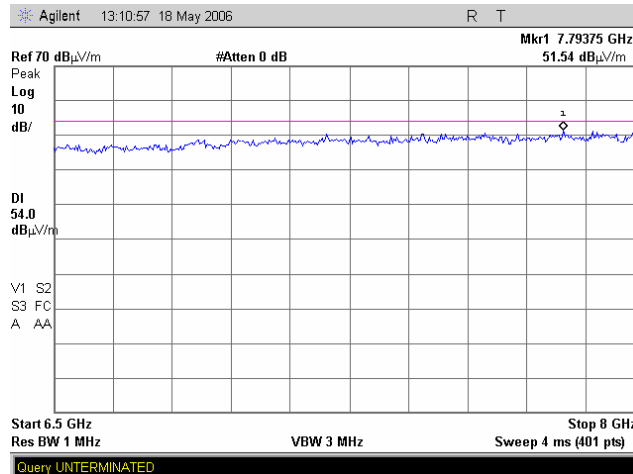

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.35 Radiated emission measurements from 6500 to 8000MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK

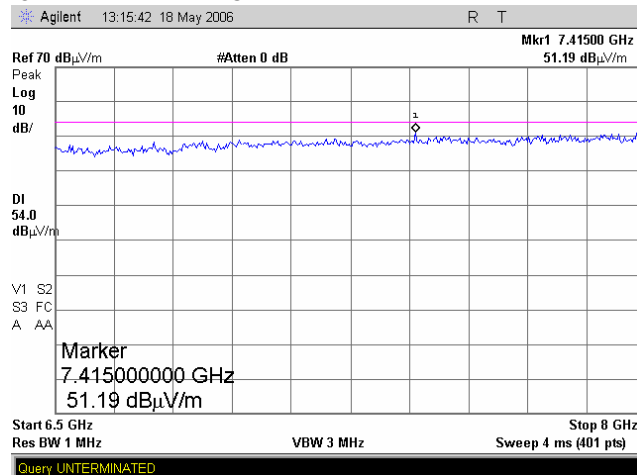

**Plot 7.3.36 Radiated emission measurements from 6500 to 8000MHz at the high carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

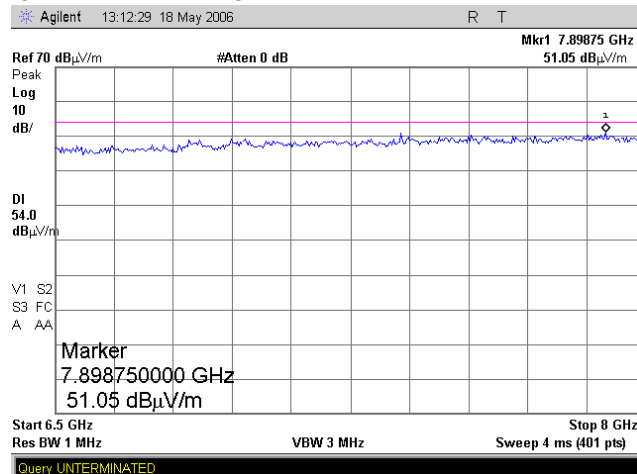

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.37 Radiated emission measurements from 8000 to 9500MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

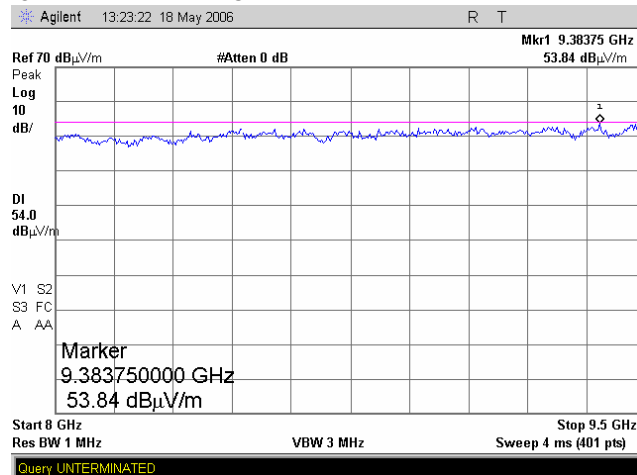

**Plot 7.3.38 Radiated emission measurements from 8000 to 9500MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

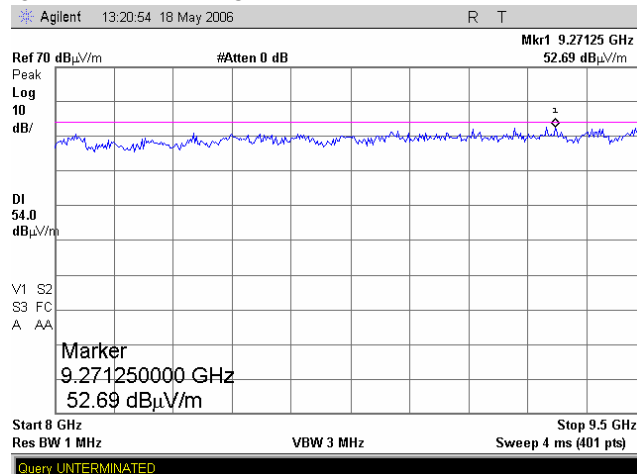




<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.39 Radiated emission measurements from 8000 to 9500MHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK

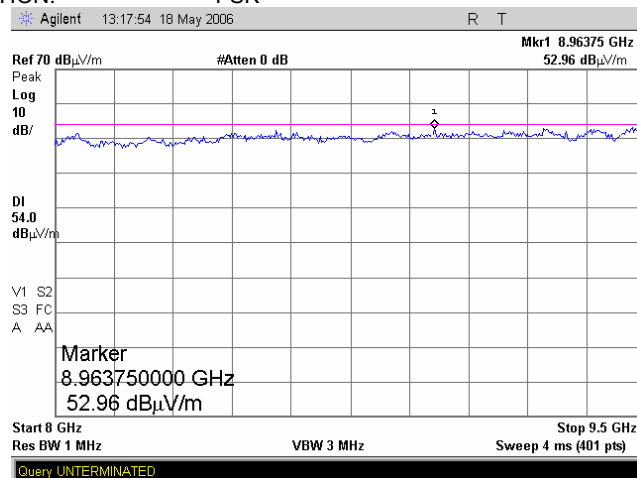

**Plot 7.3.40 Radiated emission measurements from 8000 to 9500MHz at the high carrier frequency**


TEST SITE: Semi anechoic chamber  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK

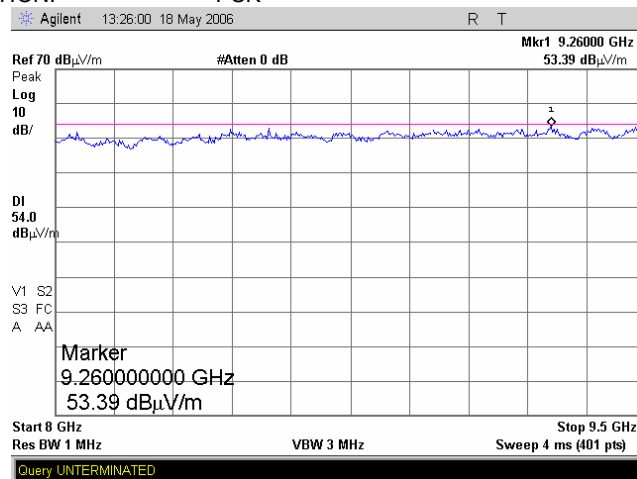

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


Plot 7.3.41 Radiated emission measurements from 901 to 905.55 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: PSK

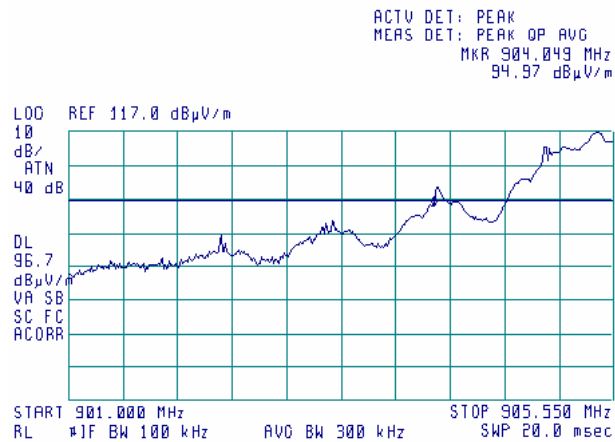

Plot 7.3.42 Radiated emission measurements from 923 to 929 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: PSK

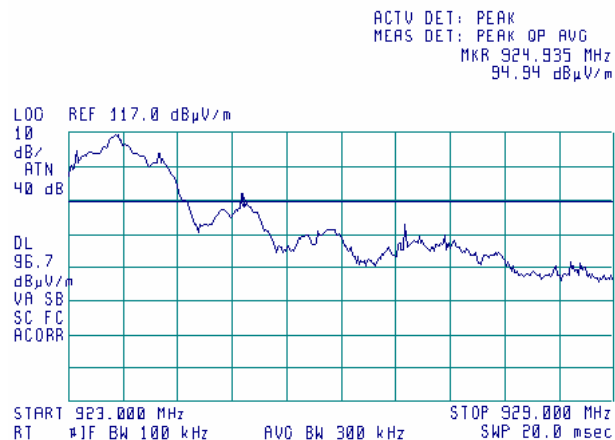

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


Plot 7.3.43 Radiated emission measurements from 901 to 905.55 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: FSK

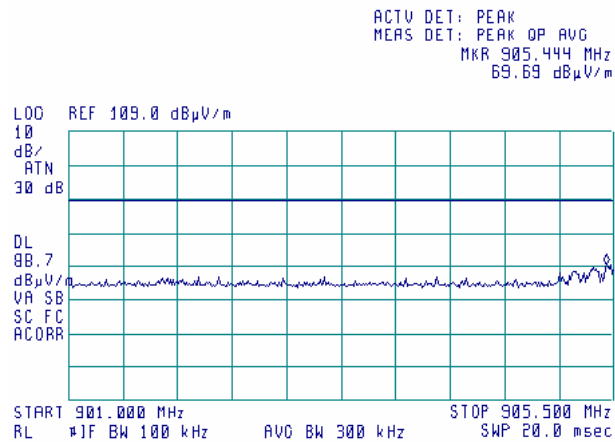

Plot 7.3.44 Radiated emission measurements from 923 to 929 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber  
TEST DISTANCE: 3 m  
ANTENNA POLARIZATION: Vertical and Horizontal  
MODULATION: FSK

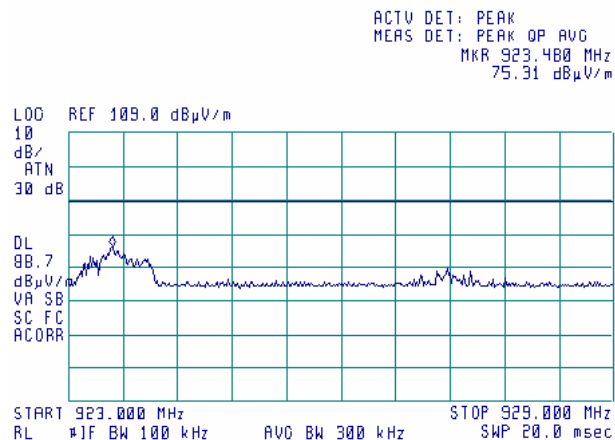

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.45 Radiated emission measurements at the third harmonic of low carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

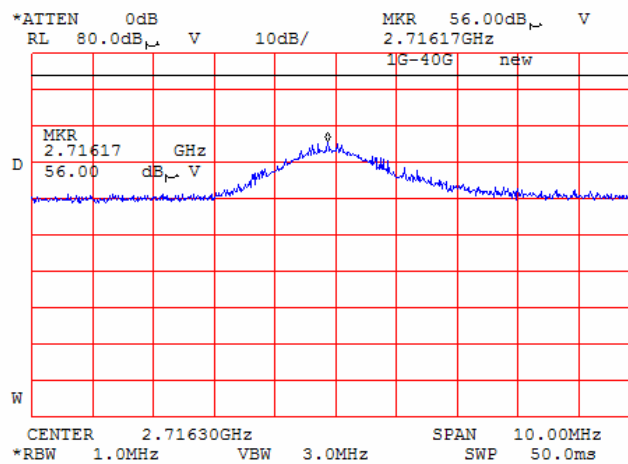

**Plot 7.3.46 Radiated emission measurements at the third harmonic of low carrier frequency**


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: avg

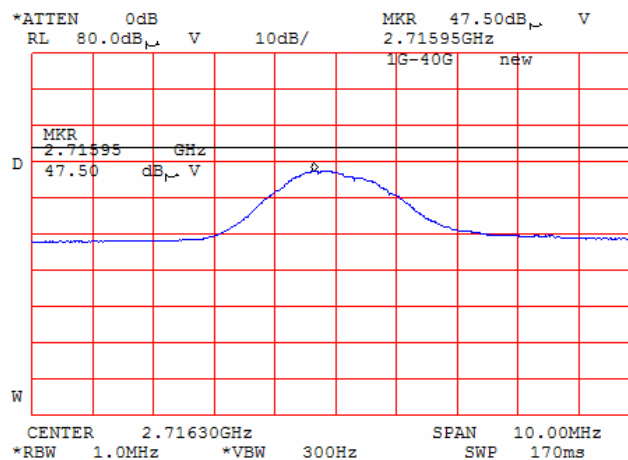

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.47 Radiated emission measurements at the third harmonic of mid carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

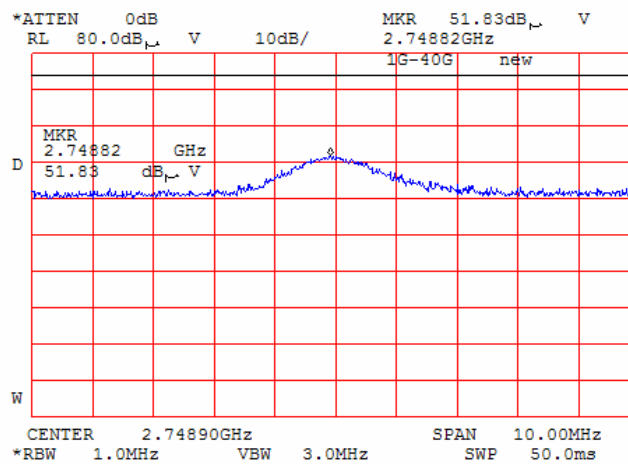

**Plot 7.3.48 Radiated emission measurements at the third harmonic of mid carrier frequency**


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: avg

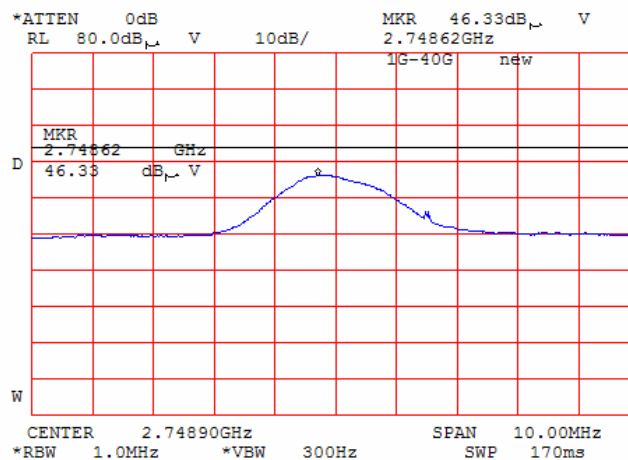

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.49 Radiated emission measurements at the third harmonic of mid carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK  
 DETECTOR: peak

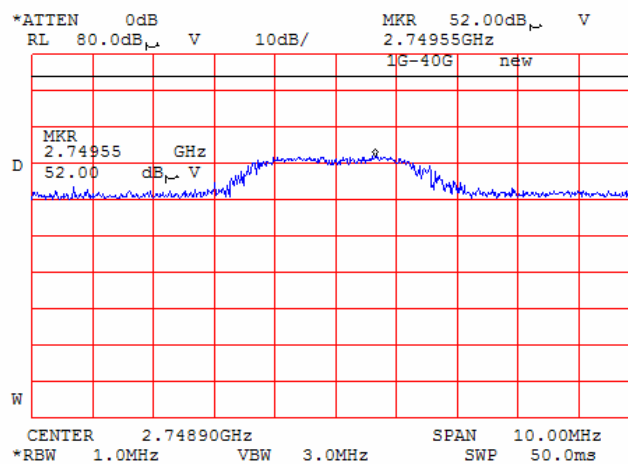

**Plot 7.3.50 Radiated emission measurements at the third harmonic of mid carrier frequency**


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK  
 DETECTOR: avg

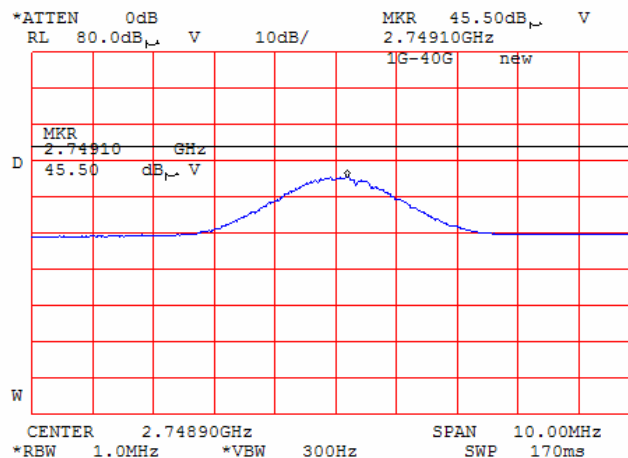

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


Plot 7.3.51 Radiated emission measurements at the third harmonic of high carrier frequency

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

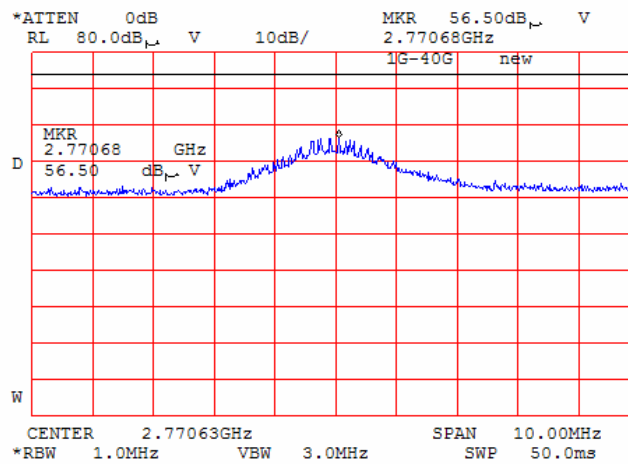

Plot 7.3.52 Radiated emission measurements at the third harmonic of mid carrier frequency


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: avg

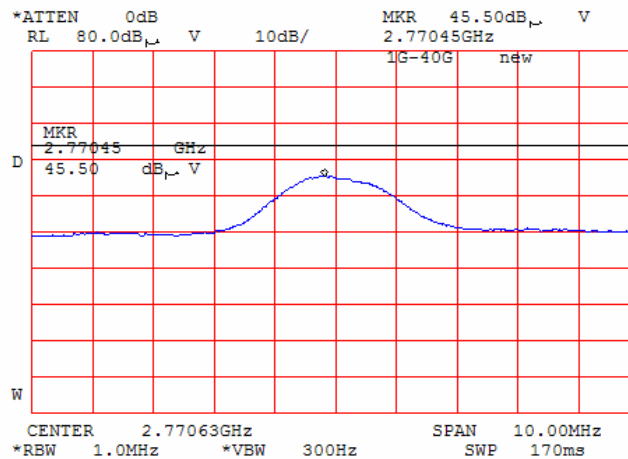

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.53 Radiated emission measurements at the fourth harmonic of low carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

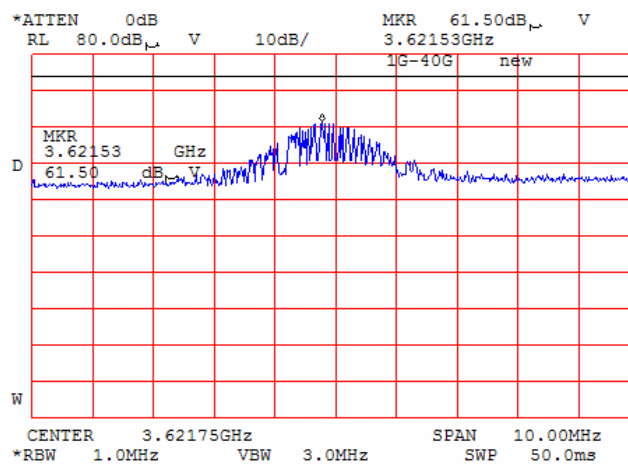

**Plot 7.3.54 Radiated emission measurements at the fourth harmonic of low carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: avg

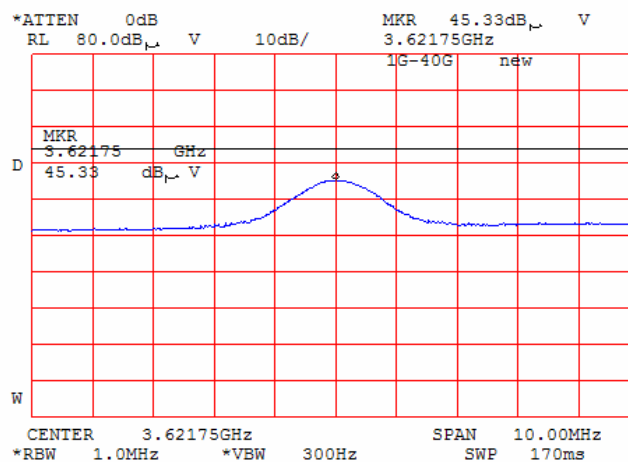




<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.55 Radiated emission measurements at the fourth harmonic of mid carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

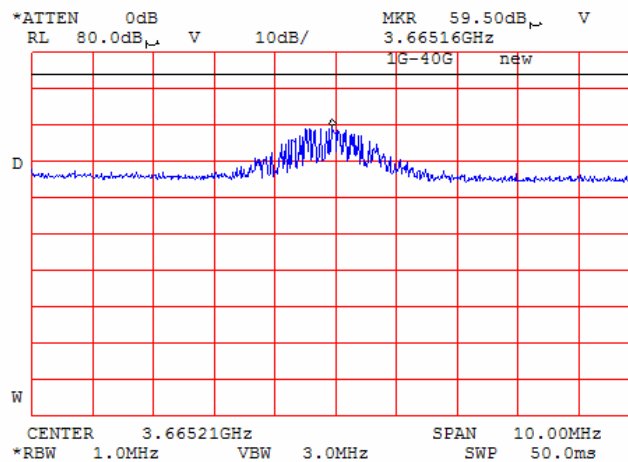

**Plot 7.3.56 Radiated emission measurements at the fourth harmonic of mid carrier frequency**


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: avg

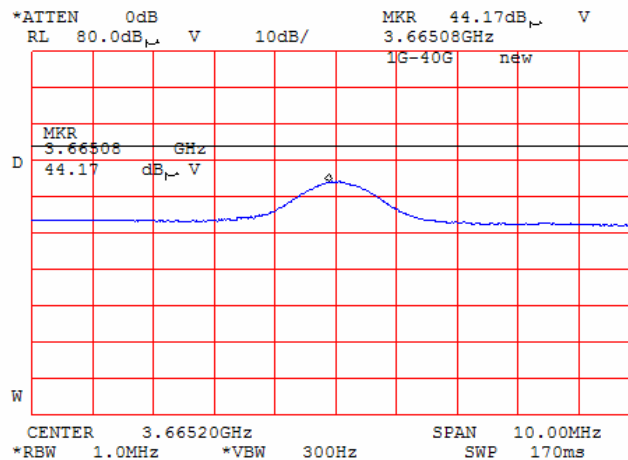

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.57 Radiated emission measurements at the fourth harmonic of mid carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK  
 DETECTOR: peak

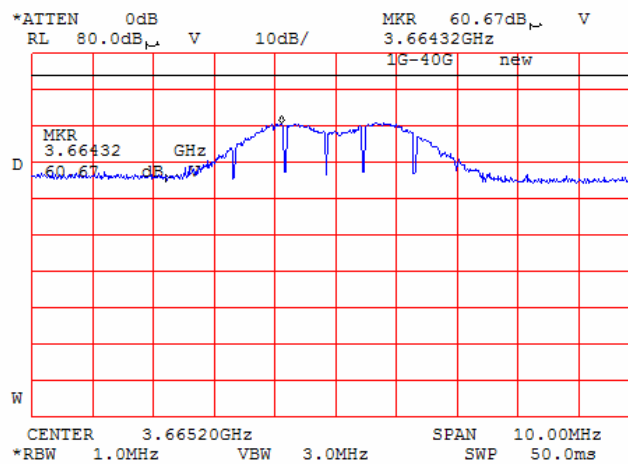

**Plot 7.3.58 Radiated emission measurements at the fourth harmonic of mid carrier frequency**


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK  
 DETECTOR: avg

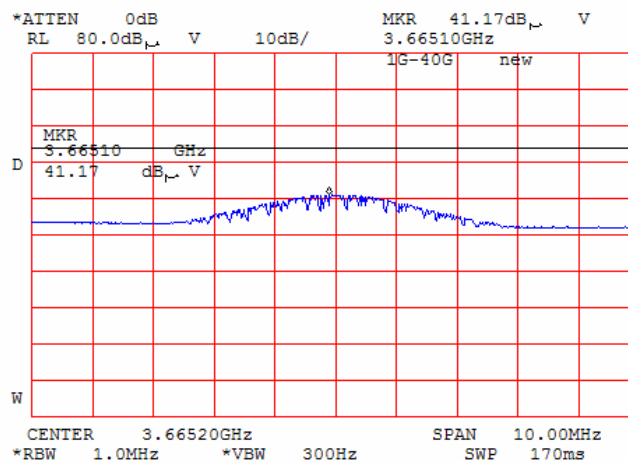

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


Plot 7.3.59 Radiated emission measurements at the fourth harmonic of high carrier frequency

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

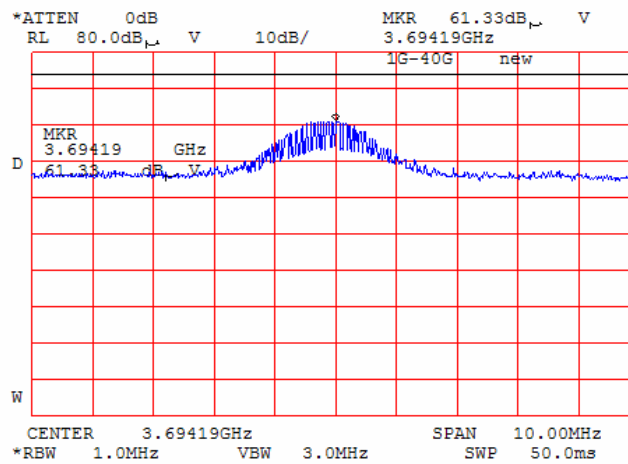

Plot 7.3.60 Radiated emission measurements at the fourth harmonic of high carrier frequency


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: avg

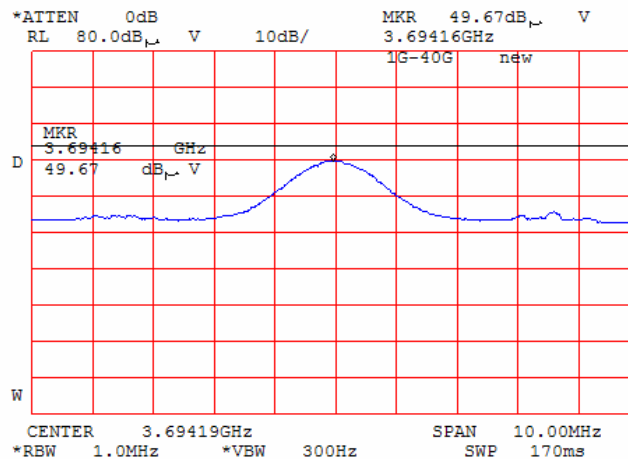

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.61 Radiated emission measurements at the fifth harmonic of low carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

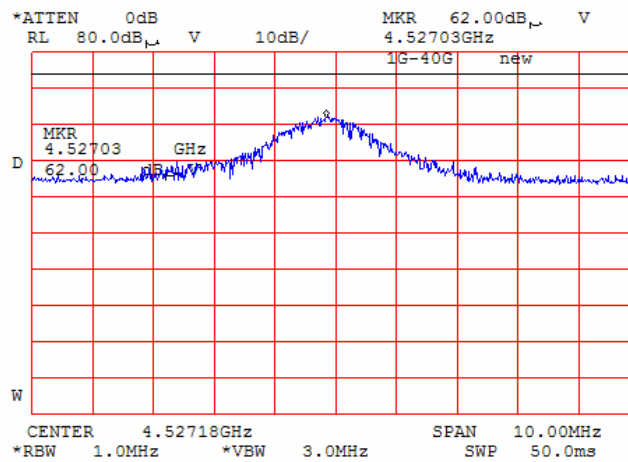

**Plot 7.3.62 Radiated emission measurements at the fifth harmonic of low carrier frequency**


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: avg

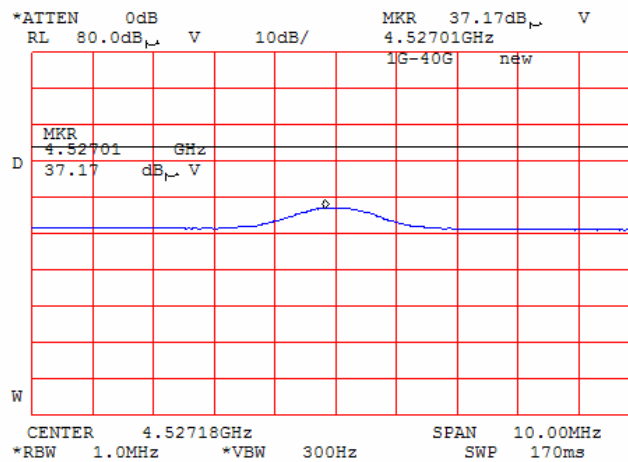

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.63 Radiated emission measurements at the fifth harmonic of mid carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

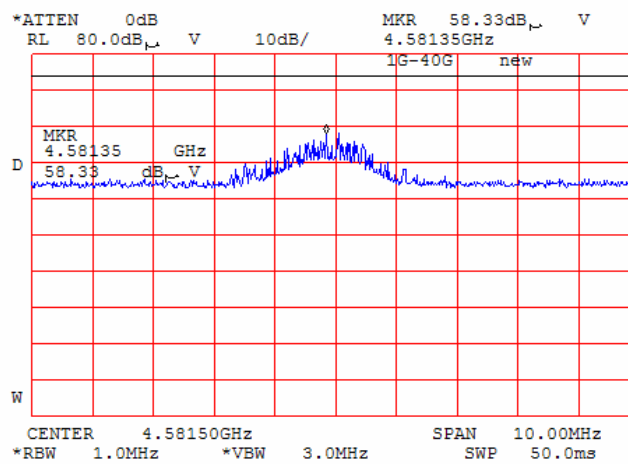

**Plot 7.3.64 Radiated emission measurements at the fifth harmonic of mid carrier frequency**


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: avg

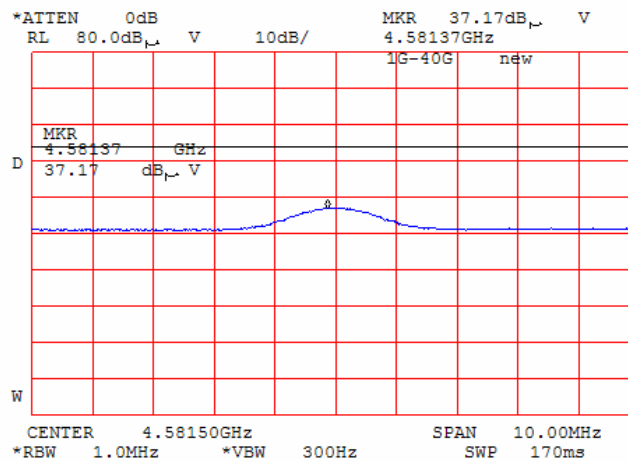

<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.65 Radiated emission measurements at the fifth harmonic of mid carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK  
 DETECTOR: peak

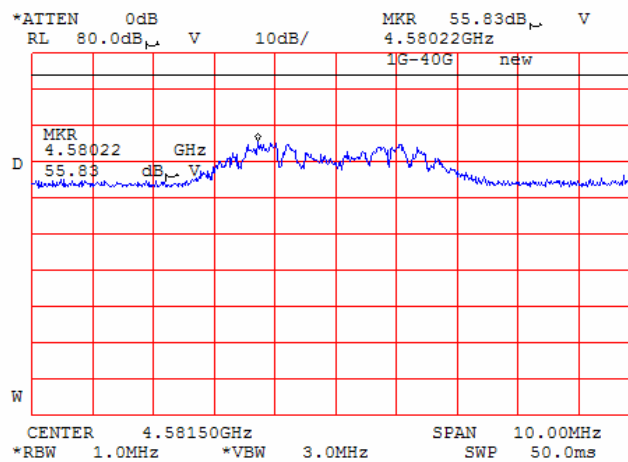

**Plot 7.3.66 Radiated emission measurements at the fifth harmonic of mid carrier frequency**


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK  
 DETECTOR: avg

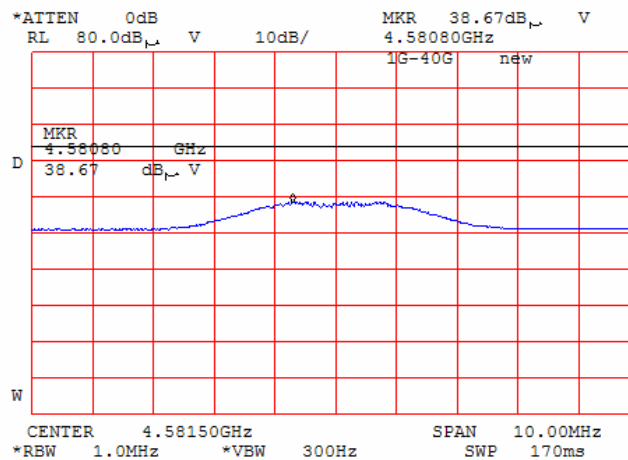

<b>Test specification:</b>		<b>Section 15.247(c), Radiated spurious emissions</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Plot 7.3.67 Radiated emission measurements at the fifth harmonic of high carrier frequency**


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

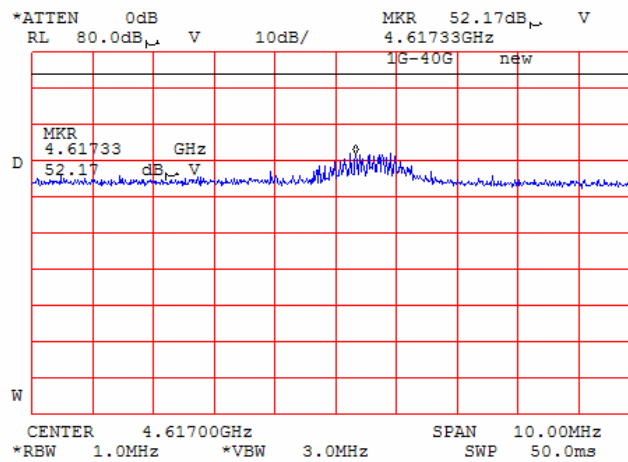

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.68 Radiated emission measurements at the six harmonic of low carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

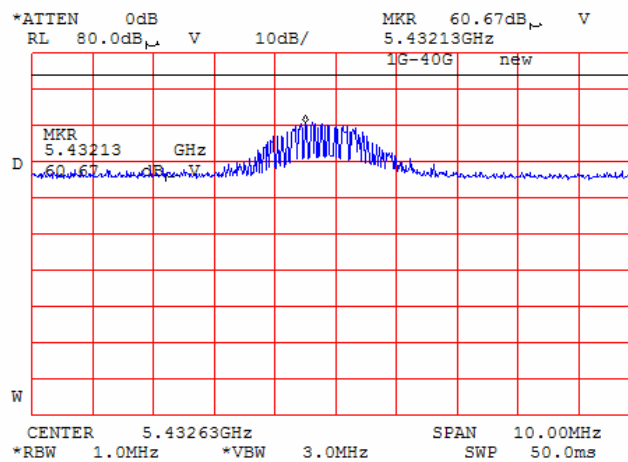

**Plot 7.3.69 Radiated emission measurements at the six harmonic of low carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: avg

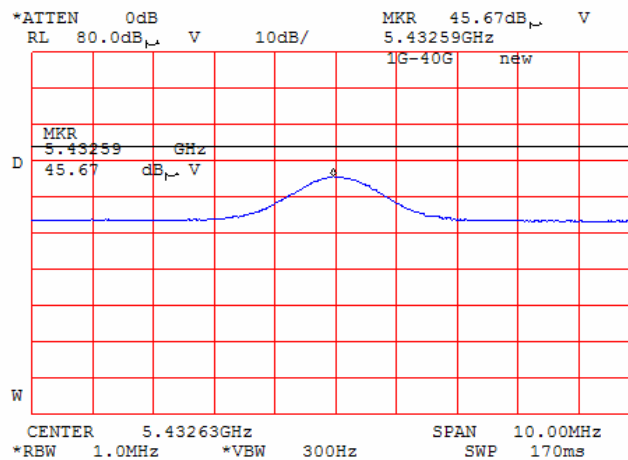




<b>Test specification:</b> Section 15.247(c), Radiated spurious emissions			
<b>Test procedure:</b> FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date &amp; Time:</b> 5/21/2006 4:53:23 PM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


Plot 7.3.70 Radiated emission measurements at the six harmonic of mid carrier frequency

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

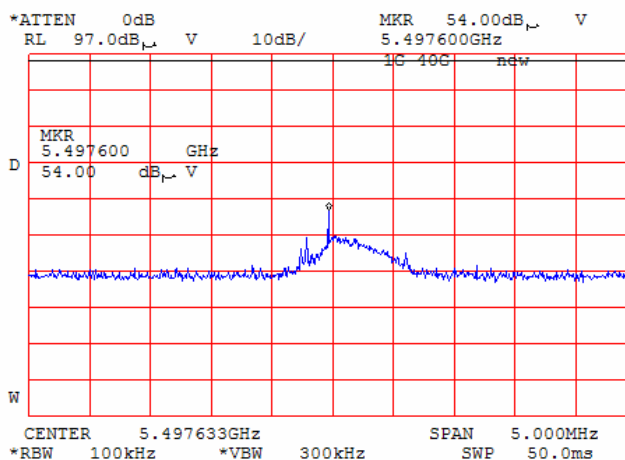

Plot 7.3.71 Radiated emission measurements at the six harmonic of mid carrier frequency


TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: FSK  
 DETECTOR: peak

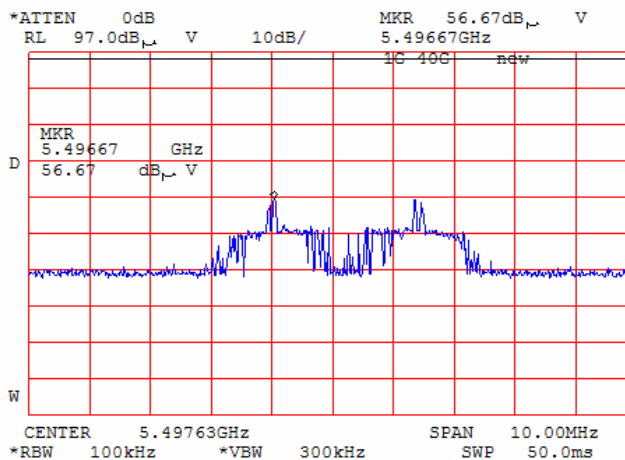

<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict: PASS</b>	
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.3.72 Radiated emission measurements at the six harmonic of high carrier frequency**

TEST SITE: OATS  
 TEST DISTANCE: 3 m  
 ANTENNA POLARIZATION: Vertical and Horizontal  
 MODULATION: PSK  
 DETECTOR: peak

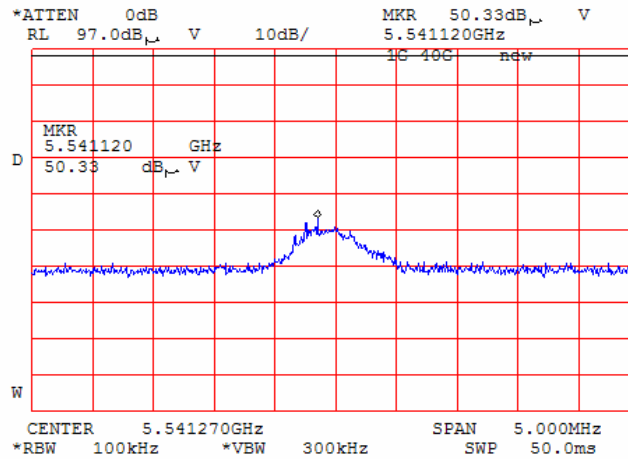


<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Plot 7.3.73 Transmission pulse duration PSK modulation**

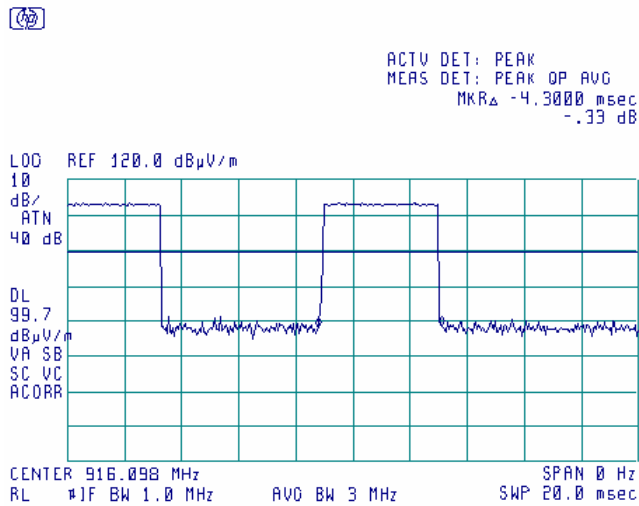


**Plot 7.3.74 Transmission pulse period PSK modulation**

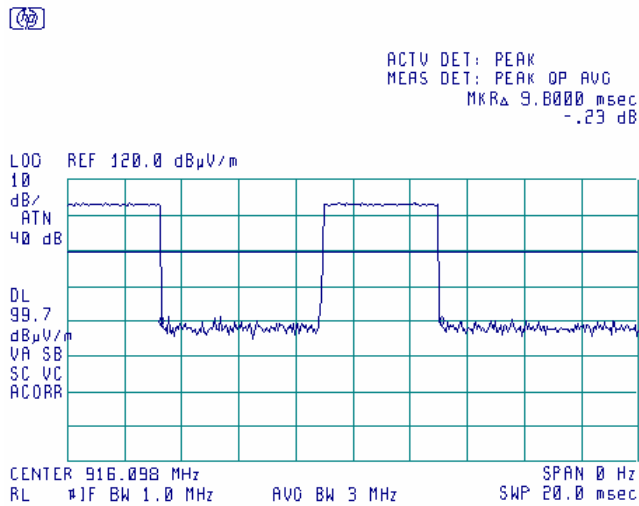


<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Plot 7.3.75 Transmission burst duration PSK modulation

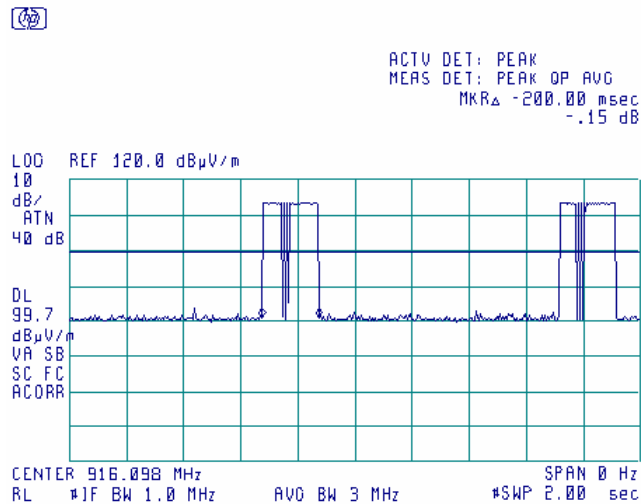


Plot 7.3.76 Transmission burst period PSK modulation

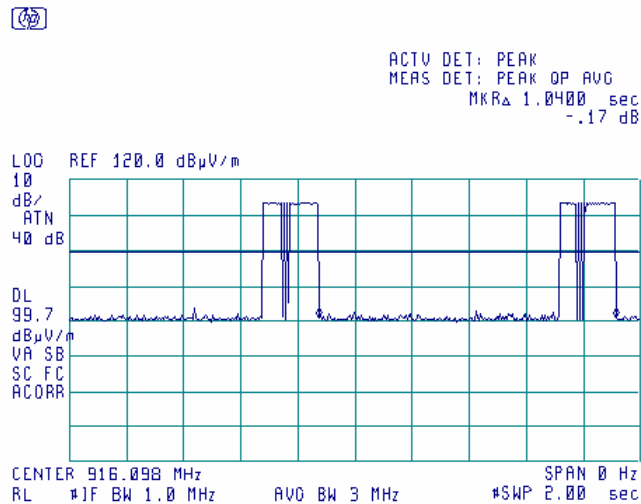


<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Plot 7.3.77 Transmission pulse duration FSK modulation

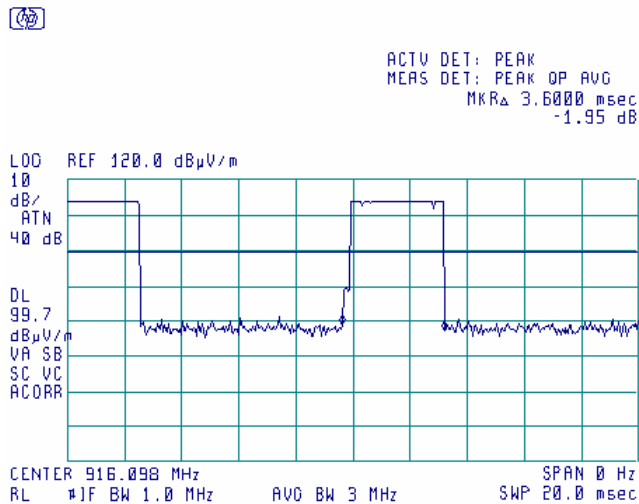


Plot 7.3.78 Transmission pulse period FSK modulation

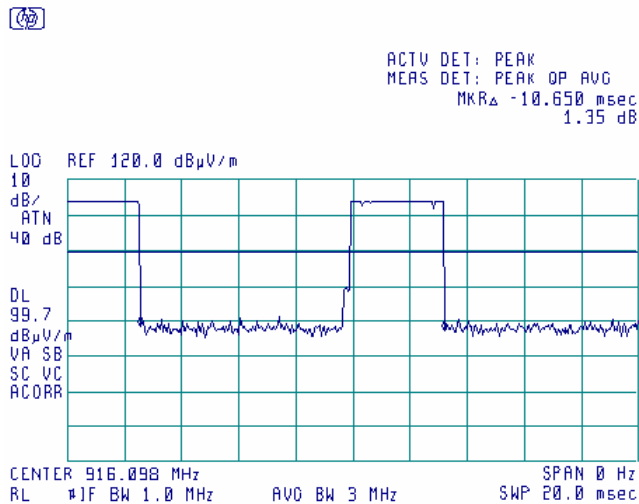


<b>Test specification:</b>	<b>Section 15.247(c), Radiated spurious emissions</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 4:53:23 PM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Plot 7.3.79 Transmission burst duration FSK modulation

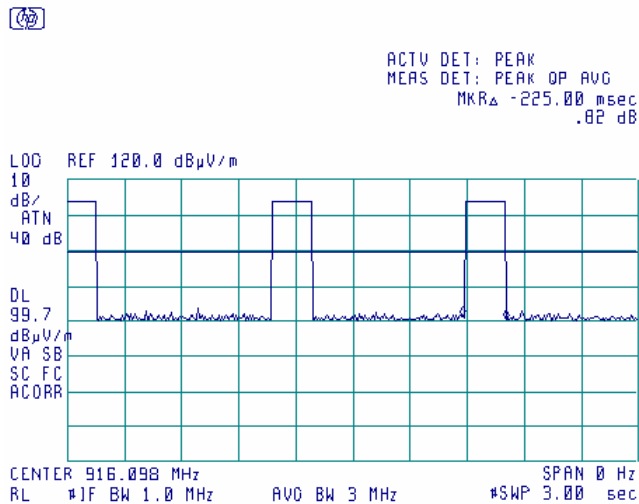

Plot 7.3.80 Transmission burst period FSK modulation

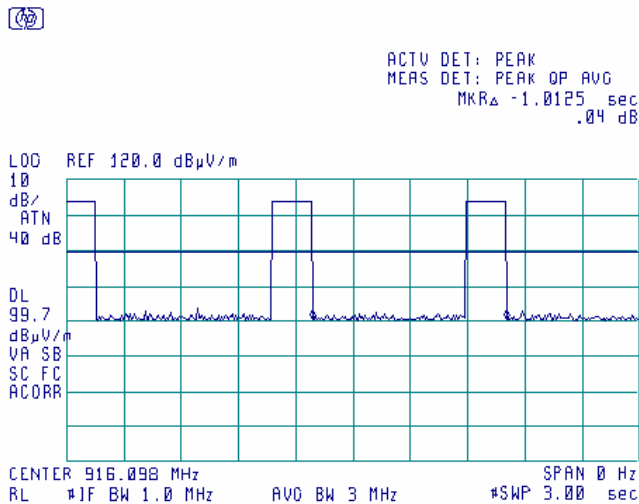

<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/18/2006 10:30:28 AM		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

## 7.4 Peak spectral power density

### 7.4.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.4.1.

**Table 7.4.1 Peak spectral power density limits**

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μV/m)*
902.0 – 928.0	3.0	8.0	103.2


\* - Equivalent field strength limit was calculated from the peak spectral power density as follows:  $E = \sqrt{30 \times P} / r$ , where P is peak spectral power density and r is antenna to EUT distance in meters.

### 7.4.2 Test procedure for field strength measurements

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.4.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.4.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.
- 7.4.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.4.2 and associated plots.

<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/18/2006 10:30:28 AM		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Figure 7.4.1 Setup for carrier field strength measurements

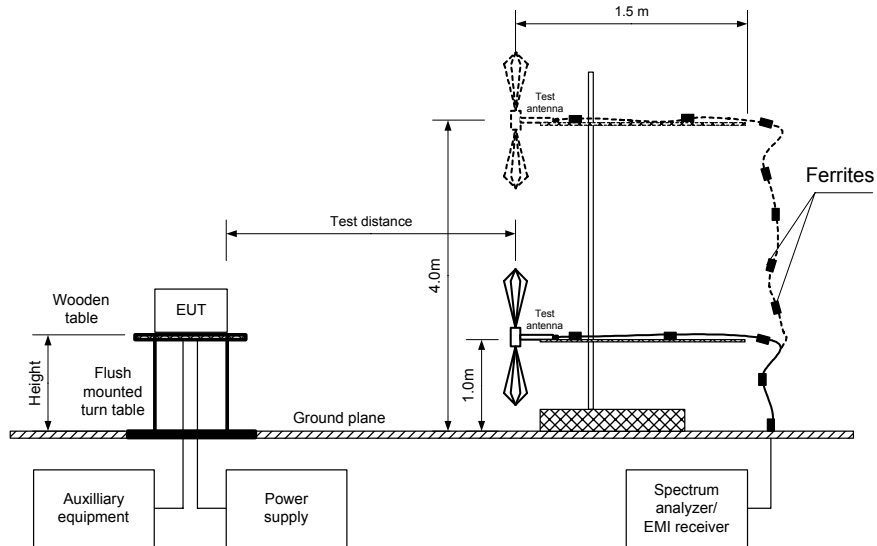



<b>Test specification:</b>		<b>Section 15.247(d), Peak power density</b>	
<b>Test procedure:</b>		FR Vol. 62, page 26243, Section 15.247(d)	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/18/2006 10:30:28 AM		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Table 7.4.2 Field strength measurement of peak spectral power density**

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz  
 TEST DISTANCE: 3 m  
 TEST SITE: Semi anechoic chamber  
 EUT HEIGHT: 0.8 m  
 DETECTOR USED: Peak  
 RESOLUTION BANDWIDTH: 3 kHz  
 VIDEO BANDWIDTH: 10 kHz  
 TEST ANTENNA TYPE: Biconilog (30 MHz – 1000 MHz)  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

MODULATION: PSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 60 kbps  
 TRANSMITTER OUTPUT POWER: 18.91 dBm at low carrier frequency  
 18.55 dBm at mid carrier frequency  
 17.67 dBm at high carrier frequency

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
923.5462	104.72	3	103.2	-1.48	Vertical	1.0	165
916.3000	104.22	3	103.2	-1.98	Vertical	1.0	170
905.4375	103.22	3	103.2	-2.98	Vertical	1.0	170

MODULATION: FSK  
 MODULATING SIGNAL: PRBS  
 BIT RATE: 120 kbps  
 TRANSMITTER OUTPUT POWER: 16.20 dBm at mid carrier frequency

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
916.3000	105.86	3	103.2	-0.34	Vertical	1.0	170

\*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

\*\* - EUT front panel refer to 0 degrees position of turntable.


**Reference numbers of test equipment used**

HL 0521	HL 0589	HL 0592	HL 0593	HL 0594	HL 0604	HL 2009	
---------	---------	---------	---------	---------	---------	---------	--


Full description is given in Appendix A.

<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/18/2006 10:30:28 AM		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Plot 7.4.1 Peak spectral power density at low frequency within 6 dB band, PSK modulation

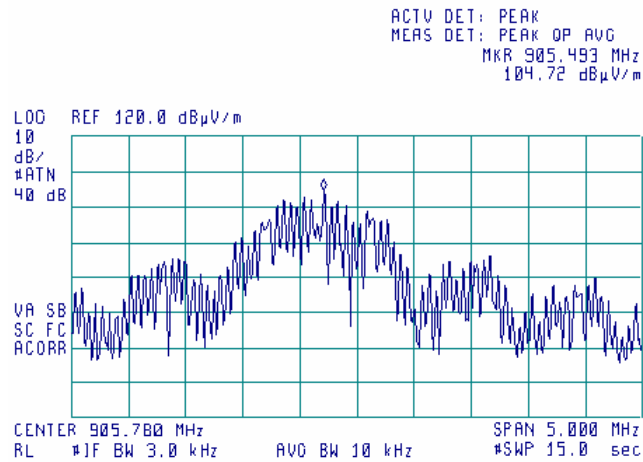


Plot 7.4.2 Peak spectral power density at low frequency zoomed at the peak, PSK modulation

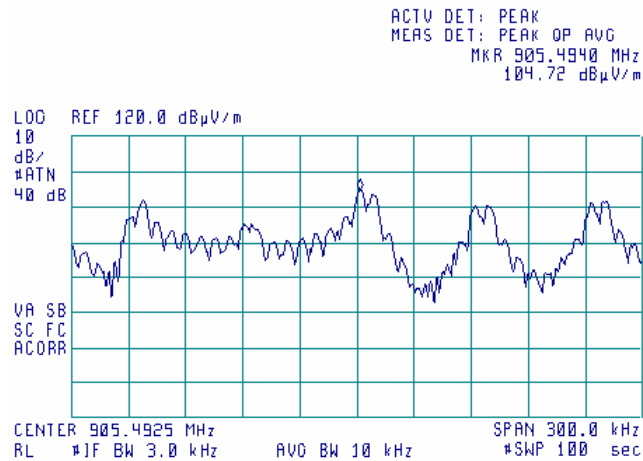


<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/18/2006 10:30:28 AM		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Plot 7.4.3 Peak spectral power density at mid frequency within 6 dB band, PSK modulation

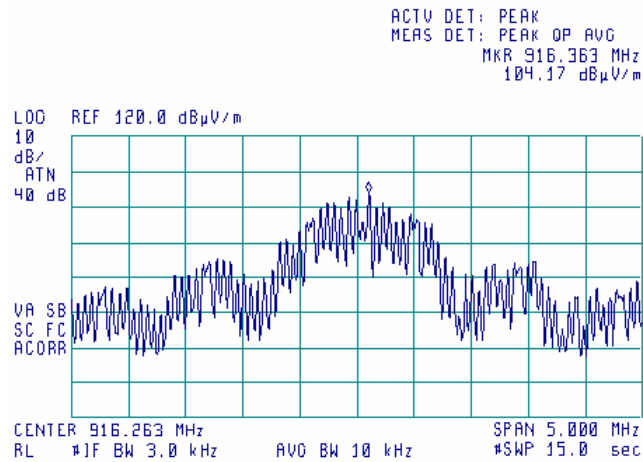


Plot 7.4.4 Peak spectral power density at mid frequency zoomed at the peak, PSK modulation

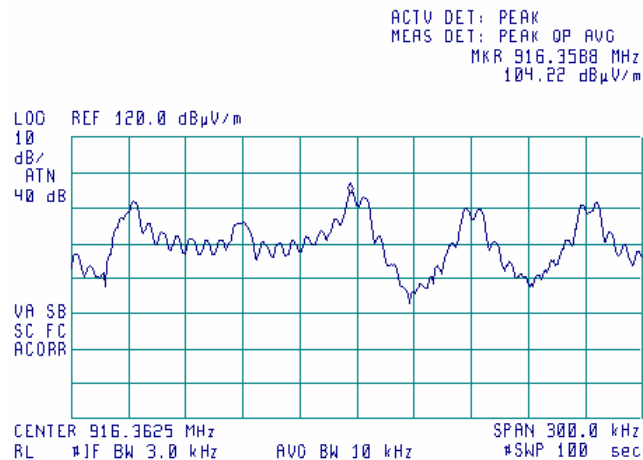


<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/18/2006 10:30:28 AM		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Plot 7.4.5 Peak spectral power density at mid frequency within 6 dB band, FSK modulation

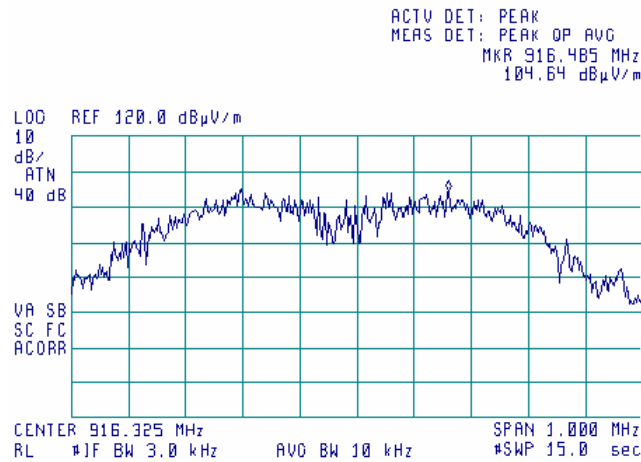


Plot 7.4.6 Peak spectral power density at mid frequency zoomed at the peak, FSK modulation

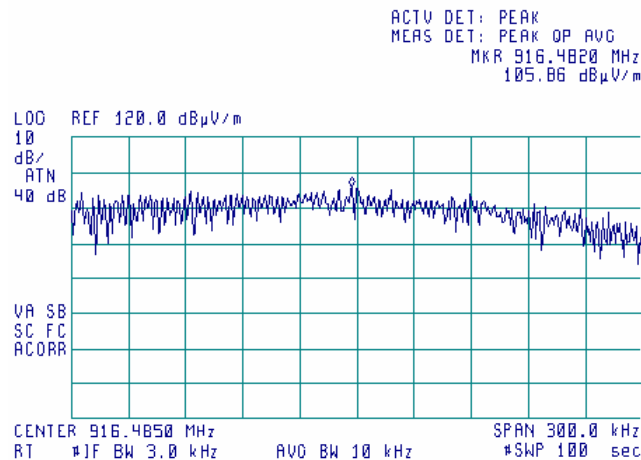


<b>Test specification:</b>	<b>Section 15.247(d), Peak power density</b>		
<b>Test procedure:</b>	FR Vol. 62, page 26243, Section 15.247(d)		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/18/2006 10:30:28 AM		
<b>Temperature:</b> 21 °C	<b>Air Pressure:</b> 1007 hPa	<b>Relative Humidity:</b> 52%	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Plot 7.4.7 Peak spectral power density at high frequency within 6 dB band, PSK modulation

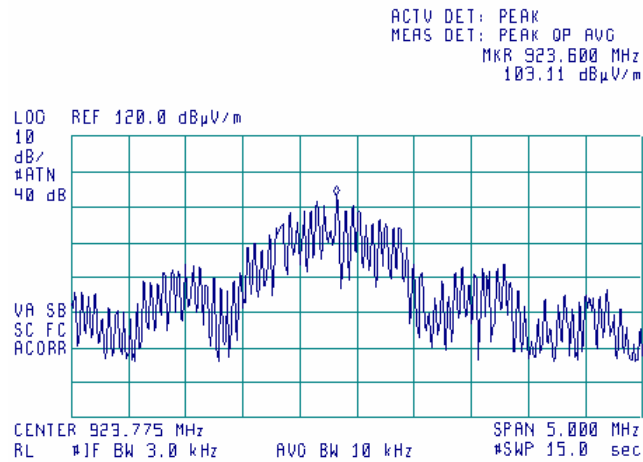

Plot 7.4.8 Peak spectral power density at high frequency zoomed at the peak, PSK modulation

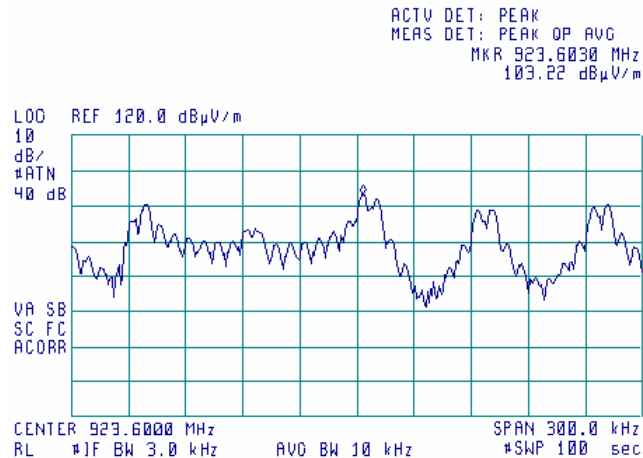

<b>Test specification:</b>		<b>Section 15.109, Radiated emission</b>	
<b>Test procedure:</b>		ANSI C63.4, Sections 11.6 and 12.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	5/21/2006 10:57:45 AM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

## 7.5 Radiated emission measurements

### 7.5.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Radiated emission test limits

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

\* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows:  $Lim_{S_2} = Lim_{S_1} + 20 \log(S_1/S_2)$ , where  $S_1$  and  $S_2$  – standard defined and test distance respectively in meters.

### 7.5.2 Test procedure for measurements in semi-anechoic chamber


**7.5.2.1** The EUT was set up as shown in Figure 7.5.1 and associated photograph/s, energized and the performance check was conducted.

**7.5.2.2** The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

**7.5.2.3** The worst test results (the lowest margins) were recorded in Table 7.5.2 and shown in the associated plots.

<b>Test specification:</b> Section 15.109, Radiated emission			
<b>Test procedure:</b> ANSI C63.4, Sections 11.6 and 12.1.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date &amp; Time:</b> 5/21/2006 10:57:45 AM			
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

Figure 7.5.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

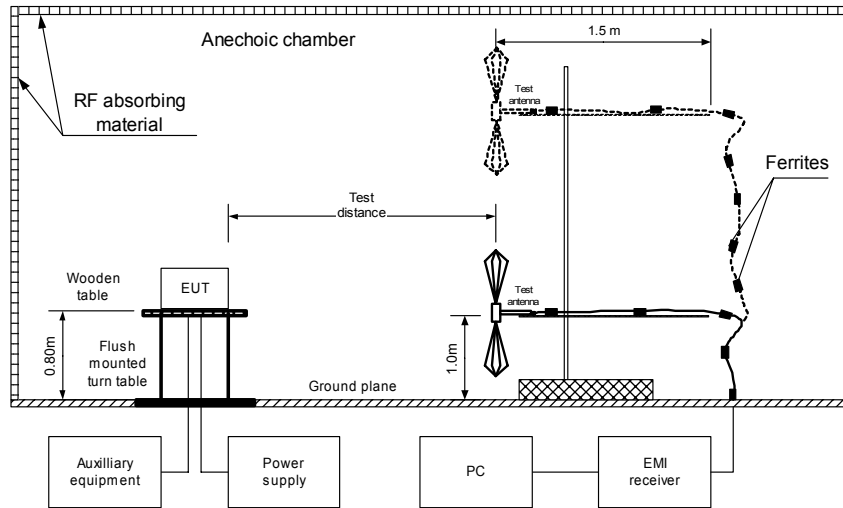

<b>Test specification:</b>	<b>Section 15.109, Radiated emission</b>		
<b>Test procedure:</b>	ANSI C63.4, Sections 11.6 and 12.1.4		
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	<b>PASS</b>
<b>Date &amp; Time:</b>	5/21/2006 10:57:45 AM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			

**Table 7.5.2 Radiated emission test results**

EUT SET UP: TABLE-TOP  
LIMIT: Class B  
EUT OPERATING MODE: Receive / Stand-by  
TEST SITE: SEMI ANECHOIC CHAMBER  
TEST DISTANCE: 3 m  
DETECTORS USED: PEAK / QUASI-PEAK  
FREQUENCY RANGE: 30 MHz – 1000 MHz  
RESOLUTION BANDWIDTH: 120 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
All found emissions were at least 20 dB below the specified limit								Pass

TEST SITE: SEMI ANECHOIC CHAMBER  
TEST DISTANCE: 3 m  
DETECTORS USED: PEAK / AVERAGE  
FREQUENCY RANGE: 1000 MHz – 5000 MHz  
RESOLUTION BANDWIDTH: 1000 kHz

Frequency, MHz	Peak emission, dB(μV/m)	Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
All found emissions were at least 20 dB below the specified limit								Pass

\*- Margin = Measured emission - specification limit.  
\*\*- EUT front panel refer to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0465	HL 0521	HL 0589	HL 0592	HL 0593	HL 0594	HL 0604	HL 1947
HL 2009	HL2432						


Full description is given in Appendix A.



<b>Test specification:</b>		<b>Section 15.109, Radiated emission</b>	
<b>Test procedure:</b>		ANSI C63.4, Sections 11.6 and 12.1.4	
<b>Test mode:</b>	Compliance	<b>Verdict:</b>	PASS
<b>Date &amp; Time:</b>	5/21/2006 10:57:45 AM		
<b>Temperature:</b> 23 °C	<b>Air Pressure:</b> 1010 hPa	<b>Relative Humidity:</b> 48 %	<b>Power Supply:</b> 3.6 V DC
<b>Remarks:</b>			


**Plot 7.5.1 Radiated emission measurements in 30 - 1000 MHz range, vertical & horizontal antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive / Stand-by

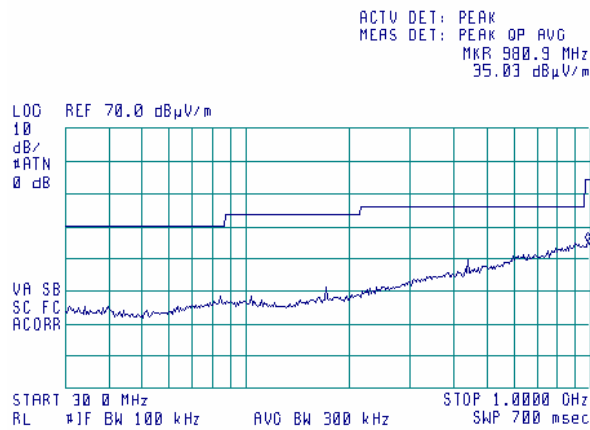

**Plot 7.5.2 Radiated emission measurements above 1000 MHz, vertical & horizontal antenna polarization**

TEST SITE: Semi anechoic chamber  
LIMIT: Class B  
TEST DISTANCE: 3 m  
EUT OPERATING MODE: Receive / Stand-by

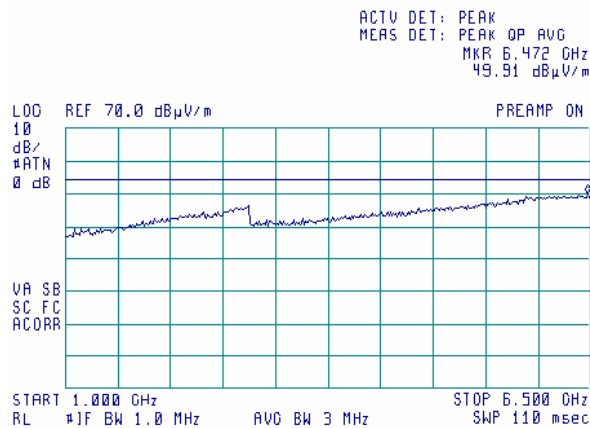

## 8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0446	Antenna, Loop active, 10kHz-30MHz	EMCO	6502	2857	28-Jun-05	28-Jun-06
0465	Anechoic Chamber 9(L) x 6.5(W) x 5.5(H) m	HL	AC - 1	023	11-Nov-05	11-Nov-06
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	26-Sep-05	26-Sep-06
0589	Cable Coaxial, GORE A2P01POL118, 2.3 m	HL	GORE-3	176	02-Dec-05	02-Dec-06
0592	Position Controller	HL	L2- SR3000 (HL CRL- 3)	100	18-May-06	18-May-07
0593	Antenna Mast, 1-4 m Pneumatic	Madgesh	AM-F1	101	02-Feb-06	02-Feb-07
0594	Turn Table FOR ANECHOIC CHAMBER flush mount d=1.2 m Pneumatic	HL	TT- WDC1	102	26-Jan-06	26-Jan-07
0604	Antenna BiconiLog Log-Periodic/T Bow- TIE 26 - 2000 MHz	EMCO	3141	9611-1011	10-Jan-06	10-Jan-07
1200	Quadruplexer 1-12 GHz (1-2 GHz; 2- 4GHz;4-8 GHz; 8-12GHz)	Elettronica S.p.A. - Roma	UE 84	D/00240	10-Feb-05	10-Feb-07
1947	Cable 18GHz, 6.5 m, blue	Rhophase Microwave Limited	NPS- 1803A- 6500-NPS	T4974	17-Oct-05	17-Oct-06
2009	Cable RF, 8 m	Alpha Wire	RG-214	C-56	02-Dec-05	02-Dec-06
2259	Amplifier Low Noise 2-20 GHz	Sophia Wireless	LNA0220- C	0223	05-Nov-05	05-Nov-06
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	03-Mar-06	03-Mar-07
2660	Capacitor feedthrough, 10 uF, 400V, 30 A	HL	CF-1	2660	05-Dec-05	05-Dec-06

## 9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: $\pm 1.7$ dB 12.4 GHz to 40 GHz: $\pm 2.3$ dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: $\pm 2.6$ dB 2.9 GHz to 6.46 GHz: $\pm 3.5$ dB 6.46 GHz to 13.2 GHz: $\pm 4.3$ dB 13.2 GHz to 22.0 GHz: $\pm 5.0$ dB 22.0 GHz to 26.8 GHz: $\pm 5.5$ dB 26.8 GHz to 40.0 GHz: $\pm 4.8$ dB
Occupied bandwidth	$\pm 8.0$ %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	$\pm 1.0$ %
Conducted emissions with LISN	9 kHz to 150 kHz: $\pm 3.9$ dB 150 kHz to 30 MHz: $\pm 3.8$ dB
Radiated emissions at 3 m measuring distance Horizontal polarization  Vertical polarization	Biconilog antenna: $\pm 5.3$ dB Biconical antenna: $\pm 5.0$ dB Log periodic antenna: $\pm 5.3$ dB Double ridged horn antenna: $\pm 5.3$ dB Biconilog antenna: $\pm 6.0$ dB Biconical antenna: $\pm 5.7$ dB Log periodic antenna: $\pm 6.0$ dB Double ridged horn antenna: $\pm 6.0$ dB

The test equipment has been calibrated according to its recommended procedures and is within the manufacturer's published limit of error. The standards and instruments used in the calibration system conform to the present requirements of ISO/IEC 17025 (or alternately ANSI/NC SL Z540-1).

The laboratory calibrates its measurement standards by a third party (traceable to NIST, USA) on a regular basis according to equipment manufacturer requirements. The Hermon Labs EMC measurements uncertainty is given in the table above.

## 10 APPENDIX C Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, telecommunications, environmental, safety standards, and by AMTAC (UK) for safety of medical devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, QA manager.

## 11 APPENDIX D Specification references

47CFR part 15: 2005	Radio Frequency Devices.
FR Vol.62	Federal Register, Volume 62, May 13, 1997
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

## 12 APPENDIX E Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
dB( $\mu$ A)	decibel referred to one microampere
DC	direct current
DTS	digital transmission system
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
ITE	information technology equipment
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
$\mu$ s	microsecond
NA	not applicable
NT	not tested
OATS	open area test site
$\Omega$	Ohm
PCB	printed circuit board
PM	pulse modulation
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

13 APPENDIX F Test equipment correction factors

**Antenna Factor**  
**Active Loop Antenna**  
**EMC Test Systems, model 6502, serial number 2857, HL 0446**

Frequency, MHz	Magnetic Antenna Factor, dB(S/m)	Electric Antenna Factor, dB(1/m)
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.7
0.750	-41.9	9.6
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.1
4.000	-41.4	10.1
5.000	-41.5	10.0
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(S/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ A/m).  
Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).

**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μV) to convert it into field intensity in dB(μV/m).

**Antenna factor**  
**Double-ridged guide horn antenna**  
**EMC Test Systems, model 3115, serial number: 00027177, HL2432**

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field intensity in dB( $\mu$ V/m).



**Cable loss**  
Cable Coaxial, GORE A2P01POL118, 2.3 m, model:GORE-3, HL 0589  
+ Cable Coaxial, ANDREW PSWJ4, 6m, model: ANDREW-6, HL 1004

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	30	0.33	≤ 6.5	±0.12
2	50	0.40		
3	100	0.57		
4	300	0.97		
5	500	1.25		
6	800	1.59		
7	1000	1.81		
8	1200	1.97		
9	1400	2.15		
10	1600	2.28		
11	1800	2.43		
12	2000	2.61		
13	2200	2.75		
14	2400	2.89		
15	2600	2.97		
16	2800	3.21	≤ 6.5	±0.12
17	3000	3.32		
18	3300	3.47		
19	3600	3.62		
20	3900	3.84		
21	4200	3.92		
22	4500	4.07		±0.17
23	4800	4.36		
24	5100	4.62		
25	5400	4.78		
26	5700	5.16		
27	6000	5.67		
28	6500	5.99		

**Cable loss**  
**Cable 18 GHz, 6.5 m, blue, model: NPS-1803A-6500-NPS, S/N T4974, HL 1947**

Frequency, GHz	Cable loss, dB
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Cable loss, dB
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92

**Cable loss**  
**RF cable 8 m, model RG-214, HL 2009**

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	1	0.10	NA	±0.12
2	10	0.14		
3	30	0.25		
4	50	0.34		
5	100	0.53		
6	300	0.99		
7	500	1.31		
8	800	1.73		
9	1000	1.98		
10	1100	2.11		
11	1200	2.21		
12	1300	2.35		
13	1400	2.46		
14	1500	2.55		
15	1600	2.68		
16	1700	2.78		
17	1800	2.88		
18	1900	2.98		
19	2000	3.09		