

NOTES: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DIMENSIONS PER ASME Y14.5M-1994.
2. REFER TO PRO/E MODEL 5049182 FOR DIMENSIONS NOT SHOWN.  .010
3. DIMENSIONS ARE IN INCHES.
4. MATERIAL: PC ABS
COLOR: BLACK
5. VOLUME: .127 CU. IN.
WEIGHT: .013 LBS.
SURFACE AREA: 6.029 SQ. IN.
6. REMOVE ALL BURRS AND SHARP EDGES.
7. FILLETS AND RADII: R 0.030 MAX
8. TOLERANCES: .XX ± .01
.XXX ± .005
ANGLES ± 1°


9.  = CTQ PER HHI SPECIFICATION QSP-06-0150-H-XXX,
I.33 Cpk REQUIRED. ALL OTHER DIMENSIONS
REQUIRE I.00 Cpk MINIMUM.

10.  = SIGNIFICANT CHARACTERISTIC
A CONTROL PLAN FOR THIS FEATURE MUST EXIST AND
MUST BE APPROVED BY HHI ENGINEERING PRIOR TO
PRODUCTION.


11.  STYLE OF LETTERING TO COMPLY WITH MASTER LOGO
DRAWING 5013797. LETTERS MUST BE CLEARLY LEGIBLE.

12. 1° DRAFT ANGLE MAX PER SIDE UNLESS OTHERWISE SPECIFIED.


13. P/N & CAVITY IDENTIFICATION RECESSED .015 MAX

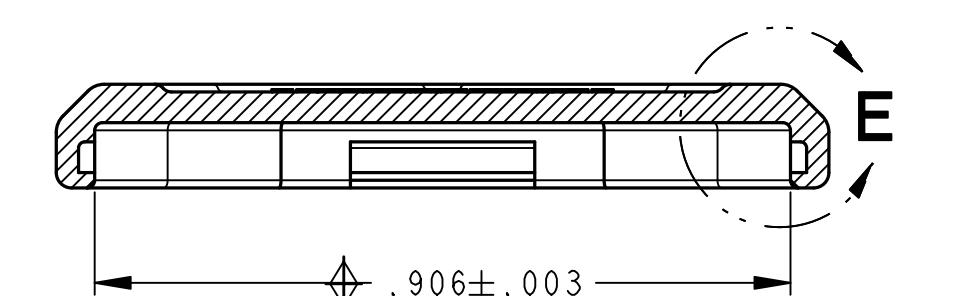




SECTION B-B

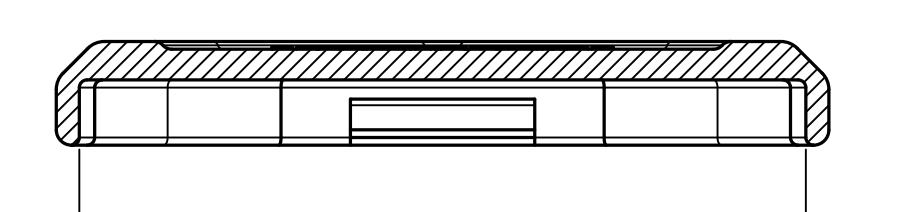

SECTION D-D

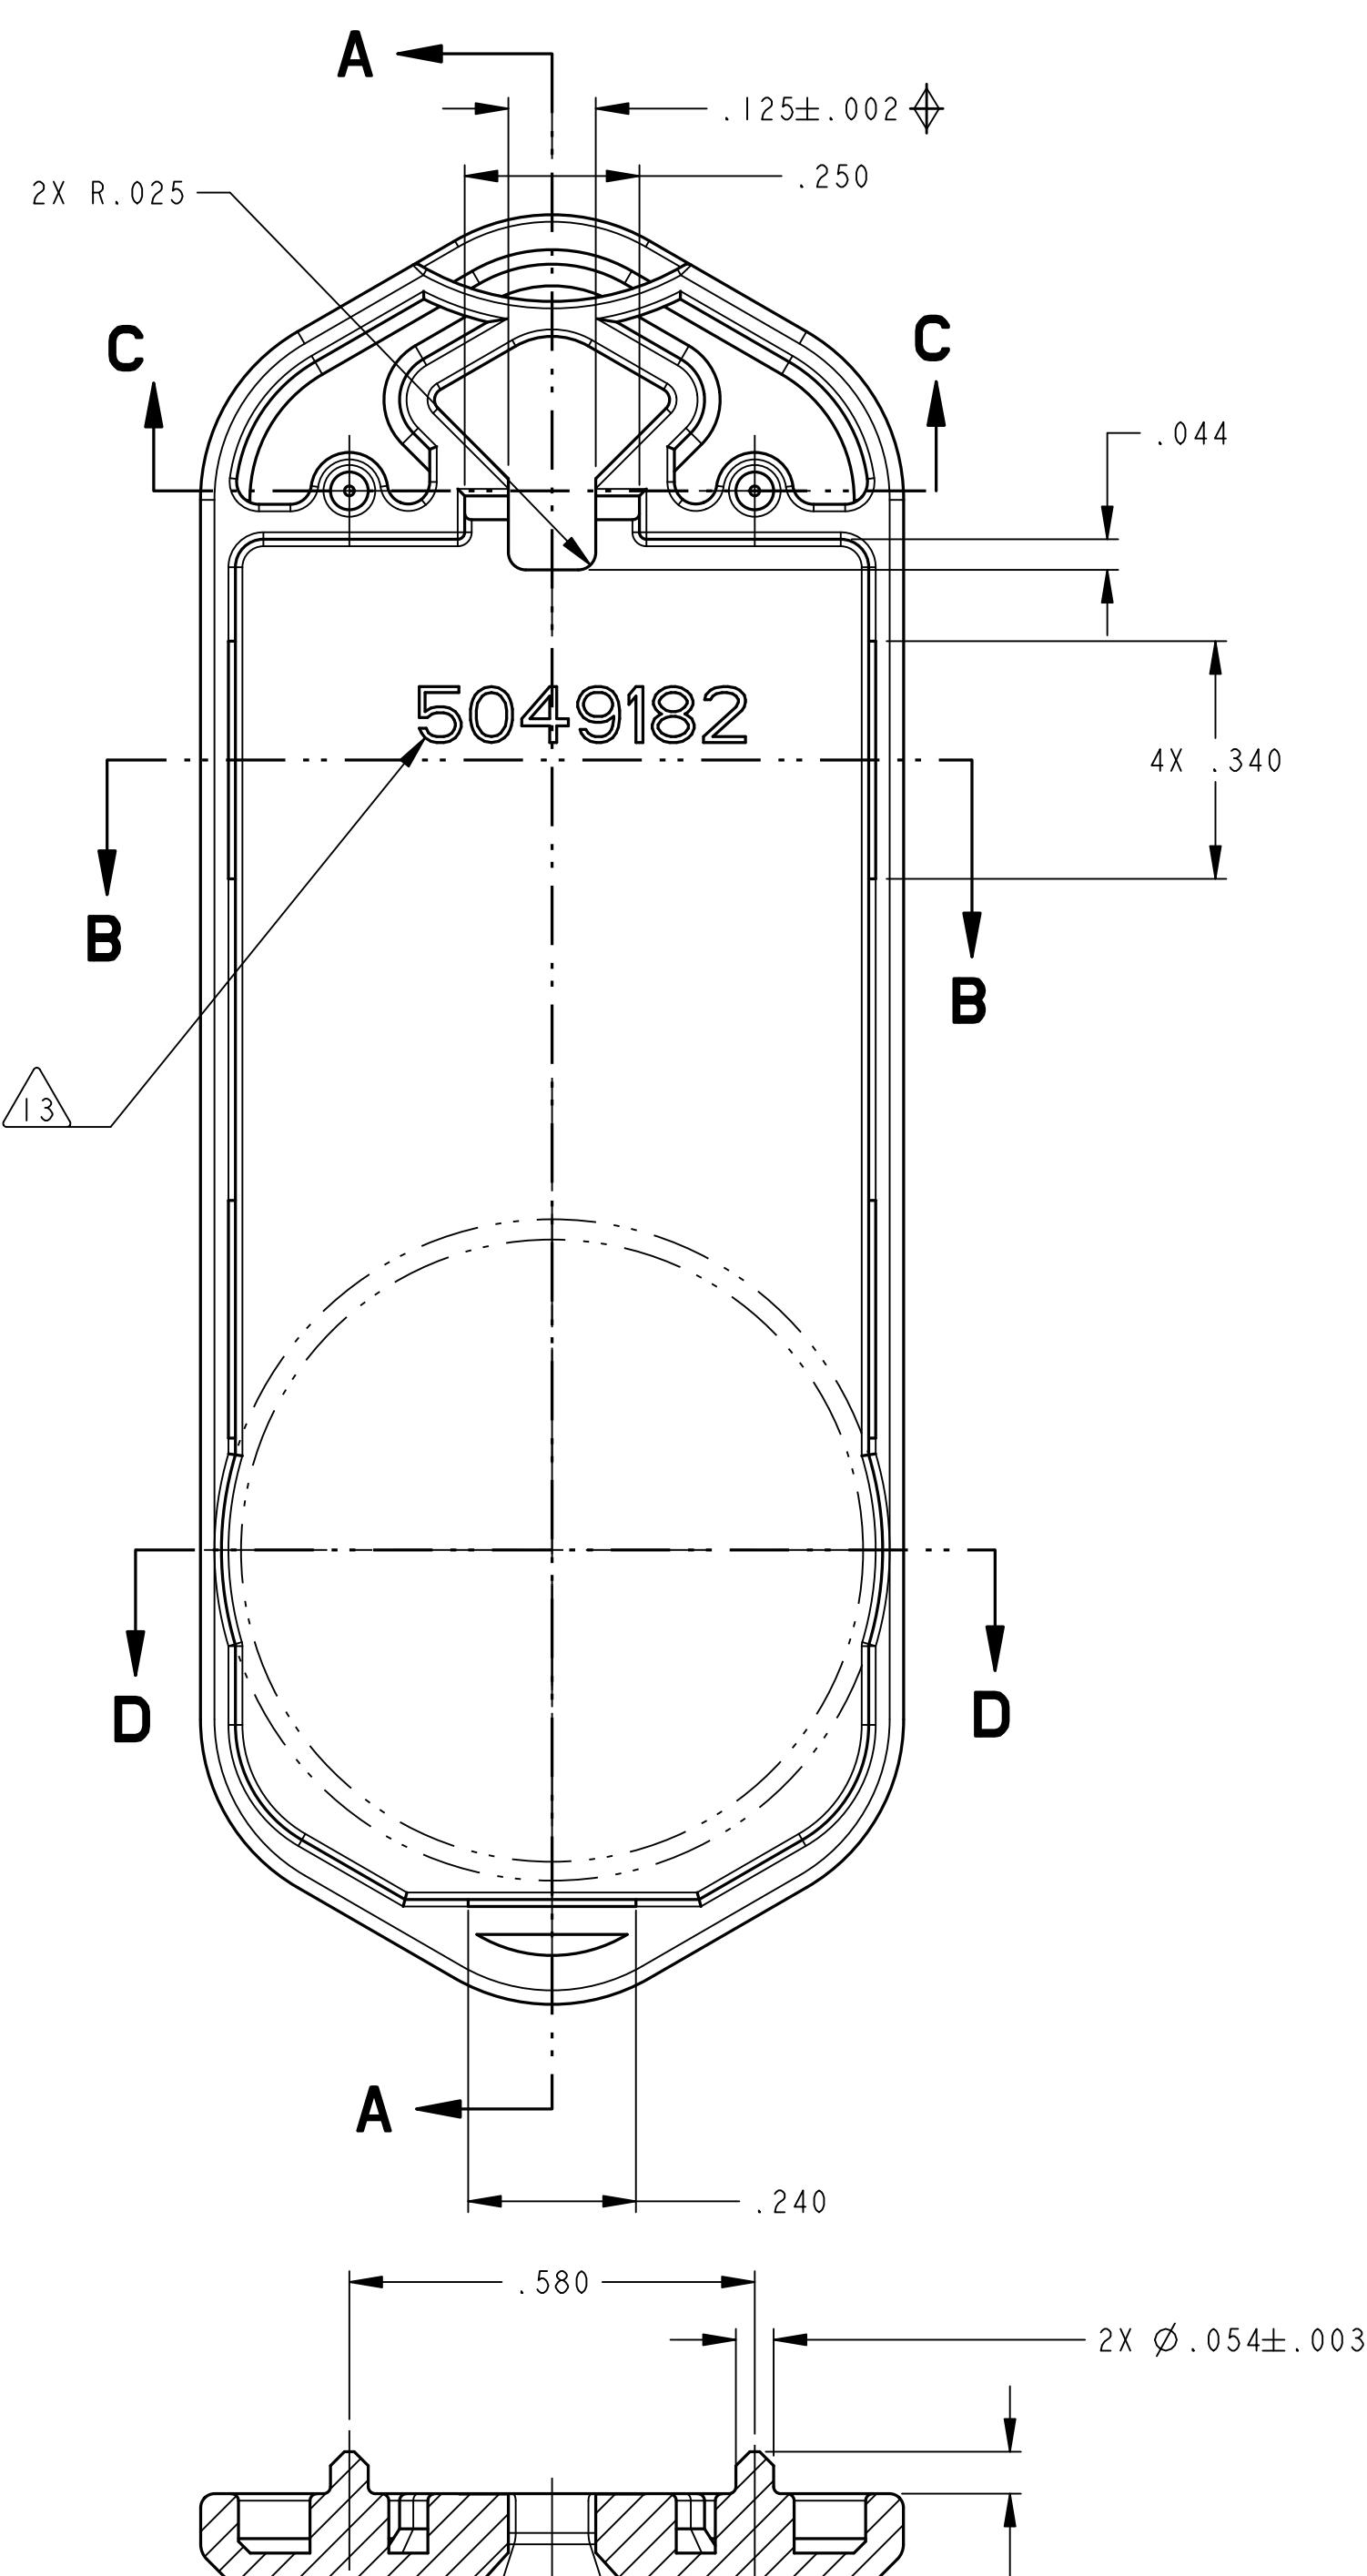

SECTION C-C

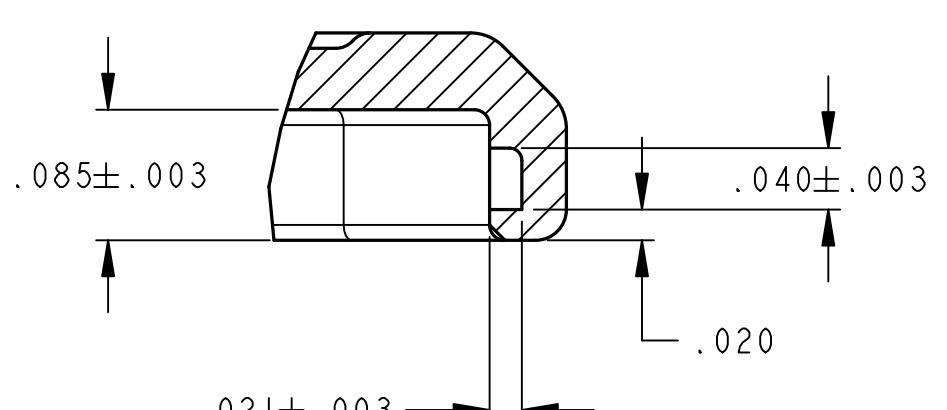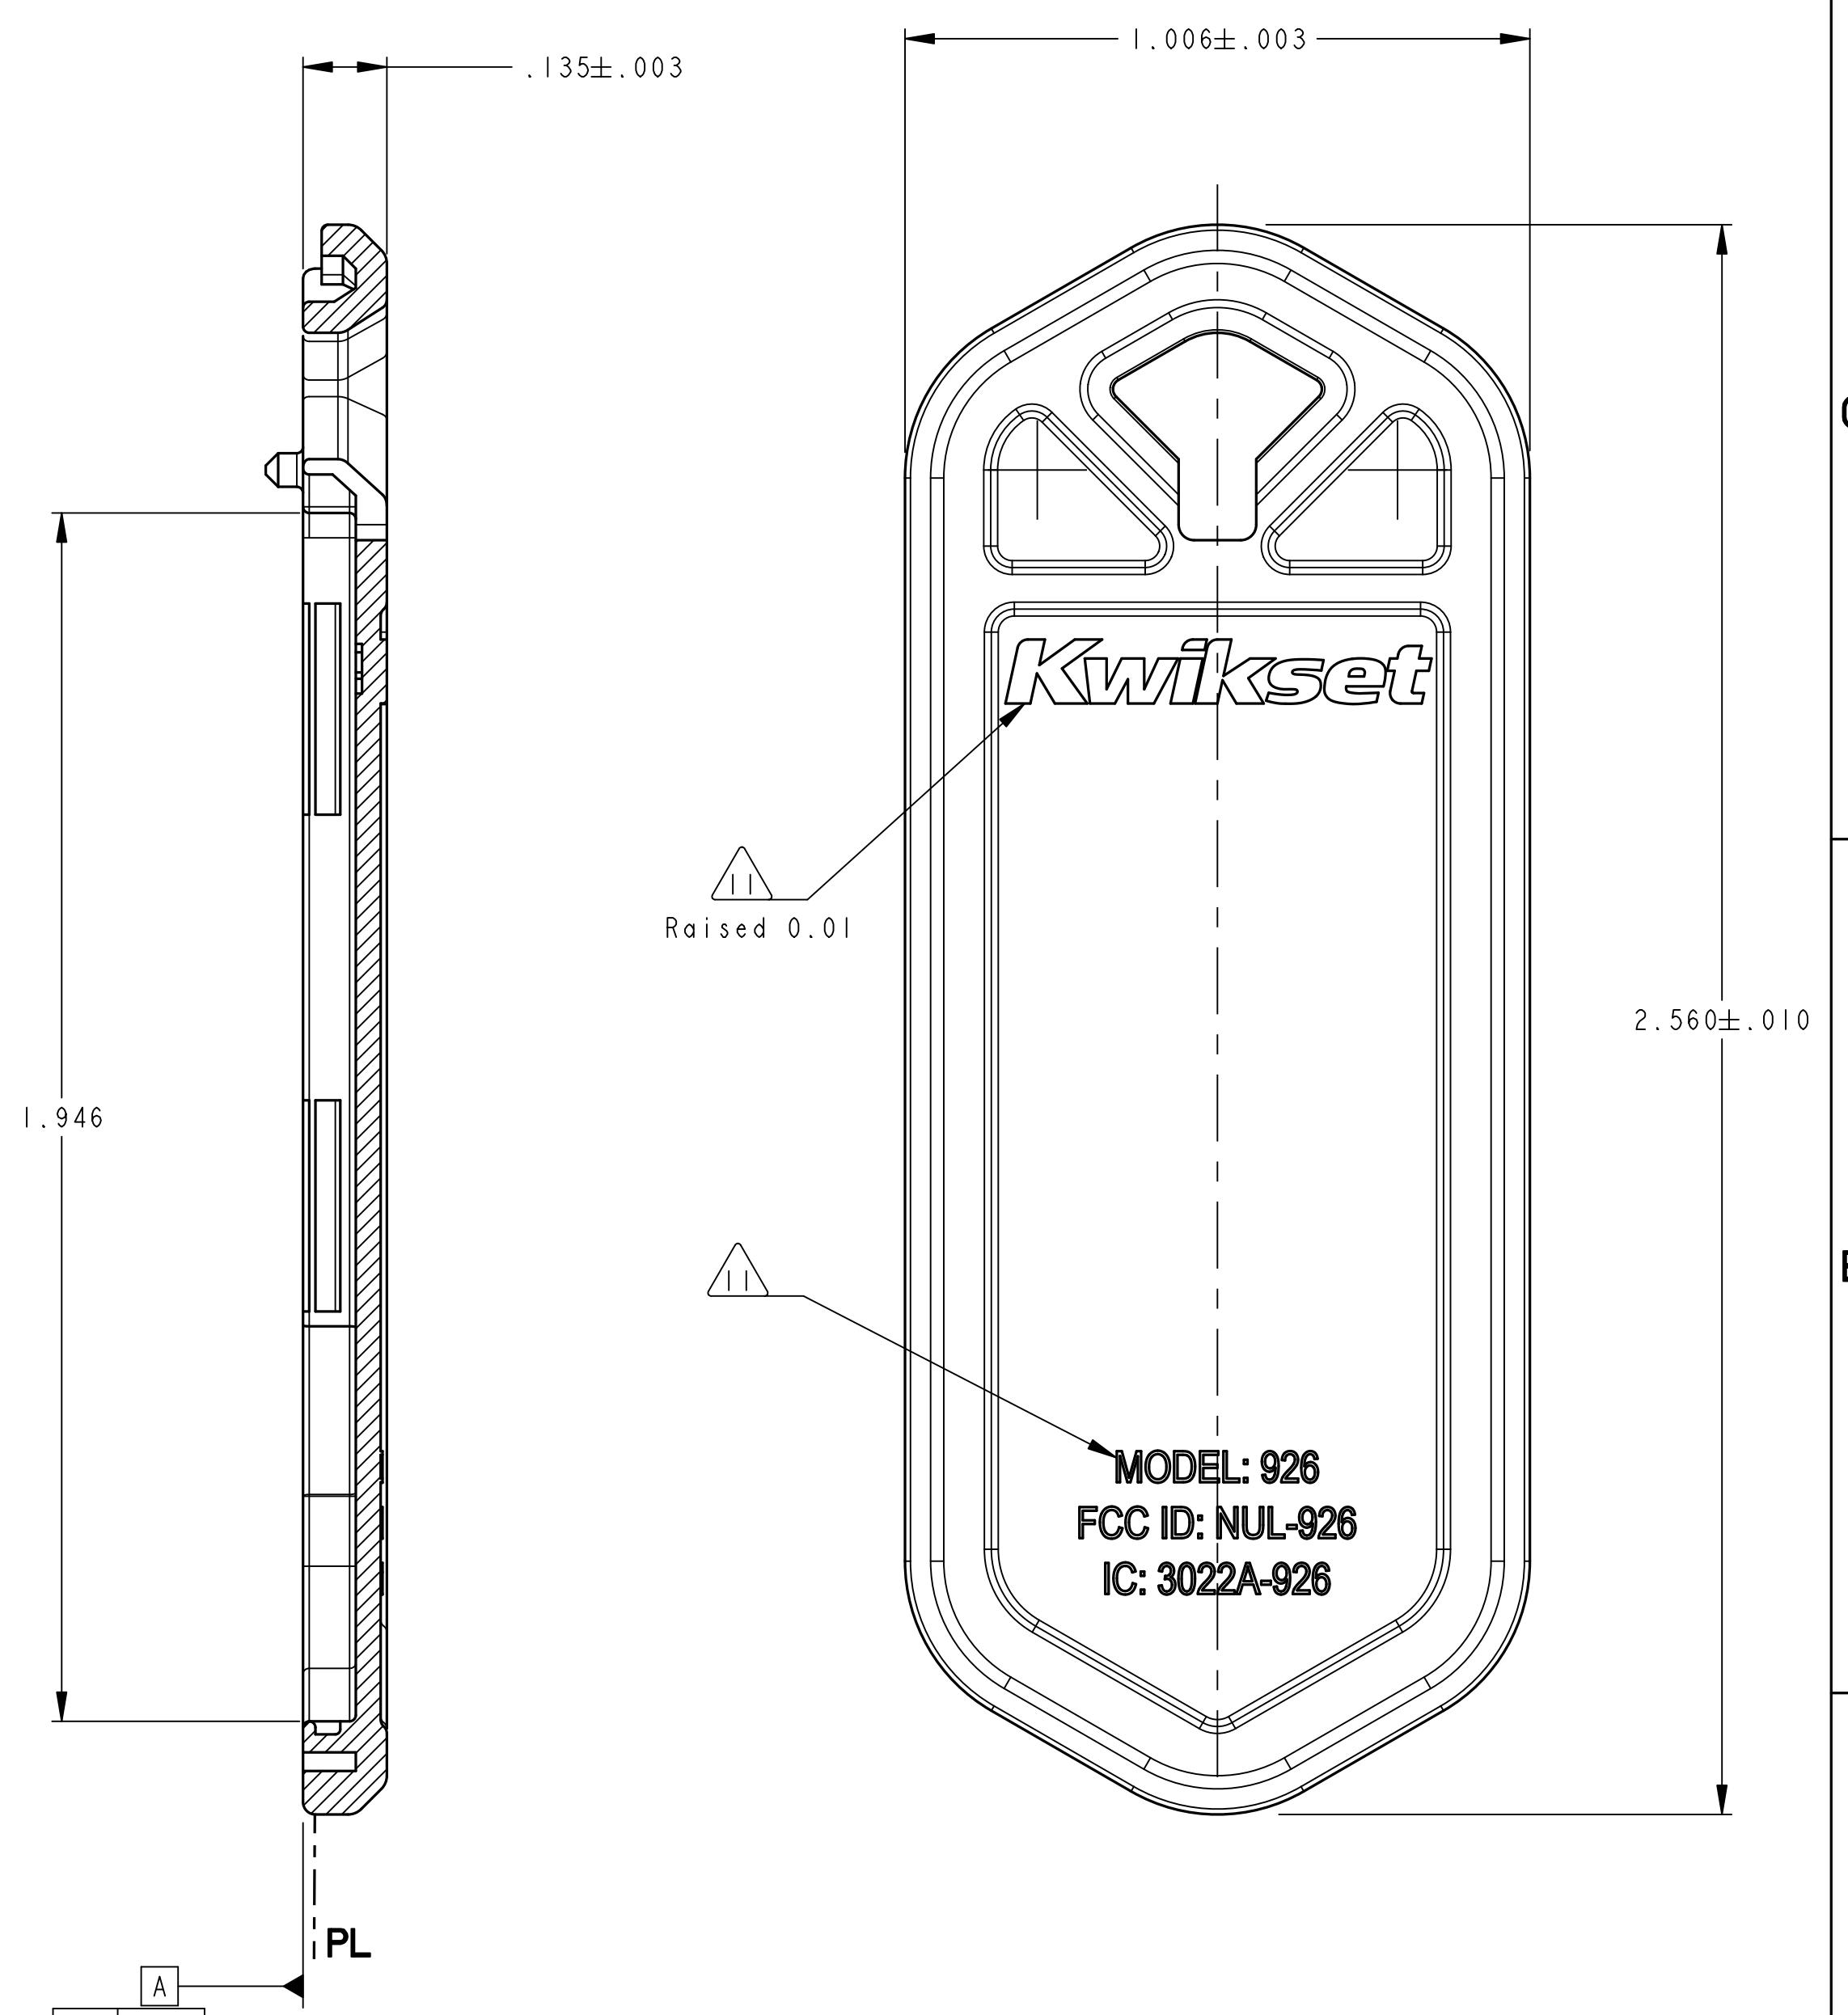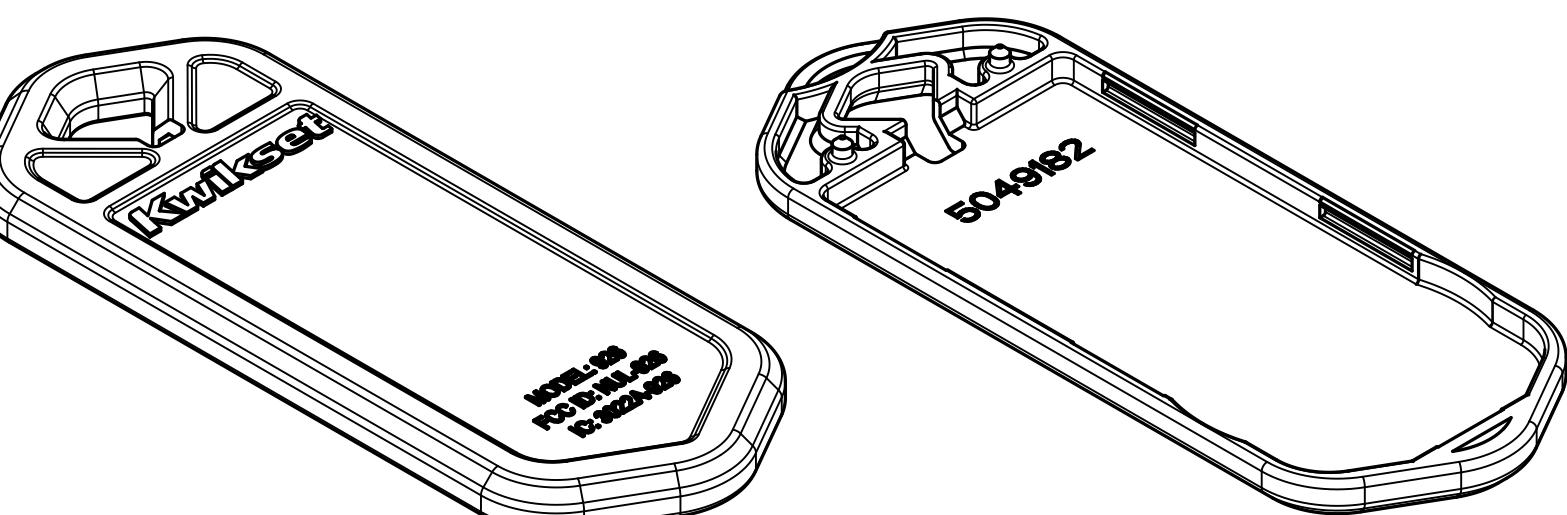DETAIL E
SCALE 8/1

SECTION A-A