

4

3



PDM REF D: 1.0 M: A.0+

1

NOTES: UNLESS OTHERWISE SPECIFIED

- I. FCC ID LABEL ON THE SBD SMARTCODE HOME CONNECT MAMBA DAUGHTER CARD, PCBA# 450-00048-001 AS THE FOLLOWING:
- A. IC: 3022A-450248CBR WHERE IC --- INDUSTRY CANADA WHERE 3022A-450248CBR --- INDUSTRY CANADA NUMBER
- B. FCC ID: NUL450248CBR WHERE NUL --- FIRST THREE CHARACTERS OF GRANTEE CODE WHERE 450248CBR --- REMAINING NUMBERS/CHARACTERS FCC ID
- C. MODEL: 450248. WHERE 450248 --- INTERNAL HHI FCC MODEL NUMBER.
- D. LABEL COLOR: BLACK.
- E. LABEL MATERIAL: REFER TO 695-00006-001 FOR LABEL SPECIFICATION.
- F. FONT: FIT ON LABEL, WHITE.
- G. LABEL LOCATION: REFER TO DRAWING 5066514.
- H. ALL DIMENSIONS ARE IN INCHES.

REV	DESCRIPTION	DATE	DRAFTER	ENGINEER	APPROVED
1	PRODUCTION RELEASE PER E011729-12	12/13/16	L. LIN	B. AQAOU	JA. LIN

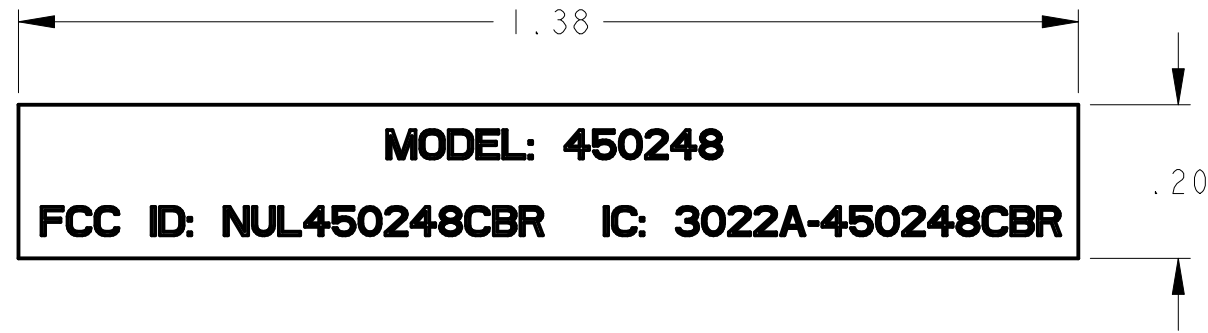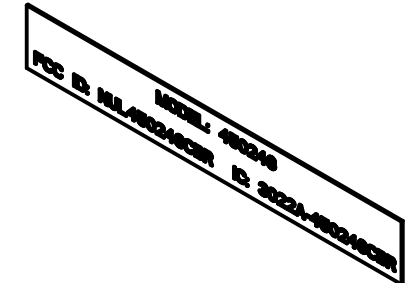

KWIKSET
Spectrum Brands | Hardware & Home Improvement

THIS DOCUMENT IS THE PROPERTY OF SPECTRUM BRANDS, INC AND/OR ITS AFFILIATES. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO SPECTRUM BRANDS. NEITHER THIS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON, COPIED, OR PUBLISHED WITHOUT SPECTRUM BRANDS' PRIOR WRITTEN CONSENT.

DRAFTER L. LIN	DATE 07/14/16	SPECTRUM BRANDS, INC HARDWARE AND HOME IMPROVEMENT 19701 DA VINCI, LAKE FOREST, CA 92610			
CHECKED B. AQAOU	DATE 07/14/16	TITLE LABEL, FCC, VHC			
ENGINEER B. AQAOU	DATE 07/14/16	SIZE B	DO NOT SCALE DRAWING	DWG NO 5064954	
APPROVED JA. LIN	DATE 07/14/16	THIRD ANGLE PROJECTION			RELEASE STATE Production
		SCALE 4/1	SHEET 1 OF 1		REV 1
				ITER 0	

4

3

2

1



FCC ID: NUL450248CBBR MODEL: 450248 IC: 3022A-450248CBBR



WS Packaging Group, Inc.®

Leaders in Printing and Packaging Worldwide

PRODUCTION SPECIFICATION SHEET

Item Code: R2WPET-PERM-50KRAF-104

Old FAL: 0097-0H52-0002

Total Construction Caliper: 6 mils +/- 10%

FACESHEET: A white topcoated polyester featuring excellent tear strength, heat resistance, dimensional stability, opacity, and chemical resistance. Excellent thermal transfer printability with some resin enhanced wax and most resin based ribbons.

Caliper: 2 mil +/- 10%

ADHESIVE: A high performance permanent adhesive with balanced adhesion to a wide variety of substrates, including low surface energy plastics, engineering grade plastics, bare, coated, or painted metals, including powder coat and enamel paints. It features medium tack and excellent chemical and UV resistance for outdoor industrial applications.

Minimum Application Temperature: +50° F

Service Temperature Range: - 40°F - + 302° F

LINER: A 50# bleached super-calendered paper kraft liner for roll to roll label applications.

Caliper: 3.2 mil +/- 10%

UL and c-UL Recognized.

Shelf Life:

One year when stored at 72°F at 50% RH

All original documents remain on file at WS Packaging Group, Algoma, Wisconsin.