

**FCC PART 15 SUBPART B & SUBPART C SECTION 15.249,
RSS 210, & RSS GEN
TEST REPORT**

for

**VALUE HOME CONNECT, Z-WAVE PLUS
Model: 450248**

Prepared for

SPECTRUM BRANDS
19701 DAVINCI
LAKE FOREST, CA 92610

Prepared by: _____

TOREY OLIVER

Reviewed by: _____

MATT HARRISON

COMPATIBLE ELECTRONICS INC.
20621 PASCAL WAY
LAKE FOREST, CALIFORNIA 92630
(949) 587-0400

DATE: JUNE 19th, 2017

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	17	2	2	2	11	14	48

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	10
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Facility Environmental Characteristics	13
6.4 Measurement Uncertainty	13
7. CHARACTERISTICS OF THE TRANSMITTER	14
7.1 Channel Number and Frequencies	14
7.2 Antenna	14
8. TEST PROCEDURES	15
8.1 RF Emissions	15
9. TEST PROCEDURE DEVIATIONS	17
10. CONCLUSIONS	17



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos <ul style="list-style-type: none">• Test Setup Diagrams• Antenna and Amplifier Factors• Radiated Emissions Photos
E	Radiated Emissions Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map and Layout of Test Site Below 1GHz
2	Plot Map and Layout of Test Site Above 1GHz



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: Value Home Connect, Z-Wave Plus
Model: 450248
S/N: None

Product Description: The EUT is an electronic lock.

Modifications: The EUT was not modified in order to comply with specifications.

Manufacturer: Spectrum Brands
19701 DaVinci
Lake Forest, CA 92610

Test Date: June 16th & 19th, 2017

Test Specifications covered by accreditation:



Test Specifications: EMI requirements

CFR Title 47, Part 15 Subpart B Sections 15.107, 15.109, Subpart C Sections 15.205, 15.207, 15.209, and 15.249

RSS 210 & RSS GEN

Test Procedure: ANSI C63.4 & C63.10



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz.	The EUT is battery powered; therefore, this test was not performed.
2	Radiated RF Emissions & Harmonics, 9 kHz – 10,000 MHz Tx and Rx Modes	Complies with the limits of CFR Title 47 Part 15 Subpart B Section 15.109 & Subpart C Sections 15.205, 15.209, & 15.249, RSS 210 & RSS GEN
3	Fundamental Field Strength	Complies with the limits of CFR Title 47 Part 15 Subpart C Section 15.249 & RSS 210
4	Emissions Radiated Outside of the Fundamental Frequency Band	Complies with the limits of CFR Title 47 Part 15 Subpart B Section 15.109 & Subpart C Sections 15.205, 15.209, & 15.249, RSS 210 & RSS GEN
5	Occupied Bandwidth	Complies with the limits of RSS 210 & RSS GEN

**TABLE 1:
SIX HIGHEST RADIATED EMISSIONS READINGS**

	Reading Type (PK / QP / AV)	Polarization (Vert / Horz)	Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Delta (dB)	Test Distance
1	QP	V	916.00	91.83	93.97	-2.14	3-Meter
2	QP	V	908.40	91.24	93.97	-2.73	3-Meter
3	QP	H	916.00	88.73	93.97	-5.24	3-Meter
4	QP	H	908.40	86.75	93.97	-7.22	3-Meter
5	QP	V	754.60	29.75	46.00	-16.25	3-Meter
6	QP	H	739.70	29.62	46.00	-16.38	3-Meter



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Value Home Connect, Z-Wave Plus Model: 450248. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 & C63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart B sections 15.109, & Part 15 Subpart C sections 15.205, 15.209, 15.249, RSS GEN, & RSS 210.



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.4 2014	Methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10: 2013	American National Standard for Testing Unlicensed Wireless Devices
RSS GEN	General Requirements for Compliance of Radio Apparatus
RSS 210	Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration

The Value Home Connect, Z-Wave Plus Model: 450248 (EUT) was setup in a tabletop configuration. The EUT was checked in all 3 axes. The worst case was found to be the X-Axis. The EUT was continuously transmitting a data stream during transmit mode tests and continuously receiving during receive mode tests. The spurious emissions were checked with live scans and data for the worst case mode was recorded and provided.

The tests were performed using new batteries.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. The final radiated data was taken in the above configuration. Please see Appendix E for the test data.

4.1.1 *Photograph Test Configuration (X-Axis)*



4.1.2 Cable Construction and Termination

There were no interconnecting cables.

4.1.3 Axis Determination



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

#	EQUIPMENT TYPE	MANU-FACTURER	MODEL	SERIAL NUMBER
1	VALUE HOME CONNECT, Z-WAVE PLUS (EUT)	SPECTRUM BRANDS	450248	NONE
2	BATTERIES (4)	RAYOVAC	AA	NONE

5.1.1 Software Used to Exercise the Transmitter:

Version 4.47, Date: 01/04/2017, Storage Location: Spectrum Brands, Inc. located at:
\\ad.spectrumhhi.com\Groups\LKF\Shared\Engineering\Electronics\10. Released Notes, Docs & Firmware\Firmware Releases For QA\Z-Wave Daughter Card\ValueHomeConnect



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Computer	Compatible Electronics	NONE	NONE	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100172	09/22/2016	09/22/2017
Antenna, Loop	Com Power	AL-130	121049	12/06/2015	12/06/2017
Antenna, CombiLog	Com Power	AC-220	25857	05/19/2016	05/19/2018
Antenna, Horn 1-18GHz	Com Power	AH-118	071250	5/17/2016	5/17/2018
Pre-Amp, 1-18GHz	Com Power	PAM-118A	551033	5/17/2016	5/17/2018
High Pass Filter	AMTI Microwave Circuits	H3G020G4	481230	8/26/2015	8/26/2017
Mast, Antenna Positioner	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Antenna Mast	Sunol Science Corporation	TWR 95-4	020808-3	N/A	N/A
Turntable	Sunol Science Corporation	FM 2001	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Science Corporation	SC104V	020808-1	N/A	N/A



6. TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 and the figures in Appendix D of this report for test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 by 0.8-meter-high non-conductive table, which was placed on the ground plane.

For above 1GHz testing the EUT was placed 1.5 meters above the ground plane.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.

6.4 Measurement Uncertainty

“Compatible Electronics’ U_{lab} value is less than U_{cispr} , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_c(y) = \sqrt{\sum_i c_i^2 u^2(x_i)}$$

Measurement		U_{cispr}	$U_{lab} = 2 u_c(y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3,6 dB	2.88
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1 000 MHz)	5,2 dB	3.53



7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequencies

There is a total of two channels. The low channel is 908.4 MHz and the high channel is at 916 MHz. The EUT uses GFSK and FSK modulation.

7.2 Antenna

The Antenna is made of up a trace on the PCB.



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions


8.1.1 *Conducted Emissions Test*

Test Results: The EUT is battery powered; therefore, this test was not performed.

The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The different configurations were investigated to find the worst case as well the worst-case channel. The final data was collected under program control by the computer software. The final qualification data is located in Appendix E.

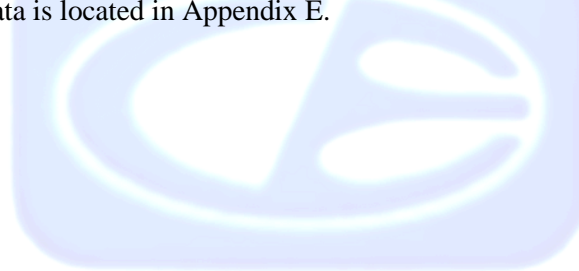

8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps. Amplifiers were used to increase the sensitivity of the instrument. There was one Microwave Preamplifier used for frequencies above 1 GHz.

For spurious emissions, the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the non-intentional, harmonic, and fundamental emissions a linear average was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	100 kHz (120 kHz for QP Measurements)
1000 to 10000	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4 & ANSI C63.10. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart B section 15.109, & Part 15 Subpart C sections 15.205, 15.209, 15.249, RSS GEN, & RSS 210. The six highest emissions are listed in table 1.



8.1.3 *Fundamental Field Strength*

The Peak Transmit Radiated Field Strength was measured at a 3-meter test distance. The EMI Receiver was used to obtain the final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.249 & RSS 210.

8.1.4 *Emissions Radiated Outside of the Fundamental Frequency Band*

The Band Edge measurement was measured using the EMI Receiver at a 3-meter test distance to obtain the final test data. The lower and upper channels were tuned during the low and high band edge tests. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.205, 15.249, RSS GEN, & RSS 210.

9. **TEST PROCEDURE DEVIATIONS**

The test procedures were not deviated from throughout all tests.

10. **CONCLUSIONS**

The Value Home Connect, Z-Wave Plus Model: 450248 meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart B section 15.109, & Subpart C sections 15.205, 15.209, 15.249, RSS GEN, & RSS 210.



APPENDIX A



***LABORATORY ACCREDITATIONS AND
RECOGNITIONS***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit

<http://celectronics.com/quality/scope/>

Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."

IC OAT's Test Site Registration Number: 2154C-1



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX B

MODIFICATIONS TO THE EUT



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700


Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

MODIFICATIONS TO THE EUT

There were no modifications were made during testing.



APPENDIX C

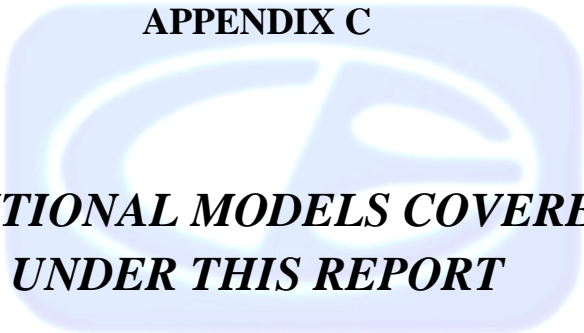

***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT


USED FOR THE PRIMARY TEST

VALUE HOME CONNECT, Z-WAVE PLUS
MODEL: 450248
S/N: NONE

No additional models were tested.




APPENDIX D

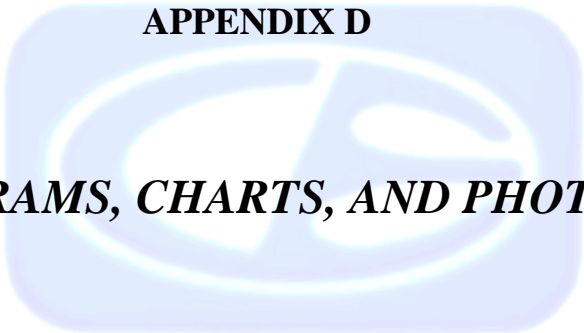


DIAGRAMS, CHARTS, AND PHOTOS



FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE BELOW 1GHZ

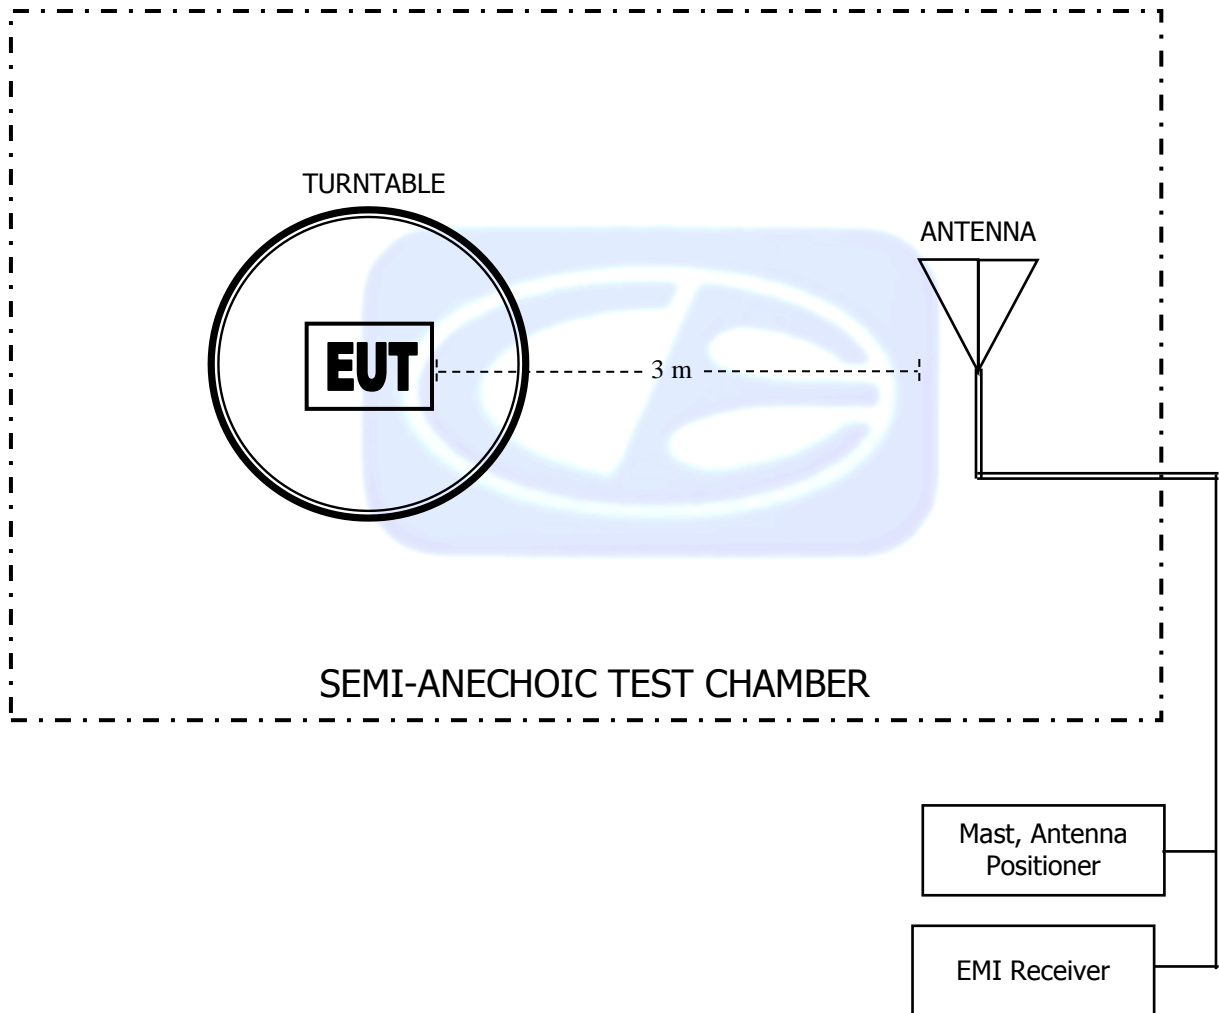

**FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE
ABOVE 1GHZ**

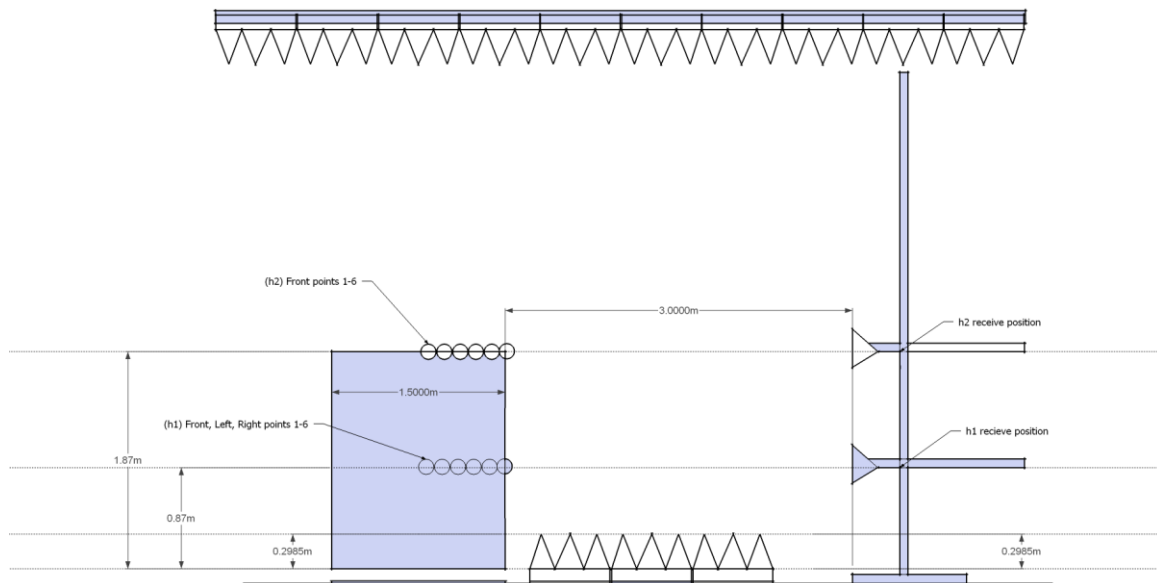

COM-POWER AL-130**LOOP ANTENNA**

S/N: 121049

CALIBRATION DUE: DECEMBER 6, 2017

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)	FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-34.64	16.86	0.8	-36.32	15.18
0.01	-34.78	16.72	0.9	-36.22	15.28
0.02	-35.91	15.59	1.0	-36.22	15.28
0.03	-35.48	16.02	2.0	-35.91	15.59
0.04	-35.82	15.68	3.0	-35.91	15.59
0.05	-36.49	15.01	4.0	-36.01	15.49
0.06	-36.30	15.20	5.0	-35.80	15.70
0.07	-36.43	15.07	6.0	-36.00	15.50
0.08	-36.30	15.20	7.0	-35.90	15.60
0.09	-36.39	15.11	8.0	-35.70	15.80
0.1	-36.41	15.09	9.0	-35.70	15.80
0.2	-36.61	14.89	10.0	-35.60	15.90
0.3	-36.63	14.87	15.0	-36.52	14.98
0.4	-36.52	14.99	20.0	-35.75	15.75
0.5	-36.63	14.87	25.0	-37.78	13.72
0.6	-36.62	14.88	30.0	-38.62	12.88
0.7	-36.53	14.97			



COM-POWER AC-220**LAB R - COMBILOG ANTENNA**

S/N: 25857

CALIBRATION DUE: MAY 19, 2018

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	23.4	180	14.0
35	23.6	200	15.0
40	24.2	250	17.7
45	23.7	300	19.0
50	22.9	350	18.2
60	20.6	400	20.2
70	15.0	500	21.8
80	13.0	600	24.0
90	14.1	700	26.2
100	15.1	800	25.6
120	15.8	900	26.7
140	13.6	1000	28.2
160	14.4		



COM-POWER AH-118**HORN ANTENNA**

S/N: 071250

CALIBRATION DUE: MAY 17, 2018

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	24.40	9500	39.11
1500	25.61	10000	39.38
2000	28.71	10500	39.55
2500	29.09	11000	39.66
3000	30.24	11500	40.28
3500	30.94	12000	40.26
4000	31.77	12500	40.64
4500	32.29	13000	41.33
5000	33.70	13500	41.74
5500	34.28	14000	41.52
6000	34.83	14500	41.80
6500	35.07	15000	43.51
7000	36.79	15500	41.03
7500	37.45	16000	40.88
8000	37.67	16500	40.18
8500	37.75	17000	42.59
9000	38.15	17500	44.49
		18000	45.27



COM-POWER PAM-118A**1-18GHz - PREAMPLIFIER****S/N: 551033****CALIBRATION DUE: MAY 17, 2018**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
500	41.06	5500	40.63
1000	41.06	6000	40.18
1100	41.12	6500	40.33
1200	41.09	7000	39.97
1300	41.20	7500	40.45
1400	41.28	8000	39.83
1500	41.34	8500	39.79
1600	41.37	9000	39.71
1700	41.43	9500	39.80
1800	41.47	10000	41.07
1900	41.53	11000	40.05
2000	41.59	12000	40.21
2500	41.87	13000	40.61
3000	42.13	14000	39.09
3500	42.21	15000	39.36
4000	42.22	16000	38.32
4500	41.53	17000	38.32
5000	41.16	18000	36.85





FRONT VIEW

SPECTRUM BRANDS

VALUE HOME CONNECT, Z-WAVE PLUS

Model: 450248

FCC SUBPART B & C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





REAR VIEW

SPECTRUM BRANDS


VALUE HOME CONNECT, Z-WAVE PLUS

Model: 450248

FCC SUBPART B & C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



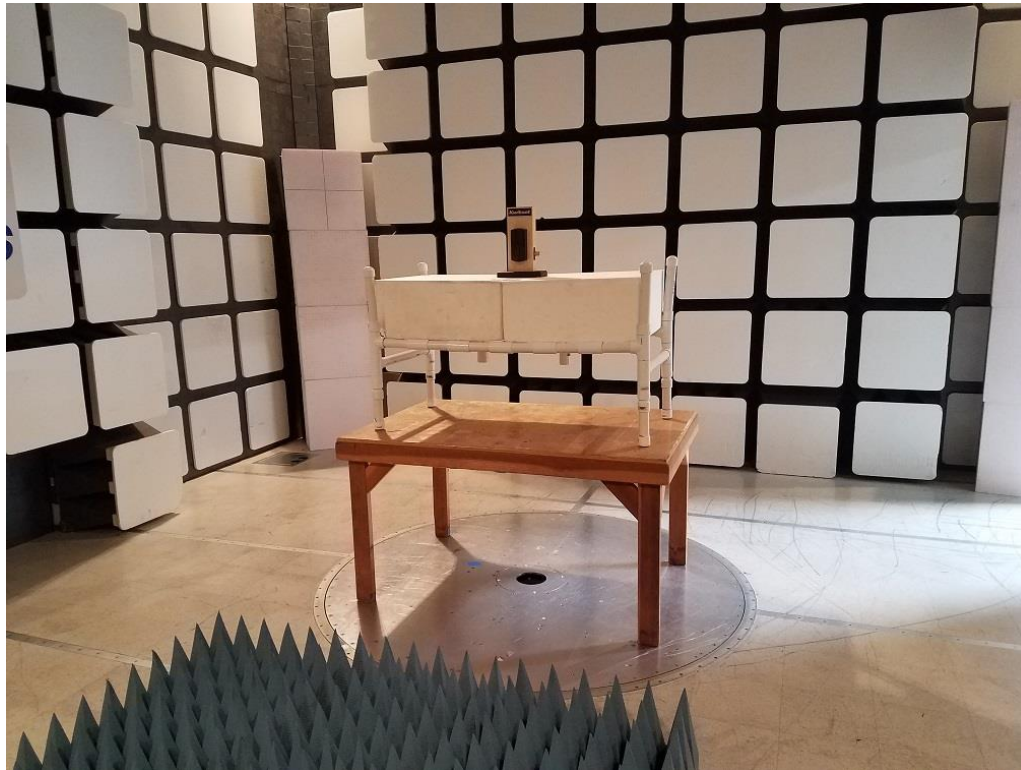

FRONT VIEW

SPECTRUM BRANDS

VALUE HOME CONNECT, Z-WAVE PLUS

Model: 450248

FCC SUBPART B & C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





REAR VIEW

SPECTRUM BRANDS

VALUE HOME CONNECT, Z-WAVE PLUS

Model: 450248

FCC SUBPART B & C - RADIATED EMISSIONS > 1GHz

PHOTOGRAPH SHOWING THE EUT CONFIGURATION

FOR MAXIMUM EMISSIONS



APPENDIX E



RADIATED EMISSIONS DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600


Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209
 File: Radiated Pre-Scan 30-1000Mhz.set
 Operator: Torey Oliver
 EUT Type: Electronic Lock / VHC 2
 EUT Condition: The EUT is constantly transmitting 916MHz.
 Comments: Temp: 72f
 Hum: 58%
 Battery Powered

6/16/2017 3:41:35 PM
 Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (Lab R)

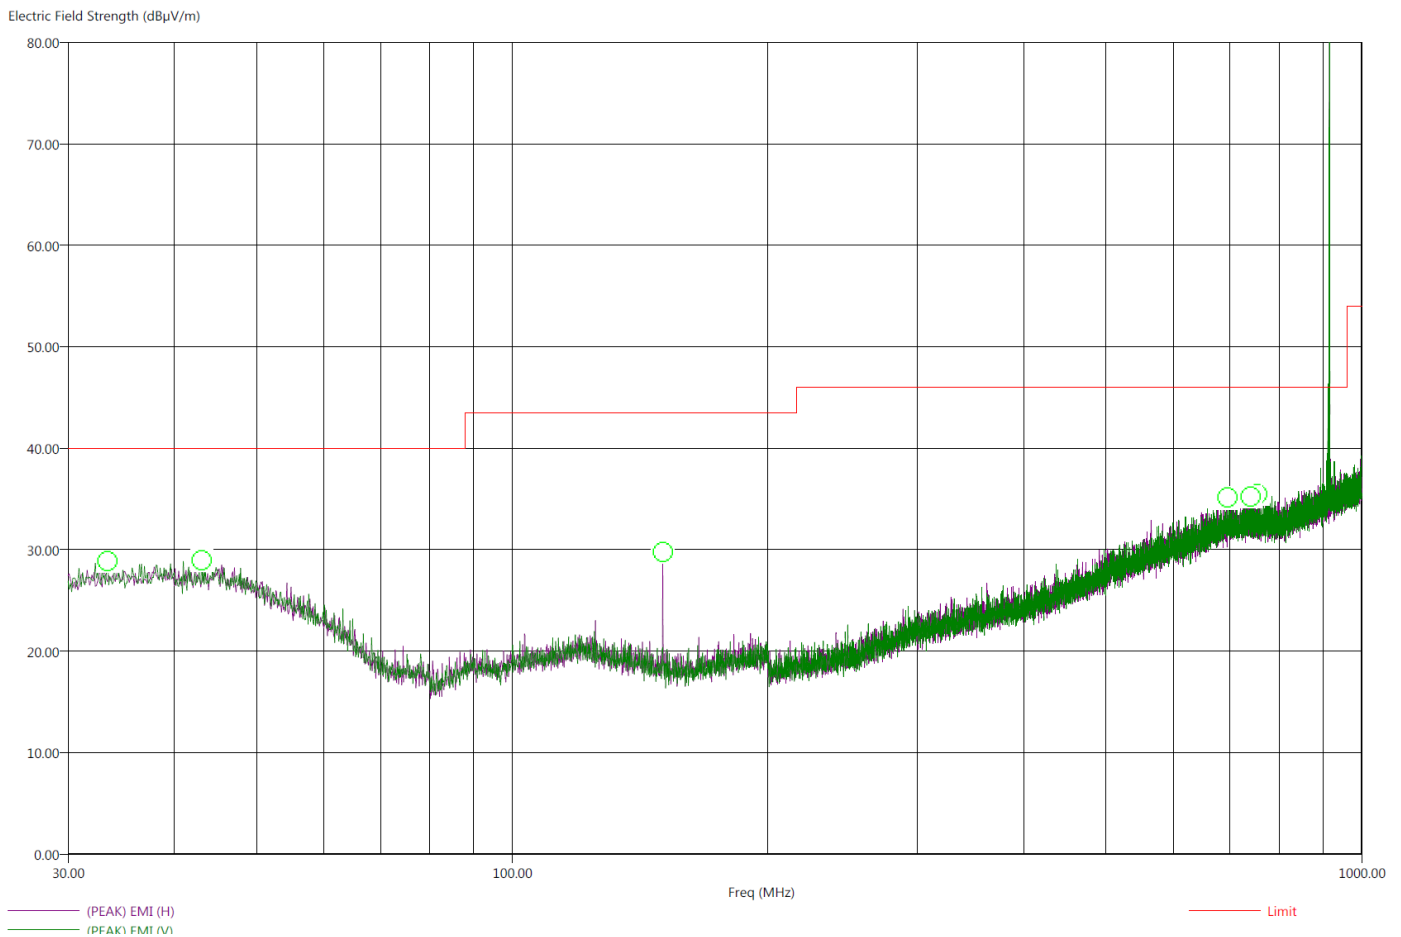

*There were no radiated emissions other than harmonics found below 30 MHz or above 1GHz.
 This is the worst-case channel and mode for spurious emissions.*



Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500

Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

Title: FCC 15.209

6/16/2017 4:02:46 PM

File: Radiated Final 30-1000Mhz.set

Sequence: Final Measurements

Operator: Torey Oliver

EUT Type: Electronic Lock / VHC 2

EUT Condition: The EUT is constantly transmitting 916MHz.

Comments: Temp: 72f

Hum: 58%

Battery Powered

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dBμV/m)	(PEAK) EMI (dBμV/m)	Limit (dBμV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer(dB)	Cable (dB)
33.40	-17.31	22.69	27.90	40.00	V	333.25	228.17	23.67	0.51
43.10	-16.59	23.41	28.13	40.00	V	56.75	245.58	24.09	0.54
150.40	-22.63	20.89	26.48	43.52	H	181.25	235.70	13.92	0.99
694.90	-16.56	29.44	35.40	46.00	V	153.75	393.82	26.50	2.53
739.70	-16.38	29.62	34.39	46.00	V	3.00	141.82	26.43	2.60
754.60	-16.25	29.75	35.17	46.00	V	95.50	393.88	26.37	2.62

There were no radiated emissions other than harmonics found below 30 MHz or above 1GHz.
This is the worst-case channel and mode.

Brea Division
 114 Olinda Drive
 Brea, CA 92823
 (714) 579-0500


Agoura Division
 2337 Troutdale Drive
 Agoura, CA 91301
 (818) 597-0600

Silverado Division
 19121 El Toro Road
 Silverado, CA 92676
 (949) 589-0700

Lake Forest Division
 20621 Pascal Way
 Lake Forest, CA 92630
 (949) 587-0400

FUNDAMENTAL & HARMONICS

DATA SHEETS

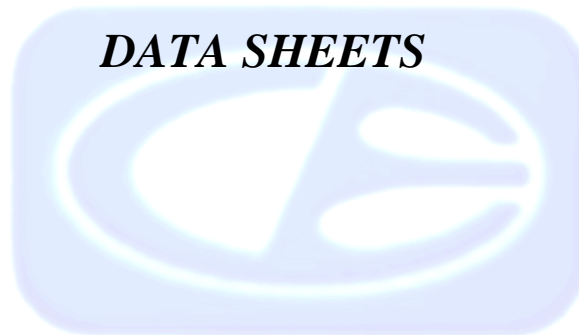

FUNDAMENTAL FIELD STRENGTH

FCC 15.249Company: Kwikset
EUT: Electronic Lock
Model: VHC 2Date: 6/16/2017
Lab: P
Tested By: Torey Oliver**Compatible Electronics, Inc. FAC-3**

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table	Tower	Comments
908.40	86.75	H	93.97	-7.22	Peak	81	1.23	
908.40	91.62	V	93.97	-2.73	Peak	0	1.00	
916.00	88.73	H	93.97	-5.24	Peak	66	1.17	
916.00	91.93	V	93.97	-2.14	Peak	0	1.00	

Test distance
3 meter

HARMONICS LOW CHANNEL HORIZONTAL

FCC 15.249

 Company: Kwikset
 EUT: Electronic Lock
 Model: VHC 2

 Date: 6/19/2017
 Lab: R
 Tested By: Torey Oliver

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1816.8		H	73.98		Peak			No Emissions Found
1816.8		H	53.98		Avg			No Emissions Found
2725.2		H	73.98		Peak			No Emissions Found
2725.2		H	53.98		Avg			No Emissions Found
3633.6		H	73.98		Peak			No Emissions Found
3633.6		H	53.98		Avg			No Emissions Found
4542.0		H	73.98		Peak			No Emissions Found
4542.0		H	53.98		Avg			No Emissions Found
5450.4		H	73.98		Peak			No Emissions Found
5450.4		H	53.98		Avg			No Emissions Found
6358.8		H	73.98		Peak			No Emissions Found
6358.8		H	53.98		Avg			No Emissions Found
7267.2		H	73.98		Peak			No Emissions Found
7267.2		H	53.98		Avg			No Emissions Found
8175.6		H	73.98		Peak			No Emissions Found
8175.6		H	53.98		Avg			No Emissions Found
9084.0		H	73.98		Peak			No Emissions Found
9084.0		H	53.98		Avg			No Emissions Found

 Test distance
 3 meter


HARMONICS LOW CHANNEL VERTICAL

FCC 15.249

Company: Kwikset
 EUT: Electronic Lock
 Model: VHC 2

Date: 6/19/2017
 Lab: R
 Tested By: Torey Oliver

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1816.8		V	73.98		Peak			No Emissions Found
1816.8		V	53.98		Avg			No Emissions Found
2725.2		V	73.98		Peak			No Emissions Found
2725.2		V	53.98		Avg			No Emissions Found
3633.6		V	73.98		Peak			No Emissions Found
3633.6		V	53.98		Avg			No Emissions Found
4542.0		V	73.98		Peak			No Emissions Found
4542.0		V	53.98		Avg			No Emissions Found
5450.4		V	73.98		Peak			No Emissions Found
5450.4		V	53.98		Avg			No Emissions Found
6358.8		V	73.98		Peak			No Emissions Found
6358.8		V	53.98		Avg			No Emissions Found
7267.2		V	73.98		Peak			No Emissions Found
7267.2		V	53.98		Avg			No Emissions Found
8175.6		V	73.98		Peak			No Emissions Found
8175.6		V	53.98		Avg			No Emissions Found
9084.0		V	73.98		Peak			No Emissions Found
9084.0		V	53.98		Avg			No Emissions Found

Test distance
 3 meter



HARMONICS HIGH CHANNEL HORIZONTAL

FCC 15.249

 Company: Kwikset
 EUT: Electronic Lock
 Model: VHC 2

 Date: 6/19/2017
 Lab: R
 Tested By: Torey Oliver

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1832.0		H	73.98		Peak			No Emissions Found
1832.0		H	53.98		Avg			No Emissions Found
2748.0		H	73.98		Peak			No Emissions Found
2748.0		H	53.98		Avg			No Emissions Found
3664.0		H	73.98		Peak			No Emissions Found
3664.0		H	53.98		Avg			No Emissions Found
4580.0		H	73.98		Peak			No Emissions Found
4580.0		H	53.98		Avg			No Emissions Found
5496.0		H	73.98		Peak			No Emissions Found
5496.0		H	53.98		Avg			No Emissions Found
6412.0		H	73.98		Peak			No Emissions Found
6412.0		H	53.98		Avg			No Emissions Found
7328.0		H	73.98		Peak			No Emissions Found
7328.0		H	53.98		Avg			No Emissions Found
8244.0		H	73.98		Peak			No Emissions Found
8244.0		H	53.98		Avg			No Emissions Found
9160.0		H	73.98		Peak			No Emissions Found
9160.0		H	53.98		Avg			No Emissions Found

 Test distance
 3 meter


HARMONICS HIGH CHANNEL VERTICAL

FCC 15.249

 Company: Kwikset
 EUT: Electronic Lock
 Model: VHC 2

 Date: 6/19/2017
 Lab: R
 Tested By: Torey Oliver

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1832.0		V	73.98		Peak			No Emissions Found
1832.0		V	53.98		Avg			No Emissions Found
2748.0		V	73.98		Peak			No Emissions Found
2748.0		V	53.98		Avg			No Emissions Found
3664.0		V	73.98		Peak			No Emissions Found
3664.0		V	53.98		Avg			No Emissions Found
4580.0		V	73.98		Peak			No Emissions Found
4580.0		V	53.98		Avg			No Emissions Found
5496.0		V	73.98		Peak			No Emissions Found
5496.0		V	53.98		Avg			No Emissions Found
6412.0		V	73.98		Peak			No Emissions Found
6412.0		V	53.98		Avg			No Emissions Found
7328.0		V	73.98		Peak			No Emissions Found
7328.0		V	53.98		Avg			No Emissions Found
8244.0		V	73.98		Peak			No Emissions Found
8244.0		V	53.98		Avg			No Emissions Found
9160.0		V	73.98		Peak			No Emissions Found
9160.0		V	53.98		Avg			No Emissions Found

 Test distance
 3 meter


***EMISSIONS RADIATED OUTSIDE OF THE FUNDAMENTAL
FREQUENCY BAND***

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

BAND EDGES HORIZONTAL


FCC 15.249

 Company: Kwikset
 EUT: Electronic Lock
 Model: 450412


 Date: 6/16/2017
 Lab: P
 Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab P)

Freq. (MHz)	Level (dB μ V/m)	Pol	Limit (dB μ V/m)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
901.87	42.66	H	46.00	-3.34	Peak	1.24	81	Transmitting 908.4 MHz
900.07	38.61	H	46.00	-7.39	Peak	1.17	66	Transmitting 916 MHz
943.56	38.55	H	46.00	-7.45	Peak	1.24	81	Transmitting 908.4 MHz
928.13	40.14	H	46.00	-5.86	Peak	1.17	66	Transmitting 916 MHz

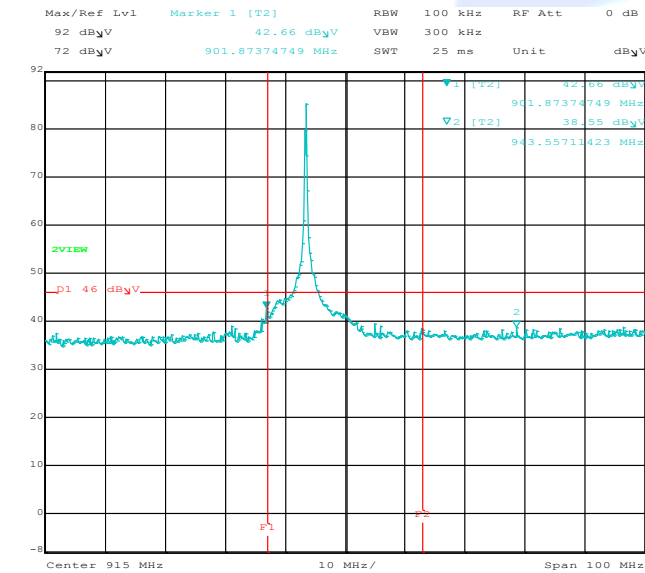 Test distance
 3 meter


Comment A: Band Edge 908.4MHz Horizontal

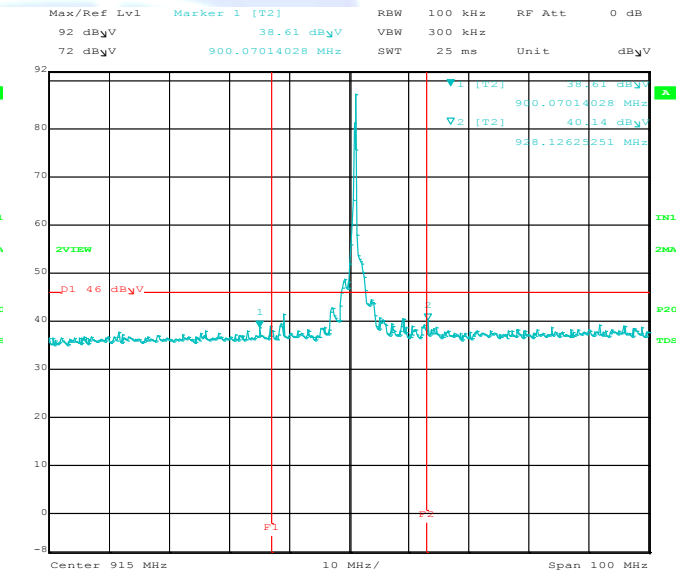

Comment A: Band Edge 916MHz Horizontal



BAND EDGES VERTICAL


FCC 15.249

 Company: Kwikset
 EUT: Electronic Lock
 Model: VHC 2


 Date: 6/16/2017
 Lab: P
 Test ENG: Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab P)

Freq. (MHz)	Level (dB μ V/m)	Pol	Limit (dB μ V/m)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
901.80	45.03	V	46.00	-0.97	Peak	1.00	0	Transmitting 908.4 MHz
895.99	40.31	V	46.00	-5.69	Peak	1.00	0	Transmitting 916 MHz
928.13	39.13	V	46.00	-6.87	Peak	1.00	0	Transmitting 908.4 MHz
928.13	44.38	V	46.00	-1.62	Peak	1.00	0	Transmitting 916 MHz

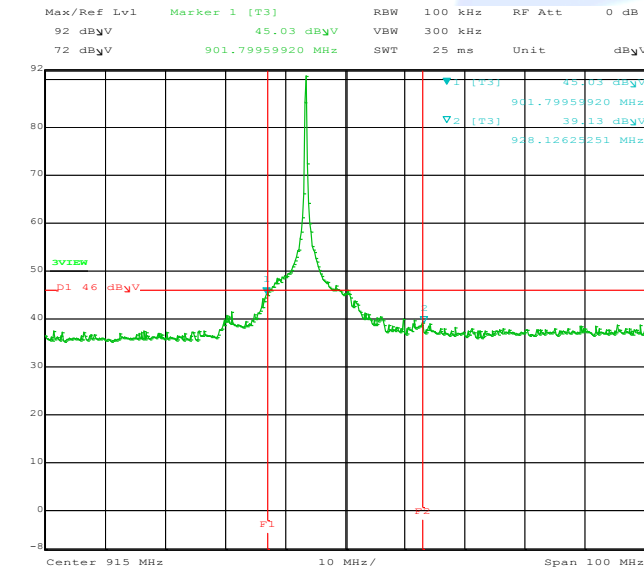 Test distance
 3 meter


Comment A: Band Edge 908.4MHz Vertical

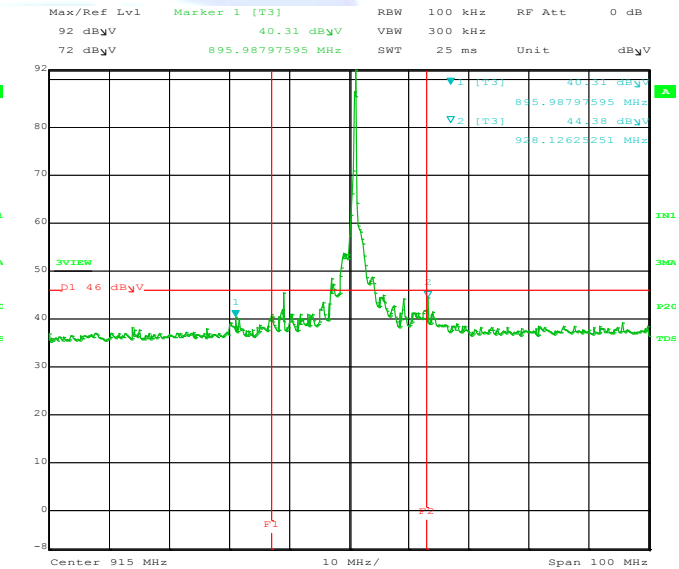

Comment A: Band Edge 916MHz Vertical



OCCUPIED BANDWIDTH

DATA SHEETS



OCCUPIED BANDWIDTH



RSS GEN

Company:	Spectrum Brands	Date:	6/19/2017
EUT:	Value Home Connect, Z-Wave Plus	Lab:	R
Model:	450248	Test ENG:	Torey Oliver

Compatible Electronics, Inc. FAC-3 (Lab R)

Occupied Bandwidth

Freq. (MHz)	Measured BW (kHz)	Peak / QP / Avg	Comments
908.42	94.59	Peak	99% Bandwidth
916.00	166.73	Peak	99% Bandwidth

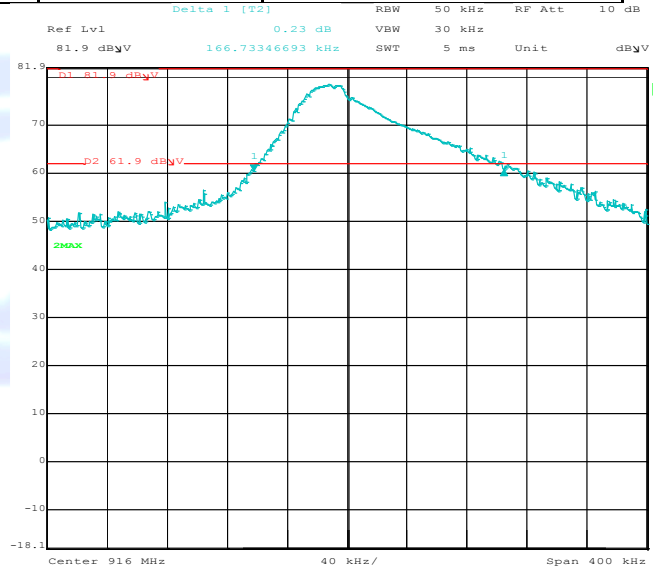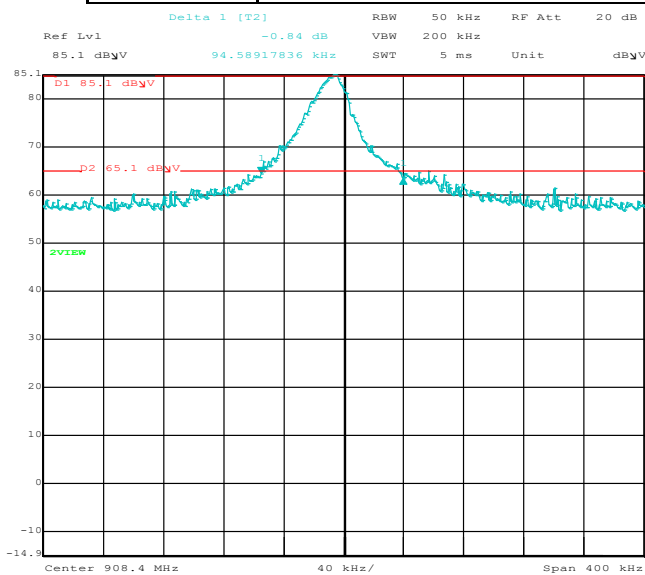

Comment A: ICBW 908.4MHz

Comment A: ICBW 916MHz

