



SENTON

Choose certainty.  
Add value.

August 23, 2010

Page 1 of 59

## Prüfbericht / Test Report

Nr. / No. 69547-02514-3 (Edition 1)

Applicant: Kaba GmbH  
Type of equipment: Inductive TAG Reader  
Type designation: B-web 91 08  
Order No.:  
Test standards: FCC Code of Federal Regulations,  
CFR 47, Part 15,  
Sections 15.205, 15.207, 15.215 and 15.225  
  
Industry Canada Radio Standards Specifications  
RSS-Gen Issue 2, Section 7.2.2 and  
RSS-210 Issue 7, Sections 2.2, 2.6, A2.6 (Category I Equipment)

### **Note:**

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.



## Table of Contents

1	Description of the Equipment Under Test (EUT).....	3
2	Administrative Data .....	4
3	Identification of the Test Laboratory.....	5
4	Summary.....	6
5	Operation Mode and Configuration of EUT .....	7
6	Measurement Procedures .....	8
6.1	Bandwidth Measurements .....	8
6.2	Conducted AC Powerline Emission .....	9
6.3	Radiated Emission Measurement 9 kHz to 30 MHz.....	11
6.4	Radiated Emission in Fully or Semi Anechoic Room.....	13
6.5	Radiated Emission at Alternative Test Site.....	15
6.6	Carrier Frequency Stability.....	17
7	Photographs Taken During Testing.....	19
7.1	Occupied Bandwidth .....	29
7.2	Bandwidth of the Emission.....	33
7.3	Designation of Emissions.....	35
7.4	Conducted Powerline Emission Measurement 150 kHz to 30 MHz.....	36
7.5	Spectrum Mask.....	37
7.6	Radiated Emission Measurement 9 kHz to 30 MHz.....	39
7.7	Radiated Emission Measurement 30 MHz to 1 GHz.....	40
7.8	Carrier Frequency Stability.....	41
7.9	Exposure of Humans to RF Fields .....	44
8	Referenced Regulations.....	46
9	Revision History .....	48
10	Charts taken during testing .....	49

## 1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation <sup>1</sup> :	B-web 91 08
Parts <sup>2</sup> :	1
Serial number(s):	267
Manufacturer:	Kaba GmbH
Type of equipment:	Inductive TAG Reader
Version:	
FCC ID:	
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	13.553 MHz - 13.567 MHz
Frequency range:	
Operating frequency:	13.560 MHz
Type of modulation:	Amplitude modulation
Pulse train:	---
Pulse width:	---
Number of RF-channels:	1
Channel spacing:	---
Designation of emissions <sup>3</sup> :	2k8A1D
Type of antenna:	
Size/length of antenna:	
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of power supply:	DC supply
Specifications for power supply:	nominal voltage:      5.0 V minimum voltage:    4.5 V maximum voltage:    5.5 V

<sup>1</sup> Type designation of the system if EUT consists of more than one part.

<sup>2</sup> Type designations of the parts of the system, if applicable.

<sup>3</sup> Also known as "Class of Emission".



## 2 Administrative Data

### Application details

Applicant (full address):	Kaba GmbH Albertstraße 3 D-78056 Villingen-Schwenningen
Contact person:	Mr. Ralf Altmann
Order number:	
Receipt of EUT:	27 July 2010
Date(s) of test:	July / August 2010
Note(s):	

### Report details

Report number:	69547-02514-3
Edition:	1
Issue date:	August 23, 2010



### 3 Identification of the Test Laboratory

#### Details of the Test Laboratory

Company name:	TÜV SÜD SENTON GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-PL-171/94-03
Contact person:	Mr. Johann Roidt
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

## 4 Summary

### Summary of test results

The tested sample complies with the requirements set forth in the  
**Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207, 15.215 and 15.225**  
of the Federal Communication Commission (FCC) and the  
**Radio Standards Specifications  
RSS-Gen Issue 2, Section 7.2.2 and  
RSS-210 Issue 7, Sections 2.2, 2.6, A2.6 (Category I Equipment)**  
of Industry Canada (IC).

### Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Thomas Eberl

Responsible for test report:

Mr. Thomas Eberl



## 5 Operation Mode and Configuration of EUT

### Operation Mode(s)

Transmit mode

### Configuration(s) of EUT

EUT was connected to appropriate support device and also supplied via USB interface

### List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification<sup>4</sup></i>	<i>Cable type</i>	<i>Cable length</i>
1		dc power signal/control port	Unshielded	1.8 m

### List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	PC	N 130	ZJF93LS90382	Samsung

### List of support devices


<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	TAG	ISO	---	---

<sup>4</sup> Ports shall be classified as ac power, dc power or signal/control port

## 6 Measurement Procedures

### 6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 2, sections 4.6.1 and 4.6.2 IC RSS-210 Issue 7, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 2, sections 4.6.1 and 4.6.2
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.3)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

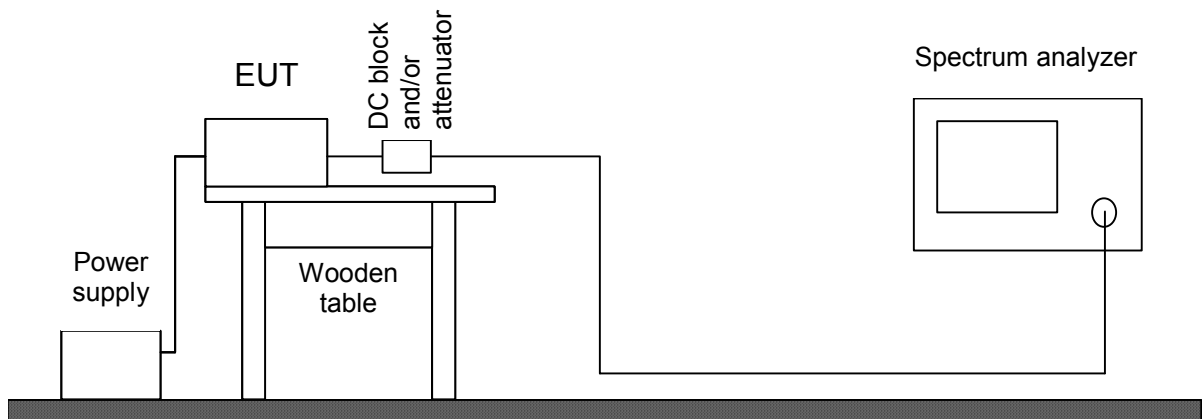



## 6.2 Conducted AC Powerline Emission

### Measurement Procedure:

Rules and specifications: CFR 47 Part 15, section 15.207  
 IC RSS-Gen Issue 2, section 7.2.2

Guide: ANSI C63.4 / CISPR 22


Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:

First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.

If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.

According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.

Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.

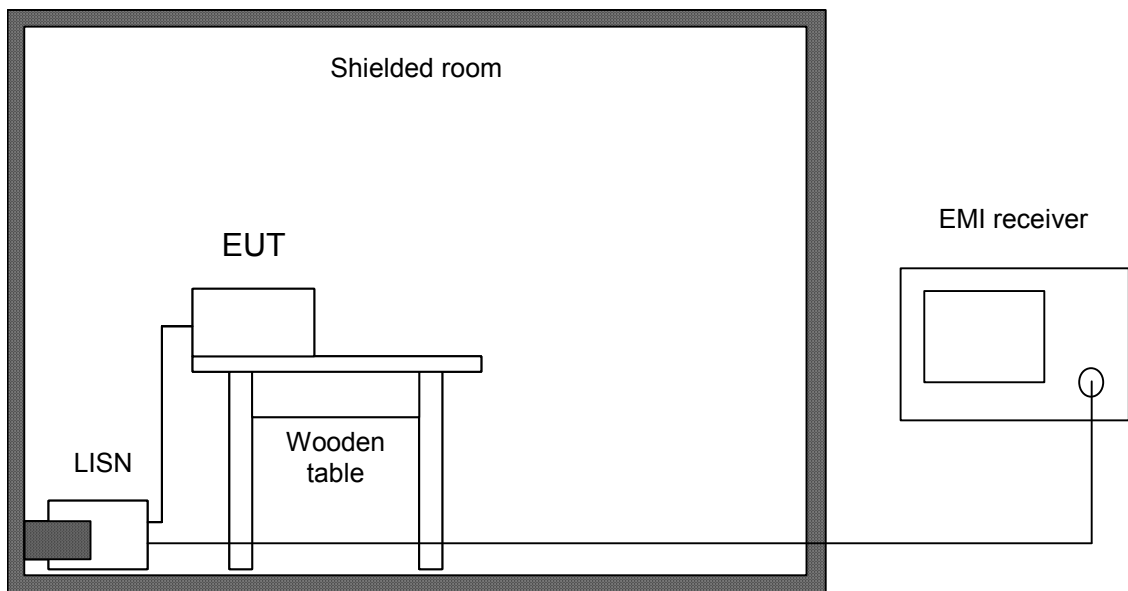




Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/> V-network	ESH 3-Z5	1059	894785/005	Rohde & Schwarz
<input type="checkbox"/> V-network	ESH 3-Z5	1218	830952/025	Rohde & Schwarz
<input type="checkbox"/> Artificial mains network	ESH 2-Z5	1536	842966/004	Rohde & Schwarz
<input type="checkbox"/> Shielded room	No. 1	1451	---	Albatross
<input type="checkbox"/> Shielded room	No. 4	1454	3FD 100 544	Euroshield

### 6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205, 15.215(b) and 15.225(a)-(d) IC RSS-210 Issue 7, sections 2.2, 2.6 and A2.6
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).</p> <p>Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p>	

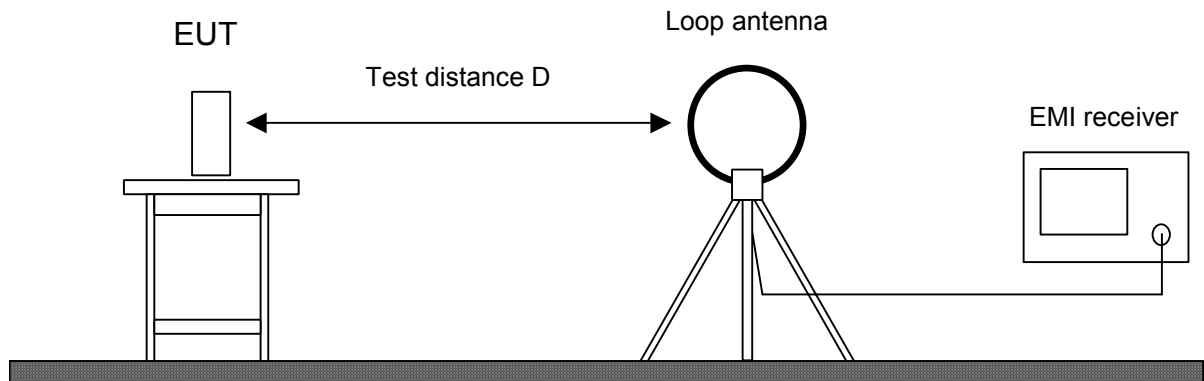




Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input type="checkbox"/> Preamplifier	Cabin no. 2 CPA9231A	1651	3393	Schaffner
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
<input type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross

## 6.4 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 7, sections 2.2(b)(c), 2.6 and A2.6
Guide:	ANSI C63.4
<p>Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 for alternative test sites is used (see 6.5). If prescans are recorded in fully anechoic room they are indicated appropriately.</p>	

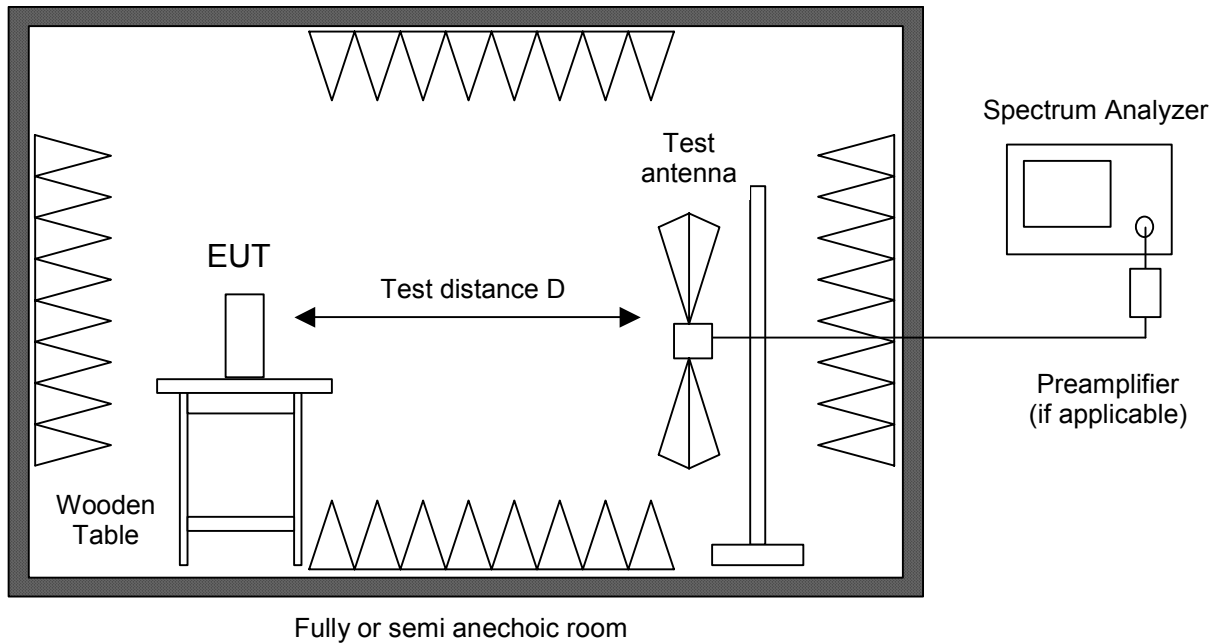


Test instruments used:

Type		Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	Cabin no. 3 ESPI7	2010	101018	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Pre-amplifier	Cabin no. 2 CPA9231A	1651	3393	Schaffner
<input type="checkbox"/>	Pre-amplifier	R14601	1142	13120026	Advantest
<input type="checkbox"/>	Pre-amplifier (1 - 8 GHz)	AFS3-00100800-32-LN	1684	847743	Miteq
<input type="checkbox"/>	Pre-amplifier (0.5 - 8 GHz)	AMF-4D-005080-25-13P	1685	860149	Miteq
<input type="checkbox"/>	Pre-amplifier (8 - 18 GHz)	ACO/180-3530	1484	32641	CTT
<input type="checkbox"/>	External Mixer	WM782A	1576	845881/005	Tektronix
<input type="checkbox"/>	Harmonic Mixer Accessories	FS-Z30	1577	624413/003	Rohde & Schwarz
<input checked="" type="checkbox"/>	Trilog antenna	Cabin no. 2 VULB 9163	2058	9163-408	Schwarzbeck
<input type="checkbox"/>	Horn antenna	3115	1516	9508-4553	EMCO
<input type="checkbox"/>	Horn antenna	3160-03	1010	9112-1003	EMCO
<input type="checkbox"/>	Horn antenna	3160-04	1011	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-05	1012	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-06	1013	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-07	1014	9112-1008	EMCO
<input type="checkbox"/>	Horn antenna	3160-08	1015	9112-1002	EMCO
<input type="checkbox"/>	Horn antenna	3160-09	1265	9403-1025	EMCO
<input type="checkbox"/>	Horn antenna	3160-10	1575	399185	EMCO
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/>	Semi anechoic room	No. 3	1453	---	Siemens
<input type="checkbox"/>	Semi anechoic room	No. 8	2057	---	Albatross

## 6.5 Radiated Emission at Alternative Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 7, sections 2.2(b)(c), 2.6 and A2.6
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.</p> <p>If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels.</p> <p>Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.</p> <p>With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.</p>	

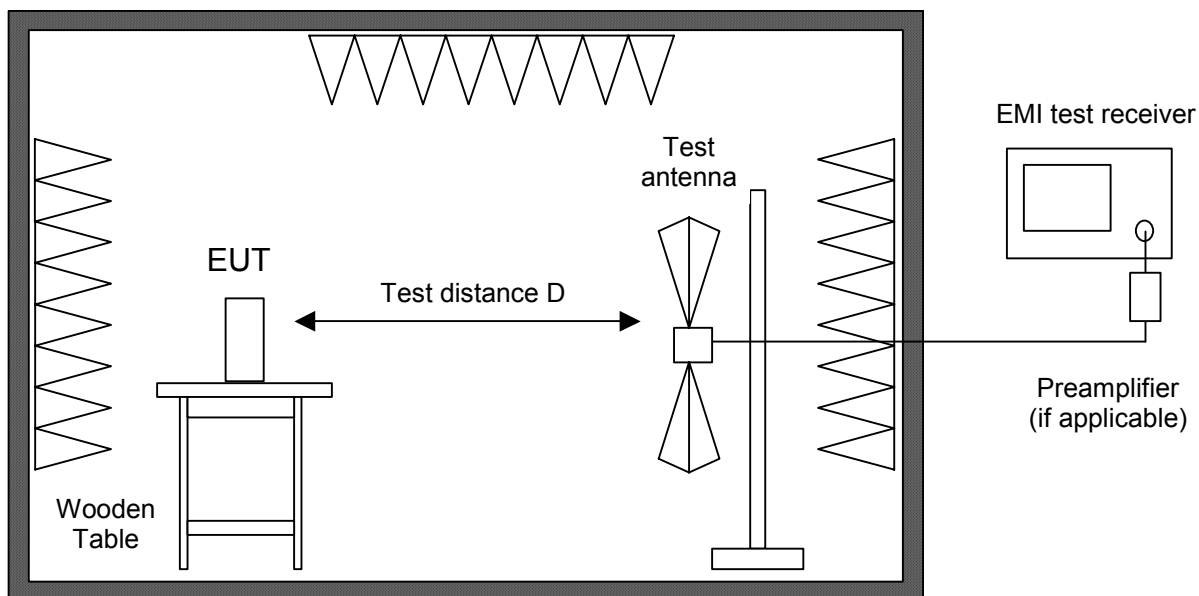

Alternate test site (semi anechoic room)

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input checked="" type="checkbox"/> Trilog antenna	Cabin no. 8 VULB 9163	1802	9163-214	Schwarzbeck
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross



## 6.6 Carrier Frequency Stability

### Measurement Procedure:

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 2, section 4.7 and IC RSS-210 Issue 7, section A2.6
Guide:	ANSI C63.4

The frequency tolerance of the carrier signal is measured over a temperature variation of  $-20\text{ }^{\circ}\text{C}$  to  $+50\text{ }^{\circ}\text{C}$  at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of  $20\text{ }^{\circ}\text{C}$ .


If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage
- the battery nominal voltage
- 85% of the battery nominal voltage
- the battery operating end point voltage which shall be specified by the equipment manufacturer

The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.

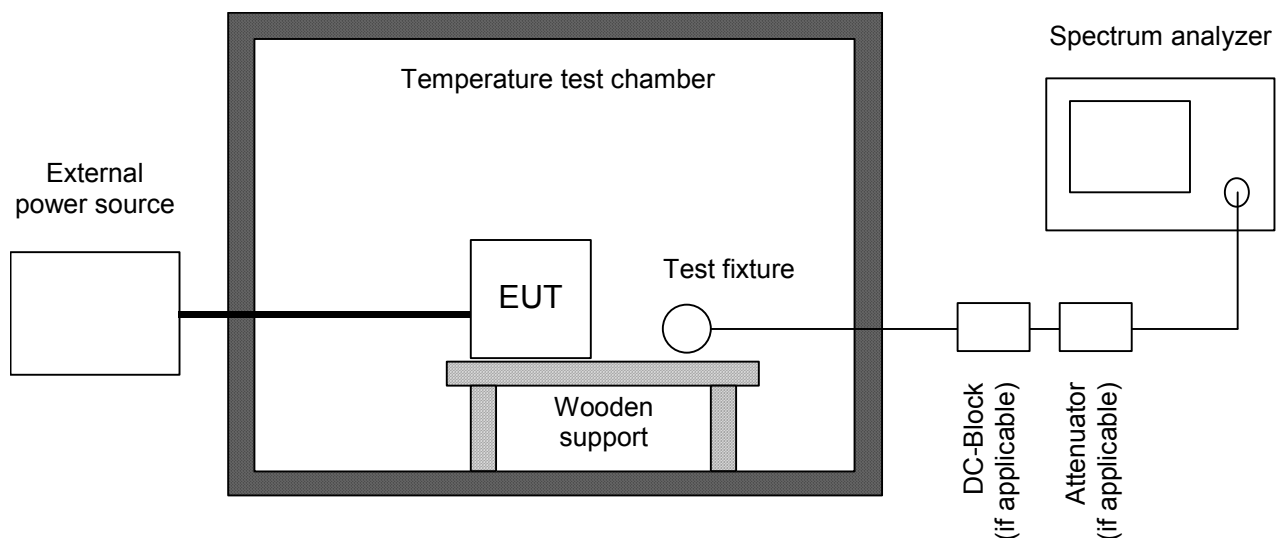



Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda
<input checked="" type="checkbox"/> Test probe	TP 01	1628	001	Senton
<input type="checkbox"/> Multimeter	21 III	1653	76530546	Fluke
<input type="checkbox"/> Multimeter	21 III	1654	76381229	Fluke
<input type="checkbox"/> Multimeter	Fluke 77 III	1975	92370108	Fluke
<input type="checkbox"/> Multimeter	Fluke 77 IV	1976	93090238	Fluke
<input type="checkbox"/> Multimeter	Fluke 177	2025	96720024	Fluke
<input type="checkbox"/> Multimeter	Fluke 177	2026	96720025	Fluke
<input type="checkbox"/> DC power supply	NGSM 32/10	1267	203	Rohde & Schwarz
<input type="checkbox"/> Isolating transformer	RT 5A	1127	10387	Grundig
<input type="checkbox"/> Isolating transformer	RT 5A	1128	10416	Grundig
<input checked="" type="checkbox"/> Temperature test chamber	HT 4010	1271	07065550	Heraeus



---

## 7 Photographs Taken During Testing

## Test setup for conducted AC powerline emission measurement



**Test setup for conducted AC powerline emission measurement  
- continued -**



## Test setup for radiated emission measurement 9 kHz – 30 MHz



**Test setup for radiated emission measurement 9 kHz – 30 MHz  
- continued -**



## Test setup for radiated emission measurement (fully anechoic room)





## Test setup for radiated emission measurement (alternate test site)



### Test setup for radiated emission measurement (alternate test site) - continued -





## Test Results

<b>FCC CFR 47 Parts 2 and 15</b>			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	29	Recorded
15.215(c)	Bandwidth of the emission	33	Test passed
2.201, 2.202	Class of emission	35	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a) 15.205(d)(7)	Restricted bands of operation	--- <sup>5</sup>	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	36	Test passed
15.225(a)-(d)	Spectrum Mask	37	Test passed
15.205(b) 15.215(b) 15.225(a)(d)	Radiated emission 9 kHz to 30 MHz	39	Test passed
15.205(b) 15.225(d)	Radiated emission 30 MHz to 1 GHz	40	Test passed
15.225(e)	Carrier frequency stability	41	Test passed

<sup>5</sup> See "Spectrum Mask" for the 13.36 to 13.41 MHz band. For all other restricted bands see "Radiated Emission".

<b>IC RSS-Gen Issue 2</b>			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.8	Transmitter output power (conducted)	---	Not applicable
4.6.1	Occupied Bandwidth	29	Recorded
3.2(h), 8	Designation of emissions	35	Calculated
4.5	Pulsed operation	---	Not applicable
7.2.2	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	36	Test passed
5.5	Exposure of Humans to RF Fields	44	Exempted from SAR and RF evaluation

<b>IC RSS-210 Issue 7</b>			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.2(a)	Restricted bands and unwanted emission frequencies	--- <sup>6</sup>	Test passed
A2.6	Spectrum Mask	37	Test passed
2.2(b)(c), 2.6 A2.6	Unwanted emissions 9 kHz to 30 MHz	39	Test passed
2.2(b)(c), 2.6 A2.6	Unwanted emissions 30 MHz to 1 GHz	40	Test passed
A2.6	Carrier frequency stability	41	Test passed

<sup>6</sup> See "Spectrum Mask" and "Unwanted emissions".




## 7.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.	
	The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.	
	The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	reading TAG
Date of test:	August 04, 2010
Test site:	Fully anechoic room, cabin no. 2

**Occupied Bandwidth (99 %):**

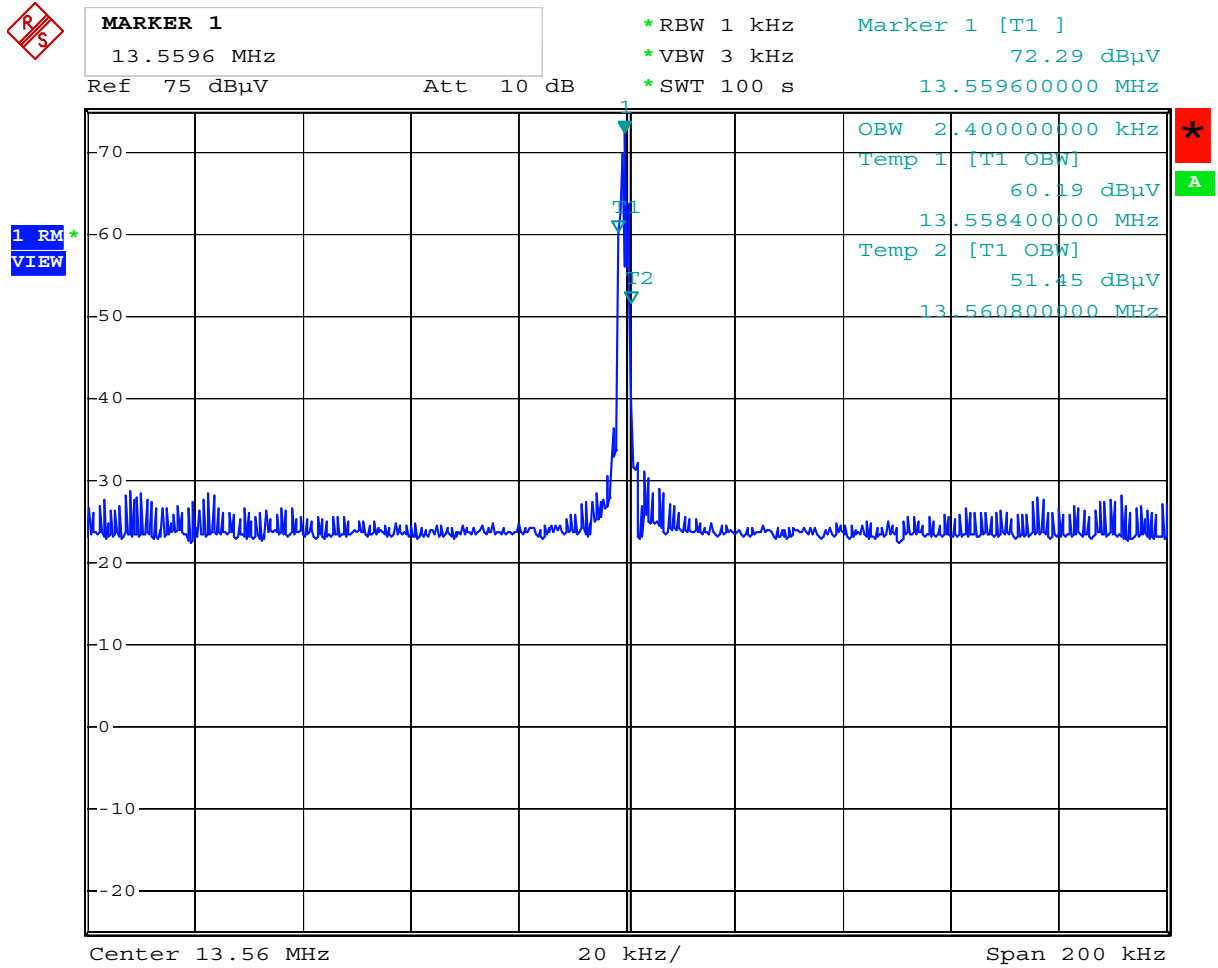

Date: 4.AUG.2010 08:10:22

Occupied Bandwidth (99 %): **2.4kHz**



## Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 2, section 4.6.1
Guide:	IC RSS-Gen Issue 2, section 4.6.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	reading TAG
Date of test:	August 04, 2010
Test site:	Fully anechoic room, cabin no. 2

**Occupied Bandwidth (99 %):**




\*RBW 1 kHz      Marker 1 [T1 ]  
 \*VBW 10 kHz      72.35 dBµV  
 \*SWT 100 s      13.559600000 MHz

Ref 75 dBµV

Att 10 dB

1 RM\*  
 VIEW

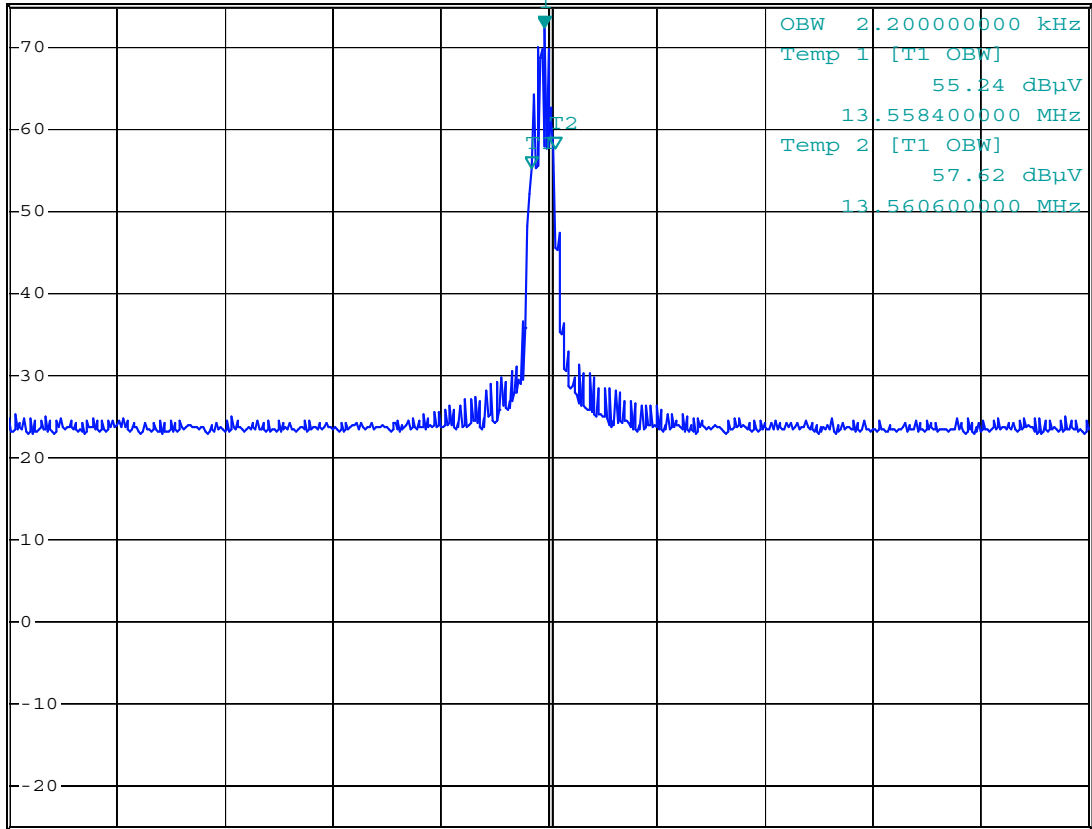

Center 13.56 MHz

10 kHz/

Span 100 kHz

Date: 4.AUG.2010 08:32:52

Occupied Bandwidth (99 %): **2.2 kHz**




## 7.2 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.215(c)	
Guide:	ANSI C63.4	
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	
Comment:	reading TAG	
Date of test:	August 04, 2010	
Test site:	Fully anechoic room, cabin no. 2	



**MARKER 1**  
 13.5594 MHz  
 Ref 75 dBµV Att 10 dB

\*RBW 1 kHz Marker 1 [T1 ]  
 \*VBW 3 kHz 71.43 dBµV  
 \*SWT 100 s 13.559400000 MHz

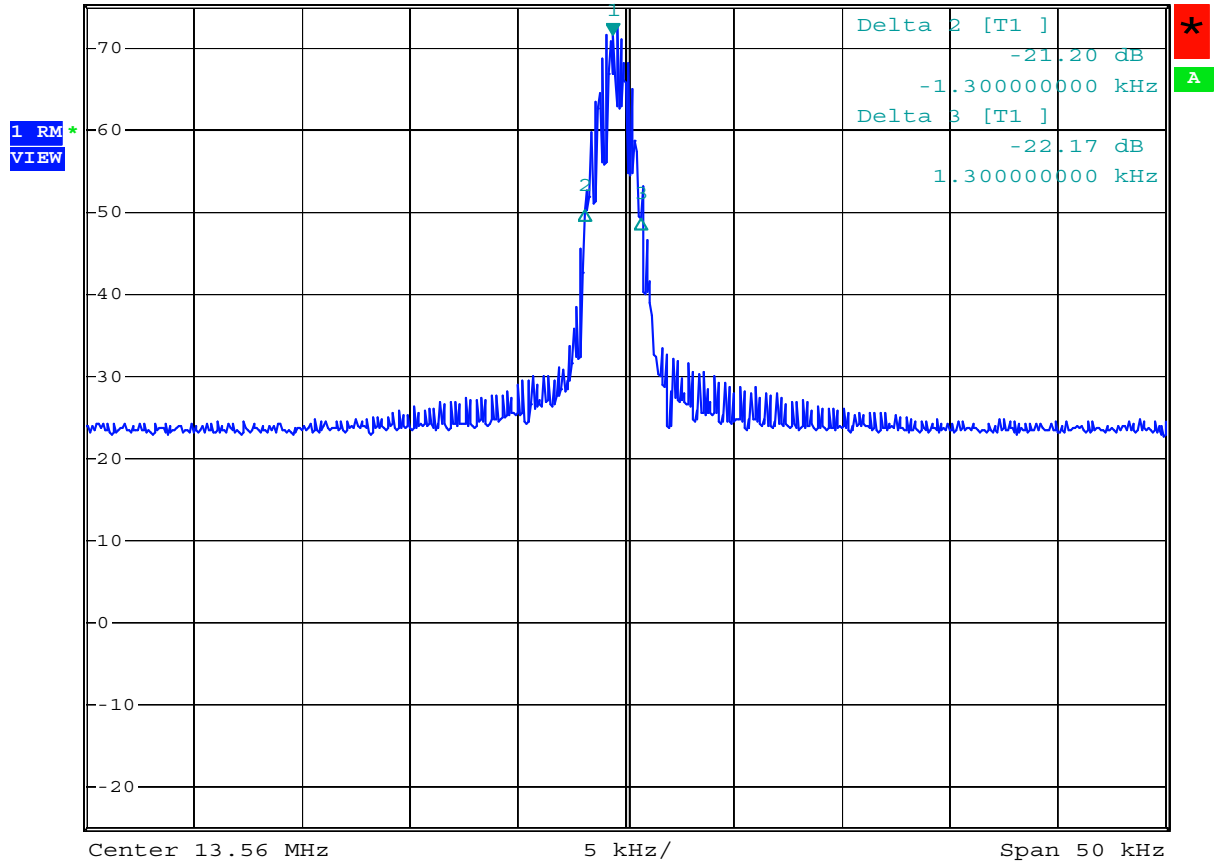

Date: 4.AUG.2010 08:43:46

Permitted frequency band:	<b>13.553 MHz - 13.567 MHz</b>	
20 dB bandwidth:	<b>2.6 kHz</b>	
Carrier frequency stability:	<input checked="" type="checkbox"/> <b>specified</b>	<input type="checkbox"/> <b>not specified</b>
Maximum frequency tolerances:	<b>+0 kHz - 0.1 kHz</b>	
Bandwidth of the emission:	<b>2.5 kHz</b>	<b>within permitted frequency band<sup>7</sup>:</b> <input checked="" type="checkbox"/> <b>yes</b> <input type="checkbox"/> <b>no</b>

Test Result:	Test passed
--------------	-------------

<sup>7</sup> If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.



### 7.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 2, sections 3.2(h) and 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------

$B_n$ = Necessary Bandwidth	$B_n = 2BK$
B = Modulation rate	$B = .1.4 \text{ kHz}$
K = Overall numerical factor	$K = 1$
Calculation:	$B_n = 2 \cdot (1.4\text{kHz}) \cdot 1 = 2.8\text{kHz}$

Designation of Emissions:	<b>2k8A1D</b>
---------------------------	---------------

## 7.4 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 2, section 7.2.2		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dBµV)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		

Comment:	
Date of test:	July 29, 2010
Test site:	Shielded room, cabin no. 4

Test Result:	Test passed
--------------	-------------

Tested on:	Line cord PC - L1
------------	-------------------

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.155	Quasi-Peak	51.4	0.0	51.4	65.7	14.3
0.190	Quasi-Peak	44.7	0.0	44.7	64.0	19.3
13.560	Quasi-Peak	23.8	0.0	23.8	60.0	36.2

Tested on:	Line cord PC - N
------------	------------------

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.155	Quasi-Peak	50.1	0.0	50.1	65.7	15.6
13.560	Quasi-Peak	26.5	0.0	26.5	60.0	33.5

### Sample calculation of final values:


$$\text{Final Value (dBµV)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB)}$$

## 7.5 Spectrum Mask

Rules and specifications:	CFR 47 Part 15, section 15.225(a)-(d) IC RSS-210 Issue 7, section A2.6			
Guide:	ANSI C63.4			
Description:	Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.			
Limit:	Frequency of Emission (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement Distance d (meters)
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	
Date of test:	August 04, 2010
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters
Extrapolation Factor:	-40dB/decade

Test Result:	Test passed
--------------	-------------

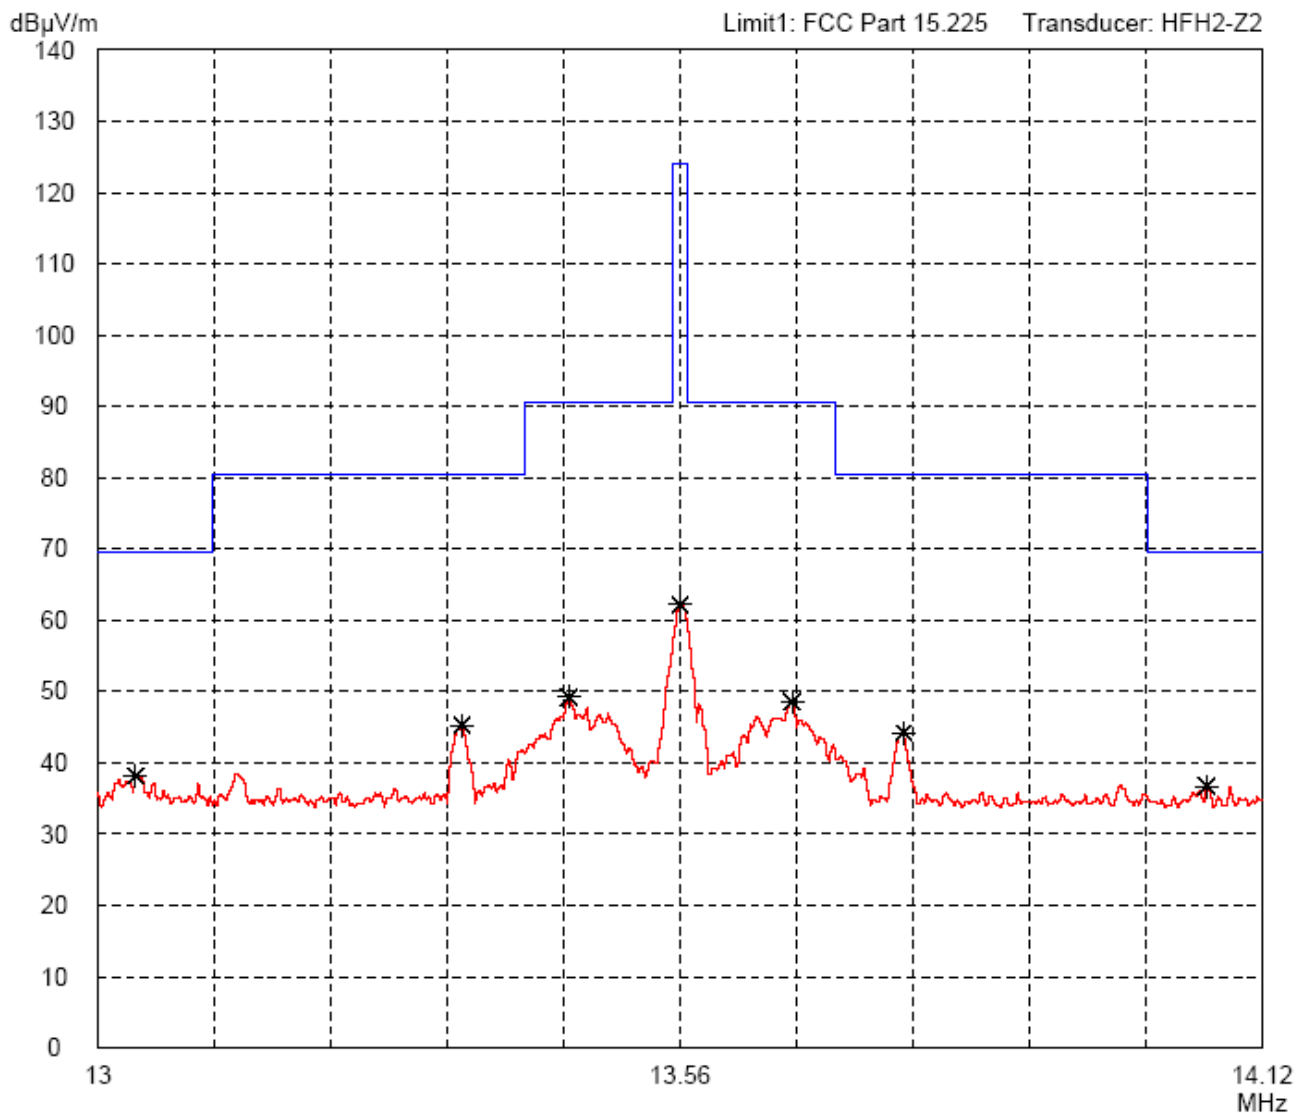

## 7.6 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.225(a)-(d) IC RSS-210 Issue 7, sections 2.2(b)(c), 2.6 and A2.6			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	
Date of test:	August 04, 2010
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value ( $\text{dB}\mu\text{V}$ )	Correction Factor ( $\text{dB}/\text{m}$ )	Extrapolation Factor ( $\text{dB}$ )	Pulse Train Correction ( $\text{dB}$ )	Final Value ( $\text{dB}\mu\text{V}/\text{m}$ )	Limit ( $\text{dB}\mu\text{V}/\text{m}$ )	Margin ( $\text{dB}$ )
		d1 (m)	d (m)							
13.56000	Quasi-Peak	10	30	26.6	20.0	-19.1		27.5	84.0	56.5

Sample calculation of final values:

$$\begin{aligned} \text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dB}\mu\text{V}/\text{m)} &= \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB}/\text{m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)} \end{aligned}$$

Note: Extrapolation factor (dB) and final value ( $\text{dB}\mu\text{V}/\text{m}$ ) are relating to distance d.

## 7.7 Radiated Emission Measurement 30 MHz to 1 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 7, sections 2.2(b)(c), 2.6 and A2.6		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ )
	30 - 88 88 - 216 216 - 960 Above 960	100 150 200 500	40.0 43.5 46.0 54.0
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Alternative Test Site (6.5)		

Comment:	
Date of test:	July 27, 2010
Test site:	Frequencies $\leq$ 1 GHz: Open field test site Frequencies $>$ 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency MHz	QuasiPeak $\text{dB}\mu\text{V}/\text{m}$	Meas. Time ms	Bandwidth kHz	Height cm	Polarization	Azimuth deg	Corr. dB	Margin dB	Limit $\text{dB}\mu\text{V}/\text{m}$
40.680000	39.0	1000.0	120.000	100.0	V	-98.0	14.4	1.0	40.0
67.800000	37.9	1000.0	120.000	100.0	V	-114.0	10.9	2.1	40.0
72.000000	26.2	1000.0	120.000	100.0	V	-104.0	10.4	13.8	40.0
84.000000	23.3	1000.0	120.000	100.0	V	-103.0	10.7	16.7	40.0
149.160000	38.9	1000.0	120.000	100.0	V	78.0	9.7	4.6	43.5
480.030000	31.7	1000.0	120.000	195.0	H	60.0	18.2	14.3	46.0
492.030000	35.3	1000.0	120.000	164.0	H	71.0	18.5	10.7	46.0
504.030000	36.3	1000.0	120.000	160.0	H	65.0	18.8	9.7	46.0
510.030000	29.7	1000.0	120.000	160.0	H	87.0	18.9	16.3	46.0
516.030000	34.3	1000.0	120.000	154.0	H	61.0	19.0	11.7	46.0

### Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V}/\text{m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$




## 7.8 Carrier Frequency Stability

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 2, section 4.7 and IC RSS-210 Issue 7, section A2.6
Guide:	ANSI C63.4
Limit:	The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01$ % ( $\pm 100$ ppm) of the carrier frequency under nominal conditions.
Temperature range:	-20°C to +50°C (at normal supply voltage)
Voltage range:	85% to 115% of the rated supply voltage (at a temperature of +20°C)
Measurement procedure:	Carrier Frequency Stability (6.6)

Comment:	
Date of test:	August 04, 2010

### 7.8.1 Carrier Frequency Stability vs. Temperature

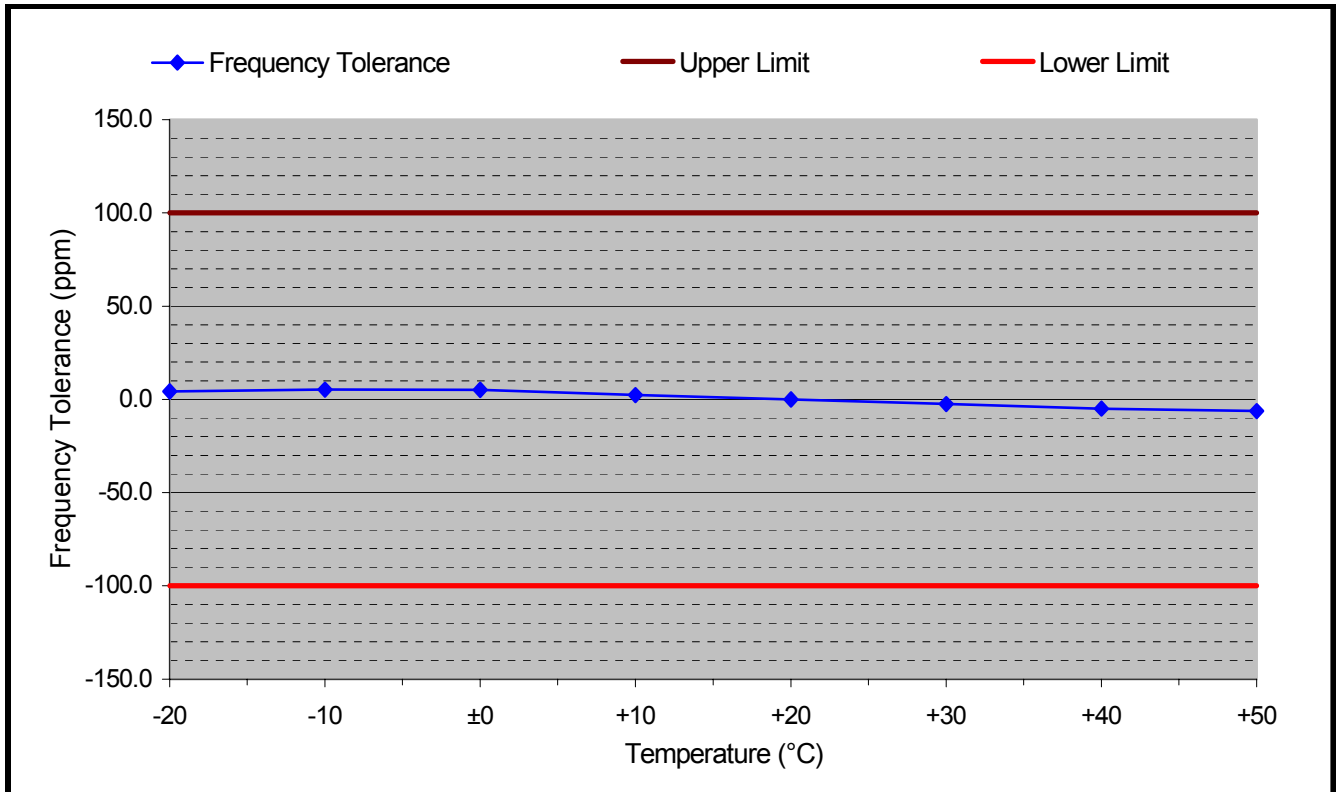


Supply voltage: 5 V      Nominal frequency: 13.559500 MHz

Temperature (°C)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
-20	13.559557	57	4.2	+100.0	-100.0	95.8
-10	13.559570	71	5.2	+100.0	-100.0	94.8
±0	13.559569	70	5.1	+100.0	-100.0	94.9
+10	13.559531	32	2.3	+100.0	-100.0	97.7
+20	13.559500	0	0.0	+100.0	-100.0	100.0
+30	13.559466	-33	-2.5	+100.0	-100.0	97.5
+40	13.559432	-67	-5.0	+100.0	-100.0	95.0
+50	13.559415	-85	-6.2	+100.0	-100.0	93.8

Test Result: Test passed

## 7.8.2 Carrier Frequency Stability vs. Supply Voltage

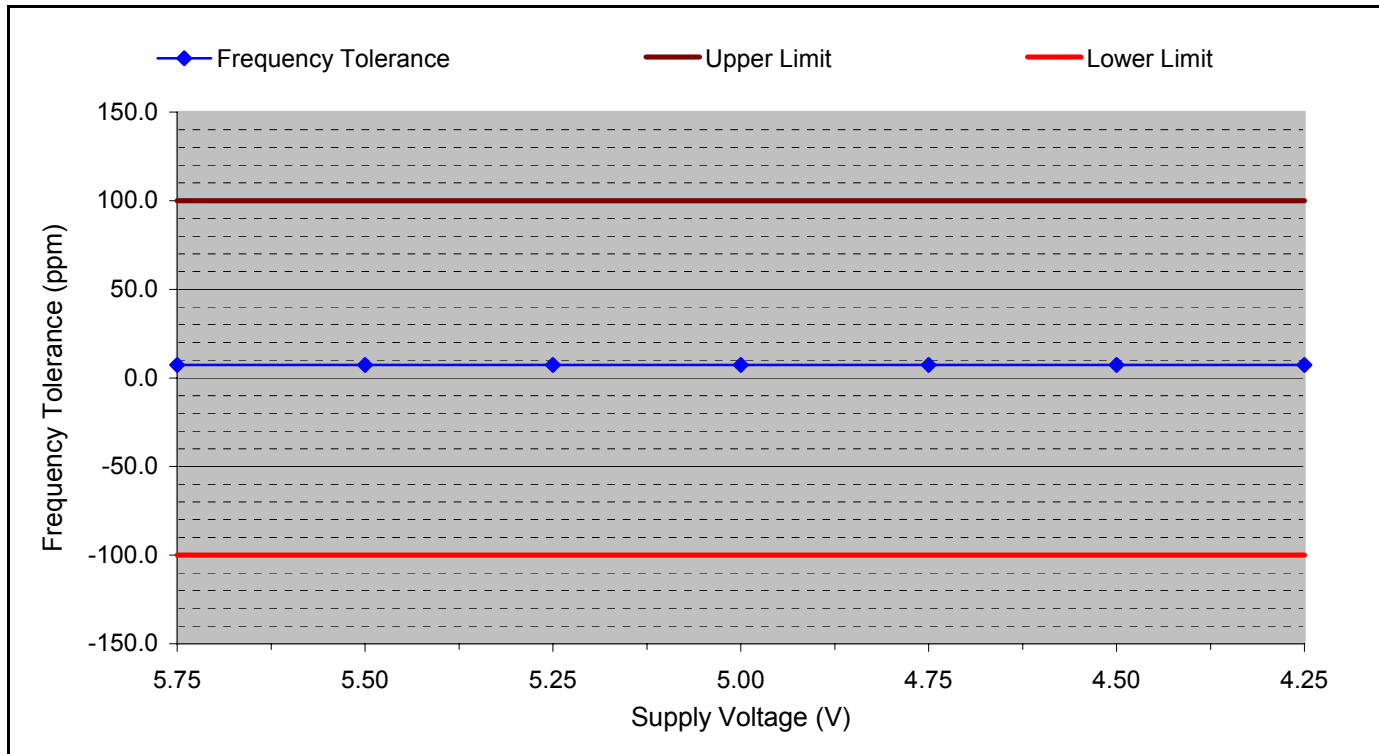

Temperature: +20 °C      Battery End Point: Not applicable  
 Nominal frequency: 13.559400 MHz

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
5.75	13.559500	100	7.4	+100.0	-100.0	92.6
5.50	13.559500	100	7.4	+100.0	-100.0	92.6
5.25	13.559500	100	7.4	+100.0	-100.0	92.6
5.00	13.559500	100	7.4	+100.0	-100.0	92.6
4.75	13.559500	100	7.4	+100.0	-100.0	92.6
4.50	13.559500	100	7.4	+100.0	-100.0	92.6
4.25	13.559500	100	7.4	+100.0	-100.0	92.6

Test Result: Test passed

## 7.9 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 2, section 5.5
Guide:	IC RSS-102 Issue 4, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
<b>The antenna is</b>				
<input type="checkbox"/> detachable				
<p>The conducted output power (CP in watts) is measured at the antenna connector:</p> $CP = \dots\dots\dots \mathbf{W}$ <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input type="checkbox"/> the numerical antenna gain: <math>G = \dots\dots\dots</math></p> $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ <p><input type="checkbox"/> the field strength<sup>8</sup> in V/m: <math>FS = \dots\dots\dots \mathbf{V/m}</math></p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ <p>with:</p> <p>Distance between the antennas in m: <math>D = \dots\dots\dots \mathbf{m}</math></p>				
<input checked="" type="checkbox"/> not detachable				
<p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by<sup>8</sup>:</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \mathbf{0.15^{-6} W}$ <p>with:</p> <p>Field strength in V/m: <math>FS = \mathbf{0.00021V/m}</math></p> <p>Distance between the two antennas in m: <math>D = \mathbf{10 m}</math></p>				
<b>Selection of output power</b>				
<p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> $TP = \mathbf{0.15^{-6} W}$				

<sup>8</sup> The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.



Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
<b>Separation distance between the user and the transmitting device is</b>				
<input type="checkbox"/> less than or equal to 20 cm		<input checked="" type="checkbox"/>		
<input checked="" type="checkbox"/> greater than 20 cm				
<b>Transmitting device is</b>				
<input type="checkbox"/> in the vicinity of the human head		<input checked="" type="checkbox"/>		
<input type="checkbox"/> body-worn				
<b>SAR evaluation</b>				
SAR evaluation is required if the separation distance between the user and the device is less than or equal to 20 cm.				
<input type="checkbox"/> The device operates from 3 kHz up to 1 GHz inclusively and with output power (i.e. the higher of the conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 200 mW for general public use and 1000 mW for controlled use.				<input type="checkbox"/>
<input type="checkbox"/> ;				
<input type="checkbox"/> The device operates above 1 GHz and up to 2.2 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 100 W for general public use and 500 W for controlled use.				<input type="checkbox"/>
<input type="checkbox"/> The device operates above 2.2 GHz and up to 3 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 20 mW for general public use and 100 mW for controlled use.				<input type="checkbox"/>
<input type="checkbox"/> The device operates above 3 GHz and up to 6 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 10 mW for general public use and 50 mW for controlled use.				<input type="checkbox"/>
<input type="checkbox"/> SAR evaluation is documented in test report no. ....				
<b>RF exposure evaluation</b>				
RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm.				
<input checked="" type="checkbox"/> The device operates below 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 2.5 W.				<input checked="" type="checkbox"/>
<input type="checkbox"/> The device operates at or above 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 5 W.				<input type="checkbox"/>
<input type="checkbox"/> RF exposure evaluation is documented in test report no. ....				

## 8 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2008
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2008
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 2 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada	June 2007
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 7 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	June 2007
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 2 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	June 2007
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 4: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), published by Industry Canada	March 2010
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
<input type="checkbox"/>	CAN/CSA-CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002

---

TRC-43      Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada      October 9, 1982



## 9 Revision History

Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	23.08.10	T. Eberl (cj)	First Edition






---

## 10 Charts taken during testing

Conducted Emission Test 150 kHz - 30 MHz  
 according to EN 55022 Class B / CISPR 22

Model: B-web 9108	Mode: - EUT powered via USB port - Supply voltage 115 V ( PC)
Serial no.: 267	
Applicant: Kaba GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord Phase L1	
Date of test: 07/29/2010	Operator: T. Eberl
Test performed: automatically	File name:

Detector: Peak / Final Results: QP	Final results: Selected by hand
---------------------------------------	------------------------------------

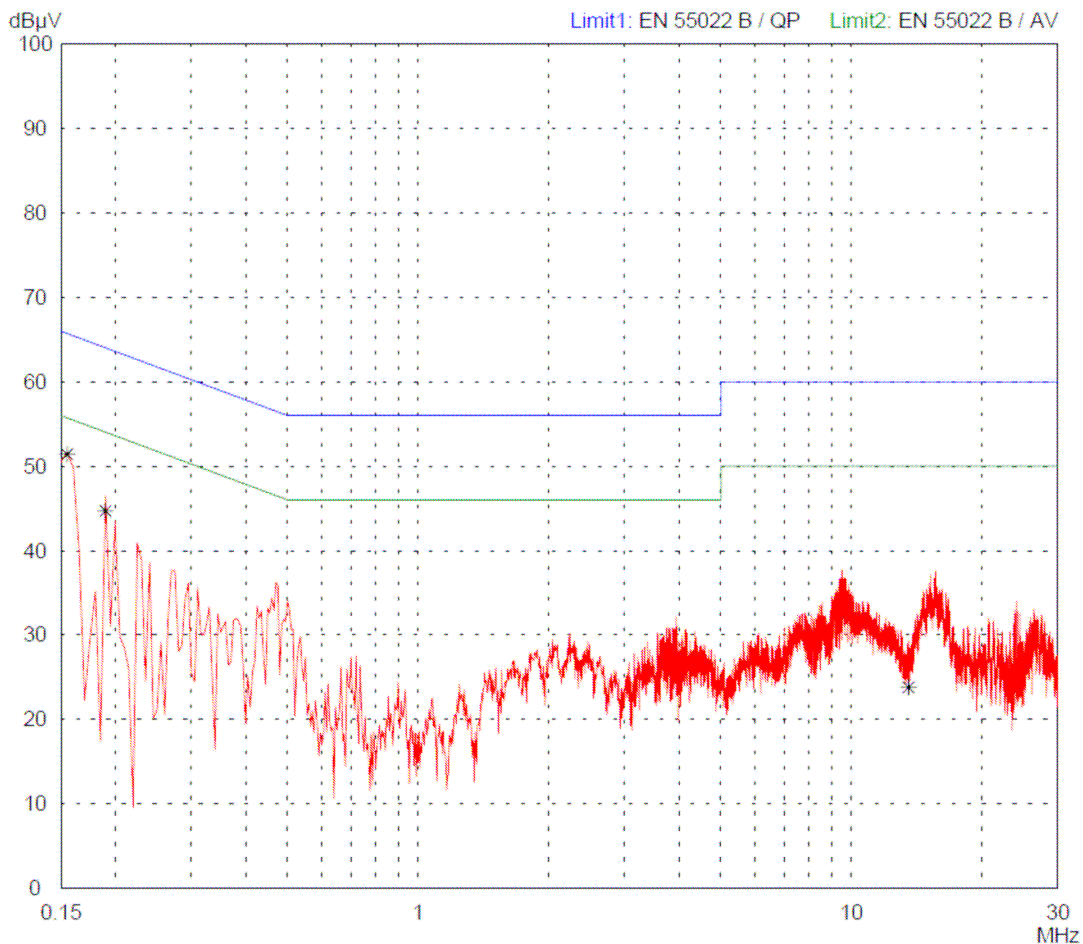


Result: Limit kept	Project file: 486871-02486	Page of Pages
-----------------------	-------------------------------	---------------

Conducted Emission Test 150 kHz - 30 MHz  
 according to EN 55022 Class B / CISPR 22

Model: B-web 9108	Mode: - EUT powered via USB port - Supply voltage 115 V ( PC)
Serial no.: 267	
Applicant: Kaba GmbH	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord Phase N	
Date of test: 07/29/2010	Operator: T. Eberl
Test performed: automatically	File name:

Detector: Peak / Final Results: QP	Final results: Selected by hand
---------------------------------------	------------------------------------

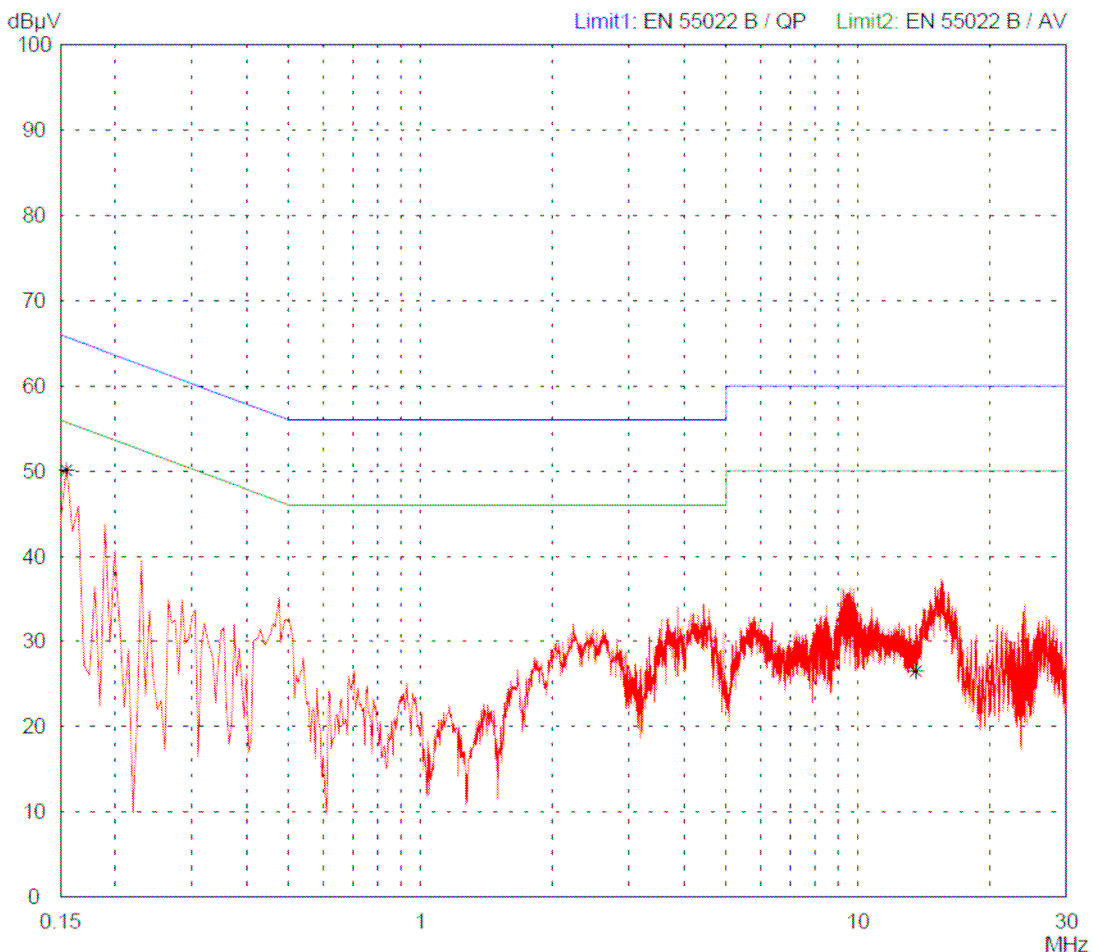


Result: Limit kept	Project file: 486871-02486	Page    of    Pages
-----------------------	-------------------------------	---------------------

**Radiated Emission Test 13 MHz - 14.12 MHz**  
 acc. to FCC Part 15.225 (Fully Anechoic Chamber)

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Model: B-web 9108</td></tr> <tr><td style="padding: 2px;">Serial no.: 267</td></tr> <tr><td style="padding: 2px;">Applicant: Kaba GmbH</td></tr> <tr><td style="padding: 2px;">Test site: Fully anechoic room, cabin no. 2</td></tr> <tr><td style="padding: 2px;">Tested on: Test distance 3 metres</td></tr> <tr><td style="padding: 2px;">Date of test: 08/04/2010</td></tr> <tr><td style="padding: 2px;">Operator: T. Eberl</td></tr> <tr><td style="padding: 2px;">Test performed: by hand</td></tr> <tr><td style="padding: 2px;">File name: default.emi</td></tr> </table>	Model: B-web 9108	Serial no.: 267	Applicant: Kaba GmbH	Test site: Fully anechoic room, cabin no. 2	Tested on: Test distance 3 metres	Date of test: 08/04/2010	Operator: T. Eberl	Test performed: by hand	File name: default.emi	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Comment: - EUT powered via USB port - with TAG - with Ferrite at IF cable 74271111 (Würth)</td></tr> </table>	Comment: - EUT powered via USB port - with TAG - with Ferrite at IF cable 74271111 (Würth)
Model: B-web 9108											
Serial no.: 267											
Applicant: Kaba GmbH											
Test site: Fully anechoic room, cabin no. 2											
Tested on: Test distance 3 metres											
Date of test: 08/04/2010											
Operator: T. Eberl											
Test performed: by hand											
File name: default.emi											
Comment: - EUT powered via USB port - with TAG - with Ferrite at IF cable 74271111 (Würth)											

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

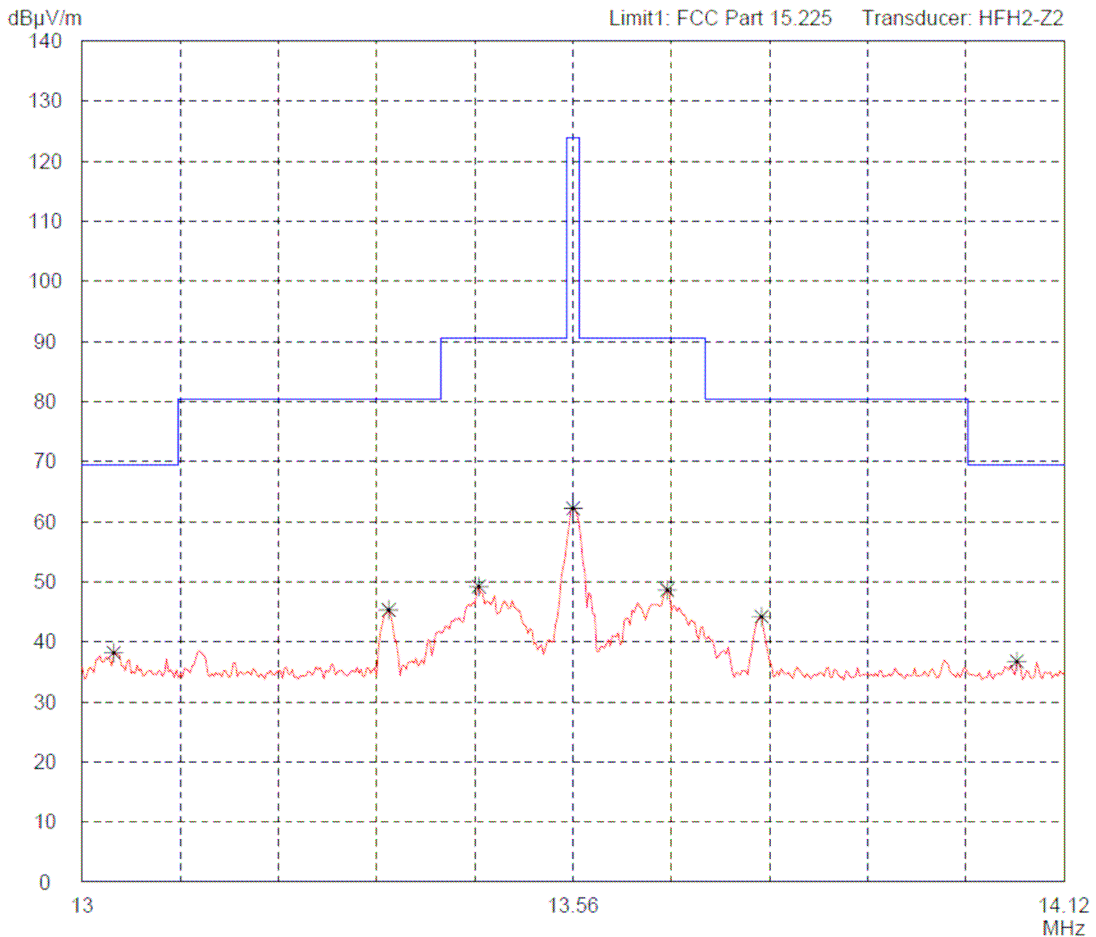


Result: Limit kept	Project file: 69547-02514
Page    of    Pages	

**Radiated Emission Test 13 MHz - 14.12 MHz**  
 acc. to FCC Part 15.225 (Fully Anechoic Chamber)

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Model: B-web 9108</td></tr> <tr><td style="padding: 2px;">Serial no.: 267</td></tr> <tr><td style="padding: 2px;">Applicant: Kaba GmbH</td></tr> <tr><td style="padding: 2px;">Test site: Fully anechoic room, cabin no. 2</td></tr> <tr><td style="padding: 2px;">Tested on: Test distance 3 metres</td></tr> <tr><td style="padding: 2px;">Date of test: 08/04/2010</td></tr> <tr><td style="padding: 2px;">Operator: T. Eberl</td></tr> <tr><td style="padding: 2px;">Test performed: by hand</td></tr> <tr><td style="padding: 2px;">File name: default.emi</td></tr> </table>	Model: B-web 9108	Serial no.: 267	Applicant: Kaba GmbH	Test site: Fully anechoic room, cabin no. 2	Tested on: Test distance 3 metres	Date of test: 08/04/2010	Operator: T. Eberl	Test performed: by hand	File name: default.emi	<p>Comment:</p> <ul style="list-style-type: none"> <li>- EUT powered via USB port</li> <li>- without TAG</li> <li>- with Ferrite at IF cable 74271111 (Würth)</li> </ul>
Model: B-web 9108										
Serial no.: 267										
Applicant: Kaba GmbH										
Test site: Fully anechoic room, cabin no. 2										
Tested on: Test distance 3 metres										
Date of test: 08/04/2010										
Operator: T. Eberl										
Test performed: by hand										
File name: default.emi										

<p>Detector: Peak</p>	<p>List of values: Selected by hand</p>
---------------------------	---

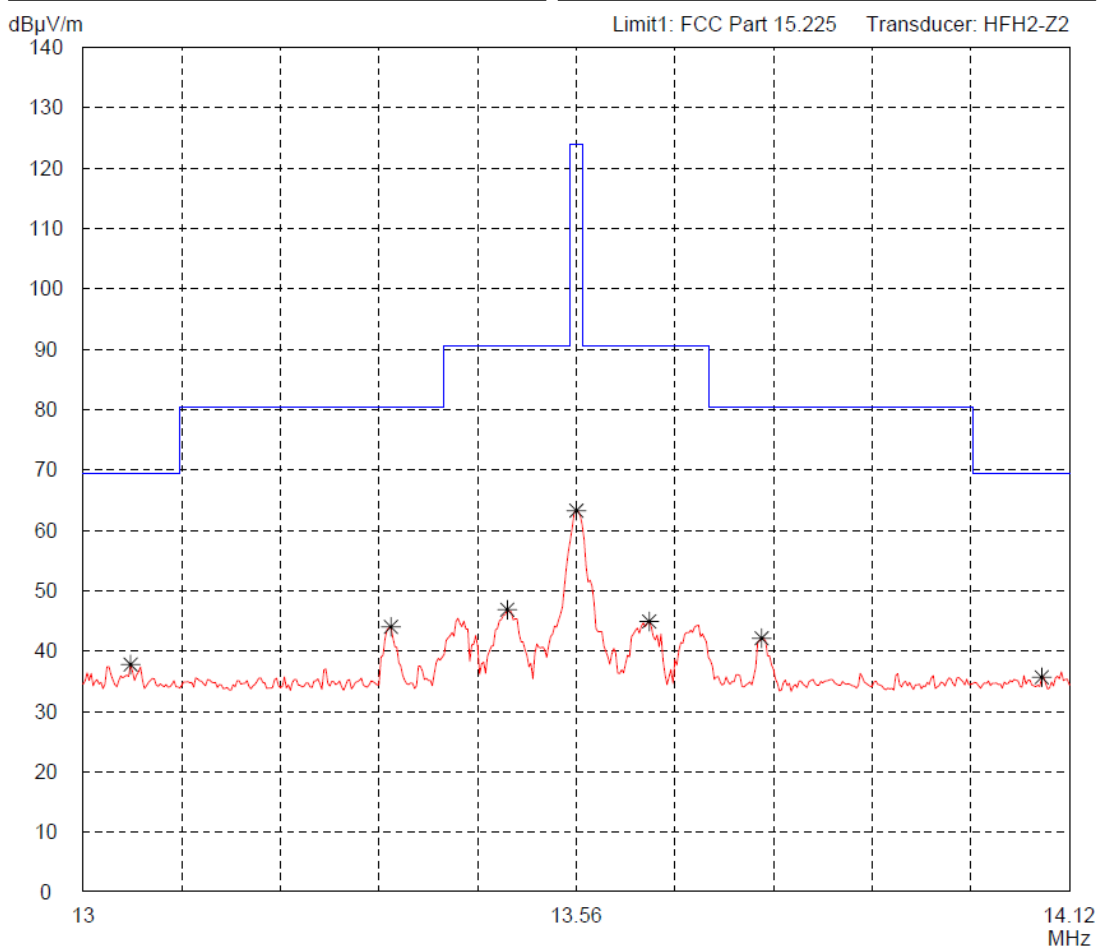


<p>Result: Limit kept</p>	<p>Project file: 69547-02514</p> <p style="text-align: right;">Page    of    Pages</p>
-------------------------------	--

**Radiated Emission Test 30 MHz - 1 GHz  
 acc. to FCC Part 15.225 (Fully Anechoic Chamber)**

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Model: B-web 9108</td></tr> <tr><td style="padding: 2px;">Serial no.: 267</td></tr> <tr><td style="padding: 2px;">Applicant: Kaba GmbH</td></tr> <tr><td style="padding: 2px;">Test site: Fully anechoic room, cabin no. 2</td></tr> <tr><td style="padding: 2px;">Tested on: Test distance 3 meters Horizontal Polarization</td></tr> <tr><td style="padding: 2px;">Date of test: 07/27/2010</td><td style="padding: 2px;">Operator: T. Eberl</td></tr> <tr><td style="padding: 2px;">Test performed: automatically</td><td style="padding: 2px;">File name: default.emi</td></tr> </table>	Model: B-web 9108	Serial no.: 267	Applicant: Kaba GmbH	Test site: Fully anechoic room, cabin no. 2	Tested on: Test distance 3 meters Horizontal Polarization	Date of test: 07/27/2010	Operator: T. Eberl	Test performed: automatically	File name: default.emi	<p>Comment:</p> <ul style="list-style-type: none"> <li>- EUT powered via USB port</li> <li>- with TAG</li> <li>- with Ferrite at IF cable 74271111 (Würth)</li> </ul>
Model: B-web 9108										
Serial no.: 267										
Applicant: Kaba GmbH										
Test site: Fully anechoic room, cabin no. 2										
Tested on: Test distance 3 meters Horizontal Polarization										
Date of test: 07/27/2010	Operator: T. Eberl									
Test performed: automatically	File name: default.emi									

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

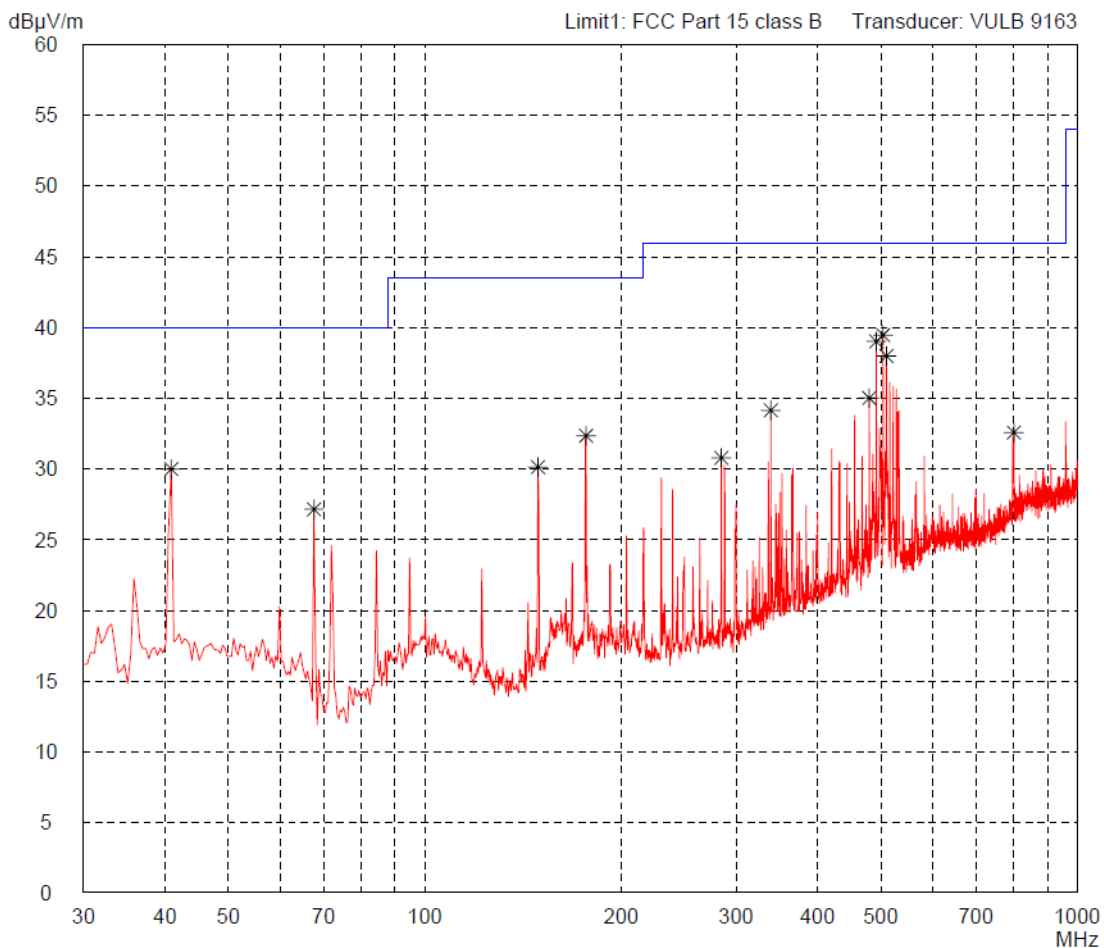


Result: Prescan	Project file: 69547-02514
--------------------	------------------------------

Page    of    Pages

Radiated Emission Test 30 MHz - 1 GHz  
 acc. to FCC Part 15.225 (Fully Anechoic Chamber)

Model: B-web 9108	Comment: - EUT powered via USB port - without TAG - with Ferrite at IF cable 74271111 (Würth)
Serial no.: 267	
Applicant: Kaba GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 meters Horizontal Polarization	
Date of test: 07/27/2010	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

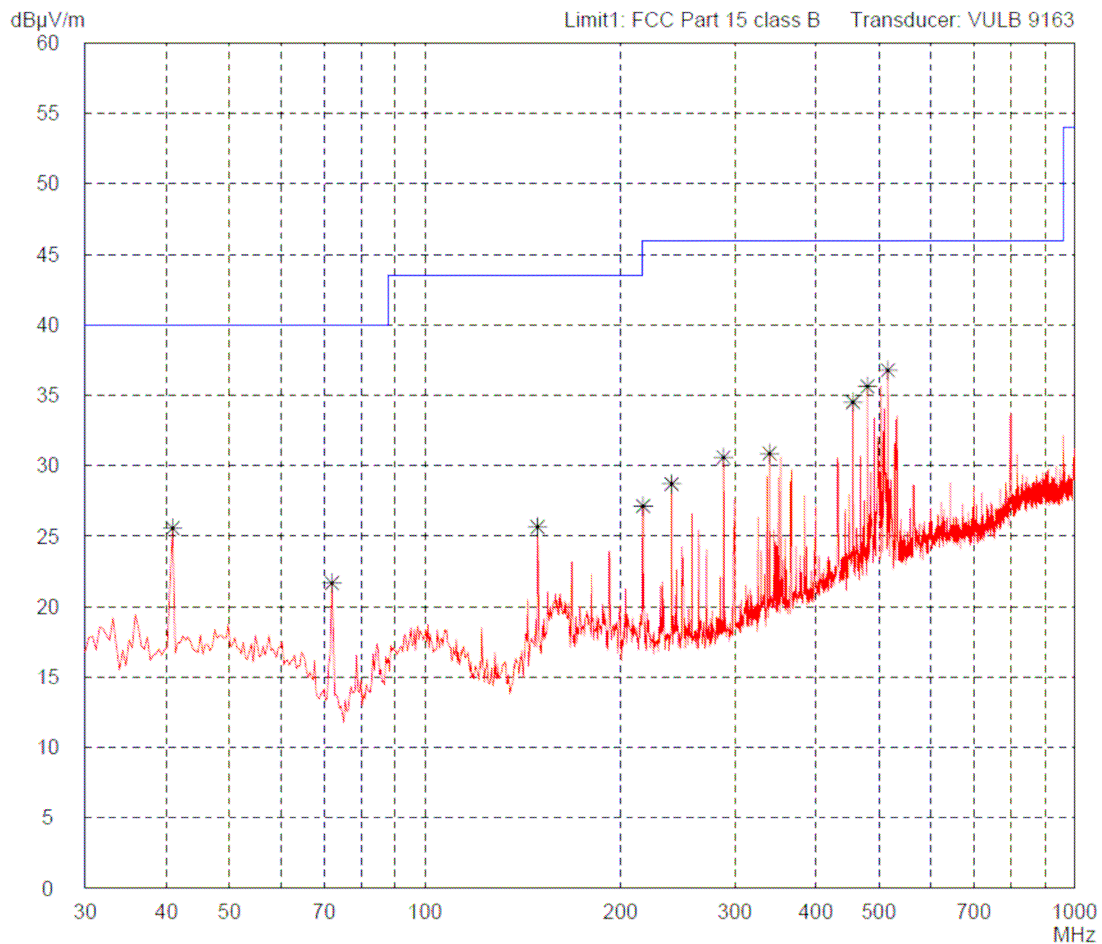


Result: Prescan	Project file: 69547-02514	Page of Pages
--------------------	------------------------------	---------------

**Radiated Emission Test 30 MHz - 1 GHz  
 acc. to FCC Part 15.225 (Fully Anechoic Chamber)**

<p><b>Model:</b> B-web 9108</p> <p><b>Serial no.:</b> 267</p> <p><b>Applicant:</b> Kaba GmbH</p> <p><b>Test site:</b> Fully anechoic room, cabin no. 2</p> <p><b>Tested on:</b> Test distance 3 meters Vertical Polarization</p> <p><b>Date of test:</b> 07/27/2010</p> <p><b>Operator:</b> T. Eberl</p> <p><b>Test performed:</b> automatically</p> <p><b>File name:</b> default.emi</p>	<p><b>Comment:</b></p> <ul style="list-style-type: none"> <li>- EUT powered via USB port</li> <li>- with TAG</li> <li>- with Ferrite at IF cable 74271111 (Würth)</li> </ul>
---	--

<p><b>Detector:</b> Peak</p>	<p><b>List of values:</b> Selected by hand</p>
----------------------------------	--

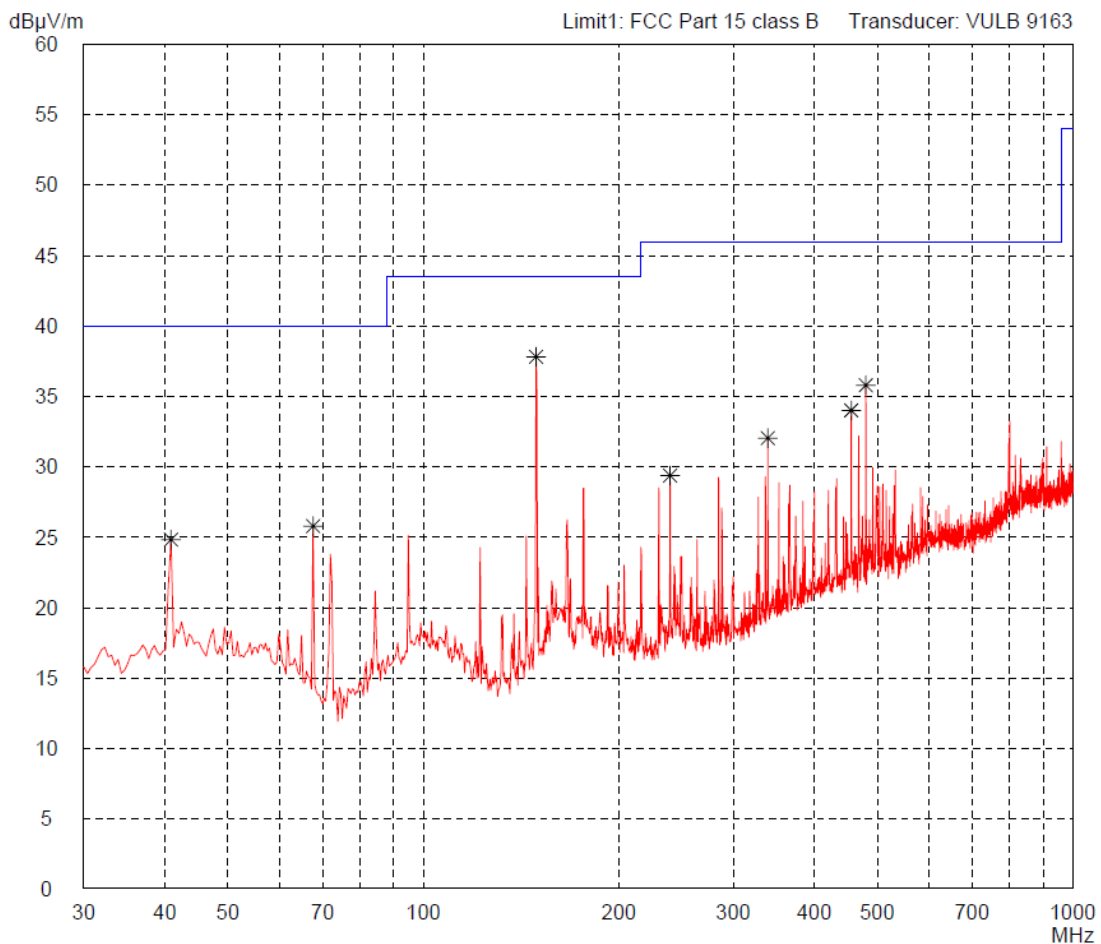


<p><b>Result:</b> Prescan</p>	<p><b>Project file:</b> 69547-02514</p> <p style="text-align: right;">Page    of    Pages</p>
-----------------------------------	---




Radiated Emission Test 30 MHz - 1 GHz  
 acc. to FCC Part 15.225 (Fully Anechoic Chamber)

Model: B-web 9108	Comment:  - EUT powered via USB port  - without TAG  - with Ferrite at IF cable 74271111 (Würth)
Serial no.: 267	
Applicant: Kaba GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 meters Vertical Polarization	
Date of test: 07/27/2010	Operator: T. Eberl
Test performed: automatically	File name: default.emi


Detector: Peak	List of values: Selected by hand
-------------------	-------------------------------------

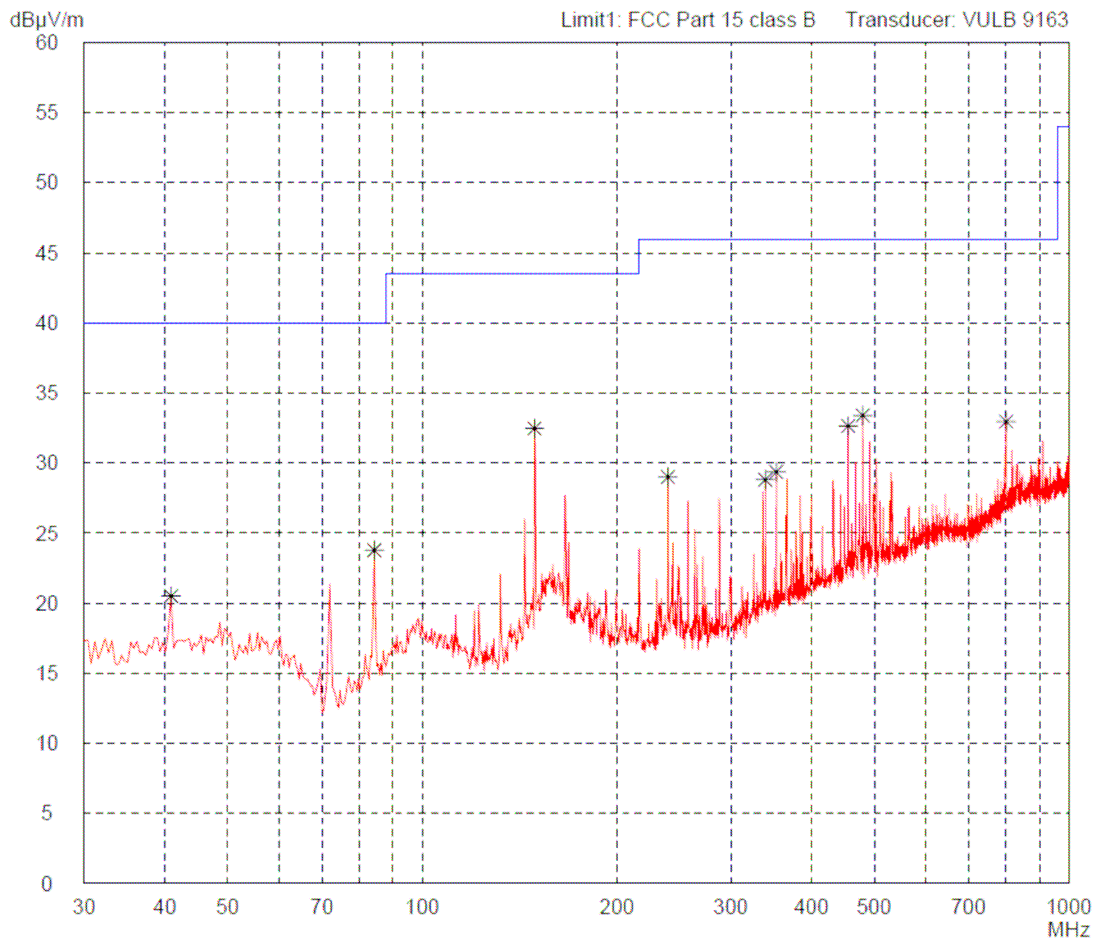

Result: Prescan	Project file: 69547-02514	Page    of    Pages
--------------------	------------------------------	---------------------

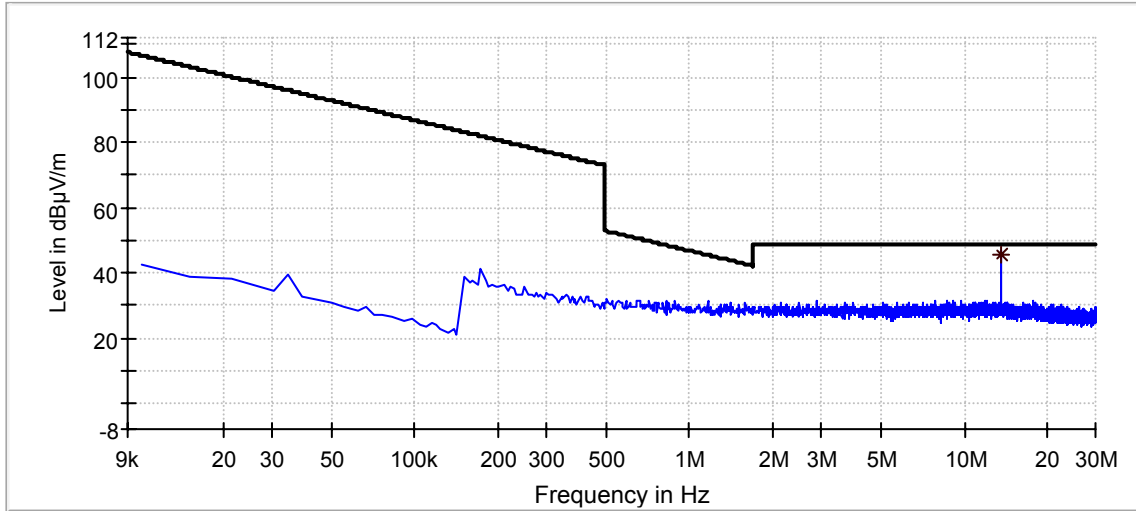

— FCC 15.209 mag (10 m)      — MaxPeak-ClearWrite-PK+      \* Final Result 1-QPK

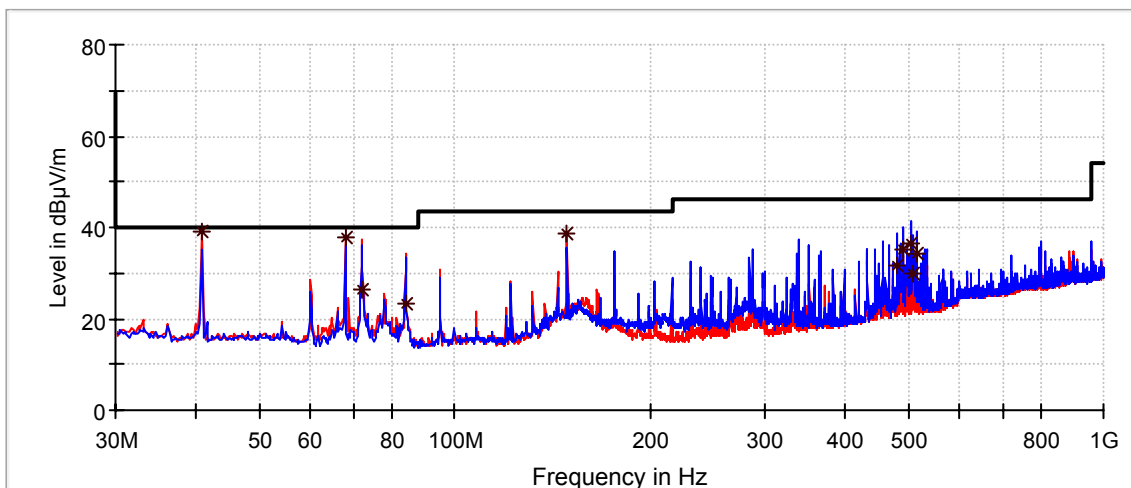

— FCC 15.209  
— MaxPeak-MaxHold-PK+  
— MaxPeak-MaxHold-PK+  
\* Final Result 1-QPK