



SENTON

Choose certainty.
Add value.

December 12,
2011

Page 1 of 59

Prüfbericht / Test Report

Nr. / No. 69547-04281-2 (Edition 3)

Applicant: Kaba GmbH
Type of equipment: RFID Reader with USB interface
Type designation: B-web 91 08 LEA
Order No.: 157640
Test standards: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207, 15.215 and 15.225

Industry Canada Radio Standards Specifications
RSS-GEN Issue 3, Sections 7.2.2, 7.2.4 and 7.2.5 and
RSS-210 Issue 8, Section A2.6 (Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	4
3	Identification of the Test Laboratory	5
4	Summary	6
5	Operation Mode and Configuration of EUT	7
6	Measurement Procedures	8
6.1	Bandwidth Measurements.....	8
6.2	Conducted AC Powerline Emission	9
6.3	Radiated Emission Measurement 9 kHz to 30 MHz.....	11
6.4	Radiated Emission at Alternative Test Site	13
6.5	Carrier Frequency Stability.....	15
7	Photographs Taken During Testing.....	17
8	Test Results	22
8.1	Occupied Bandwidth	24
8.2	Bandwidth of the Emission.....	28
8.3	Designation of Emissions.....	30
8.4	Conducted Powerline Emission Measurement 150 kHz to 30 MHz	31
8.5	Spectrum Mask.....	36
8.6	Radiated Emission Measurement 9 kHz to 30 MHz.....	38
8.7	Radiated Emission Measurement 30 MHz to 1 GHz.....	40
8.8	Carrier Frequency Stability.....	42
8.9	Exposure of Humans to RF Fields	45
9	Referenced Regulations.....	47
10	Test Equipment List with Calibration Data.....	49
11	Revision History	50
Annex A	Charts taken during testing.....	51

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	B-web 91 08 LEA
Parts ² :	
Serial number(s):	043123-000204
Manufacturer:	Kaba GmbH
Type of equipment:	RFID Reader with USB interface
Version:	As received
FCC ID:	
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	13.110 - 14.010 MHz
Frequency range:	13.56 MHz
Operating frequency:	13.56 MHz
Type of modulation:	ASK
Pulse train:	---
Pulse width:	---
Number of RF-channels:	1
Channel spacing:	---
Designation of emissions ³	
Type of antenna:	Integrated on printed board
Size/length of antenna:	9.5 x 6 cm
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of power supply:	DC supply over USB interface
Specifications for power supply:	nominal voltage: 5.00 V minimum voltage: 5.25 V maximum voltage: 4.25 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".



2 Administrative Data

Application details

Applicant (full address):	Kaba GmbH Albertstraße 378056 Villingen-SchwenningenDeutschland
Contact person:	Herr Ralf Altmann
Order number:	157640
Receipt of EUT:	December 6, 2011
Date(s) of test:	December 6, 2011 to December 7, 2011
Note(s):	Mr. Ralf Altmann, representing the applicant attended all tests.

Report details

Report number:	69547-04281-2
Edition Fehler! Hyperlink-Referenz ungültig.:	3
Issue date:	December 12, 2011

3 Identification of the Test Laboratory

Details of the Test Laboratory

Company name:	TÜV SÜD SENTON GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-PL-171/94-03
FCC test site registration number	90926
Industry Canada test site registration:	3050A-2
Contact person:	Mr. Johann Roidt
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207, 15.215 and 15.225

of the Federal Communication Commission (FCC) and the

Radio Standards Specifications

**RSS-GEN Issue 3, Sections 7.2.2, 7.2.4 and 7.2.5 and
RSS-210 Issue 8, Section , A2.6 (Category I Equipment)**

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl

5 Operation Mode and Configuration of EUT

Operation Mode(s)

Reading tag continuously.

Configuration(s) of EUT

The EUT was configured as peripheral input device of a laptop PC.

List of ports and cables

Port	Description	Classification ⁴	Cable type	Cable length
1	AC supply of AC/DC adapter of laptop PC	ac power	Unshielded	2 m
2	DC supply of laptop PC	dc power	Unshielded	2 m
3	USB interface	signal/control port	Shielded	1.8 m

List of devices connected to EUT

Item	Description	Type Designation	Serial no. or ID	Manufacturer

List of support devices

Item	Description	Type Designation	Serial no. or ID	Manufacturer
1	Laptop PC	Fujitsu Lifebook S751 S26291-K322-V200	DSCA 006209	Fujitsu
2	AC/DC adapter of laptop PC	PN: CP483452-01 FMV-AC330 FPCAC88	---	Fujitsu
3	Test card			

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures

6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2 IC RSS-210 Issue 8, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.3)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

6.2 Conducted AC Powerline Emission

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, section 15.207
IC RSS-Gen Issue 3, section 7.2.4

Guide: ANSI C63.4 / CISPR 22


Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:

First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.

If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.

According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.

Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.

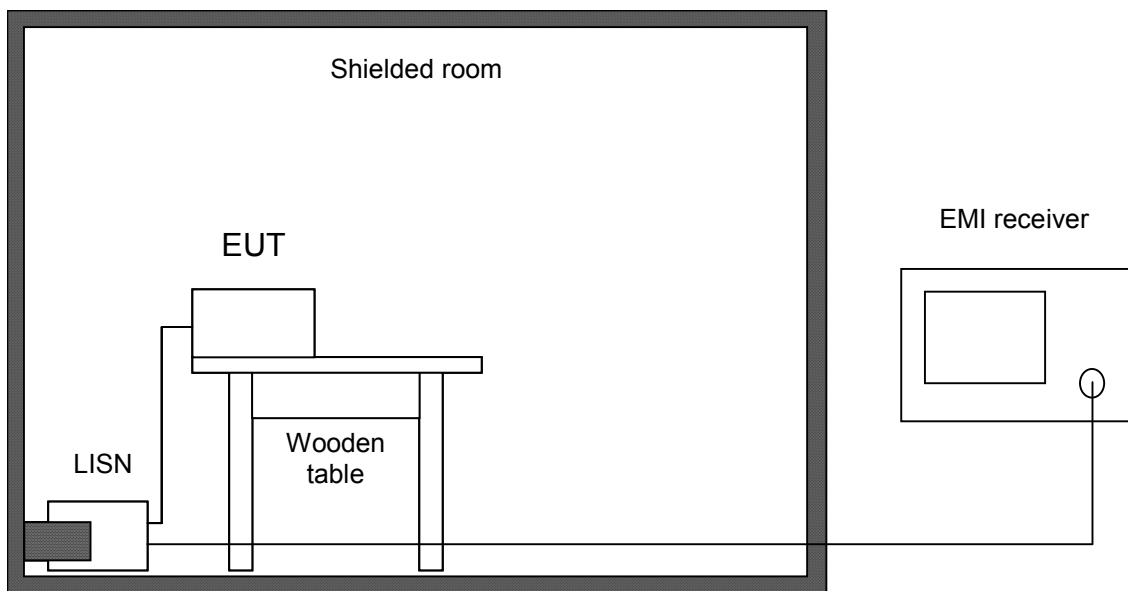



Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/> V-network	ESH 3-Z5	1059	894785/005	Rohde & Schwarz
<input type="checkbox"/> V-network	ESH 3-Z5	1218	830952/025	Rohde & Schwarz
<input type="checkbox"/> Artificial mains network	ESH 2-Z5	1536	842966/004	Rohde & Schwarz
<input type="checkbox"/> Shielded room	No. 1	1451	---	Albatross
<input checked="" type="checkbox"/> Shielded room	No. 4	1454	3FD 100 544	Euroshield

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, sections 15.205, 15.215(b) and 15.225(a)-(d)
 IC RSS-GEN Issue 3, sections 7.2.2 and 7.2.5 and
 IC RSS-210 Issue 8, section A2.6

Guide: ANSI C63.4

Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.


Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).

Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

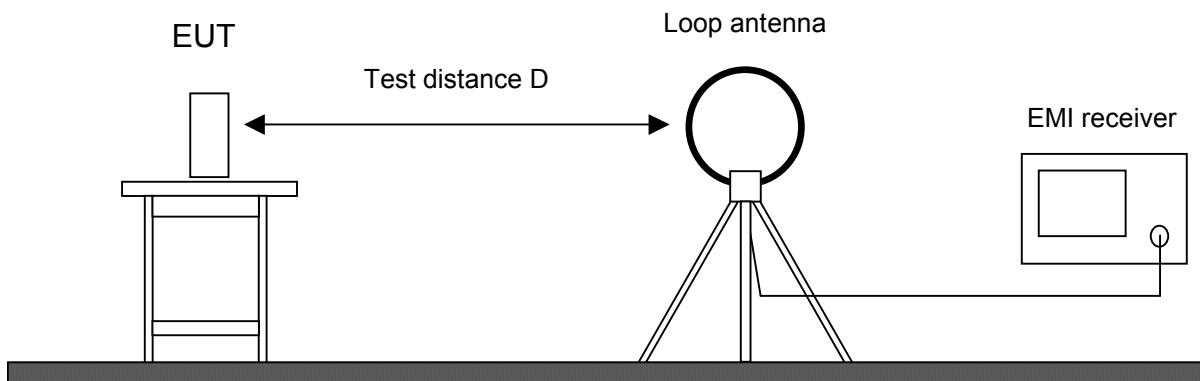




Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input type="checkbox"/> Preamplifier	Cabin no. 2 CPA9231A	1651	3393	Schaffner
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
<input type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross

6.4 Radiated Emission at Alternative Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-GEN Issue 3, sections 7.2.2(b)(c) and 7.2.5 and IC RSS-210 Issue 8, section A2.6
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.</p> <p>If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels.</p> <p>Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.</p> <p>With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.</p>	

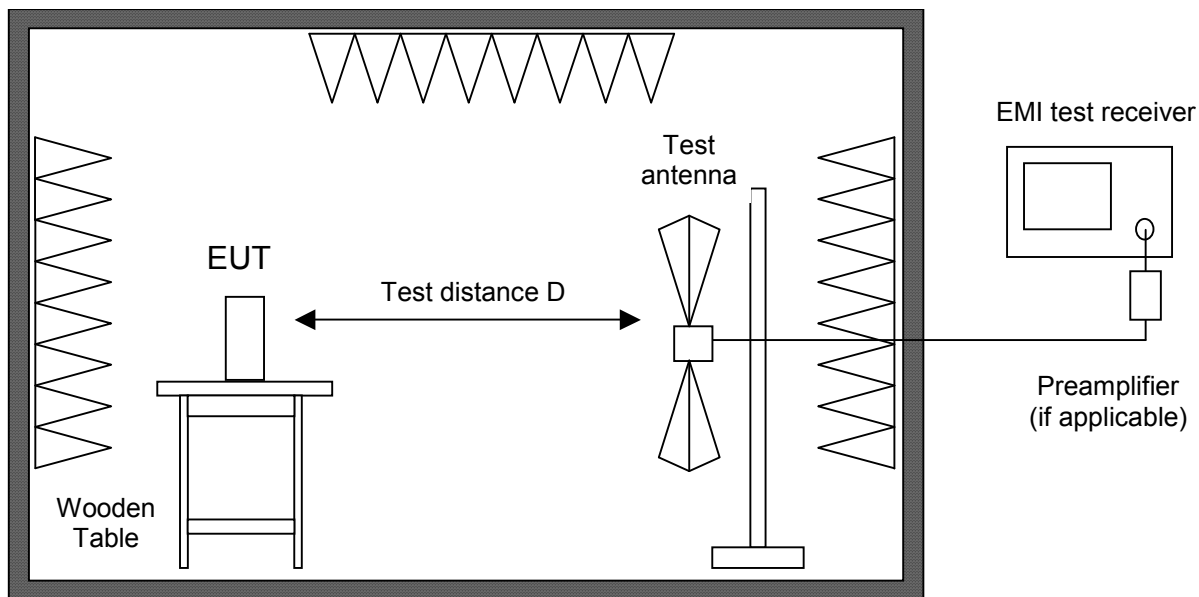

Alternate test site (semi anechoic room)

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input checked="" type="checkbox"/> Trilog antenna	Cabin no. 8 VULB 9163	2058	9163-408	Schwarzbeck
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross

6.5 Carrier Frequency Stability

Measurement Procedure:

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 3, section 4.7 and IC RSS-210 Issue 8, section A2.6
Guide:	ANSI C63.4

The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °C.


If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage
- the battery nominal voltage
- 85% of the battery nominal voltage
- the battery operating end point voltage which shall be specified by the equipment manufacturer

The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.

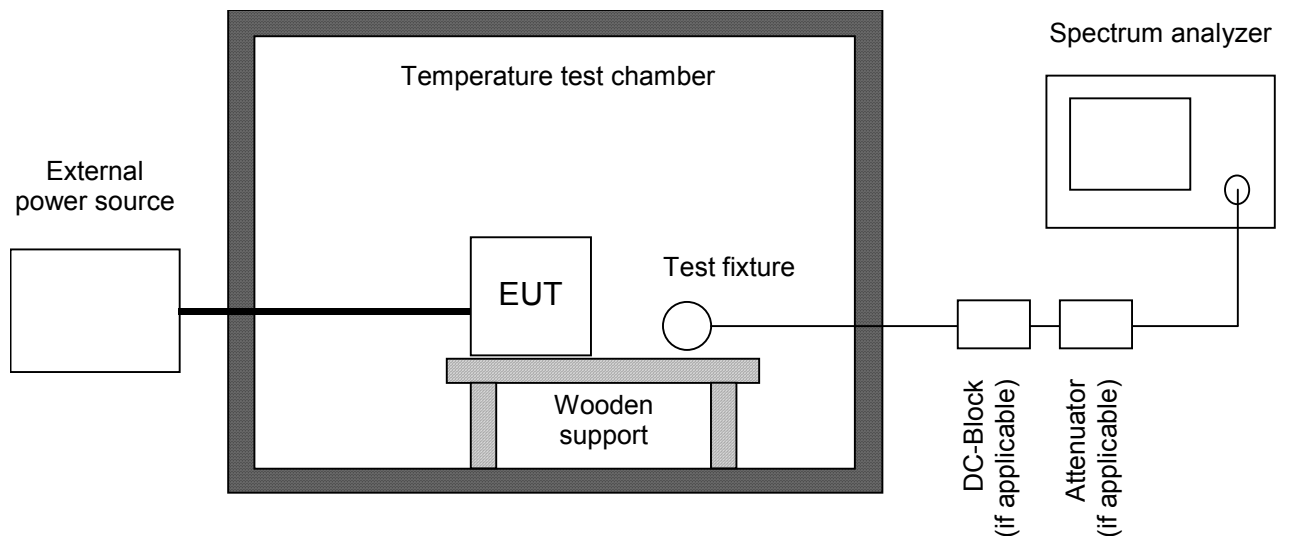

Test instruments used:


Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda
<input checked="" type="checkbox"/> Test probe	TP 01	1628	001	Senton
<input checked="" type="checkbox"/> Multimeter	21 III	1653	76530546	Fluke
<input type="checkbox"/> Multimeter	21 III	1654	76381229	Fluke
<input type="checkbox"/> Multimeter	Fluke 77 III	1975	92370108	Fluke
<input type="checkbox"/> Multimeter	Fluke 77 IV	1976	93090238	Fluke
<input type="checkbox"/> Multimeter	Fluke 177	2025	96720024	Fluke
<input type="checkbox"/> Multimeter	Fluke 177	2026	96720025	Fluke
<input checked="" type="checkbox"/> DC power supply	NGSM 32/10	1267	203	Rohde & Schwarz
<input type="checkbox"/> Isolating transformer	RT 5A	1127	10387	Grundig
<input type="checkbox"/> Isolating transformer	RT 5A	1128	10416	Grundig
<input checked="" type="checkbox"/> Temperature test chamber	HT 4010	1271	07065550	Heraeus

7 Photographs Taken During Testing



Test setup for conducted AC powerline emission measurement




Test setup for radiated emission measurement 9 kHz – 30 MHz

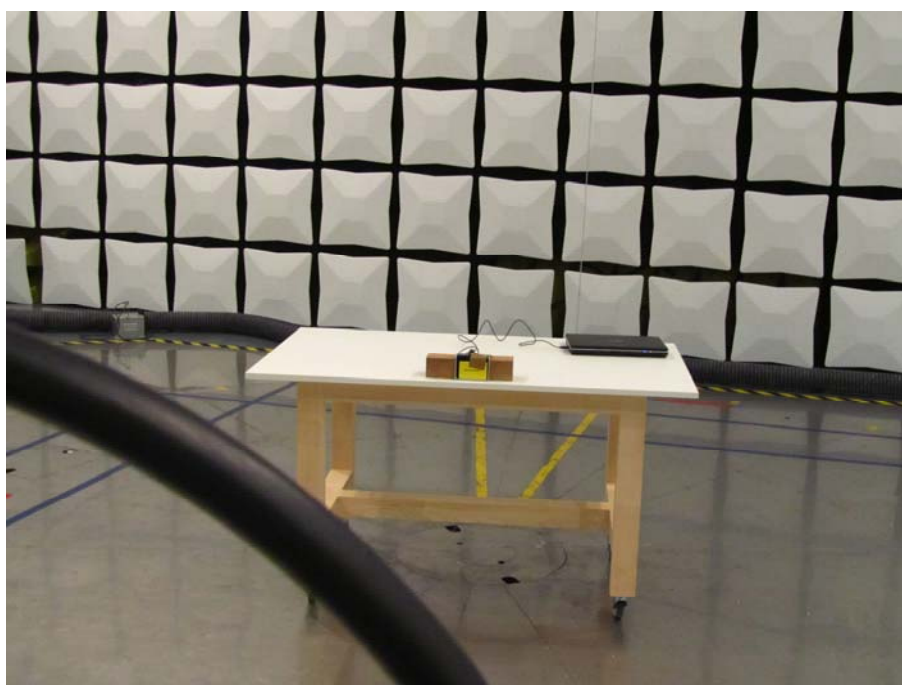

Test setup for radiated emission measurement (alternate test site)

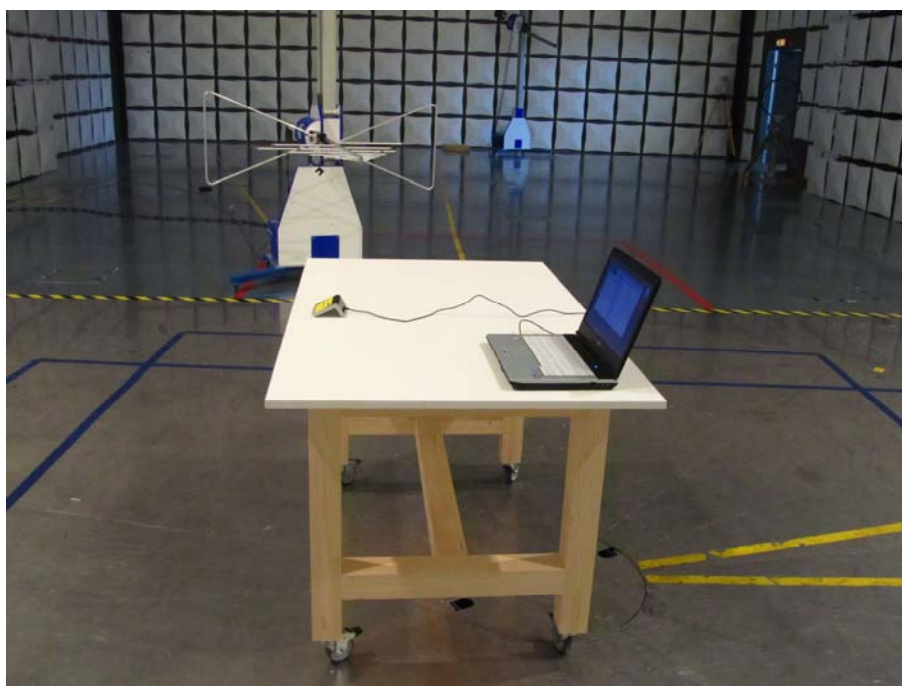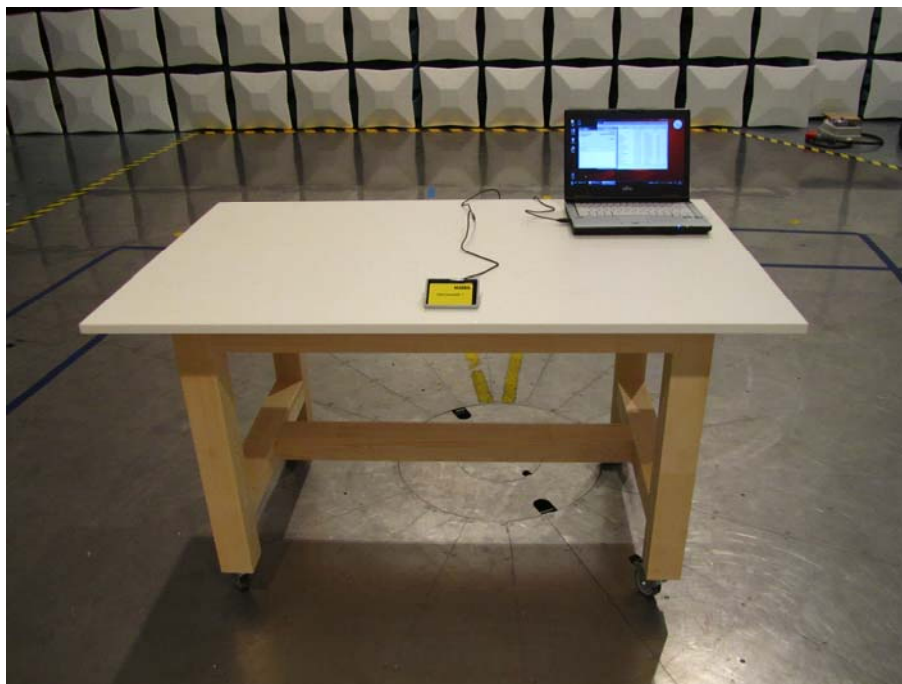

Test setup for radiated emission measurement (alternate test site) - continued -

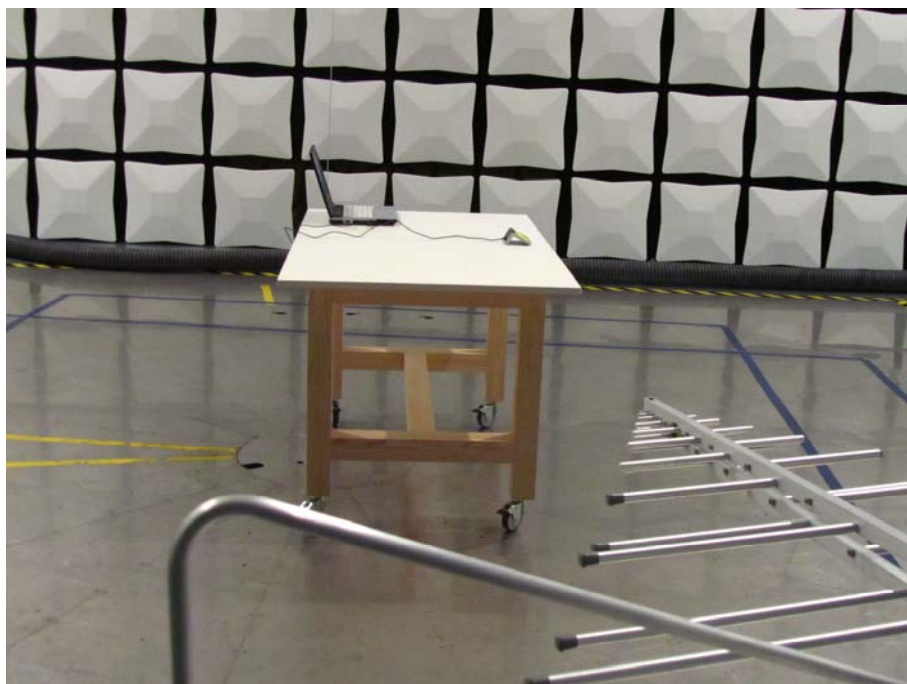



8 Test Results

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	24	Recorded
15.215(c)	Bandwidth of the emission	28	Test passed
2.201, 2.202	Class of emission	30	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a) 15.205(d)(7)	Restricted bands of operation	--- ⁵	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	31	Test passed
15.225(a)-(d)	Spectrum Mask	36	Test passed
15.205(b) 15.215(b) 15.225(a)(d)	Radiated emission 9 kHz to 30 MHz	38	Test passed
15.205(b) 15.225(d)	Radiated emission 30 MHz to 1 GHz	40	Test passed
15.225(e)	Carrier frequency stability	42	Test passed

⁵ See "Spectrum Mask" for the 13.36 to 13.41 MHz band. For all other restricted bands see "Radiated Emission".

IC RSS-GEN Issue 3			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.8	Transmitter output power (conducted)	---	Not applicable
4.6.1	Occupied Bandwidth	24	Recorded
8	Designation of emissions	30	Calculated
4.5	Pulsed operation	---	Not applicable
2.2(a)	Restricted bands and unwanted emission frequencies	--- ⁶	Test passed
7.2.2(b)(c) 7.2.5	Unwanted emissions 9 kHz to 30 MHz	38	Test passed
2.2(b)(c) 7.2.5	Unwanted emissions 30 MHz to 1 GHz	40	Test passed
7.2.2	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	31	Test passed
5.5	Exposure of Humans to RF Fields	45	Exempted from SAR and RF evaluation

IC RSS-210 Issue 8			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
A2.6	Spectrum Mask	36	Test passed
A2.6	Unwanted emissions 9 kHz to 30 MHz	38	Test passed
A2.6	Unwanted emissions 30 MHz to 1 GHz	40	Test passed
A2.6	Carrier frequency stability	42	Test passed


⁶ See "Spectrum Mask" and "Unwanted emissions".

8.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	<p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	
Date of test:	December 6, 2011
Test site:	Fully anechoic room, cabin no. 8

Occupied Bandwidth (99 %):

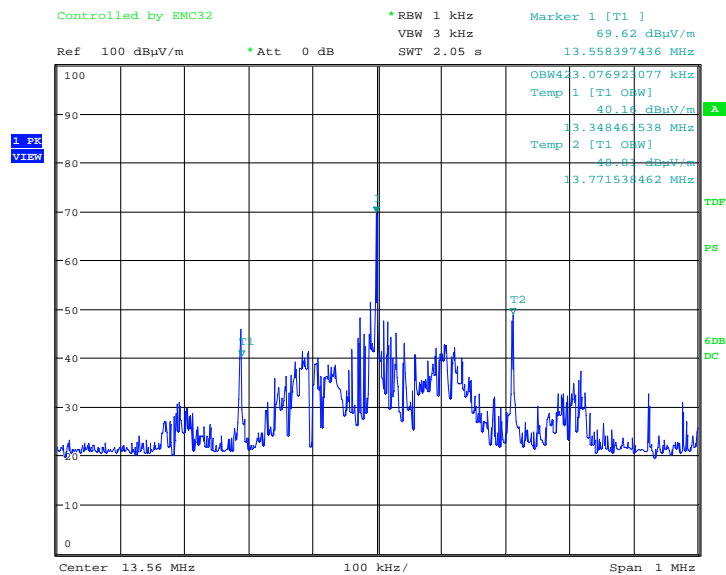

Date: 6.DEC.2011 14:15:14


Occupied Bandwidth (99 %): **324.076 kHz**

Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 3, section 4.6.1
Guide:	IC RSS-Gen Issue 3, section 4.6.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	
Date of test:	December 6, 2011
Test site:	Fully anechoic room, cabin no. 8

Occupied Bandwidth (99 %):

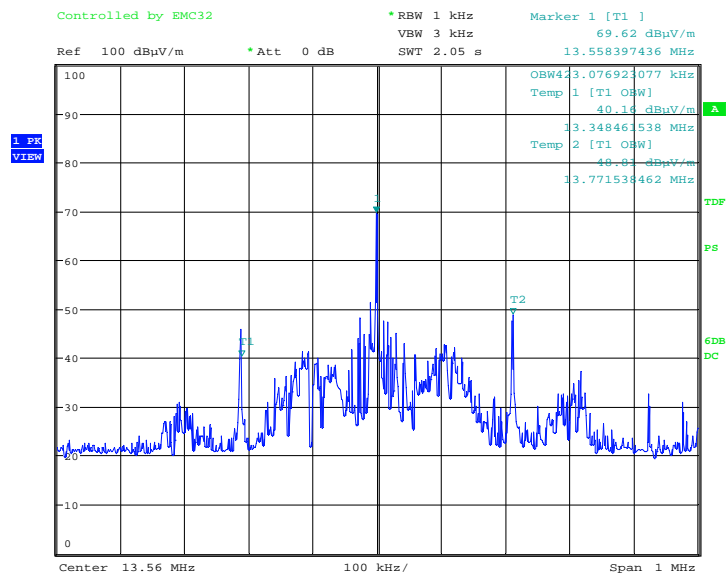


Date: 6.DEC.2011 14:15:14

Occupied Bandwidth (99 %): **324.076 kHz**

8.2 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.215(c)	
Guide:	ANSI C63.4	
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	
Date of test:	December 8, 2011
Test site:	Fully anechoic room, cabin no. 8

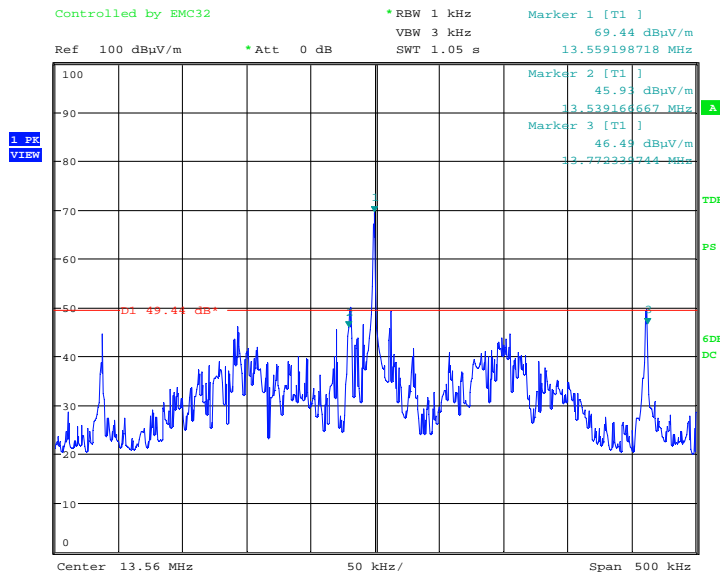

Date: 6.DEC.2011 14:31:24

Permitted frequency band:	13.110 - 14.010 MHz	
20 dB bandwidth:	233.1 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances Fehler! Hyperlink-Referenz ungültig.:	+0.046 kHz -0.105 kHz	
Bandwidth of the emission:	233.3 kHz	within permitted frequency band ⁷ : <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁷ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 3, sections 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------

B_n = Necessary Bandwidth	$B_n = 2BK$
B = Modulation rate	B = 115 kHz
K = Overall numerical factor	K = 1
Calculation:	$B_n = 2 \cdot (115 \text{ kHz}) \cdot 1 = 230 \text{ kHz}$

Designation of Emissions:	230KA1D
---------------------------	----------------

8.4 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-GEN Issue 3, section 7.2.4		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dBµV)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		

Test Result:	Test passed
--------------	-------------



SENTON

Comment:	
Date of test:	December 6, 2011
Test site:	Shielded room, cabin no. 4

Test Result:	Test passed - Carrier frequency excluded
--------------	--

Tested on:	L1
------------	----

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0,170	Quasi-Peak	48,0	0,0	48,0	65,0	17,0
0,190	Quasi-Peak	43,3	0,0	43,3	64,0	20,7
0,255	Quasi-Peak	47,1	0,0	47,1	61,6	14,5
0,310	Quasi-Peak	40,1	0,0	40,1	60,0	19,9
0,430	Quasi-Peak	35,1	0,0	35,1	57,3	22,2
0,465	Quasi-Peak	37,6	0,0	37,6	56,6	19,0
0,595	Quasi-Peak	40,2	0,0	40,2	56,0	15,8
0,685	Quasi-Peak	32,9	0,0	32,9	56,0	23,1
0,830	Quasi-Peak	33,5	0,0	33,5	56,0	22,5
1,360	Quasi-Peak	34,4	0,0	34,4	56,0	21,6
1,870	Quasi-Peak	33,6	0,0	33,6	56,0	22,4
13,560	Quasi-Peak	75,5	0,0	75,5	60,0	-15,5
14,195	Quasi-Peak	47,5	0,0	47,5	60,0	12,5
17,960	Quasi-Peak	43,9	0,0	43,9	60,0	16,1
20,190	Quasi-Peak	39,5	0,0	39,5	60,0	20,5



Tested on: N

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0,170	Quasi-Peak	48,3	0,0	48,3	65,0	16,7
0,250	Quasi-Peak	46,6	0,0	46,6	61,8	15,2
0,315	Quasi-Peak	39,6	0,0	39,6	59,8	20,2
0,425	Quasi-Peak	38,7	0,0	38,7	57,3	18,6
0,470	Quasi-Peak	37,7	0,0	37,7	56,5	18,8
0,600	Quasi-Peak	39,9	0,0	39,9	56,0	16,1
0,755	Quasi-Peak	34,5	0,0	34,5	56,0	21,5
0,850	Quasi-Peak	36,8	0,0	36,8	56,0	19,2
1,355	Quasi-Peak	34,8	0,0	34,8	56,0	21,2
1,880	Quasi-Peak	35,1	0,0	35,1	56,0	20,9
2,980	Quasi-Peak	35,1	0,0	35,1	56,0	20,9
4,520	Quasi-Peak	34,5	0,0	34,5	56,0	21,5
13,560	Quasi-Peak	77,3	0,0	77,3	60,0	-17,3
17,625	Quasi-Peak	42,4	0,0	42,4	60,0	17,6
19,720	Quasi-Peak	39,1	0,0	39,1	60,0	20,9

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$



SENTON

Comment:	With 50 Ω termination
Date of test:	December 6, 2011
Test site:	Shielded room, cabin no. 1

Test Result:	Test passed
--------------	-------------

Tested on:	L1
------------	----

Frequency (MHz)	Detector	Reading Value (dBμV)	Correction Factor (dB)	Final Value (dBμV)	Limit (dBμV)	Margin (dB)
0,165	Quasi-Peak	49,4	0,0	49,4	65,2	15,8
0,165	Average	44,7	0,0	44,7	55,2	10,5
0,245	Average	46,3	0,0	46,3	51,9	5,6
0,250	Quasi-Peak	45,5	0,0	45,5	61,8	16,3
0,325	Average	34,6	0,0	34,6	49,6	15,0
0,410	Average	31,5	0,0	31,5	47,6	16,1
0,570	Quasi-Peak	40,6	0,0	40,6	56,0	15,4
0,575	Average	32,6	0,0	32,6	46,0	13,4
0,815	Average	31,3	0,0	31,3	46,0	14,7
0,820	Average	30,0	0,0	30,0	46,0	16,0
13,560	Quasi-Peak	57,1	0,0	57,1	60,0	2,9
17,115	Quasi-Peak	42,7	0,0	42,7	60,0	17,3
18,365	Average	37,9	0,0	37,9	50,0	12,1
19,890	Average	34,4	0,0	34,4	50,0	15,6
24,395	Average	32,1	0,0	32,1	50,0	17,9



Tested on: N

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0,205	Quasi-Peak	49,8	0,0	49,8	63,4	13,6
0,205	Average	46,6	0,0	46,6	53,4	6,8
0,305	Quasi-Peak	45,9	0,0	45,9	60,1	14,2
0,305	Average	42,5	0,0	42,5	50,1	7,6
0,410	Quasi-Peak	41,3	0,0	41,3	57,6	16,3
0,410	Average	35,9	0,0	35,9	47,6	11,7
0,610	Quasi-Peak	40,4	0,0	40,4	56,0	15,6
0,615	Average	33,7	0,0	33,7	46,0	12,3
0,720	Average	28,9	0,0	28,9	46,0	17,1
0,920	Average	32,5	0,0	32,5	46,0	13,5
1,430	Average	29,7	0,0	29,7	46,0	16,3
13,560	Quasi-Peak	58,0	0,0	58,0	60,0	2,0
17,940	Quasi-Peak	43,2	0,0	43,2	60,0	16,8
18,250	Average	36,4	0,0	36,4	50,0	13,6
19,745	Average	33,3	0,0	33,3	50,0	16,7

Sample calculation of final values:


$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

8.5 Spectrum Mask


Rules and specifications:	CFR 47 Part 15, section 15.225(a)-(d) IC RSS-210 Issue 8, section A2.6			
Guide:	ANSI C63.4			
Description:	Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength (dB $\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	
Date of test:	December 6, 2011
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters
Extrapolation Factor:	40 dB/decade

Test Result:	Test passed
--------------	-------------

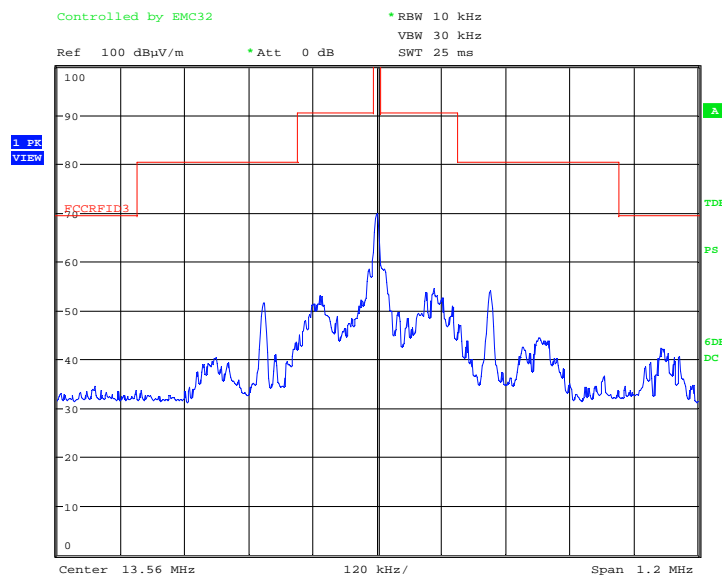

Date: 6.DEC.2011 13:50:09

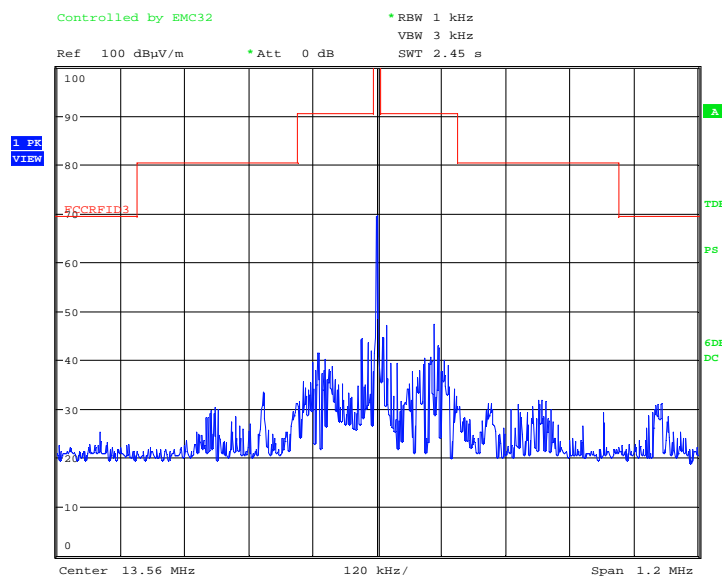

Date: 6.DEC.2011 13:57:35

8.6 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.225(a)-(d) IC RSS-GEN Issue 3, sections 7.2.2(b)(c) and 7.2.5 and IC RSS-210 Issue 8, section A2.6			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
14.010 - 30.000	30	29.5	30	
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	
Date of test:	December 6, 2011
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value ($\text{dB}\mu\text{V}$)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value ($\text{dB}\mu\text{V}/\text{m}$)	Limit ($\text{dB}\mu\text{V}/\text{m}$)	Margin (dB)
		d1 (m)	d (m)							
13.56000	Quasi-Peak	10	30	21.6	20.0	-19.1		22.5	84.0	61.5

Sample calculation of final values:

$$\text{Extrapolation Factor (dB)} = (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}$$

Note: Extrapolation factor (dB) and final value (dB μ V/m) are relating to distance d.

8.7 Radiated Emission Measurement 30 MHz to 1 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-GEN Issue 3, sections 7.2.2(b)(c) and 7.2.5 and IC RSS-210 Issue 8, section A2.6		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission at Alternative Test Site (6.4)		

Comment:	
Date of test:	December 6, 2011
Test site:	Frequencies ≤ 1 GHz: Semi-anechoic room, cabin no. 8
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading ($\text{dB}\mu\text{V}$)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value ($\text{dB}\mu\text{V}/\text{m}$)	Limit ($\text{dB}\mu\text{V}/\text{m}$)	Margin (dB)
67.780	horizontal	Quasi-Peak	22.7	11.0		33.7	40.0	6.3
121.340	horizontal	Quasi-Peak	5.7	11.8		17.5	43.5	26.0
135.580	horizontal	Quasi-Peak	23.1	11.1		34.2	43.5	9.3
148.460	horizontal	Quasi-Peak	14.2	10.6		24.8	43.5	18.7
149.180	horizontal	Quasi-Peak	32.8	10.6		43.4	43.5	0.1
149.980	horizontal	Quasi-Peak	21.8	10.6		32.4	43.5	11.1
257.630	horizontal	Quasi-Peak	30.3	14.2		44.5	46.0	1.5
410.510	horizontal	Quasi-Peak	8.2	17.6		25.8	46.0	20.2
666.200	horizontal	Quasi-Peak	10.3	21.9		32.2	46.0	13.8
676.610	vertical	Quasi-Peak	7.0	21.9		28.9	46.0	17.1
854.200	horizontal	Quasi-Peak	13.0	24.2		37.2	46.0	8.8

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V}/\text{m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB}/\text{m)} + \text{Pulse Train Correction (dB)}$$

TÜV SÜD SENTON GmbH
Äußere Frühlingstraße 45
94315 Straubing
Germany

Phone: +49 9421 5522-0
Fax: +49 9421 5522-99
Web: www.tuev-sued.de/senton




SENTON

8.8 Carrier Frequency Stability

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 3, section 4.7 and IC RSS-210 Issue 8, section A2.6
Guide:	ANSI C63.4
Limit:	The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % (± 100 ppm) of the carrier frequency under nominal conditions.
Temperature range:	-20°C to +50°C (at normal supply voltage)
Voltage range:	85% to 115% of the rated supply voltage (at a temperature of +20°C)
Measurement procedure:	Carrier Frequency Stability (6.5)

Comment:	Voltage bonaries according to USB specification
Date of test:	December 7, 2011


8.8.1 Carrier Frequency Stability vs. Temperature

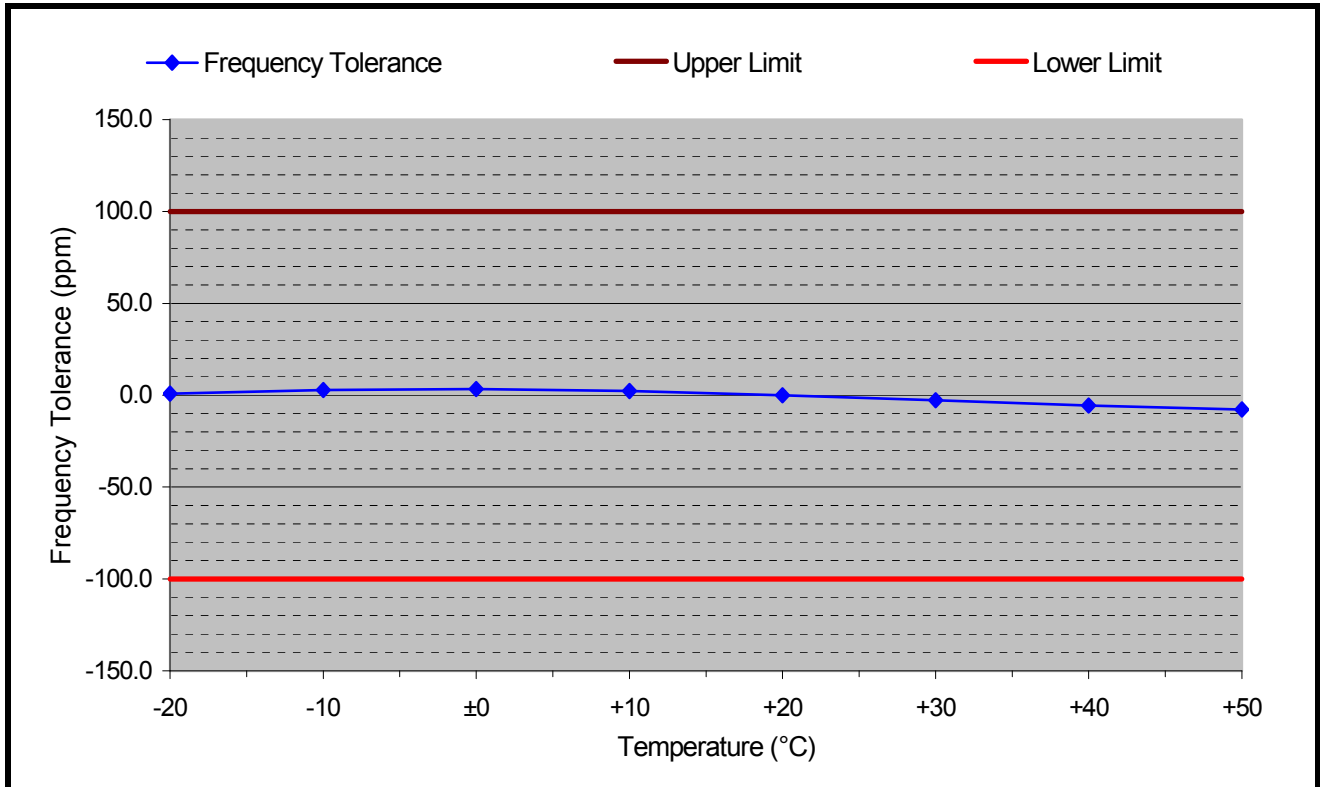

Supply voltage:	5 V	Nominal frequency:	13.559067 MHz		
Temperature (°C)	Frequency (MHz)	Frequency Tolerance (Hz)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
-20	13.559080	13	+100.0	-100.0	99.0
-10	13.559107	40	+100.0	-100.0	97.0
±0	13.559113	46	+100.0	-100.0	96.6
+10	13.559099	32	+100.0	-100.0	97.6
+20	13.559067	0	+100.0	-100.0	100.0
+30	13.559031	-36	+100.0	-100.0	97.3
+40	13.558992	-75	+100.0	-100.0	94.5
+50	13.558962	-105	+100.0	-100.0	92.3

Test Result: Test passed

8.8.2 Carrier Frequency Stability vs. Supply Voltage

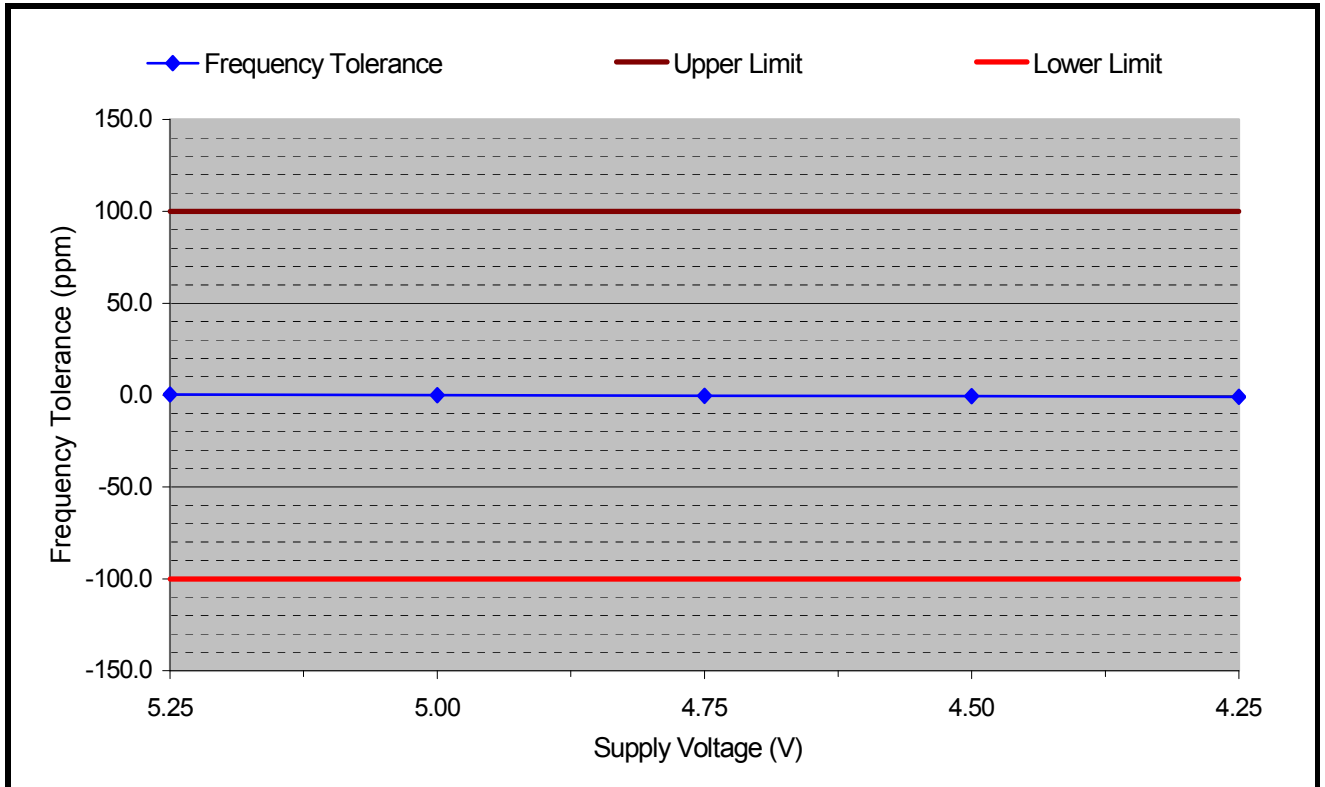

Temperature: +20 °C Battery End Point: Not applicable
 Nominal frequency: 13.559067 MHz

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
5.25	13.559072	5	0.4	+100.0	-100.0	99.6
5.00	13.559067	0	0.0	+100.0	-100.0	100.0
4.75	13.559063	-4	-0.3	+100.0	-100.0	99.7
4.50	13.559059	-8	-0.6	+100.0	-100.0	99.4
4.25	13.559056	-11	-0.8	+100.0	-100.0	99.2

Test Result: Test passed

8.9 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 3, section 5.6
Guide:	IC RSS-102 Issue 4, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
<input type="checkbox"/> detachable				
<p>The conducted output power (CP in watts) is measured at the antenna connector:</p> $CP = \dots\dots\dots \text{ W}$ <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$</p> $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \text{ W}$ <p><input type="checkbox"/> the field strength⁸ in V/m: $FS = \dots\dots\dots \text{ V/m}$</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \text{ W}$ <p>with:</p> <p>Distance between the antennas in m: $D = \dots\dots\dots \text{ m}$</p>			<input type="checkbox"/>	
<input checked="" type="checkbox"/> not detachable				
<p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by⁸:</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = 2.72 \mu\text{W}$ <p>with:</p> <p>Field strength in V/m: $FS = 3.01 \text{ mV/m}$</p> <p>Distance between the two antennas in m: $D = 3 \text{ m}$</p>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Selection of output power				
<p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> $TP = 2.72 \mu\text{W}$				

⁸ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2011
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2011
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	June 7, 2009 (published on September 15, 2009)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 3 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 8 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	December 2010
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 3 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 4: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), published by Industry Canada	March 2010, footnote 13 updated December 2010
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997



<input type="checkbox"/>	CAN/CSA- CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
		CAN/CSA CISPR 22-10 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	
<input type="checkbox"/>	CAN/CSA CISPR 22-10	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	2010
<input checked="" type="checkbox"/>	TRC-43	Notes Regarding Designation of Emissions (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October, 2008

10 Test Equipment List with Calibration Data

Type	Inv.-No.	Type Designation	Serial Number	Manufacturer	Calibration Organization	Last Calibration	Next Calibration
EMI test receiver	1028	ESHS10	860043/016	Rohde & Schwarz	Rohde & Schwarz	10/2010	04/2012
EMI test receiver	1711	ESPI7	836914/0002	Rohde & Schwarz	Rohde & Schwarz	05/2011	11/2012
EMI test receiver	2044	ESU8	100232	Rohde & Schwarz	Rohde & Schwarz	12/2010	06/2012
V-network	1059	ESH3-Z5	894785/005	Rohde & Schwarz	Rohde & Schwarz	08/2011	08/2013
Loop antenna	1016	HFH2-Z2	882964/0001	Rohde & Schwarz	Rohde & Schwarz	05/2011	11/2012
TRILOG Broadband Antenna	2058	VULB 9163	9163-408	Schwarzbeck	Rohde & Schwarz	05/2011	11/2012
Multimeter	1653	21 III	76530546	Fluke	ZMK	11/2010	11/2012
Temperature test chamber	1271	HT 4010	07065550	Heraeus	Weiss Umwelttechnik	05/2011	11/2012
DC power supply	1267	NGSM 32/10	203	Rohde & Schwarz	No calibration required, device checked by calibrated equipment (Multimeter, inv. no. 1653) before use		
Test probe	1628	TP 01	001	TÜV SÜD SENTON	No calibration required, device only for relative measurements		


11 Revision History

Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	08.12.2011	Martin Steindl (az)	First Edition
2	12.12.2011	Martin Steindl (cb)	Supplement of 9 Referenced Regulations and 10 Test Equipment List
3	10.07.2012	M. Steindl	Correction of test setup data Data for laptop PC added Data reduction for conducted emission tests.

Annex A Charts taken during testing

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart B Class B


<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Model: B-web 91 08 LEA</td></tr> <tr><td style="padding: 2px;">Serial no.: ---</td></tr> <tr><td style="padding: 2px;">Applicant: Kaba GmbH</td></tr> <tr><td style="padding: 2px;">Test site: Shielded room, cabin no. 4</td></tr> <tr><td style="padding: 2px;">Tested on: Linecord AC supply of laptop PC Phase L1</td></tr> <tr><td style="padding: 2px;">Date of test: 12/06/2011</td></tr> <tr><td style="padding: 2px;">Operator: M. Steindl</td></tr> <tr><td style="padding: 2px;">Test performed: semi automatically</td></tr> <tr><td style="padding: 2px;">File name:</td></tr> </table>	Model: B-web 91 08 LEA	Serial no.: ---	Applicant: Kaba GmbH	Test site: Shielded room, cabin no. 4	Tested on: Linecord AC supply of laptop PC Phase L1	Date of test: 12/06/2011	Operator: M. Steindl	Test performed: semi automatically	File name:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Mode: - 115 V AC power supply - Reading tag continuously</td></tr> <tr><td style="padding: 2px;">Final results: Selected by hand</td></tr> </table>	Mode: - 115 V AC power supply - Reading tag continuously	Final results: Selected by hand
Model: B-web 91 08 LEA												
Serial no.: ---												
Applicant: Kaba GmbH												
Test site: Shielded room, cabin no. 4												
Tested on: Linecord AC supply of laptop PC Phase L1												
Date of test: 12/06/2011												
Operator: M. Steindl												
Test performed: semi automatically												
File name:												
Mode: - 115 V AC power supply - Reading tag continuously												
Final results: Selected by hand												
Detector: Peak / Final Results: QP												

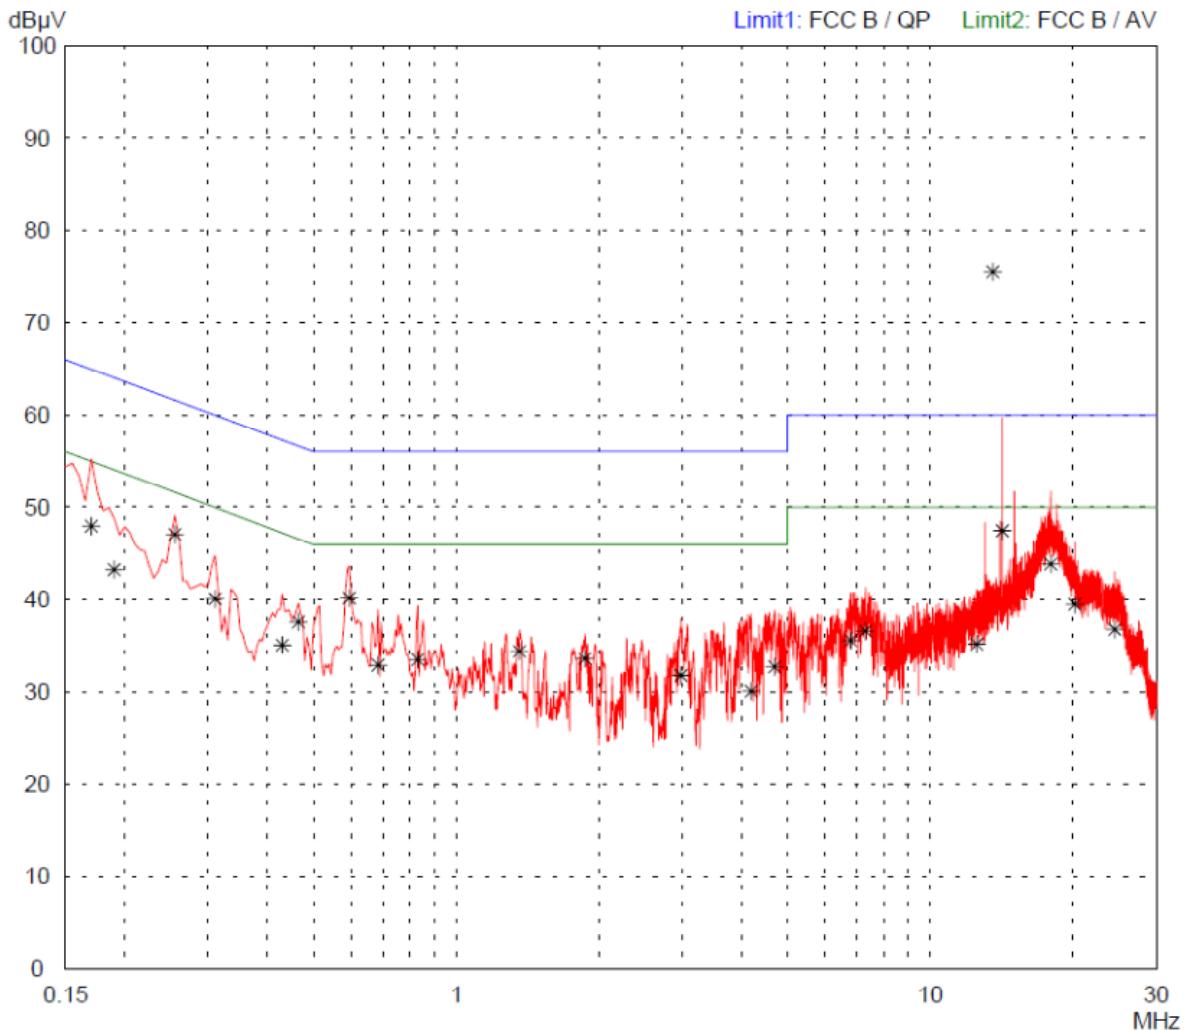

Result: Limit kept - Carrier excluded	Project file: 69547-04281
Page	of
Pages	

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart B Class B


<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Model: B-web 91 08 LEA</td></tr> <tr><td style="padding: 2px;">Serial no.: ---</td></tr> <tr><td style="padding: 2px;">Applicant: Kaba GmbH</td></tr> <tr><td style="padding: 2px;">Test site: Shielded room, cabin no. 4</td></tr> <tr><td style="padding: 2px;">Tested on: Linecord AC supply of laptop PC Phase N</td></tr> <tr><td style="padding: 2px;">Date of test: 12/06/2011</td></tr> <tr><td style="padding: 2px;">Operator: M. Steindl</td></tr> <tr><td style="padding: 2px;">Test performed: semi automatically</td></tr> <tr><td style="padding: 2px;">File name:</td></tr> </table>	Model: B-web 91 08 LEA	Serial no.: ---	Applicant: Kaba GmbH	Test site: Shielded room, cabin no. 4	Tested on: Linecord AC supply of laptop PC Phase N	Date of test: 12/06/2011	Operator: M. Steindl	Test performed: semi automatically	File name:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Mode: - 115 V AC power supply - Reading tag continuously</td></tr> <tr><td style="padding: 2px;">Final results: 20 dB Margin 25 Subranges</td></tr> </table>	Mode: - 115 V AC power supply - Reading tag continuously	Final results: 20 dB Margin 25 Subranges
Model: B-web 91 08 LEA												
Serial no.: ---												
Applicant: Kaba GmbH												
Test site: Shielded room, cabin no. 4												
Tested on: Linecord AC supply of laptop PC Phase N												
Date of test: 12/06/2011												
Operator: M. Steindl												
Test performed: semi automatically												
File name:												
Mode: - 115 V AC power supply - Reading tag continuously												
Final results: 20 dB Margin 25 Subranges												
Detector: Peak / Final Results: QP												

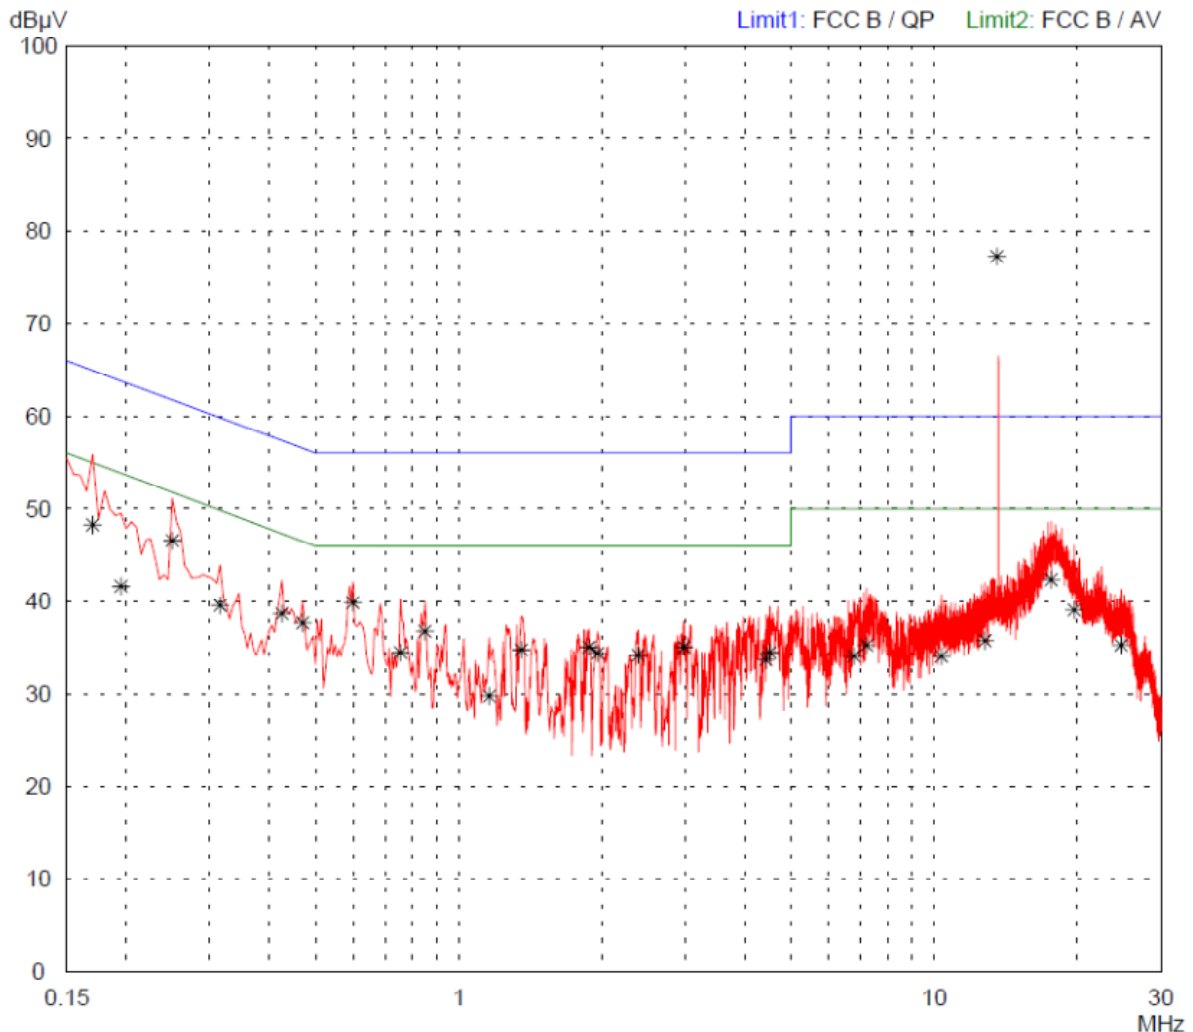

Result: Limit kept - Carrier excluded	Project file: 69547-04281
Page	of Pages

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart B Class B


<p>Model: B-web 91 08 LEA</p> <p>Serial no.: ---</p> <p>Applicant: Kaba GmbH</p> <p>Test site: Shielded room, cabin no. 4</p> <p>Tested on: Linecord AC supply of laptop PC Phase L1</p> <p>Date of test: 12/06/2011 Operator: M. Steindl</p> <p>Test performed: semi automatically File name:</p>	<p>Mode:</p> <ul style="list-style-type: none"> - 115 V AC power supply - Antenna terminated with 50 Ohms - Transmitting continuously
<p>Detector: Peak / Final Results: QP</p>	<p>Final results: Selected by hand</p>

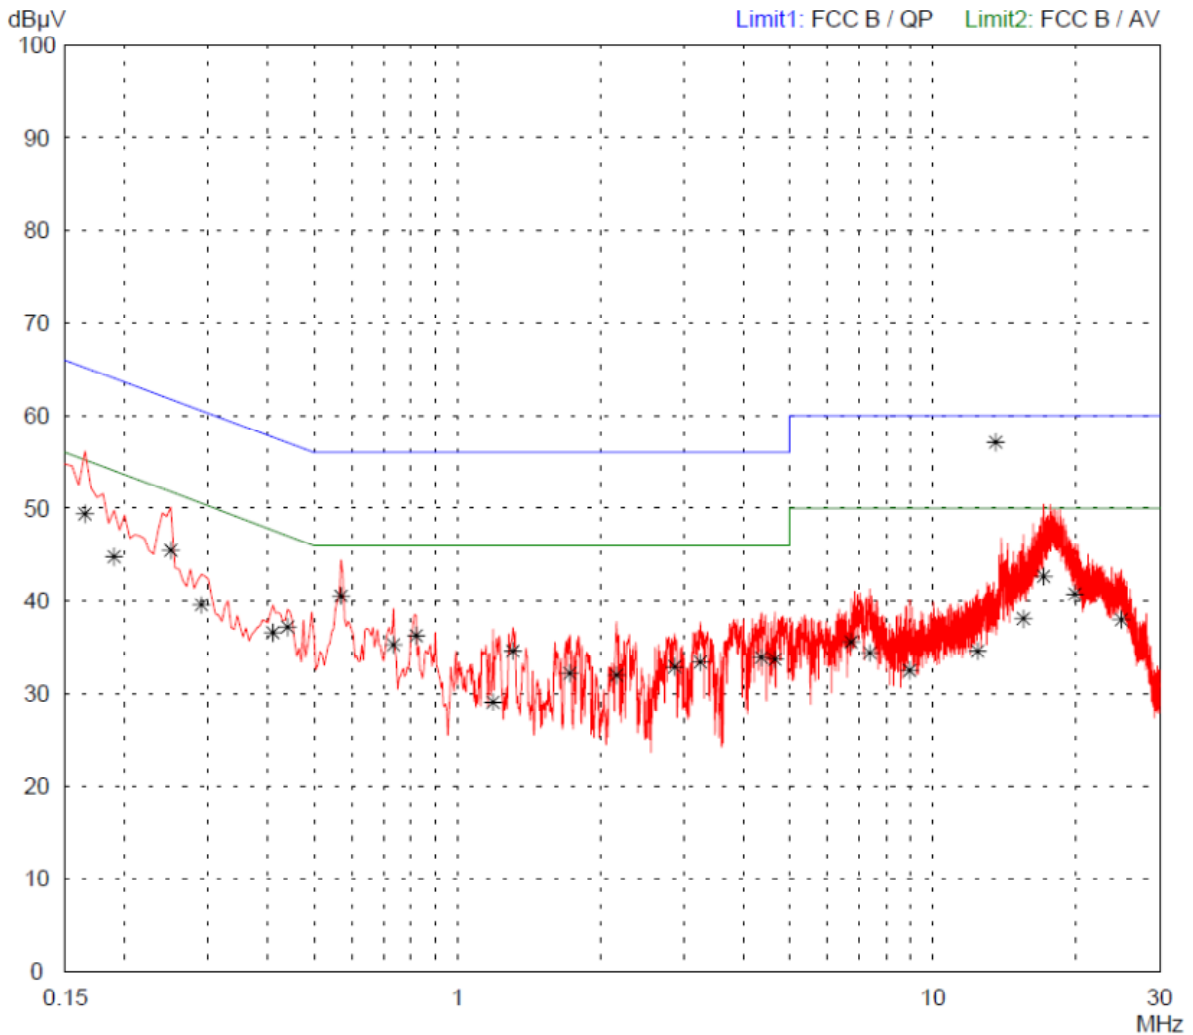

Result: Limit kept	Project file: 69547-04281
Page	of
Pages	

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart B Class B


<p>Model: B-web 91 08 LEA</p> <p>Serial no.: ---</p> <p>Applicant: Kaba GmbH</p> <p>Test site: Shielded room, cabin no. 4</p> <p>Tested on: Linecord AC supply of laptop PC Phase L1</p> <p>Date of test: 12/06/2011 Operator: M. Steindl</p> <p>Test performed: automatically File name:</p>	<p>Mode:</p> <ul style="list-style-type: none"> - 115 V AC power supply - Antenna terminated with 50 Ohms - Transmitting continuously
<p>Detector: Average / Final Results: AV</p>	<p>Final results: Selected by hand</p>

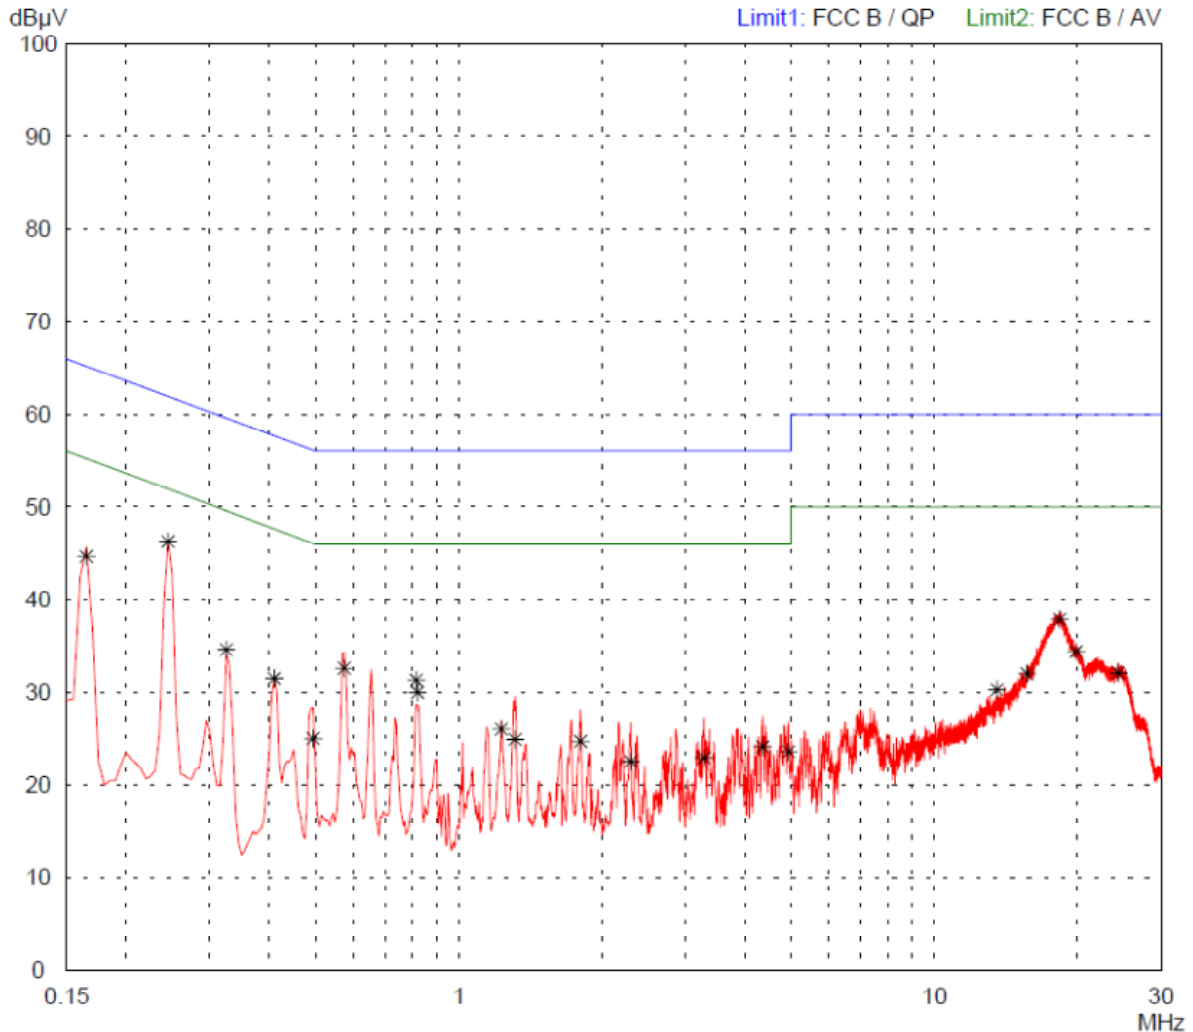

Result: Limit kept	Project file: 69547-04281
Page	of
Pages	

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart B Class B


<p>Model: B-web 91 08 LEA</p> <p>Serial no.: ---</p> <p>Applicant: Kaba GmbH</p> <p>Test site: Shielded room, cabin no. 4</p> <p>Tested on: Linecord AC supply of laptop PC Phase N</p> <p>Date of test: 12/06/2011</p> <p>Operator: M. Steindl</p> <p>Test performed: semi automatically</p> <p>File name:</p>	<p>Mode: - 115 V AC power supply - Antenna terminated with 50 Ohms - Transmitting continuously</p>
<p>Detector: Peak / Final Results: QP</p>	<p>Final results: Selected by hand</p>

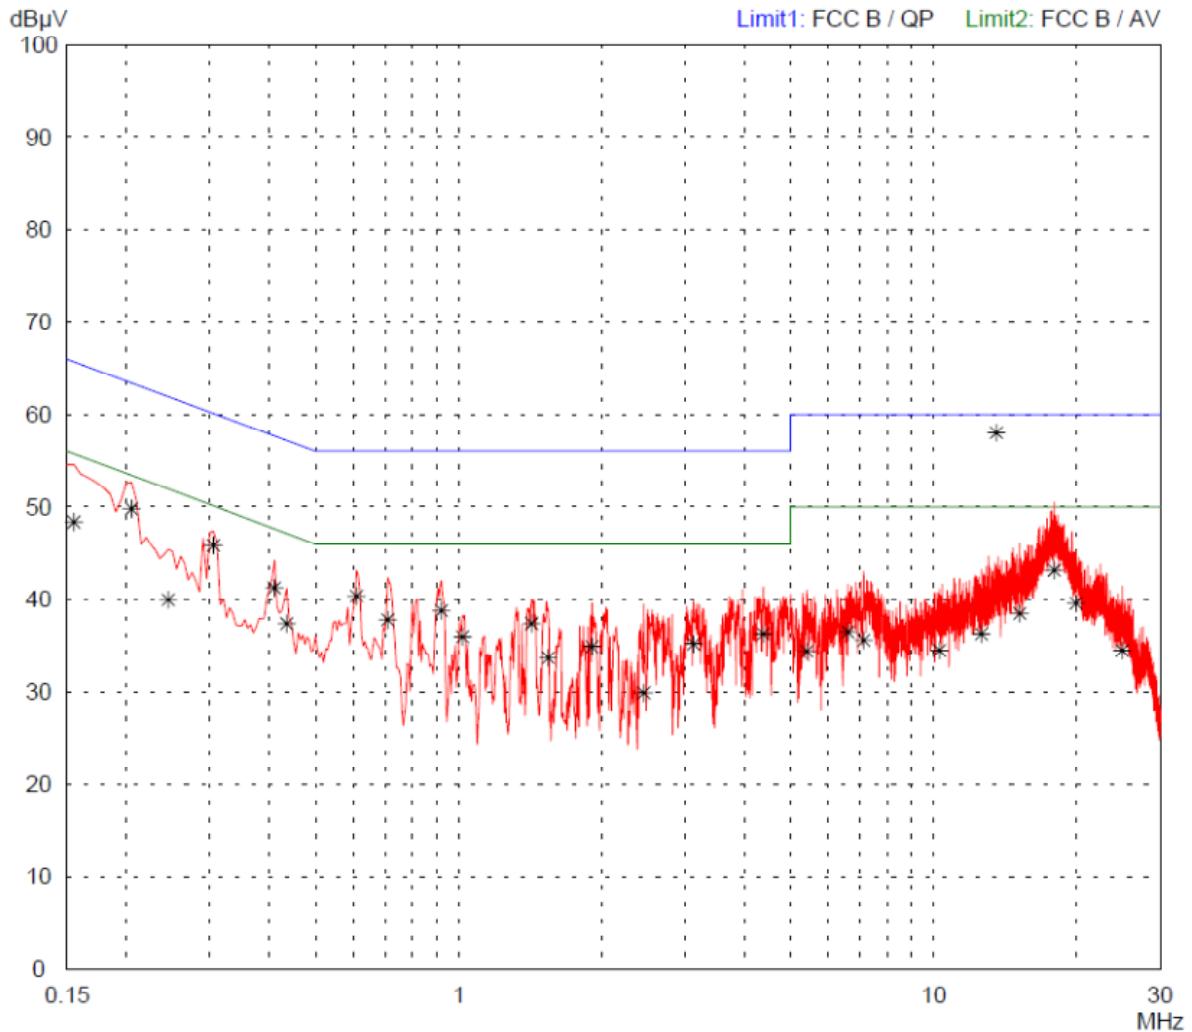


<p>Result: Limit kept</p>	<p>Project file: 69547-04281</p> <p style="text-align: right;">Page of Pages</p>
--------------------------------------	---

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart B Class B


<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Model: B-web 91 08 LEA</td></tr> <tr><td style="padding: 2px;">Serial no.: ---</td></tr> <tr><td style="padding: 2px;">Applicant: Kaba GmbH</td></tr> <tr><td style="padding: 2px;">Test site: Shielded room, cabin no. 4</td></tr> <tr><td style="padding: 2px;">Tested on: Linecord AC supply of laptop PC Phase N</td></tr> <tr><td style="padding: 2px;">Date of test: 12/06/2011</td></tr> <tr><td style="padding: 2px;">Operator: M. Steindl</td></tr> <tr><td style="padding: 2px;">Test performed: semi automatically</td></tr> <tr><td style="padding: 2px;">File name:</td></tr> </table>	Model: B-web 91 08 LEA	Serial no.: ---	Applicant: Kaba GmbH	Test site: Shielded room, cabin no. 4	Tested on: Linecord AC supply of laptop PC Phase N	Date of test: 12/06/2011	Operator: M. Steindl	Test performed: semi automatically	File name:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="padding: 2px;">Mode: - 115 V AC power supply</td></tr> <tr><td style="padding: 2px;">- Antenna terminated with 50 Ohms</td></tr> <tr><td style="padding: 2px;">- Transmitting continuously</td></tr> </table>	Mode: - 115 V AC power supply	- Antenna terminated with 50 Ohms	- Transmitting continuously
Model: B-web 91 08 LEA													
Serial no.: ---													
Applicant: Kaba GmbH													
Test site: Shielded room, cabin no. 4													
Tested on: Linecord AC supply of laptop PC Phase N													
Date of test: 12/06/2011													
Operator: M. Steindl													
Test performed: semi automatically													
File name:													
Mode: - 115 V AC power supply													
- Antenna terminated with 50 Ohms													
- Transmitting continuously													
Detector: Average / Final Results: AV	Final results: Selected by hand												

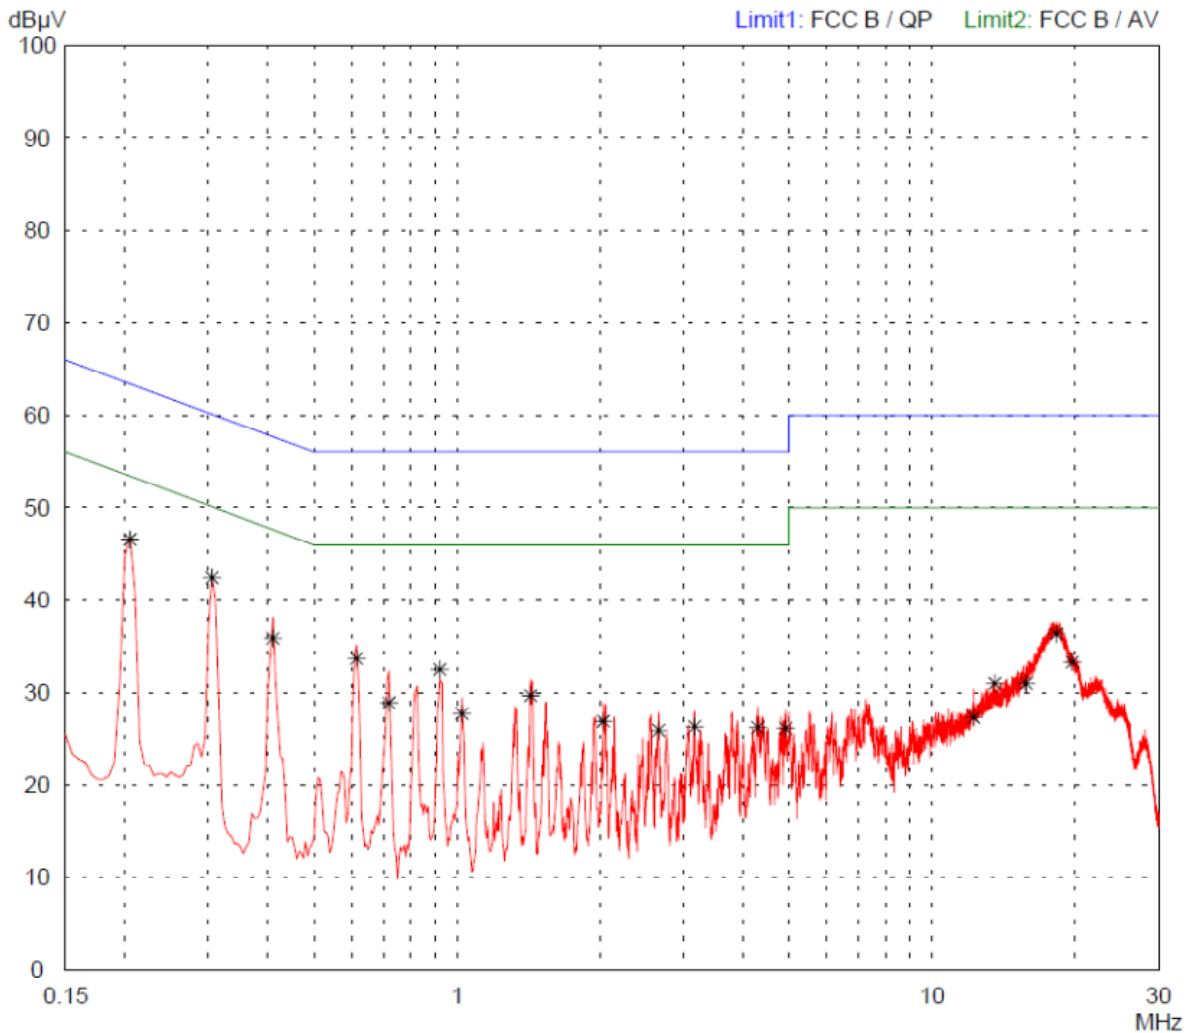

Result: Limit kept	Project file: 69547-04281
Page	of Pages

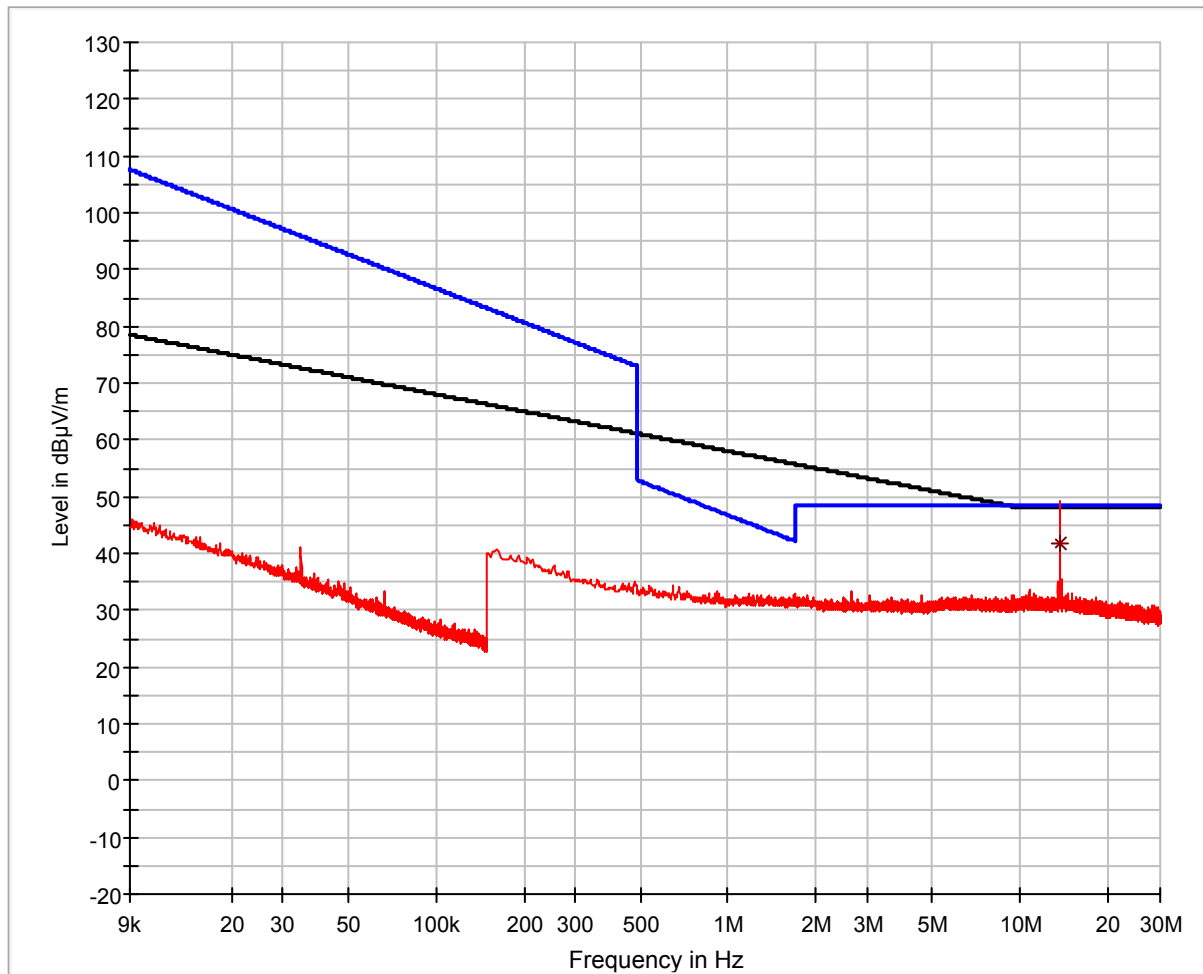

— EN 300 330 tx mag.LimitLine
— FCC 15.209 mag (10 m).LimitLine
— Preview Result 1-PK+
* Final Result 1-QPK

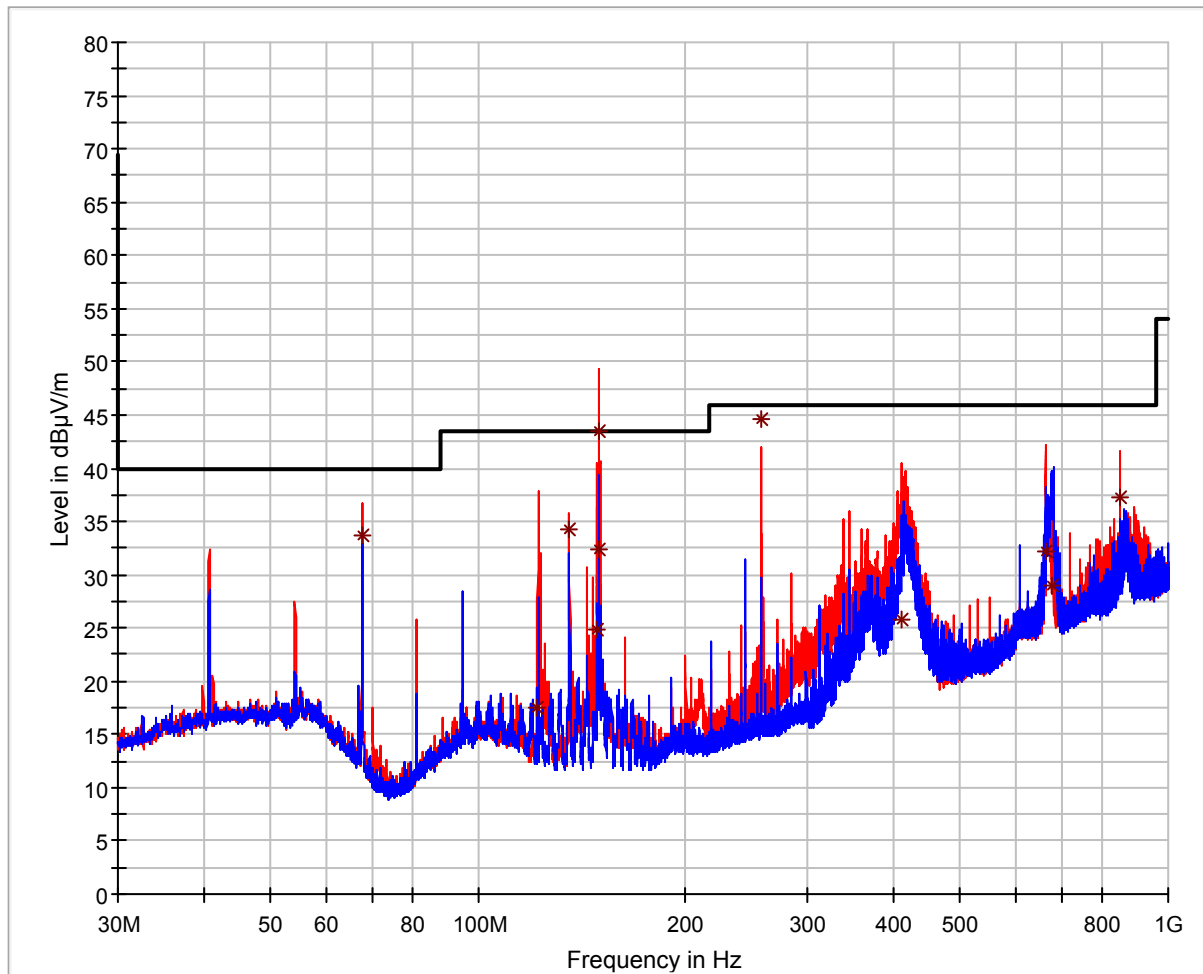

— FCC 15.209.LimitLine
— Preview Result 1H-PK+
— Preview Result 1V-PK+
* Final Result 1-QPK