



Product Service

Choose certainty.
Add value.

March 20, 2017

Page 1 of 84

Prüfbericht / Test Report

Nr. / No. 69547-79209-1 (Edition 2)

Applicant: KABA GmbH
Type of equipment: RFID Reader
Type designation: KABA Access Manager 92 30 & 92 32
Order No.: N/A
Test standards: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207, 15.215 and 15.225

Industry Canada Radio Standards Specifications
RSS-GEN Issue 4, Sections 8.8, 8.9 and 8.10 and
RSS-210 Issue 8, Section A2.6 (Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.



Table of Contents

1	Description of the Equipment Under Test (EUT)	3
2	Administrative Data	5
3	Identification of the Test Laboratory	6
4	Summary	7
5	Operation Mode and Configuration of EUT	8
6	Measurement Procedures	10
6.1	Bandwidth Measurements.....	10
6.2	Conducted AC Powerline Emission	12
6.3	Radiated Emission Measurement 9 kHz to 30 MHz.....	14
6.4	Radiated Emission at Alternative Test Site	16
6.5	Carrier Frequency Stability.....	18
7	Photographs Taken During Testing.....	20
8	Test Results	29
8.1	Occupied Bandwidth (FCC)	31
8.1.1	Radiated measurements	32
8.1.2	Conducted measurements	34
8.2	Occupied Bandwidth (IC)	37
8.2.1	Radiated measurements	38
8.2.2	Conducted measurements	39
8.3	Bandwidth of the Emission.....	41
8.3.1	Radiated measurements	42
8.3.2	Conducted measurements	43
8.4	Designation of Emissions.....	45
8.5	Conducted Powerline Emission Measurement 150 kHz to 30 MHz	46
8.6	Spectrum Mask	53
8.7	Radiated Emission Measurement 9 kHz to 30 MHz.....	60
8.8	Radiated Emission Measurement 30 MHz to 6 GHz.....	64
8.9	Carrier Frequency Stability.....	71
8.10	Exposure of Humans to RF Fields	76
9	Referenced Regulations	79
10	Test Equipment List with Calibration Data.....	81
11	Measurement uncertainties	82
12	Revision History	84



1 Description of the Equipment Under Test (EUT)

General data of EUT

Type designation ¹ :	KABA Access Manager 92 30 & 92 32
Parts ² :	
Serial number(s):	1221289
Manufacturer:	Kaba GmbH
Type of equipment:	RFID Reader
Version:	As received
FCC ID:	NVI-KAM9230-K5 and NVI-KAM9232-K5
Industry Canada ID:	11038A-KAM9230K5 and 11038A-KAM9232K5
Note:	The two IDs cover a assembly variant, each. 92 30: Ethernet data transmission rate 100 Mbit/s 92 32: Ethernet data transmission rate 1 Gbit/s. The 92 32 with the higher data rate was tested.
Additional parts/accessories:	--

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.



Technical data of EUT	
Application frequency range:	13.110 MHz - 14.010 MHz
Frequency range:	13.553 MHz – 13.567 MHz
Operating frequency:	13.56 MHz
Type of modulation:	ASK
Pulse train:	---
Pulse width:	---
Number of RF-channels:	1
Channel spacing:	---
Designation of emissions ³ :	434KA1D
Type of antenna:	Integrated
Size/length of antenna:	See description of antennas
Connection of antenna:	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Type of internal power supply:	DC supply
Specifications for internal power supply:	nominal voltage: 24.0 V minimum voltage: 21.6 V maximum voltage: 26.4 V nominal frequency: ---
Type of external power supply:	AC supply
Specifications for external power supply:	nominal voltage: 110 V nominal frequency: 60 Hz

³ Also known as "Class of Emission".



2 Administrative Data

Application details

Applicant (full address):	KABA GmbH Albertstraße 37 8056 Villingen-Schwenningen Germany
Contact person:	Mr. Stefan Fleig
Order number:	N/A
Receipt of EUT:	2017-02-24
Date(s) of test:	2017-03-17 to 2017-03-20
Note(s):	--

Report details

Report number:	69547-79209-1
Edition:	2
Issue date:	March 20, 2017



3 Identification of the Test Laboratory

Details of the Test Laboratory

Company name:	TÜV SÜD Product Service GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAkkS Registration No. D-PL-11321-11-01
Laboratory accreditation:	BNetzA-CAB-16/21-15
Contact person:	Mr. Markus Biberger
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99



4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207, 15.215 and 15.225

of the Federal Communication Commission (FCC) and the

Radio Standards Specifications

**RSS-GEN Issue 4, Sections 8.8, 8.9 and 8.10 and
RSS-210 Issue 8, Section , A2.6 (Category I Equipment)**

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:

Mr. Markus Biberger

Responsible for testing:

Mr. Martin Steindl

Responsible for test report:

Mr. Martin Steindl



5 Operation Mode and Configuration of EUT

Operation Mode(s)

Reading tag continuously

Configuration(s) of EUT

In accordance with the applicant emission tests were performed in three test configurations::

- Mode 1: PoE-supply, Antennas 90 01 and 90 04, Compact reader 91 10;
- Mode 2: DC 24 V supply, Antennas 90 00 and 90 03, Compact reader 91 10;
- Mode 3: PoE-supply, Antennas 90 02 and 90 04, Compact reader 91 10.

The antennas were substituted with 50 Ω for conducted power line emissions only.

List of ports and cables

Port	Description	Classification ⁴	Cable type	Cable length
1	AC supply of PoE-adapter	ac power	Unshielded	1.5 m
2	DC supply of EUT	dc power	Unshielded	1.5 m
3	Antenna output A	signal/control port	Shielded	3 m
4	Antenna output B	signal/control port	Shielded	3 m
5	Ethernet of EUT	signal/control port	Shielded	2 m
6	RS 485	signal/control port	Shielded	2 m
7	RS 232	signal/control port	Shielded	2 m
8	Relais Out 1	signal/control port	Shielded	2 m
9	Binary Input 1	signal/control port	Shielded	2 m
10	Binary Input 2	signal/control port	Shielded	2 m

⁴ Ports shall be classified as ac power, dc power or signal/control port



List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	Antenna (4 cm x 3.3 cm)	90 00		Kaba
2	Antenna (4 cm x 3.3 cm)	90 01		Kaba
3	Antenna (4 cm x 3.3 cm)	90 02		Kaba
4	Antenna (4 cm x 4 cm)	90 03		Kaba
5	Antenna (2.5 cm x 3.3 cm)	90 04		Kaba
6	Compact Reader (7.5 cm x 7.5 cm)	91 10		Kaba
7	PoE adapter	90 01GR	C14216591000000842	PowerDsine


List of support devices

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	Laptop PC	E540	PF-03VT6G 14/10	lenovo

6 Measurement Procedures

6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 4, section 6.6 IC RSS-210 Issue 8, section A1.1.3 ANSI C63.10, section 6.9.1
Guide:	ANSI C63.10 / IC RSS-Gen Issue 4, section 6.6
Measurement setup:	<input checked="" type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.3)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

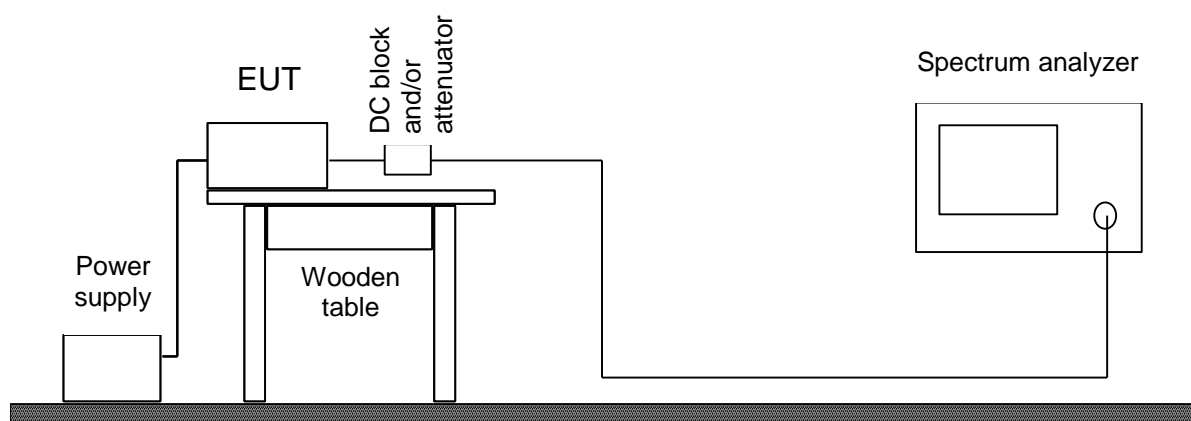



Test instruments used for conducted measurements:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Power meter	NRVS	1264	836856/015	Rohde & Schwarz
<input type="checkbox"/> Peak power sensor	NRV-Z31	1701	8579604.03	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z52	1499	837901/030	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z4	1034	863828/015	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input checked="" type="checkbox"/> Microwave cable	ST-18/SMAm/SMAm/48	1949	696378	Huber+Suhner
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda

6.2 Conducted AC Powerline Emission

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, section 15.207
 IC RSS-Gen Issue 4, section 8.8

Guide: ANSI C63.10 / CISPR 22


Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:

First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.

If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.

According to ANSI C63.10, section 6.2.5, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.

Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.

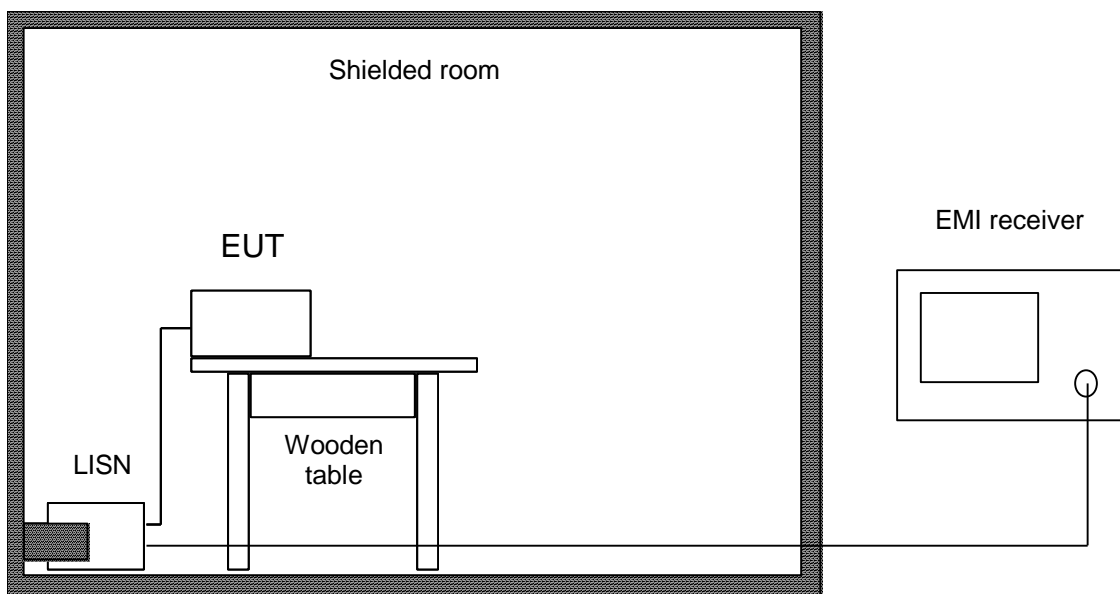


Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/> V-network	ESH 3-Z5	1059	894785/005	Rohde & Schwarz
<input type="checkbox"/> V-network	ESH 3-Z5	1218	830952/025	Rohde & Schwarz
<input type="checkbox"/> Artificial mains network	ESH 2-Z5	1536	842966/004	Rohde & Schwarz
<input checked="" type="checkbox"/> Microwave cable	FB293C1080005050	2157	72110-02	Rosenberger Micro-Coax
<input checked="" type="checkbox"/> Coax cable	RG214 N/N 5m	1188	---	Senton
<input checked="" type="checkbox"/> Shielded room	No. 1	1451	---	Albatross
<input type="checkbox"/> Shielded room	No. 4	1454	3FD 100 544	Euroshield

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205, 15.215(b) and 15.225(a)-(d) IC RSS-GEN Issue 4, sections 8.9 and 8.10 and IC RSS-210 Issue 8, section A2.6
Guide:	ANSI C63.10
<p>Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).</p> <p>Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p>	

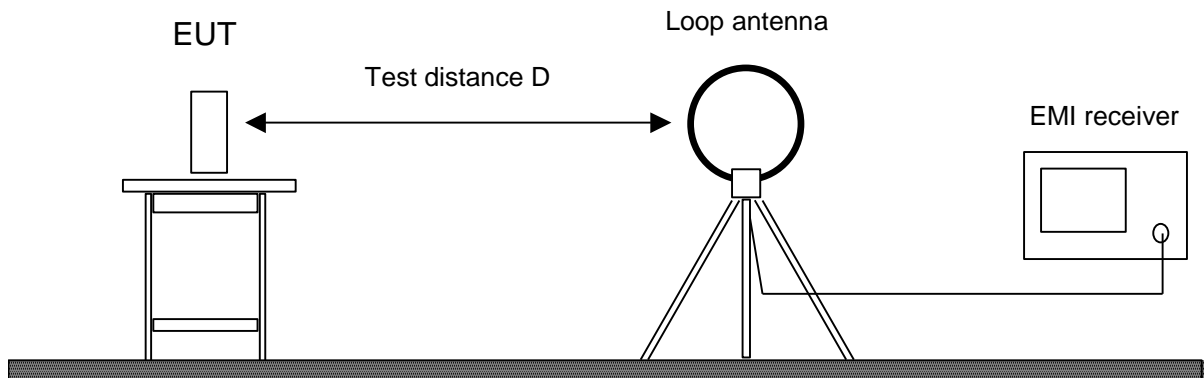


Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input type="checkbox"/> Preamplifier Cabin no. 2	CPA9231A	1716	3557	Schaffner
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
<input type="checkbox"/> Microwave cable Cabin no. 2	UFA210A-FG	1681	23516	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 2	KKSF1040016	2020	289854/4	Huber + Suhner
<input type="checkbox"/> Microwave cable Cabin no. 2	FA210AF020000000	2060	64566-2	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	EF393	2053	---	Albatross Projects
<input type="checkbox"/> Microwave cable Cabin no. 8	FB293C1050005050	2054	63834-1	Rosenberger Micro-Coax
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	FB293C1080005050	2055	63833-1	Rosenberger Micro-Coax
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.3.9	RFS
<input type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.4.12	RFS
<input type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.6.19	RFS
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	FA210AF040005050G	2127	72061-01	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	FA210AF04000505G	2056	64567-01	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	FA210AF04000505	2068	64610-1	Rosenberger Micro-Coax
<input type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross



6.4 Radiated Emission at Alternative Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-GEN Issue 4, sections 8.9 and 8.10(b)(c) and IC RSS-210 Issue 8, section A2.6
Guide:	ANSI C63.10
<p>Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 respectively ANSI C63.10 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.</p> <p>If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels. Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.</p> <p>With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.</p>	

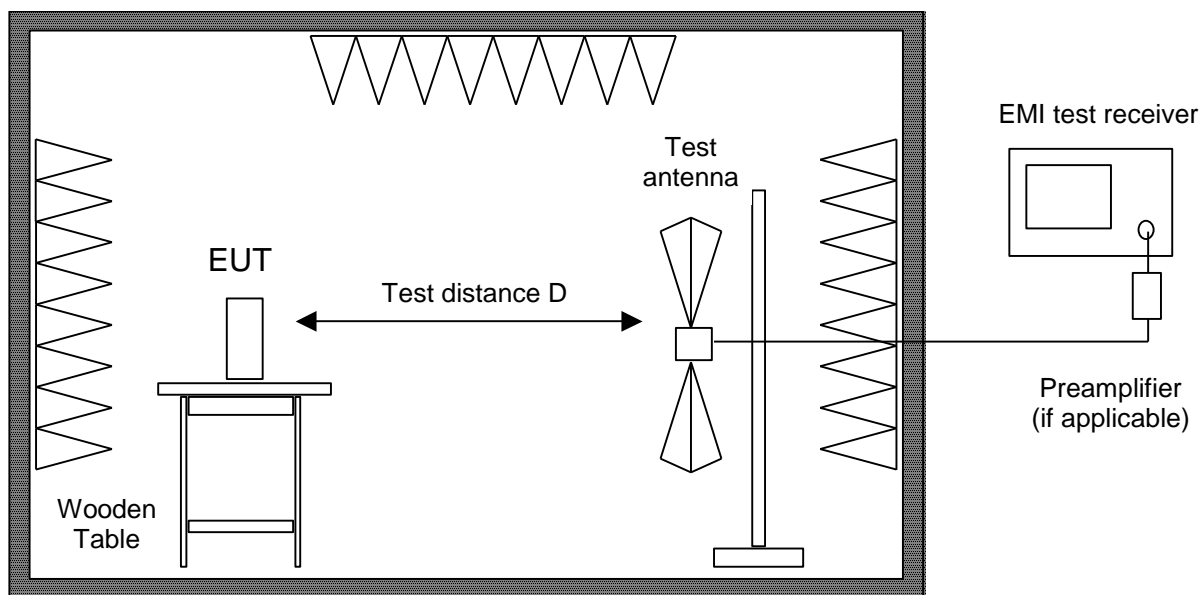

Alternate test site (semi anechoic room)

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input checked="" type="checkbox"/> Trilog antenna Cabin no. 8	VULB 9163	2058	9163-408	Schwarzbeck
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	EF393	2053	---	Albatross Projects
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.6.19	RFS
<input type="checkbox"/> Microwave cable Cabin no. 8	LCF12-50	2057	P1.3.9	RFS
<input checked="" type="checkbox"/> Microwave cable Cabin no. 8	FA210AF04000505	2068	64610-1	Rosenberger Micro-Coax
<input type="checkbox"/> Microwave cable Cabin no. 8	FA210AF040005050G	2127	72061-01	Rosenberger Micro-Coax
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross

6.5 Carrier Frequency Stability

Measurement Procedure:

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 4, section 6.11 and IC RSS-210 Issue 8, section A2.6
Guide:	ANSI C63.10

The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °C.


If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage
- the battery nominal voltage
- 85% of the battery nominal voltage
- the battery operating end point voltage which shall be specified by the equipment manufacturer

The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.

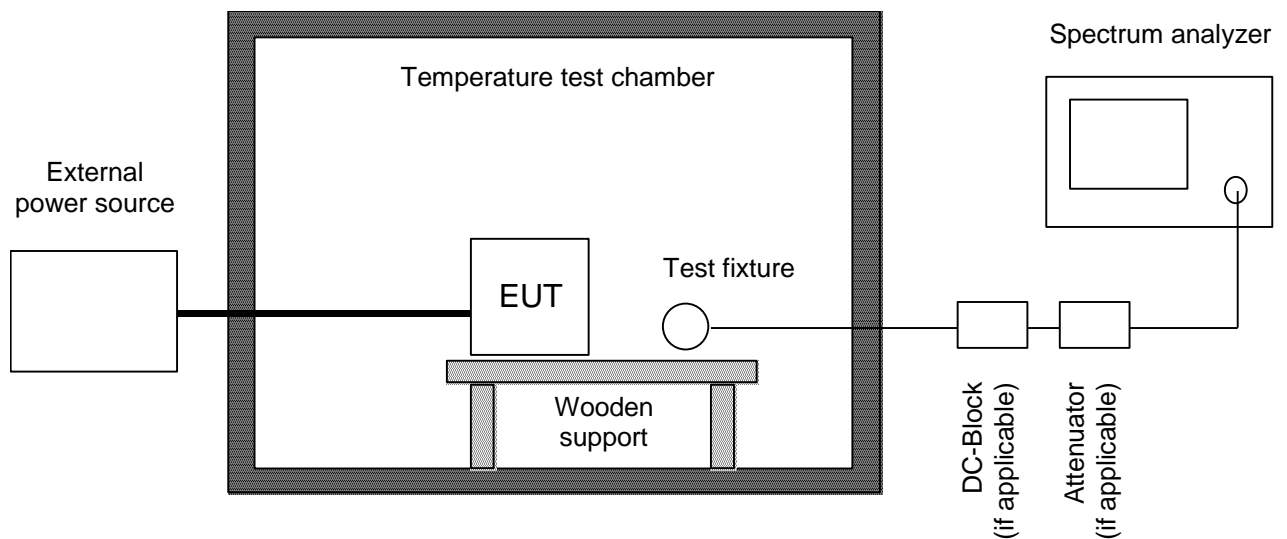




Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda
<input checked="" type="checkbox"/> Test probe	TP 01	1628	001	TÜV SÜD PS
<input checked="" type="checkbox"/> Multimeter	21 III	1653	76530546	Fluke
<input type="checkbox"/> Multimeter	21 III	1654	76381229	Fluke
<input type="checkbox"/> Multimeter	Fluke 77 III	1975	92370108	Fluke
<input type="checkbox"/> Multimeter	Fluke 77 IV	1976	93090238	Fluke
<input type="checkbox"/> Multimeter	Fluke 177	2025	96720024	Fluke
<input type="checkbox"/> Multimeter	Fluke 177	2026	96720025	Fluke
<input checked="" type="checkbox"/> DC power supply	NGSM 32/10	1267	203	Rohde & Schwarz
<input type="checkbox"/> Isolating transformer	RT 5A	1127	10387	Grundig
<input type="checkbox"/> Isolating transformer	RT 5A	1128	10416	Grundig
<input checked="" type="checkbox"/> Temperature test chamber	HT 4010	1271	07065550	Heraeus





7 Photographs Taken During Testing


Test setup for conducted AC powerline emission measurement

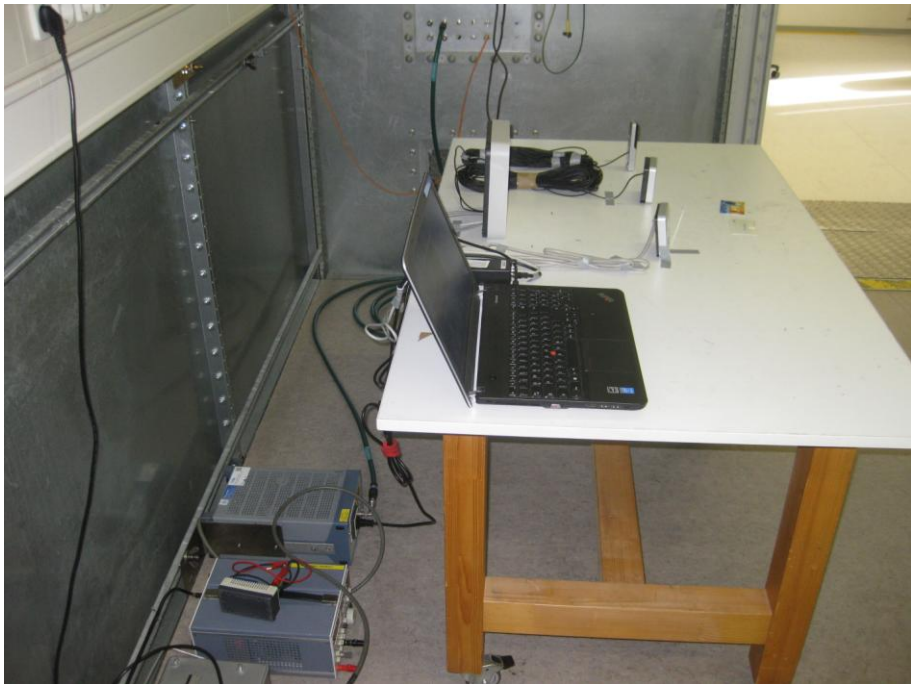


Test setup for radiated emission measurement 9 kHz – 30 MHz

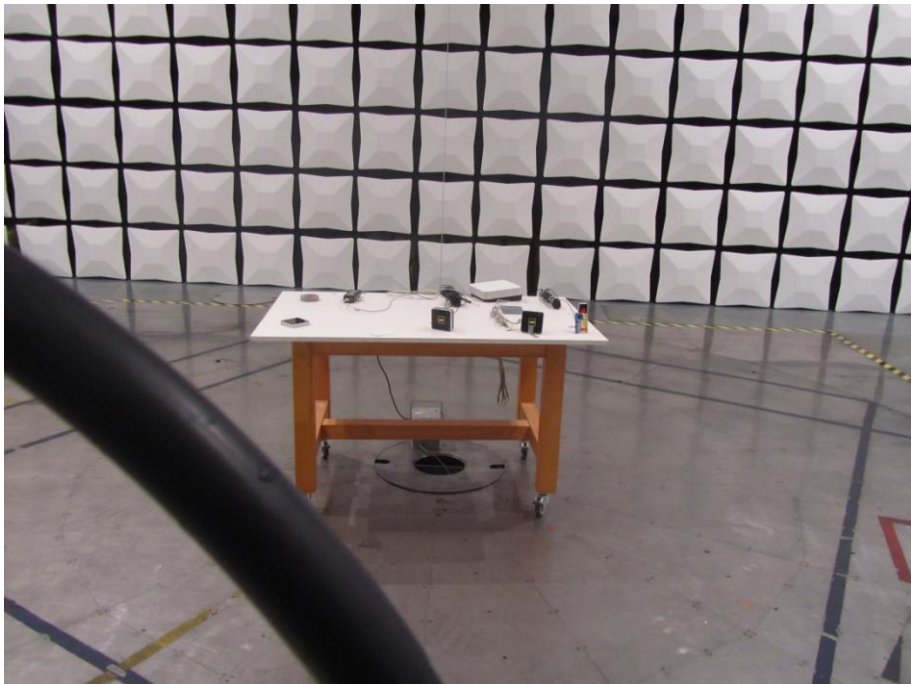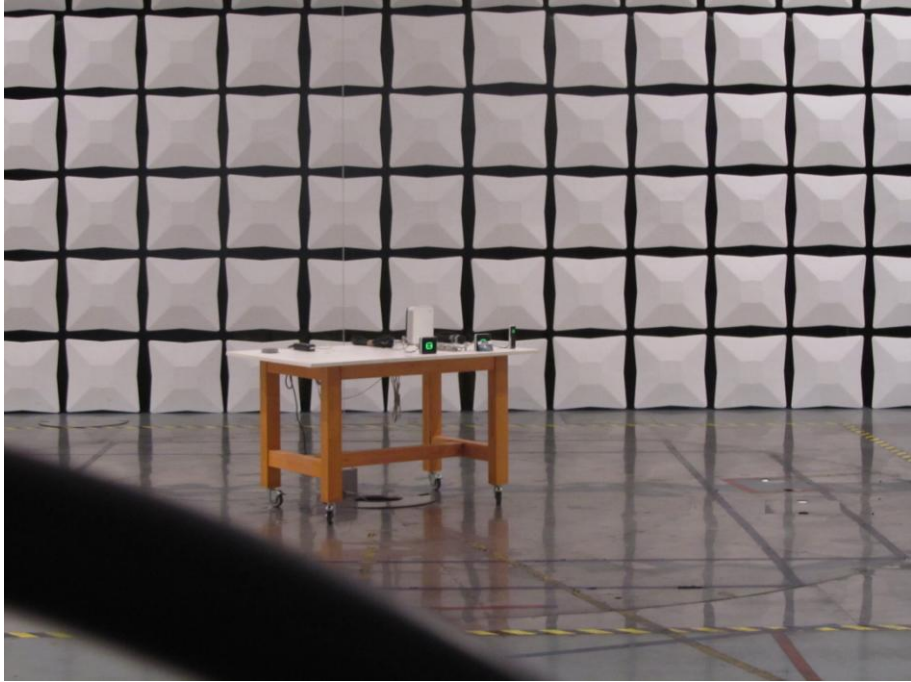


Test setup for radiated emission measurement (alternate test site)

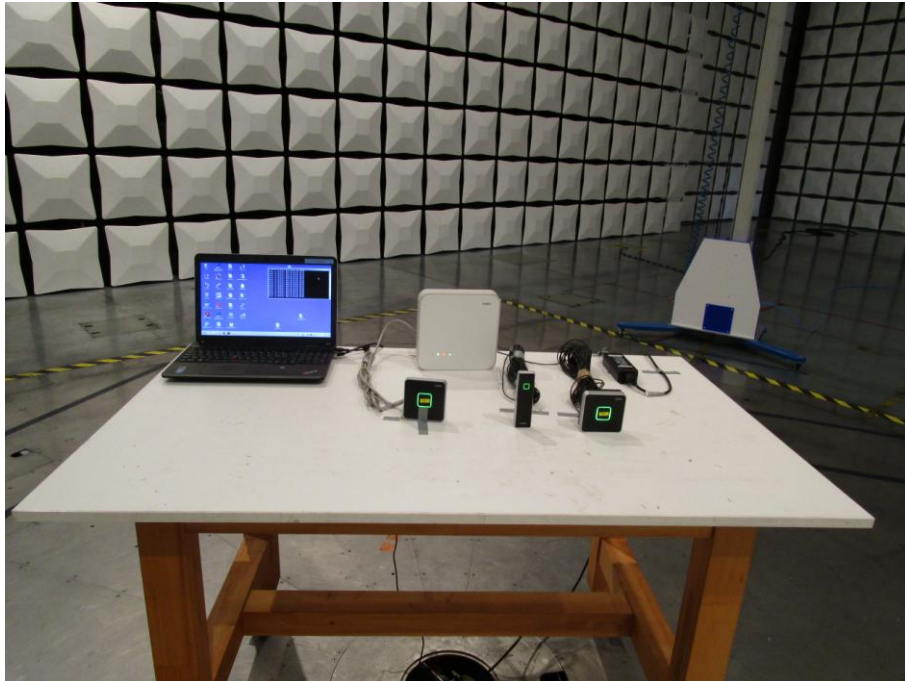

**Test setup for radiated emission measurement
(alternate test site) - continued -**

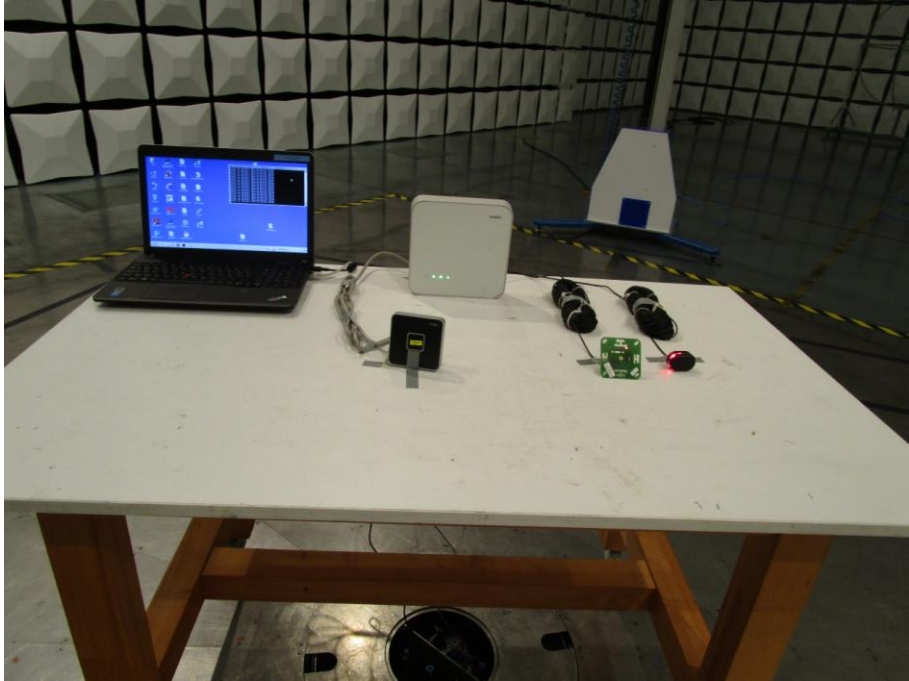


**Test setup for radiated emission measurement
(alternate test site) - continued -**

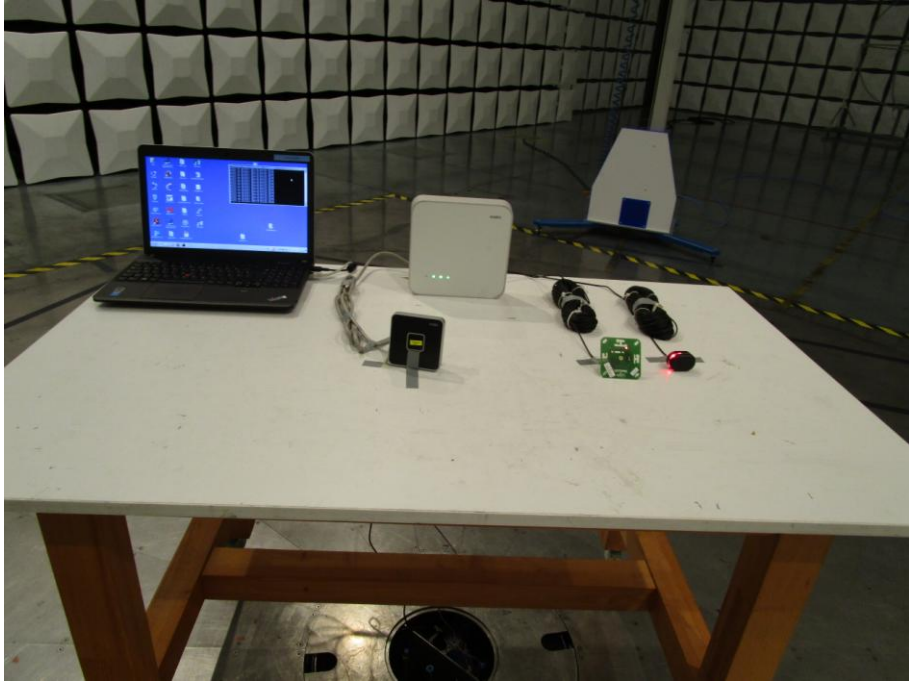

**Test setup for radiated emission measurement
(alternate test site) - continued -**



**Test setup for radiated emission measurement
(alternate test site) - continued -**

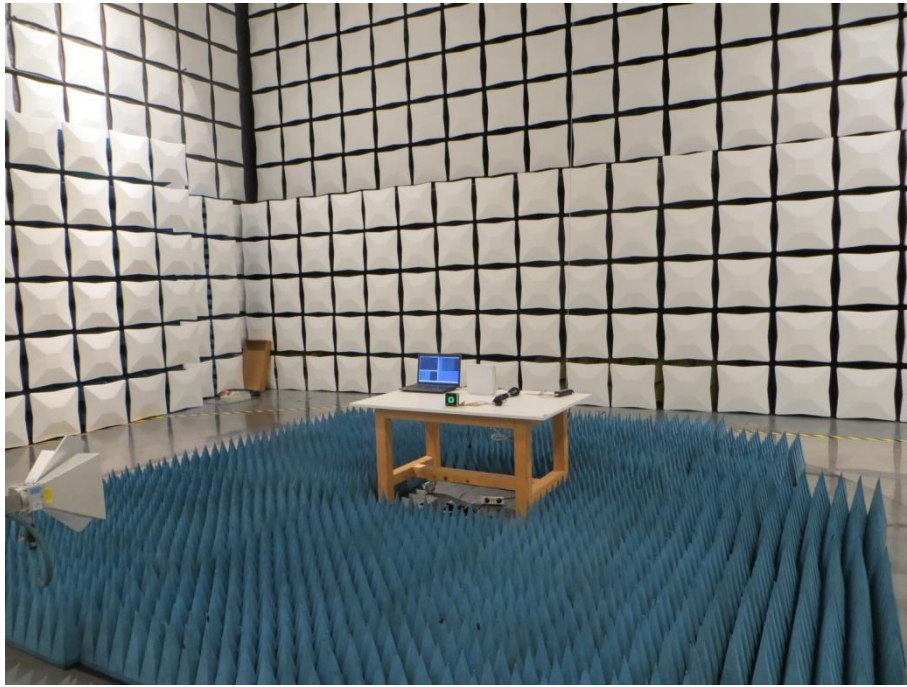

Test setup for carrier frequency stability measurement





8 Test Results

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	31	Recorded
15.215(c)	Bandwidth of the emission	41	Test passed
2.201, 2.202	Class of emission	45	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a) 15.205(d)(7)	Restricted bands of operation	--- ⁵	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	46	Test passed
15.225(a)-(d)	Spectrum Mask	53	Test passed
15.205(b) 15.215(b) 15.225(a)(d)	Radiated emission 9 kHz to 30 MHz	60	Test passed
15.205(b) 15.225(d)	Radiated emission 30 MHz to 6 GHz	64	Test passed
15.225(e)	Carrier frequency stability	71	Test passed

⁵ See "Spectrum Mask" for the 13.36 to 13.41 MHz band. For all other restricted bands see "Radiated Emission".

IC RSS-GEN Issue 4			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
6.12	Transmitter output power (conducted)	---	Not applicable
6.6	Occupied Bandwidth	31	Recorded
9	Designation of emissions	45	Calculated
6.10	Pulsed operation	---	Not applicable
8.10	Restricted bands and unwanted emission frequencies	--- ⁶	Test passed
6.4, 6.13, 8.9	Unwanted emissions 9 kHz to 30 MHz	60	Test passed
6.4, 6.13, 8.9	Unwanted emissions 30 MHz to 6 GHz	64	Test passed
8.8	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	46	Test passed
3.2	Exposure of Humans to RF Fields	76	Exempted from SAR and RF eval- uation

IC RSS-210 Issue 8			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
A2.6	Spectrum Mask	53	Test passed
A2.6	Unwanted emissions 9 kHz to 30 MHz	60	Test passed
A2.6	Unwanted emissions 30 MHz to 6 GHz	64	Test passed
A2.6	Carrier frequency stability	71	Test passed

⁶ See "Spectrum Mask" and "Unwanted emissions".


8.1 Occupied Bandwidth (FCC)

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.10, section 6.9.1
Guide:	ANSI C63.10
Description:	<p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.10, section 6.9.1; is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>The span range of the spectrum analyser display shall be between two times and five times of the occupied bandwidth. The resolution bandwidth of the spectrum analyzer should be approximately 1 % to 5 % of the occupied bandwidth, unless otherwise specified, depending on the applicable requirement. The video bandwidth shall be at least three times greater than the resolution bandwidth. The dynamic range of the spectrum analyzer at the selected resolution bandwidth shall be more than 10 dB below the target “dB down” (attenuation) requirement.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

8.1.1 Radiated measurements

Comment:	This test is valid for reader 9110
Date of test:	2017-03-17
Test site:	Alternate test site, cabin no. 8

Occupied Bandwidth (99 %):

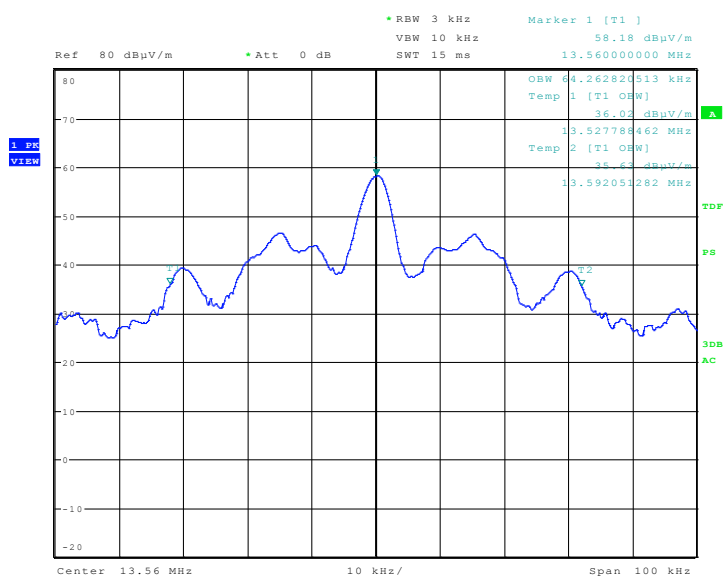

Date: 16.MAR.2016 16:07:27

Occupied Bandwidth (99 %):	64.26 kHz
----------------------------	------------------

Occupied Bandwidth (-20 dB):



Date: 16.MAR.2016 15:55:54


Occupied Bandwidth (-20 dB): **39.42 kHz**



8.1.2 Conducted measurements


Comment:	This test was performed on the RF ports of the EUT, only maximum value is noted.
Date of test:	2017-03-20
Test site:	Temperature test chamber

Occupied Bandwidth (99 %):

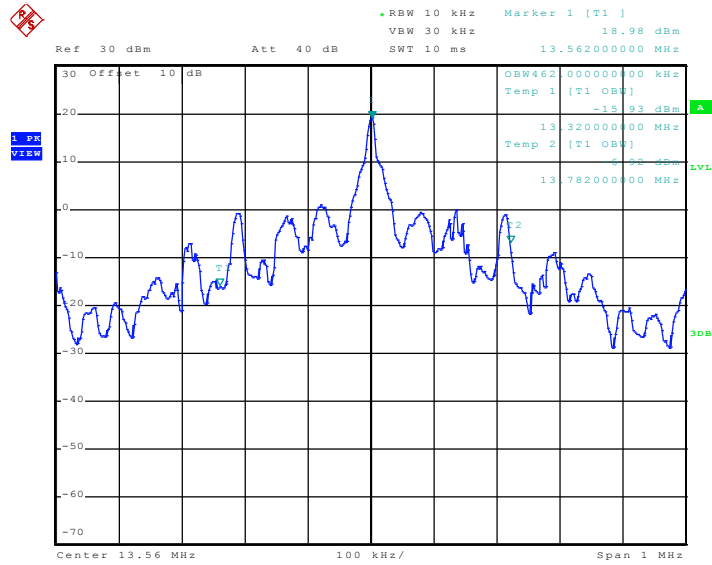

Date: 17.MAR.2016 10:17:10

Port A: 462.0 kHz

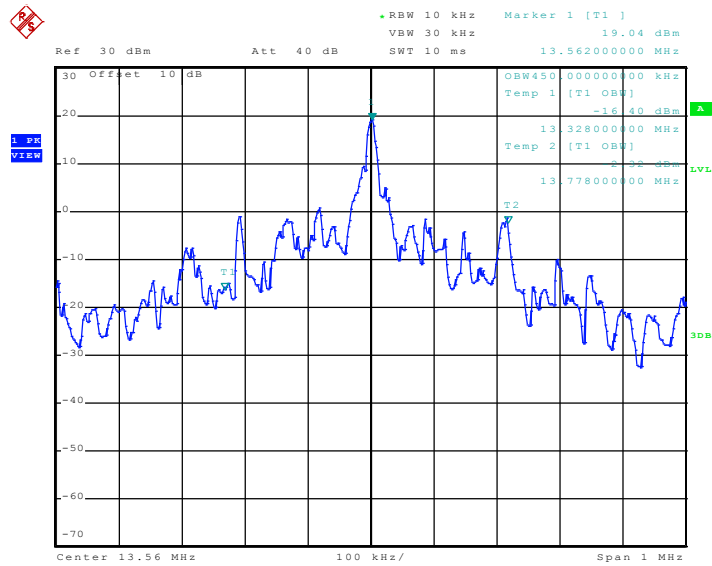


Date: 17.MAR.2016 10:23:34

Port B: 450.0 kHz


Occupied Bandwidth (99 %): **462.0 kHz**

Occupied Bandwidth (-20 dB):

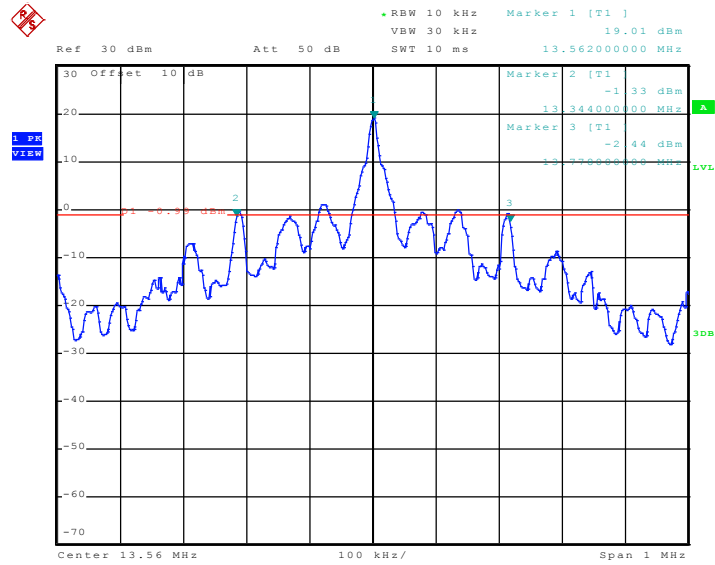

Date: 17.MAR.2016 10:13:31

Port A: 434.0 kHz

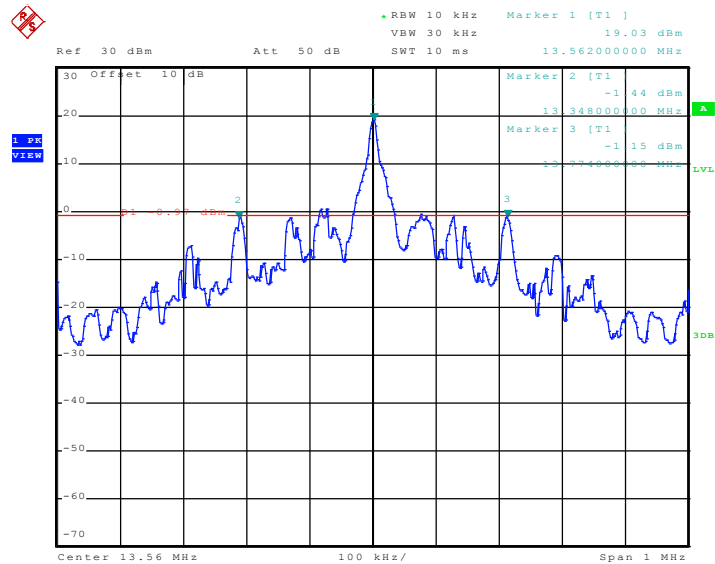

Date: 17.MAR.2016 10:25:43

Port B: 430.0 kHz

Occupied Bandwidth (-20 dB): **434.0 kHz**




8.2 Occupied Bandwidth (IC)

Rules and specifications:	IC RSS-Gen Issue 4, section 6.6
Guide:	IC RSS-Gen Issue 4, section 6.6
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

8.2.1 Radiated measurements

Comment:	This test is valid for reader 9110
Date of test:	2017-03-17
Test site:	Alternate test site, cabin no. 8

Occupied Bandwidth (99 %):

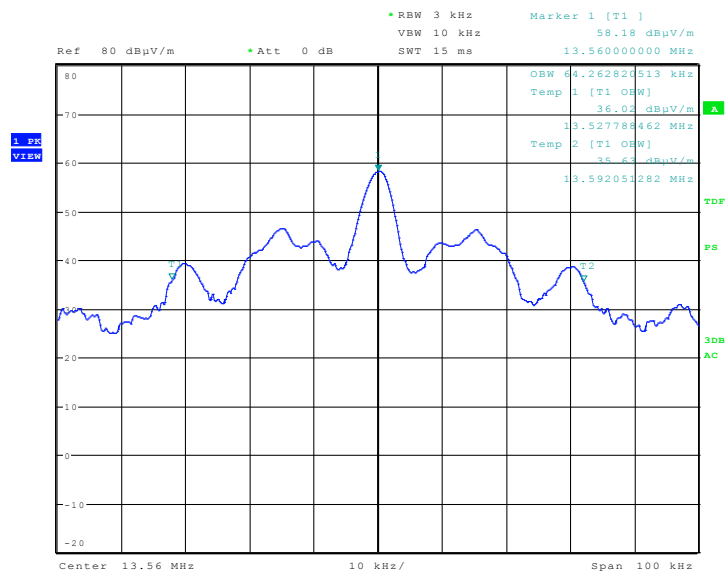

Date: 16.MAR.2016 16:07:27


Occupied Bandwidth (99 %):	64.26 kHz
----------------------------	------------------



8.2.2 Conducted measurements


Comment:	This test was performed on the RF ports of the EUT, only maximum value is noted.
Date of test:	2017-03-20
Test site:	Temperature test chamber

Occupied Bandwidth (99 %):

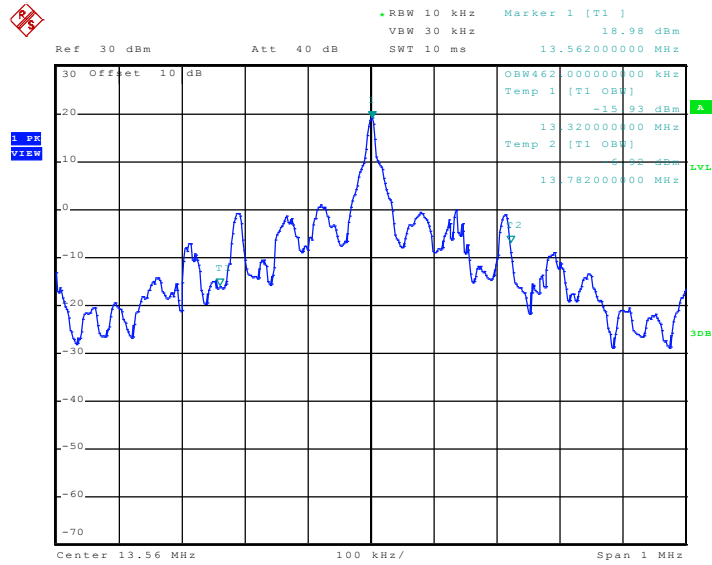

Date: 17.MAR.2016 10:17:10

Port A: 462.0 kHz

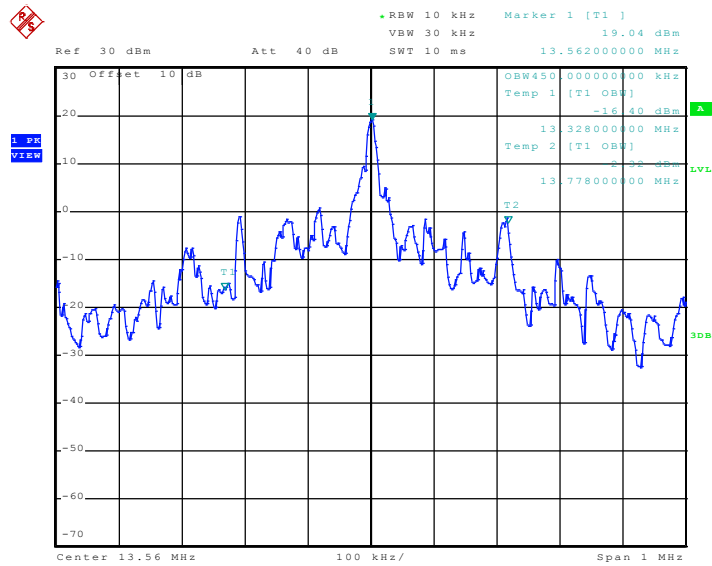

Date: 17.MAR.2016 10:23:34

Port B: 450.0 kHz

Occupied Bandwidth (99 %): **462.0 kHz**




8.3 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.215(c)
Guide:	ANSI C63.10
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The span range of the spectrum analyser display shall be between two times and five times of the occupied bandwidth. The resolution bandwidth of the spectrum analyzer should be approximately 1 % to 5 % of the occupied bandwidth, unless otherwise specified, depending on the applicable requirement. The video bandwidth shall be at least three times greater than the resolution bandwidth. The dynamic range of the spectrum analyzer at the selected resolution bandwidth shall be more than 10 dB below the target “dB down” (attenuation) requirement.</p> <p>The video bandwidth shall be at least three times greater than the resolution bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

8.3.1 Radiated measurements

Comment:	This test is valid for reader 9110
Date of test:	2017-03-17
Test site:	Alternate test site, cabin no. 8

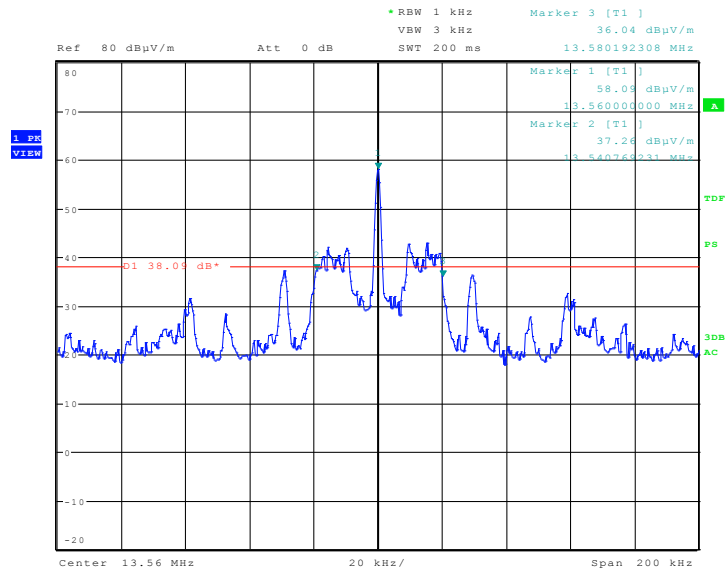

Date: 16.MAR.2016 15:55:54


Permitted frequency band:	13.110 MHz - 14.010 MHz	
20 dB bandwidth:	39.42 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances:	+0.091 kHz -0.108 kHz	
Bandwidth of the emission:	39.62 kHz	within permitted frequency band⁷: <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁷ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.


8.3.2 Conducted measurements

Comment:	This test was performed on the RF ports of the EUT, only maximum value is noted.
Date of test:	2017-03-17
Test site:	Temperature test chamber

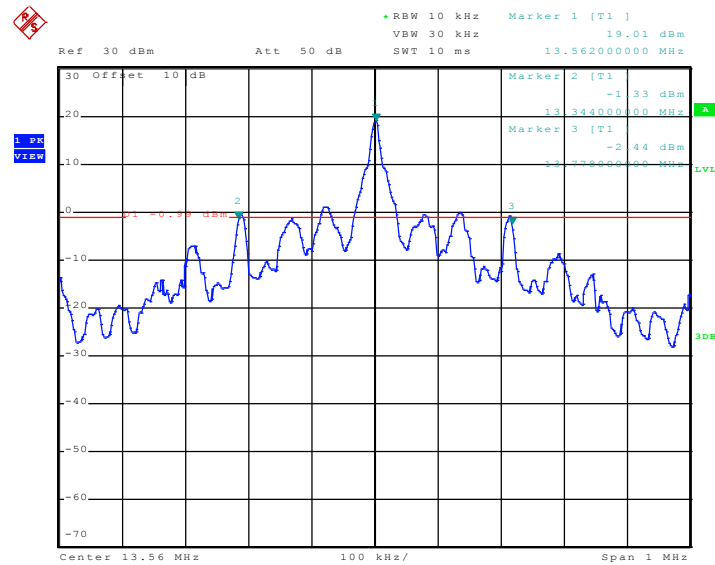

Date: 17.MAR.2016 10:13:31

Port A: 434.0 kHz

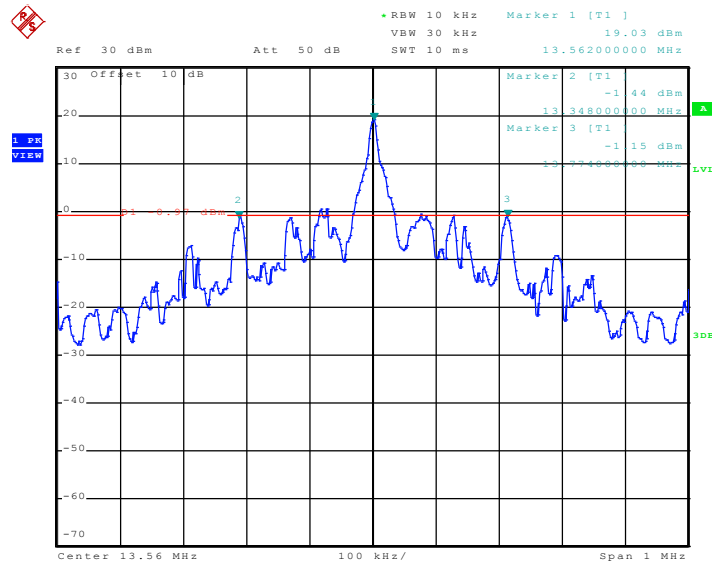

Date: 17.MAR.2016 10:25:43

Port B: 430.0 kHz

Permitted frequency band:	13.110 MHz - 14.010 MHz	
20 dB bandwidth:	434 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances:	+0.091 kHz -0.108 kHz	
Bandwidth of the emission:	434.2 kHz	within permitted frequency band⁸: <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁸ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.4 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 4, section 9
Guide:	ANSI C63.10 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------

B_n = Necessary Bandwidth	$B_n = 2BK$
B = Modulation rate	B = 217 kHz
K = Overall numerical factor	K = 1
Calculation:	$B_n = 2 \cdot (217 \text{ kHz}) \cdot 1 = 434 \text{ kHz}$

Designation of Emissions:	434KA1D
---------------------------	----------------



8.5 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-GEN Issue 4, section 8.8		
Guide:	ANSI C63.10 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dBµV)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5 5 - 30	56 60	46 50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		


Test Result:	Test passed
--------------	-------------

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB)}$$

Comment: EUT configured in Mode 1/3 with 50 Ω terminators
Date of test: 2017-03-20
Test site: Shielded room, cabin no. 1

Tested on: L1

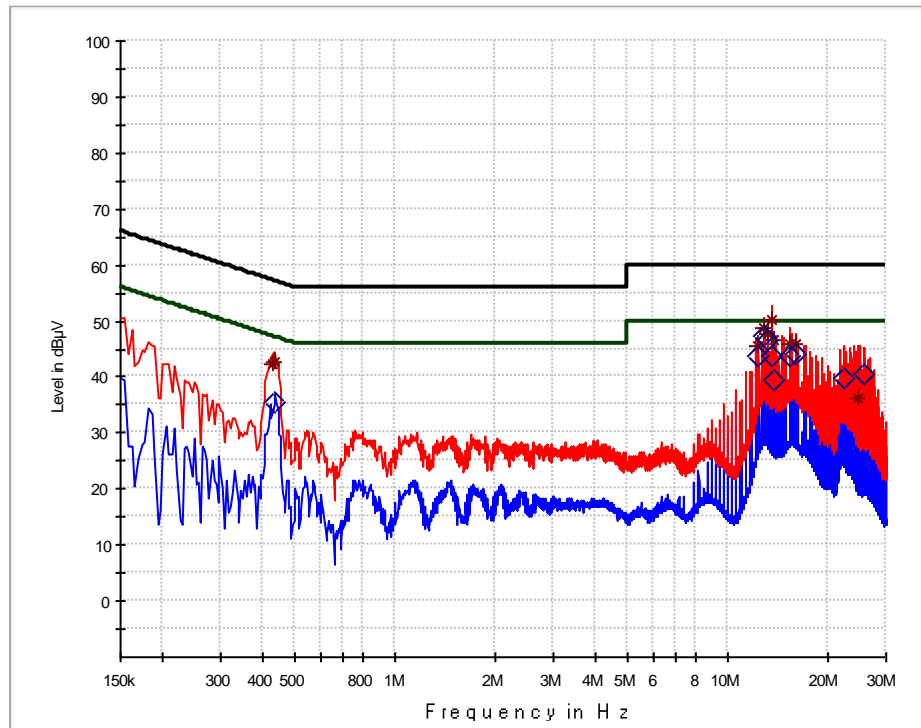


— Preview Result 2-AVG * Preview Result 1-PK+ — FCC 15.207QP
— FCC 15.207AV * Final_Result QPK ◊ Final_Result AVG



Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.430	Quasi-Peak	42.5	0.0	42.5	57.3	14.8
0.434	Quasi-Peak	42.6	0.0	42.6	57.2	14.6
0.438	Average	35.3	0.0	35.3	47.1	11.8
12.430	Average	43.7	0.2	43.9	50.0	6.1
12.430	Quasi-Peak	45.4	0.2	45.6	60.0	14.4
12.958	Average	47.2	0.2	47.4	50.0	2.6
12.958	Quasi-Peak	48.6	0.2	48.8	60.0	11.2
13.222	Average	46.2	0.2	46.4	50.0	3.6
13.222	Quasi-Peak	47.6	0.2	47.8	60.0	12.3
13.562	Quasi-Peak	50.2	0.2	50.4	60.0	9.6
13.562	Average	43.4	0.2	43.6	50.0	6.4
13.750	Quasi-Peak	46.4	0.3	46.7	60.0	13.3
13.754	Average	39.1	0.3	39.4	50.0	10.7
15.338	Quasi-Peak	45.5	0.4	45.9	60.0	14.1
15.338	Average	43.5	0.4	43.9	50.0	6.1
16.130	Average	43.8	0.4	44.2	50.0	5.8
16.130	Quasi-Peak	45.4	0.4	45.8	60.0	14.2
22.478	Average	39.7	0.2	39.9	50.0	10.1
24.862	Quasi-Peak	35.9	0.3	36.2	60.0	23.8
25.650	Average	40.1	0.3	40.4	50.0	9.6

Tested on:

N

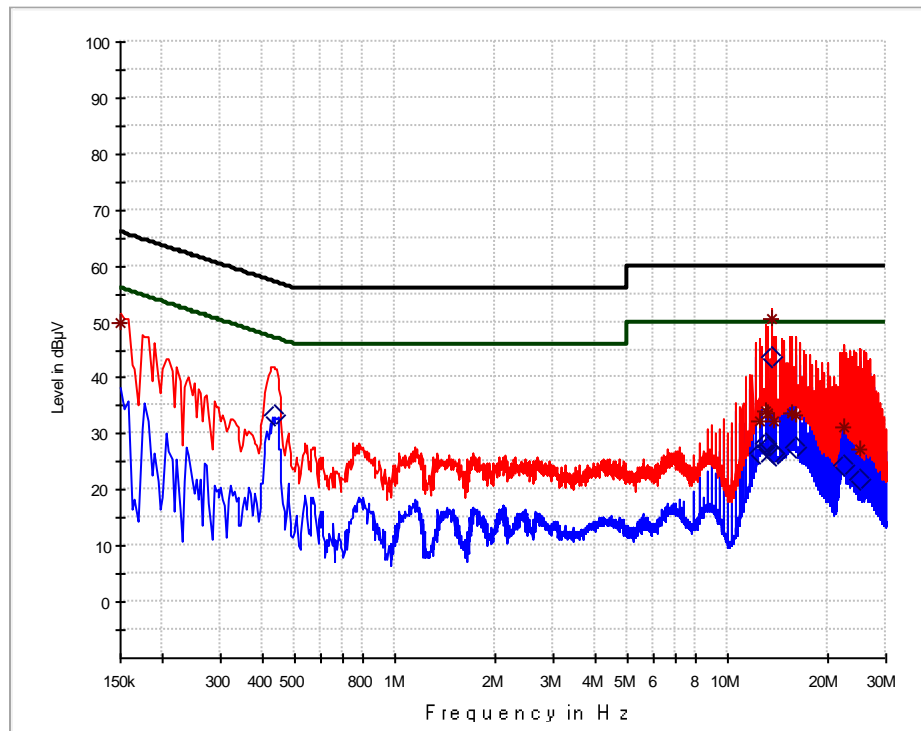


— Preview Result 2-AVG — Preview Result 1-PK+ — FCC 15.207QP
— FCC 15.207AV * Final_Result QPK ◇ Final_Result AVG



Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.150	Quasi-Peak	49.7	0.0	49.7	66.0	16.3
0.438	Average	33.4	0.0	33.4	47.1	13.7
12.454	Average	26.4	0.2	26.6	50.0	23.4
12.454	Quasi-Peak	32.1	0.2	32.3	60.0	27.7
12.982	Quasi-Peak	34.0	0.2	34.2	60.0	25.8
12.982	Average	28.1	0.2	28.3	50.0	21.7
13.246	Average	27.5	0.2	27.7	50.0	22.3
13.246	Quasi-Peak	33.4	0.2	33.6	60.0	26.4
13.558	Quasi-Peak	50.4	0.2	50.6	60.0	9.4
13.558	Average	43.6	0.2	43.8	50.0	6.2
13.778	Quasi-Peak	32.0	0.3	32.3	60.0	27.7
13.778	Average	26.2	0.3	26.5	50.0	23.6
14.042	Average	25.8	0.3	26.1	50.0	23.9
15.630	Quasi-Peak	33.3	0.4	33.7	60.0	26.3
16.158	Quasi-Peak	33.1	0.4	33.5	60.0	26.5
16.158	Average	27.2	0.4	27.6	50.0	22.4
22.510	Quasi-Peak	31.2	0.2	31.4	60.0	28.6
22.510	Average	24.2	0.2	24.4	50.0	25.6
24.898	Quasi-Peak	27.1	0.3	27.4	60.0	32.6
25.158	Average	21.5	0.3	21.8	50.0	28.2


Comment:	EUT configured in Mode 2 with 50 Ω terminators
Date of test:	2017-03-20
Test site:	Shielded room, cabin no. 1

Tested on:	DC 24 V Plus
------------	--------------

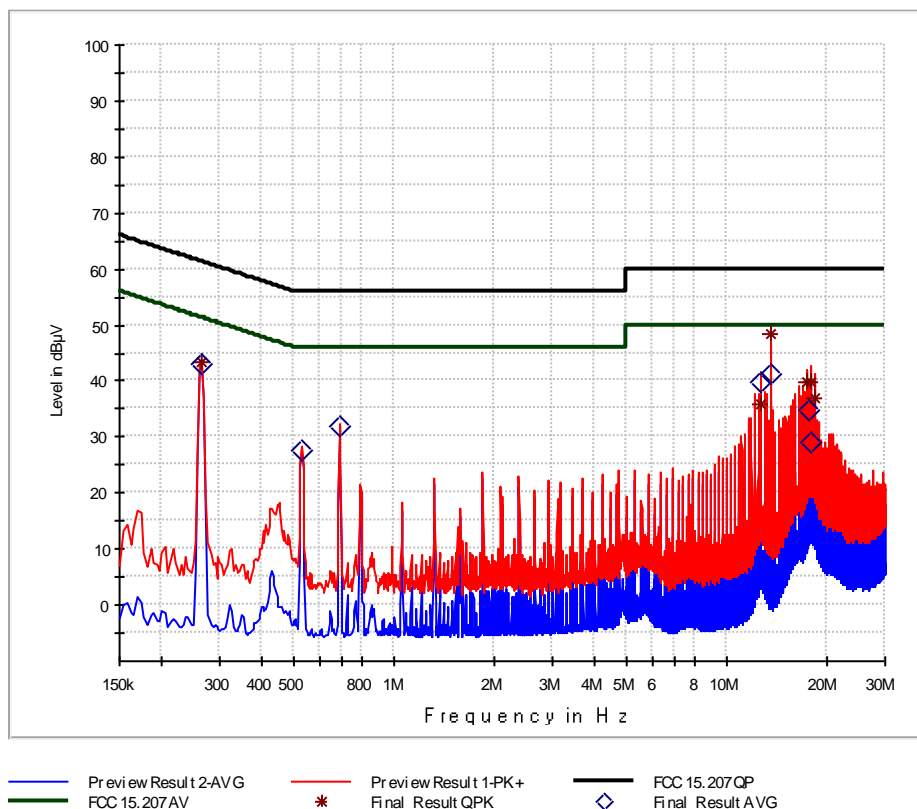

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.266	Average	43.2	0.0	43.2	51.2	8.1
0.266	Quasi-Peak	43.4	0.0	43.4	61.2	17.8
0.530	Average	27.7	0.0	27.7	46.0	18.4
0.690	Average	31.8	0.0	31.8	46.0	14.2
12.714	Average	39.6	0.2	39.8	50.0	10.2
12.718	Quasi-Peak	35.6	0.2	35.8	60.0	24.2
13.562	Average	41.1	0.2	41.3	50.0	8.7
13.562	Quasi-Peak	48.2	0.2	48.4	60.0	11.6
17.478	Quasi-Peak	39.3	0.4	39.7	60.0	20.4
17.746	Average	34.4	0.3	34.7	50.0	15.3
18.010	Quasi-Peak	39.4	0.3	39.7	60.0	20.3
18.014	Average	28.9	0.3	29.2	50.0	20.8
18.538	Quasi-Peak	36.5	0.3	36.8	60.0	23.2

Tested on: DC 24 V Minus

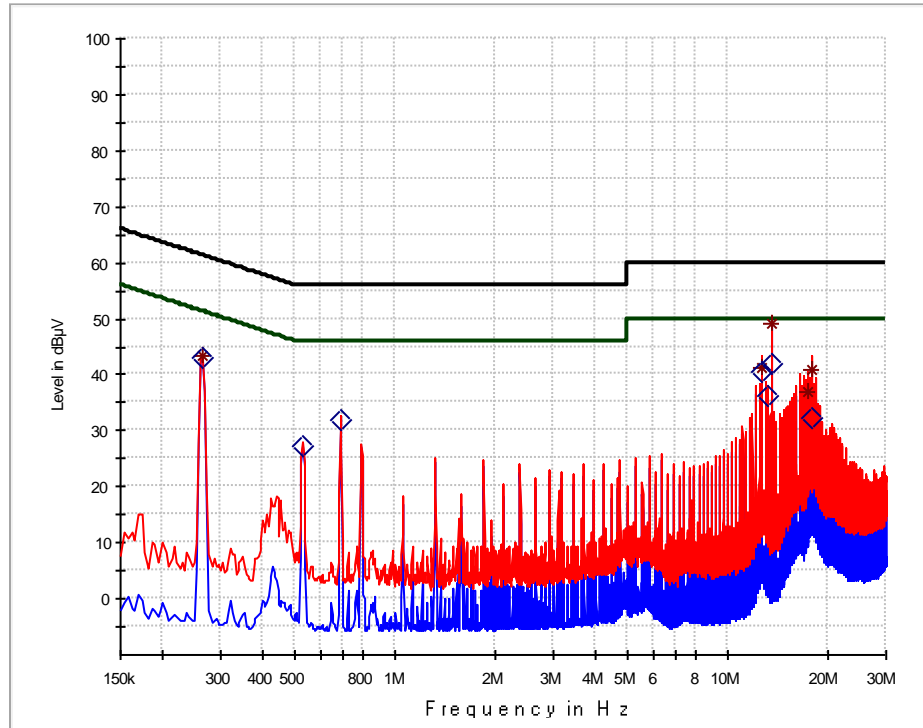

— Preview Result 2-AVG
 — Preview Result 1-PK+ Final_Result QPK
 — FCC 15.207QP
— FCC 15.207AV
 *
 ◇ Final_Result AVG

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
0.266	Average	43.2	0.0	43.2	51.2	8.1
0.266	Quasi-Peak	43.4	0.0	43.4	61.2	17.8
0.530	Average	27.4	0.0	27.4	46.0	18.7
0.690	Average	32.0	0.0	32.0	46.0	14.0
12.714	Quasi-Peak	41.1	0.2	41.3	60.0	18.7
12.714	Average	40.4	0.2	40.6	50.0	9.5
13.246	Average	36.0	0.2	36.2	50.0	13.8
13.558	Average	41.8	0.2	42.0	50.0	8.1
13.558	Quasi-Peak	49.0	0.2	49.2	60.0	10.8
17.478	Quasi-Peak	36.5	0.4	36.9	60.0	23.1
18.014	Quasi-Peak	40.7	0.3	41.0	60.0	19.0
18.018	Average	32.0	0.3	32.3	50.0	17.7


8.6 Spectrum Mask

Rules and specifications:	CFR 47 Part 15, section 15.225(a)-(d) IC RSS-210 Issue 8, section A2.6			
Guide:	ANSI C63.10			
Description:	Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength (dB $\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			


Comment:	
Date of test:	2017-03-17
Test site:	Alternative Test site
Test distance:	10 meters
Extrapolation Factor:	40 dB/decade

Test Result:	Test passed
--------------	-------------

8.6.1 Antenna 90 00

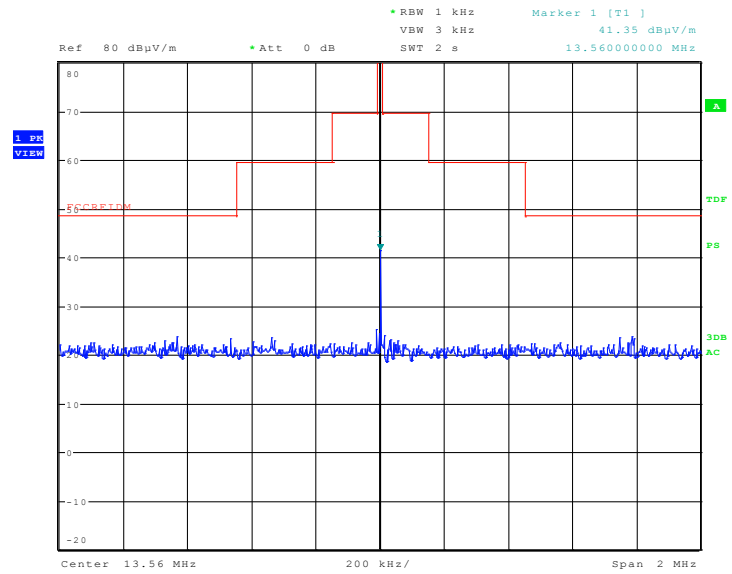


Date: 16.MAR.2016 18:05:36

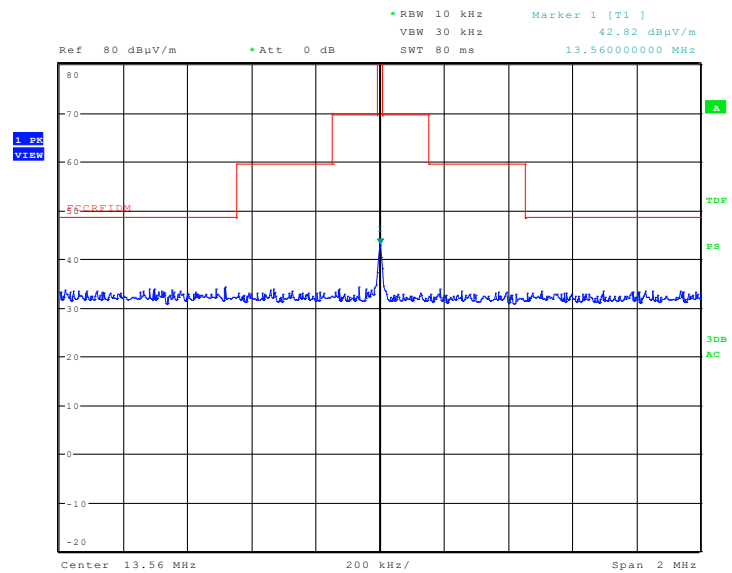


Date: 16.MAR.2016 18:07:24

8.6.2 Antenna 90 01

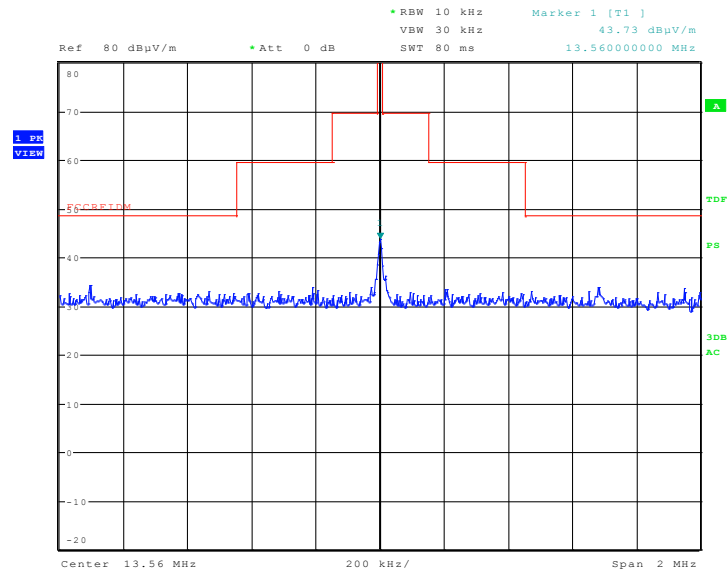


Date: 16.MAR.2016 16:25:59

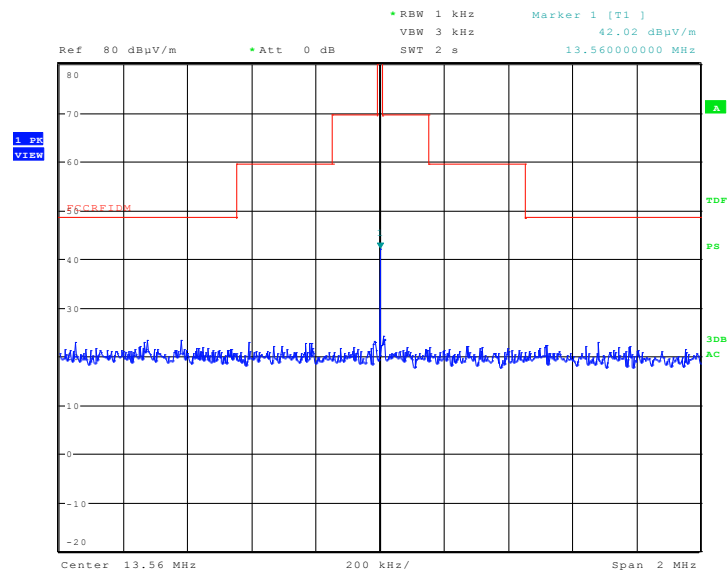


Date: 16.MAR.2016 16:25:21

8.6.6 Reader 91 10

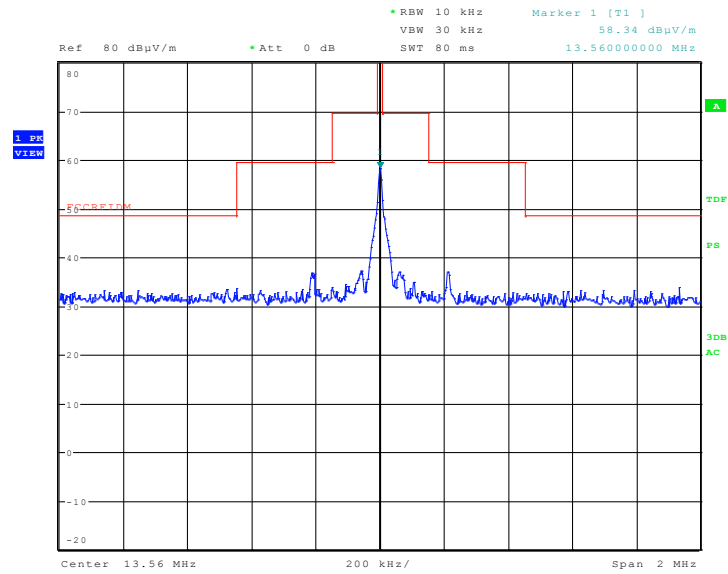

Date: 16.MAR.2016 16:11:49

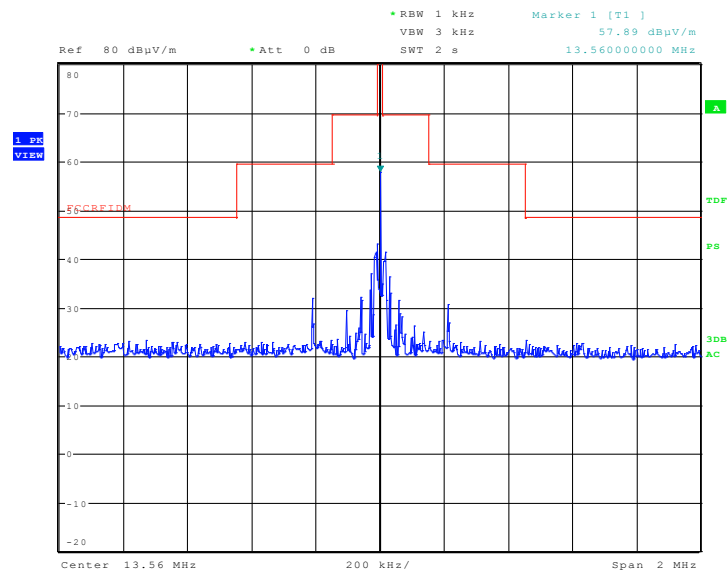

Date: 16.MAR.2016 16:18:49

8.7 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.225(a)-(d) IC RSS-GEN Issue 4, sections 8.9 and 8.10(b)(c) and IC RSS-210 Issue 8, section A2.6			
Guide:	ANSI C63.10			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Test Result:	Test passed
--------------	-------------

Sample calculation of final values:


$$\text{Extrapolation Factor (dB)} = (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\text{Final Value (dB}\mu\text{V}/\text{m)} = \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}$$

Note: Extrapolation factor (dB) and final value (dB $\mu\text{V}/\text{m}$) are relating to distance d.

Comment:	Operating in Mode 1
Date of test:	2017-03-17
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

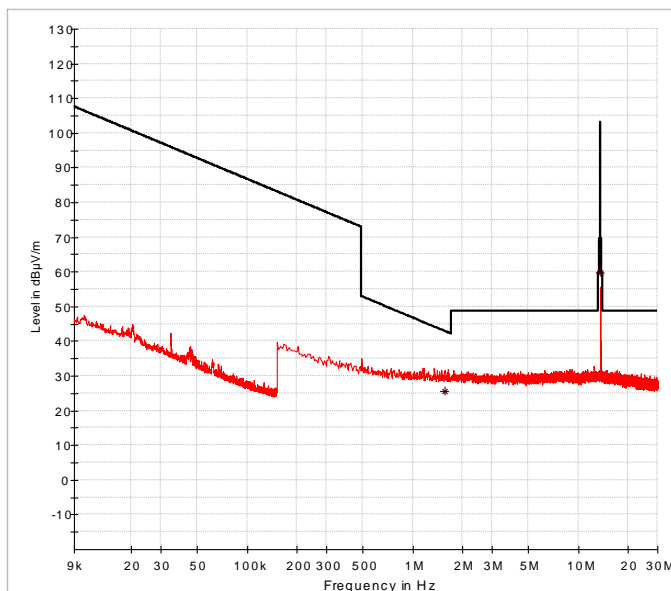


— Preview Result 1-PK+ — FCC 15.225 mag (10 m)
* Final_Result QPK ◇ Final_Result PK+

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d1 (m)	d (m)							
1.55075	Quasi-Peak	10	30	5.4	20.0	-19.1		6.3	23.8	17.4
13.56025	Quasi-Peak	10	30	39.9	20.0	-19.1		40.8	84.0	43.2

Comment:	Operating in Mode 2
Date of test:	2017-03-17
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

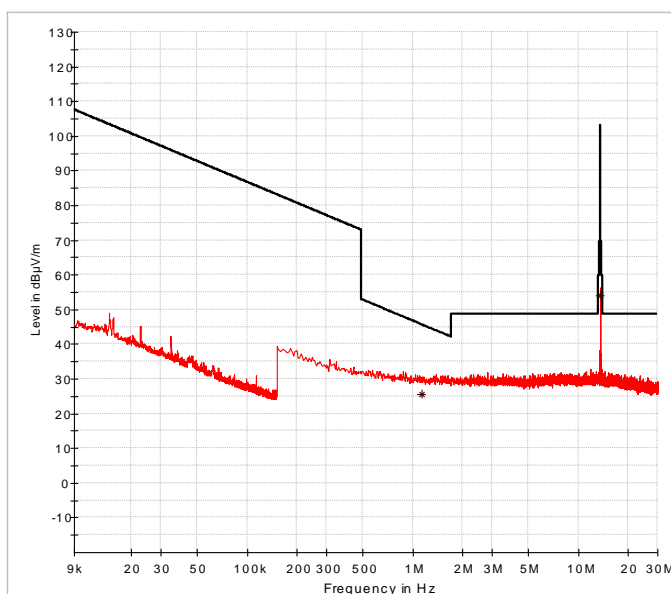


— Preview Result 1-PK+ — FCC 15.225 mag (10 m)
* Final_Result QPK ◇ Final_Result PK+

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d1 (m)	d (m)							
1.13825	Quasi-Peak	10	30	5.5	20.0	-19.1		6.4	26.5	20.1
13.56025	Quasi-Peak	10	30	34.1	20.0	-19.1		35.0	84.0	49.0

Comment:	Operating in Mode 3
Date of test:	2017-03-17
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

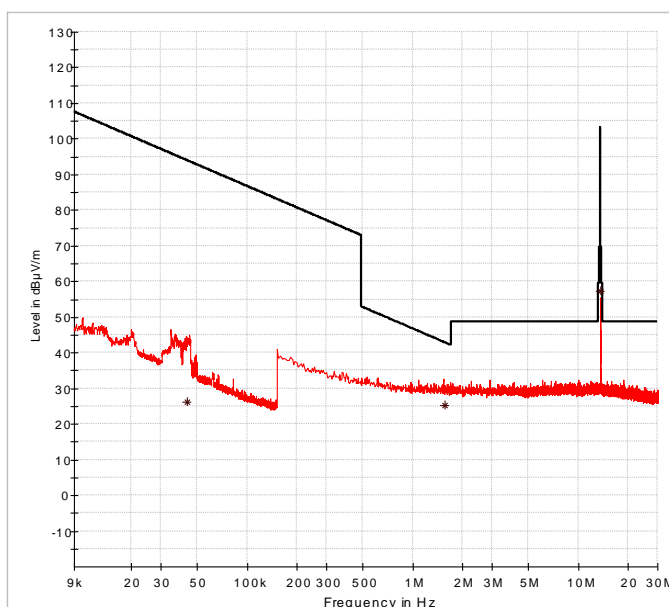

— Preview Result 1-PK — FCC 15.225 mag (10 m) * Final Result QPK

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d1 (m)	d (m)							
0.04360	Quasi-Peak	10	300	6.3	20.0	-59.1		-32.8	34.8	67.6
1.55750	Quasi-Peak	10	30	5.4	20.0	-19.1		6.3	23.8	17.4
13.56025	Quasi-Peak	10	30	37.3	20.0	-19.1		38.2	84.0	45.8



8.8 Radiated Emission Measurement 30 MHz to 6 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-GEN Issue 4, sections 8.9 and 8.10(b)(c) and IC RSS-210 Issue 8, section A2.6		
Guide:	ANSI C63.10		
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission at Alternative Test Site (6.4)		


Test Result:	Test passed
--------------	-------------

Sample calculation of final values:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$


Comment:	Operating in Mode 1	
Date of test:	2017-03-17/2017-03-20	
Test site:	Semi-anechoic room, cabin no. 8	
Test distance:	Frequencies \leq 8.2 GHz:	3 meters

Test Result:	Test passed
--------------	-------------

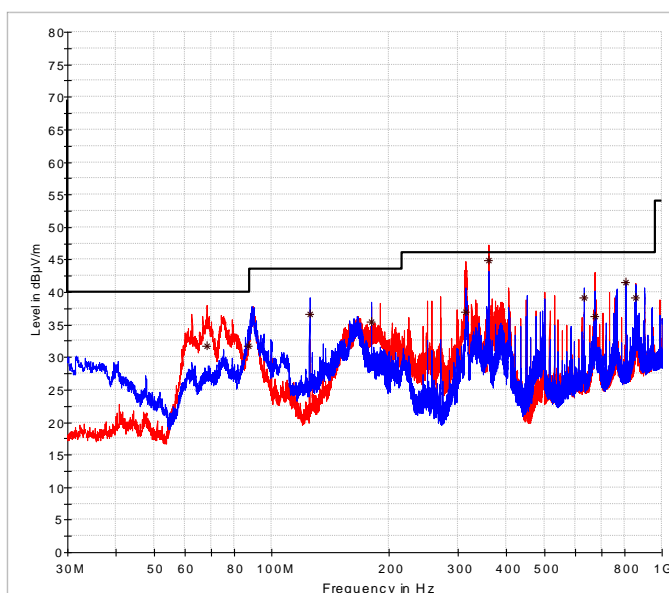

* Preview Result 1H-PK Final_Result QPK
 ◇ Preview Result 1V-PK Final_Result AVG
 — FCC 15.209

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
68.030	horizontal	Quasi-Peak	21.1	10.6		31.7	40.0	8.3
87.080	vertical	Quasi-Peak	20.0	11.8		31.8	40.0	8.2
124.980	vertical	Quasi-Peak	25.4	11.2		36.6	43.5	6.9
180.010	horizontal	Quasi-Peak	24.4	11.0		35.4	43.5	8.1
314.960	horizontal	Quasi-Peak	21.8	15.2		37.0	46.0	9.0
359.980	vertical	Quasi-Peak	28.5	16.4		44.9	46.0	1.1
629.980	horizontal	Quasi-Peak	17.9	21.3		39.2	46.0	6.9
674.820	vertical	Quasi-Peak	14.5	21.8		36.3	46.0	9.8
809.980	horizontal	Quasi-Peak	18.0	23.5		41.5	46.0	4.5
854.820	horizontal	Quasi-Peak	14.9	24.2		39.1	46.0	6.9

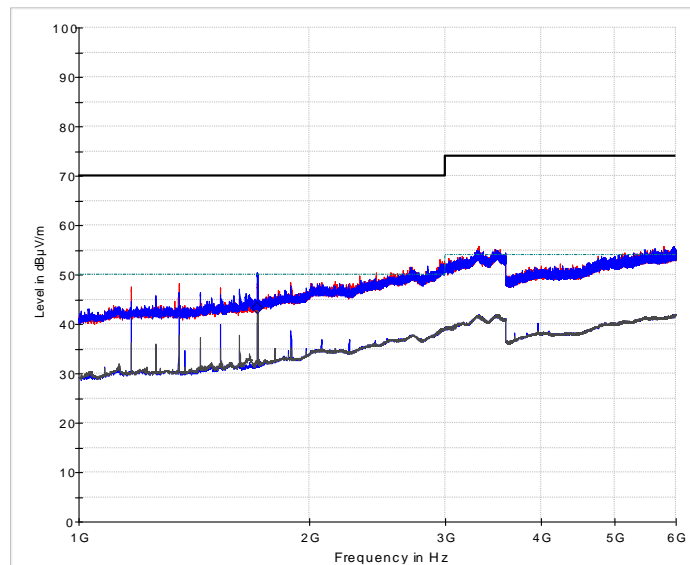


Preview Result 2H-AVG Preview Result 1H-PK+
 Preview Result 2V-AVG Preview Result 1V-PK+
 EN 55022 Class B Radiated disturbance 3 m PK EN 55022 Class B Radiated disturbance 3 m A
 * Final_Result PK+ ◊ Final_Result CAV

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Height cm	Pol	Azimuth deg	Corr. dB
1710,000000	--	43,33	50,00	6,67	138,0	V	-84,0	30,0


Comment:	Operating in Mode 2	
Date of test:	2017-03-17/2017-03-20	
Test site:	Semi-anechoic room, cabin no. 8	
Test distance:	Frequencies \leq 8.2 GHz:	3 meters

Test Result:	Test passed
--------------	-------------

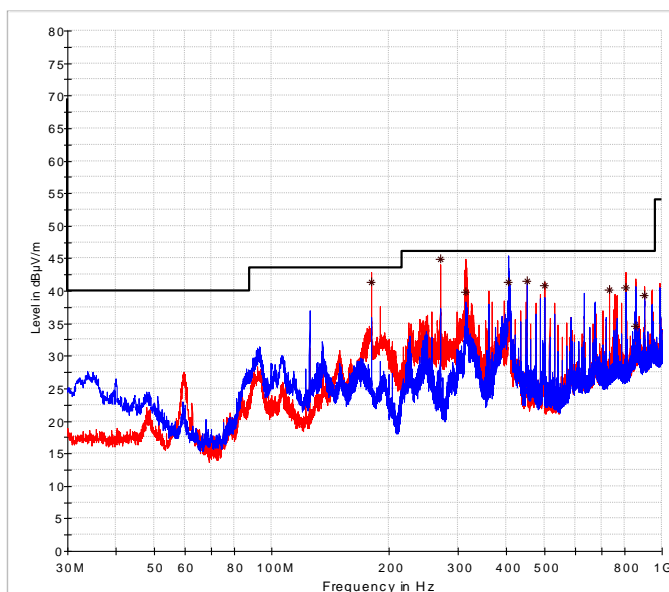

* Preview Result 1H-PK Final_Result QPK
 ◊ Preview Result 1V-PK Final_Result AVG
 — FCC 15.209

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
179.980	horizontal	Quasi-Peak	30.3	11.0		41.3	43.5	2.2
269.980	horizontal	Quasi-Peak	30.7	14.1		44.8	46.0	1.2
314.970	horizontal	Quasi-Peak	24.7	15.2		39.9	46.0	6.2
404.980	vertical	Quasi-Peak	24.0	17.3		41.3	46.0	4.7
449.980	vertical	Quasi-Peak	23.7	17.8		41.5	46.0	4.5
501.730	horizontal	Quasi-Peak	22.0	18.9		40.9	46.0	5.1
732.250	horizontal	Quasi-Peak	17.3	22.8		40.1	46.0	5.9
809.980	horizontal	Quasi-Peak	17.0	23.5		40.5	46.0	5.5
855.070	horizontal	Quasi-Peak	10.4	24.2		34.6	46.0	11.4
899.960	horizontal	Quasi-Peak	14.4	24.9		39.3	46.0	6.7

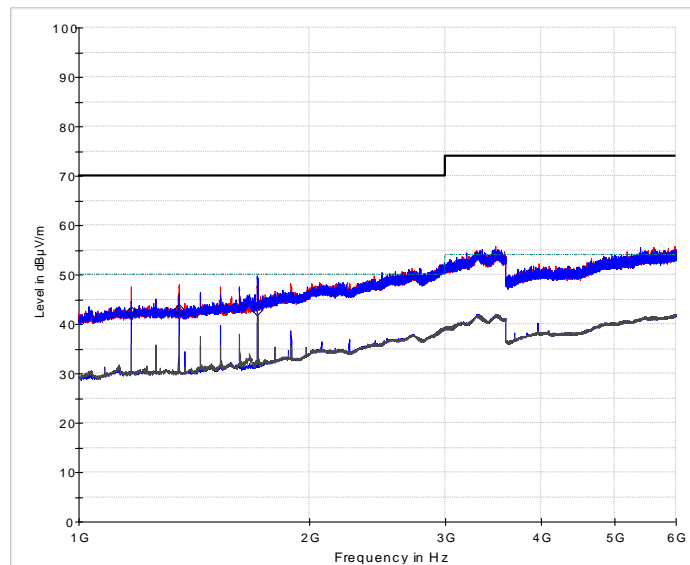


— Preview Result 2H-AVG — Preview Result 1H-PK+
— Preview Result 2V-AVG — Preview Result 1V-PK+
 EN 55022 Class B Radiated disturbance 3 m PK EN 55022 Class B Radiated disturbance 3 m A
 * Final_Result PK+ ◇ Final_Result CAV


Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Height cm	Pol	Azimuth deg	Corr. dB
1170,000000	--	42,34	50,00	7,66	150,0	H	175,0	28,5
1350,000000	--	43,00	50,00	7,00	175,0	H	163,0	29,0
1710,000000	--	42,95	50,00	7,05	139,0	V	-84,0	30,0

Comment:	Operating in Mode 3	
Date of test:	2017-03-17/2017-03-20	
Test site:	Semi-anechoic room, cabin no. 8	
Test distance:	Frequencies ≤ 8.2 GHz:	3 meters

Test Result:	Test passed
--------------	-------------

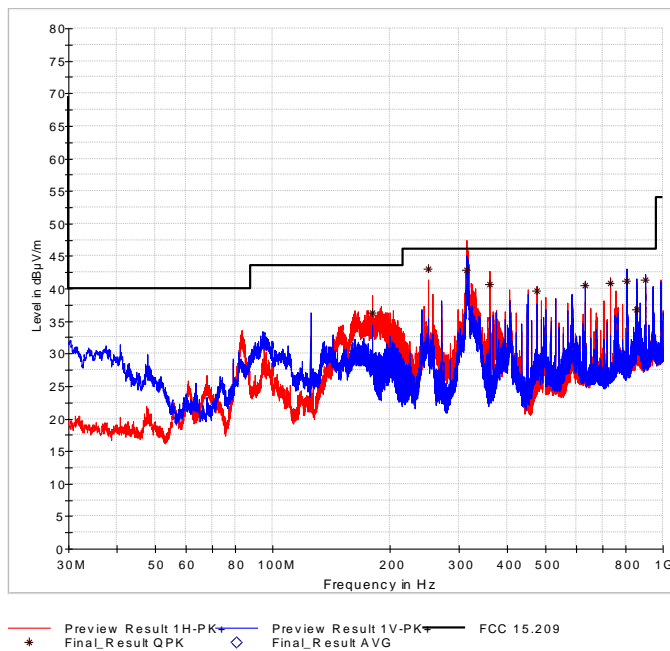

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
179.980	horizontal	Quasi-Peak	25.2	11.0		36.2	43.5	7.3
250.000	horizontal	Quasi-Peak	29.0	14.0		43.0	46.0	3.0
314.940	horizontal	Quasi-Peak	27.6	15.2		42.8	46.0	3.2
359.980	horizontal	Quasi-Peak	24.3	16.4		40.7	46.0	5.3
474.610	horizontal	Quasi-Peak	21.3	18.4		39.7	46.0	6.3
629.980	vertical	Quasi-Peak	19.2	21.3		40.5	46.0	5.5
732.250	horizontal	Quasi-Peak	18.1	22.8		40.9	46.0	5.1
809.950	vertical	Quasi-Peak	17.7	23.5		41.2	46.0	4.8
854.770	vertical	Quasi-Peak	12.6	24.2		36.8	46.0	9.2
899.950	vertical	Quasi-Peak	16.5	24.9		41.4	46.0	4.6

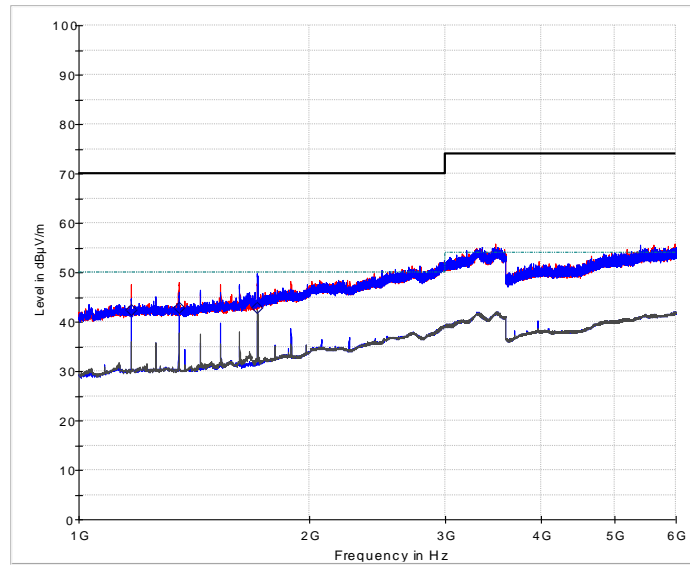

— Preview Result 2H-AVG — Preview Result 1H-PK+
 — Preview Result 2V-AVG — Preview Result 1V-PK+
 — EN 55022 Class B Radiated disturbance 3 m PK — EN 55022 Class B Radiated disturbance 3 m A
 * Final_Result PK+ ◊ Final_Result CAV

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Limit dBµV/m	Margin dB	Height cm	Pol	Azimuth deg	Corr. dB
1710,000000	--	43,11	50,00	7,05	139,0	V	-84,0	30,0


8.9 Carrier Frequency Stability

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 4, section 8.11 and IC RSS-210 Issue 8, section A2.6
Guide:	ANSI C63.10
Limit:	The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % (± 100 ppm) of the carrier frequency under nominal conditions.
Temperature range:	-20°C to +50°C (at normal supply voltage)
Voltage range:	85% to 115% of the rated supply voltage (at a temperature of +20°C)
Measurement procedure:	Carrier Frequency Stability (6.5)

Comment:	--
Date of test:	2017-03-20

8.9.1 Carrier Frequency Stability vs. Temperature


8.9.2 Reader 90 0X

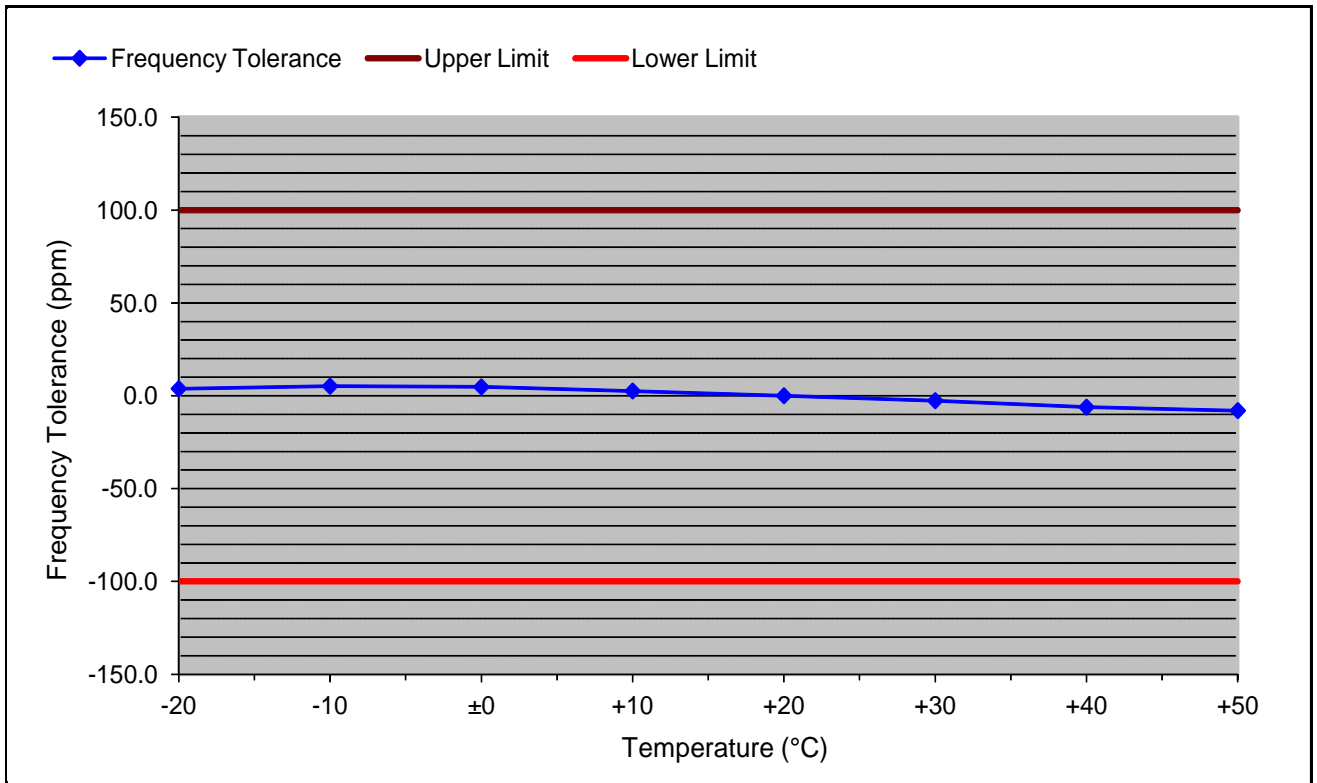

Supply voltage:		12 V		Nominal frequency:		13.560009 MHz	
Temperature (°C)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)	
-20	13.560061	52	3.8	+100.0	-100.0	96.2	
-10	13.560079	70	5.2	+100.0	-100.0	94.8	
±0	13.560074	65	4.8	+100.0	-100.0	95.2	
+10	13.560044	35	2.6	+100.0	-100.0	97.4	
+20	13.560009	0	0.0	+100.0	-100.0	100.0	
+30	13.559973	-36	-2.7	+100.0	-100.0	97.3	
+40	13.559926	-83	-6.1	+100.0	-100.0	93.9	
+50	13.559901	-108	-8.0	+100.0	-100.0	92.0	

Test Result:	Test passed
--------------	-------------

8.9.3 Reader 91 10

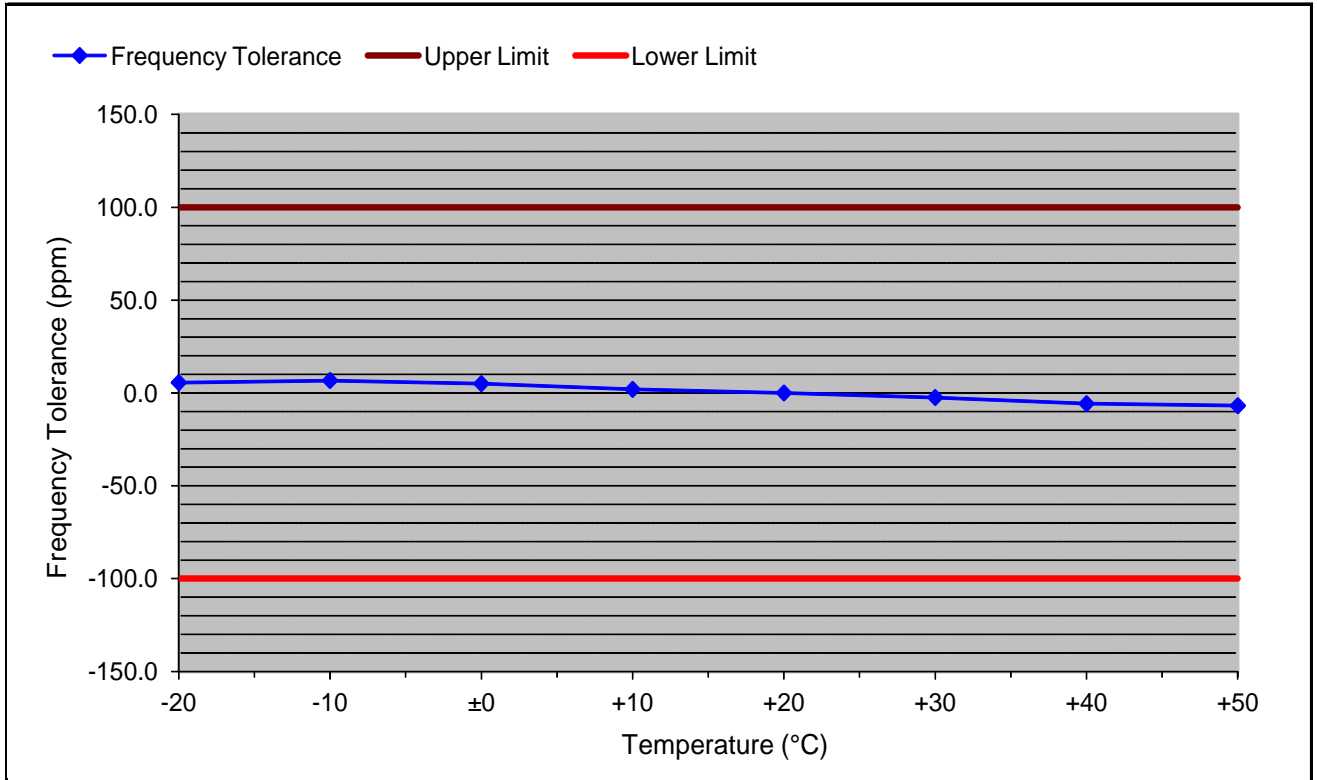


Supply voltage: 12 V Nominal frequency: 13.560020 MHz

Temperature (°C)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
-20	13.560096	76	5.6	+100.0	-100.0	94.4
-10	13.560111	91	6.7	+100.0	-100.0	93.3
±0	13.560088	68	5.0	+100.0	-100.0	95.0
+10	13.560046	26	1.9	+100.0	-100.0	98.1
+20	13.560020	0	0.0	+100.0	-100.0	100.0
+30	13.559987	-33	-2.4	+100.0	-100.0	97.6
+40	13.559942	-78	-5.8	+100.0	-100.0	94.2
+50	13.559927	-93	-6.9	+100.0	-100.0	93.1

Test Result: Test passed

8.9.4 Carrier Frequency Stability vs. Supply Voltage

8.9.5 Reader 90 0X

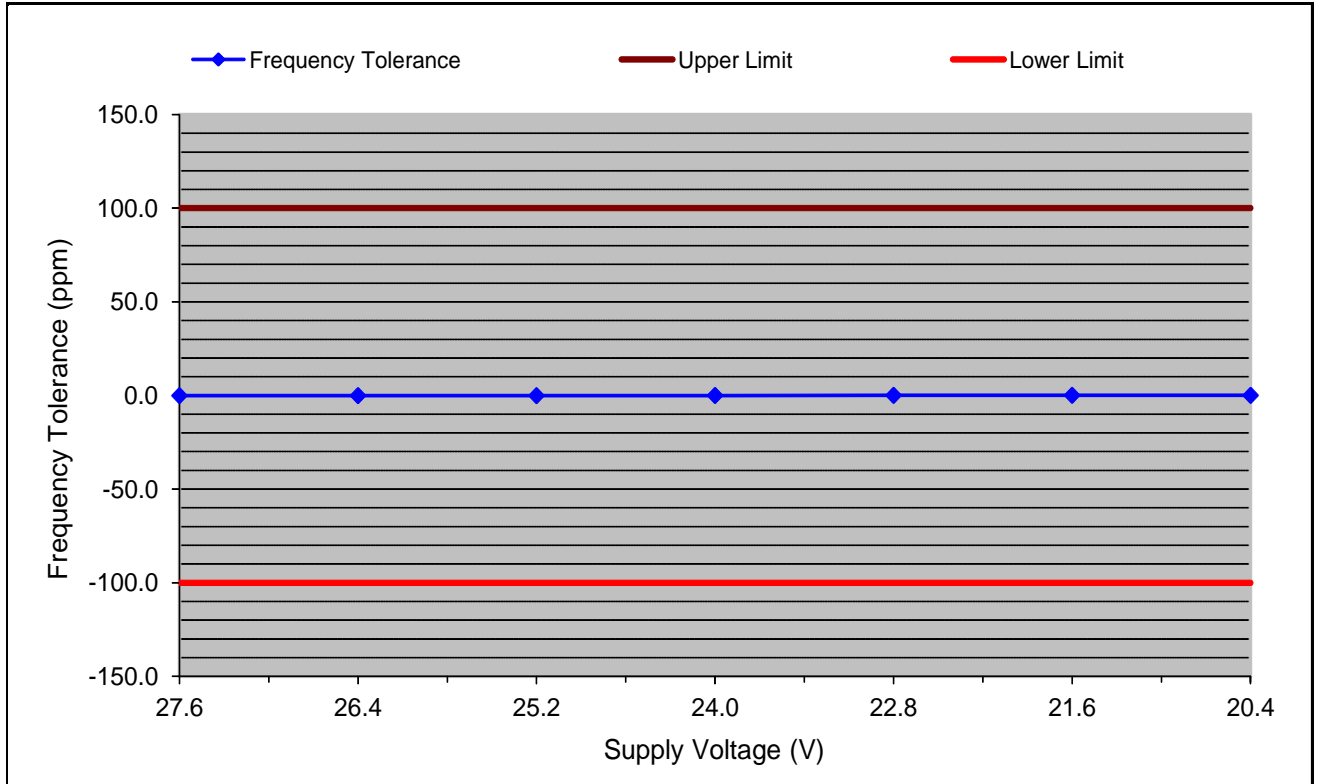


Temperature: +20 °C Battery End Point: Not applicable
 Nominal frequency: 13.559980 MHz

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
27.6	13.559978	-1	-0.1	+100.0	-100.0	99.9
26.4	13.559978	-1	-0.1	+100.0	-100.0	99.9
25.2	13.559978	-1	-0.1	+100.0	-100.0	99.9
24.0	13.559980	0	0.0	+100.0	-100.0	100.0
22.8	13.559980	1	0.1	+100.0	-100.0	99.9
21.6	13.559981	1	0.1	+100.0	-100.0	99.9
20.4	13.559980	1	0.1	+100.0	-100.0	99.9

Test Result: Test passed

8.9.6 Reader 91 10

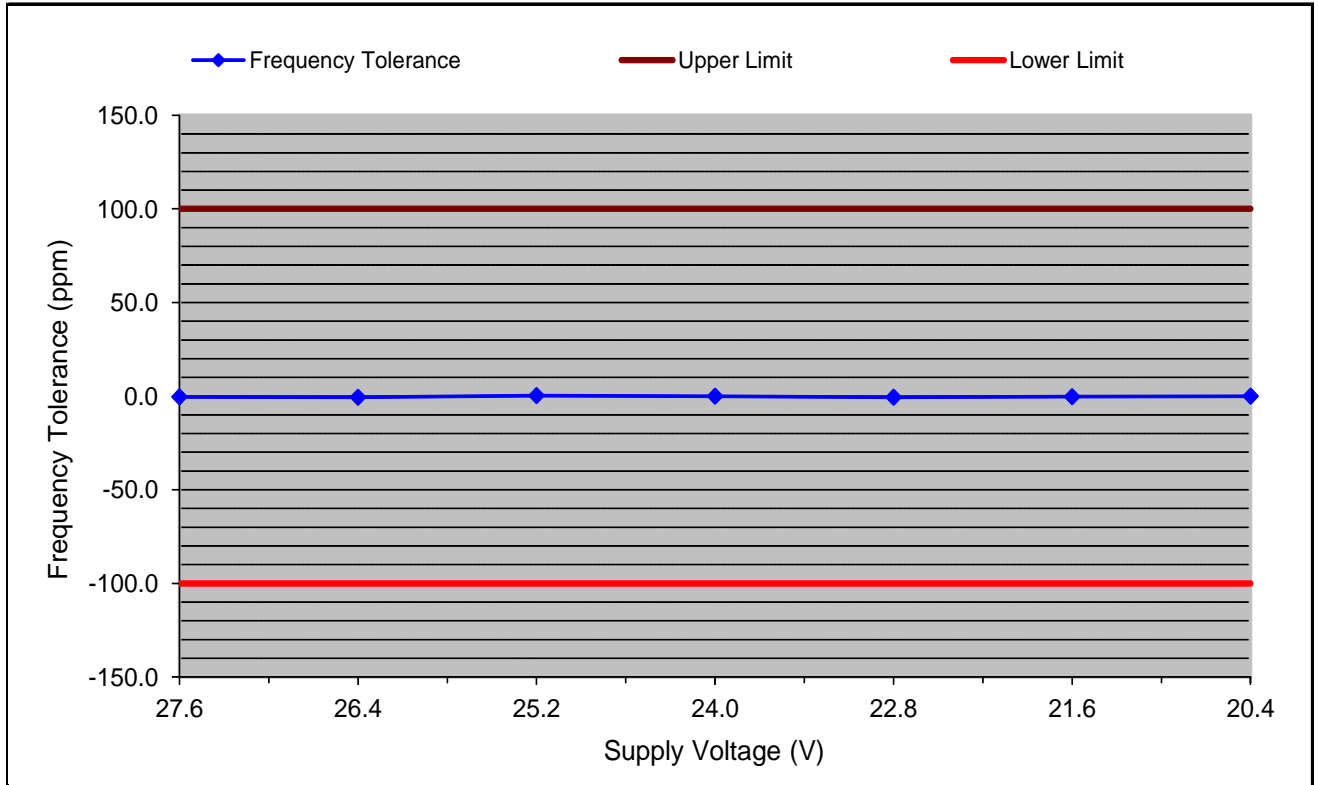

Temperature: +20 °C Battery End Point: Not applicable
 Nominal frequency: 13.560008 MHz

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
27.6	13.560003	-5	-0.4	+100.0	-100.0	99.6
26.4	13.560000	-8	-0.6	+100.0	-100.0	99.4
25.2	13.560012	4	0.3	+100.0	-100.0	99.7
24.0	13.560008	0	0.0	+100.0	-100.0	100.0
22.8	13.560000	-8	-0.6	+100.0	-100.0	99.4
21.6	13.560004	-4	-0.3	+100.0	-100.0	99.7
20.4	13.560008	0	0.0	+100.0	-100.0	100.0

Test Result: Test passed

8.10 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 4, section 3.2
Guide:	IC RSS-102 Issue 5, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
<input type="checkbox"/> detachable				
The conducted output power (CP in watts) is measured at the antenna connector: $CP = \dots\dots\dots \text{ W}$			<input type="checkbox"/>	
The effective isotropic radiated power (EIRP in watts) is calculated using <input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$ $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \text{ W}$		<input type="checkbox"/>	<input type="checkbox"/>	
<input type="checkbox"/> the field strength ⁹ in V/m: $FS = \dots\dots\dots \text{ V/m}$ $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \text{ W}$			<input type="checkbox"/>	
with: Distance between the antennas in m: $D = \dots\dots\dots \text{ m}$			<input type="checkbox"/>	
<input checked="" type="checkbox"/> not detachable				
A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by ⁹ : $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = 3.26 \mu\text{W}$				
with: Field strength in V/m: $FS = 988.55 \mu\text{V/m}$ Distance between the two antennas in m: $D = 10 \text{ m}$			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Selection of output power				
The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.): $TP = 3.26 \mu\text{W}$				

⁹ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.



Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
Separation distance between the user and the transmitting device is				
<input type="checkbox"/> less than or equal to 20 cm		<input checked="" type="checkbox"/>		
Transmitting device is				
<input type="checkbox"/> in the vicinity of the human head		<input type="checkbox"/>		
	<input type="checkbox"/> body-worn			



Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
RF exposure evaluation				
<p>RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:</p> <p><input checked="" type="checkbox"/> below 20 MHz¹⁰ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance).</p> <p><input type="checkbox"/> between 3 kHz and 10 MHz exposure limits apply as following:</p> <p><input type="checkbox"/> In a uncontrolled environment the basic restriction for the instantaneous internal electric field strength is equal to or less than $2.7 \cdot 10^{-4} f \text{ V/m}_{\text{rms}}$ at any part of the body where f is in Hz. The instantaneous RF field strength is equal or less than $83 \text{ V/m}_{\text{rms}}$ and equal or less than $90 \text{ A/m}_{\text{rms}}$.</p> <p><input type="checkbox"/> In a controlled environment the basic restriction for the instantaneous internal electric field strength is equal to or less than $1.35 \cdot 10^{-4} f \text{ V/m}_{\text{rms}}$ at any part of the body where f is in Hz. The instantaneous RF field strength is equal or less than $170 \text{ V/m}_{\text{rms}}$ and equal or less than $180 \text{ A/m}_{\text{rms}}$.</p> <p><input type="checkbox"/> at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4,49/f^{0.5} \text{ W}$ (adjusted for tune-up tolerance, where f is in MHz).</p> <p><input type="checkbox"/> at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance).</p> <p><input type="checkbox"/> at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \cdot 10^{-2} f^{0.6834} \text{ W}$ (adjusted for tune-up tolerance), where f is in MHz.</p> <p><input type="checkbox"/> at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).</p> <p>In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.</p>				
<p>Carrier frequency: $f = 13.56 \text{ MHz}$</p> <p>Transmitter output power: $TP = 3.26 \mu\text{W}$</p> <p>Limit: $TP_{\text{limit}} = 1000 \text{ mW}$</p>				<input checked="" type="checkbox"/>
<p><input type="checkbox"/> RF exposure evaluation is documented in test report no.</p>				

¹⁰ Transmitters operating between 3 kHz and 10 MHz, meeting the exemption from routine RF Exposure evaluation, shall demonstrate compliance to the instantaneous limits in IC RSS-102, issue 5, section 4.

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2015
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2015
<input type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	June 13, 2014 (published on June 20, 2014)
<input checked="" type="checkbox"/>	ANSI C63.10	American national Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June 27, 2013 (published on September 13, 2013)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 4 containing General Requirements for Compliance of Radio Apparatus, published by Industry Canada	November 2014
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 9 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	August 2016
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 3 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 5: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), published by Industry Canada	March 2015
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 6: Information Technology Equipment (Including Digital Apparatus) – Limits and methods of measurement, published by Industry Canada	January 2016
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
<input type="checkbox"/>	CAN/CSA CISPR 22-10	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	2010



TRC-43

Designation of Emissions, Class of Station and Nature of Service, published by Industry Canada

November 2012



10 Test Equipment List with Calibration Data

Type	Inv.-No.	Type Designation	Serial Number	Manufacturer	Calibration Organization	Last Calibration	Next Calibration
EMI test receiver	1028	ESHS10	860043/016	Rohde & Schwarz	Rohde & Schwarz	10/2016	10/2017
EMI test receiver	1711	ESPI7	836914/0002	Rohde & Schwarz	Rohde & Schwarz	05/2016	05/2017
EMI test receiver	2044	ESU8	100232	Rohde & Schwarz	Rohde & Schwarz	10/2016	10/2017
V-network	1059	ESH3-Z5	894785/005	Rohde & Schwarz	Rohde & Schwarz	08/2016	08/2019
Loop antenna	1016	HFH2-Z2	882964/0001	Rohde & Schwarz	Rohde & Schwarz	05/2016	05/2018
TRILOG Broadband Antenna	2058	VULB 9163	9163-408	Schwarzbeck	Rohde & Schwarz	06/2016	06/2018
TRILOG Broadband Antenna	2058	VULB 9163	9163-408	Schwarzbeck	Rohde & Schwarz	06/2016	06/2018
HornAntenna	2058	HF907	100154	Rohde&Schwarz	Rohde & Schwarz	06/2015	06/2017
Multimeter	1653	21 III	76530546	Fluke	ZMK	03/2016	03/2018
Temperature test chamber	1271	HT 4010	07065550	Heraeus	TÜV SÜD PS-EMC-STR	06/2015	12/2017
DC power supply	1267	NGSM 32/10	203	Rohde & Schwarz		see note 4	

Note 1: No calibration required.

Note 2: Not calibrated separately but with the whole test system when recording calibration data.

Note 3: No calibration required. Devices are checked before use.

Note 4: No calibration required. Devices are checked by calibrated equipment during test.



11 Measurement uncertainties

Radio Interference Emission Testing			
<i>Test</i>	<i>k_p</i>	<i>Expanded Uncertainty</i>	<i>Note</i>
Conducted Voltage Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
100 kHz to 200 MHz (50Ω/5μH AMN)	2	± 3.6 dB	1
Discontinuous Conducted Emission			
9 kHz to 150 kHz (50Ω/50μH AMN)	2	± 3.8 dB	1
150 kHz to 30 MHz (50Ω/50μH AMN)	2	± 3.4 dB	1
Conducted Current Emission			
9 kHz to 200 MHz	2	± 3.5 dB	1
Magnetic Fieldstrength			
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB	1
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB	1
Radiated Emission			
Test distance 1 m (ALSE)			
9 kHz to 150 kHz	2	± 4.6 dB	1
150 kHz to 30 MHz	2	± 4.1 dB	1
30 MHz to 200 MHz	2	± 5.2 dB	1
200 MHz to 2 GHz	2	± 4.4 dB	1
2 GHz to 3 GHz	2	± 4.6 dB	1
Test distance 3 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 5.0 dB	1
1 GHz to 6 GHz	2	± 4.6 dB	1
Test distance 10 m			
30 MHz to 300 MHz	2	± 4.9 dB	1
300 MHz to 1 GHz	2	± 4.9 dB	1
Radio Interference Power			
30 MHz to 300 MHz	2	± 3.5 dB	1

Note 1:

The expanded uncertainty reported according to CISPR 16-4-2:2003-11 is based on a standard uncertainty multiplied by a coverage factor of $k_p = 2$, providing a level of confidence of $p = 95.45\%$



12 Revision History

Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	2017-03-17	M. Steindl	First Edition
2	2017-03-20	M. Biberger	Second Edition: Type designation corrected, Measurement results above 1GHz added, horn antenna added to calibration data list, RSS-GEN 210 updated, Test setup photo above 1 GHz added.