



America

---

**Choose certainty.  
Add value.**

# Report On

Radio Testing of the  
KABA GmbH  
KABA 91 15 Remote Reader

FCC Part 15 Subpart C §15.225

**Report No. SD72119117-0816D**

**August 2016**



**REPORT ON** Radio Testing of the  
KABA GmbH  
Remote Reader

**TEST REPORT NUMBER** SD72119117-0816D

**REPORT DATE** August 2016

**PREPARED FOR** Mr. Markus Jäckle

**PREPARED BY**

A handwritten signature in blue ink, appearing to read 'Juan Manuel Gonzalez', written over a horizontal line.

Juan Manuel Gonzalez

**Name**

Title: EMC Service Line Manager Western region

**APPROVED BY**

A handwritten signature in black ink, appearing to read 'Chip R. Fleury', written over a horizontal line.

Chip R. Fleury

**Name**

Authorized Signatory

Title: Regional EMC manager

**DATED**

August 15, 2016



**Revision History**

SD72119117-0816D KABA GmbH KABA 91 15 Remote Reader					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
08/15/2016	Initial Release				Chip Fleury



## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT SUMMARY ..... 5</b>
1.1	Introduction ..... 6
1.2	Brief Summary Of Results ..... 7
1.3	Product Information ..... 8
1.4	Eut Test Configuration ..... 10
1.5	Deviations From The Standard ..... 11
1.6	Modification Record ..... 11
1.7	Test Methodology ..... 11
1.8	Test Facility Location ..... 11
1.9	Test Facility Registration ..... 11
<b>2</b>	<b>TEST DETAILS ..... 13</b>
2.1	Frequency Stability ..... 14
2.2	20 Db Bandwidth ..... 17
2.3	Emission Mask ..... 23
2.4	Spurious Radiated Emissions ..... 29
2.5	Conducted Emissions ..... 33
<b>3</b>	<b>TEST EQUIPMENT USED ..... 38</b>
3.1	Test Equipment Used ..... 39
3.2	Measurement Uncertainty ..... 40
<b>4</b>	<b>DIAGRAM OF TEST SETUP ..... 41</b>
4.1	Test Setup Diagram (Emission Mask) ..... 42
4.2	Test Setup Diagram (Radiated Emissions 30 To 1000mhz) ..... 43
4.3	Test Setup Diagram (Frequency Stability) ..... 44
4.4	Test Setup Diagram (Conducted Emissions) ..... 45
<b>5</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 46</b>
5.1	Accreditation, Disclaimers And Copyright ..... 47



## **SECTION 1**

### **1REPORT SUMMARY**

Radio Testing of the  
KABA 91 15  
KABA GmbH  
Remote Reader



## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the KABA GmbH Remote Reader to the requirements of FCC Part 15 Subpart C §15.225.

Objective	To perform Radio Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	KABA GmbH
Model Number(s)	KABA 91 15
FCC ID Number	NVI-KRR9115-K5
IC Number	11038A-KRR9115K5
Serial Number(s)	Engineering Sample
Number of Samples Tested	1
Test Specification/Issue/Date	<ul style="list-style-type: none"><li>FCC Part 15 Subpart C §15.225 (October 1, 2015).</li></ul>
Start of Test	August 03, 2016
Finish of Test	August 09, 2016
Name of Engineer(s)	Juan Manuel Gonzalez
Related Document(s)	-Frequency Stability data report # SD72119117-0816C -Supporting documents for EUT certification are separate exhibits.



## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC Part 15 Subpart C §15.225.

Section	FCC Part 15	§15.225 Spec Clause	Test Description	Result	Comments/Base Standard
	§15.31(e)		Voltage Requirement	Compliant	§15.225(e)
	§15.203 and 204		Antenna Requirements	Compliant	See Test Note
2.1		§15.225(e)	Frequency Tolerance	Compliant	Data from Model KABA 92 00.
2.2	§15.215(c)		20dB Bandwidth	Compliant	
2.3		§15.225(a)(b)(c)	Emission Mask	Compliant	
2.4	§15.209	§15.225(d)	Spurious Radiated Emissions	Compliant	
2.5		§15.207(a)	Conducted Emissions	Compliant	

Test Note: This requirement does not apply to intentional radiators that are professionally installed.

### 1.3 PRODUCT INFORMATION

#### 1.3.1 Technical Description

The Equipment Under Test (EUT) was a KABA GmbH Remote Reader KABA 91 15 as shown in the photograph below. The EUT has 2 antenna ports (for diversity communication) and at the time of the test 4 different antennas were evaluated:

- Kaba registration unit 90 00
- Kone registration unit 90 00
- Kone registration unit 90 01
- Kone registration unit 90 02




**Equipment Under Test**

Antenna: Kaba registration unit 90 00



Antenna: KONE registration unit 90 00

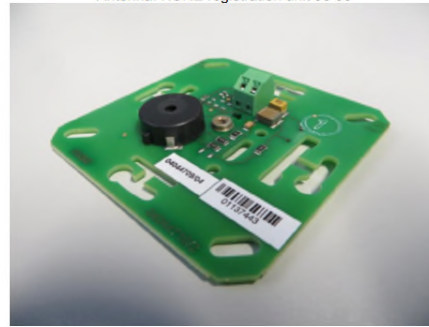

Antenna: Kaba registration unit 90 01 / KONE registration unit



Antenna: Kaba registration unit 90 02 / KONE registration unit



**Antennas**





### 1.3.2 EUT General Description

EUT Description	Remote Reader
Model Number(s)	KABA 91 15
Rated Voltage	10-34 VDC ( Nominal Voltage 24VDC)
EUT RFID Field Strength	<b>68.13 dB<math>\mu</math>V/m @ 3 meters</b>
Frequency Range	13.56 MHz in the 13.110 to 14.0101 MHz band
Number of Operating Frequencies	1
Modulation Used	ASK
Antenna(s) Dimension	Kaba 90 00: 4,0 cm x 4,0 cm Kone 90 00: 4,2 cm x 3,5 cm Kone 90 01: 7,5 cm x 7,5 cm Kaba 90 02: 7,5 cm x 7,5 cm

## 1.4 EUT TEST CONFIGURATION

### 1.4.1 Test Configuration Description

Test Configuration	Description
A	Antenna Kaba registration unit 90 00 connected to EUT.
B	Antenna Kone registration unit 90 00 connected to EUT.
C	Antenna Kone registration unit 90 01 connected to EUT.
D	Antenna Kone registration unit 90 02 connected to EUT.
E	Antenna ports terminated with 50 Ohms loads for Conducted emissions test.

### 1.4.2 EUT Exercise Software

None. No special software was used during evaluation. The EUT was transmitting continuously after start-up.

### 1.4.3 Support Equipment and I/O cables

Manufacturer	Equipment/Cable	Description
N/A	N/A	-

### 1.4.4 Simplified Test Configuration Diagrams





## 1.5 DEVIATIONS FROM THE STANDARD

All deviations made during testing from the applicable test standards or test plan are detailed under Section 1.2 of this test report.

## 1.6 MODIFICATION RECORD

Description of Modification	Modification Fitted By	Date Modification Fitted
Serial Number: Engineering Sample		
N/A		

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

## 1.7 TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 1.8 TEST FACILITY LOCATION

### 1.8.1 TÜV SÜD America Inc. (Mira Mesa)

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: 858 678 1400 FAX: 858-546 0364

### 1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)

Sony Electronics Inc., Building #8 16530 Via Esprillo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: 858 942 5542 FAX: 858-546 0364

## 1.9 TEST FACILITY REGISTRATION

### 1.9.1 FCC – Registration No.: US1146

TUV SUD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.498 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Registration is US1146.



**1.9.2 Industry Canada (IC) Registration No.: 3067A**

The Semi-anechoic chamber of TUV SUD America Inc. (San Diego) has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No. 3067A.

**1.9.3 BSMI – Laboratory Code: SL2-IN-E-028R (US0102)**

TUV Product Service Inc. (San Diego) is a recognized EMC testing laboratory by the BSMI under the MRA (Mutual Recognition Arrangement) with the United States. Accreditation includes CNS 13438 up to 6GHz.

**1.9.4 VCCI – Registration No. A-0132**

TUV SUD America Inc. (San Diego) is a VCCI registered measurement facility which includes radiated field strength measurement, radiated field strength measurement above 1GHz, mains port interference measurement and telecommunication port interference measurement.



## **SECTION 2**

### **2TEST DETAILS**

Radio Testing of the  
KABA 91 15  
KABA GmbH  
Remote Reader



## **2.1 FREQUENCY STABILITY**

### **2.1.1 Specification Reference**

Part 15 Subpart C §15.225(e)

### **2.1.2 Standard Applicable**

(e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### **2.1.3 Equipment Under Test and Modification State**

Serial No: Engineering Sample / Test was performed at Model KABA 9200 transmitting with antenna Kone registration unit 90 01. Report # SD72119117-0816C (Data representative for this model)

### **2.1.4 Date of Test/Initial of test personnel who performed the test**

August 4 , 2016 /JMG

### **2.1.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.6 Environmental Conditions/ Test Location**

Test performed at TÜV SÜD America Inc. Mira Mesa Laboratory

Ambient Temperature	24.2°C
Relative Humidity	45.9%
ATM Pressure	99.1 kPa

### **2.1.7 Additional Observations**

- The temperature was varied from  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  in 10 degree increments with a nominal voltage of 24VDC, then the voltage was changed from 10VDC to 34VDC (Max. and Min. rated voltage) maintaining a temperature of  $20^{\circ}\text{C}$ .



**2.1.8 Test Results**

RFID @ 13.56MHz					
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Frequency Deviation	Deviation (%)
100	24.0	-20	13.559879808	0.000120192	0.000886372
100		-10	13.559639423	0.000360577	0.002659122
100		0	13.559879808	0.000120192	0.000886372
100		+10	13.559639923	0.000360077	0.002655435
100		+20	13.559879808	0.000120192	0.000886372
100		+30	13.559879808	0.000120192	0.000886372
100		+40	13.559569802	0.000430198	0.003172552
100		+50	<b>13.559278846</b>	<b>0.000721154</b>	0.005318245
41.66		10.0	+20	13.559879808	0.000120192
62.5	15.0	+20	13.559399038	0.000600962	0.004431873
83.33	20.0	+20	13.559879808	0.000120192	0.000886372
100	24.0	+20	13.559879808	0.000120192	0.000886372
116.66	28.0	+20	13.559879808	0.000120192	0.000886372
133.33	32.0	+20	13.559879808	0.000120192	0.000886372
141.66	34.0	+20	13.559879808	0.000120192	0.000886372

**Maximum Deviation Allowed** = 0.001356MHz < 0.01% (13.558644MHz to 13.561356MHz)

**Maximum Deviation Recorded** = 0.000721154 (Complies)

### 2.1.9 Test Set Up Pictures







## **2.2 20 dB BANDWIDTH**

### **2.2.1 Specification Reference**

Part 15 Subpart C §15.215(c)

### **2.2.2 Standard Applicable**

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### **2.2.3 Equipment Under Test and Modification State**

Serial No: Engineering Sample / Test Configuration A,B,C & D.

### **2.2.4 Date of Test/Initial of test personnel who performed the test**

August 03, 2016 /JMG

### **2.2.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.2.6 Environmental Conditions/ Test Location**

Test performed at TÜV SÜD America Inc. Mira Mesa laboratory

Ambient Temperature	25.0°C
Relative Humidity	46.6%
ATM Pressure	99.0 kPa

### **2.2.7 Additional Observations**

- This is a Radiated test.
- Span is wide enough to capture the channel transmission.
- RBW is set to 1 kHz.
- VBW is 3X RBW.
- Sweep is auto.
- Detector is peak.




- The “n” dB down marker function of the spectrum analyzer was used for this test.

### 2.2.8 Test Results

Frequency	20dB bandwidth
13.56 MHz	5.61 kHz

KABA 90 00

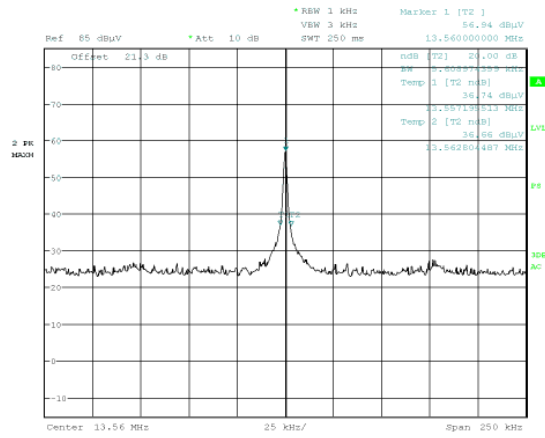


Measured 20dB Bandwidth: 5.61 kHz  
 Frequency Band: 13.110 to 14.010 MHz

$13.56 \text{ MHz} - (20\text{dB BW}/2) = 13.55439\text{MHz}$  (within the frequency band - **Compliant**)  
 $13.56 \text{ MHz} + (20\text{dB BW}/2) = 13.56561\text{MHz}$  (within the frequency band - **Compliant**)




KONE 90 00

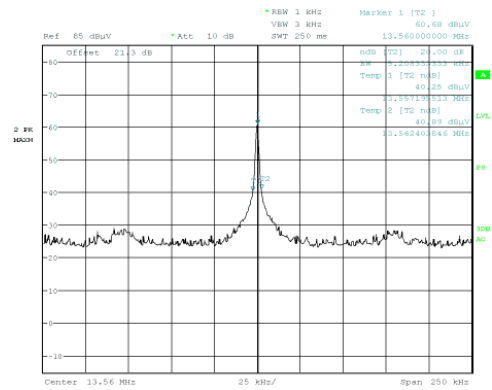

Measured 20dB Bandwidth: 5.21 kHz  
 Frequency Band: 13.110 to 14.010 MHz

$13.56 \text{ MHz} - (20\text{dB BW}/2) = 13.55479\text{MHz}$  (within the frequency band - **Compliant**)  
 $13.56 \text{ MHz} + (20\text{dB BW}/2) = 13.56521\text{MHz}$  (within the frequency band - **Compliant**)

KONE 90 01

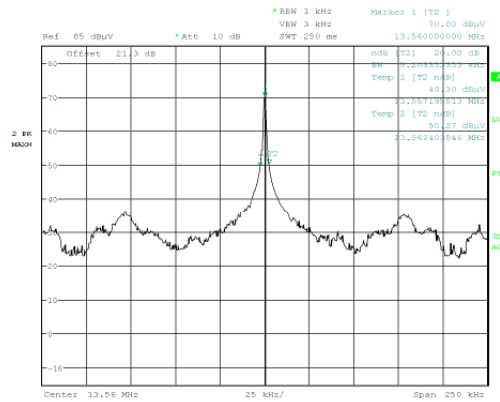


Measured 20dB Bandwidth: 5.21 kHz  
 Frequency Band: 13.110 to 14.010 MHz

$13.56 \text{ MHz} - (20\text{dB BW}/2) = 13.55479\text{MHz}$  (within the frequency band - **Compliant**)  
 $13.56 \text{ MHz} + (20\text{dB BW}/2) = 13.56521\text{MHz}$  (within the frequency band - **Compliant**)



KONE 90 02

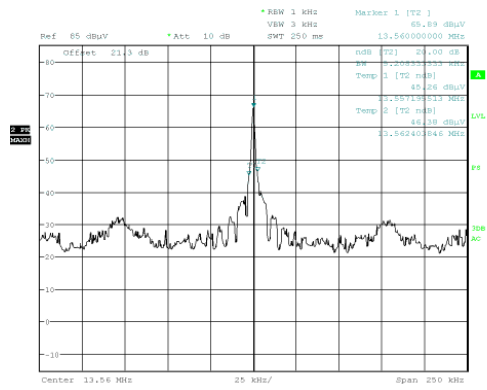


Measured 20dB Bandwidth: 5.21 kHz  
 Frequency Band: 13.110 to 14.010 MHz

$13.56 \text{ MHz} - (20\text{dB BW}/2) = 13.55479\text{MHz}$  (within the frequency band - **Compliant**)  
 $13.56 \text{ MHz} + (20\text{dB BW}/2) = 13.56521\text{MHz}$  (within the frequency band - **Compliant**)

## 2.2.9 Test Set up Pictures

Configuration A

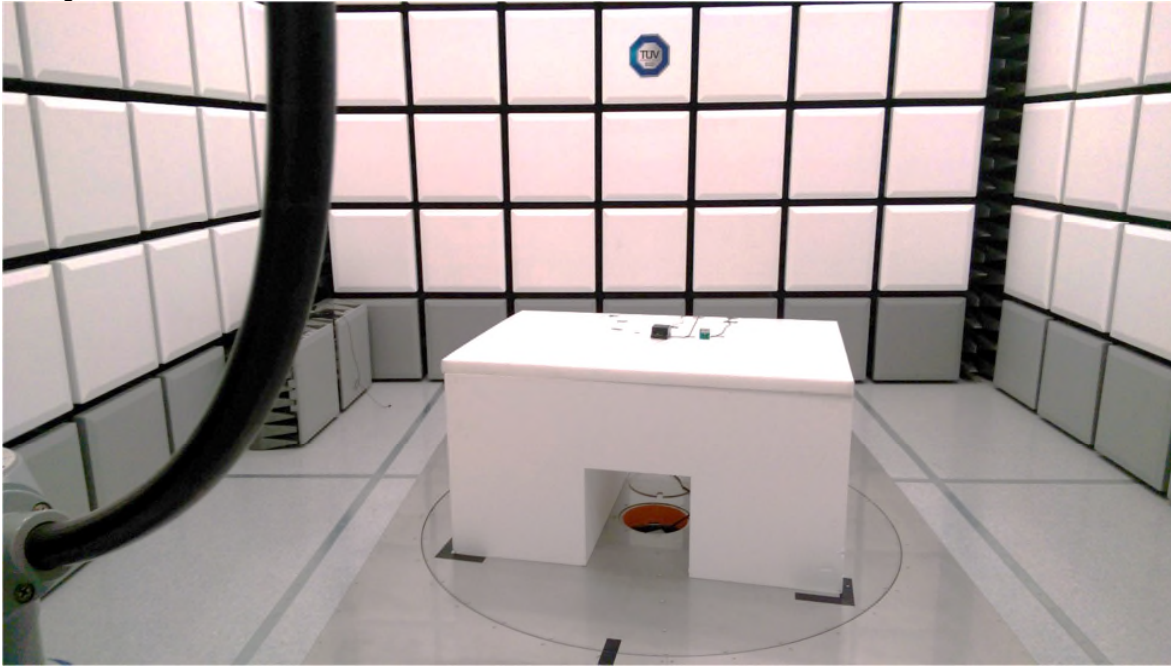

Configuration B






America

Configuration C



Configuration D

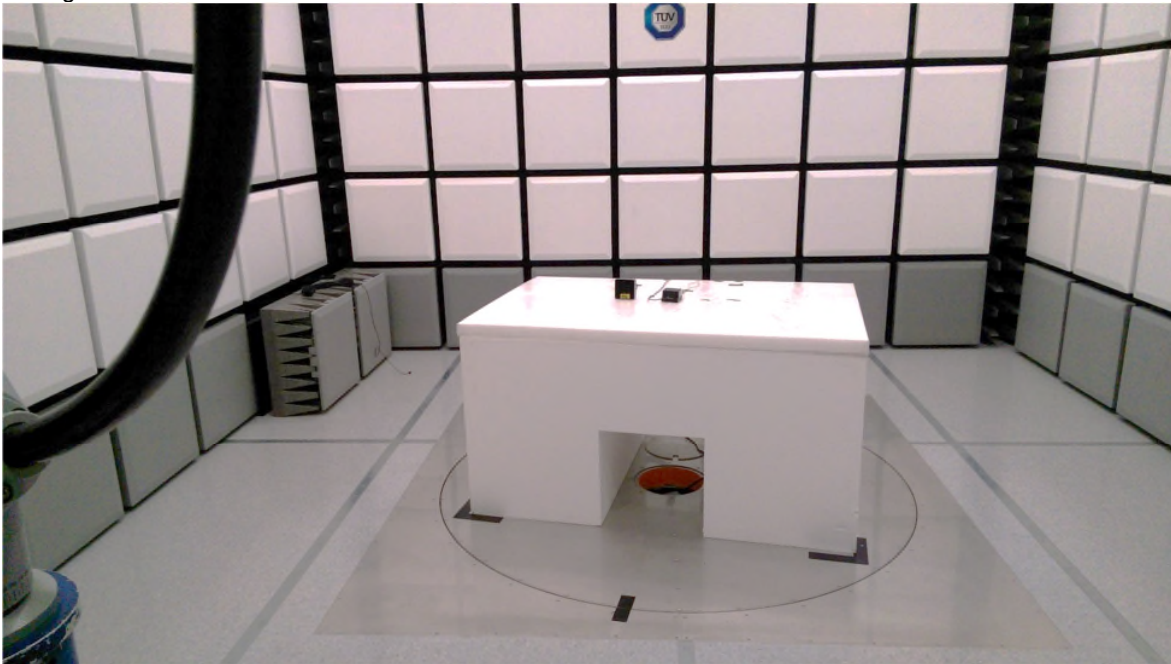



## **2.3 EMISSION MASK**

### **2.3.1 Specification Reference**

Part 15 Subpart C §15.225(a)(b)(c)

### **2.3.2 Standard Applicable**

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

### **2.3.3 Equipment Under Test and Modification State**

Serial No: Engineering Sample / Test Configuration A,B,C & D.

### **2.3.4 Date of Test/Initial of test personnel who performed the test**

August 03, 2016 /JMG

### **2.3.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.3.6 Environmental Conditions/ Test Location**

Test performed at TÜV SÜD America Inc. Mira Messa Laboratory

Ambient Temperature	25.0°C
Relative Humidity	46.6%
ATM Pressure	99.0 kPa

### **2.3.7 Additional Observations**

- This is a radiated test. The spectrum was searched from 9kHz to 30MHz. Only 13.110 MHz to 14.010 MHz presented. There are no significant emissions observed other than the fundamental frequency (13.56 MHz) measured at 3 meters.
- Limits were converted from 30 meters to 3 meters using worst case 20 dB/decade extrapolation rules. Measurement was focused on the RFID system and not the host.
- Measurement was done using EMC32 V9.26.0 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.3.1 for sample computation.



**2.3.1 Sample Computation (Radiated Emission)**

Measuring equipment raw measurement (db $\mu$ V) @ 13.56MHz		15.0
Correction Factor (dB)	Asset# 1026 (cable)	0.6
	Asset# 1057 3m (cable)	0.7
	Asset# 6628 (antenna)	19.9
	Asset# 1187(cable)	0.3
Reported QuasiPeak Final Measurement (db $\mu$ V/m) @ 30MHz		36.5

**2.3.2 Sample Computation (Limits)**

Limit @ 13.553–13.567 MHz:	= 15,848 $\mu$ V/m @30 meters
	= 20 log(15,848 $\mu$ V/m)
	= 84 dB $\mu$ V/m @30 meters
Using 20dB/decade extrapolation rule:	= 20 log (30m/3m)
Measuring distance correction factor:	= 20 dB
Calculated limit @ 3 meters:	= 84 dB $\mu$ V/m + 20 dB
	= 104 dB $\mu$ V/m

**2.3.3 Test Results**


See attached plots.






2.3.4 Prescan TEST MODE A,B,C & D


Test Configuration A

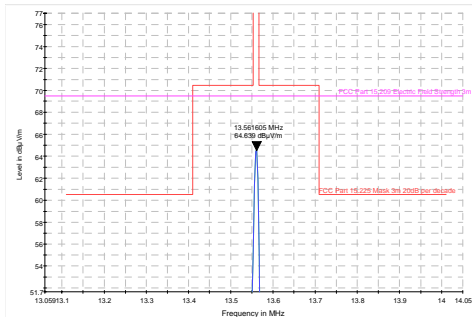


Test Configuration B

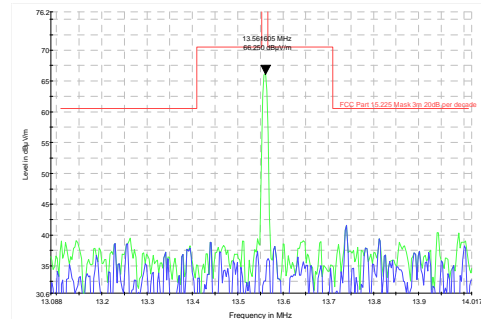

Test Configuration C

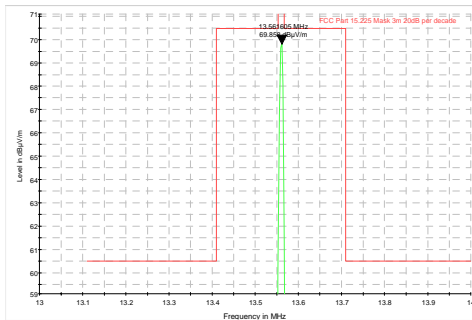


Test Configuration D

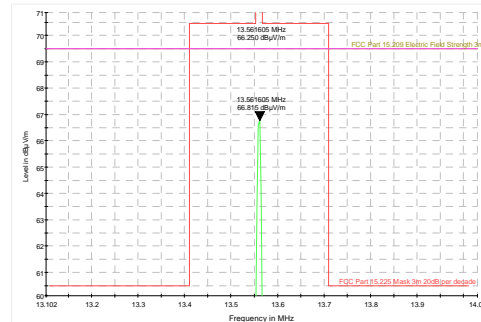



**2.3.5 Test Results TEST MODE C (Worst Case)**

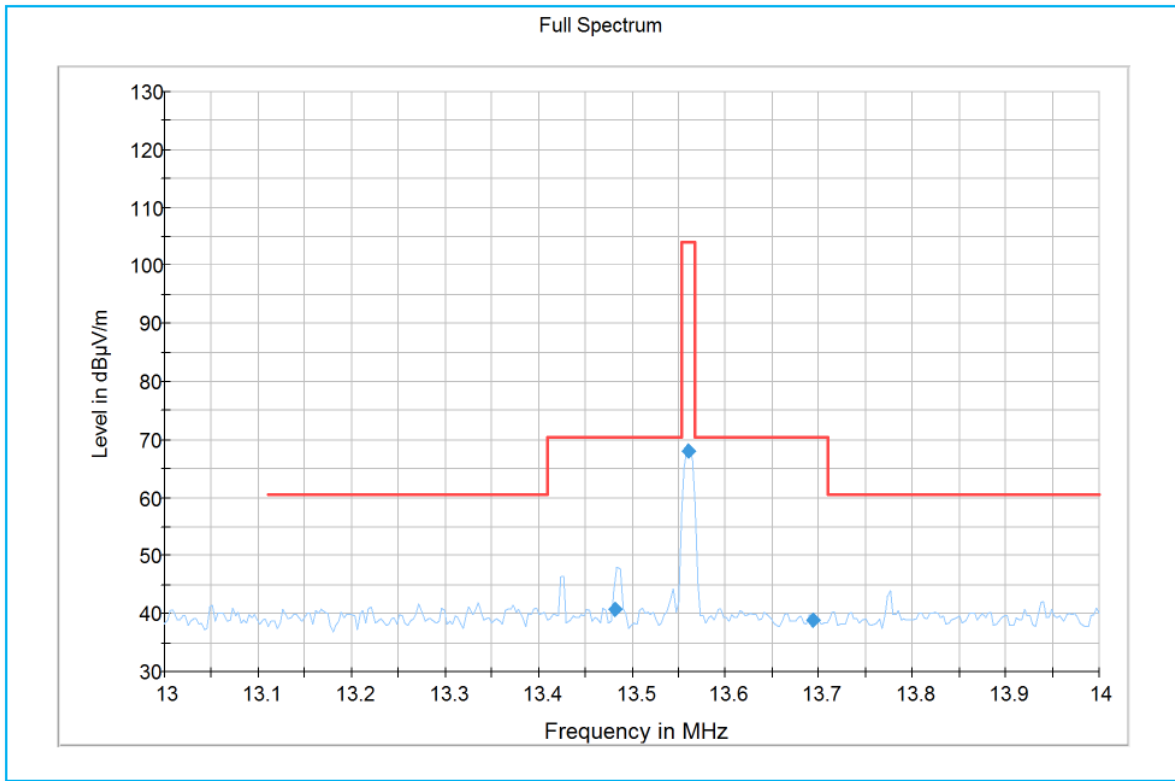

**Final Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)	Comment
13.481295	40.66	70.47	29.81	1000.0	9.000	H	-20.0	21.2	
13.559980	68.13	104.00	35.87	1000.0	9.000	H	-20.0	21.3	
13.693525	38.79	70.47	31.68	1000.0	9.000	H	302.0	21.3	

### 2.3.6 Test Set Up Pictures

Configuration A




Configuration B



Configuration C



Configuration D

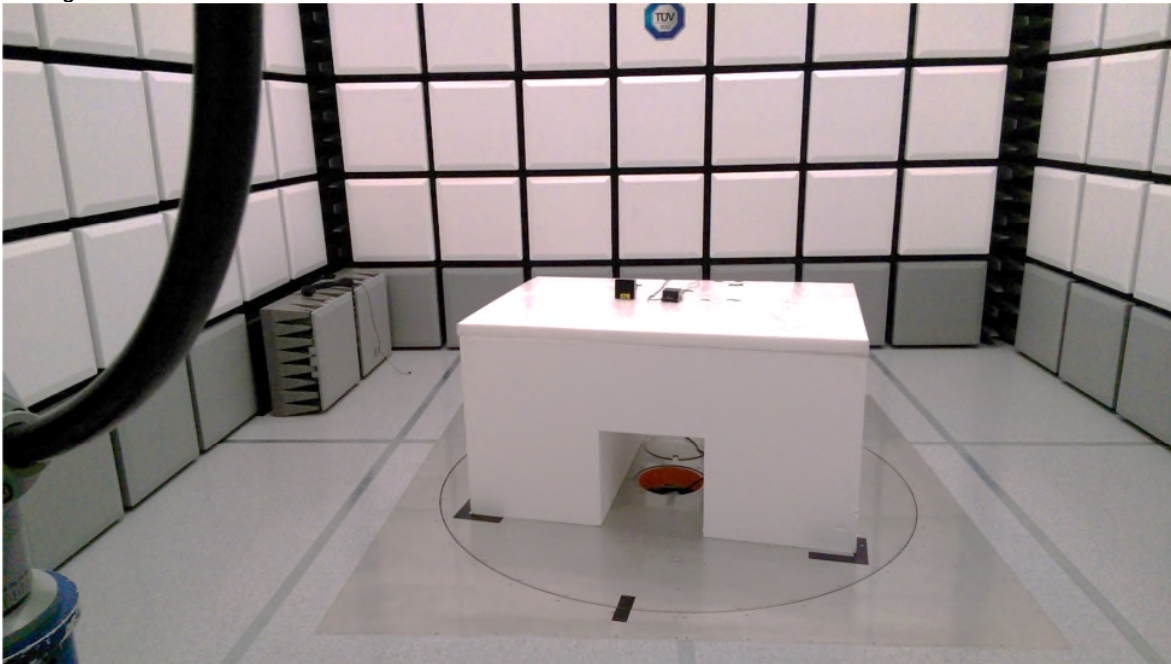



**2.4 SPURIOUS RADIATED EMISSIONS**

**2.4.1 Specification Reference**

Part 15 Subpart C §15.225(d)

**2.4.2 Standard Applicable**

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

**2.4.3 Equipment Under Test and Modification State**

Serial No: Engineering Sample / Test Configuration C (worst Case)

**2.4.4 Date of Test/Initial of test personnel who performed the test**

August 03-04, 2016 /JMG

**2.4.5 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

**2.4.6 Environmental Conditions/ Test Location**

Test performed at TÜV SÜD America Inc. Mira Mesa Laboratory

Ambient Temperature 25.0°C  
 Relative Humidity 46.6%  
 ATM Pressure 99.0 kPa

**2.4.7 Additional Observations**

- This is a radiated test. The spectrum was searched from 9KHz to 1GHz.
- Measurement was done using EMC32 V9.26.0 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.4.8 for sample computation.


**2.4.8 Sample Computation (Radiated Emission)**

Measuring equipment raw measurement (dbµV) @ 30 MHz			24.4
Correction Factor (dB)	Asset# 1066 (cable)	0.3	-12.6
	Asset# 1172 (cable)	0.3	
	Asset# 1016 (preamplifier)	-30.7	
	Asset# 1175(cable)	0.3	
	Asset# 1002 (antenna)	17.2	
Reported QuasiPeak Final Measurement (dbµV/m) @ 30MHz			11.8

**2.4.9 Test Results**

See attached plots.


**2.4.10 Test Results 9KHz-30 MHz Test mode C (Worst case)**

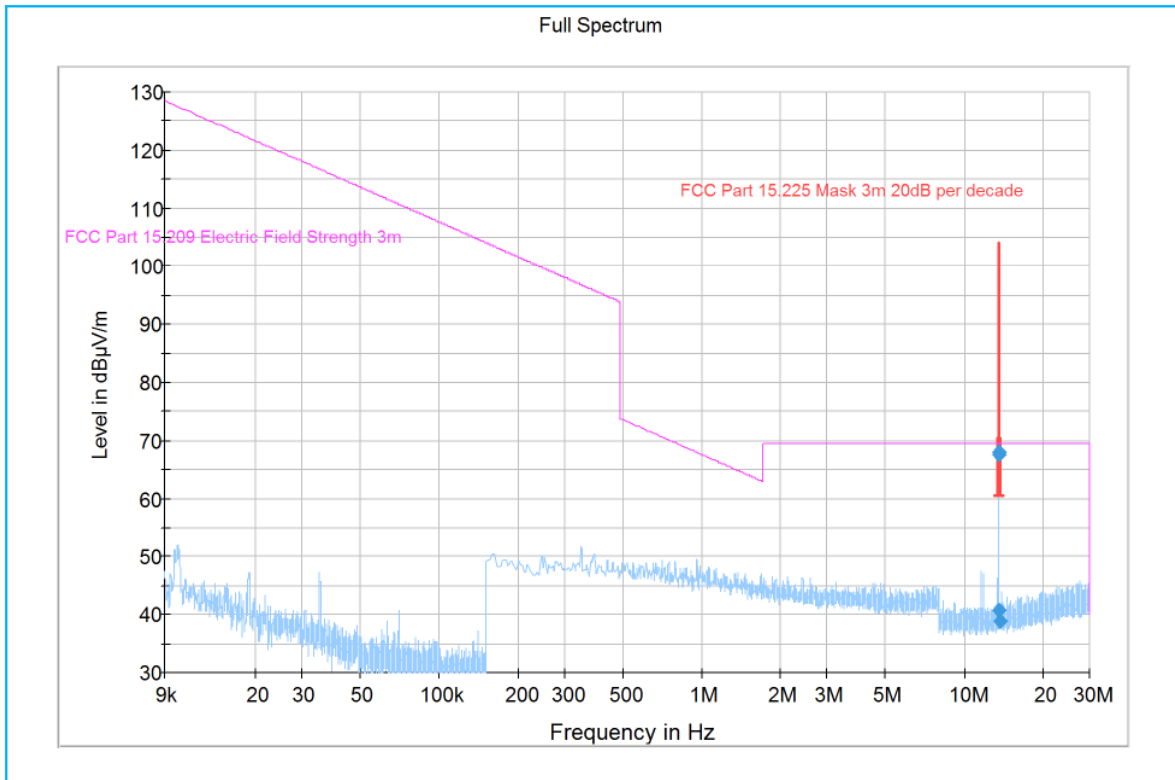

**Final\_Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Pol	Azimuth (deg)	Corr. (dB)	Comment
13.481295	40.66	70.47	29.81	1000.0	9.000	H	-20.0	21.2	
13.558605	67.58	104.00	36.42	1000.0	9.000	H	-17.0	21.3	
13.559980	68.13	104.00	35.87	1000.0	9.000	H	-20.0	21.3	
13.693525	38.79	70.47	31.68	1000.0	9.000	H	302.0	21.3	

**2.4.11 Test Results 30MHz-1GHz Test mode C (Worst case)**

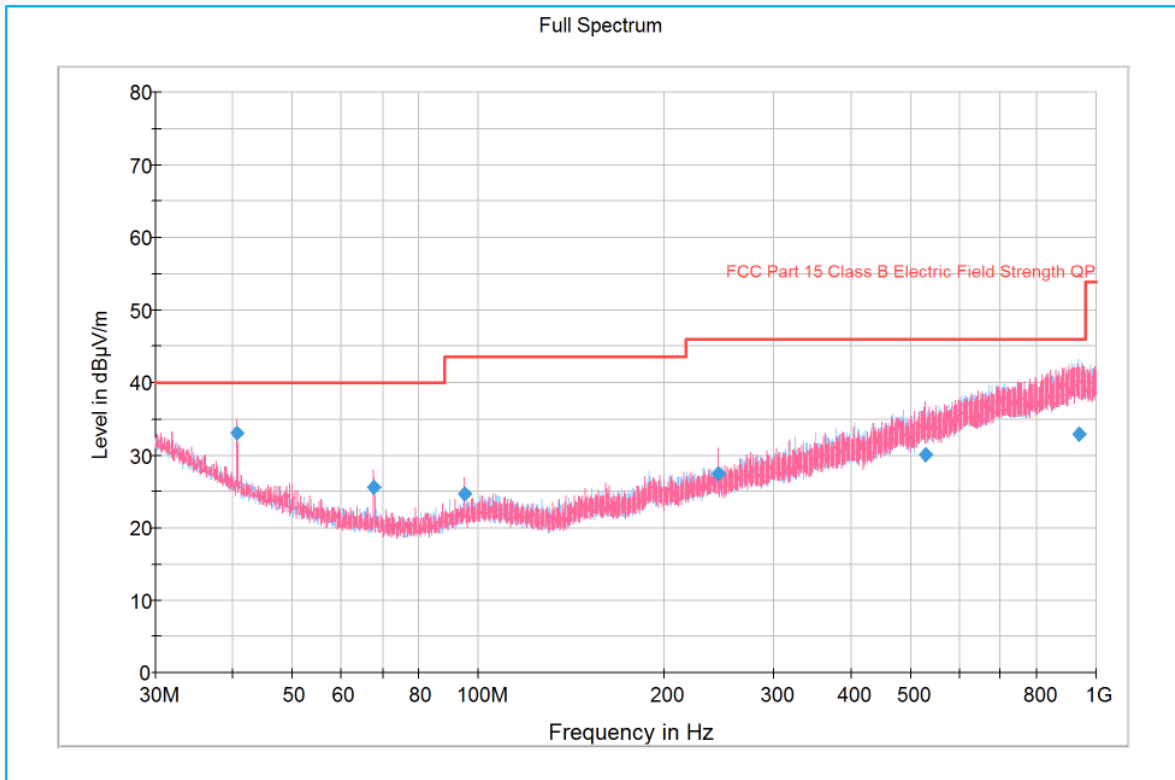

**Final Result**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Comment
40.677667	33.04	40.00	6.96	1000.0	120.000	99.5	V	208.0	19.1	
67.797667	25.65	40.00	14.35	1000.0	120.000	169.8	V	26.0	13.9	
94.925333	24.75	43.50	18.75	1000.0	120.000	102.6	V	273.0	15.5	
244.079000	27.50	46.00	18.50	1000.0	120.000	139.0	V	135.0	20.1	
528.820667	30.16	46.00	15.84	1000.0	120.000	105.3	V	124.0	27.8	
938.229000	32.84	46.00	13.16	1000.0	120.000	350.3	H	193.0	33.5	

#### 2.4.12 Test Set Up Pictures

Configuration C (9KHz-30MHz)



Configuration C (30MHz-1GHz)







## 2.5 CONDUCTED EMISSIONS

### 2.5.1 Specification Reference

Part 15 Subpart C §15.207(a)

### 2.5.2 Standard Applicable

An intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*\*Decreases with the logarithm of the frequency.*

### 2.5.3 Equipment Under Test and Modification State

Serial No: Engineering Sample / Test Configuration E

### 2.5.4 Date of Test/Initial of test personnel who performed the test

August 09, 2016 /JMG

### 2.5.5 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.5.6 Environmental Conditions/ Test Location

Test performed at TÜV SÜD America Inc. Rancho Bernardo facility

Ambient Temperature	24.1°C
Relative Humidity	44.6%
ATM Pressure	99.0 kPa

### 2.5.7 Additional Observations

- The RFID module was configured as per specification.



- The antenna was replaced by a 50Ω load for this test
- Measurement was done using EMC32 V8.53 automated software. Reported level is the actual level with all the correction factors factored in. Correction Factor column is for informational purposes only. See Section 2.5.8 for sample computation.


**2.5.8 Sample Computation (Conducted Emission – Quasi Peak)**

Measuring equipment raw measurement (dbμV) @ 150kHz		5.5
Correction Factor (dB)	Asset# 8607 (20 dB attenuator)	19.9
	Asset# 1177 (cable)	0.15
	Asset# 1176 (cable)	0.35
	Asset# 7568 (LISN)	0.30
<b>Reported QuasiPeak Final Measurement (dbμV) @ 150kHz</b>		<b>26.2</b>

**2.5.9 Test Results**

Compliant. See attached plots and tables.

**2.5.10 Line 1 (With Antenna port Terminated)**

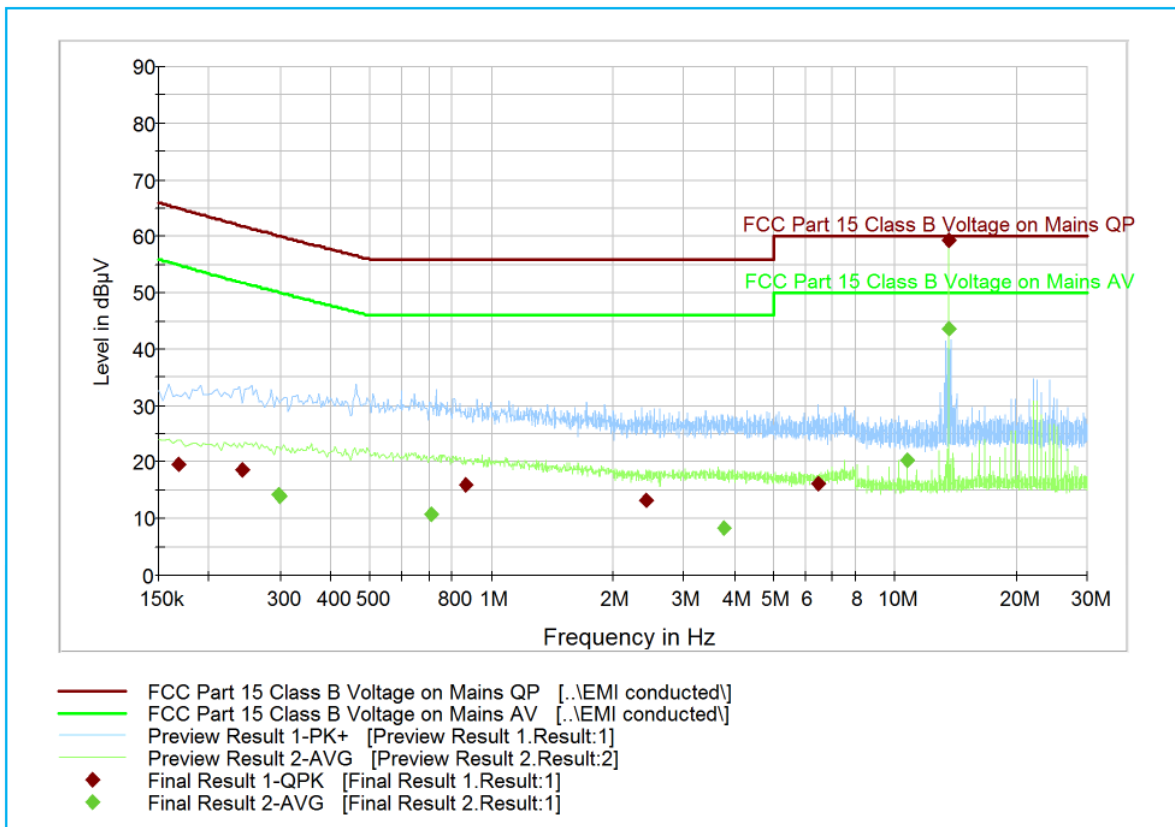


**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)	Comment
0.168000	19.5	1000.0	9.000	Off	L1	20.3	45.5	65.0	
0.241500	18.6	1000.0	9.000	Off	L1	20.2	43.2	61.8	
0.863500	16.0	1000.0	9.000	Off	L1	20.1	40.0	56.0	
2.424500	13.3	1000.0	9.000	Off	L1	20.1	42.7	56.0	
6.447500	16.2	1000.0	9.000	Off	L1	20.1	43.8	60.0	
13.558000	59.4	1000.0	9.000	Off	L1	20.4	<b>0.6</b>	60.0	

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV)	Comment
0.296000	14.1	1000.0	9.000	Off	L1	20.2	36.0	50.1	
0.299500	14.1	1000.0	9.000	Off	L1	20.2	35.9	50.0	
0.707500	10.8	1000.0	9.000	Off	L1	20.1	35.2	46.0	
3.763500	8.3	1000.0	9.000	Off	L1	20.1	37.7	46.0	
10.746000	20.4	1000.0	9.000	Off	L1	20.2	29.6	50.0	
13.558000	43.7	1000.0	9.000	Off	L1	20.4	6.3	50.0	

**2.5.11 Line 2 (With Antenna port Terminated)**

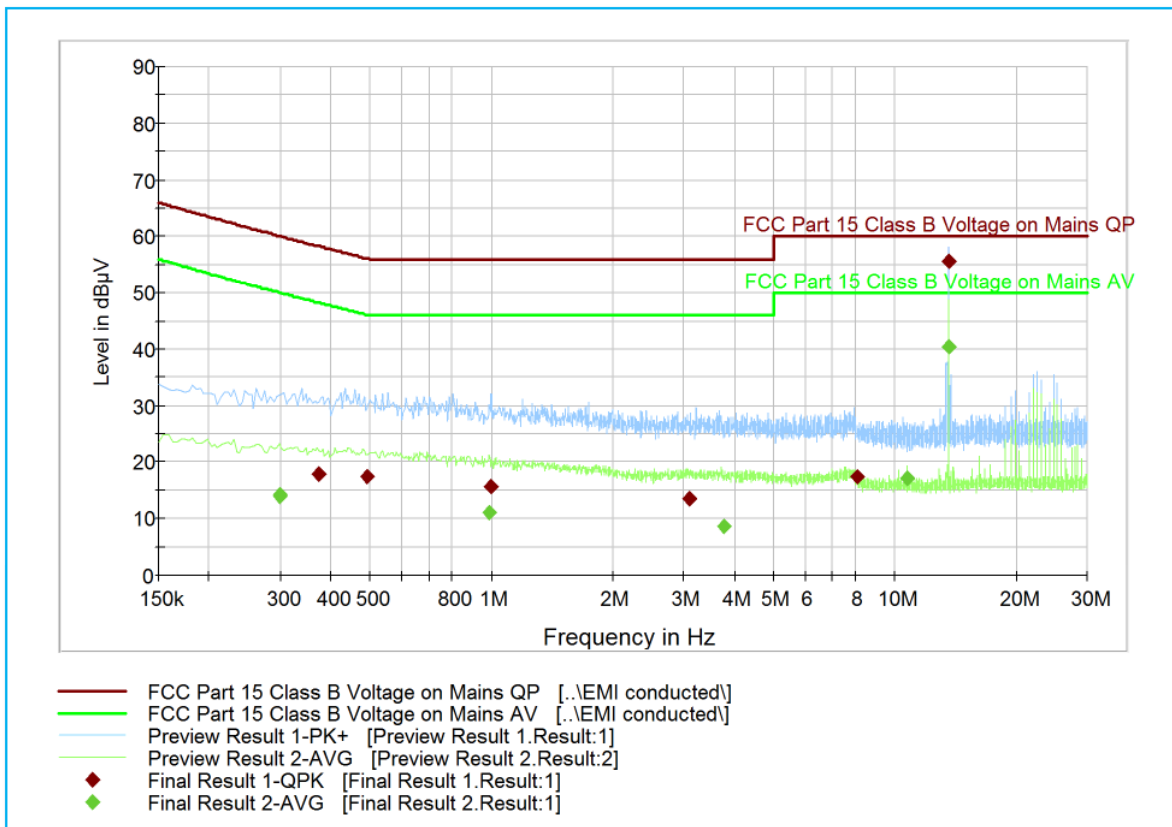


**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.374000	17.9	1000.0	9.000	Off	N	20.1	40.4	58.3	
0.491000	17.4	1000.0	9.000	Off	N	20.1	38.7	56.1	
0.998000	15.8	1000.0	9.000	Off	N	20.1	40.2	56.0	
3.091000	13.5	1000.0	9.000	Off	N	20.1	42.5	56.0	
8.064000	17.5	1000.0	9.000	Off	N	20.1	42.5	60.0	
13.558000	55.7	1000.0	9.000	Off	N	20.4	4.3	60.0	

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.299000	14.2	1000.0	9.000	Off	N	20.2	35.9	50.0	
0.299500	14.0	1000.0	9.000	Off	N	20.2	36.0	50.0	
0.990000	11.1	1000.0	9.000	Off	N	20.1	34.9	46.0	
3.763500	8.7	1000.0	9.000	Off	N	20.1	37.3	46.0	
10.750000	17.2	1000.0	9.000	Off	N	20.2	32.8	50.0	
13.558500	40.4	1000.0	9.000	Off	N	20.4	9.6	50.0	

2.5.12 Test Set up Pictures (Antenna ports terminated with 50 Ohm Loads)

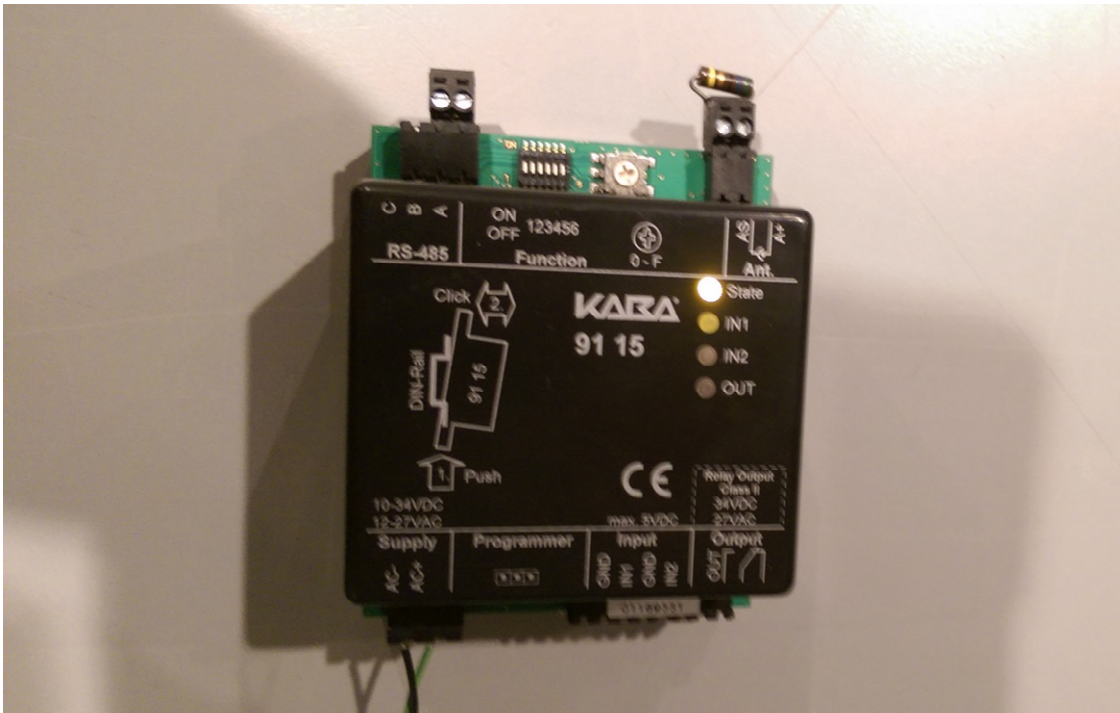



### **SECTION 3**

#### **3 TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

ID Number (SDGE/SDRB)	Test Equipment	Type	Serial Number	Manufacturer	Cal Date	Cal Due Date
<b>Radiated Test Setup</b>						
1002	Bilog Antenna	3142C	00058717	ETS-Lindgren	11/06/15	11/06/17
7620	EMI Test Receiver	ESU	100399	Rhode & Schwarz	08/24/15	08/24/16
6628	Loop Antrenna	HFH2-Z2	880.458/25	Rhode & Schwarz	10/28/15	10/28/16
<b>Frequency Stability</b>						
6610	Temperature chamber	SH-27C	9963481-S1074	Rhode & Schwarz	01/20/16	01/20/17
<b>Conducted Test Setup</b>						
7620	EMI Test Receiver	ESU	100399	Rhode & Schwarz	08/24/15	08/24/16
6836	LISN	FCC-LISN-50-25-2	5024	FCC	4/29/16	04/29/17
<b>Miscellaneous</b>						
-	Test Software	EMC32	V9.26.0	Rhode & Schwarz		N/A
-	Test Software	EMC32	V8.5.3	Rhode & Schwarz		N/A
6455	DC Power Supply	E3611A	2529	HP		N/A



### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:

#### 3.2.1 Conducted Emissions (AC) Measurements

Contribution		Probability Distribution Type	Probability Distribution $x_i$	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1	Receiver/Spectrum Analyzer	Rectangular	0.36	0.21	0.04
2	Cables	Rectangular	0.50	0.29	0.08
3	LISN	Rectangular	0.66	0.38	0.15
4	Attenuator	Rectangular	0.30	0.17	0.03
5	EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty ( $u_c$ ):					0.80
Coverage Factor (k):					2
Expanded Uncertainty:					1.59

#### 3.2.2 Radiated Emission Measurements (Below 1GHz)

Contribution		Probability Distribution Type	Probability Distribution $x_i$	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1	Receiver/Spectrum Analyzer	Rectangular	0.45	0.26	0.07
2	Cables	Rectangular	0.50	0.29	0.08
3	Preamp	Rectangular	0.50	0.29	0.08
4	Antenna	Rectangular	0.75	0.43	0.19
5	Site	Rectangular	3.55	2.05	4.20
6	EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty ( $u_c$ ):					2.23
Coverage Factor (k):					2
Expanded Uncertainty:					4.45

#### 3.2.3 Radiated Emission Measurements (Above 1GHz)

Contribution		Probability Distribution Type	Probability Distribution $x_i$	Standard Uncertainty $u(x_i)$	$[u(x_i)]^2$
1	Receiver/Spectrum Analyzer	Rectangular	0.57	0.33	0.11
2	Cables	Rectangular	0.70	0.40	0.16
3	Preamp	Rectangular	0.50	0.29	0.08
4	Antenna	Rectangular	0.37	0.21	0.05
5	Site	Rectangular	3.55	2.05	4.20
6	EUT Setup	Rectangular	1.00	0.58	0.33
Combined Uncertainty ( $u_c$ ):					2.22
Coverage Factor (k):					2
Expanded Uncertainty:					4.44







## SECTION 4

### 4DIAGRAM OF TEST SETUP


#### 4.1 TEST SETUP DIAGRAM (EMISSION MASK)

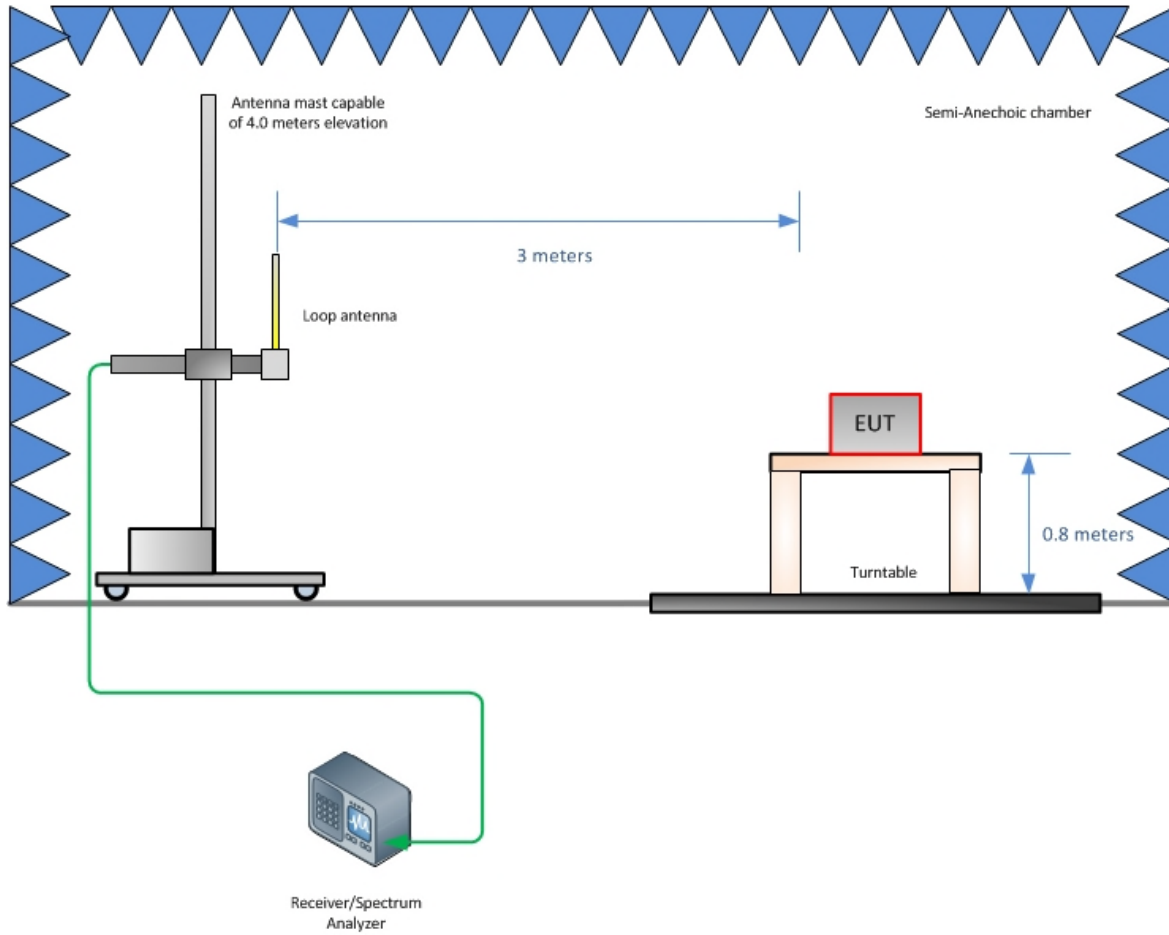

#### 4.2 TEST SETUP DIAGRAM (RADIATED EMISSIONS 30 TO 100MHZ)

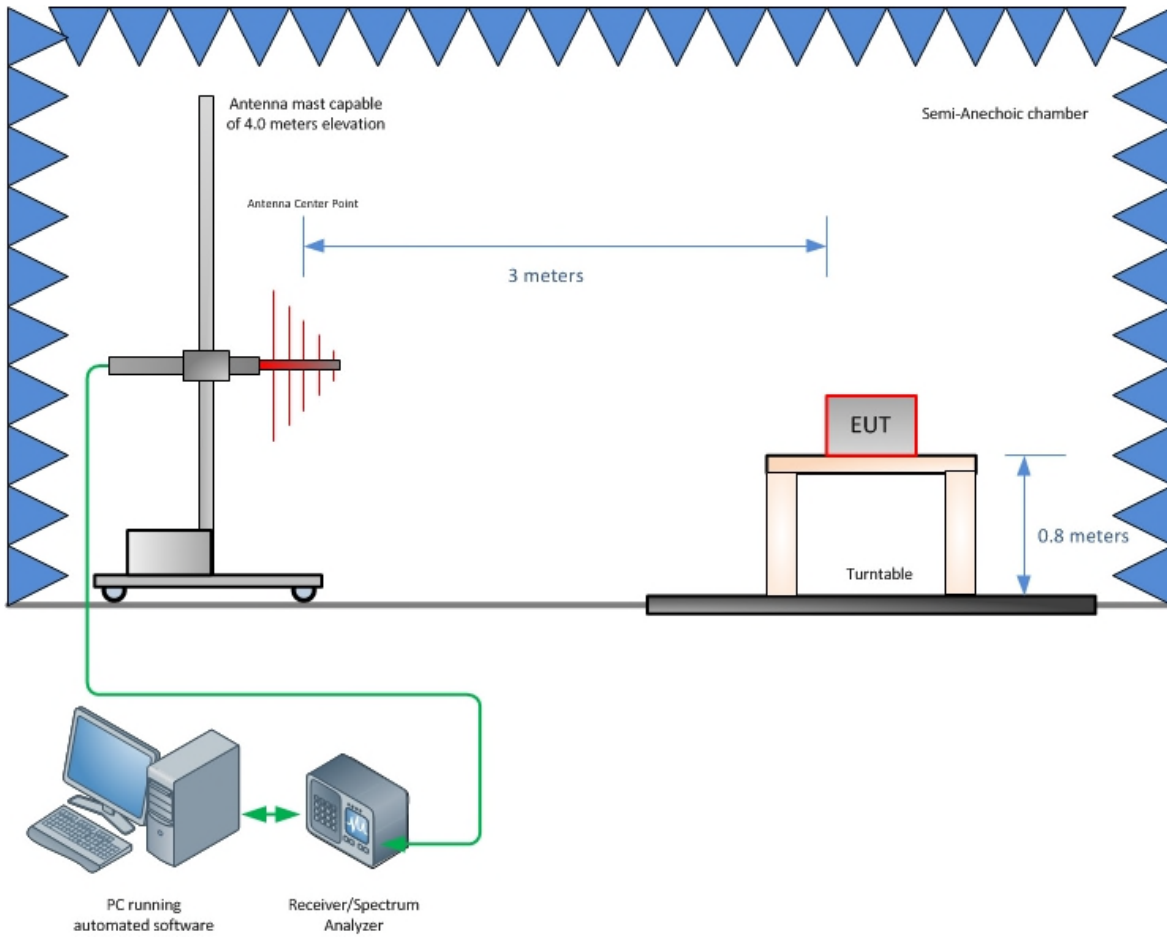


#### 4.3 TEST SETUP DIAGRAM (FREQUENCY STABILITY)

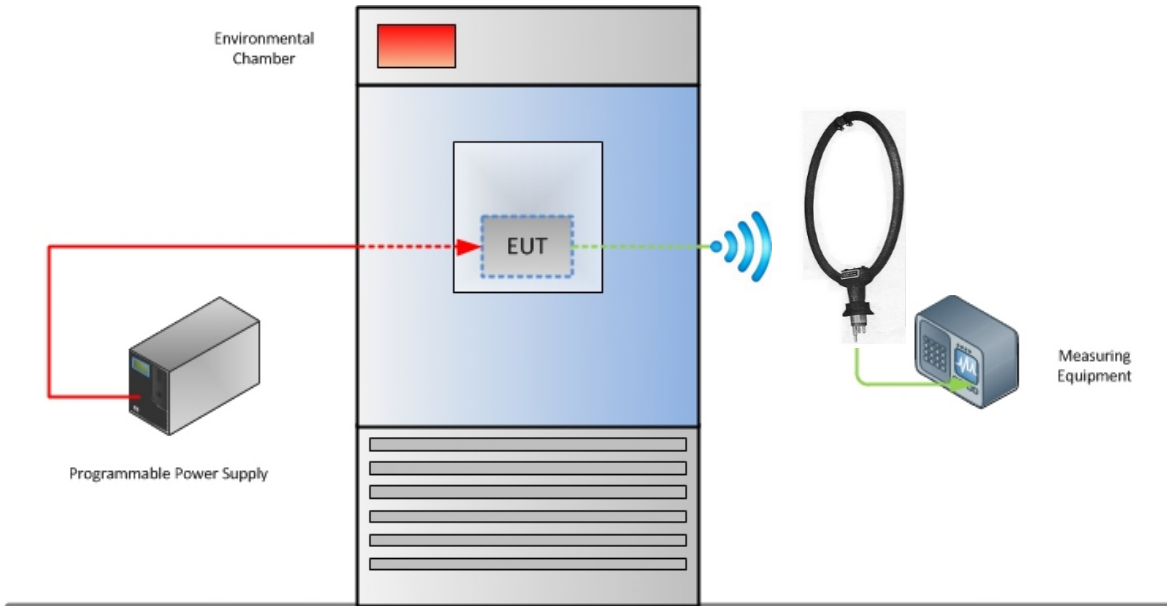

**Frequency Stability Test Configuration**

#### 4.4 TEST SETUP DIAGRAM (CONDUCTED EMISSIONS)

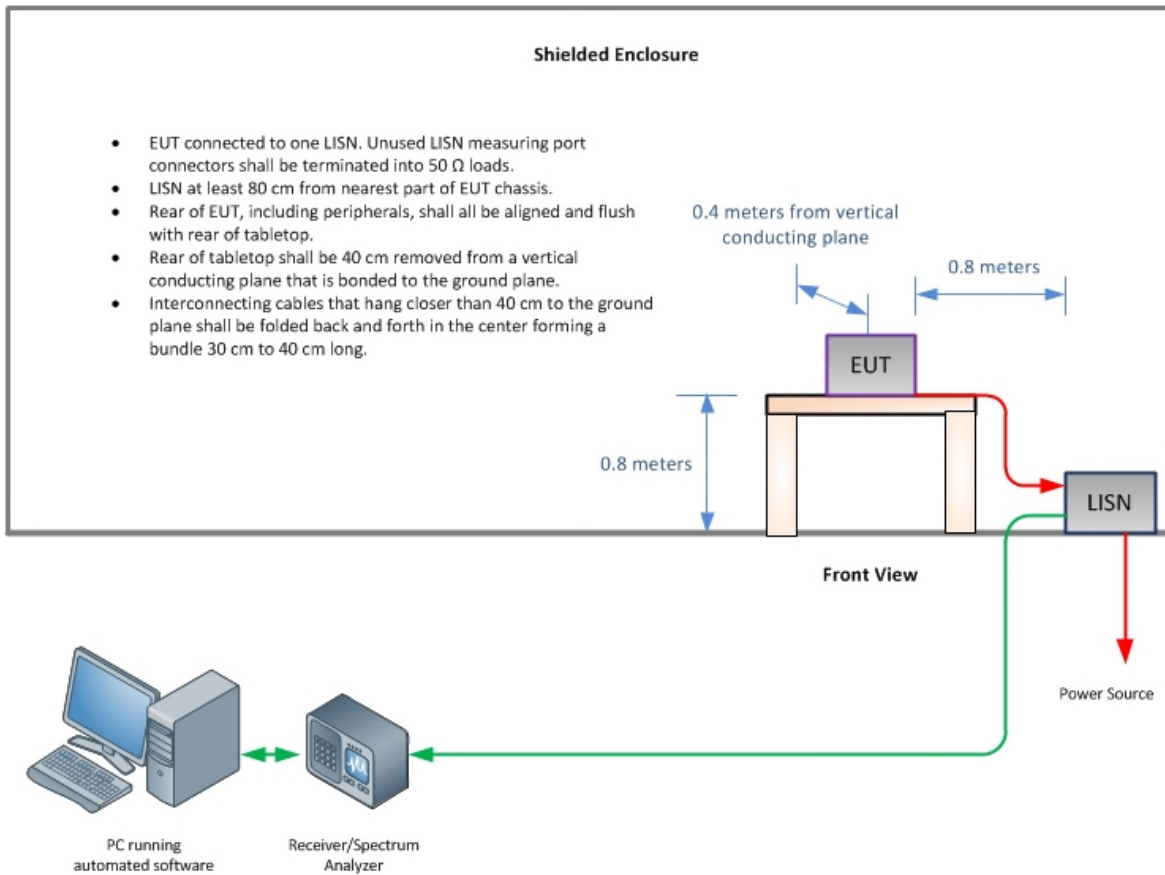



## SECTION 5

### 5 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



## 5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.



A2LA Cert. No. 2955.13

