



REPORT No.: SZ17070027W14

FCC RF TEST REPORT

APPLICANT : dormakaba EAD GmbH
PRODUCT NAME : data collection terminal
MODEL NAME : 9600-K6 HID 3G
TRADE NAME : Terminal 96 00
BRAND NAME : dormakaba
FCC ID : NVI-KT9600K6H3G
STANDARD(S) : 47 CFR Part 22 Subpart H
47 CFR Part 24 Subpart E
ISSUE DATE : 2017-09-30

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555

[Http://www.morlab.com](http://www.morlab.com)

Fax: 86-755-36698525

E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION.....4

1. GENERAL INFORMATION.....5

1.1 EUT DESCRIPTION.....5

1.2 TEST STANDARDS AND RESULTS6

1.3 TEST ENVIRONMENT CONDITIONS.....7

2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS.....8

2.1 CONDUCTED RF OUTPUT POWER8

2.1.1 REQUIREMENT.....8

2.1.2 TEST DESCRIPTION8

2.1.3 TEST RESULTS9

2.2 PEAK TO AVERAGE RADIO17

2.2.1 DEFINITION 17

2.2.2 TEST DESCRIPTION 17

2.2.3 TEST VERDICT..... 17

2.3 99% OCCUPIED BANDWIDTH.....23

2.3.1 DEFINITION 23

2.3.2 TEST DESCRIPTION 23

2.3.3 TEST VERDICT..... 23

2.4 FREQUENCY STABILITY40

2.4.1 REQUIREMENT..... 40

2.4.2 TEST DESCRIPTION 40

2.4.3 TEST VERDICT..... 41

2.5 CONDUCTED OUT OF BAND EMISSIONS46

2.5.1 REQUIREMENT..... 46

2.5.2 TEST DESCRIPTION 46

2.5.3 TEST RESULT..... 46

2.6 BAND EDGE78

2.6.1 REQUIREMENT..... 78

2.6.2 TEST DESCRIPTION 78

2.6.3 TEST RESULT..... 78

2.7 TRANSMITTER RADIATED POWER (EIRP/ERP)89



2.7.1 REQUIREMENT..... 89

2.7.2 TEST DESCRIPTION 89

2.7.3 TEST RESULT..... 90

2.8 RADIATED OUT OF BAND EMISSIONS98

2.8.1 REQUIREMENT..... 98

2.8.2 TEST DESCRIPTION 98

2.8.3 TEST RESULT..... 98

ANNEX A GENERAL INFORMATION.....130

Change History		
Issue	Date	Reason for change
1.0	2017-09-30	First edition

**TEST REPORT DECLARATION**

Applicant	dormakaba EAD GmbH
Applicant Address	Albertistr. 3, 78056 Villingen-Schwenningen, Germany
Manufacturer	In-Tech Electronics Ltd
Manufacturer Address	Unit A,13/F, Wing Tai Centre,12 Hing Yip Street, Kwun Tong Kowloon, Hong Kong
Product Name	data collection terminal
Model Name	9600-K6 HID 3G
Brand Name	dormakaba
HW Version	02
SW Version	V5
Test Standards	47 CFR Part 22 Subpart H 47 CFR Part 24 Subpart E
Test Date	2017-09-01 to 2017-09-21
Test Result	PASS

Tested by : Tu Ya'nan
Tu Ya'nan (Test Engineer)

Approved by : Andy Yeh
Andy Yeh (Technical Director)



1. GENERAL INFORMATION

1.1 EUT Description

Product Name	data collection terminal
Serial No.	(n.a, marked #1 by test site)
Frequency Range	GSM 850MHz: Tx: 824.20 - 848.80MHz (at intervals of 200kHz); Rx: 869.20 - 893.80MHz (at intervals of 200kHz) GSM 1900MHz: Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz); Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz) WCDMA 850MHz Tx: 826.4 - 846.6MHz (at intervals of 200kHz); Rx: 871.4 - 891.6MHz (at intervals of 200kHz) WCDMA 1900MHz Tx: 1852.4 - 1907.6MHz (at intervals of 200kHz); Rx: 1932.4 - 1987.6MHz (at intervals of 200kHz)
Modulation Type.....	GPRS Mode with GMSK Modulation EDGE Mode with 8PSK Modulation HSDPA Mode with QPSK Modulation HSUPA Mode with QPSK Modulation HSPA+ Mode with QPSK Modulation
Multislot Class.....	GPRS: Multislot Class12; EGPRS: Multislot Class12
Antenna Type	PCB Antenna
Emission Designators	GPRS 850:247KGXW,GPRS 1900:250KGXW EGPRS850:249KG7W, EGPRS1900:246KG7W, WCDMA 850:4M15F9W ,WCDMA1900:4M17F9W

Note 1: The transmitter (Tx) frequency arrangement of the Cellular 850MHz band used by the EUT can be represented with the formula $F(n)=824.2+0.2*(n-128)$, $128 \leq n \leq 251$; the lowest, middle, highest channel numbers (ARFCHs) used and tested in this report are separately 128 (824.2MHz), 190 (836.6MHz) and 251 (848.8MHz).

Note 2: The transmitter (Tx) frequency arrangement of the PCS 1900MHz band used by the EUT can be represented with the formula $F(n)=1850.2+0.2*(n-512)$, $512 \leq n \leq 810$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

Note 3: The transmitter (Tx) frequency arrangement of the WCDMA 850MHz band used by the EUT can be represented with the formula $F(n)=826.4+0.2*(n-4132)$, $4132 \leq n \leq 4233$; the



lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4175(835MHz) and 4233 (846.6MHz).

Note 4: The transmitter (Tx) frequency arrangement of the WCDMA 1900MHz band used by the EUT can be represented with the formula $F(n)=1852.4+0.2*(n-9262)$, $9262 \leq n \leq 9538$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

Note 5: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-12 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-12 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-12 Edition)	Personal Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.1046	Conducted RF Output Power	PASS
2.	24.232(d)	Peak to average radio	PASS
3	2.1049,22.917, 24.238,	99% Occupied Bandwidth	PASS
4	2.1055,22.355, 24.235	Frequency Stability	PASS
5	2.1051,2.1057, 22.917, 24.238,	Conducted Out of Band Emissions	PASS
6	2.1051, 2.1057, 22.917, 24.238	Band Edge	PASS
7	22.913, 24.232	Transmitter Radiated Power (EIPR/ERP)	PASS
8	2.1053, 2.1057, 22.917, 24.238	Radiated Out of Band Emissions	PASS

NOTE: Measurement method according to TIA/EIA 603.D-2010



1.3 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS


2.1 Conducted RF Output Power

2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Test Description

Test Setup:

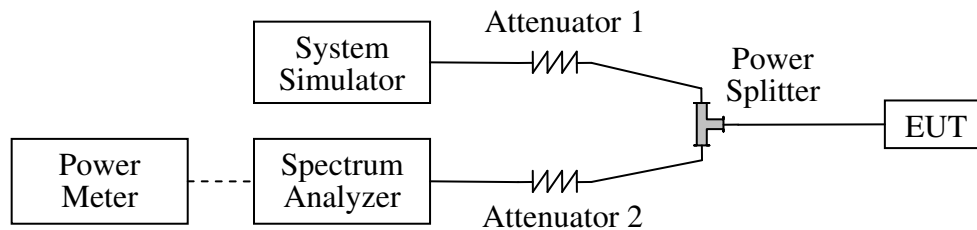

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

The Power Meter was just used for the Conducted RF Output Power test of WCDMA Model.



2.1.3 Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

GSM Model Test Verdict:

Band	Channel	Frequency (MHz)	Measured Output Power	Limit	Verdict
			dBm	dBm	
GPRS 850MHz	128	824.2	32.51	35	PASS
	190	836.6	32.75		PASS
	251	848.8	32.89		PASS
GPRS 1900MHz	512	1850.2	29.33	32	PASS
	661	1880.0	29.26		PASS
	810	1909.8	28.97		PASS
EGPRS 850MHz	128	824.2	29.39	35	PASS
	190	836.6	29.36		PASS
	251	848.8	29.54		PASS
EGPRS 1900MHz	512	1850.2	28.36	32	PASS
	661	1880.0	28.44		PASS
	810	1909.8	28.21		PASS

Note 1: For the GPRS and EGPRS model, all the slots were tested and just the worst data was record in this report.




WCDMA Model Test Verdict:


Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
HSDPA	1	23.37	23.50	23.12	22.74	22.70	22.76
	2	23.36	23.58	23.16	22.71	22.74	22.71
	3	23.37	23.53	23.18	22.79	22.76	22.73
	4	22.87	23.00	22.62	22.24	22.2	22.26
HSUPA	1	23.45	24.07	23.89	23.27	22.93	23.25
	2	21.45	22.07	21.89	21.27	20.93	21.25
	3	22.45	23.07	22.89	22.27	21.93	22.25
	4	21.25	21.87	21.69	21.07	20.73	21.05
	5	23.41	23.91	23.86	23.26	23.01	23.21
HSPA+	1	23.08	23.63	24.05	22.98	22.72	22.72

Note: The Conducted RF Output Power test of WCDMA /HSDPA /HSUPA /HSPA+ was tested by power meter.


GSM Model Test Plots:

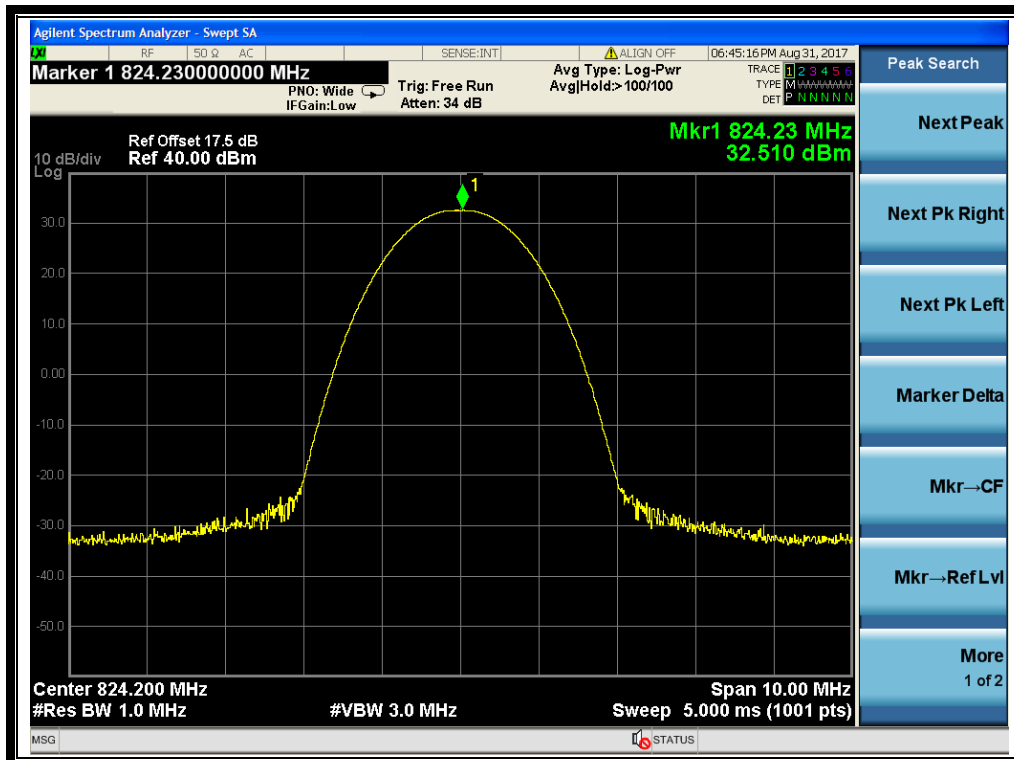


(GPRS 850MHz Channel = 128)

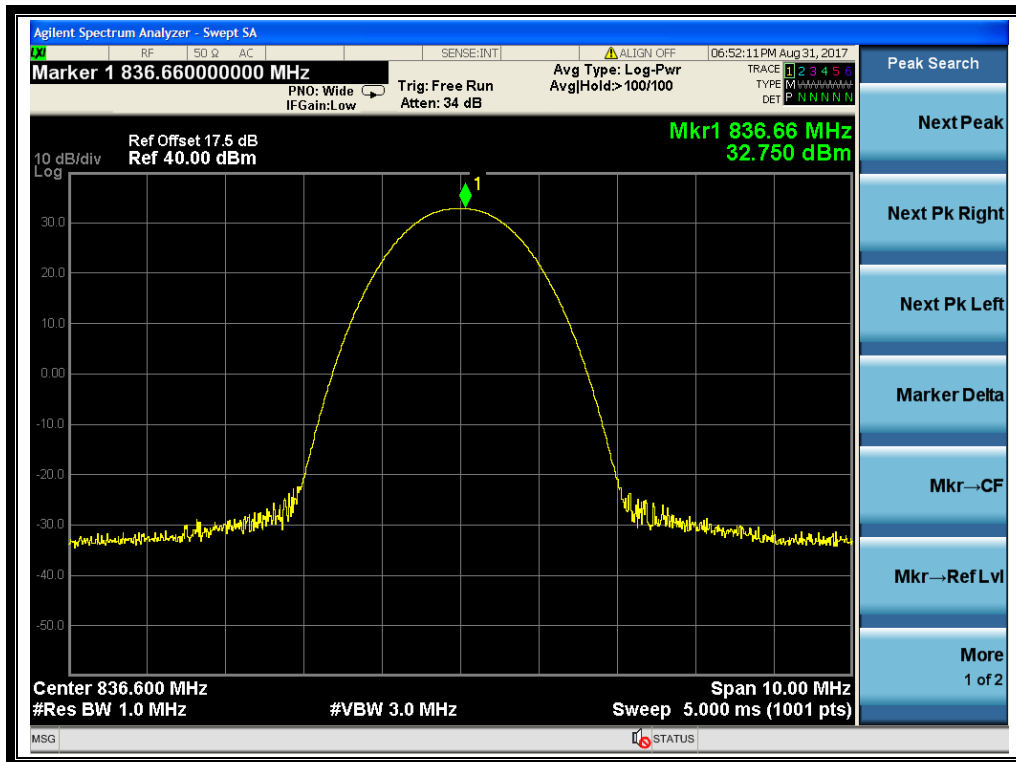


(GPRS 850MHz Channel = 190)

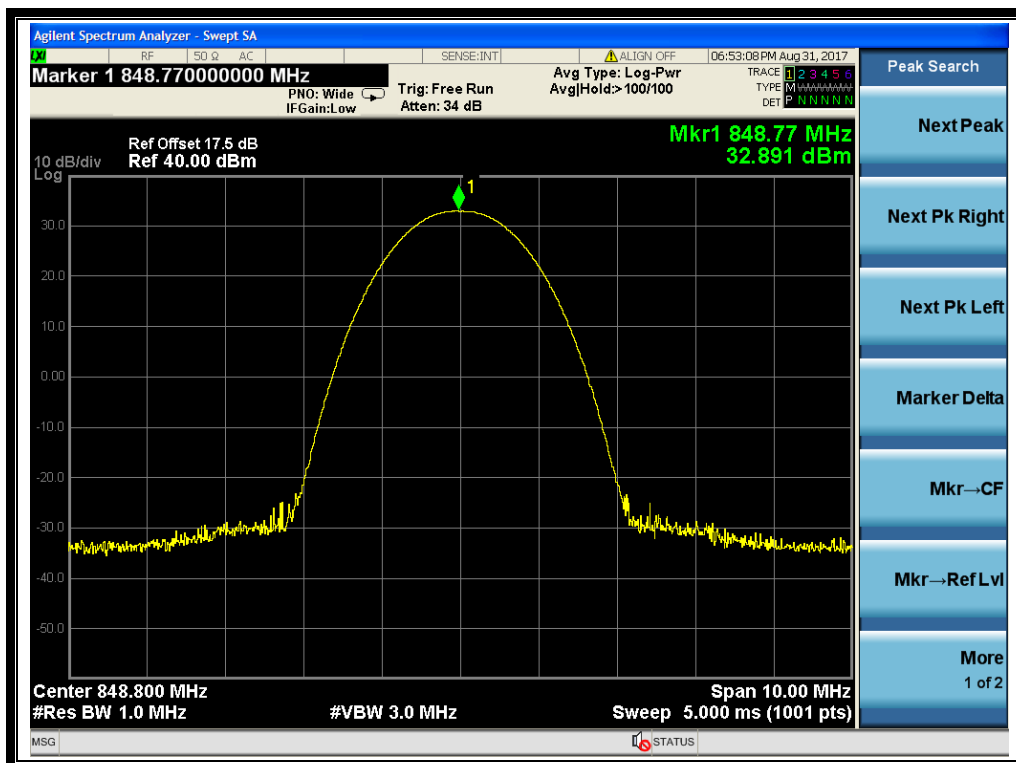


(GPRS 850MHz Channel = 251)

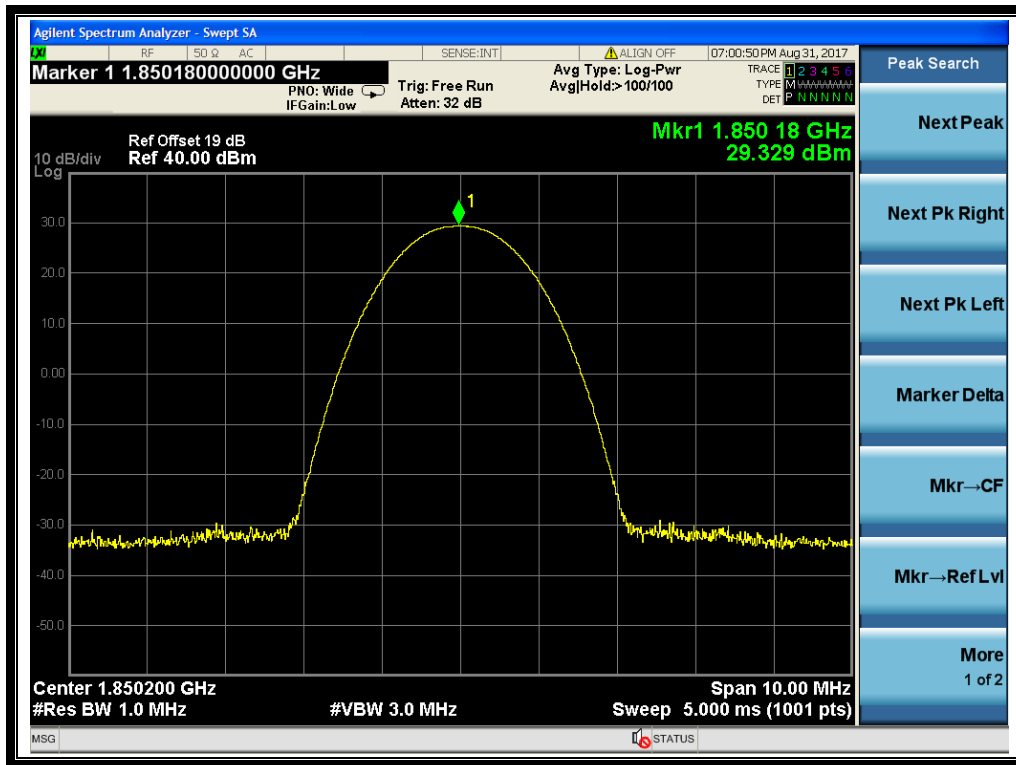


(GPRS 1900MHz Channel = 512)

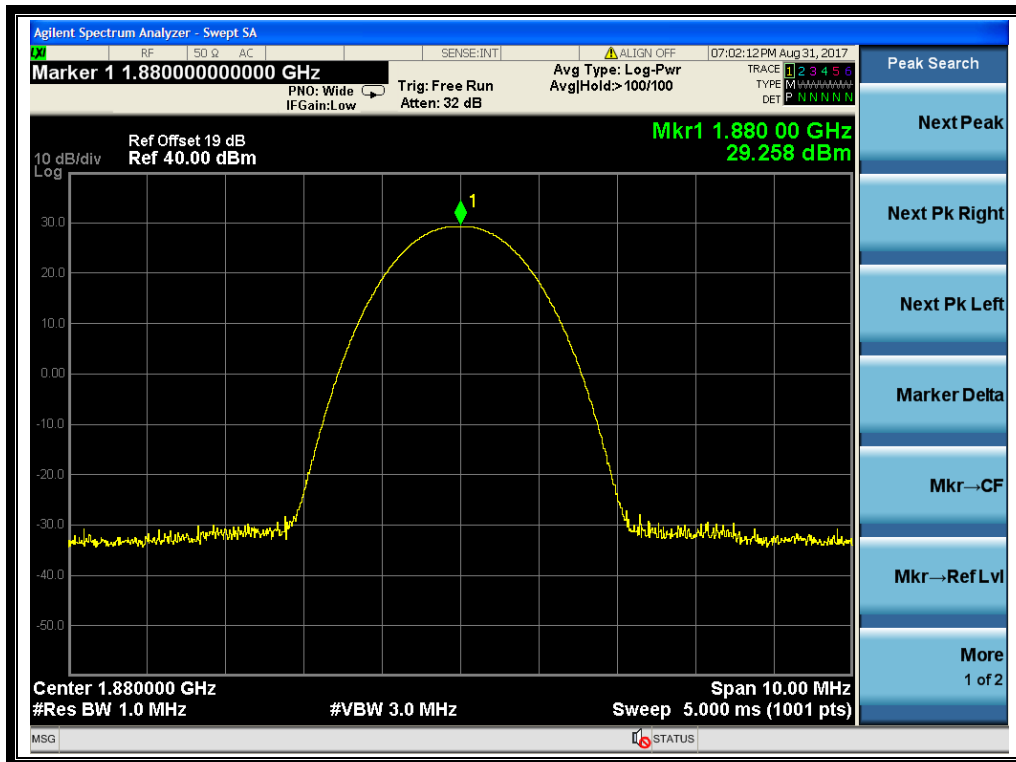


(GPRS 1900MHz Channel = 661)

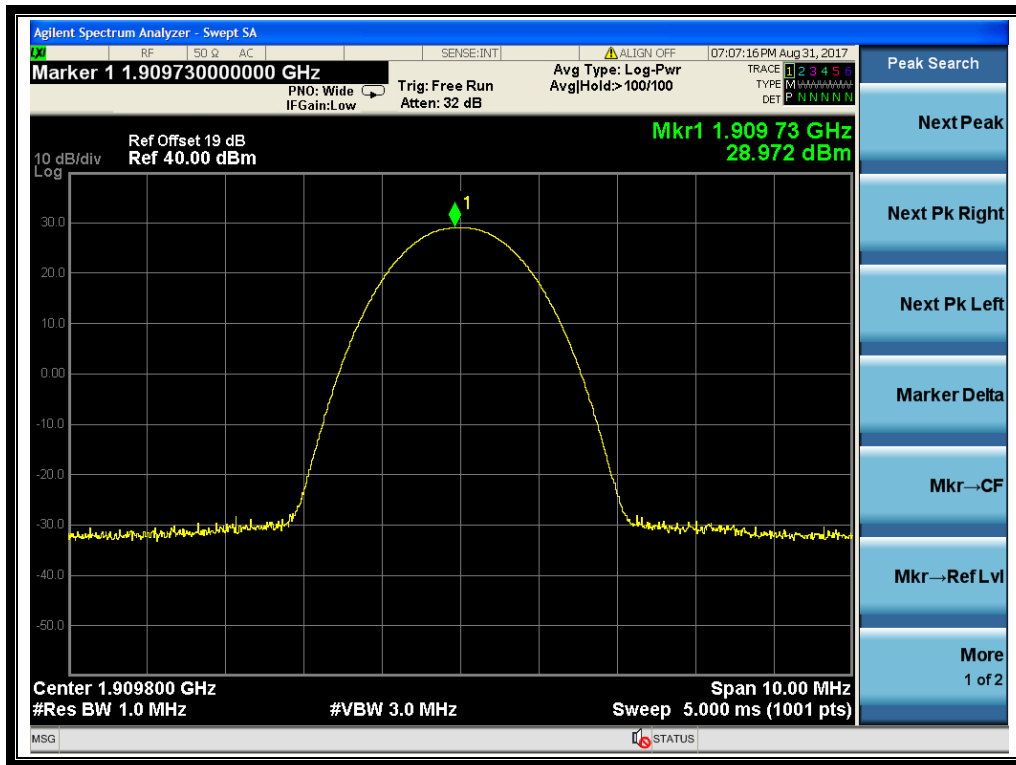


(GPRS 1900Hz Channel = 810)

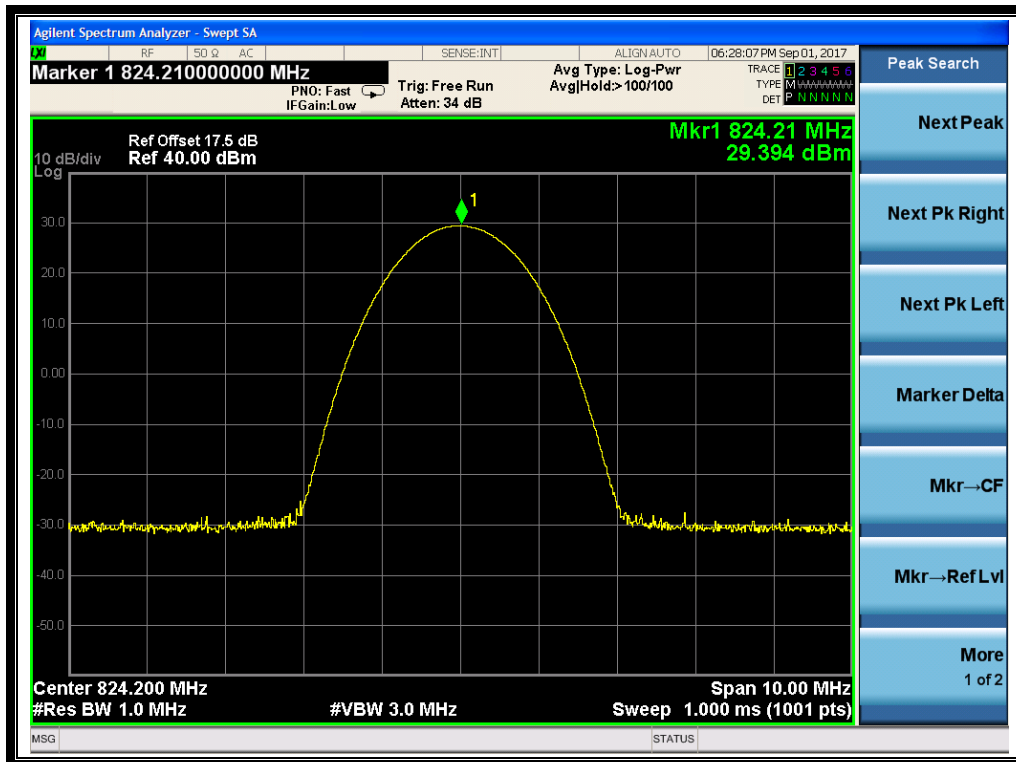


(EGPRS 850MHz Channel = 128)

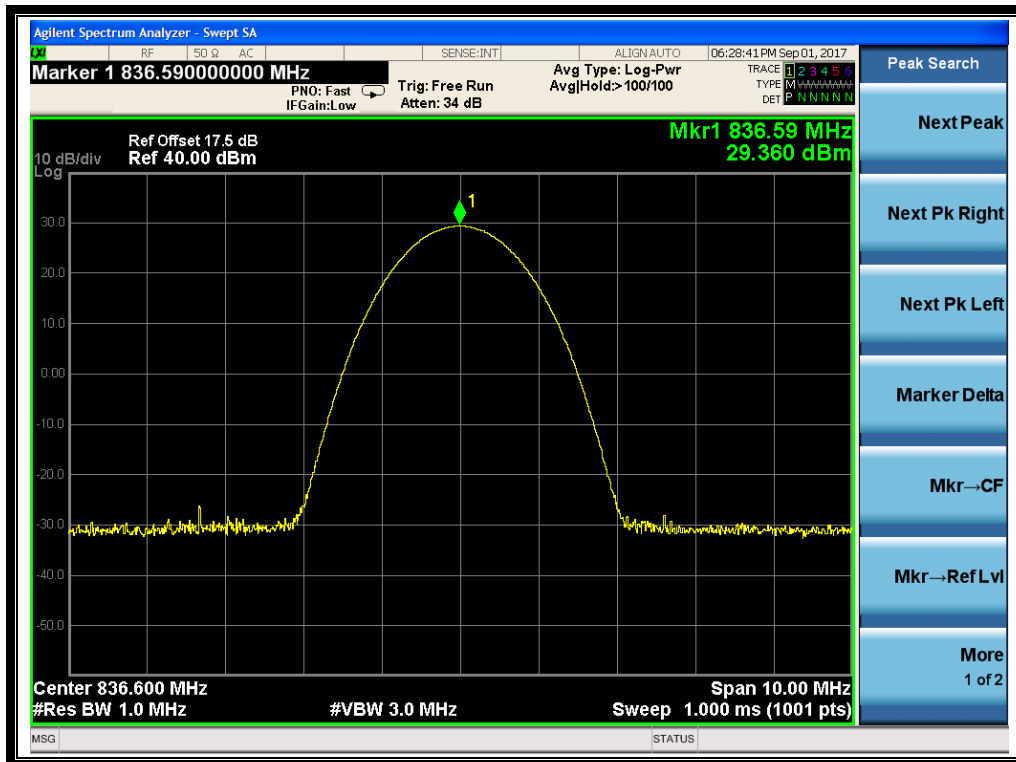


(EGPRS 850MHz Channel = 190)

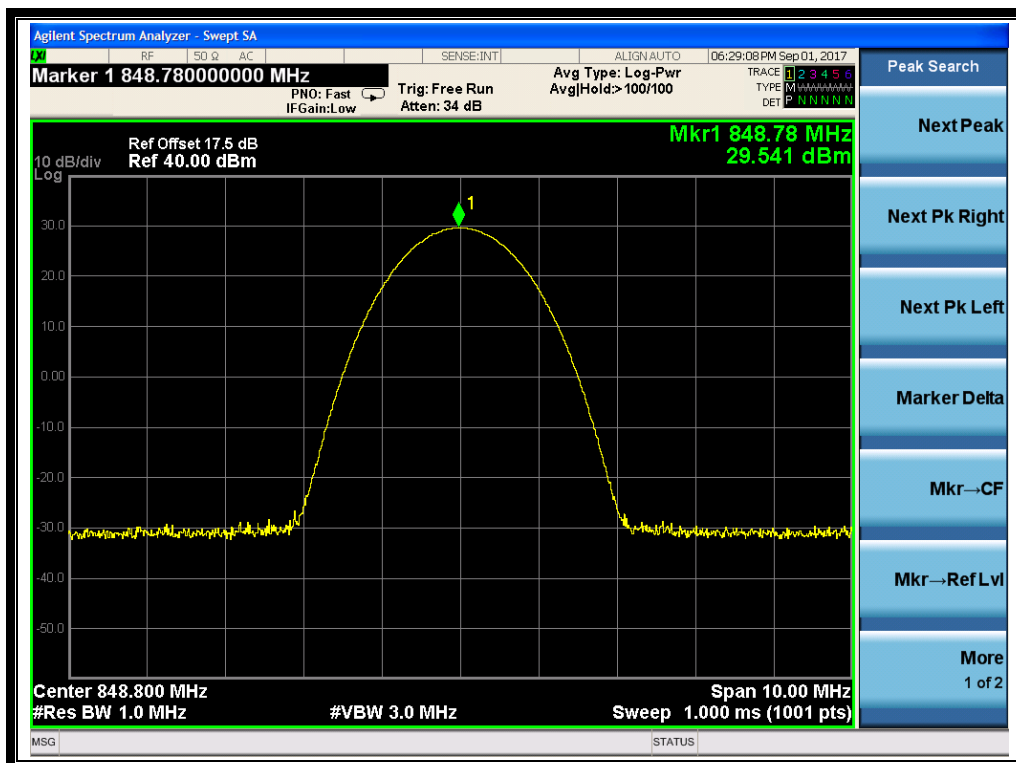


(EGPRS 850MHz Channel = 251)

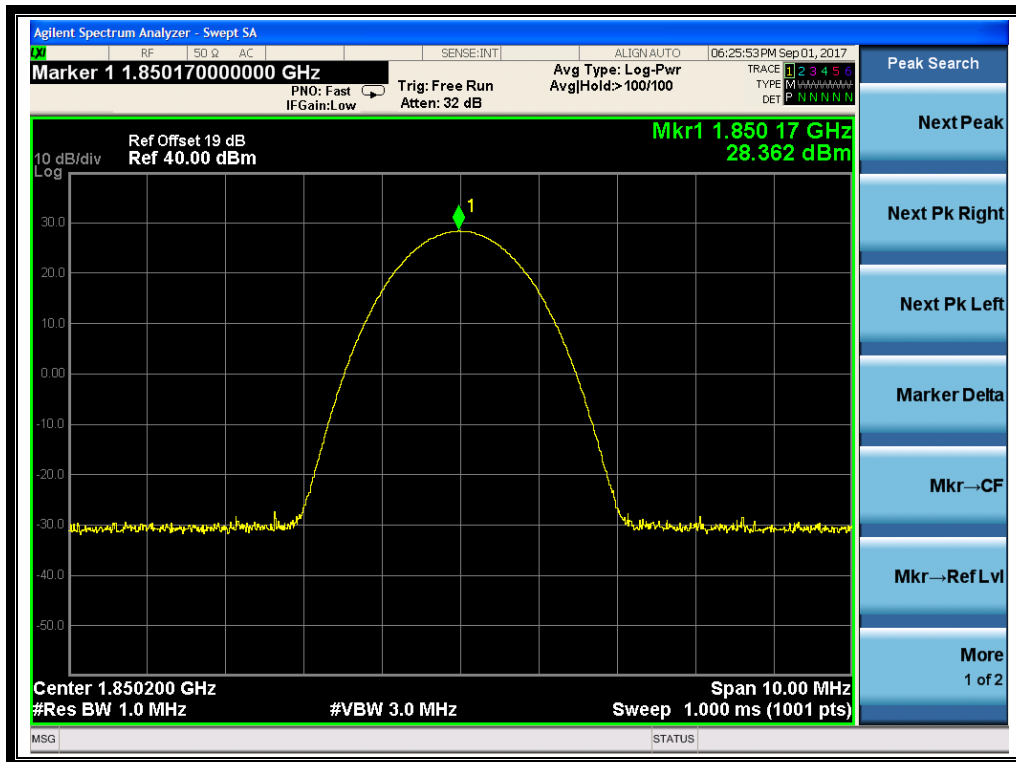

(EGPRS 1900MHz Channel = 512)

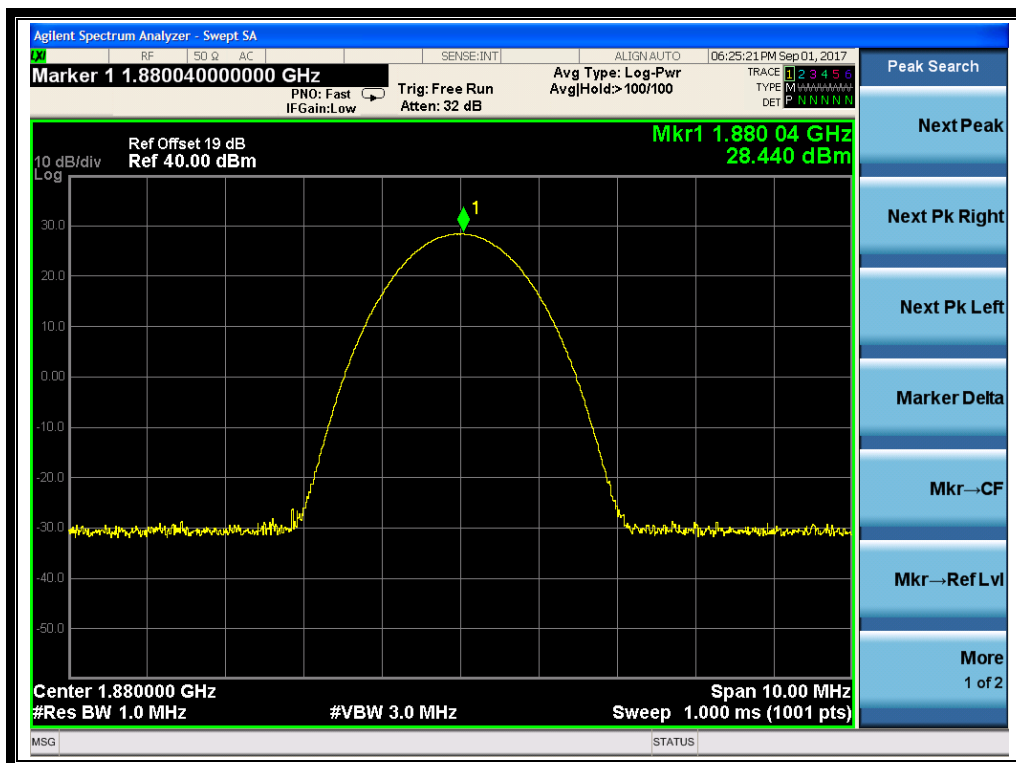

(EGPRS 1900MHz Channel = 661)

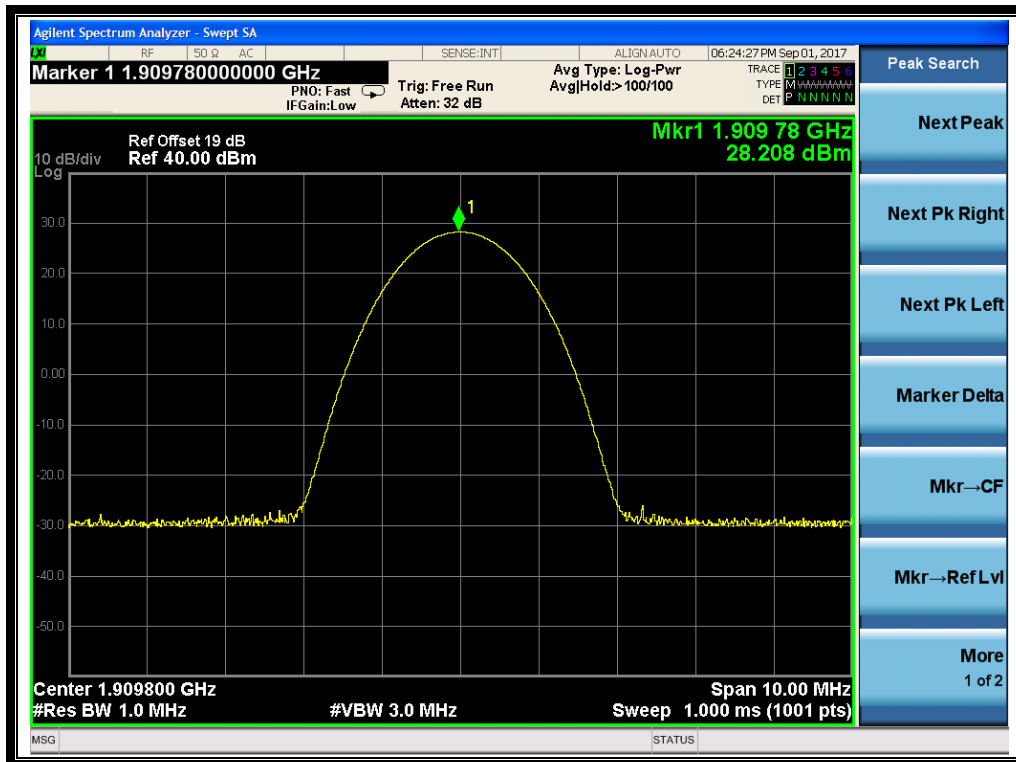

(EGPRS 1900Hz Channel = 810)



2.2 Peak to Average Ratio

2.2.1 Definition

According to FCC section 2.1049 and FCC 24.232(d) the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Test Description

See section 2.1.2 of this report.

2.2.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

Test procedures:

A .For GSM/EGPRS operating mode:


- a. Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
- b. Set EUT in maximum output power, and triggered the bust signal.
- c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.

B. For UMTS operating mode:


- a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.

Test Verdict:


Band	Channel	Frequency (MHz)	Peak to Average ratio	Limit	Verdict
			dB	dB	
GPRS 1900MHz	512	1850.2	0.05	13	PASS
	661	1880.0	0.11		PASS
	810	1909.8	0.12		PASS
EGPRS 1900MHz	512	1850.2	0.11	13	PASS
	661	1880.0	0.06		PASS
	810	1909.8	0.17		PASS
HSUPA 1900MHz	9262	1852.4	5.83	13	PASS
	9400	1880.0	8.42		PASS
	9538	1907.6	8.46		PASS

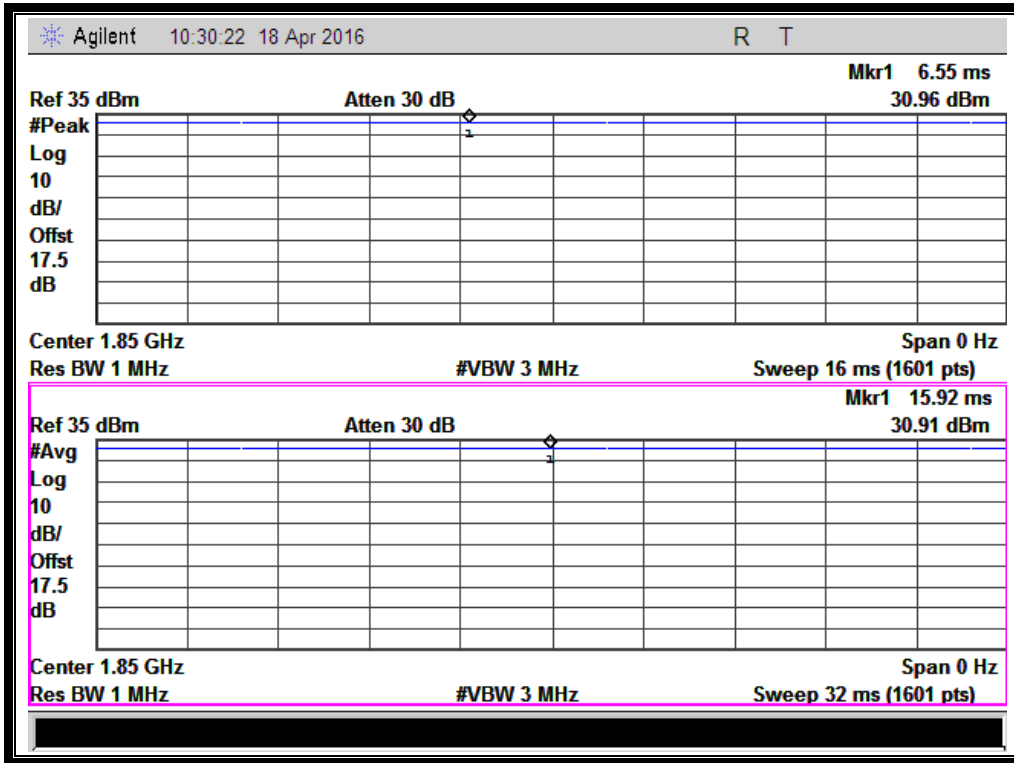


(GPRS 1900 MHz Channel = 512)

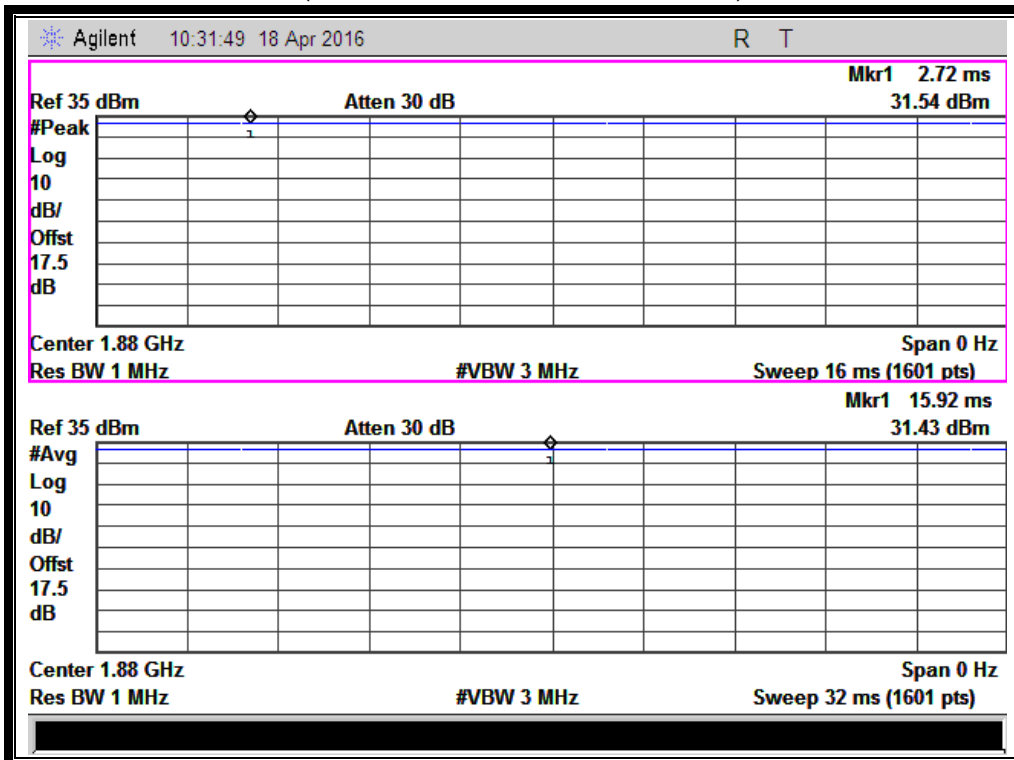


(GPRS 1900 MHz Channel = 661)

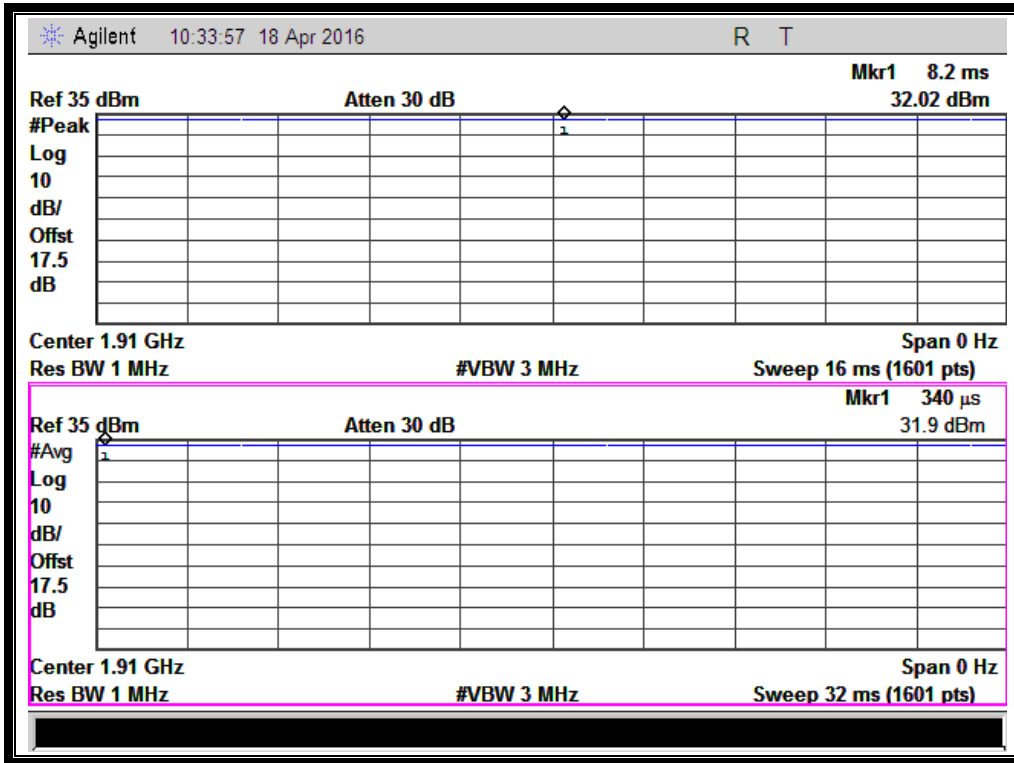


(GPRS 1900MHz Channel = 810)

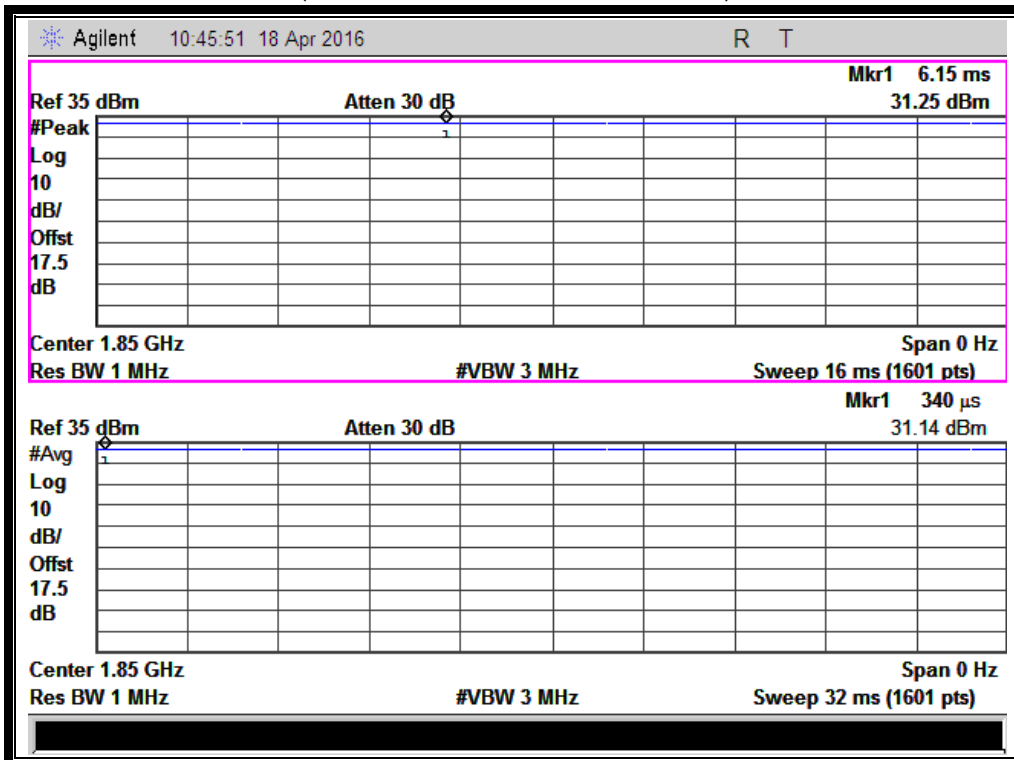


(EGPRS 1900 MHz Channel = 512)

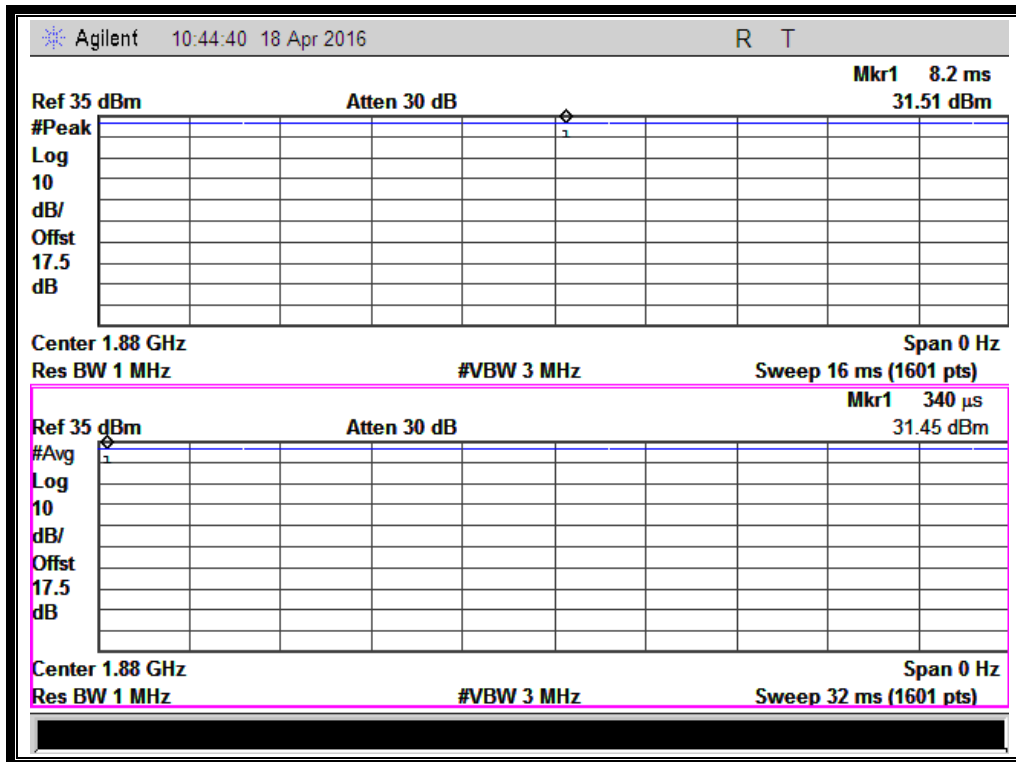


(EGPRS 1900 MHz Channel = 661)

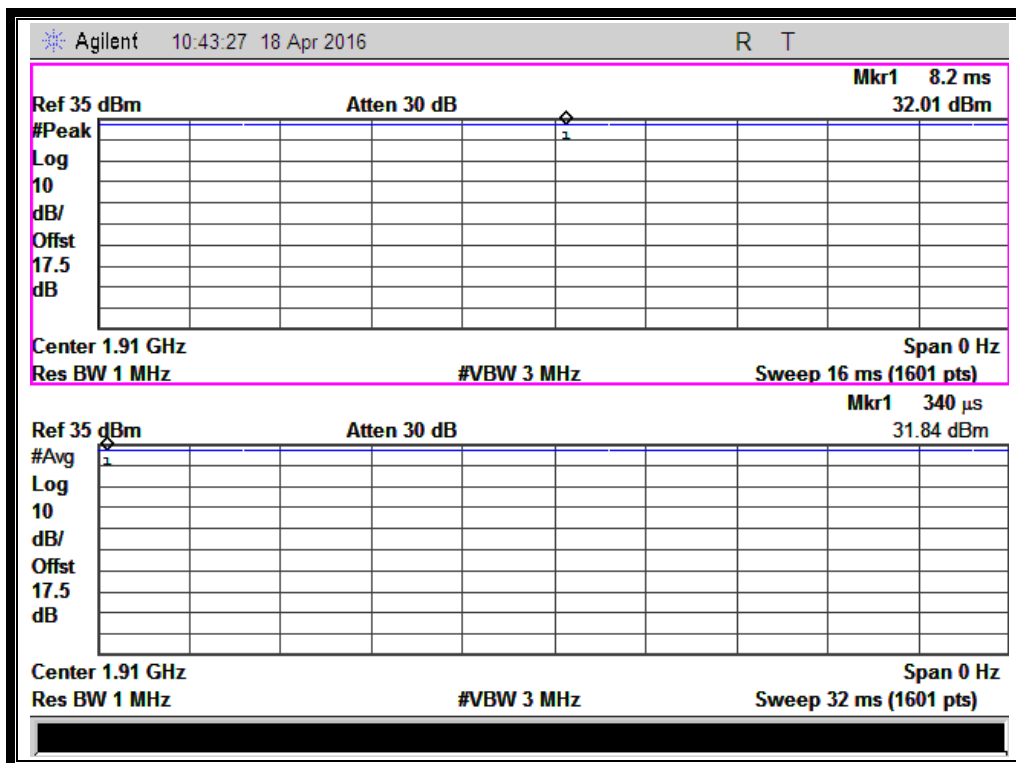


(EGPRS 1900MHz Channel = 810)

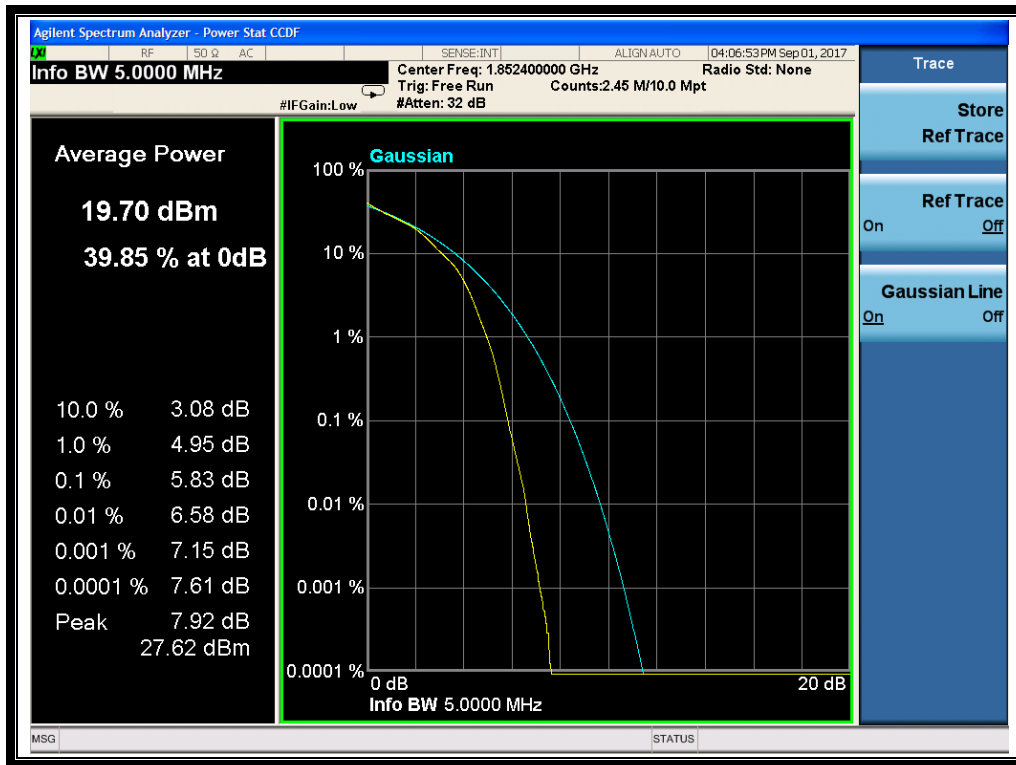

(WCDMA 1900MHz Channel = 9262)

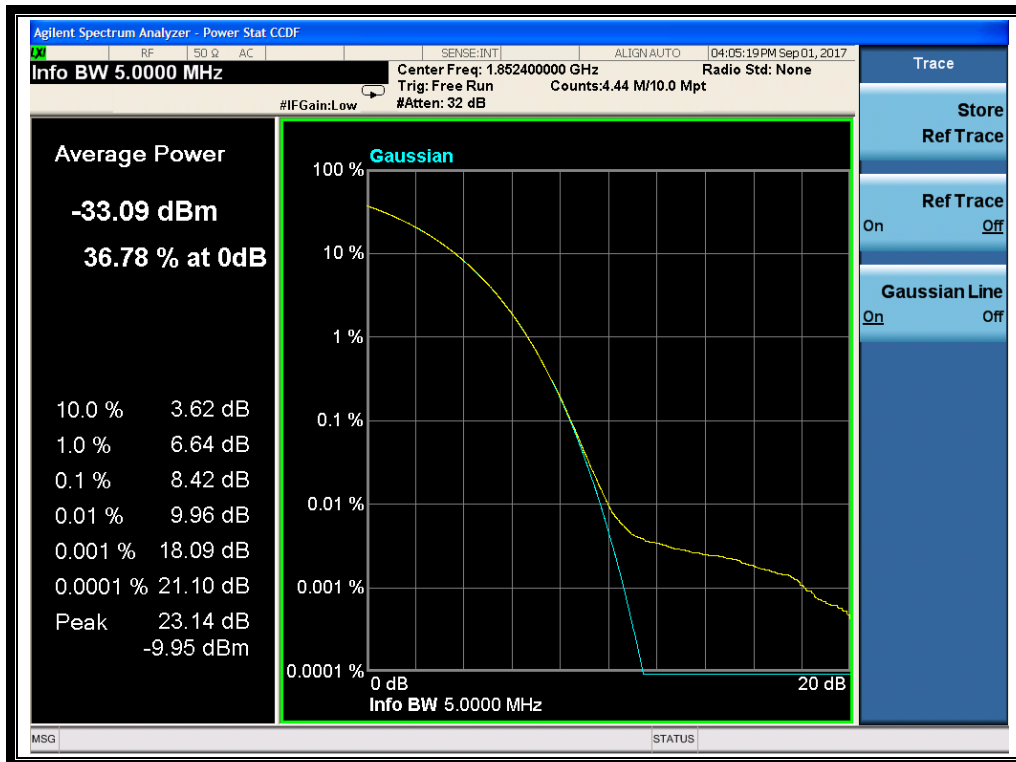

(WCDMA 1900MHz Channel = 9400)

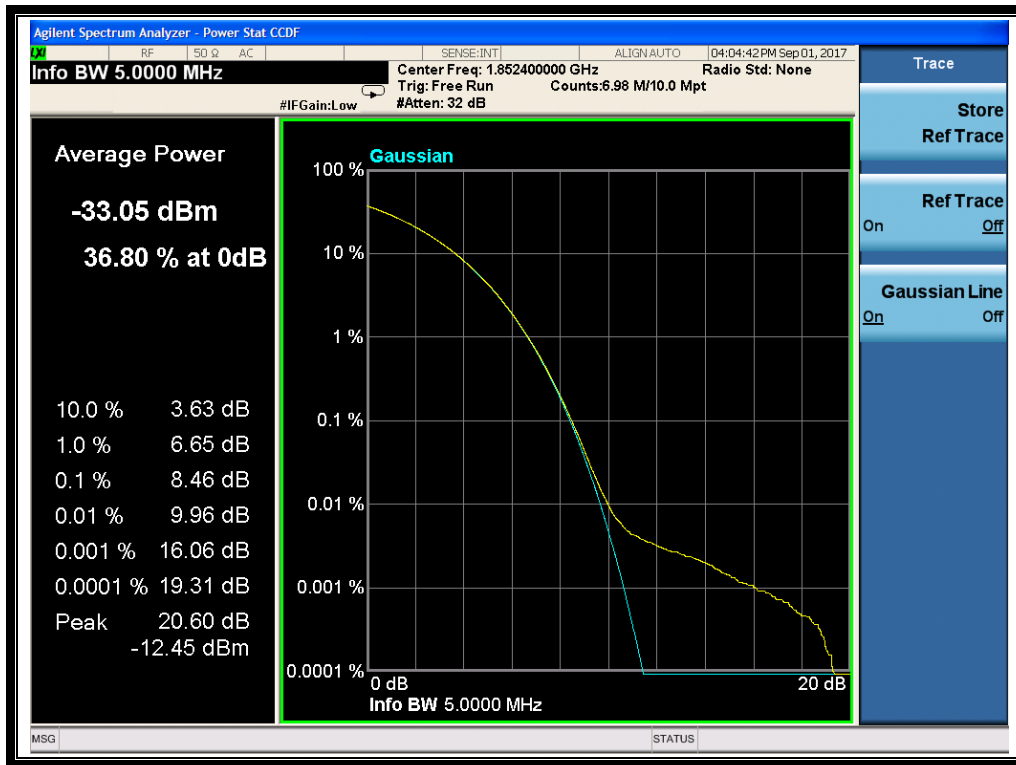

(WCDMA 1900MHz Channel = 9538)



2.3 99% Occupied Bandwidth

2.3.1 Definition

According to FCC section 2.1049 and FCC § 22.917 & 24.238, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

2.3.2 Test Description

See section 2.1.2 of this report.

2.3.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the 99% occupied bandwidth.


Test Verdict:

Band	Channel	Frequency (MHz)	26dB bandwidth(MHz)	99% Occupied Bandwidth (MHz)
GPRS 850MHz	128	824.2	0.3248	0.2440
	190	836.6	0.3171	0.2410
	251	848.8	0.3175	0.2475
GPRS 1900MHz	512	1850.2	0.3139	0.2448
	661	1880.0	0.3163	0.2464
	810	1909.8	0.3174	0.2502
EGPRS 850MHz	128	824.2	0.3207	0.2456
	190	836.6	0.3134	0.2458
	251	848.8	0.3239	0.2493
EGPRS 1900MHz	512	1850.2	0.3105	0.2448
	661	1880.0	0.3095	0.2419
	810	1909.8	0.3238	0.2449
HSDPA 850MHz	4132	826.4	4.624	4.1248
	4175	835.0	4.621	4.1337
	4233	846.6	4.627	4.1462
HSDPA 1900MHz	9262	1852.4	4.612	4.1472
	9400	1880.0	4.618	4.1693
	9538	1907.6	4.620	4.1629
HSUPA 850MHz	4132	826.4	4.606	4.1276
	4175	835.0	4.617	4.1467
	4233	846.6	4.619	4.1428




Band	Channel	Frequency (MHz)	26dB bandwidth(MHz)	99% Occupied Bandwidth (MHz)
HSUPA 1900MHz	9262	1852.4	4.600	4.1429
	9400	1880.0	4.604	4.1382
	9538	1907.6	4.619	4.1457
HSPA+ 850MHz	4132	826.4	4.631	4.1271
	4175	835.0	4.619	4.1545
	4233	846.6	4.629	4.1455
HSPA+ 1900MHz	9262	1852.4	4.621	4.1414
	9400	1880.0	4.626	4.1449
	9538	1907.6	4.631	4.1522


Test Plots:

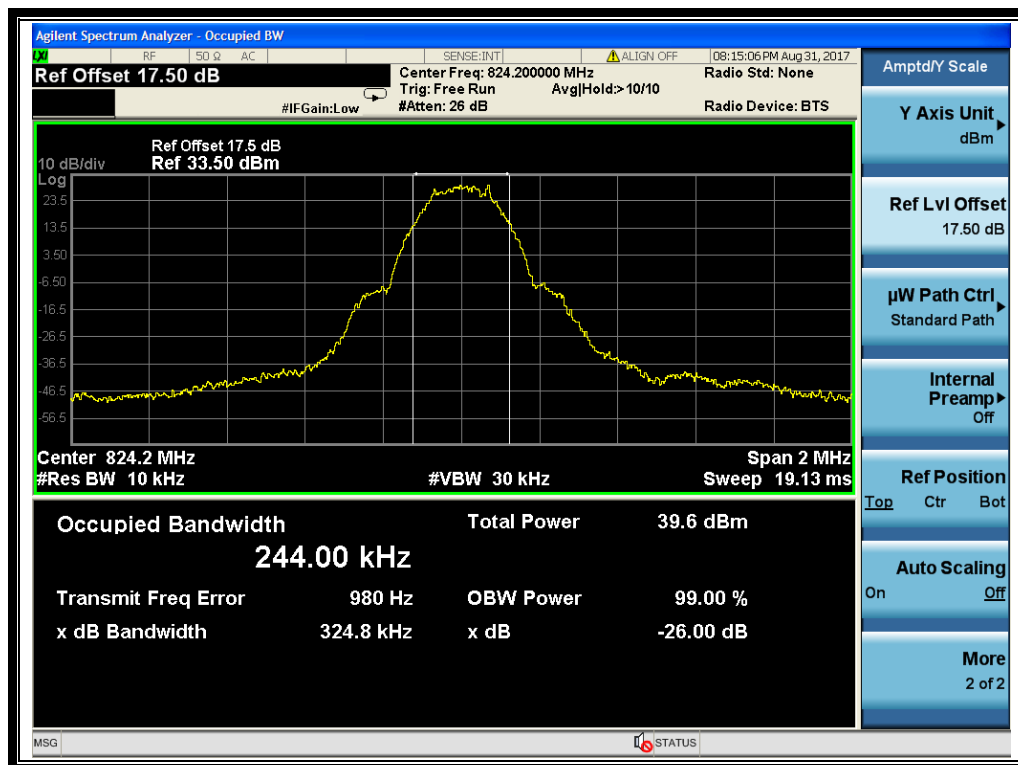


(GPRS 850MHz Channel = 128)

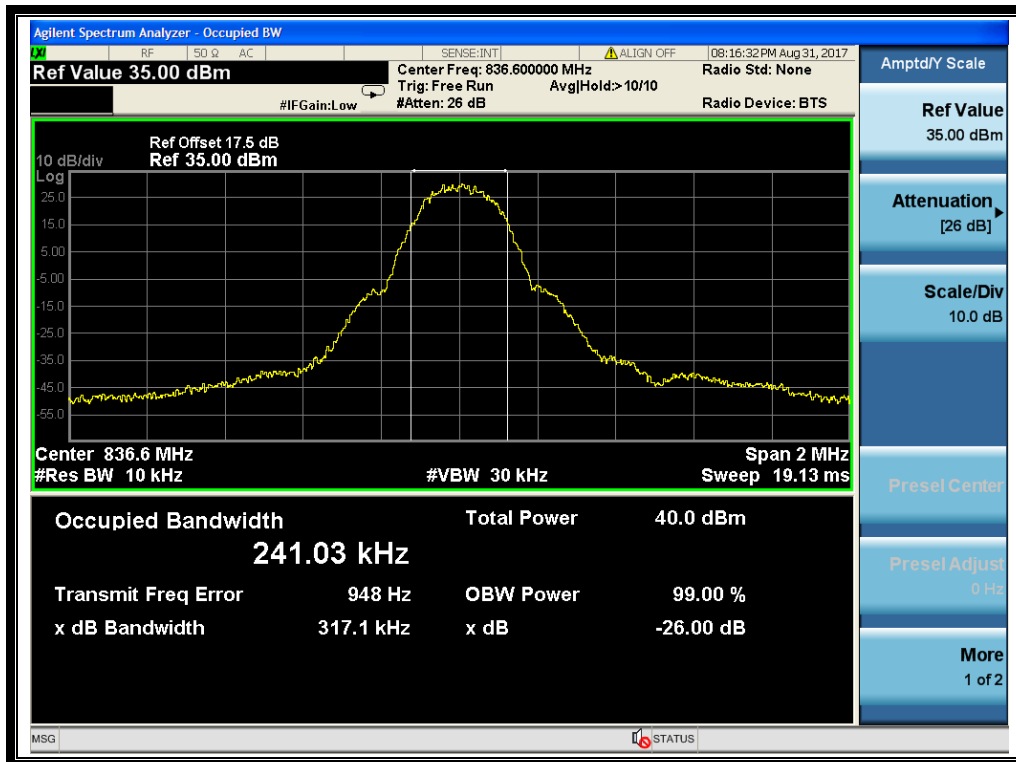


(GPRS 850MHz Channel = 190)

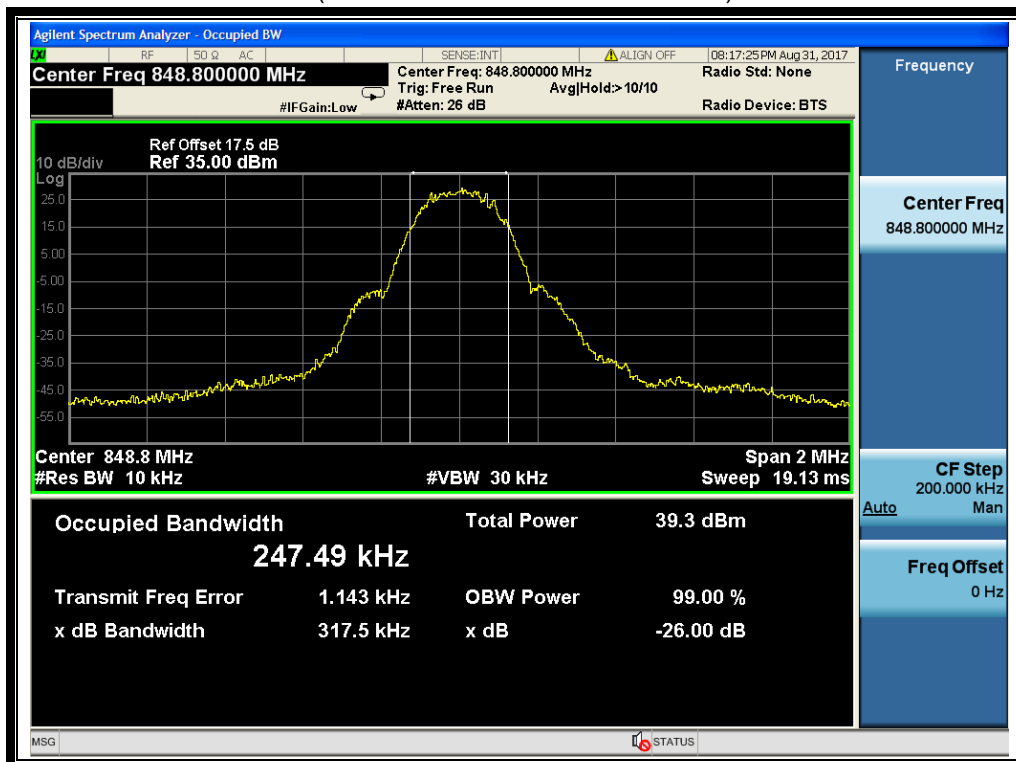


(GPRS 850MHz Channel = 251)

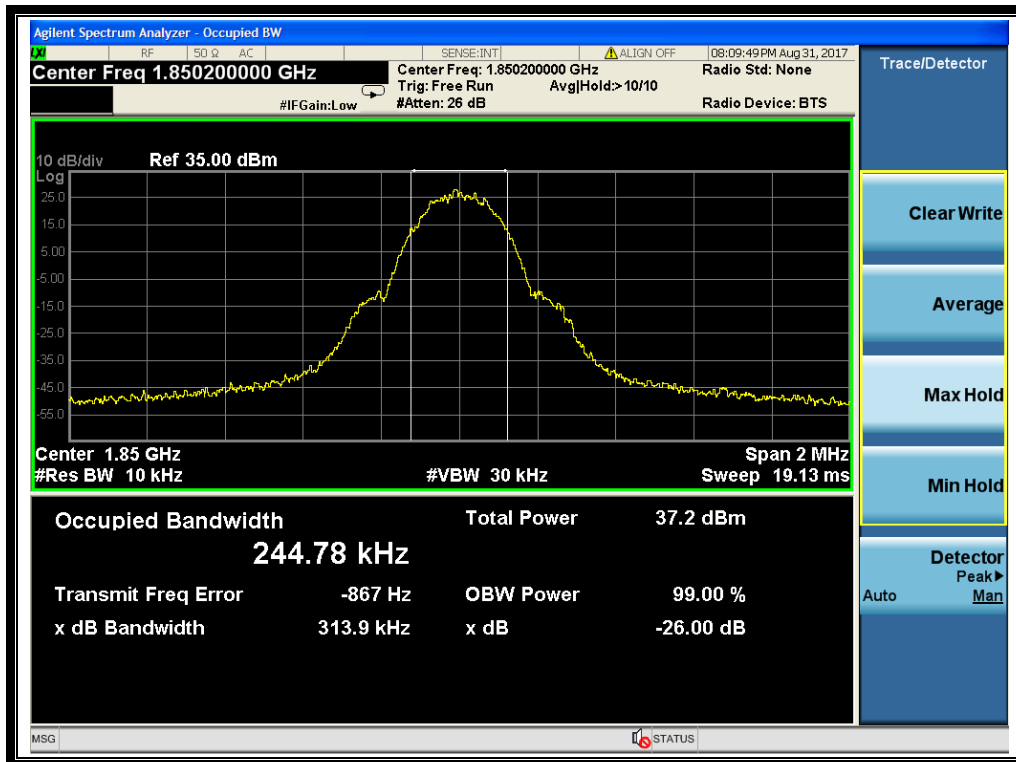


(GPRS1900MHz Channel = 512)

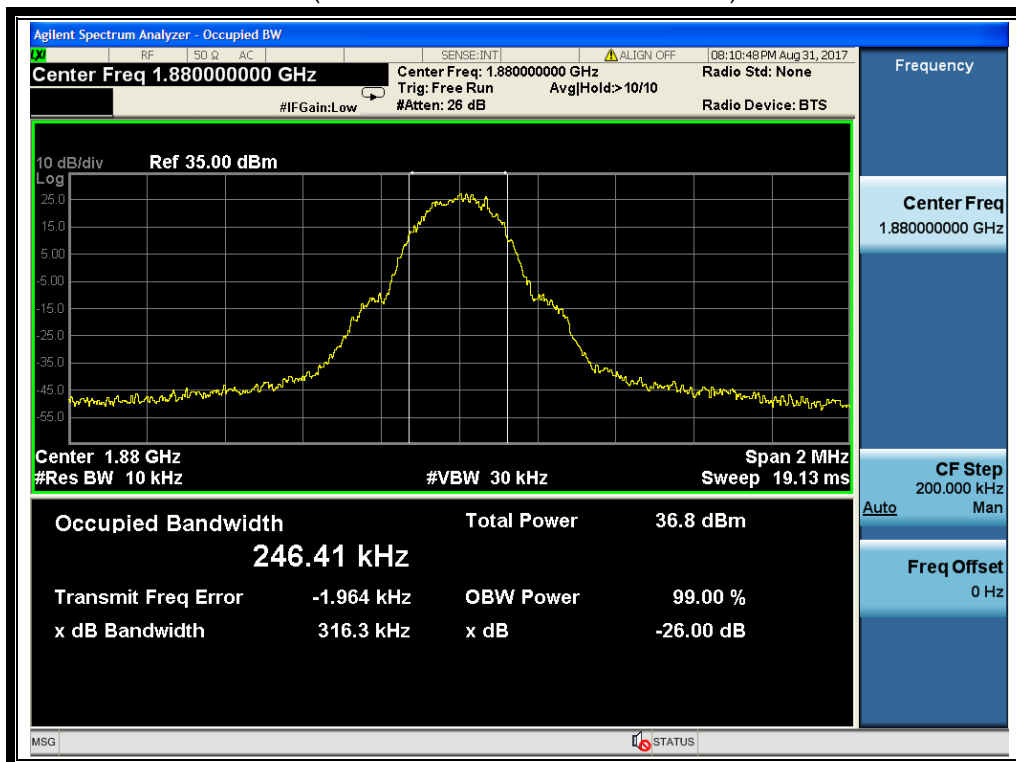


(GPRS1900MHz Channel = 661)

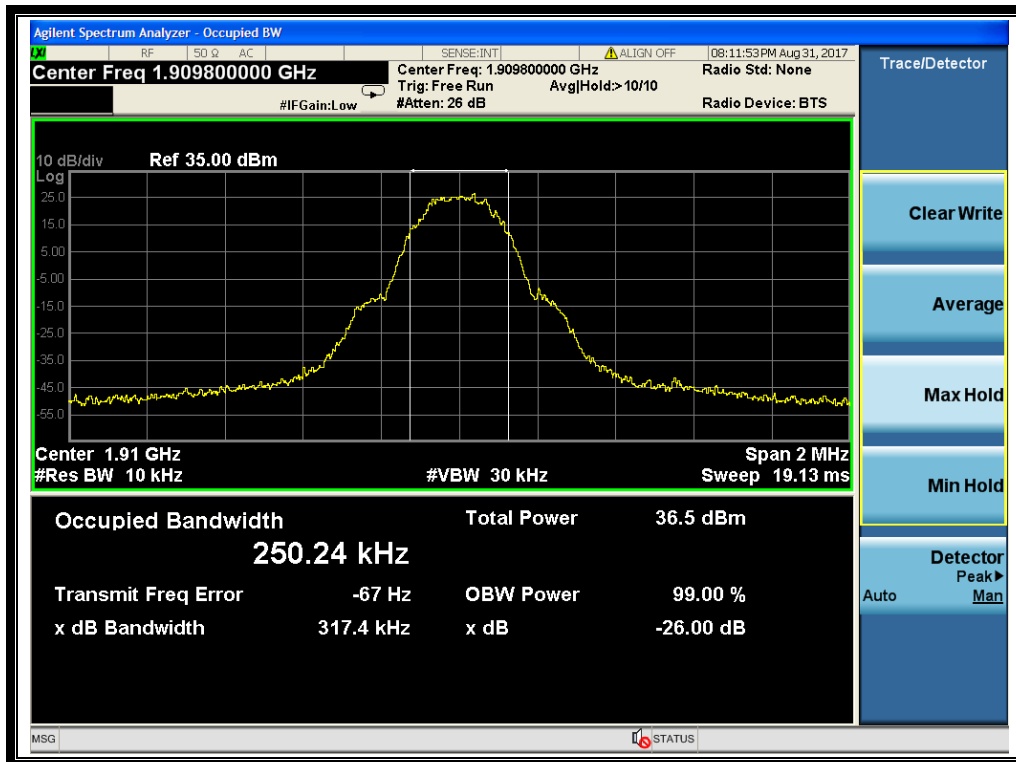


(GPRS 1900MHz Channel = 810)

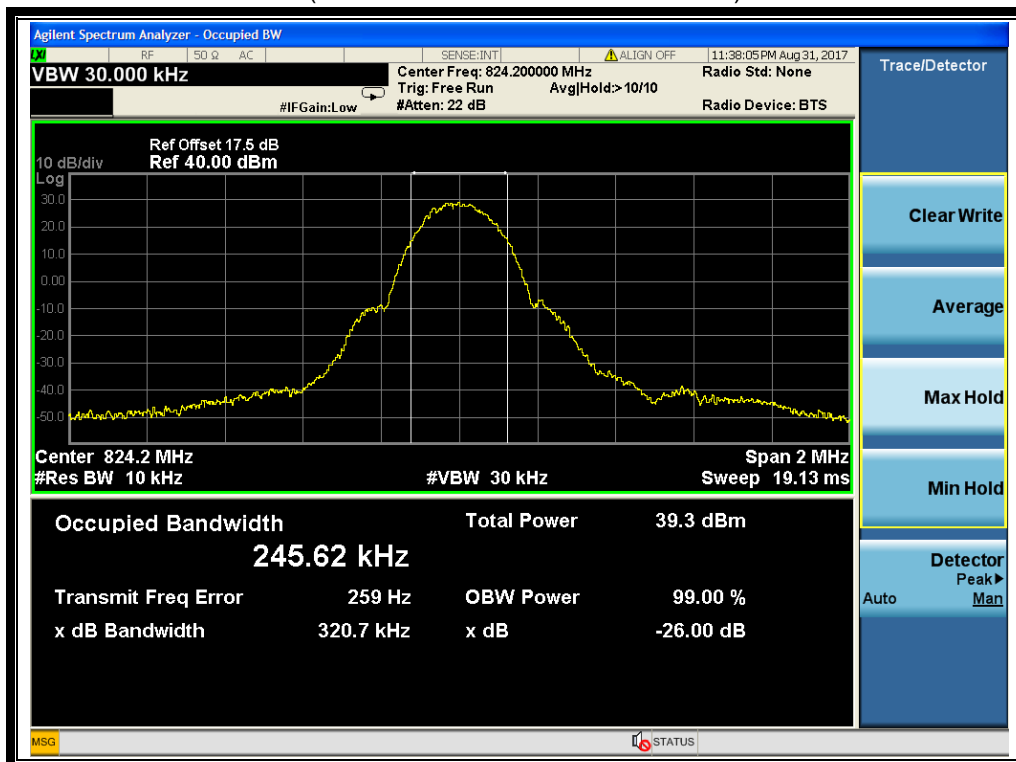


(EGPRS 850MHz Channel = 128)

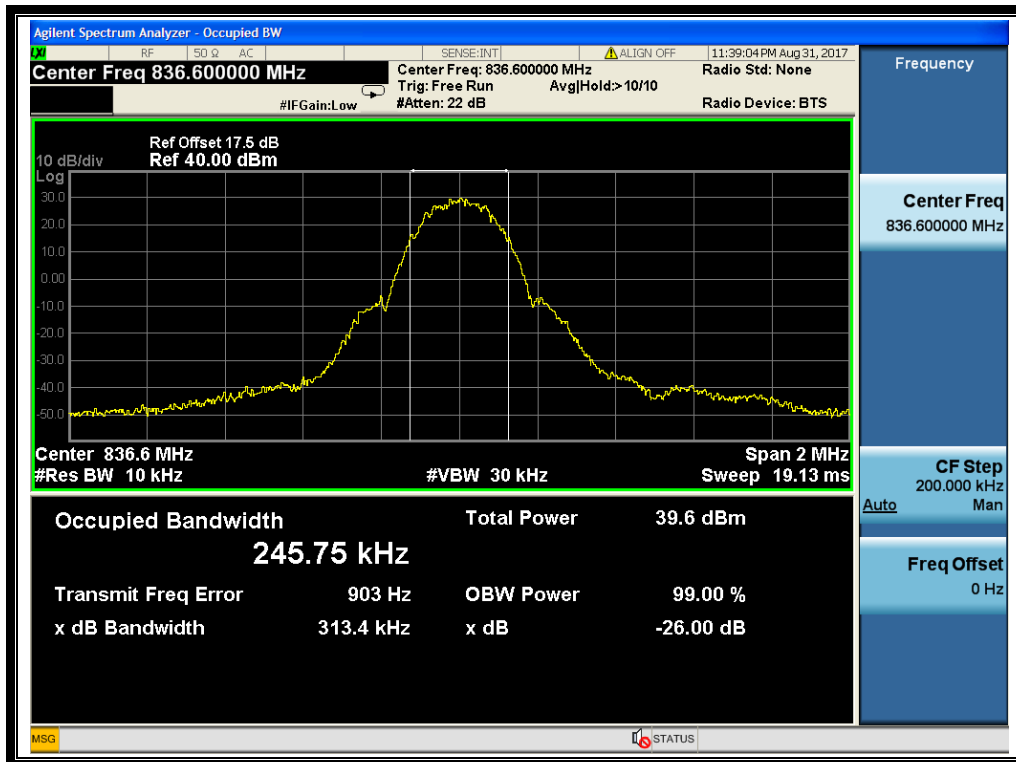


(EGPRS 850MHz Channel = 190)

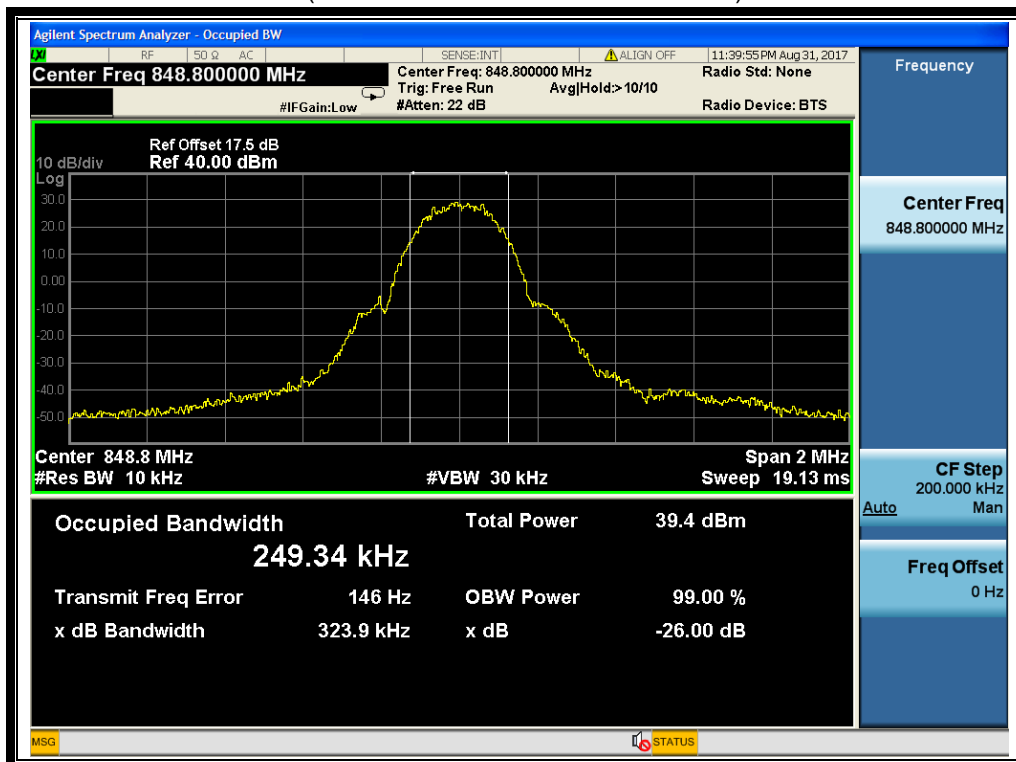


(EGPRS 850MHz Channel = 251)

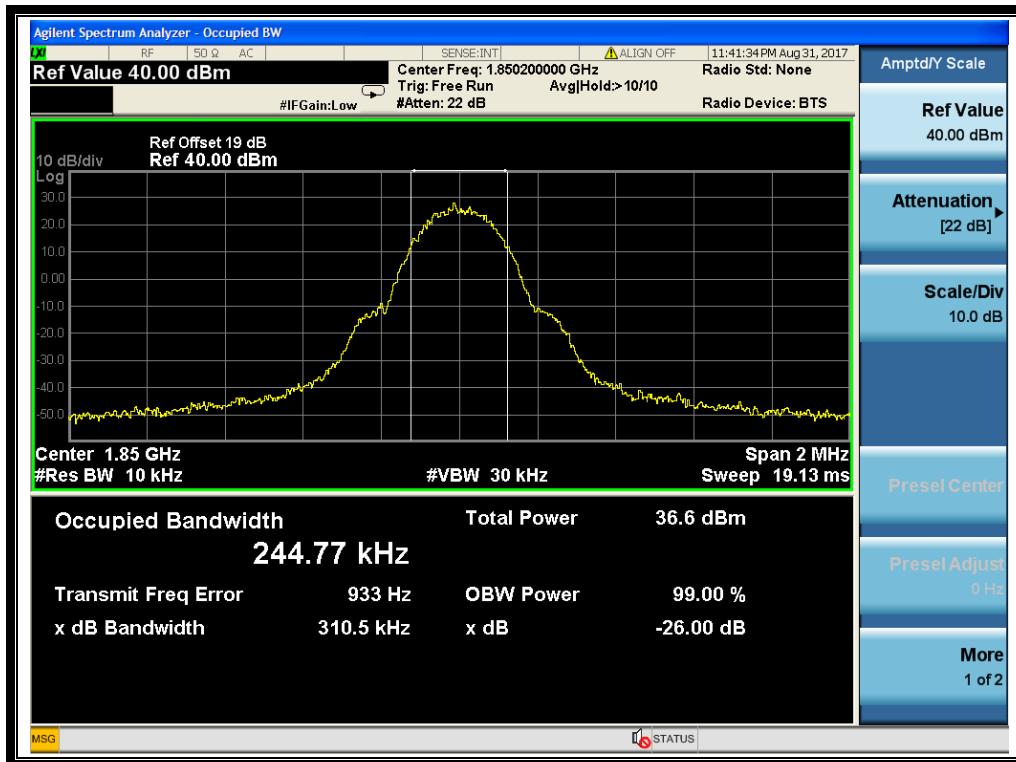


(EGPRS1900MHz Channel = 512)

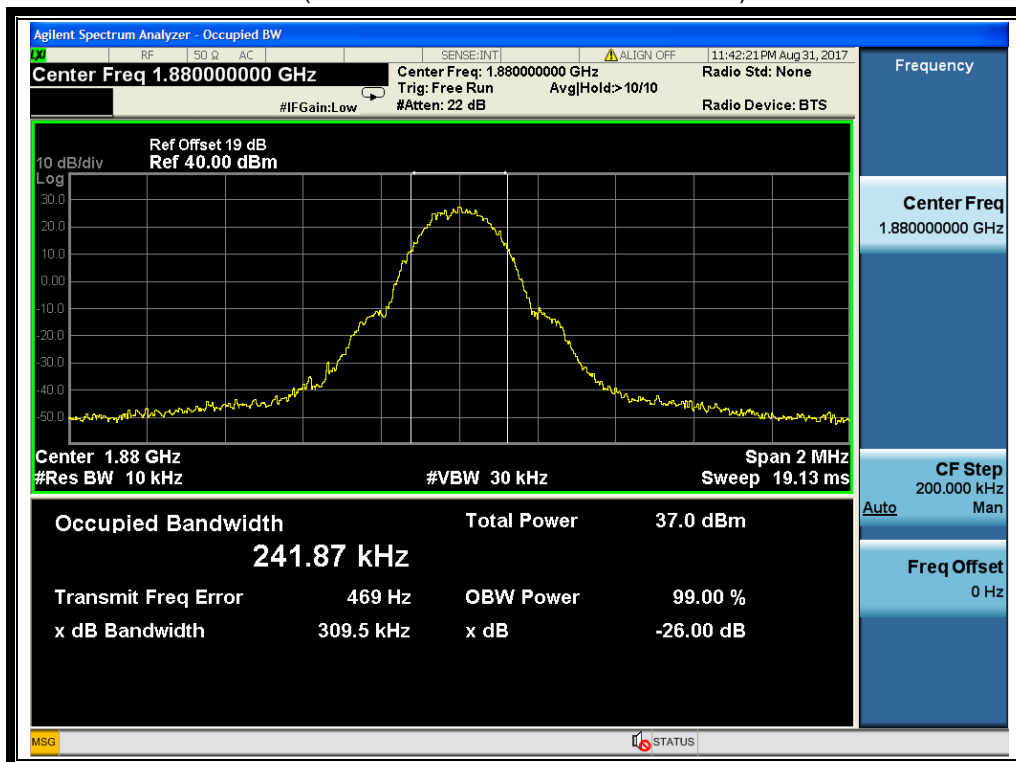


(EGPRS1900MHz Channel = 661)

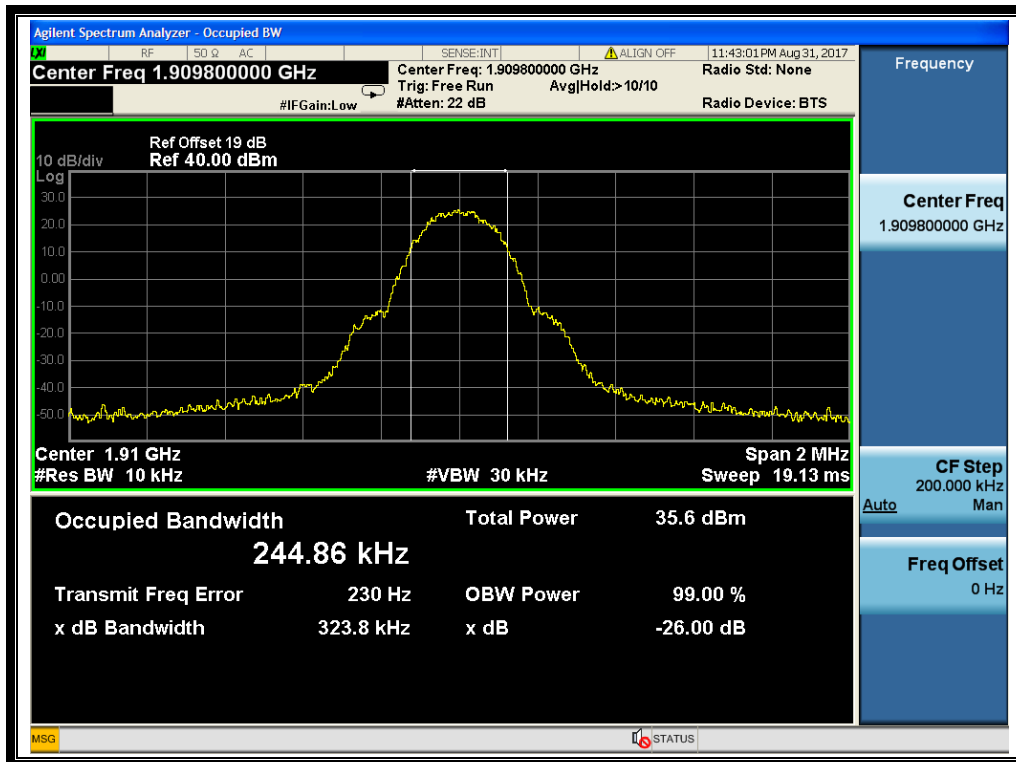


(EGPRS 1900MHz Channel = 810)

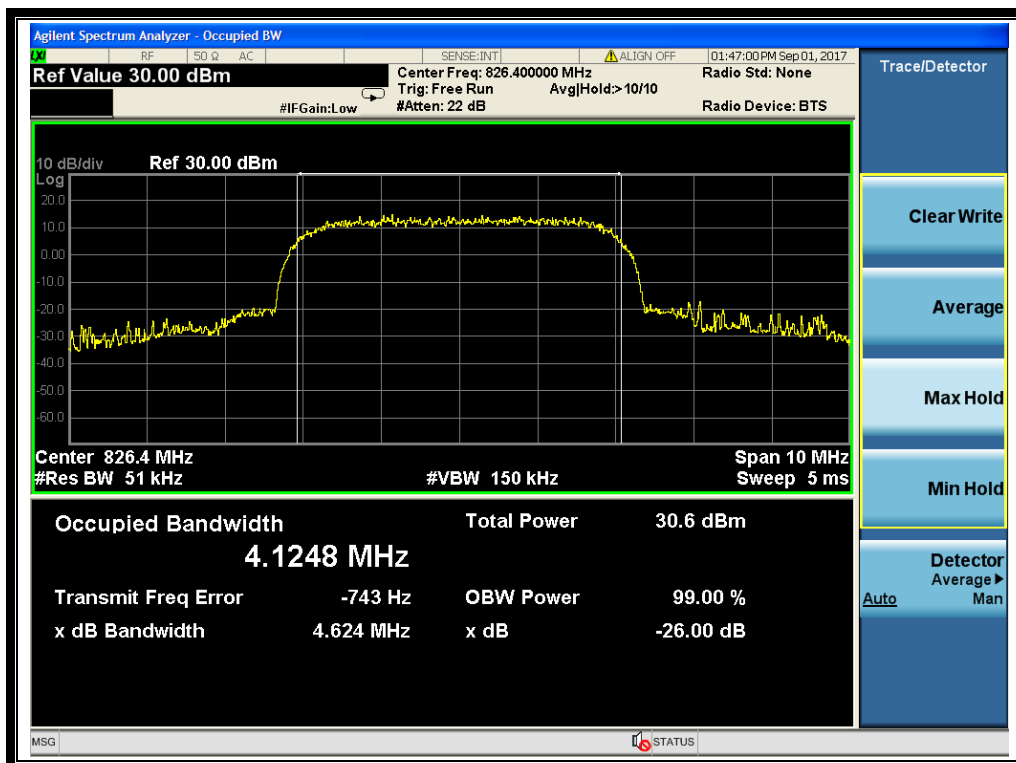


(HSDPA 850MHz Channel = 4132)

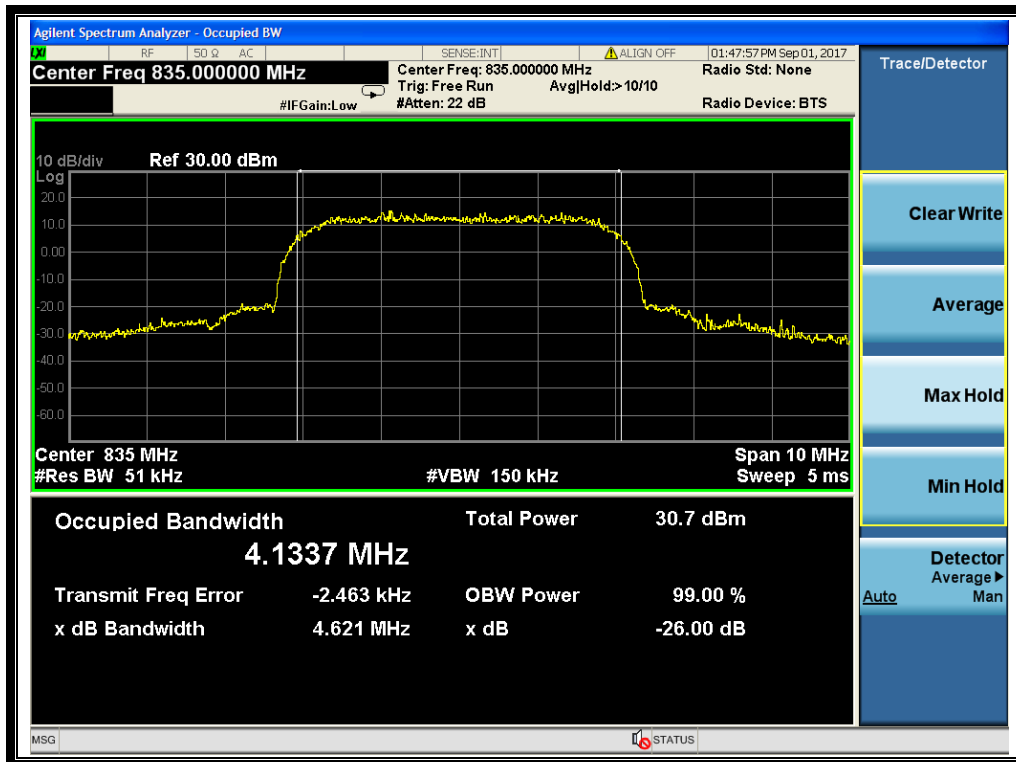


(HSDPA 850 MHz Channel = 4175)

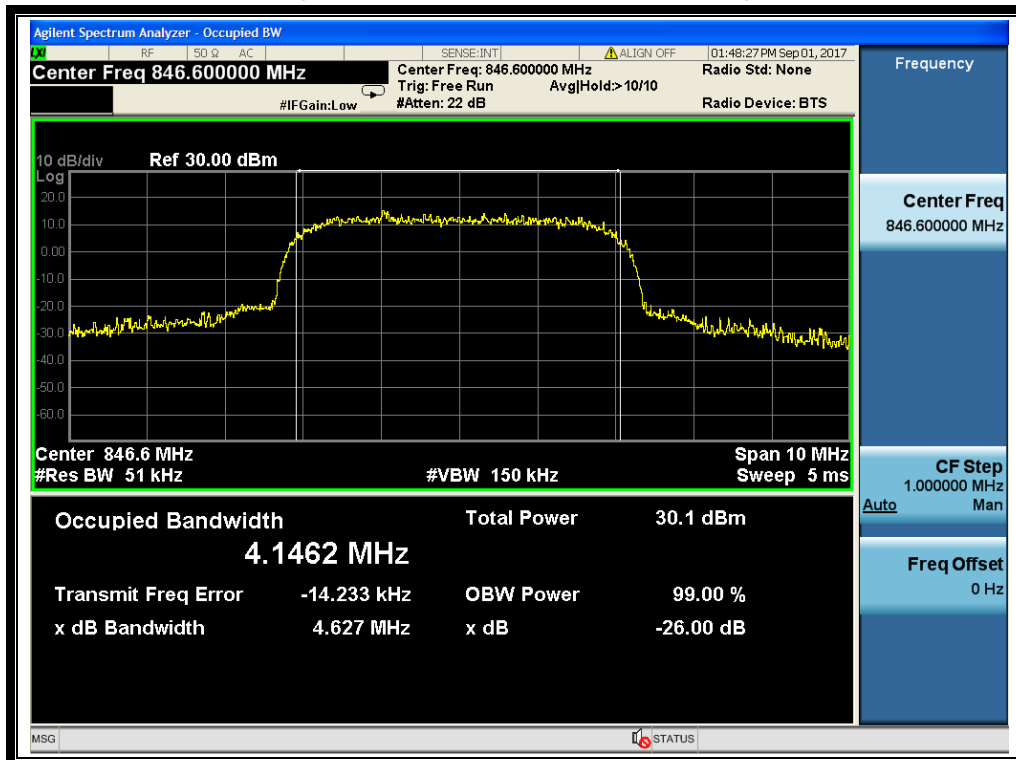


(HSDPA 850MHz Channel = 4233)

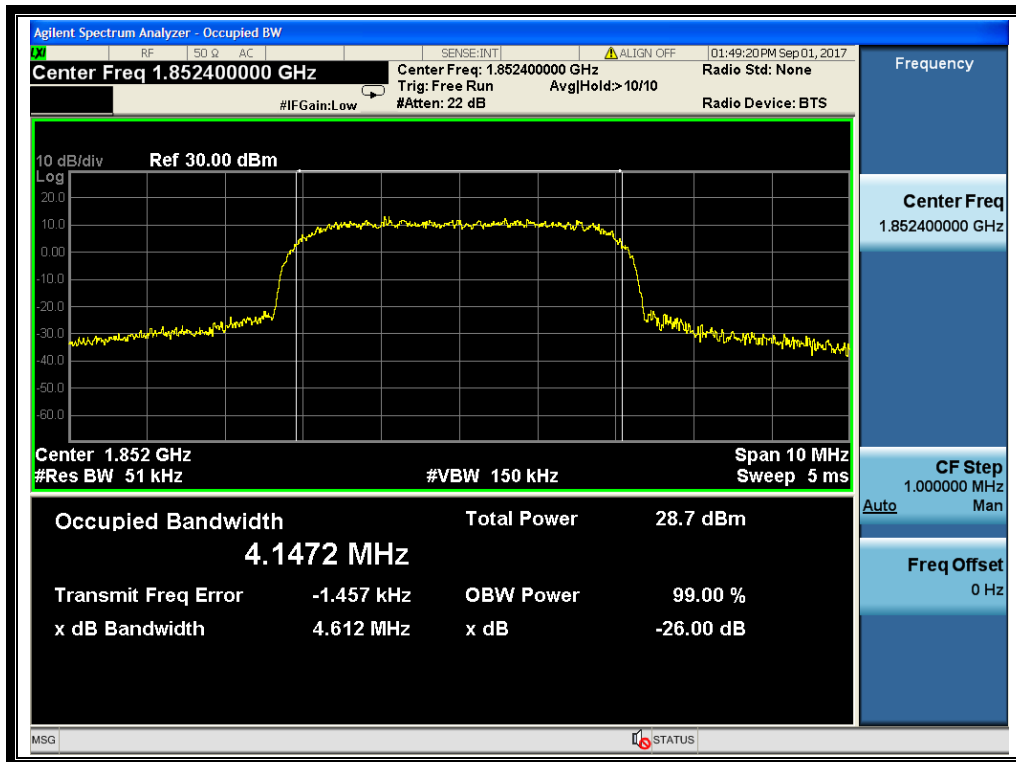


(HSDPA 1900MHz Channel = 9262)

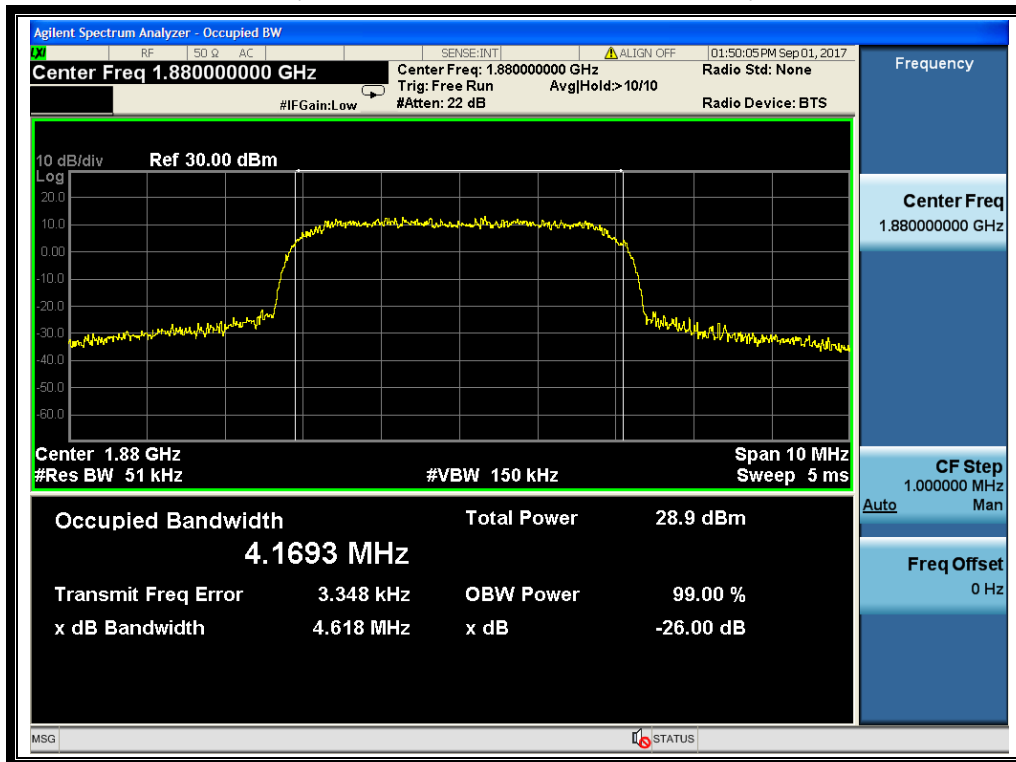


(HSDPA 1900 MHz Channel = 9400)

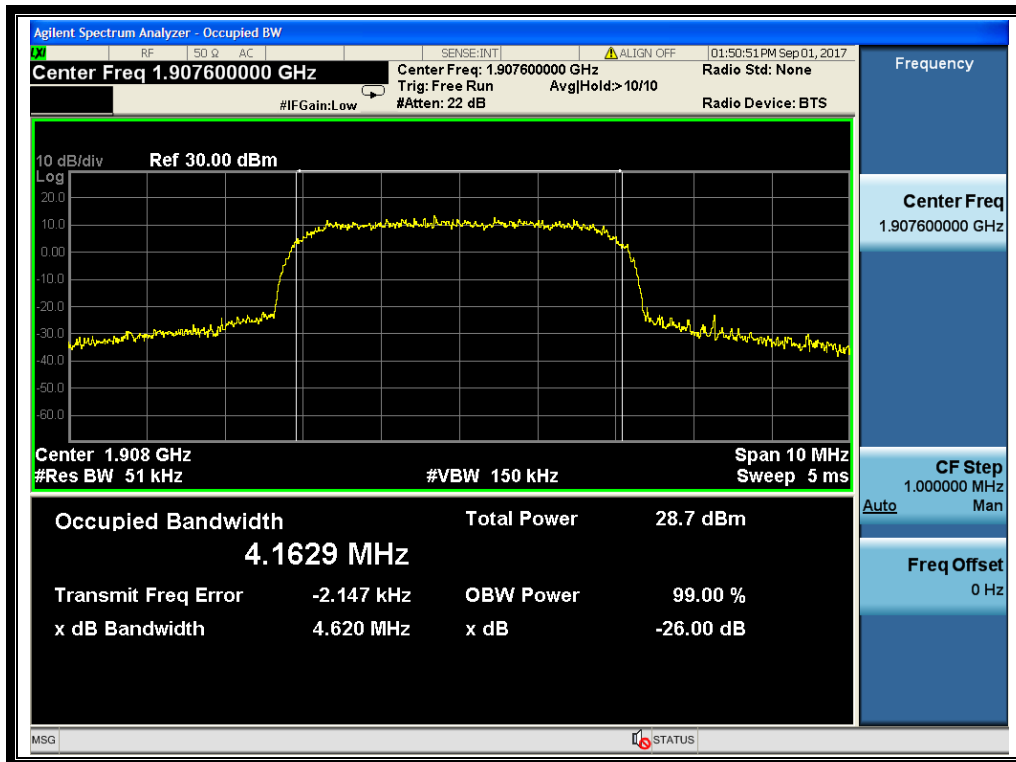


(HSDPA 1900MHz Channel = 9538)

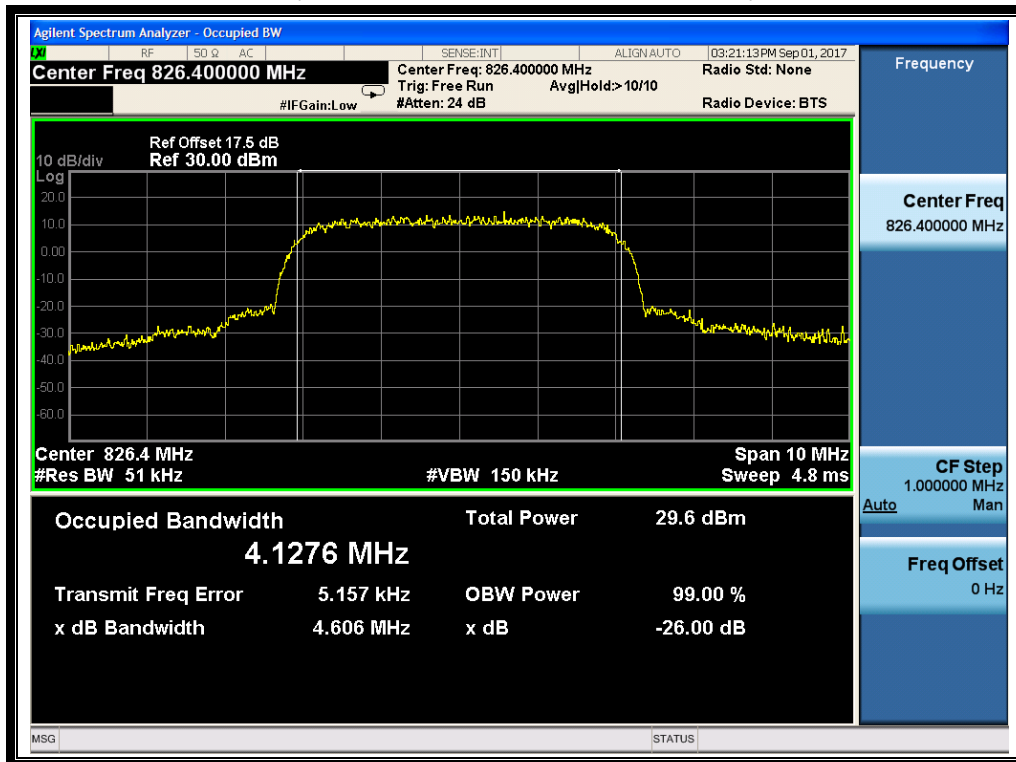


(HSUPA 850MHz Channel = 4132)

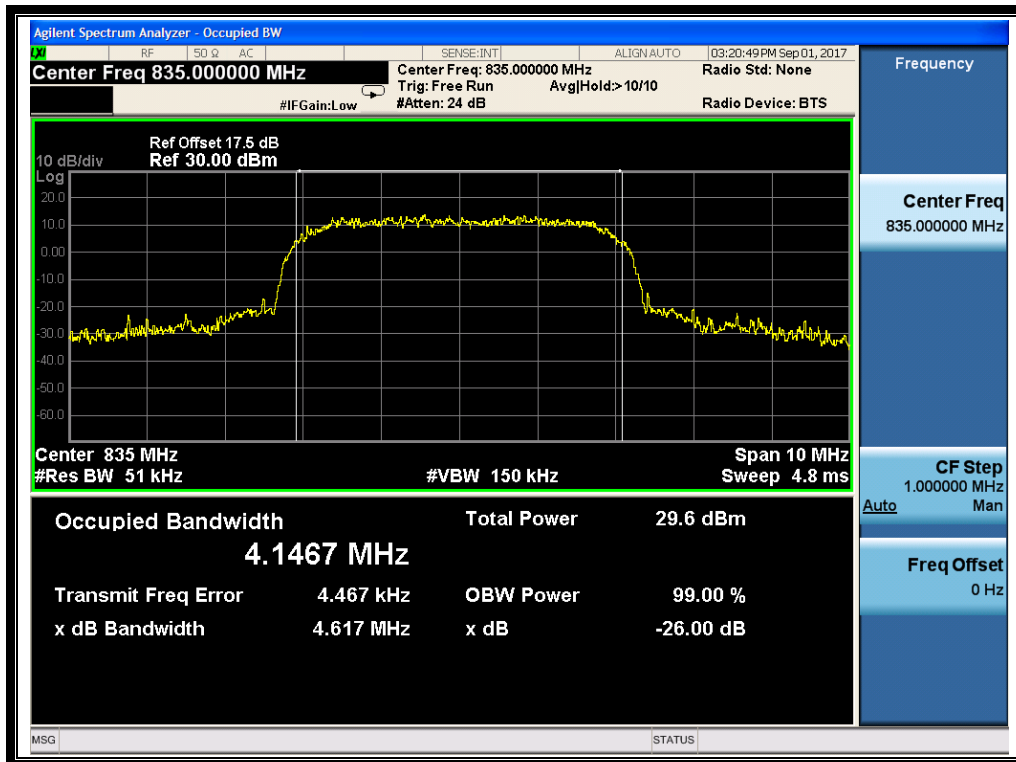


(HSUPA 850 MHz Channel = 4175)

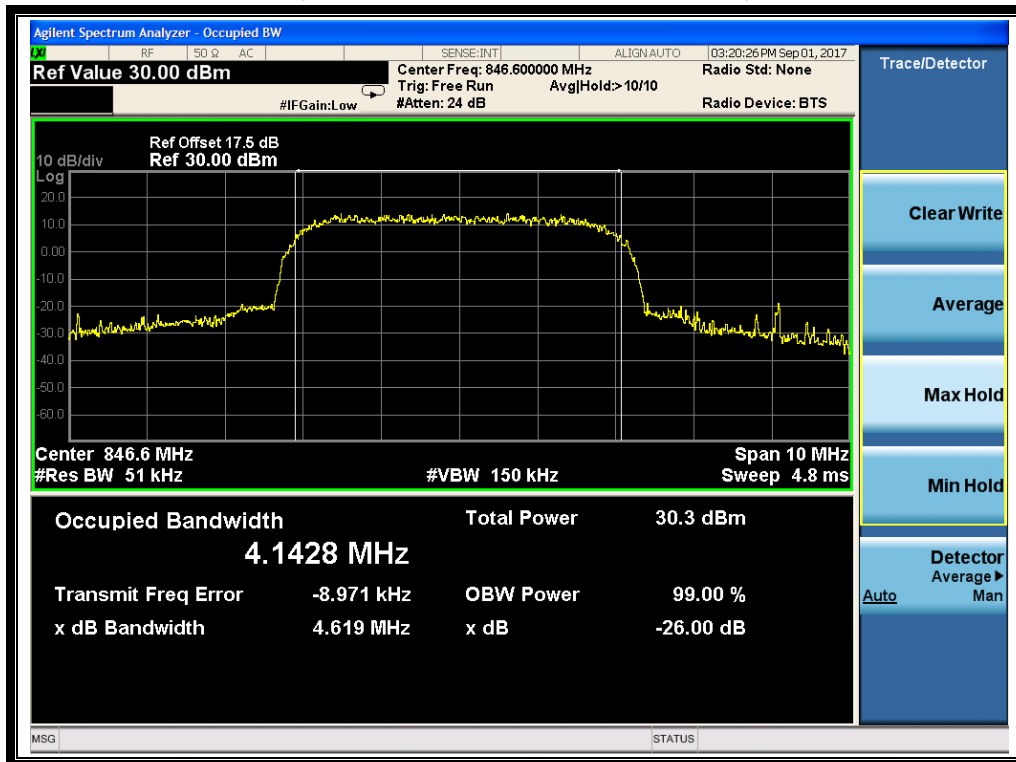


(HSUPA 850MHz Channel = 4233)

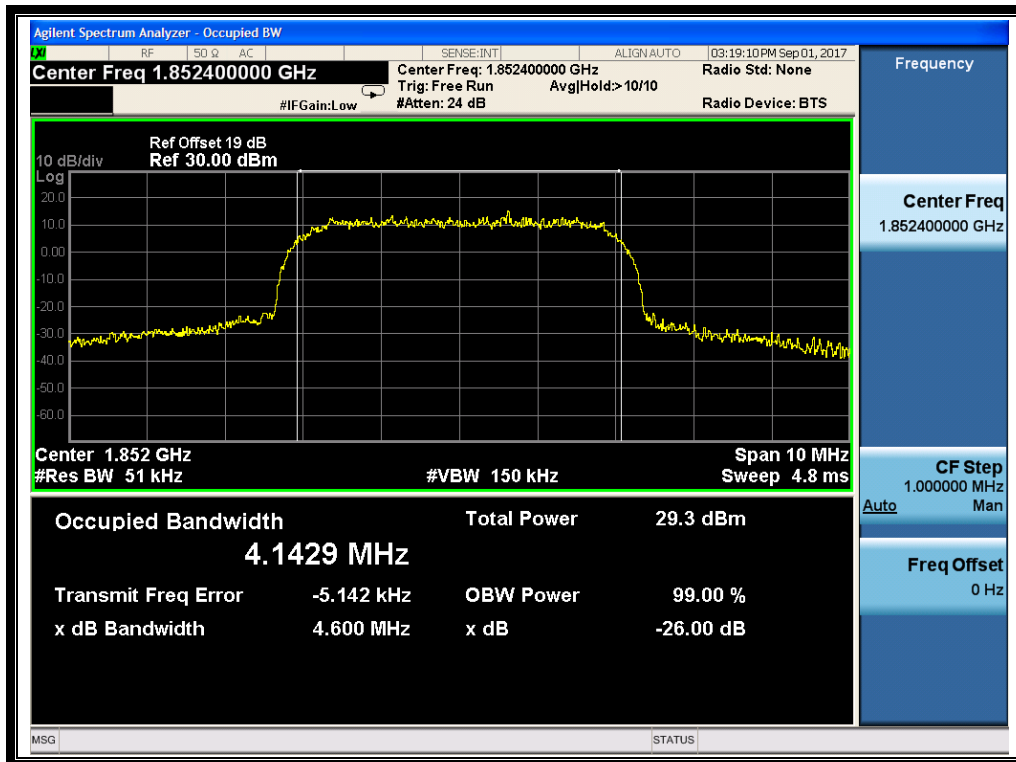


(HSUPA 1900MHz Channel = 9262)

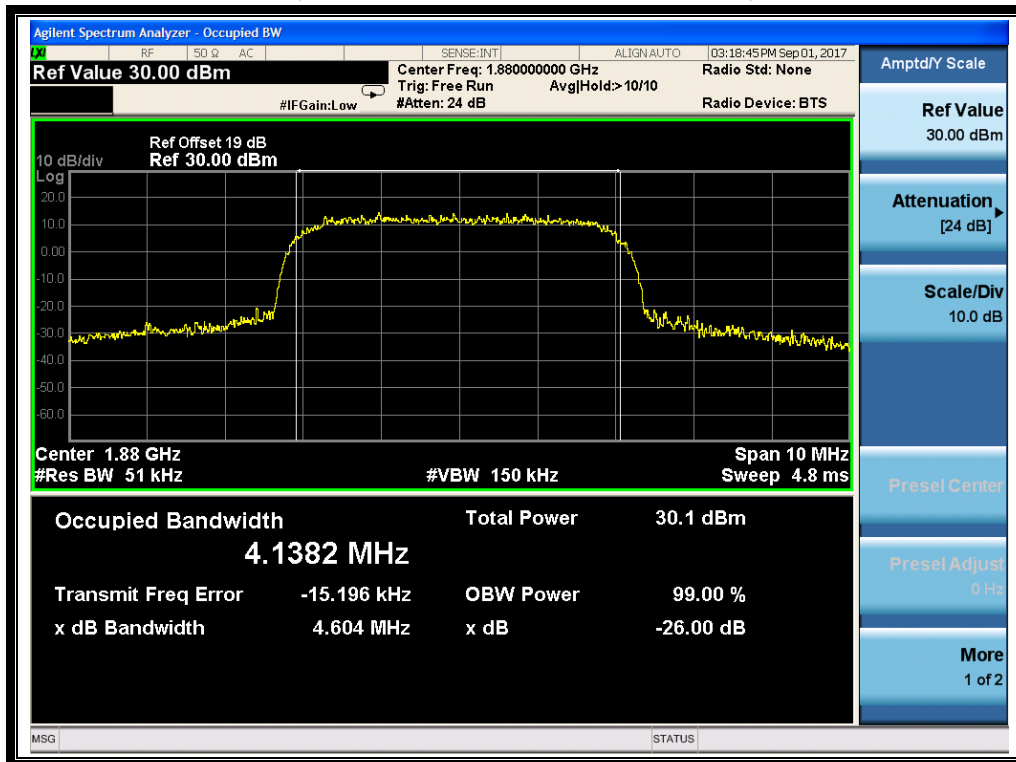

(HSUPA 1900 MHz Channel = 9400)

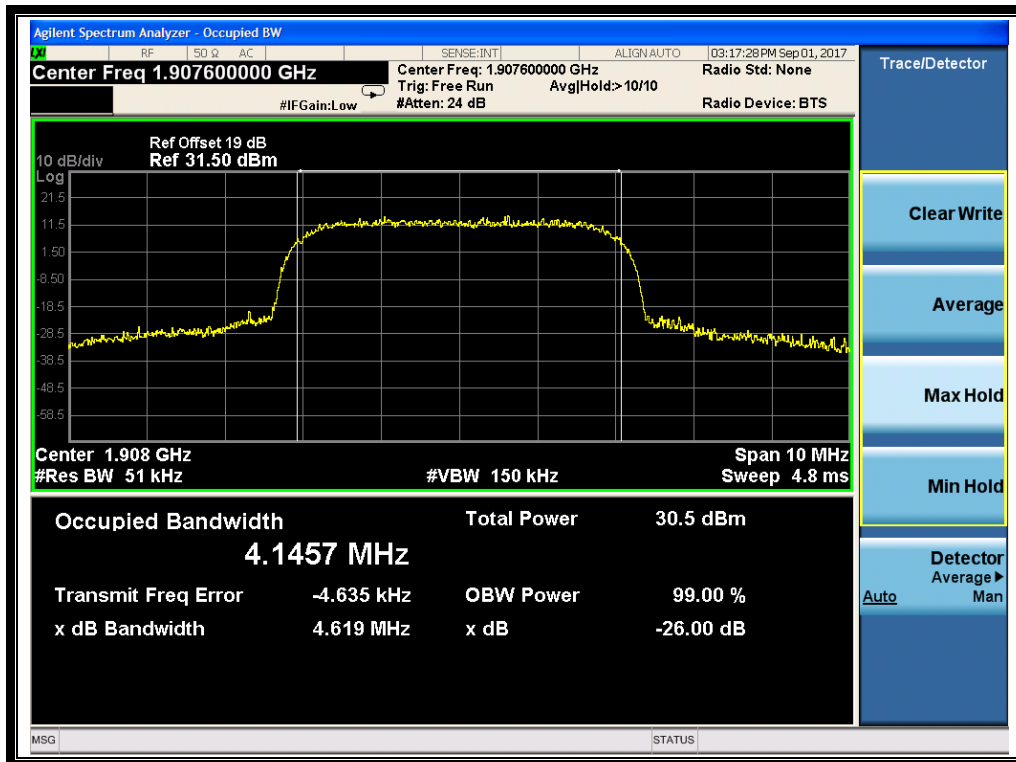


(HSUPA 1900MHz Channel = 9538)

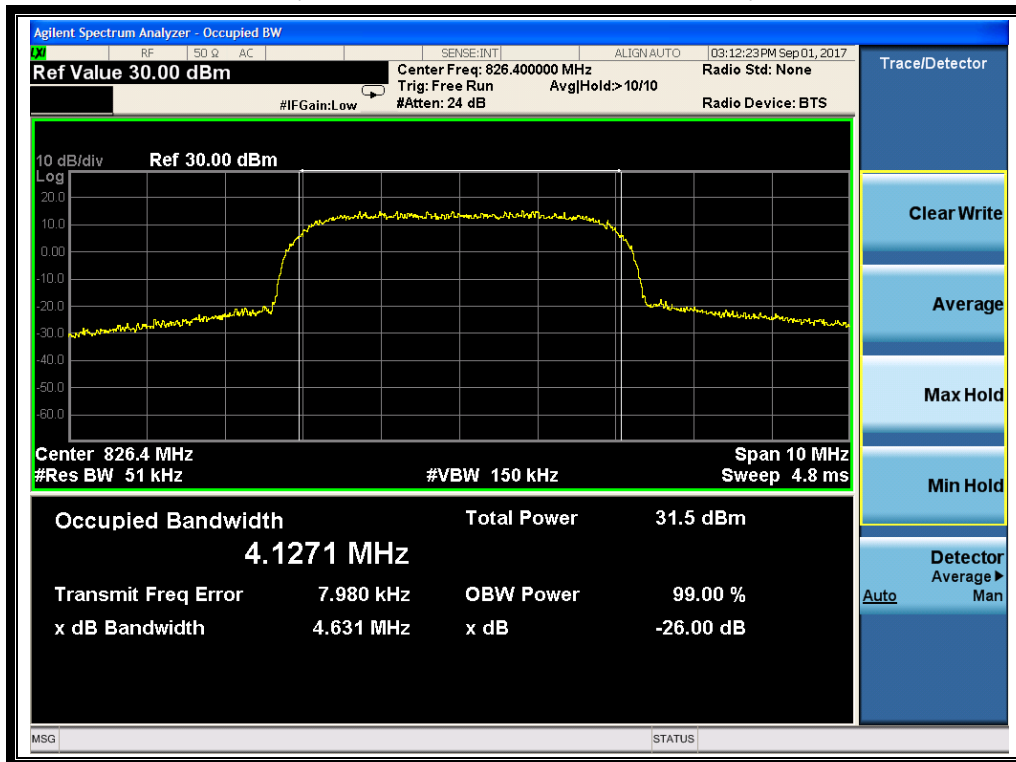


(HSPA+ 850MHz Channel = 4132)




(HSPA+ 850 MHz Channel = 4175)

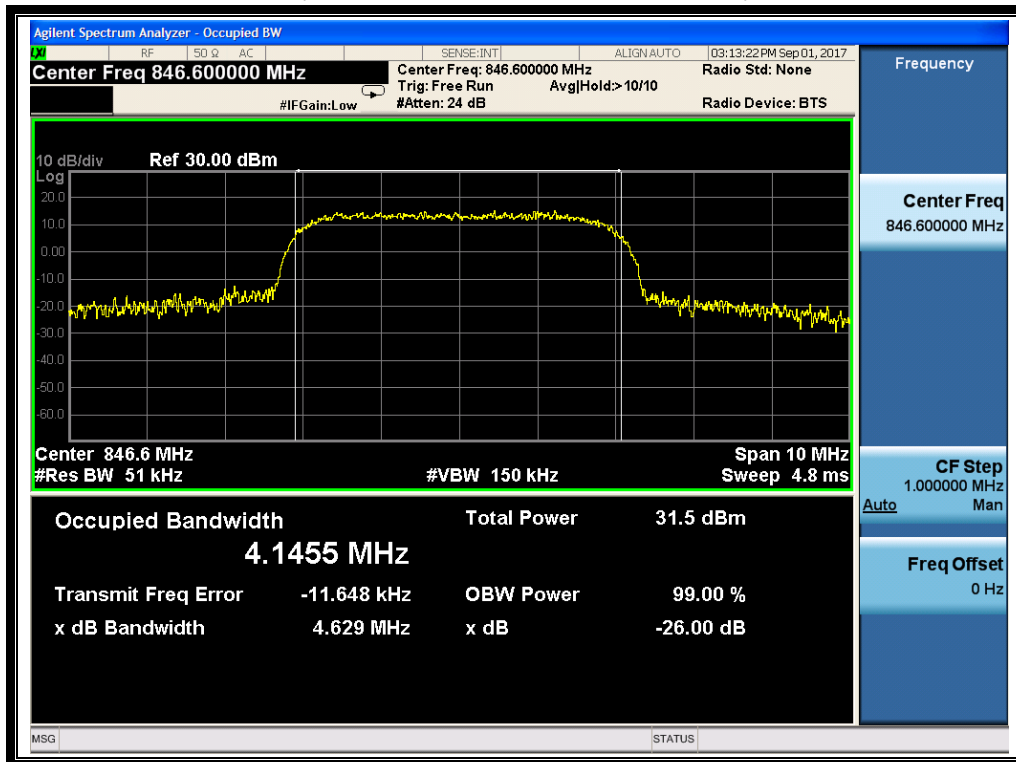


(HSPA+ 850MHz Channel = 4233)

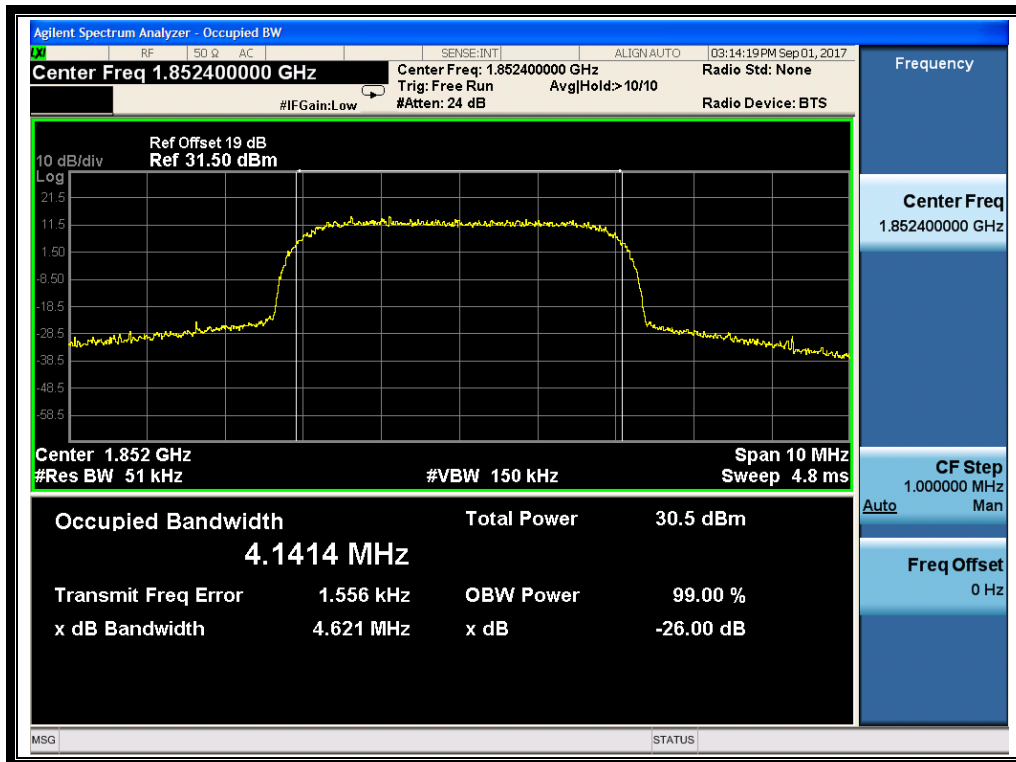

(HSPA+ 1900MHz Channel = 9262)

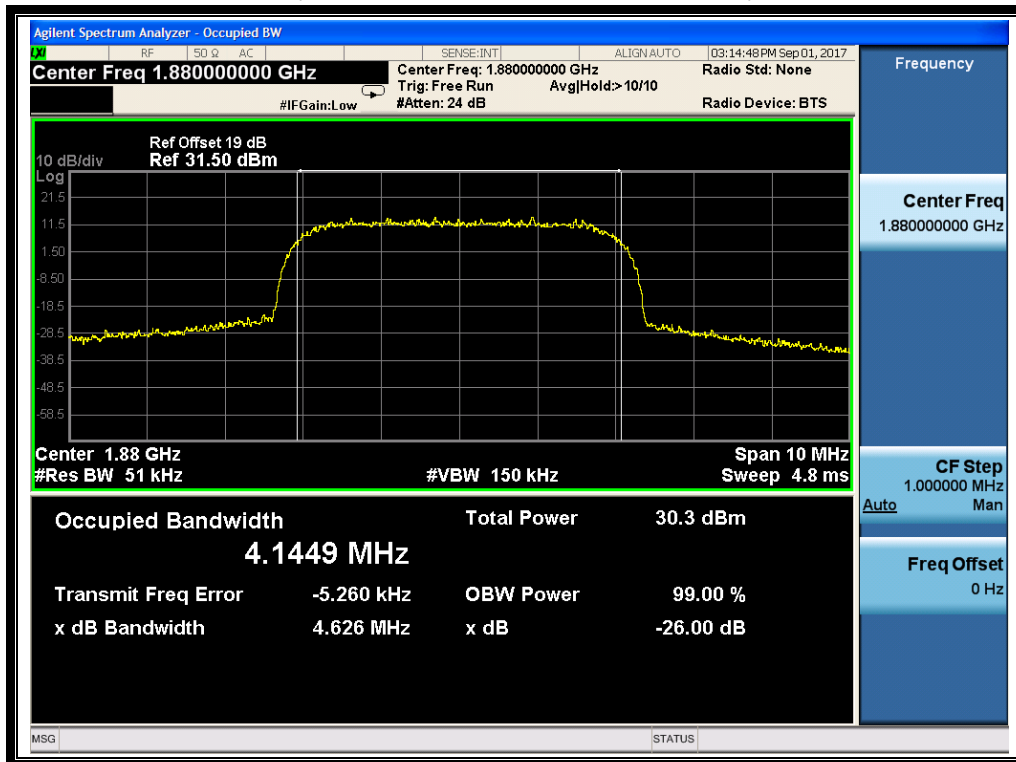

(HSPA+ 1900 MHz Channel = 9400)

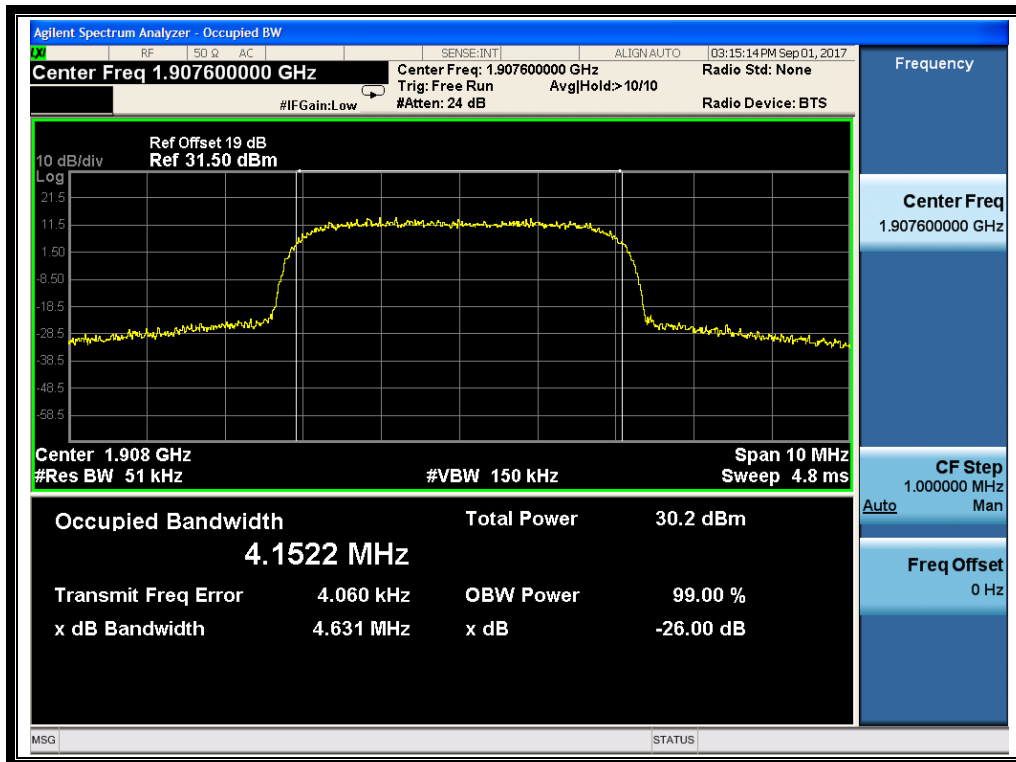

(HSPA+ 1900MHz Channel = 9538)

2.4 Frequency Stability


2.4.1 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Test Description

Test Setup:

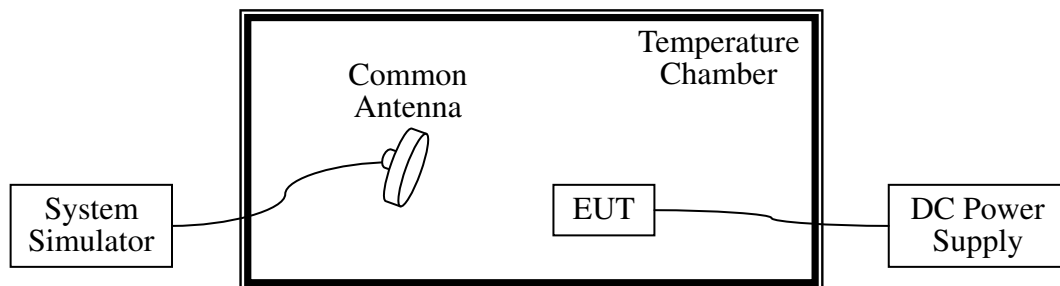

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.



2.4.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 48VDC, 57VDC and 44VDC, which are specified by the applicant; the normal temperature here used is 25°C. The frequency deviation limit of 850MHz band is ±2.5ppm, and 1900MHz is ±1ppm.

1. GPRS 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
48	-20	8.38	±2060.5	9.01	±2091.5	-8.66	±2122	PASS
	-10	-14.25		7.89		13.18		
	0	-9.74		7.97		-15.96		
	+10	4.41		12.09		24.77		
	+20	-5.08		5.11		26.18		
	+30	8.34		11.43		-9.95		
	+40	26.31		-0.89		24.77		
	+50	-13.75		1.24		19.38		
+60	-4.06	11.31	-8.59					
44	+25	-14.25		12.88		13.18		
57	+25	-9.74		15.11		-10.03		

2. GPRS 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
48	-20	-16.07	±1850.2	8.89	±1880.0	-11.8	±1909.8	PASS
	-10	27.45		18.68		1.87		
	0	-12.06		-17.66		26.59		
	+10	-17.7		-16.29		25		
	+20	-28.06		32.88		-10.21		
	+30	9.1		-10.64		27.59		
	+40	-18.5		-16.25		21.2		
	+50	19.62		12.08		-6.39		
+60	13.27	19.22	15.21					
44	+25	31.48		-26.7		1.87		
57	+25	-21.82		8.69		26.61		



3. EDGE 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
48	-20	10.68	±2060.5	-22.18	±2091.5	-2.58	±2122	<u>PASS</u>
	-10	26.45		23.99		19.46		
	0	27.34		40.01		13.46		
	+10	-12.71		-21.42		0.32		
	+20	21.48		6.88		-13.51		
	+30	6.37		2.6		29.63		
	+40	-10.9		24.9		12.46		
	+50	-17.41		15.19		-13.51		
+60	32.14	18.16	-1.58					
44	+25	-1.71	22.76	14.61				
57	+25	8.46	14.9	-38				

4. EDGE 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
48	-20	-13.42	±1850.2	14.38	±1880.0	3.36	±1909.8	<u>PASS</u>
	-10	-10.91		-15.4		-25.65		
	0	12.63		40.25		-4.13		
	+10	4.63		-19.91		-21.55		
	+20	34.56		-13.96		-24.48		
	+30	-27.48		19.91		11.71		
	+40	18.84		17.79		-3.55		
	+50	-17.37		19.48		34		
+60	26.09	-15.4	0.8					
44	+25	-11.46	-14.56	14.08				
57	+25	7.08	-13.55	32.36				



5. HSDPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
48	-20	4.52	±2066	7.56	±2087.5	12.8	±2116.5	PASS
	-10	-4.52		16.6		-8.72		
	0	19.43		8.06		6.54		
	+10	-32.34		-0.24		9.43		
	+20	4.52		-9.28		7.58		
	+30	-4.52		14.67		4.97		
	+40	20.42		-37.1		-22.3		
	+50	-29.84		23.61		-7.89		
+60	23.57	20.24	-18.78					
44	+25	4.52	-40.56	-13.32				
57	+25	-14.87	18.03	10.28				

6. HSDPA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
48	-20	15.13	±1852.4	20.88	±1880	19.21	±1907.6	PASS
	-10	18.94		-21.64		-13		
	0	27.67		-17.05		2.27		
	+10	-20.6		-17.53		4.72		
	+20	-17.89		-4.82		-11.6		
	+30	17.97		-16.29		-7.08		
	+40	-9.32		25.13		4.27		
	+50	10.4		-16.23		4.72		
+60	25.07	-4.88	28.47					
44	+25	25.73	4.27	0.14				
57	+25	-11.13	8.1	20.96				



7. HSUPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
48	-20	5.7	±2066	30.64	±2087.5	-6.42	±2116.5	PASS
	-10	1.02		26.2		6.03		
	0	-6.74		5.69		6.38		
	+10	14.39		0.38		20.19		
	+20	-3.75		-6.66		-8.88		
	+30	21.53		14.29		-5.42		
	+40	-2.37		-3.48		5.93		
	+50	-13.84		21.23		7.52		
+60	-7.9	11.86	-1.57					
44	+25	23.49	-9.01	13.18				
57	+25	-18.77	19.65	3.54				

8. HSUPA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
48	-20	10.82	±1852.4	9.32	±1880	26.79	±1907.6	PASS
	-10	-21.31		23.19		22.35		
	0	-15.77		31.78		1.84		
	+10	-4.42		-12.55		-3.47		
	+20	-3.97		-10.14		-10.51		
	+30	-10.62		16.12		10.44		
	+40	20.27		-11.17		-7.33		
	+50	5.65		8.55		17.38		
+60	19.78	23.22	8.01					
44	+25	-8.55	23.88	-12.86				
57	+25	1.07	-11.48	26.79				



9. HSPA+ 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
48	-20	-7.28	±2066	8.07	±2087.5	-0.12	±2116.5	PASS
	-10	18.44		-19.35		-12.31		
	0	11.1		17.32		-16.75		
	+10	-14.48		-5.81		-12.24		
	+20	7.33		18.91		1.91		
	+30	-8.08		17.32		-7.58		
	+40	31.04		-17.81		5.84		
	+50	5.09		19.91		23.81		
+60	-29.15	13.52	-16.25					
44	+25	26.26		-13.08		-6.56		
57	+25	-5.64		7.83		12.69		

10. HSPA+ 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
48	-20	22.31	±1852.4	11.46	±1880	-14.46	±1907.6	PASS
	-10	-13.71		12.06		-4.05		
	0	16.5		18.22		46.14		
	+10	8.73		-27.72		2.6		
	+20	-18.9		-17.31		-3.04		
	+30	4.63		31.88		-13.46		
	+40	-5.64		-11.66		23.79		
	+50	12.99		-17.3		-3.84		
+60	-27.76	23.02	34.28					
44	+25	25.88		4.57		18.84		
57	+25	14.36		-0.57		-21.3		



2.5 Conducted Out of Band Emissions

2.5.1 Requirement

According to FCC section 22.917(a) and FCC section 24.238(a) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GPRS 850MHz	128	824.2	-21.62	Plot A1 to A1.1	-13	PASS
	190	836.6	-22.12	Plot A2 to A2.1		PASS
	251	848.8	-22.17	Plot A3 to A3.1		PASS
GPRS 1900MHz	512	1850.2	-22.34	Plot B1 to B1.1	-13	PASS
	661	1880.0	-22.36	Plot B2 to B2.1		PASS
	810	1909.8	-22.14	Plot B3 to B3.1		PASS
EGPRS 850MHz	128	824.2	-32.02	Plot E1 to E1.1	-13	PASS
	190	836.6	-31.02	Plot E2 to E2.1		PASS
	251	848.8	-31.34	Plot E3 to E3.1		PASS
EGPRS 1900MHz	512	1850.2	-19.47	Plot F1 to F1.1	-13	PASS
	661	1880.0	-18.44	Plot F2 to F2.1		PASS
	810	1909.8	-18.50	Plot F3 to F3.1		PASS
HSDPA 850MHz	4132	826.4	< -25	Plot I1 to I1.1	-13	PASS
	4175	835.0	< -25	Plot I2 to I2.1		PASS
	4233	846.6	< -25	Plot I3 to I3.1		PASS
HSDPA 1900MHz	9262	1852.4	< -25	Plot J1 to J1.1	-13	PASS
	9400	1880.0	< -25	Plot J2 to J2.1		PASS
	9538	1907.6	< -25	Plot J3 to J3.1		PASS
HSUPA 850MHz	4132	826.4	< -25	Plot K1 to K1.1	-13	PASS
	4175	835.0	< -25	Plot K2 to K2.1		PASS
	4233	846.6	< -25	Plot K3 to K3.1		PASS




Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
HSUPA 1900MHz	9262	1852.4	< -25	Plot L1 to L1.1	-13	PASS
	9400	1880.0	< -25	Plot L2 to L2.1		PASS
	9538	1907.6	< -25	Plot L3 to L3.1		PASS
HSPA+ 850MHz	4132	826.4	< -25	Plot M1 to M1.1	-13	PASS
	4175	835.0	< -25	Plot M2 to M2.1		PASS
	4233	846.6	< -25	Plot M3 to M3.1		PASS
HSPA+ 1900MHz	9262	1852.4	< -25	Plot N1 to N1.1	-13	PASS
	9400	1880.0	< -25	Plot N2 to N2.1		PASS
	9538	1907.6	< -25	Plot N3 to N3.1		PASS

Test Plots for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

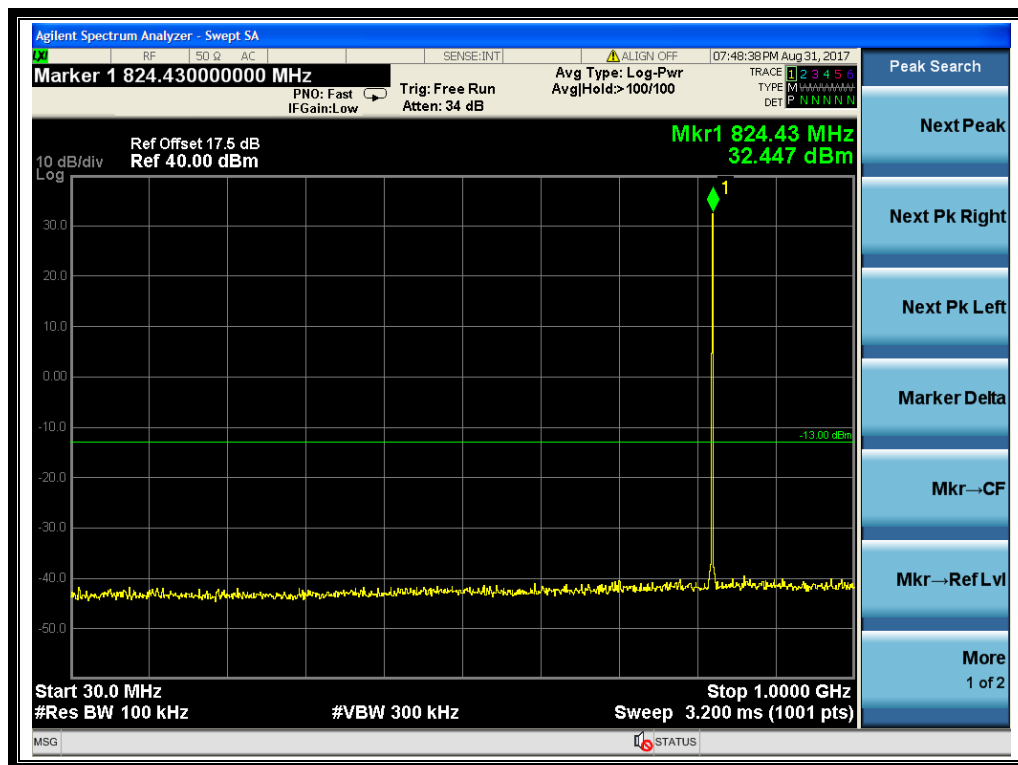


(Plot A1: GPRS 850MHz Channel = 128, 30MHz to 1GHz)

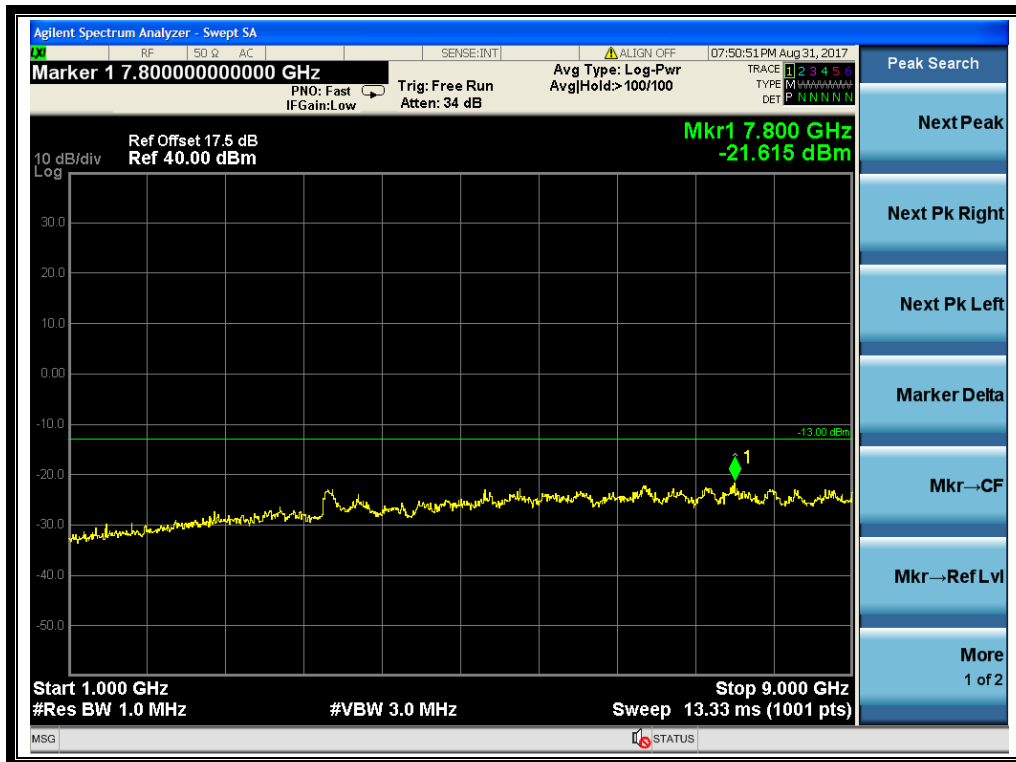


(Plot A1.1: GPRS 850MHz Channel = 128, 1GHz to 9GHz)

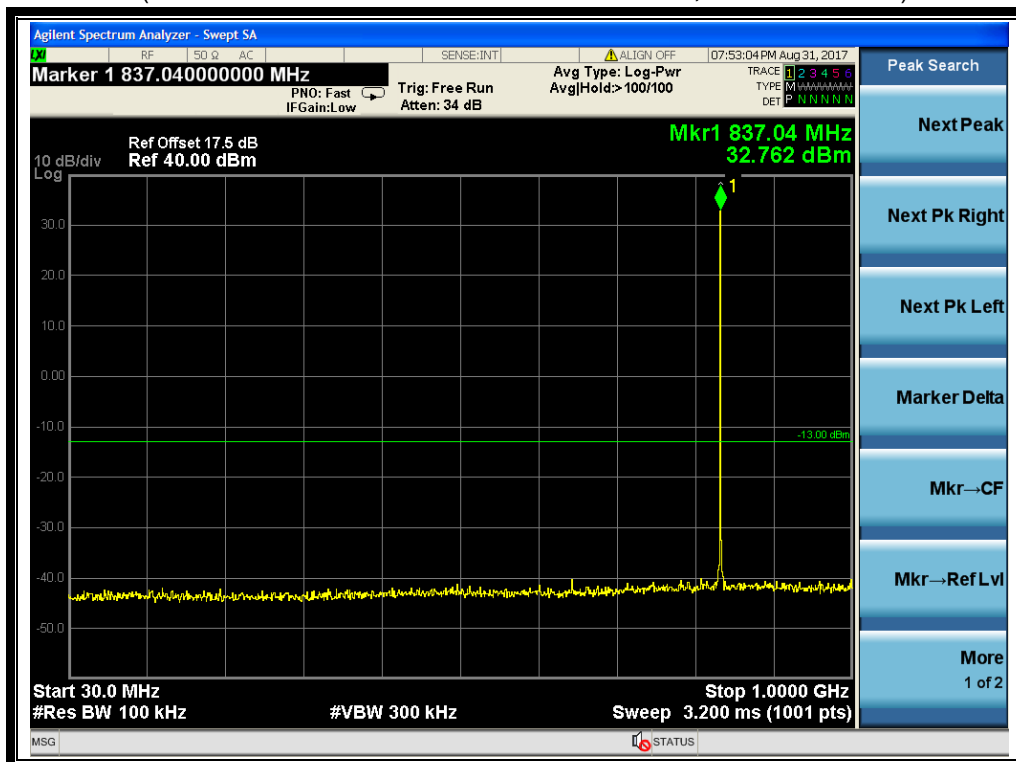


(Plot A2: GPRS 850MHz Channel = 190, 30MHz to 1GHz)

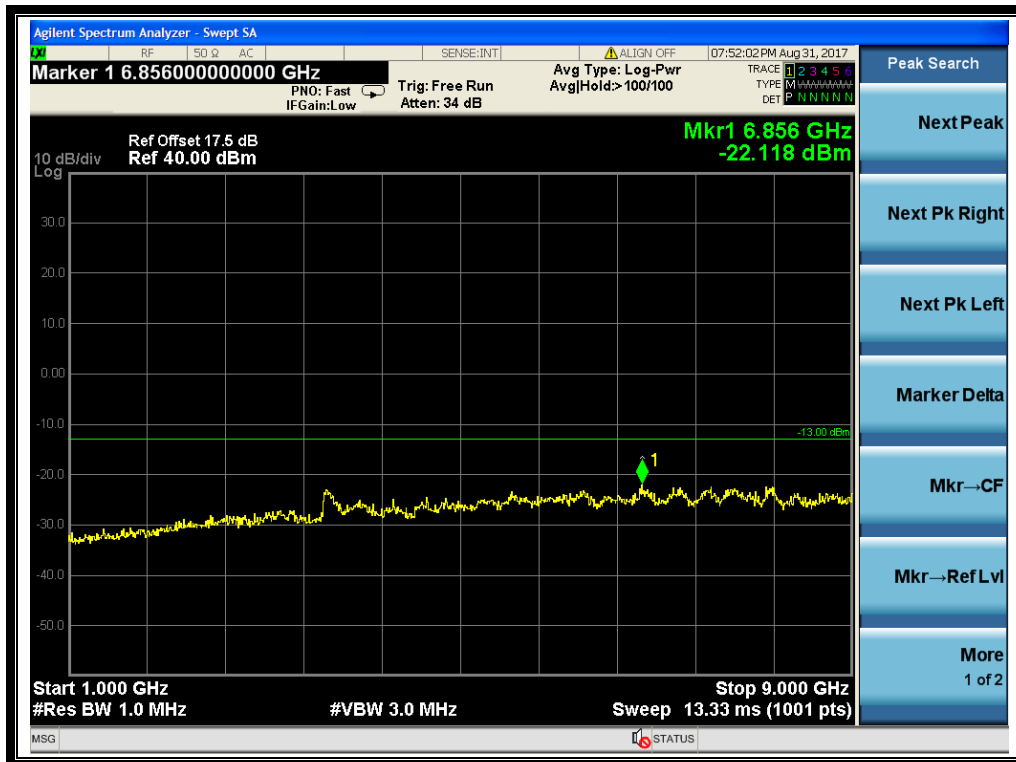


(Plot A2.1: GPRS 850MHz Channel = 190, 1GHz to 9GHz)

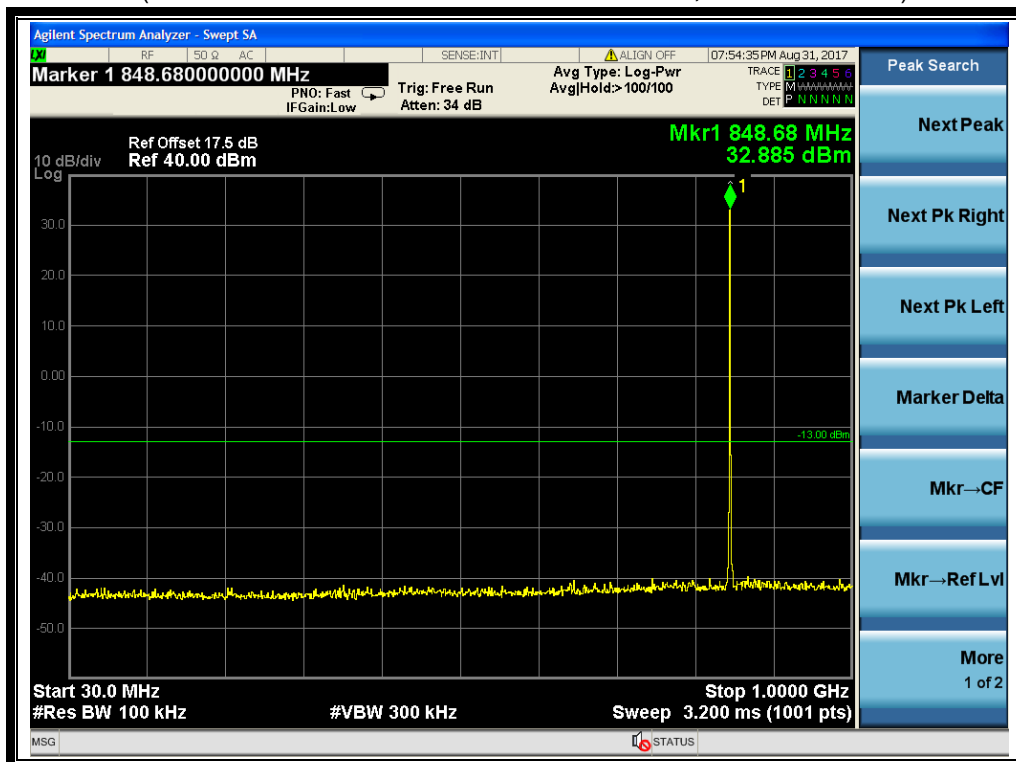


(Plot A3: GPRS 850MHz Channel = 251, 30MHz to 1GHz)

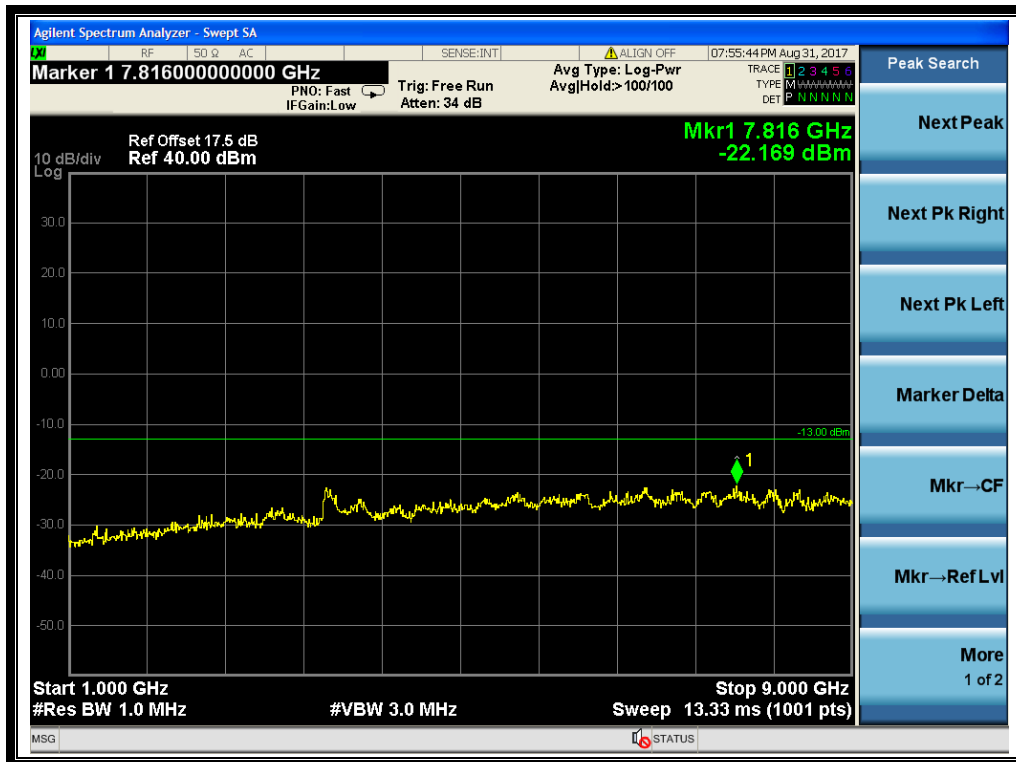


(Plot A3.1: GPRS 850MHz Channel = 251, 1GHz to 9GHz)

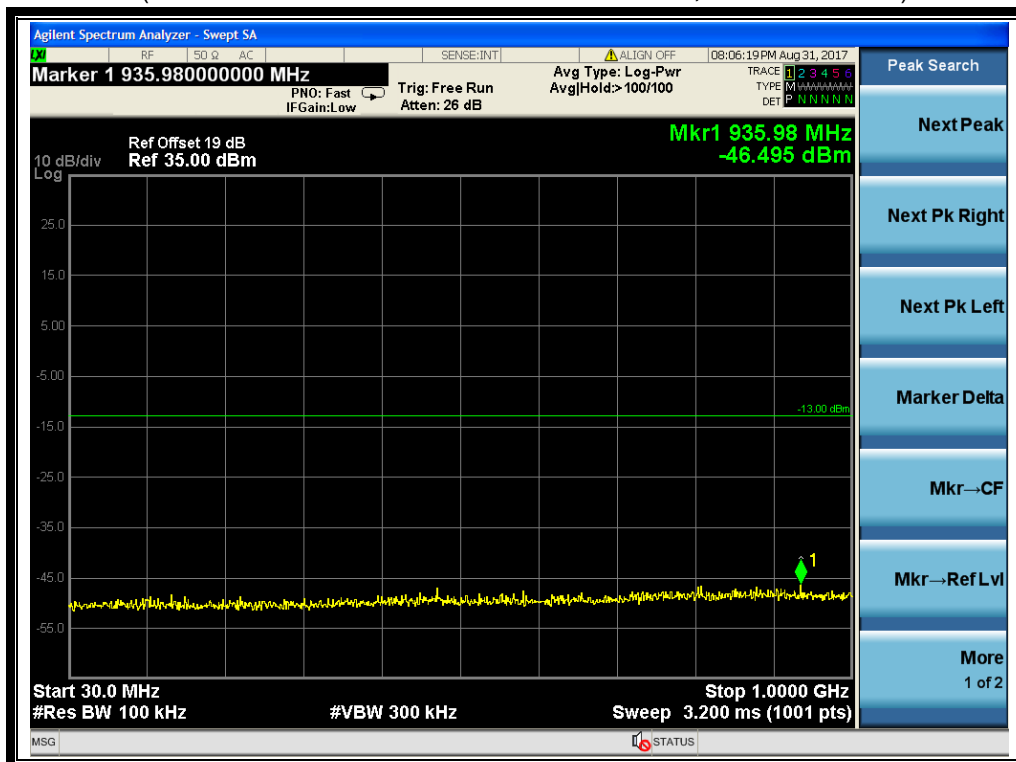


(Plot B1: GPRS 1900MHz Channel = 512, 30MHz to 1GHz)

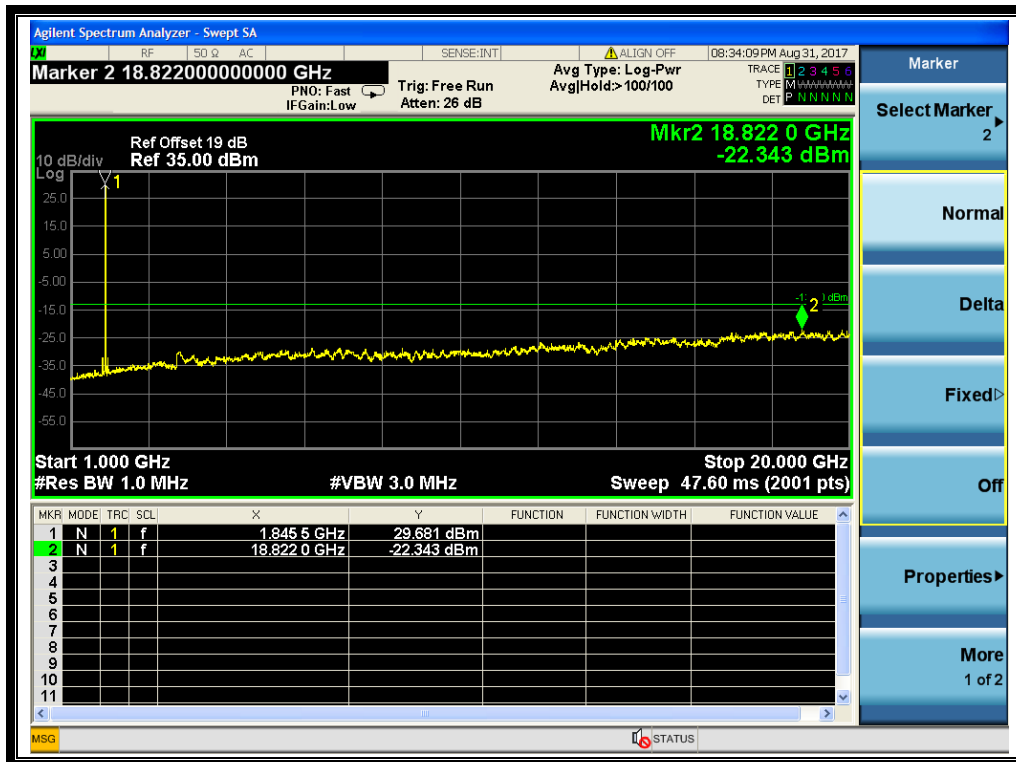


(Plot B1.1: GPRS 1900MHz Channel = 512, 1GHz to 20GHz)

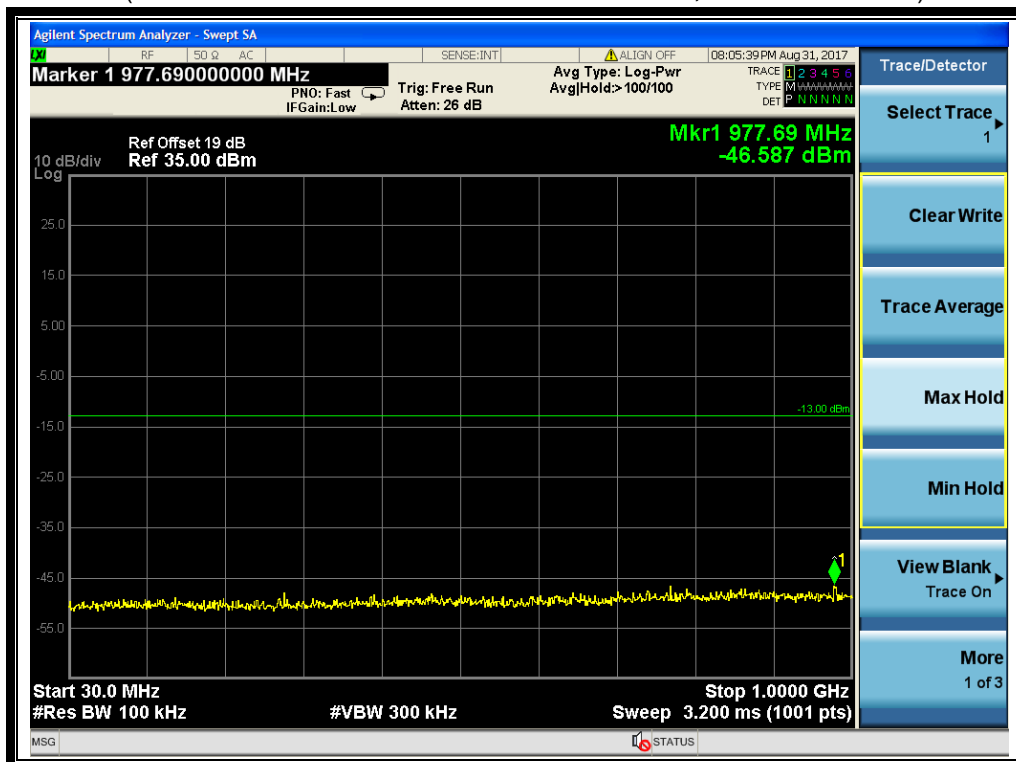


(Plot B2: GPRS 1900MHz Channel = 661, 30MHz to 1GHz)

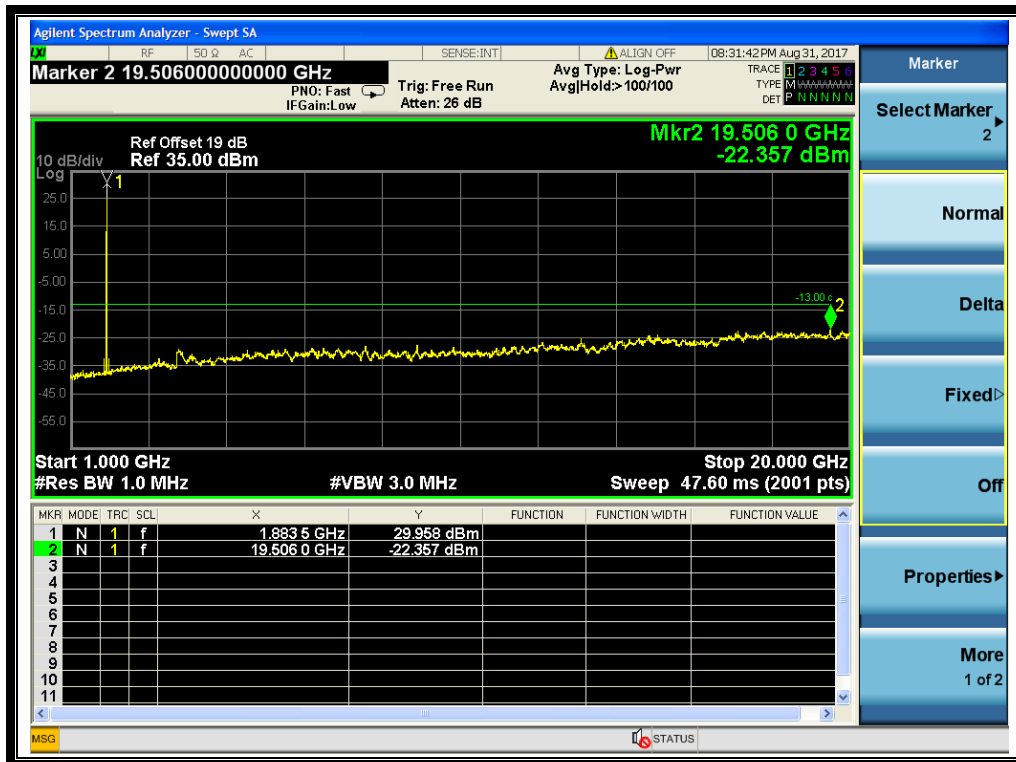


(Plot B2.1: GPRS 1900MHz Channel = 661, 1GHz to 20GHz)

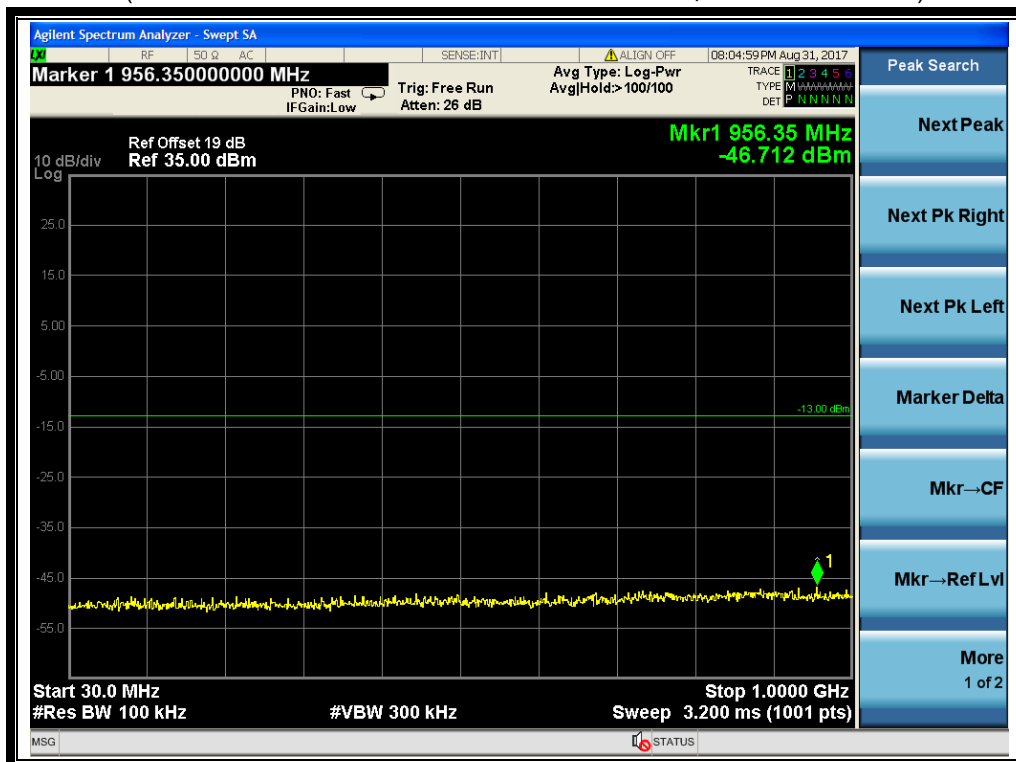


(Plot B3: GPRS 1900MHz Channel = 810, 30MHz to 1GHz)

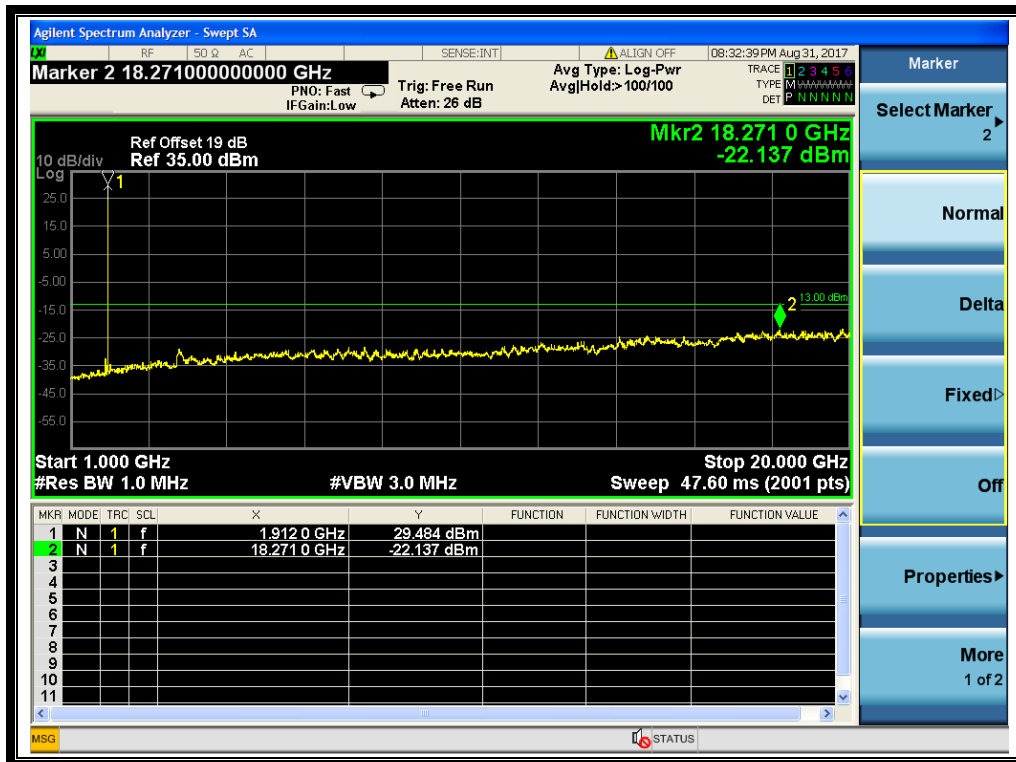


(Plot B3.1: GPRS 1900MHz Channel = 810, 1GHz to 20GHz)

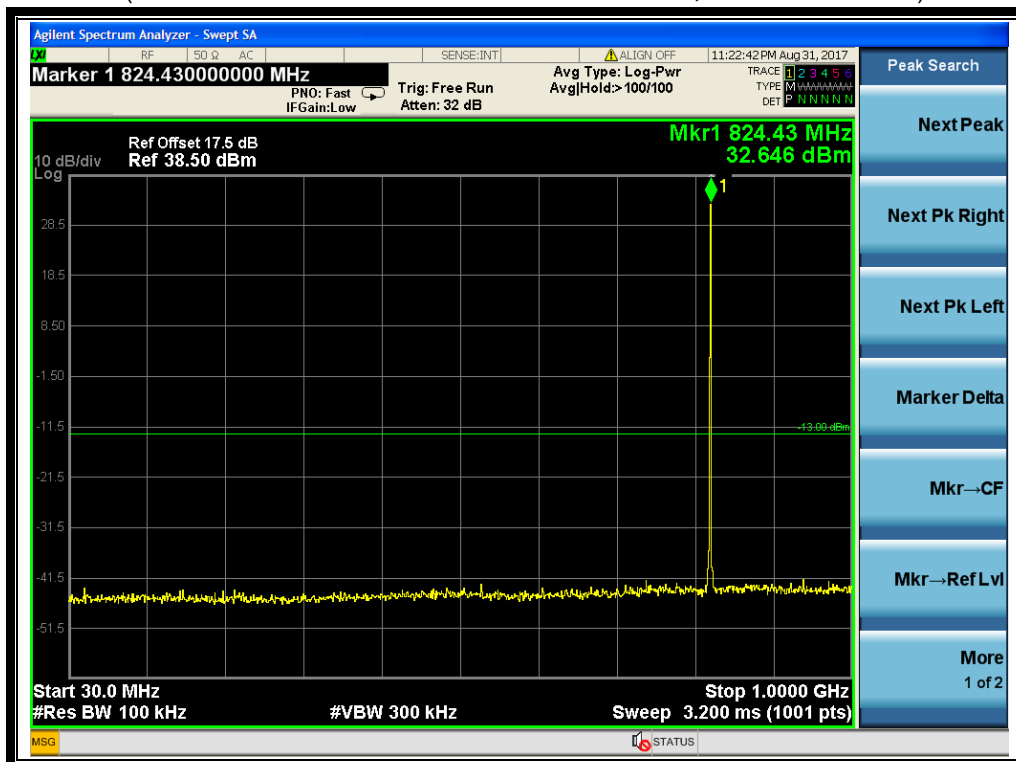

(Plot E1: EGPRS 850MHz Channel = 128, 30MHz to 1GHz)

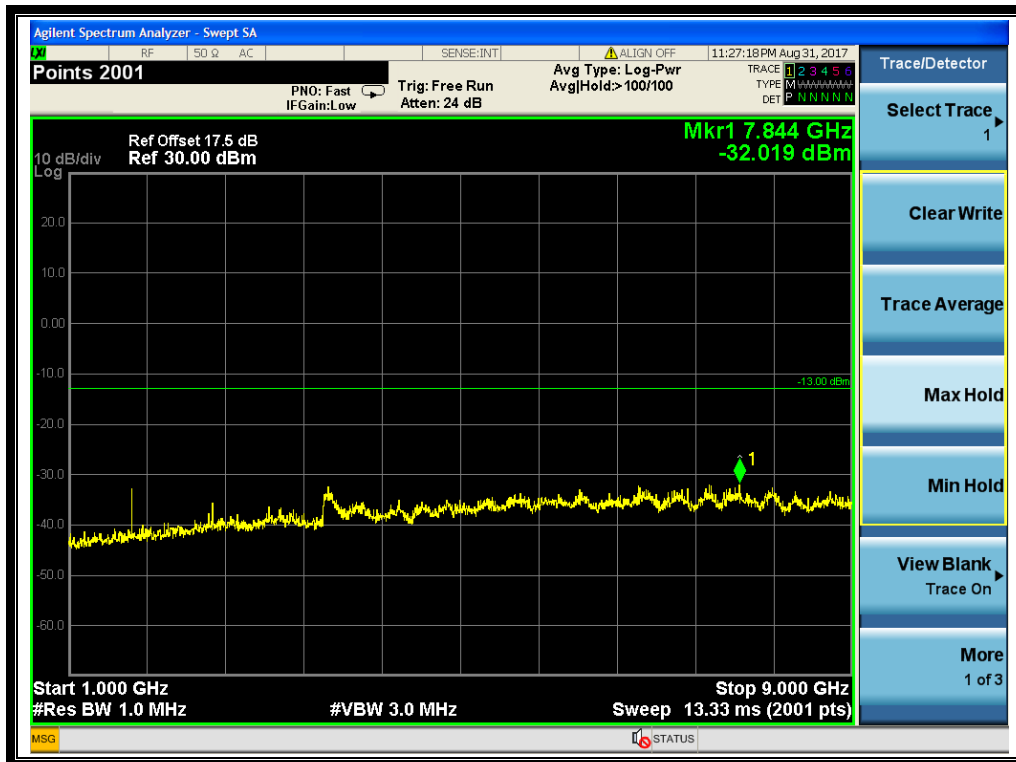


(Plot E1.1: EGPRS 850MHz Channel = 128, 1GHz to 9GHz)

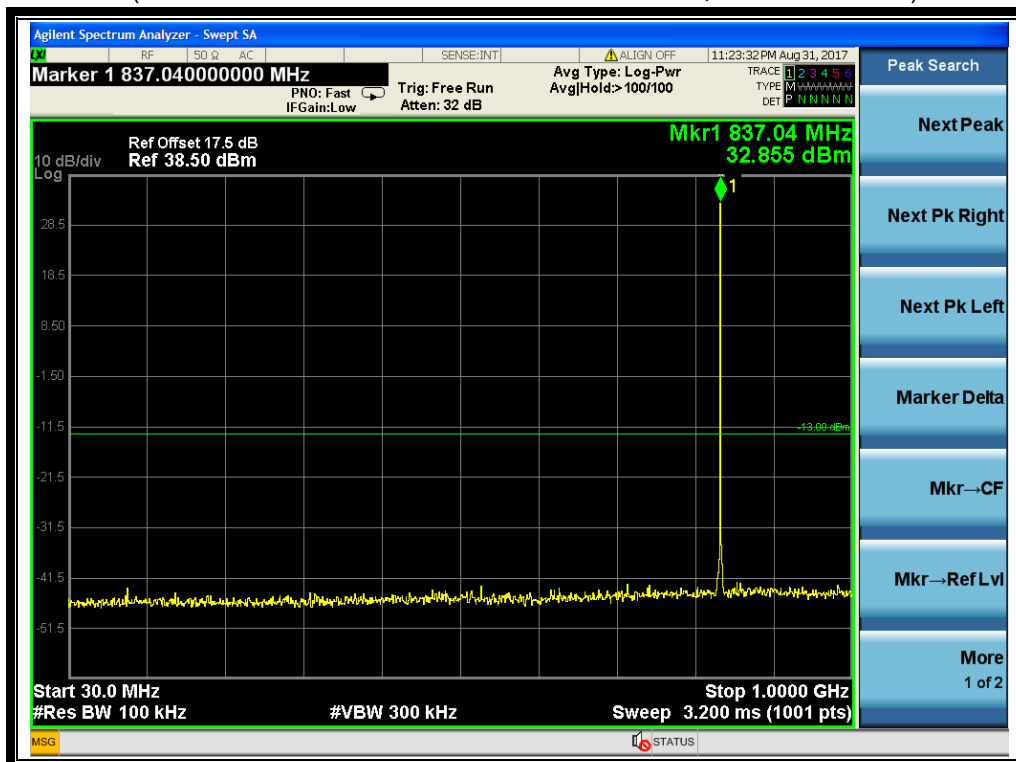


(Plot E2: EGPRS 850MHz Channel = 190, 30MHz to 1GHz)




(Plot E2.1: EGPRS 850MHz Channel = 190, 1GHz to 9GHz)

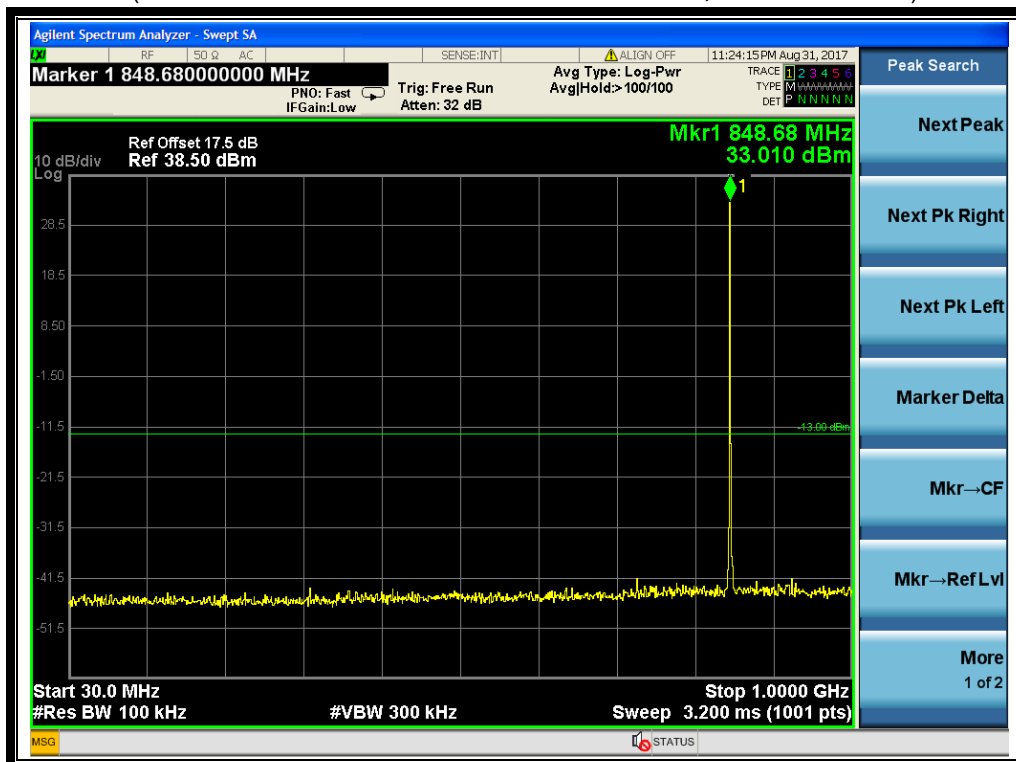


(Plot E3: EGPRS 850MHz Channel = 251, 30MHz to 1GHz)

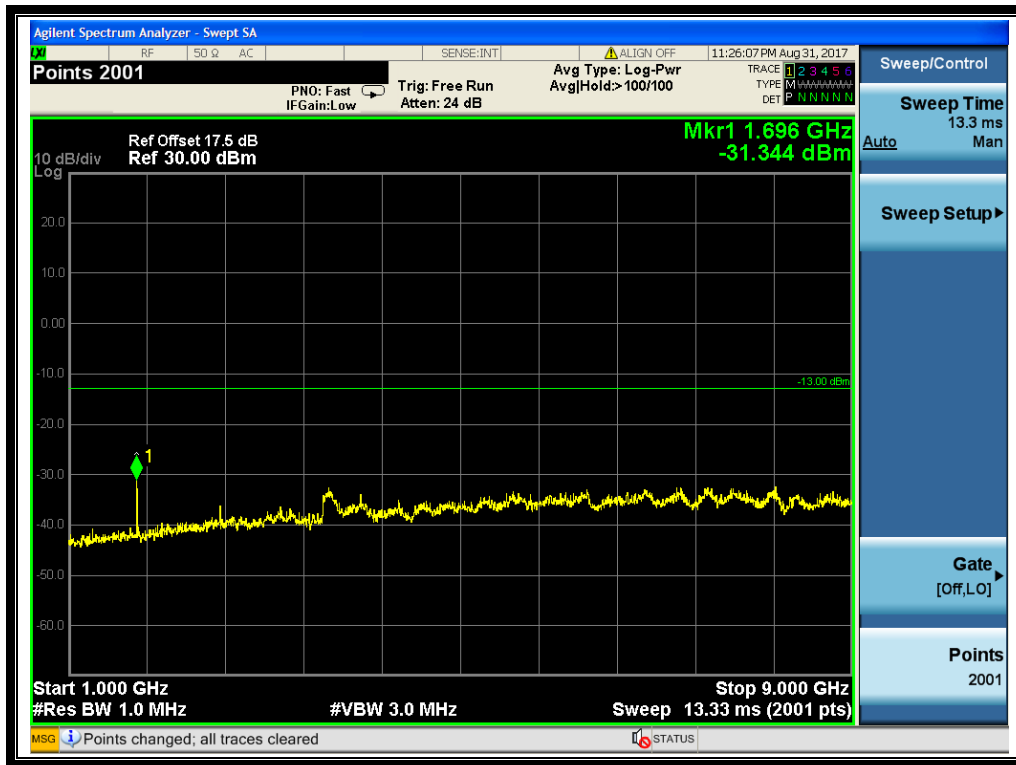


(Plot E3.1: EGPRS 850MHz Channel = 251, 1GHz to 9GHz)

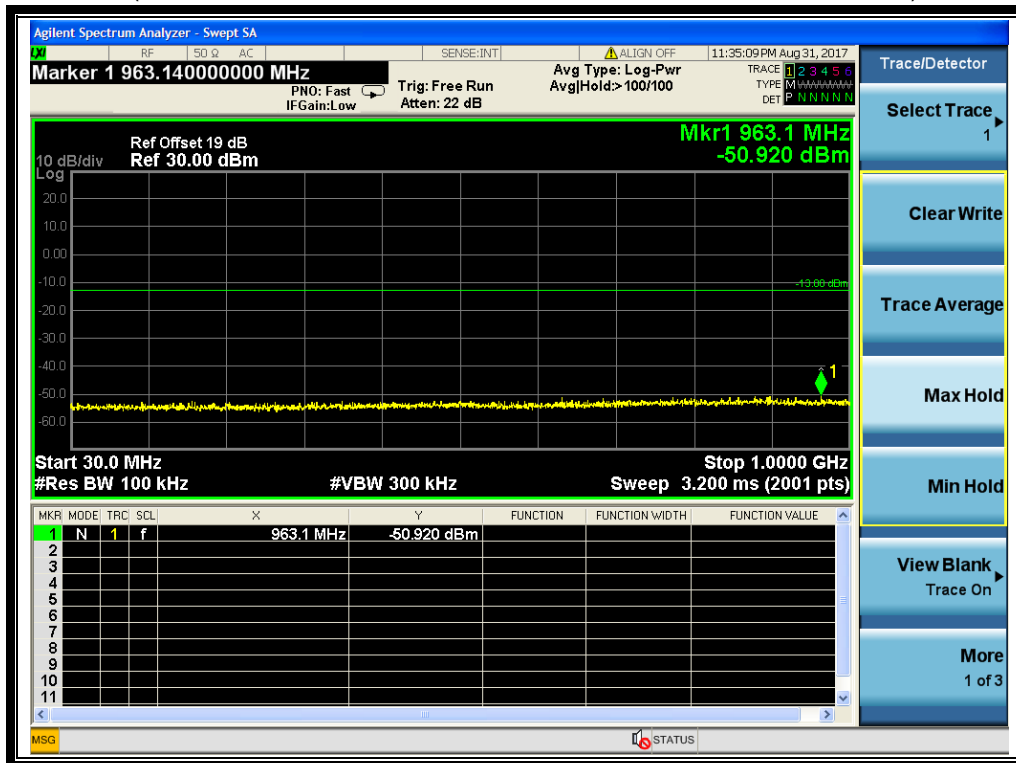


(Plot F1: EGPRS 1900MHz Channel = 512, 30MHz to 1GHz)

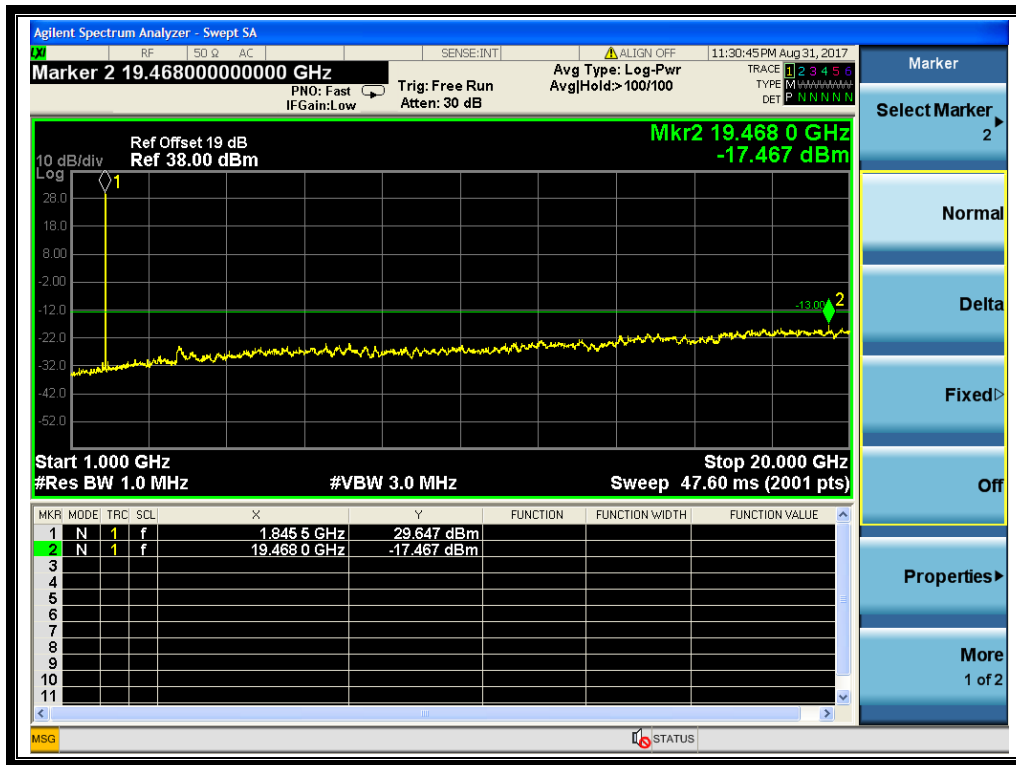


(Plot F1.1: EGPRS 1900MHz Channel = 512, 1GHz to 20GHz)

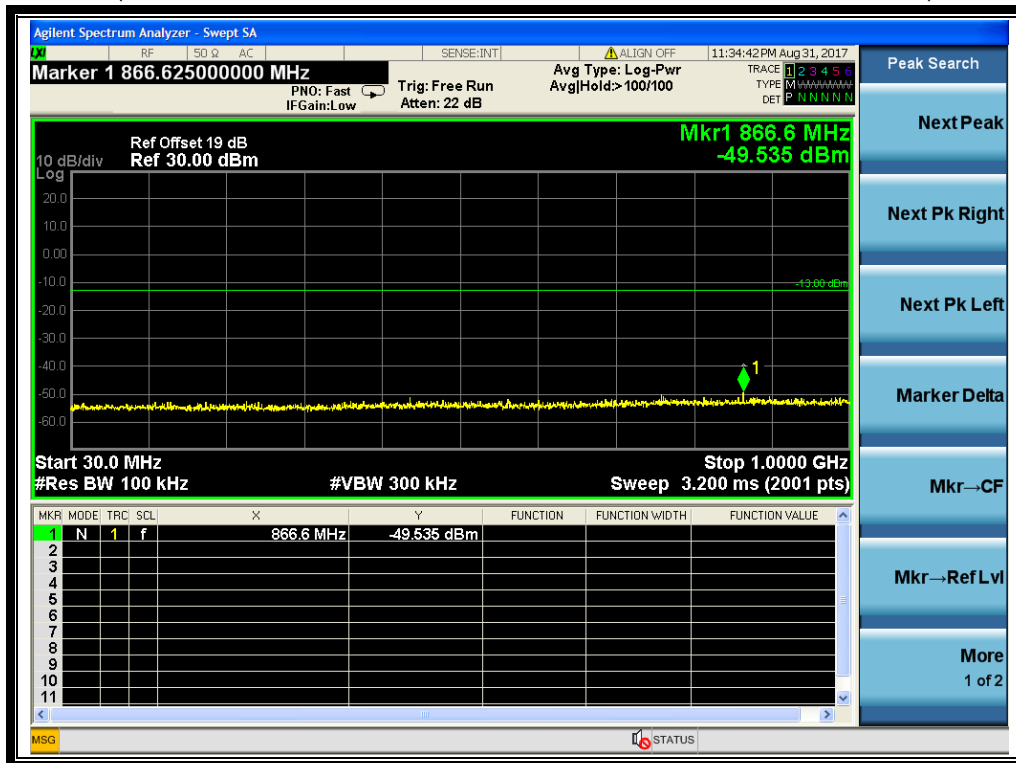


(Plot F2: EGPRS 1900MHz Channel = 661, 30MHz to 1GHz)

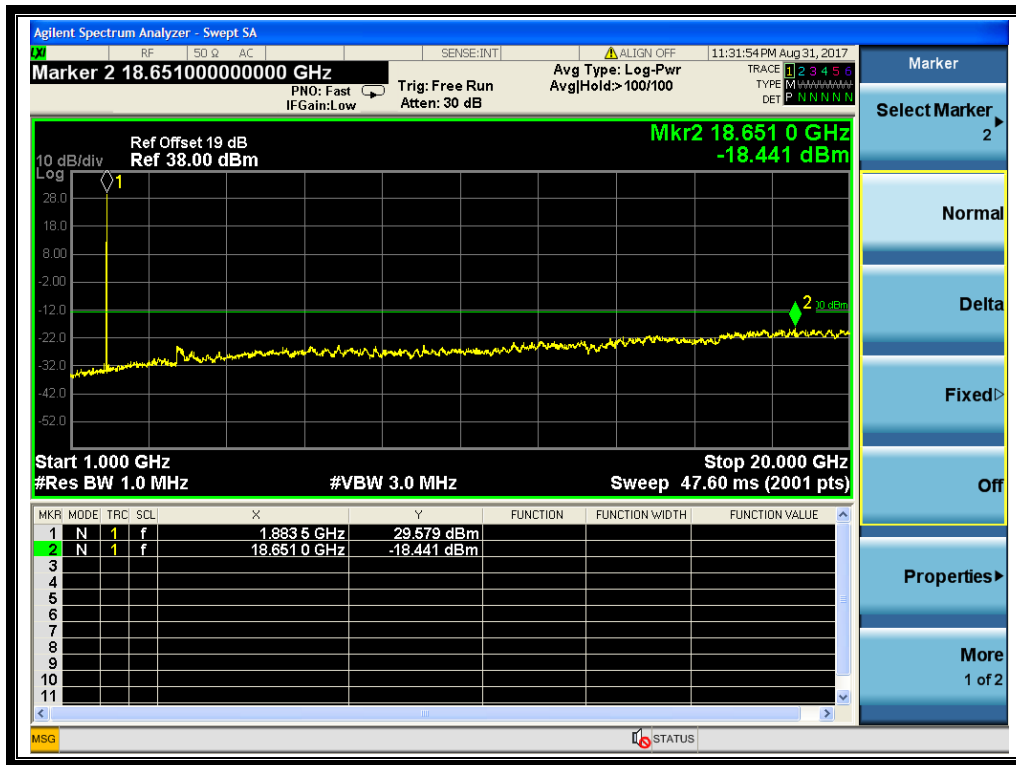


(Plot F2.1: EGPRS 1900MHz Channel = 661, 1GHz to 20GHz)

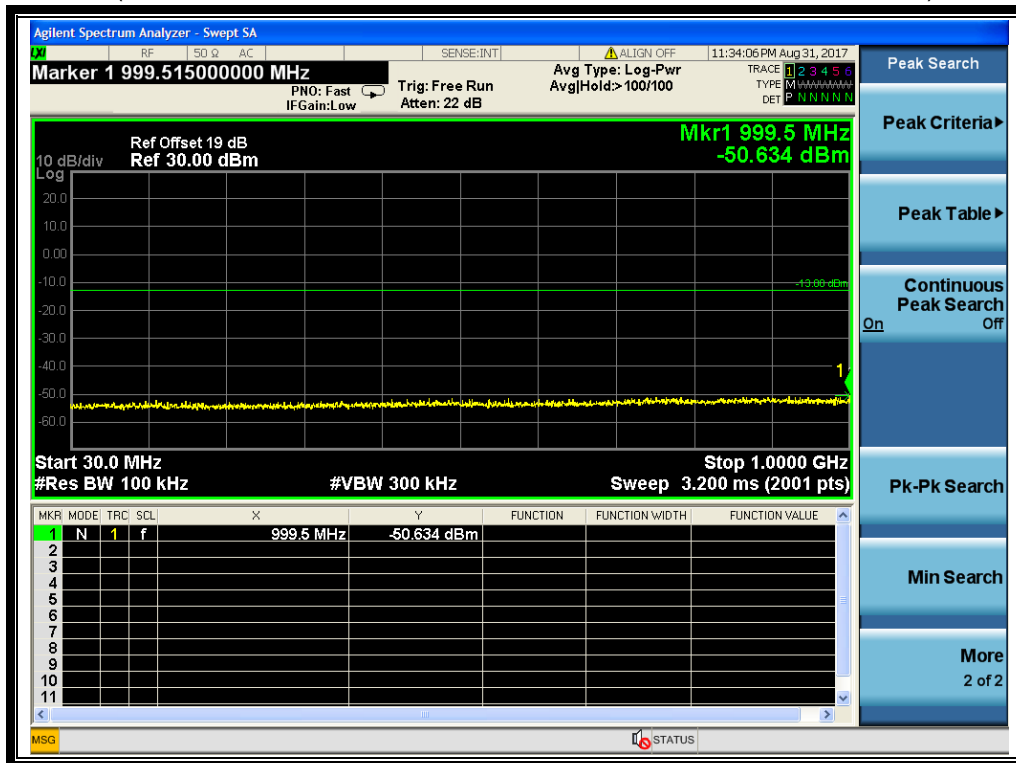


(Plot F3: EGPRS 1900MHz Channel = 810, 30MHz to 1GHz)

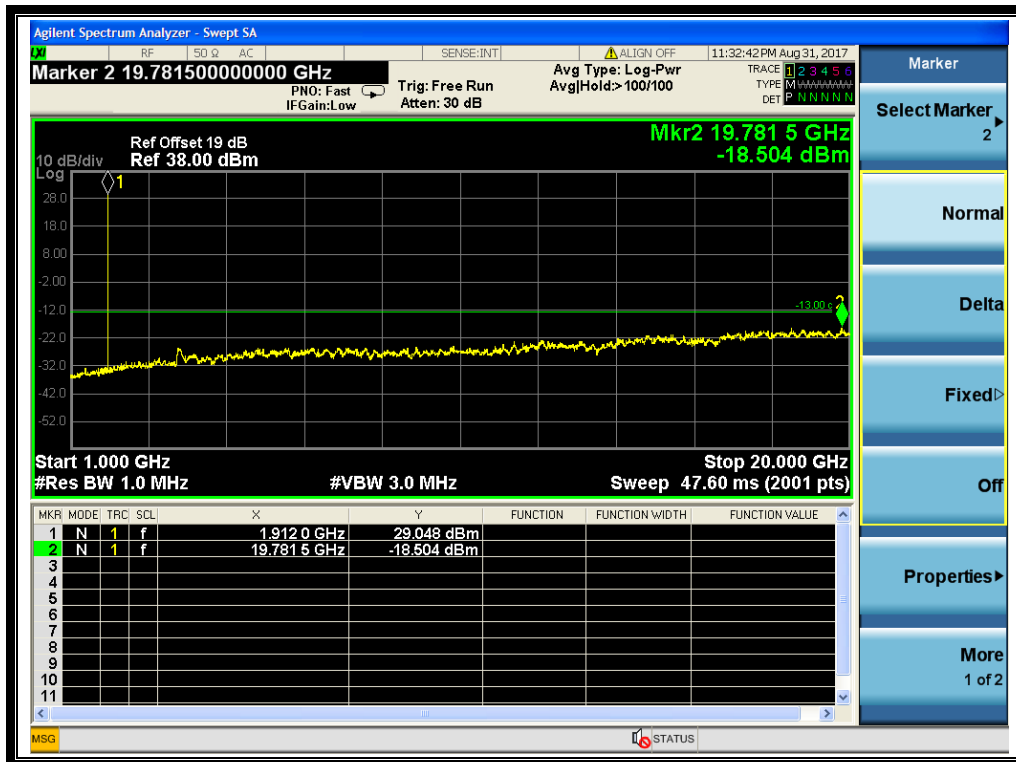


(Plot F3.1: EGPRS 1900MHz Channel = 810, 1GHz to 20GHz)

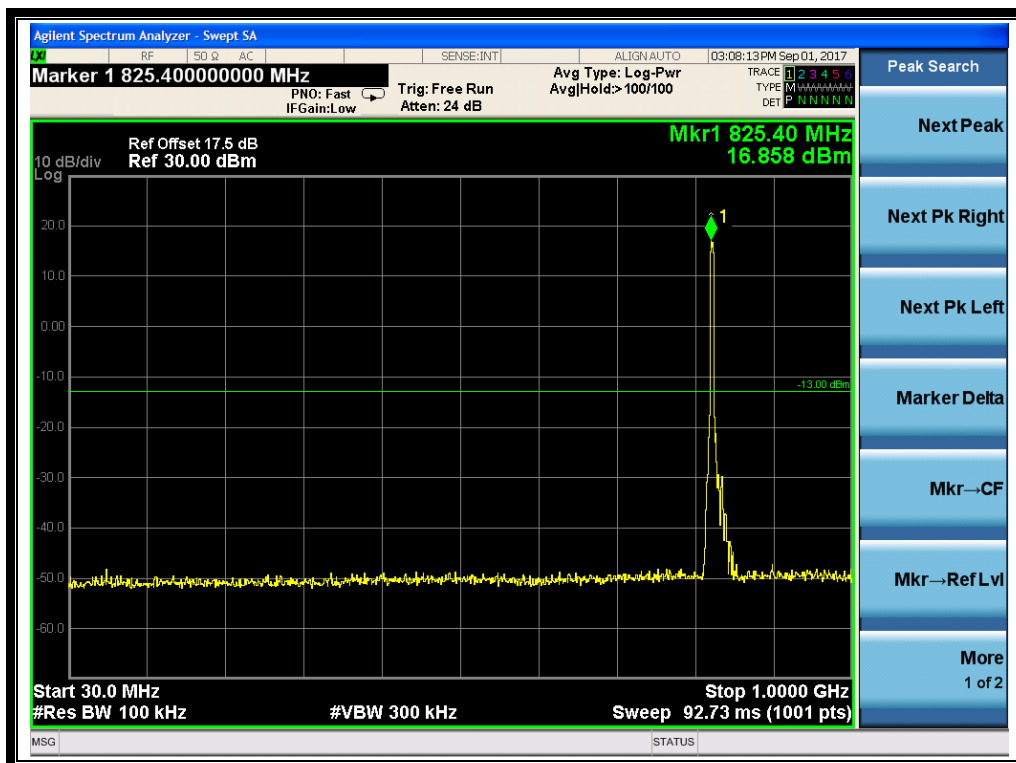


(Plot I1: HSDPA 850MHz Channel = 4132, 30MHz to 1GHz)

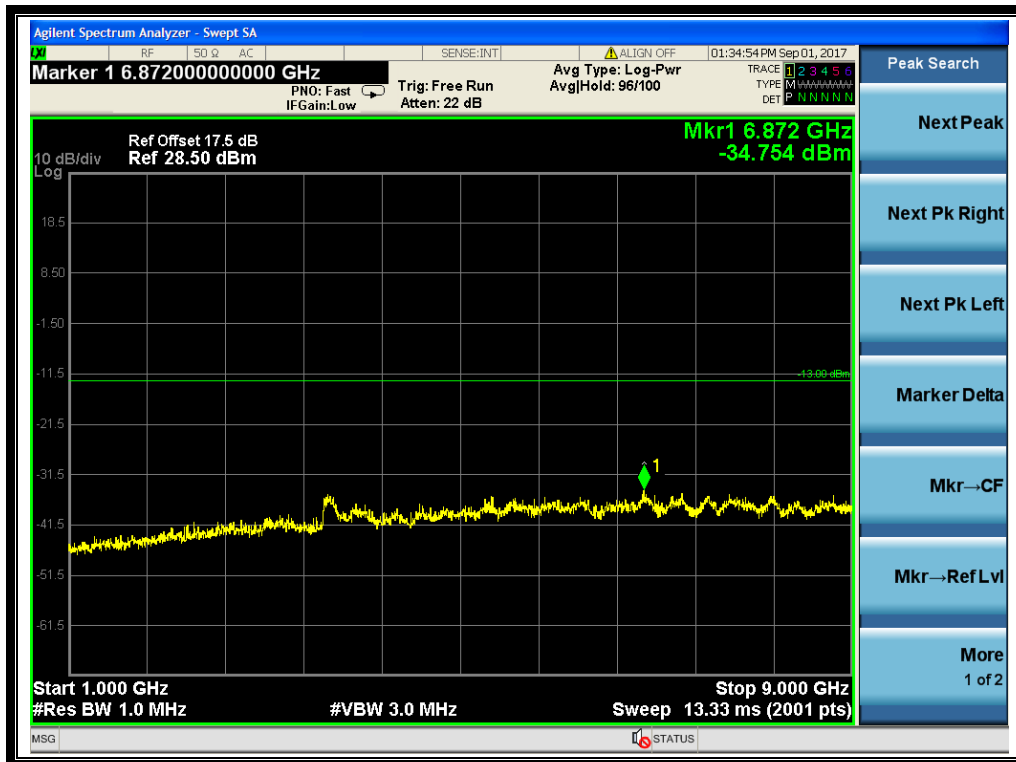


(Plot I1.1: HSDPA 850MHz Channel = 4132, 1GHz to 9GHz)

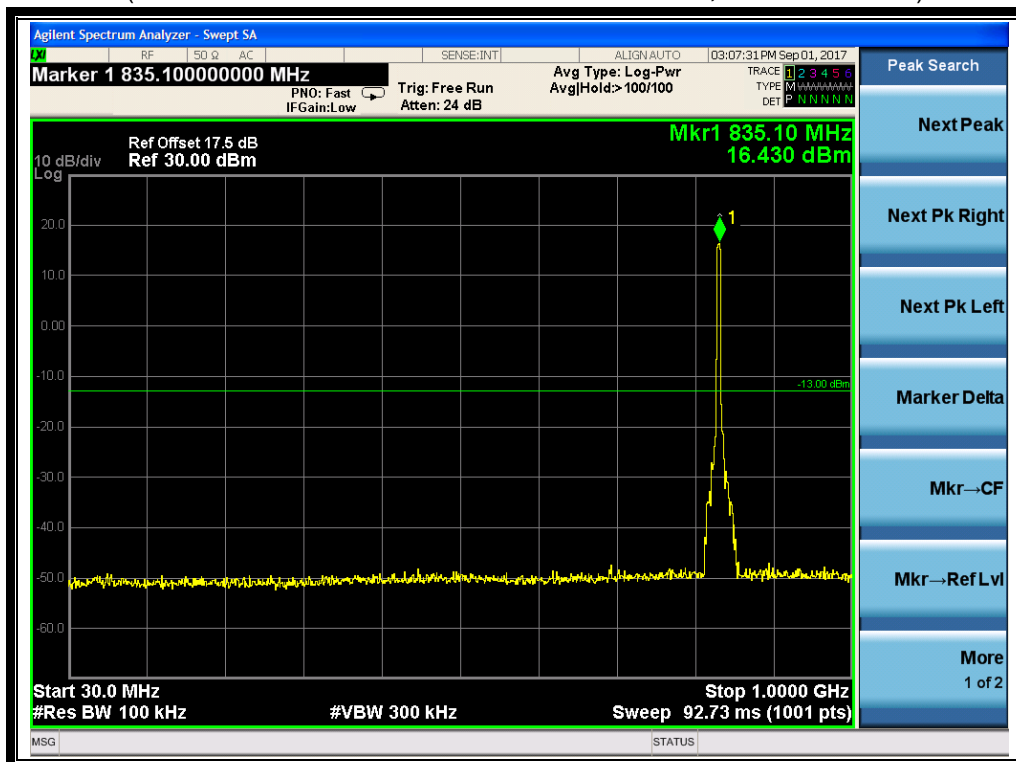


(Plot I2: HSDPA 850MHz Channel = 4175, 30MHz to 1GHz)

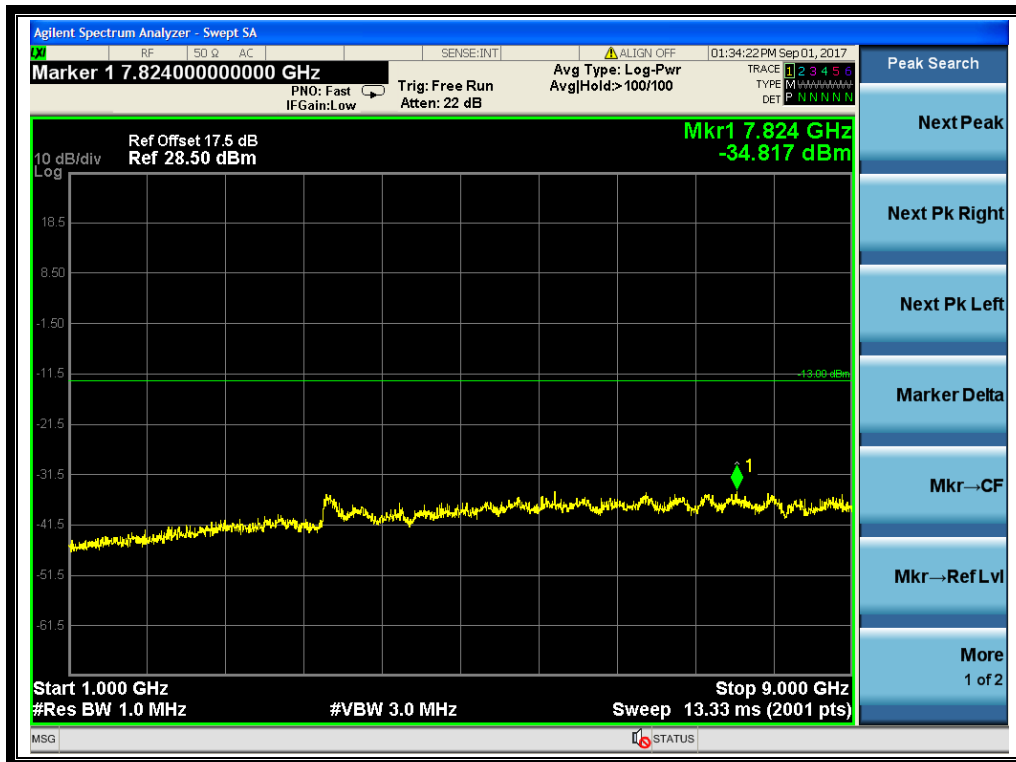


(Plot I2.1: HSDPA 850MHz Channel = 4175, 1GHz to 9GHz)

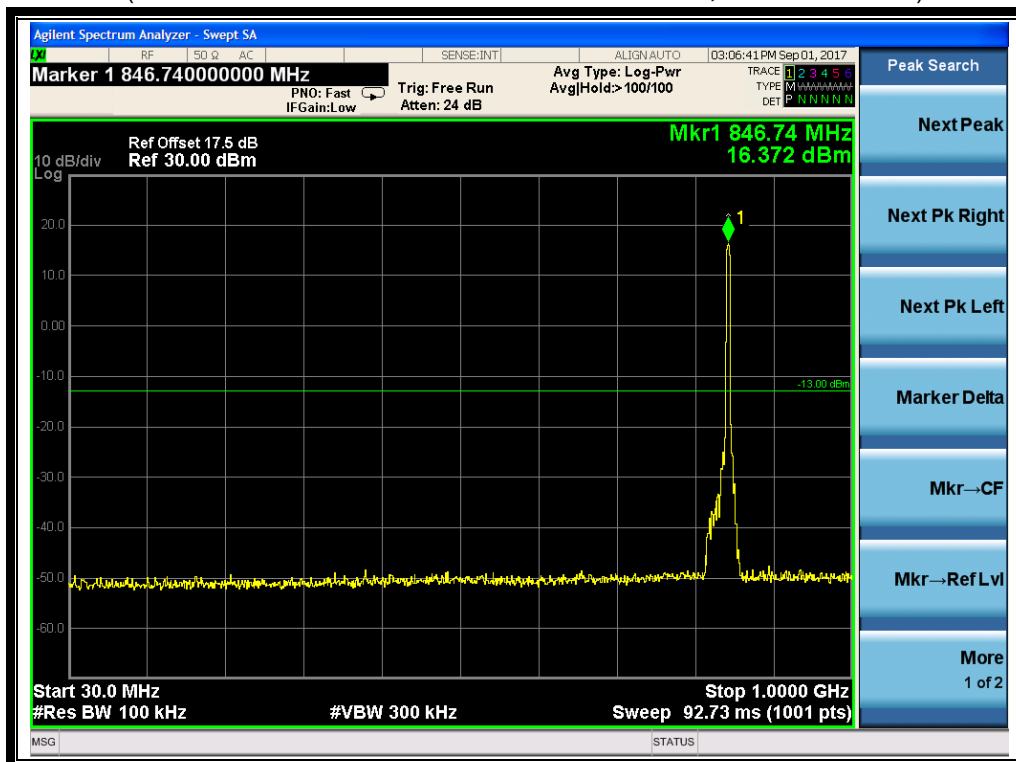


(Plot I3: HSDPA 850MHz Channel = 4233, 30MHz to 1GHz)

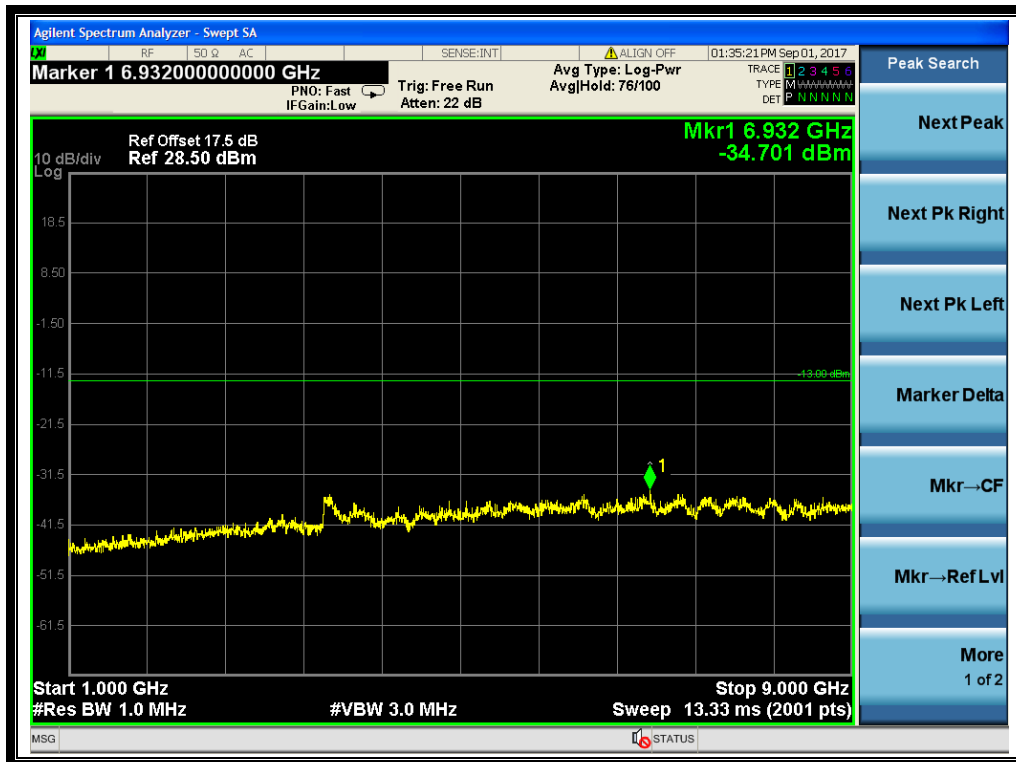


(Plot I3.1: HSDPA 850MHz Channel = 4233, 1GHz to 9GHz)

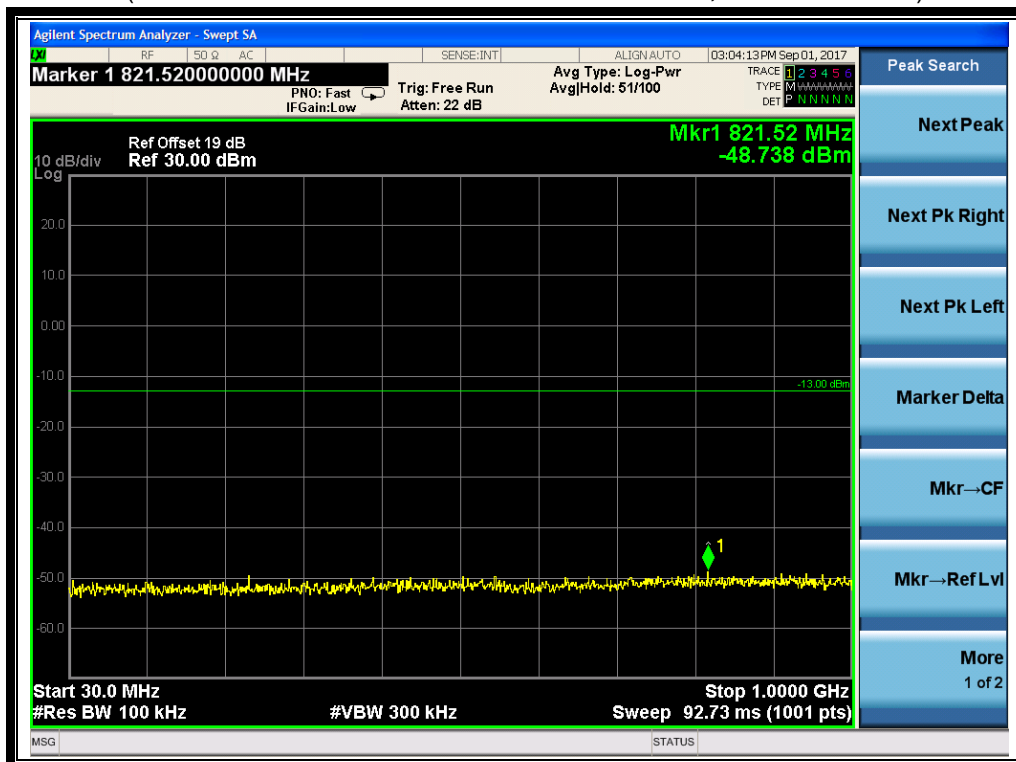


(Plot J1: HSDPA 1900MHz Channel = 9262, 30MHz to 1GHz)

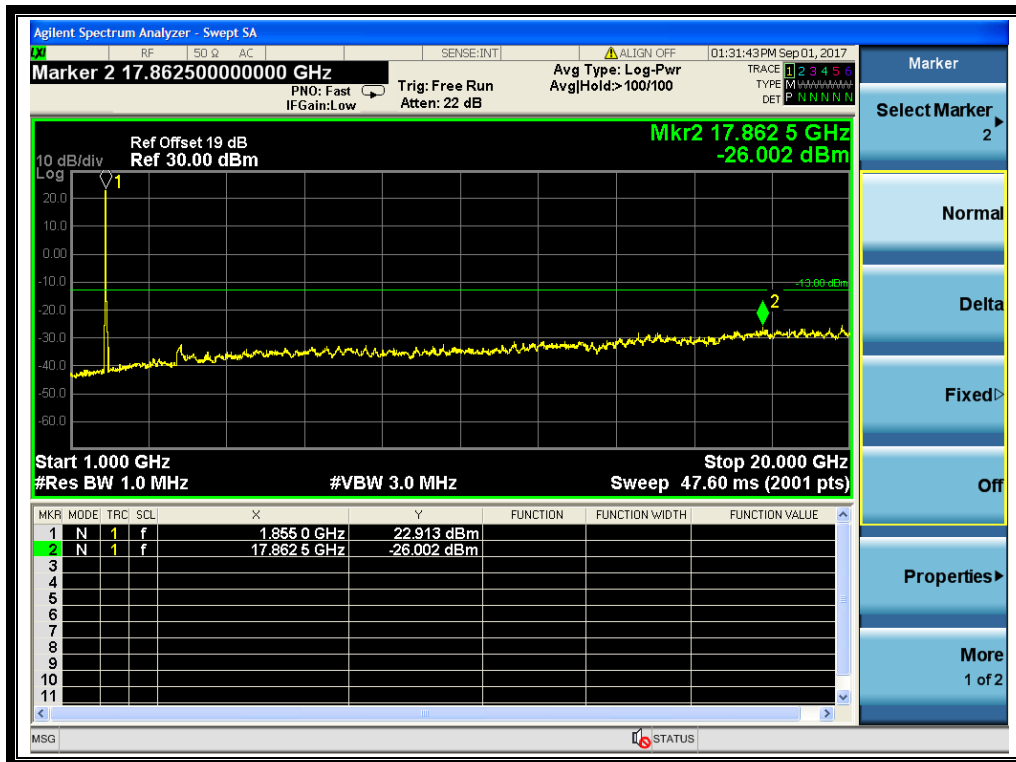


(Plot J1.1: HSDPA 1900MHz Channel = 9262, 1GHz to 20GHz)

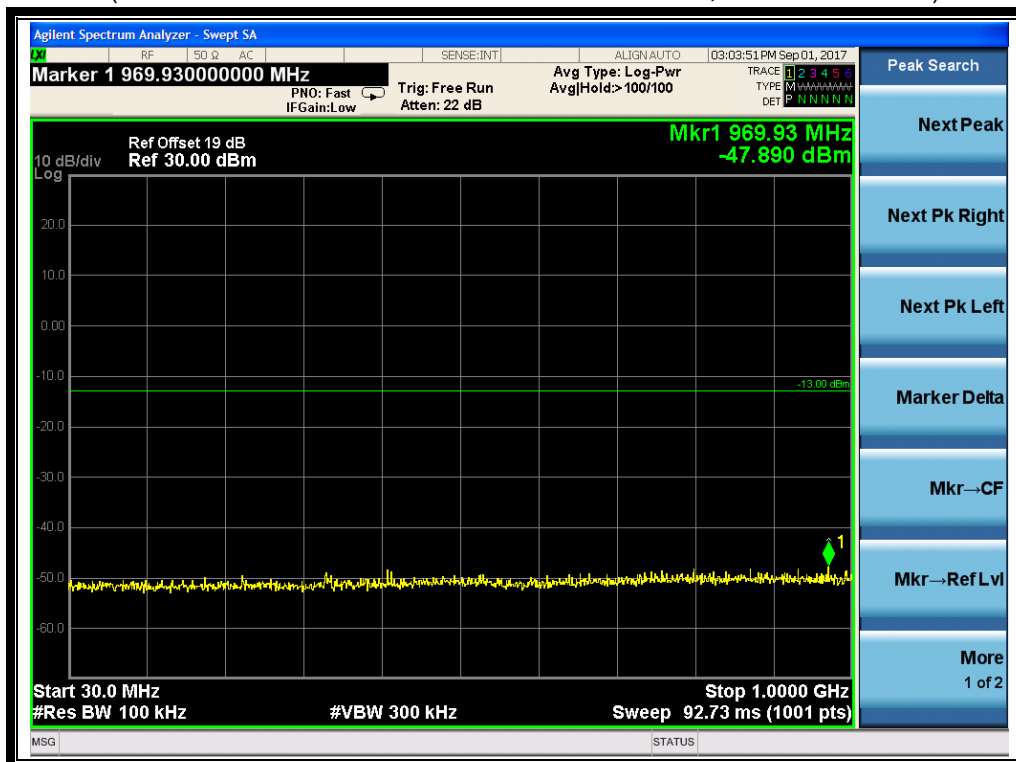


(Plot J2: HSDPA 1900MHz Channel = 9400, 30MHz to 1GHz)

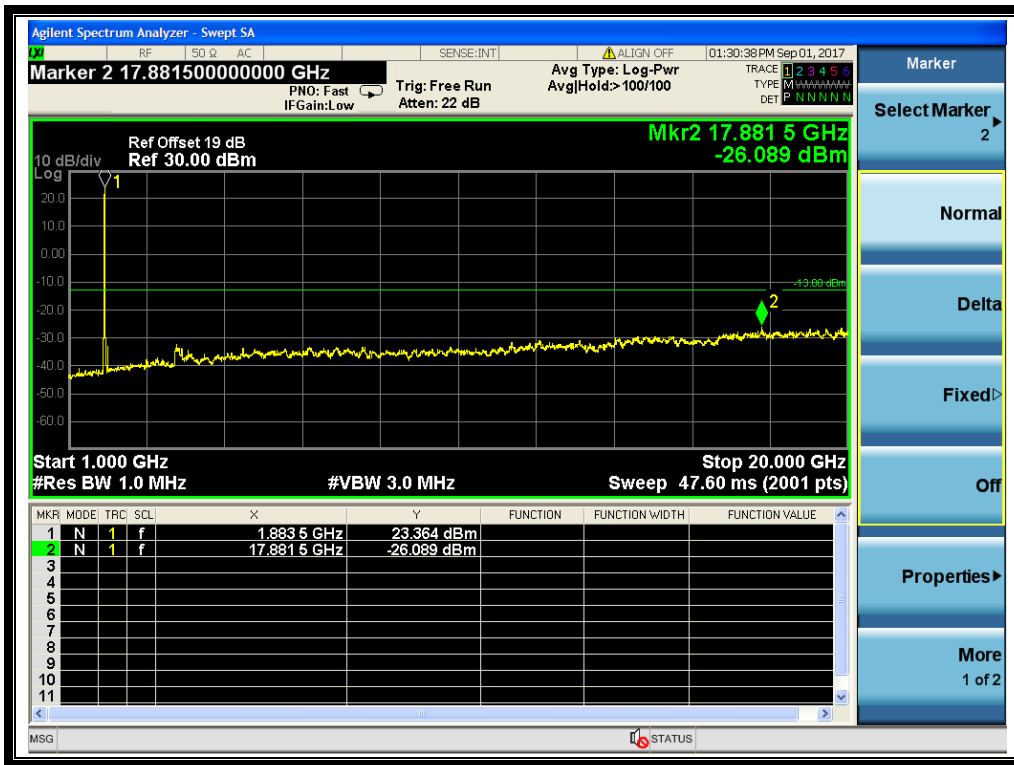


(Plot J2.1: HSDPA1900MHz Channel = 9400, 1GHz to 20GHz)

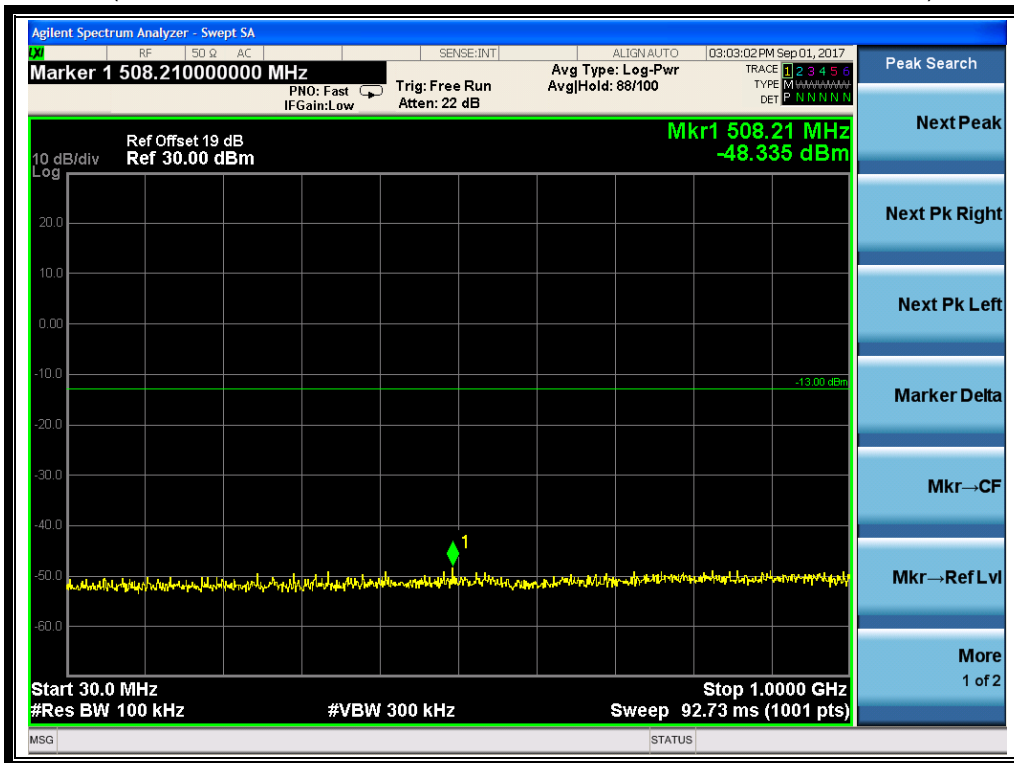


(Plot J3: HSDPA1900MHz Channel = 9538, 30MHz to 1GHz)

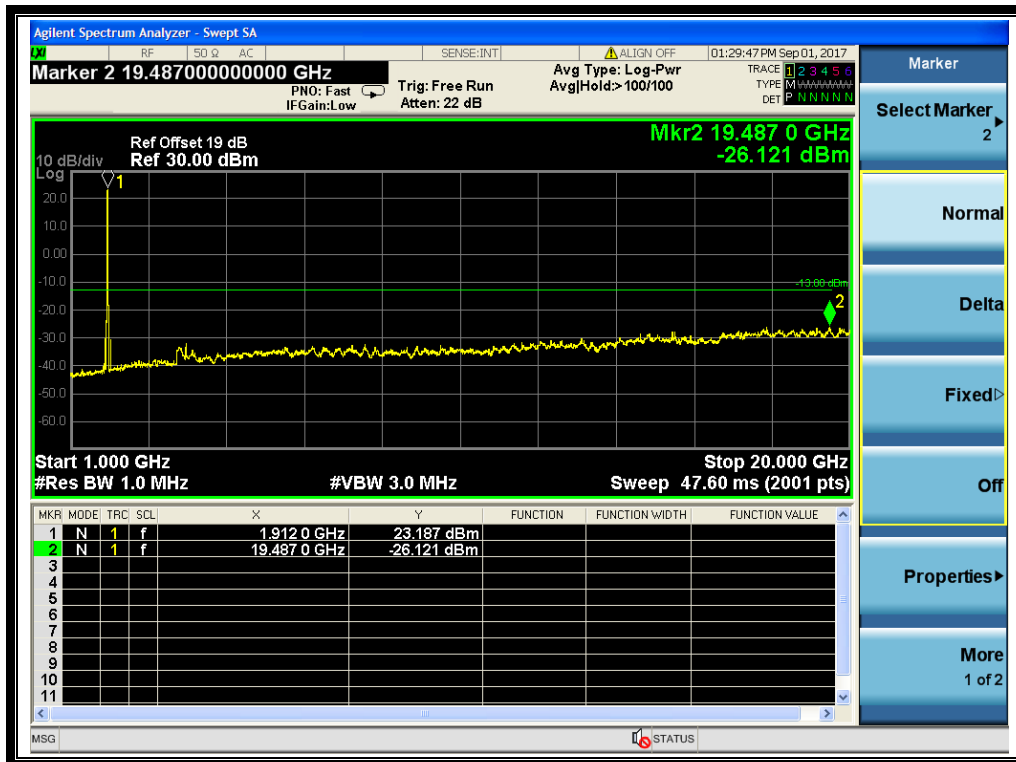


(Plot J3.1: HSDPA1900MHz Channel = 9538 1GHz to 20GHz)

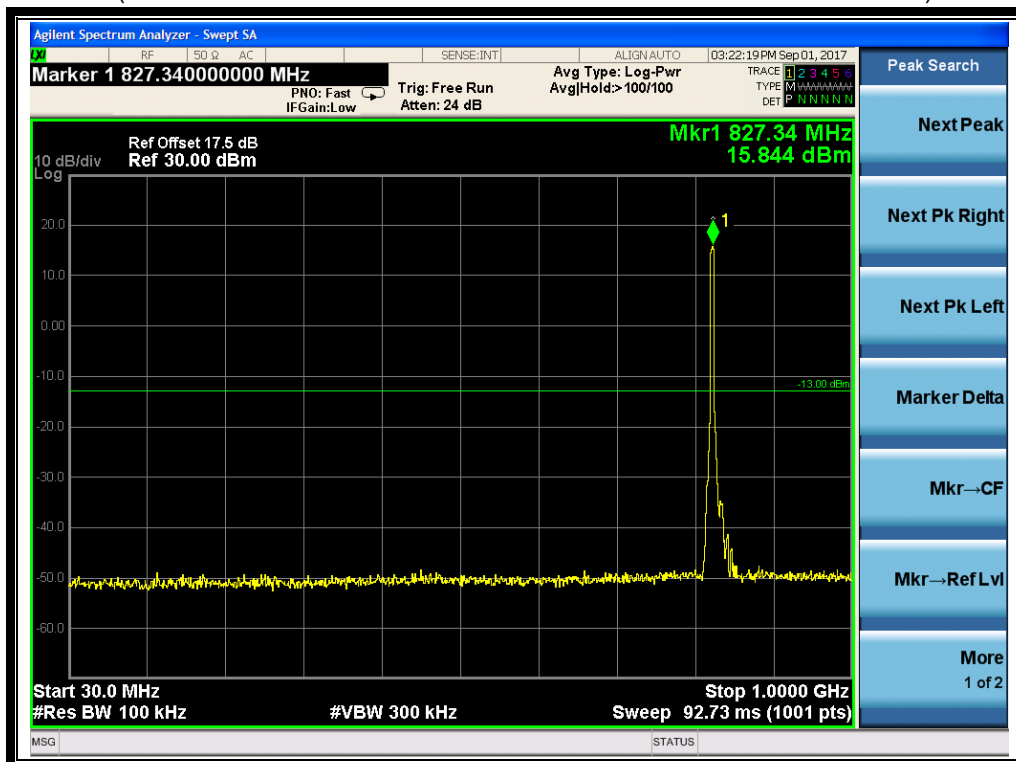

(Plot K1: HSUPA 850MHz Channel = 4132, 30MHz to 1GHz)

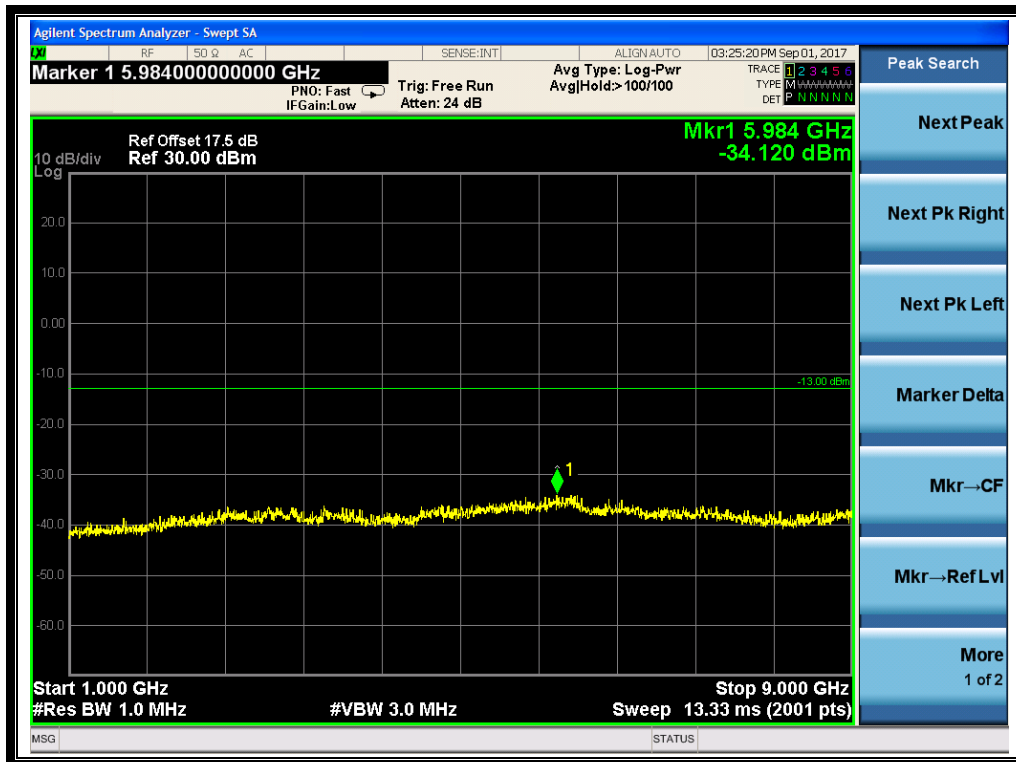


(Plot K1.1: HSUPA 850MHz Channel = 4132, 1GHz to 9GHz)

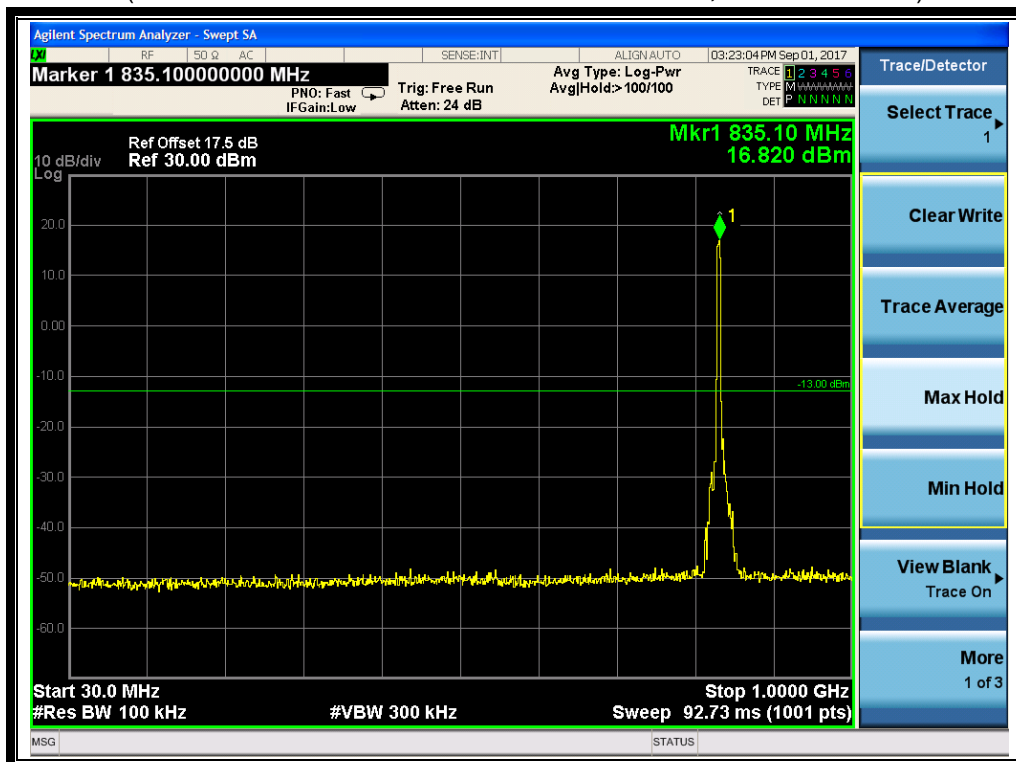

(Plot K2: HSUPA 850MHz Channel = 4175, 30MHz to 1GHz)




(Plot K2.1: HSUPA 850MHz Channel = 4175, 1GHz to 9GHz)

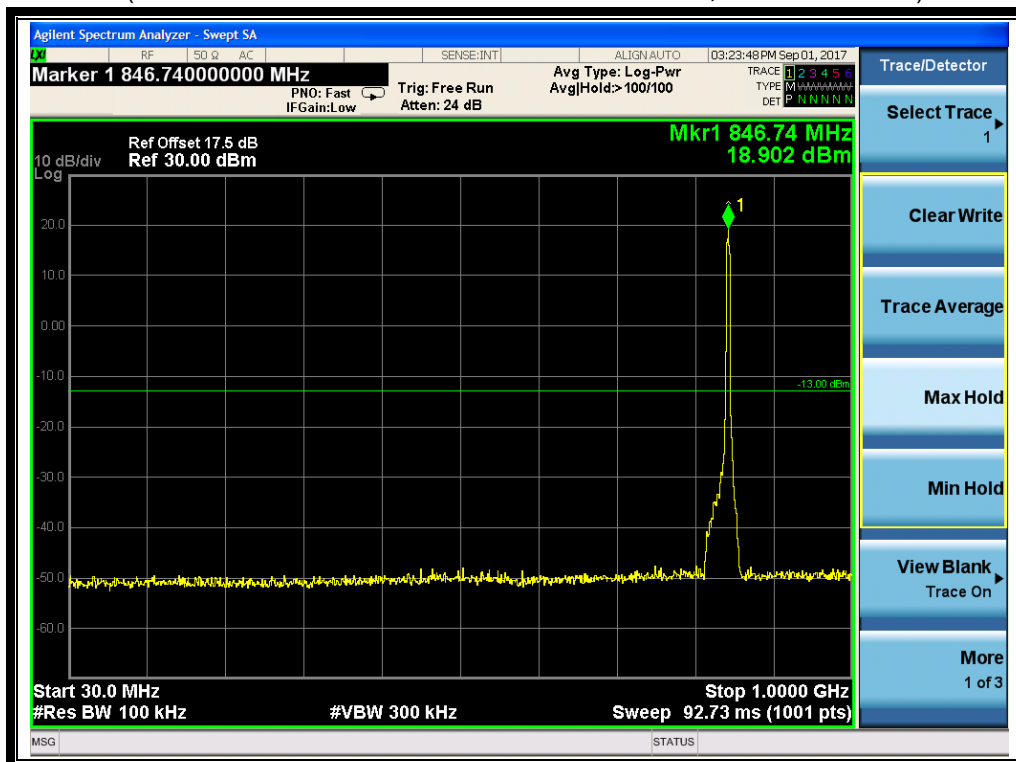


(Plot K3: HSUPA 850MHz Channel = 4233, 30MHz to 1GHz)




(Plot K3.1: HSUPA 850MHz Channel = 4233, 1GHz to 9GHz)

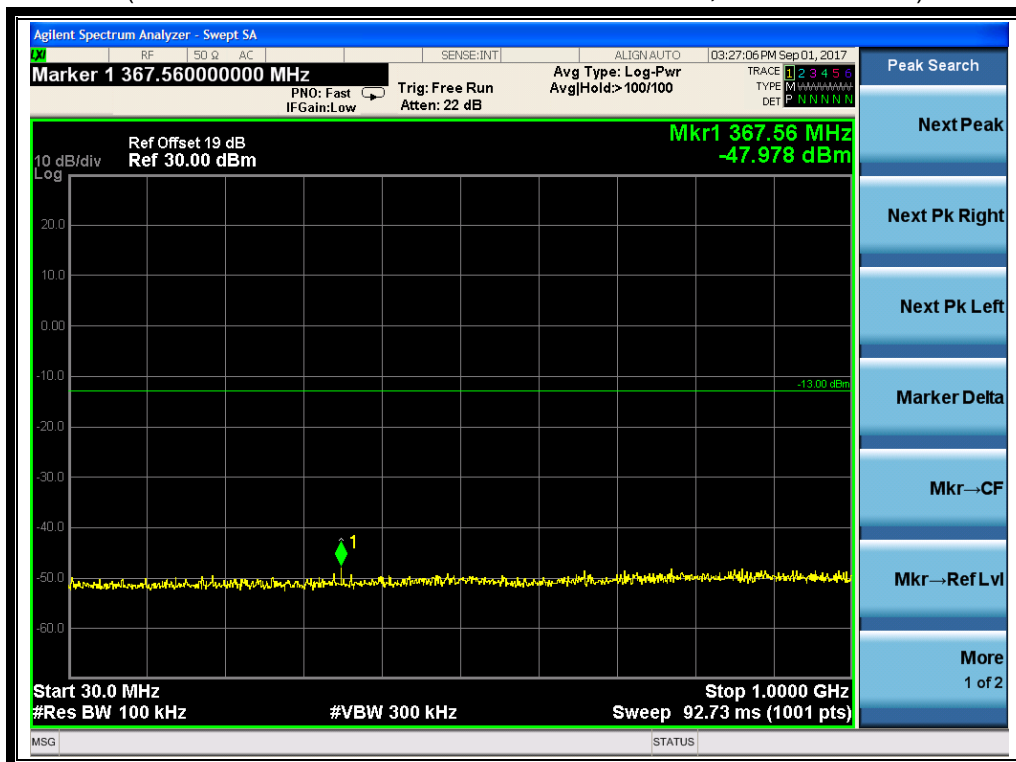


(Plot L1: HSUPA 1900MHz Channel = 9262, 30MHz to 1GHz)

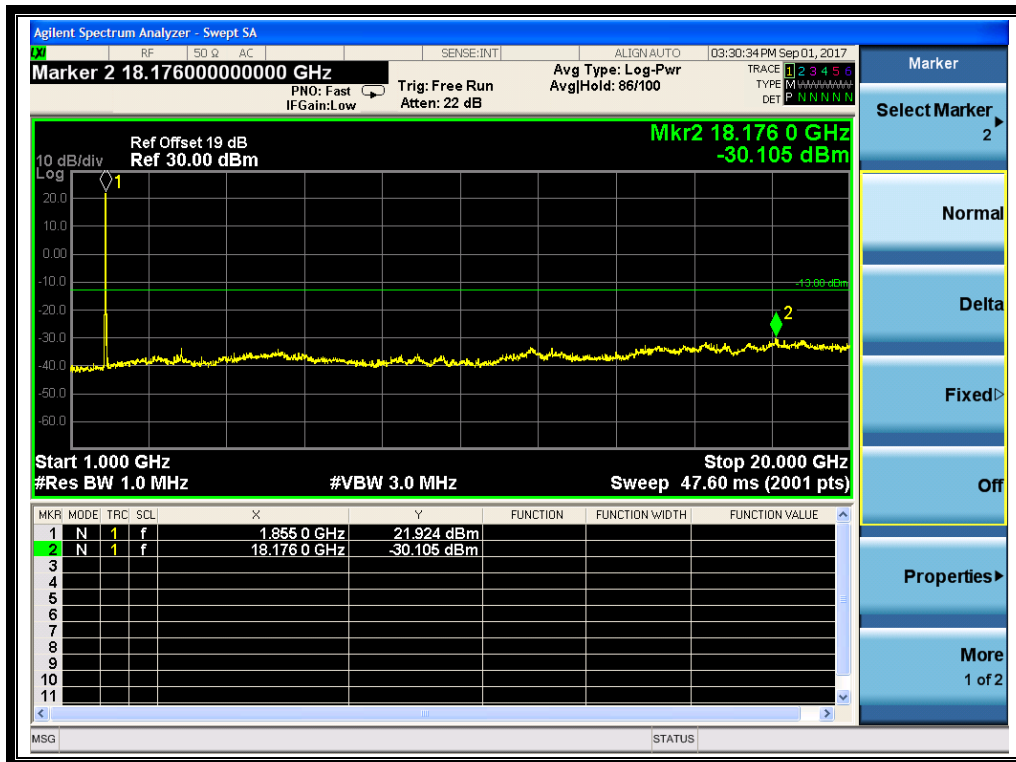


(Plot L1.1: HSUPA 1900MHz Channel = 9262, 1GHz to 20GHz)

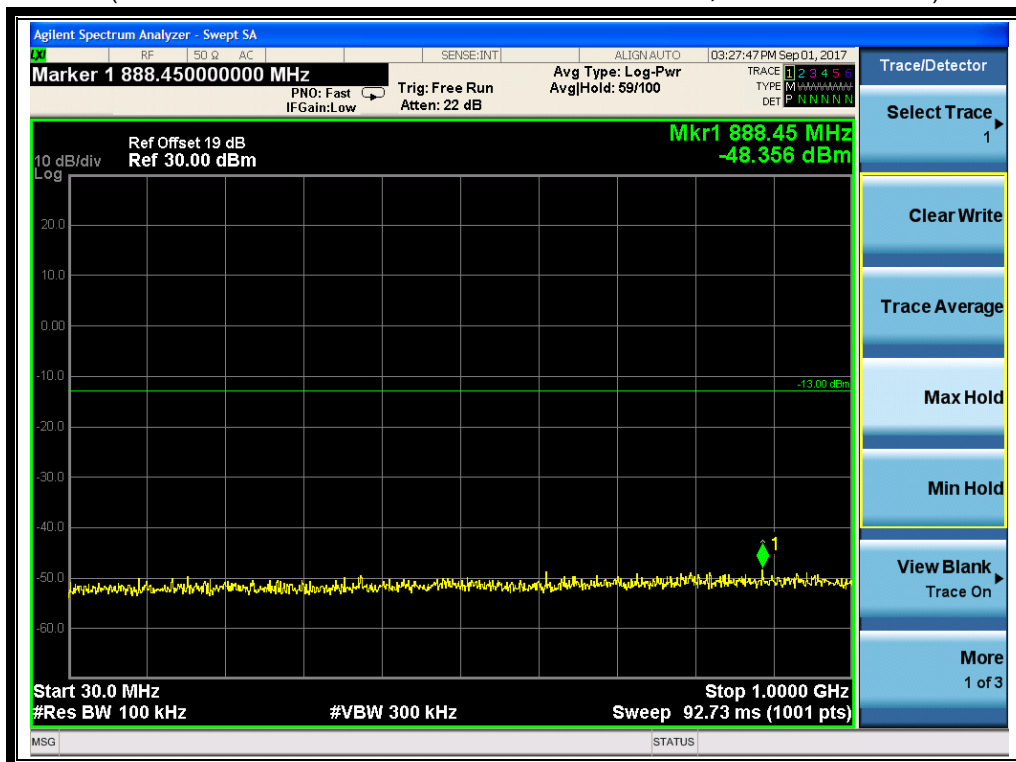

(Plot L2: HSUPA 1900MHz Channel = 9400, 30MHz to 1GHz)

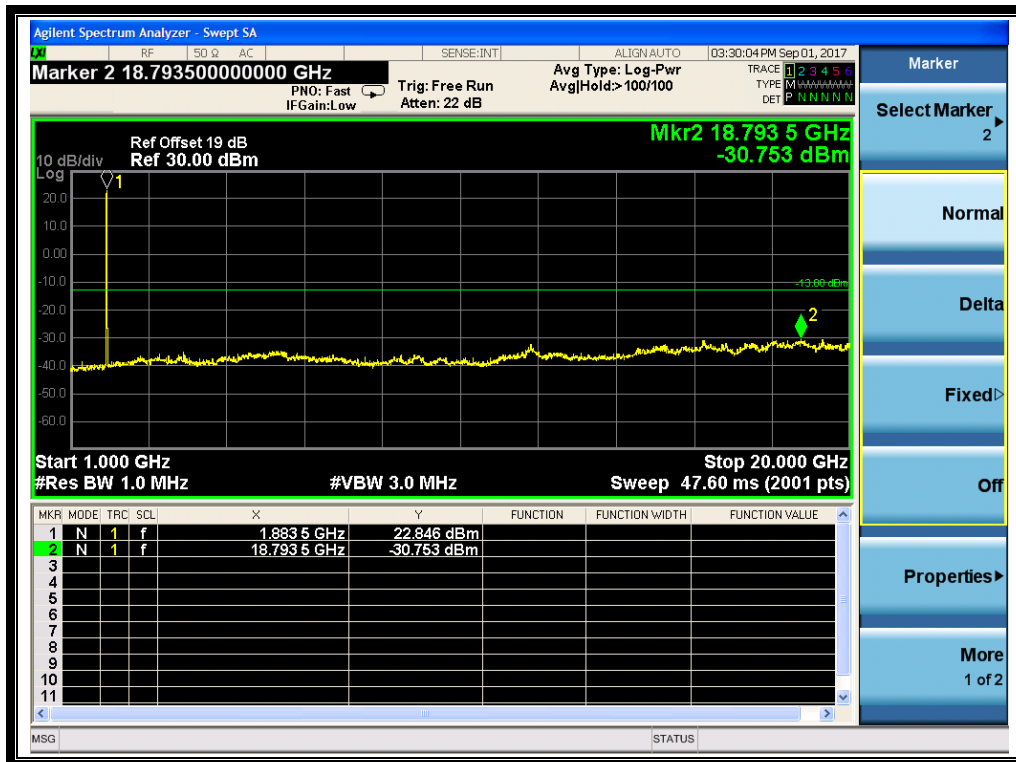

(Plot L2.1: HSUPA1900MHz Channel = 9400, 1GHz to 20GHz)

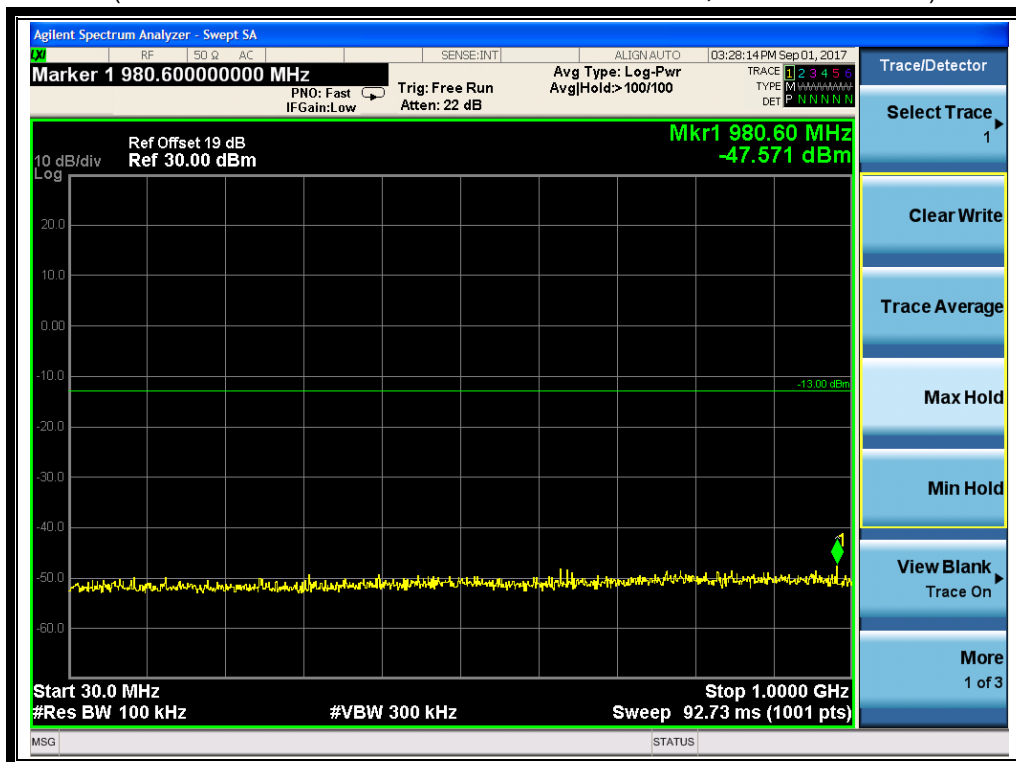

(Plot L3: HSUPA1900MHz Channel = 9538, 30MHz to 1GHz)