

**COMPLIANCE WORLDWIDE INC.  
TEST REPORT 151-10R2**

In Accordance with the Requirements of  
**FCC PART 27:2009 Subpart C**

Issued to

**Cellular Specialties, Inc.  
670 North Commercial Street  
Manchester, NH 03101  
(603) 626-6677**


for

**DSP85: Digital Repeater LTE 700 MHz  
Model: CSI-DSP85-L7AB**

**FCC ID: NVRC SI-DSP85-L7AB**

**Report Issued on March 31, 2010**

Tested by

  
\_\_\_\_\_  
Brian F. Breault

Reviewed by

  
\_\_\_\_\_  
Larry K. Stillings

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

## Table of Contents

1. Scope .....	3
2. Product Details .....	3
2.1. Manufacturer .....	3
2.2. Model Number.....	3
2.3. Serial Number .....	3
2.4. Description .....	3
2.5. Power Source.....	3
2.6. EMC Modifications .....	3
3. Product Configuration.....	3
3.1. Support Equipment .....	3
3.2. Cables .....	3
3.3. Operational Characteristics & Software.....	4
3.4. Block Diagram .....	4
4. Measurement Parameters.....	5
4.1. Measurement Equipment Used to Perform Test .....	5
4.2. Measurement & Equipment Setup .....	5
4.3. Test Procedure.....	5
5. Measurement Summary .....	6
6. Measurement Data .....	7
6.1. Power and Antenna Height Limits 27.50 (b)(4).....	7
6.2. Bandwidth Limitations (FCC Part 2.1049) .....	10
6.3. Spurious Emissions at the Antenna Terminals 27.53 (c).....	13
6.4. Field Strength of Spurious Emissions 27.53 (c) .....	18
6.5. Frequency Stability 27.54 .....	22
6.6. Inter-modulation .....	23
6.7. Public Exposure to Radio Frequency Energy Levels 1.1307 (b)(1).....	24
7. Test Site Description .....	25
Appendix A .....	26

## 1. Scope

This test report certifies that the Cellular Specialties DSP85: Digital Repeater LTE 700 MHz, as tested, meets the FCC Part 27 Subpart C requirements. The scope of this test report is limited to the test sample provided by the client, only in as much as that sample represents other production units. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required. This report replaces in full CW Test Report #151-10R1 by adding inter-modulation measurements.

## 2. Product Details

- 2.1. Manufacturer:** Cellular Specialties
- 2.2. Model Number:** CSI-DSP85-L7AB
- 2.3. Serial Number:** 002
- 2.4. Description:** The CSI Digital Repeater is designed for use within enclosed structures where sufficient signal from local cell sites to operate cell phones or data cards is limited or unavailable. Adequate signal must be available outside the structure as a prerequisite to achieving in-building coverage. The CSI-DSP85-L7AB provides 85 dB of gain in the 728-740 MHz Downlink and 698-710 MHz Uplink bands.
- 2.5. Power Source:** 120 VAC, 60 Hz
- 2.6. EMC Modifications:** None

## 3. Product Configuration

### 3.1. Support Equipment

Device	Manufacturer	Model	Serial No.	Comment
RF Signal Generator	Rohde & Schwarz	SMIQ06B	10090	Generating W-CDMA Signals
Power Supply	apx Technologies	SP130P954CR	05343977	
Notebook PC	Dell	Latitude D610	19472301901	Configuring Unit

### 3.2. Cables

Cable Type	Length	Shield	From	To
RF, 50 $\Omega$ , N male – N male	1M	Yes	DUT	Signal Generator
RF, 50 $\Omega$ , N male – N male	1M	Yes	DUT	50 $\Omega$ Load
Power Supply	2M + 2M	Yes	DUT	120 VAC, 60 Hz
Serial 1 & Serial 2	2M	Yes	DUT	Notebook PC
USB 1 & USB 2	2M	Yes	DUT	Notebook PC
Ethernet	2M	No	DUT	Notebook PC


Notebook PC is connected only during setup

### 3. Product Configuration (continued)

#### 3.3. Operational Characteristics & Software

- (1) The unit was allowed to power up normally and go through its configuration cycle.
- (2) Using an RF Signal Generator on the Input and a Spectrum Analyzer on the output Downlink or Uplink frequencies a signal was generated over the intended bandwidth of operation.
- (3) The signal generator was configured to provide several digital modulations to the input of the amplifier including W-CDMA w/ QPSK, 16QAM and 64QAM modulations.
- (4) After examining each of the modulation types it was determined that W-CDMA with QPSK at 12 MS/s provided the worst case configuration.
- (5) The units internal AGC circuitry was toggled on and off to determine the maximum output power for each of the Uplink and Downlink frequencies and still maintain compliance with the standard.

#### 3.4. Block Diagram

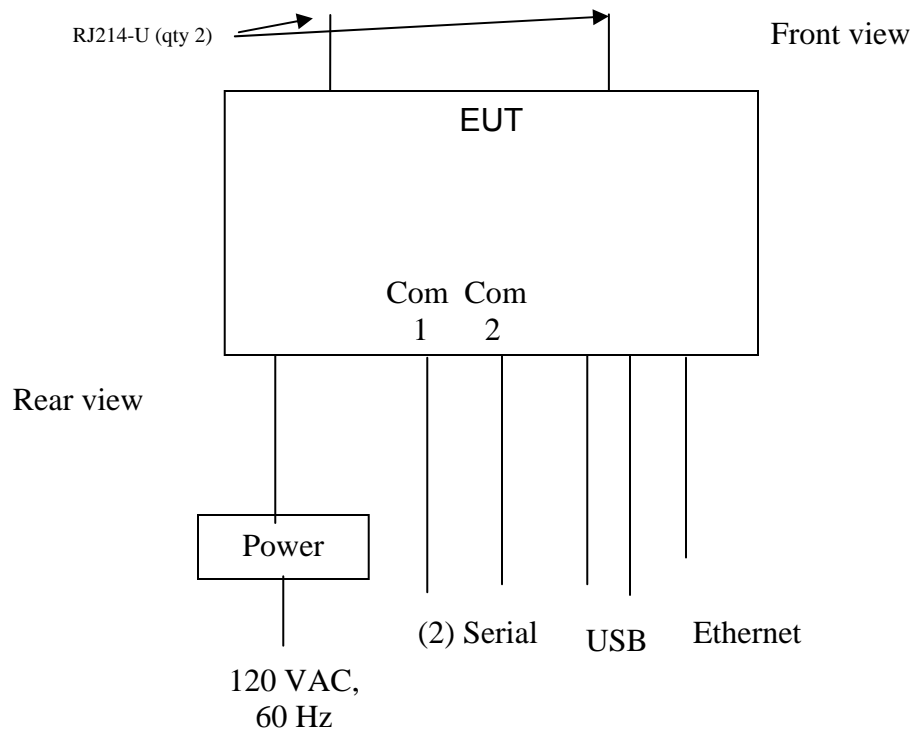

#### 4. Measurements Parameters

##### 4.1. Measurement Equipment Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due
Spectrum Analyzer	Agilent	E4407B	MY4510449	7/09/2010
EMI Receiver	Hewlett Packard	8546A	MY4510449	10/28/2010
Microwave Preamp	Hewlett Packard	8449B	3008A01323	9/22/2010
Bilog Antenna	Com-Power	AC-220	25509	8/6/2010
Horn Antenna	Electro-Metrics	EM-6961	6337	7/22/2010

##### 4.2. Measurement & Equipment Setup

Test Date: 2/17 to 2/25 2010  
 Test Engineer: Larry Stillings  
 Normal Site Temperature (15 – 35°C): 21.6  
 Relative Humidity (20 -75%RH): 25

##### 4.3. Test Procedure

The test measurements contained in this report are based on the requirements detailed in FCC Part 27, Subpart C.

The test methods used to generate the data in this test report are in accordance with ANSI C63.4:2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

Measurements were made in accordance with TIA-603-C:2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard.

5. Measurement Summary

Section Description or Test Requirement	FCC Part 27 Reference	Test Report Section	Result	Comment
Power and Antenna height limits, Output Power	27.50	6.1	Compliant	
Occupied Bandwidth	Part 2.1049	6.2	Compliant	
Spurious Emissions at Antenna Terminals	27.53 (g)	6.3	Compliant	
Spurious Emissions at the Antenna Terminals Additional Requirements	27.53 (f)	6.4	Compliant	
Field Strength of Spurious Emissions	27.53 (g)	6.5	Compliant	
Frequency Stability	27.54	6.6	N/A	The EUT does not translate the frequency of the input signal
Inter-modulation	N/A	6.6	Compliant	
Public Exposure to Radio Frequency Energy Levels	Section 1.1307 (b)(1)	6.8	Compliant	


**6. Measurement Data**

**6.1. Power and Antenna Height Limits 27.50 (c)(3)**

Requirement: The following power and antenna height requirements apply to stations transmitting in the 698-746 MHz band: Fixed and base stations transmitting a signal within an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT.

**6.1.1. Peak Transmitter Output Power, Transmitter Only**


Upper C Bands	Frequency	Output Power	
	(MHz)	(W)	(dBm)
Downlink	728-740 MHz	1.167	30.67
Uplink	698-710 MHz	2.911	34.64

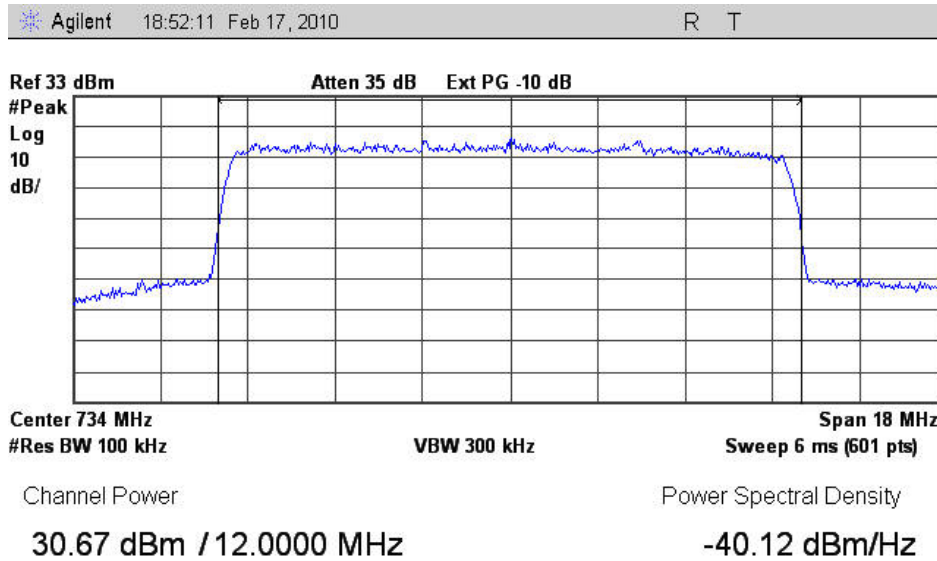

**6. Measurement Data**

**6.1. Power and Antenna Height Limits 27.50 (c)(3) (cont)**

Agilent 16:06:41 Feb 22, 2010 R T

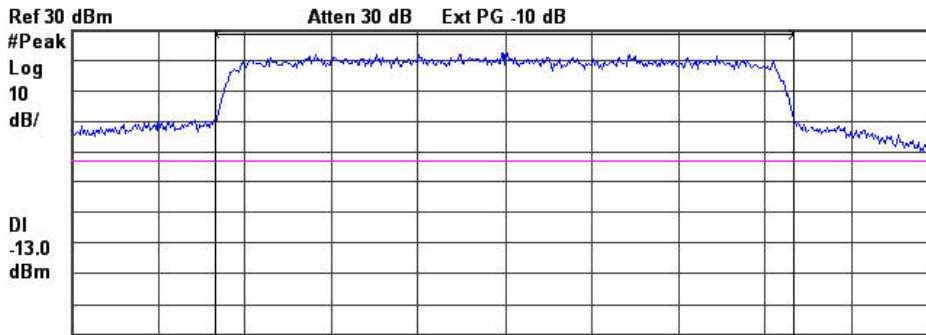

Center 704 MHz      Span 18 MHz  
#Res BW 100 kHz      VBW 300 kHz      Sweep 6 ms (601 pts)

Channel Power

34.64 dBm / 12.0000 MHz

Power Spectral Density

-36.16 dBm/Hz

No Peak Found



**6. Measurement Data**

**6.1. Power and Antenna Height Limits (continued)**

**6.1.2. Maximum ERP**

ERP is defined in FCC Title 47, Chapter I, Part 2, Subpart A, Section 2.1 as "Effective Radiated Power. The product of the power supplied to the antenna and its gain relative to a half-wave dipole in a given direction."

$$\text{ERP} = \text{Transmitter Power (dBm)} - \text{Cable Loss (dB)} + \text{Antenna Gain (dBi)}$$

The manufacturer of the device under test recommends 2 antennas for use with their product. The following table provides the worst case effective radiated power based on the measured transmitter output power and the antenna gain:

	Frequency	Transmitter Power <sup>1</sup>	Cable Insertion Loss	Antenna Gain <sup>2</sup>	Total Output Power	
	(MHz)	(dBm)	(dB)	(dBi)	(dBm)	(Watts)
Downlink	728-740	30.67	0.00	+3	33.67	2.32
Uplink	698-710	34.64	0.00	+3	37.64	5.80
Downlink	728-740	30.67	0.00	+14	44.67	29.31
Uplink	698-710	34.64	0.00	+14	48.64	73.11

<sup>1</sup> Measured. See section 6.1.1.

<sup>2</sup> Customer supplied. 3 dBi for Indoor Applications, 14 dBi for Outdoor Applications

## 6. Measurement Data (continued)

### 6.2. Bandwidth Limitations (FCC Part 2.1049)


Requirement: Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant.

#### 6.2.1. Occupied (99% Power) Bandwidth

	Frequency	Occupied Bandwidth	Result
	(MHz)	(MHz)	
Downlink	728-740	11.295	Compliant
Uplink	698-710	11.315	Compliant

NOTE: A slightly wider input signal was used then the bandwidth required to demonstrate the digital filtering of the EUT's output signal.

##### 6.2.1.1. Occupied (99% Power) Bandwidth Measurement, 728-740 MHz

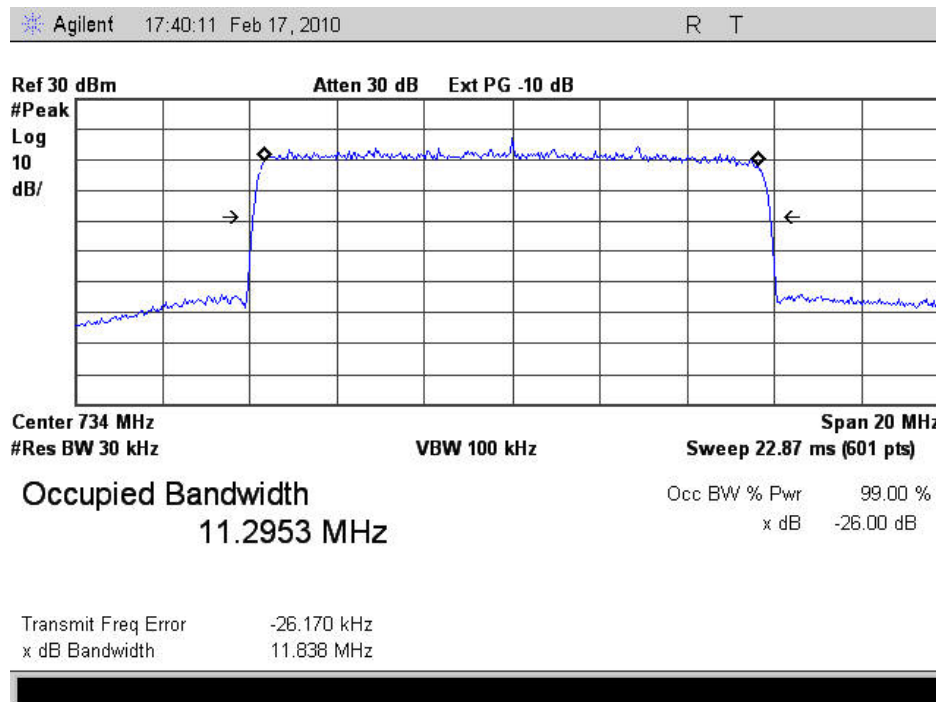


6. Measurement Data (continued)

6.2. Bandwidth Limitations (FCC Part 2.1049) (continued)

6.2.1. Occupied (99% Power) Bandwidth (continued)

6.2.1.2. Occupied (99% Power) Bandwidth Input Signal, 728-740 MHz


Agilent 11:29:32 Mar 30, 2010 R T

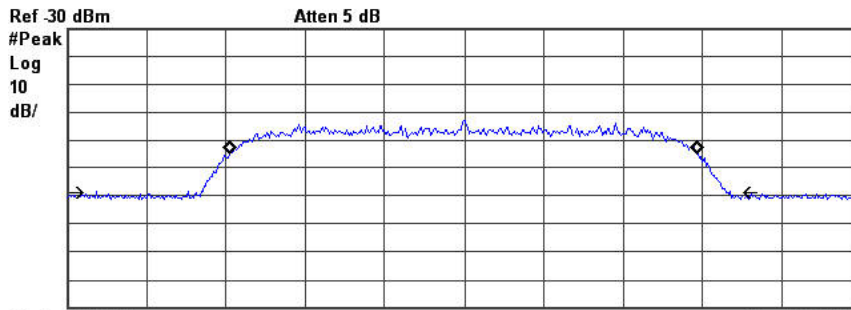

Center 734 MHz Span 20 MHz  
#Res BW 30 kHz VBW 100 kHz Sweep 22.87 ms (601 pts)


Occupied Bandwidth 11.7509 MHz  
Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error -13.593 kHz  
x dB Bandwidth 15.980 MHz



6.2.1.3. Occupied (99% Power) Bandwidth Measurement, 698-710 MHz


Agilent 17:42:24 Feb 17, 2010 R T

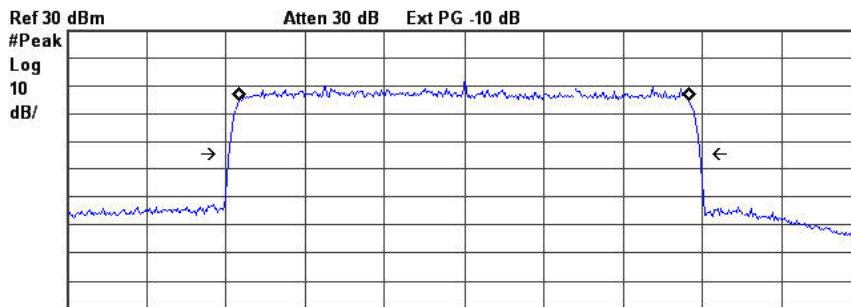

Center 704 MHz Span 20 MHz  
#Res BW 30 kHz VBW 100 kHz Sweep 22.87 ms (601 pts)

Occupied Bandwidth 11.3157 MHz  
Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error 7.825 kHz  
x dB Bandwidth 11.868 MHz




**6. Measurement Data (continued)**

**6.2. Bandwidth Limitations (FCC Part 2.1049) (continued)**

**6.2.1. Occupied (99% Power) Bandwidth (continued)**

**6.2.1.3. Occupied (99% Power) Bandwidth Input Signal, 698-710 MHz**

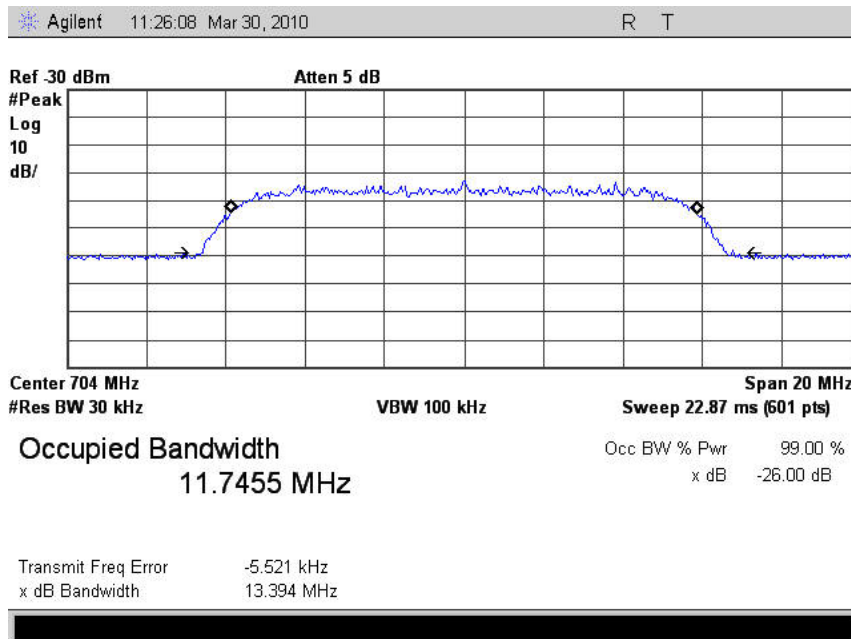


6. Measurement Data (continued)

6.3. Spurious Emissions at the Antenna Terminals 27.53 (g)

Requirement: For operations in the 698-746 MHz band, the power of any emission outside of the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB;

Compliance with this provision is based upon the use of measurement instrumentation bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed


6.3.1. 728-740 MHz, 30 MHz to 1 GHz

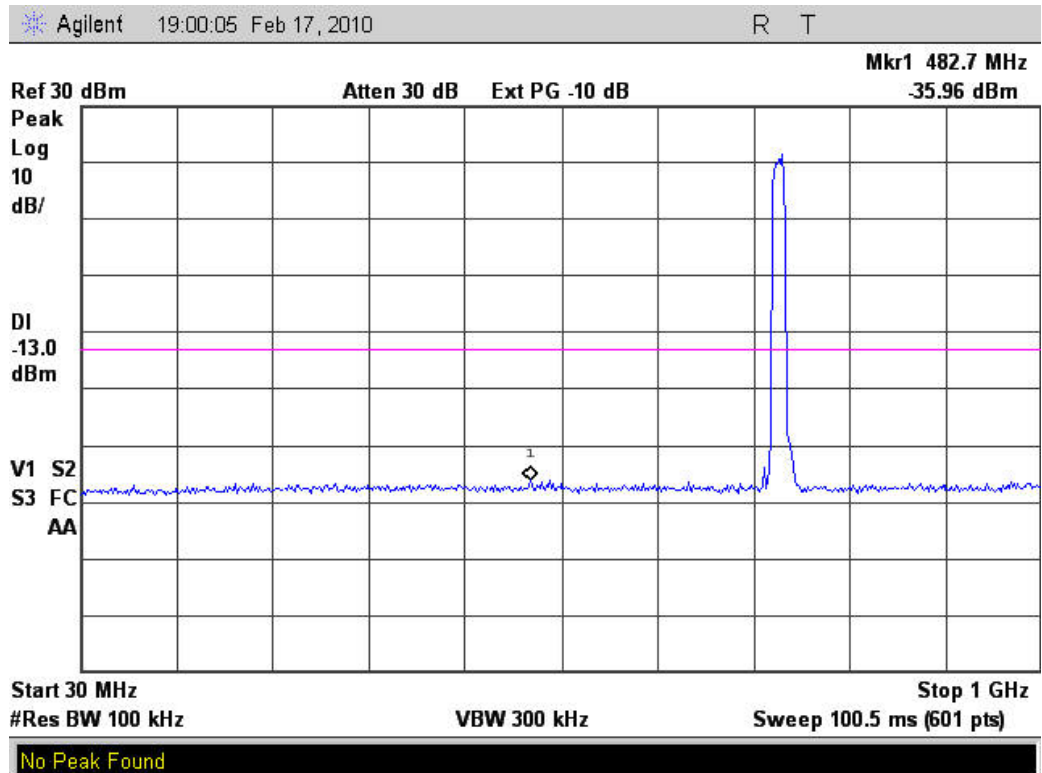


6. Measurement Data (continued)

6.3. Spurious Emissions at the Antenna Terminals 27.53 (c) (continued)

6.3.2. 728-740 MHz, 1 to 26.5 GHz

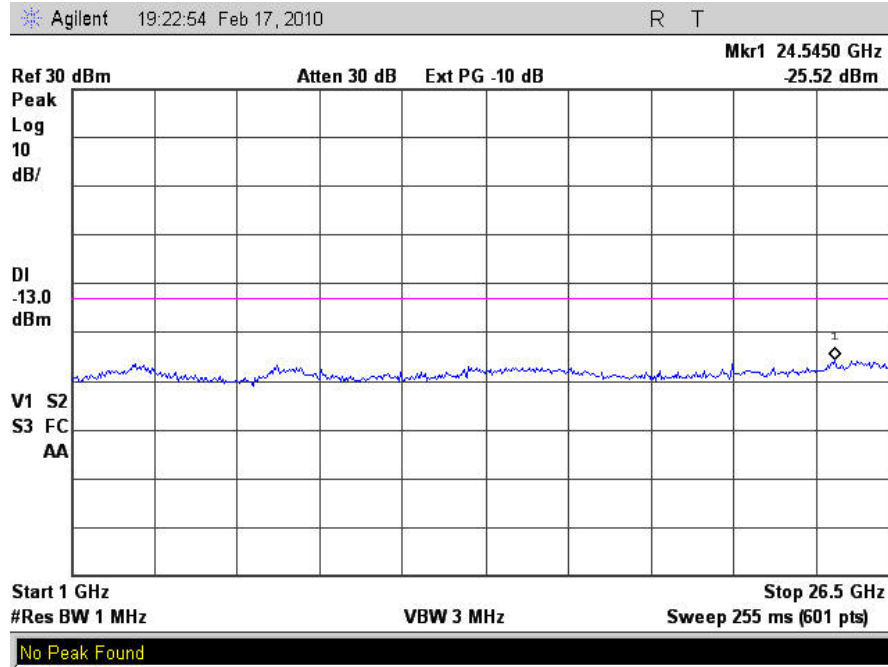


6.3.3. 728-740 MHz, 30 MHz to 1 GHz

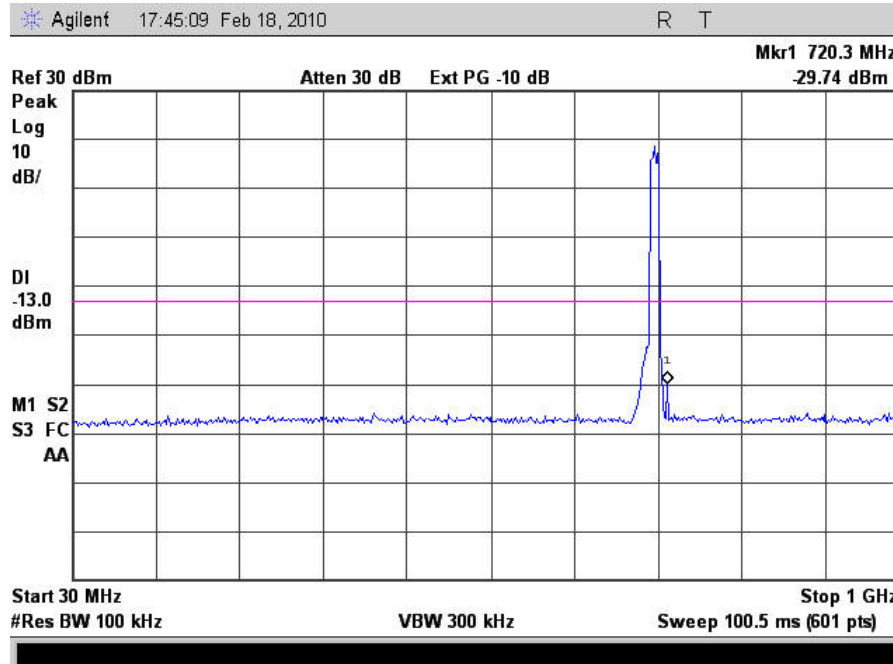


6. Measurement Data (continued)

6.3. Spurious Emissions at the Antenna Terminals 27.53 (c) (continued)

6.3.4. 728-740 MHz, 1 to 26.5 GHz

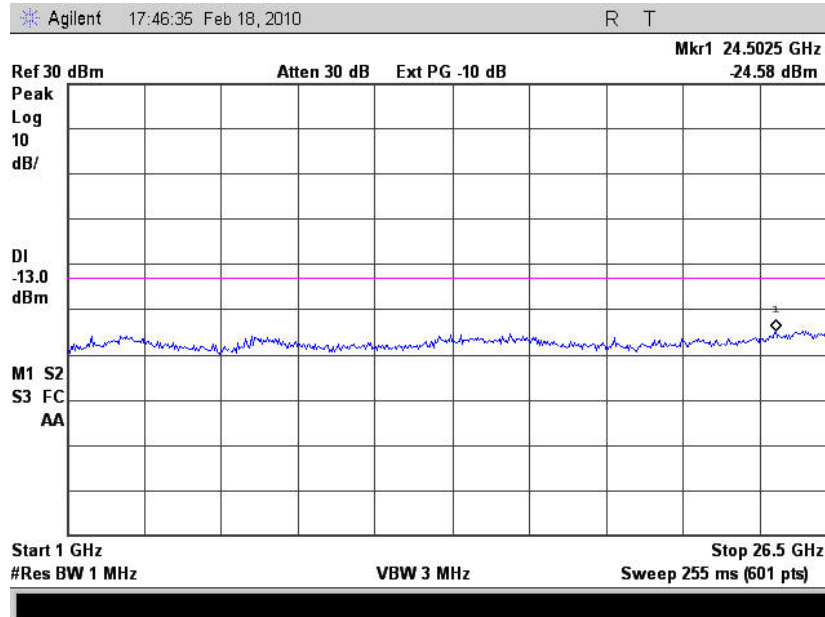


6.3.5. 728 MHz Bandedge Measurement

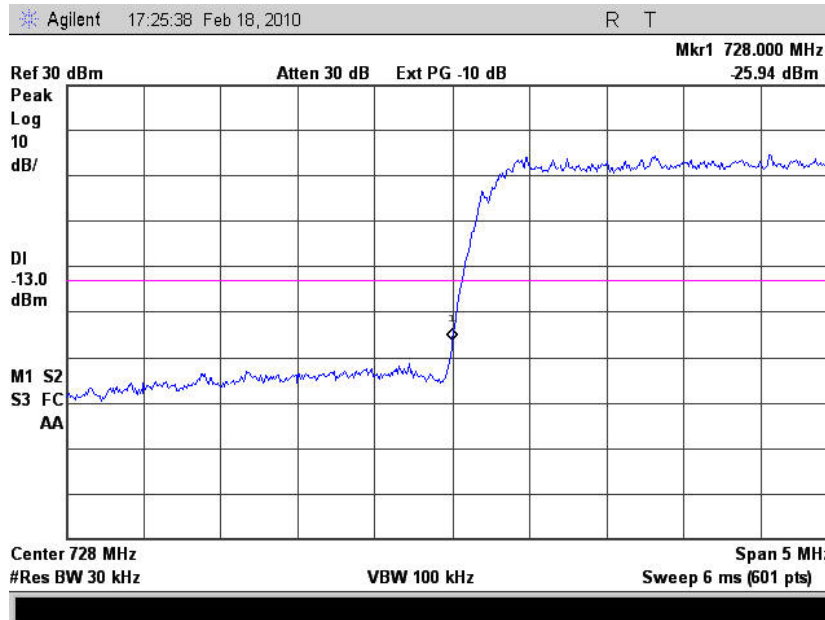


6. Measurement Data (continued)

6.3. Spurious Emissions at the Antenna Terminals 27.53 (g) (continued)

6.3.6. 740 MHz Bandedge Measurement

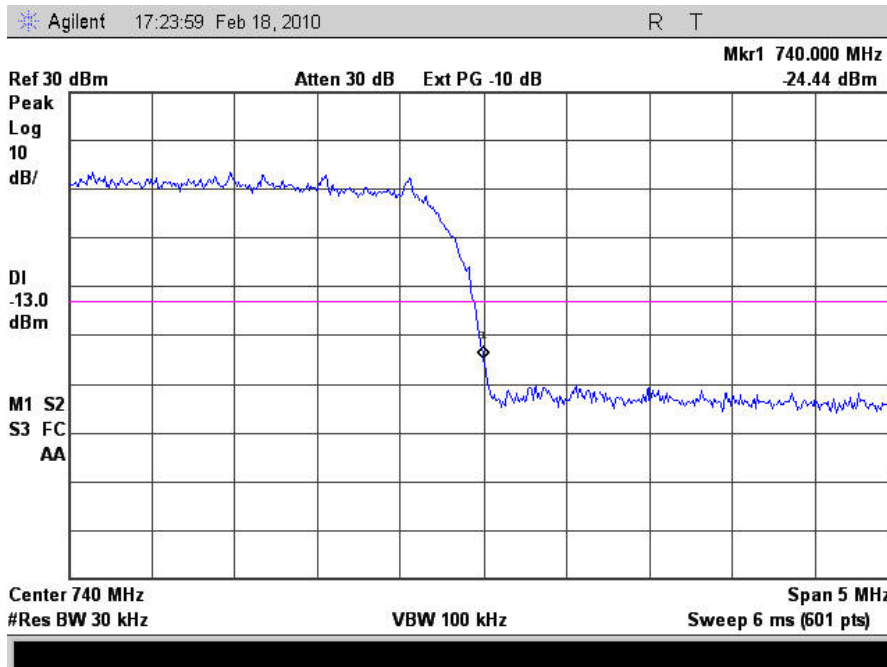

6.3.7. 698 MHz Bandedge Measurement

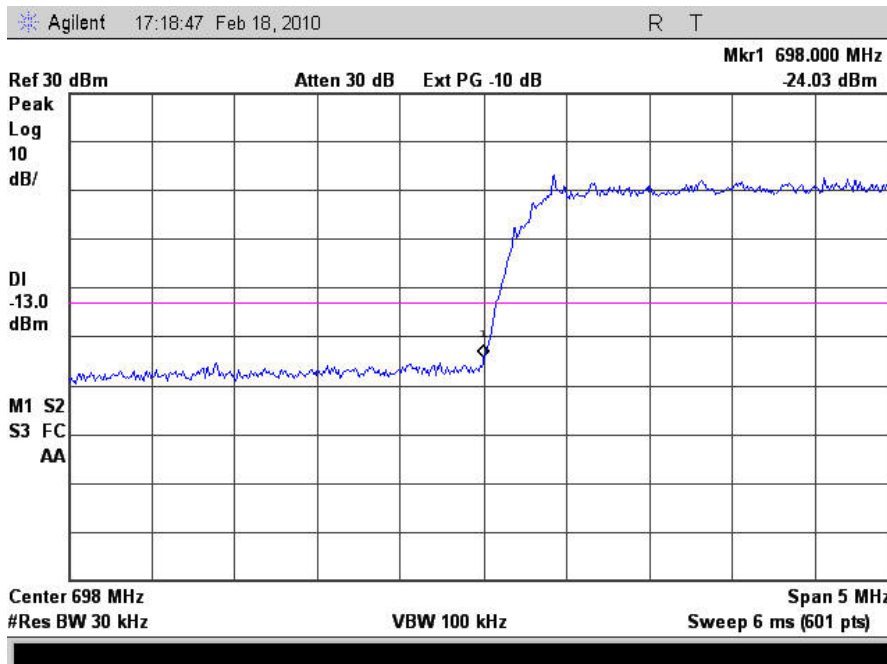




6. Measurement Data (continued)

6.3. Spurious Emissions at the Antenna Terminals 27.53 (g) (continued)

6.3.8. 710 MHz Bandedge Measurement

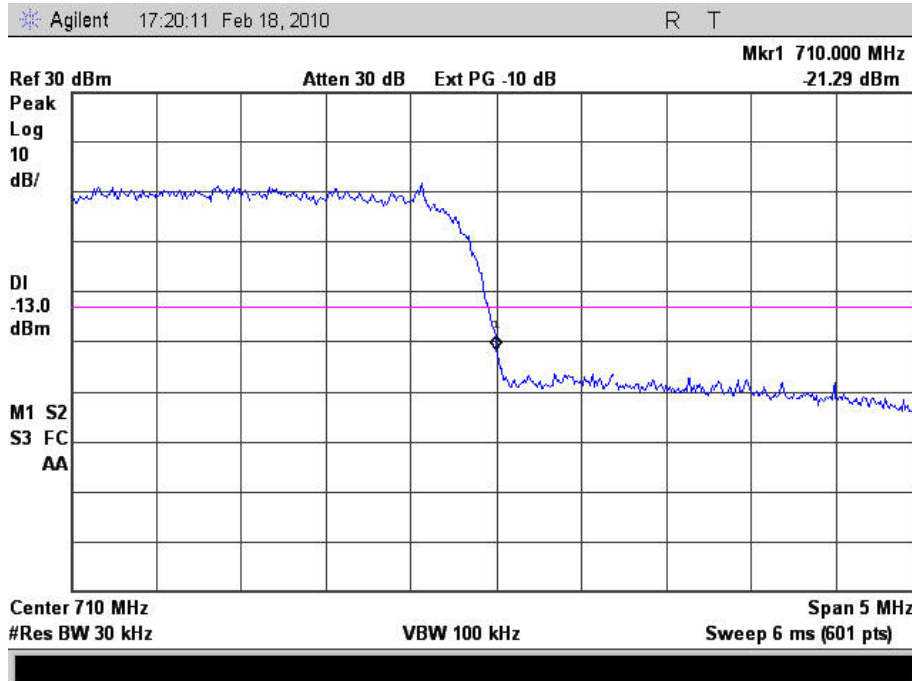

## 6. Measurement Data (continued)

### 6.4. Field Strength of Spurious Emissions 27.53 (g)

Requirement: For operations in the 698-746 MHz band, the power of any emission outside of the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB;

Compliance with this provision is based upon the use of measurement instrumentation bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed

#### 6.4.1. Measurement and Equipment Setup

Test Date:	03/01/2010
Test Engineer:	Brian Breault
Site Temperature (°C):	21.7
Relative Humidity (%RH):	22
Frequency Range:	30 MHz to 1 GHz
Measurement Distance:	10 Meters
EMI Receiver IF Bandwidth:	120 kHz
EMI Receiver Avg Bandwidth:	300 kHz
Detector Functions:	Peak and Quasi-Peak.
Antenna Height:	1 to 4 meters


#### 6.4.2 Test Procedure

Test measurements were made in accordance with ANSI C63.4-2003, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.

6. Measurement Data (continued)

6.4. Field Strength of Spurious Emissions 27.53 (g) (continued)

6.4.3. Horizontal Polarity

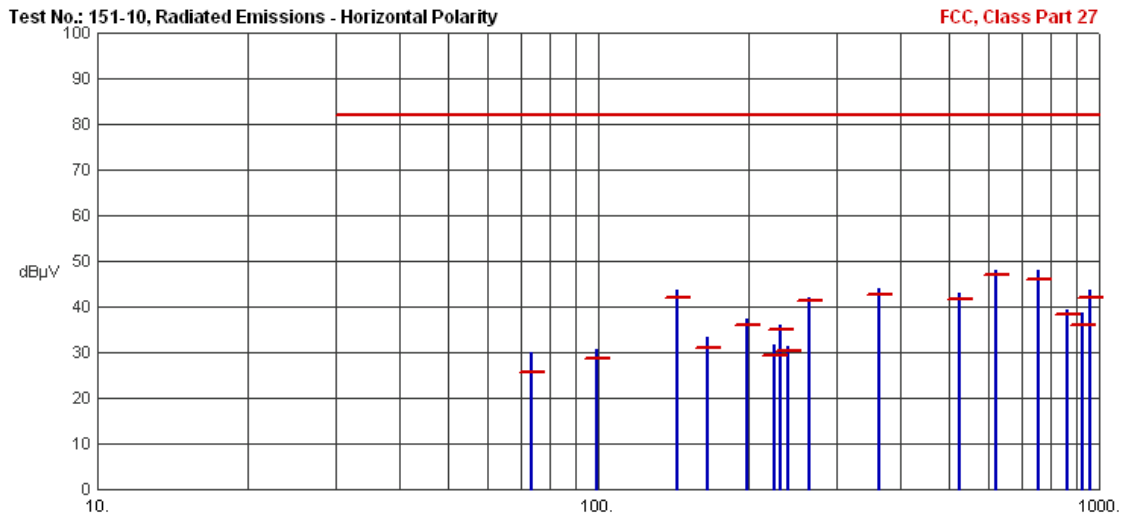


Frequency (MHz)	Pk Amp (dBµV/m)	QP Amp (dBµV/m)	QP Limit (dBµV/m)	Margin (dB)	Ant Ht (cm)	Table (Deg)	Comments
73.3375	29.87	25.53	82.00	-56.47	N/A	N/A	
99.0002	30.67	28.64	82.00	-53.36	N/A	N/A	
143.9978	43.78	41.84	82.00	-40.16	N/A	N/A	
165.0025	33.33	31.10	82.00	-50.90	N/A	N/A	
197.9999	37.29	35.89	82.00	-46.11	N/A	N/A	
225.0230	31.54	29.21	82.00	-52.79	N/A	N/A	
230.9845	35.87	35.06	82.00	-46.94	N/A	N/A	
239.9803	31.49	30.19	82.00	-51.81	N/A	N/A	
263.9851	42.12	41.36	82.00	-40.64	N/A	N/A	
362.9852	44.07	42.71	82.00	-39.29	N/A	N/A	
527.9924	42.90	41.53	82.00	-40.47	N/A	N/A	
623.9899	47.85	47.01	82.00	-34.99	N/A	N/A	
758.9866	47.93	46.03	82.00	-35.97	N/A	N/A	
863.9884	39.32	38.20	82.00	-43.80	N/A	N/A	
923.9890	38.77	35.94	82.00	-46.06	N/A	N/A	
959.9626	43.55	42.10	82.00	-39.90	N/A	N/A	

6. Measurement Data (continued)

6.4. Field Strength of Spurious Emissions 27.53 (g) (continued)

6.4.4. Vertical Polarity

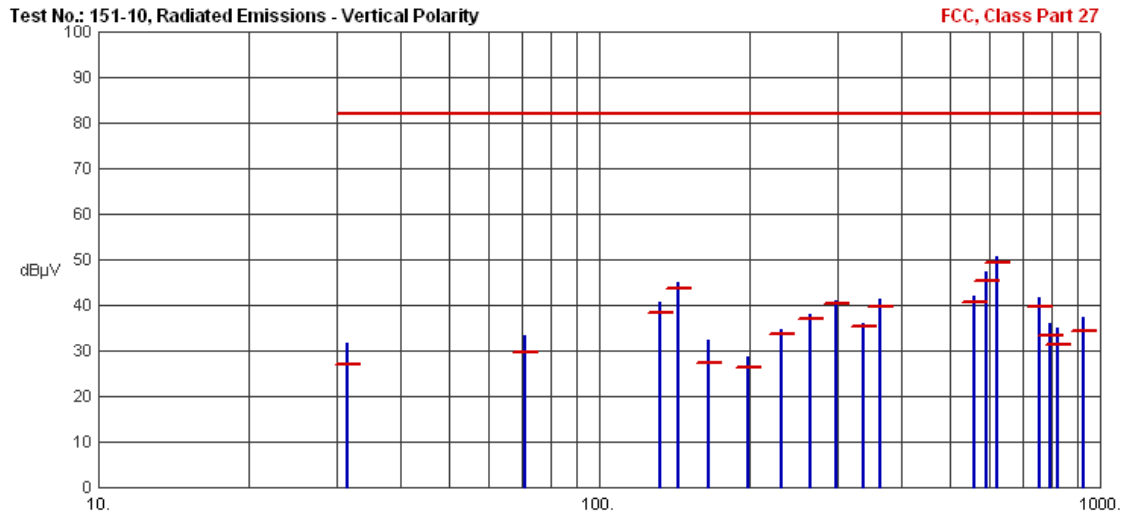

Frequency (MHz)	Pk Amp (dBµV/m)	QP Amp (dBµV/m)	QP Limit (dBµV/m)	Margin (dB)	Ant Ht (cm)	Table (Deg)	Comments
31.4082	31.58	27.01	82.00	-54.99	N/A	N/A	
71.0806	33.18	29.81	82.00	-52.19	N/A	N/A	
131.9821	40.58	38.43	82.00	-43.57	N/A	N/A	
143.9921	44.98	43.74	82.00	-38.26	N/A	N/A	
164.9834	32.40	27.34	82.00	-54.66	N/A	N/A	
198.0010	28.56	26.47	82.00	-55.53	N/A	N/A	
230.9835	34.63	33.69	82.00	-48.31	N/A	N/A	
263.9834	38.08	37.02	82.00	-44.98	N/A	N/A	
296.9904	41.04	40.38	82.00	-41.62	N/A	N/A	
335.9759	36.04	35.21	82.00	-46.79	N/A	N/A	
362.9815	41.41	39.81	82.00	-42.19	N/A	N/A	
560.9990	41.85	40.68	82.00	-41.32	N/A	N/A	
593.9994	47.35	45.45	82.00	-36.55	N/A	N/A	
623.9740	50.64	49.39	82.00	-32.61	N/A	N/A	
758.9811	41.76	39.80	82.00	-42.20	N/A	N/A	
791.9893	35.96	33.21	82.00	-48.79	N/A	N/A	
824.9836	34.88	31.44	82.00	-50.56	N/A	N/A	
923.9998	37.45	34.46	82.00	-47.54	N/A	N/A	


6. Measurement Data (continued)

6.4. Field Strength of Spurious Emissions 27.53 (g) (continued)

6.4.5. Measurement and Equipment Setup

Test Date:	03/01/2010
Test Engineer:	Brian Breault
Site Temperature (°C):	21.7
Relative Humidity (%RH):	22
Frequency Range:	Above 1 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	1 MHz
EMI Receiver Avg Bandwidth:	3 MHz
Detector Functions:	Peak and Average
Antenna Height:	1 to 4 meters

6.4.6. Radiated Emissions above 1 GHz

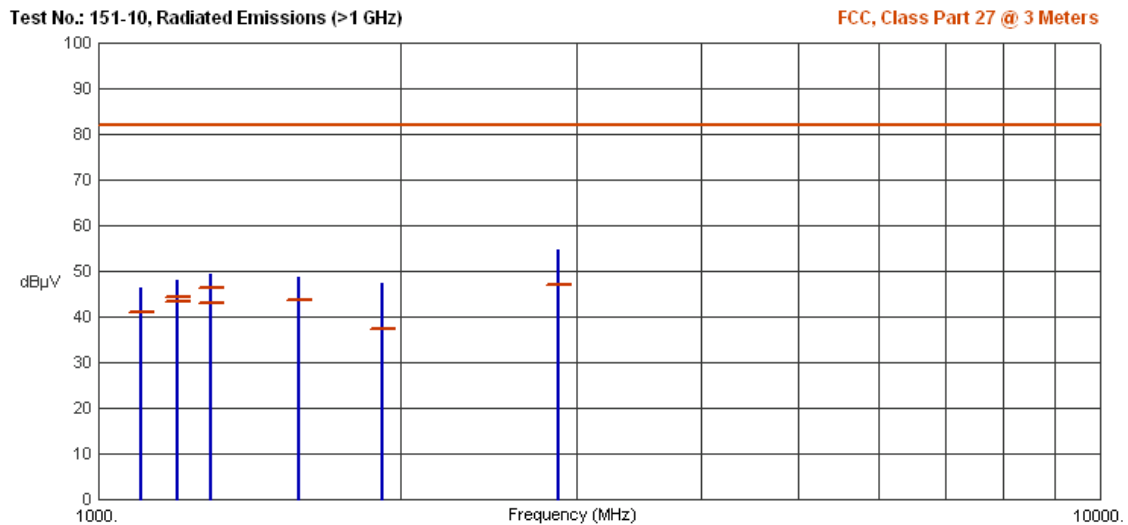

**6. Measurement Data (continued)**

**6.4. Field Strength of Spurious Emissions 27.53 (g) (continued)**

6.4.6. Radiated Emissions above 1 GHz

Frequency (MHz)	Pk Amp (dBµV/m)	Av Amp (dBµV/m)	Av Limit (dBµV/m)	Margin (dB)	Ant Ht (cm)	Table (Deg)	Comments
1103.9977	46.33	41.12	82.00	-40.88	N/A	N/A	
1199.9474	47.99	44.26	82.00	-37.74	N/A	N/A	
1200.0142	47.45	43.40	82.00	-38.60	N/A	N/A	
1295.8535	49.42	46.29	82.00	-35.71	N/A	N/A	
1295.9720	47.17	42.97	82.00	-39.03	N/A	N/A	
1583.9407	48.71	43.74	82.00	-38.26	N/A	N/A	
1920.0819	47.26	37.26	82.00	-44.74	N/A	N/A	
2880.0224	54.82	47.15	82.00	-34.85	N/A	N/A	

**6.5. Frequency Stability 27.54**

Requirement: The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized band of operation.


Note: The EUT does not translate the input frequency and therefore this testing was not performed.

## 6. Measurement Data (continued)


### 6.6. Inter-modulation

Requirement: Using the maximum drive level determined in the output power section apply three CW tones at low, mid and high frequencies in the band and verify the inter-modulation products do not exceed -13 dBm conducted.

#### 6.6.1. 704 MHz Inter-modulation products

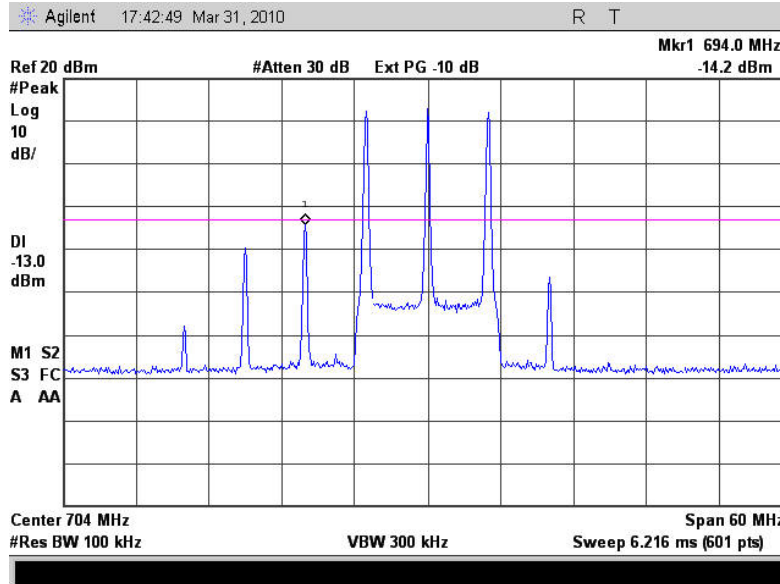

#### 6.6.2. 734 MHz Inter-modulation products

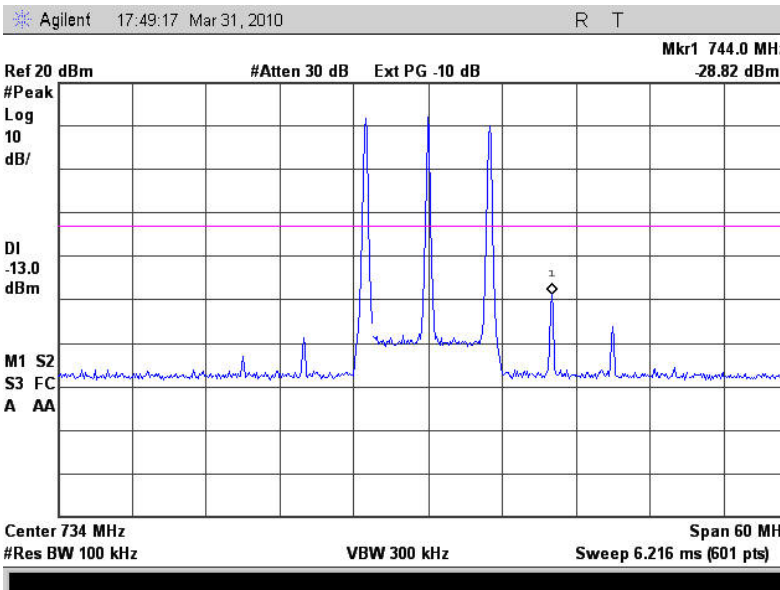

6. Measurement Data (continued)

6.7. Public Exposure to Radio Frequency Energy Levels 1.1307 (b)(1)

	MPE Distance (cm)	DUT Output Power (dBm)	DUT Antenna Gain (dBi)	Power Density		Limit (mW/cm <sup>2</sup> )	Result
				(mW/cm <sup>2</sup> )	(W/m <sup>2</sup> )		
	(1)	(2)	(3)	(4)		(5)	
Downlink	20	30.67	3	0.463	4.6315	1	Compliant
Uplink	22	34.64	3	0.954	9.5487	1	Compliant
Downlink	49	30.67	14	0.971	9.7139	1	Compliant
Uplink	77	34.64	14	0.981	9.8131	1	Compliant

$$PD = \frac{OP + AG}{(4 \times \pi \times d^2)}$$

1. Reference CFR 2.1093(b): For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Actual separation distance was calculated for outdoor applications.
2. Section 6.1.2 of this test report. Note that the value has been adjusted to include the cable insertion loss.
3. Data supplied by the client. 3 dBi for Indoor, 14 dBi for Outdoor Applications
4. Power density is calculated from field strength measurement and antenna gain.
5. Reference CFR 1.1310, Table 1: Limits for Maximum Permissible Exposure (MPE), Section (B): Limits for General Population/Uncontrolled Exposure.



## **7. Test Site Description**

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with Federal Communications Commission (FCC) and Industry Canada standards. A description of the test sites is on file with the FCC (registration number **96392**) and Industry Canada (file number **IC 3023A-1**).


The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane required by EN 55022.


Both sites are designed to test products or systems 1.5 meter W x 1.5 meter L x 2.0 meter H, floor standing or table top.

**Appendix A**

**RF Output Power**

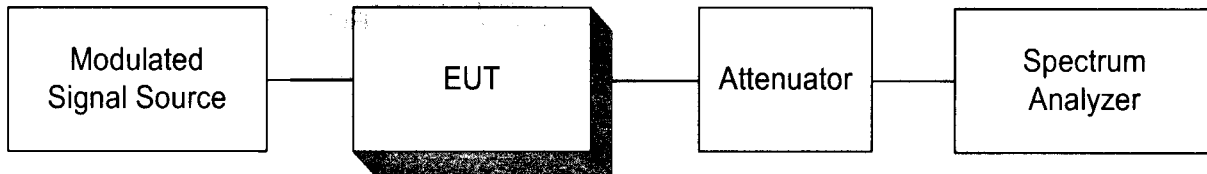


**Occupied Bandwidth**

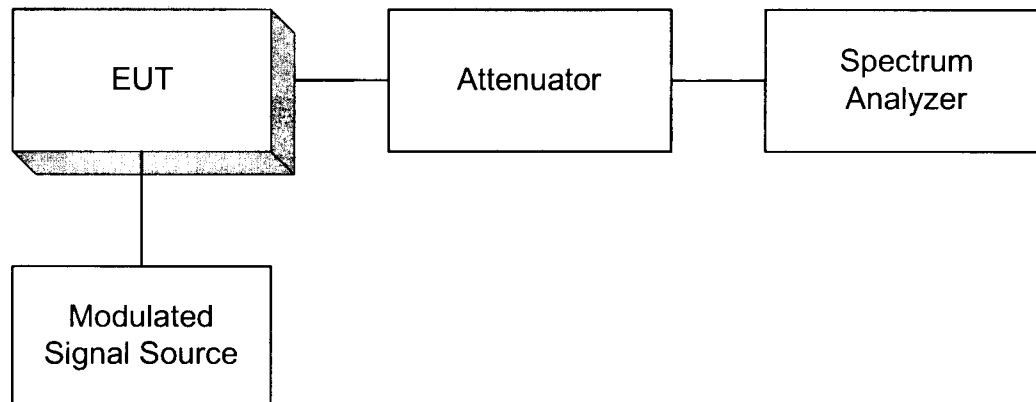

### Appendix A

#### Spurious Emissions at the Antenna Terminals

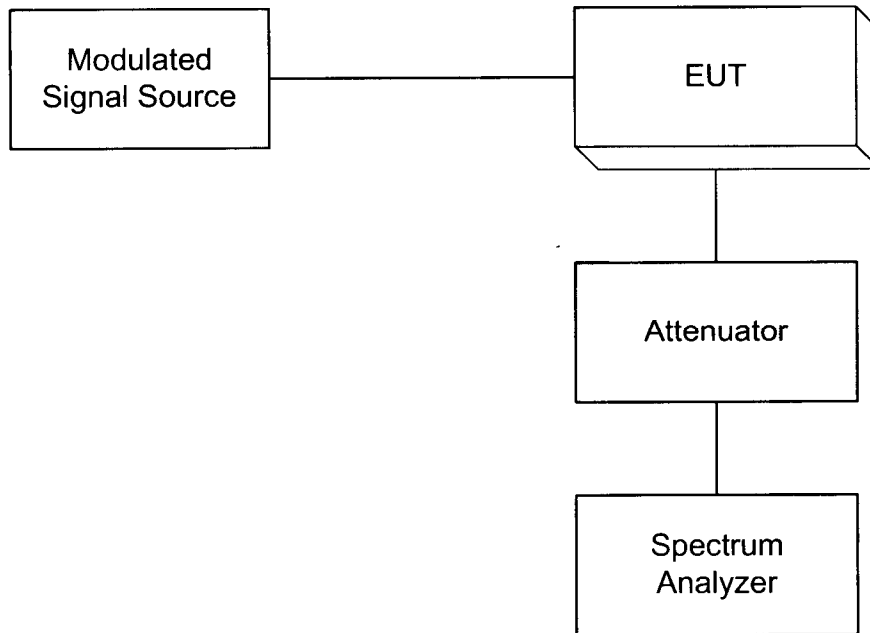

#### Field Strength of Spurious Radiation

