


# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Uplink (Low) - Output at 824.03 MHz		

10:40:02 AUG 14, 2006

REF 30.0 dBm AT 10 dB

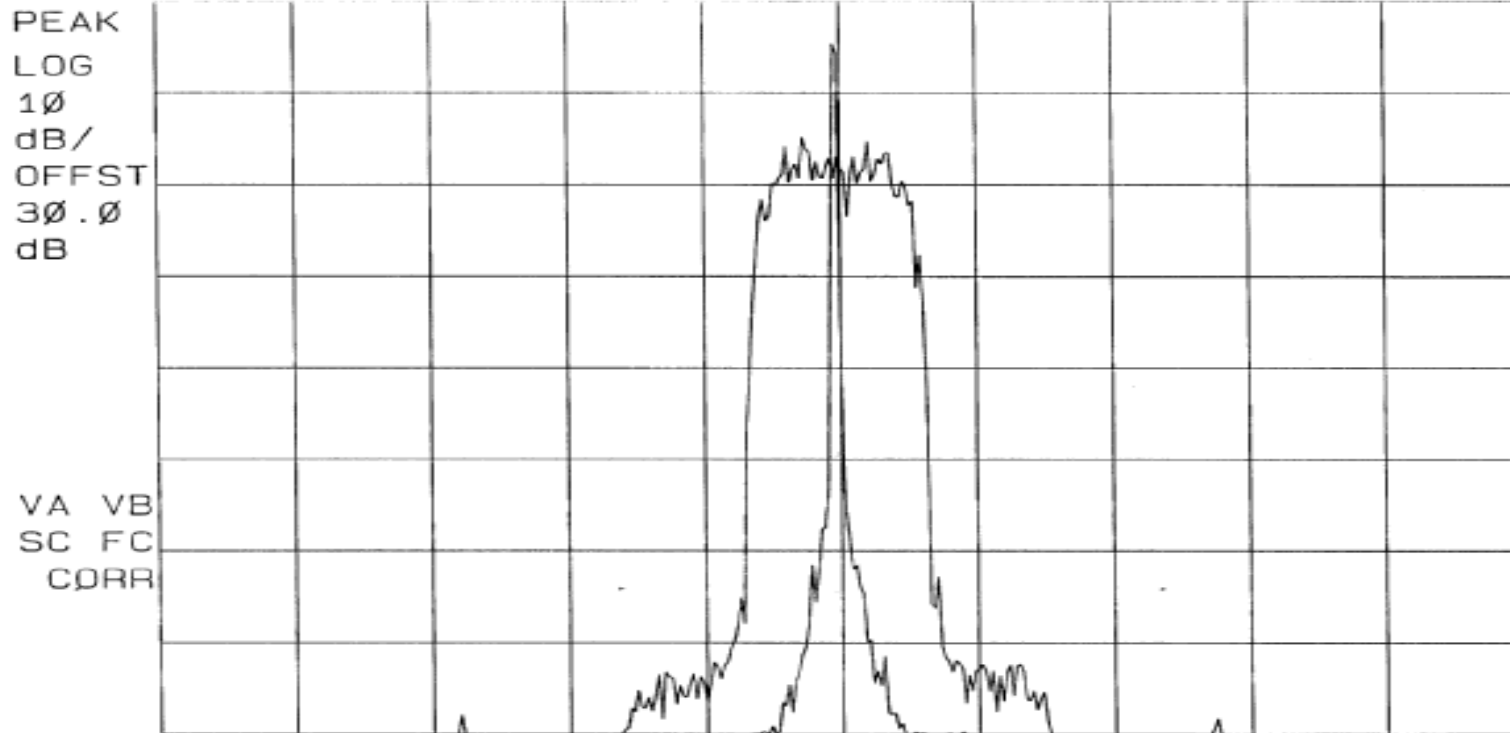

CENTER 824.0300 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth			
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier	
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002	
Test Specification:	FCC Part 2	Paragraph:	2.1049	
Operating Mode:	Amplifying input signal			
Notes:	TDMA - Uplink (Low) - Input at 824.03 MHz			
Job No:	R-4609N-1		Technician:	M.Seamans
Date:	8/16/2006			

10:44:53 AUG 14, 2006

REF 30.0 dBm AT 10 dB

PEAK  
LOG  
10  
dB/  
OFFST  
30.0  
dB

VA SB  
SC FC  
CORR

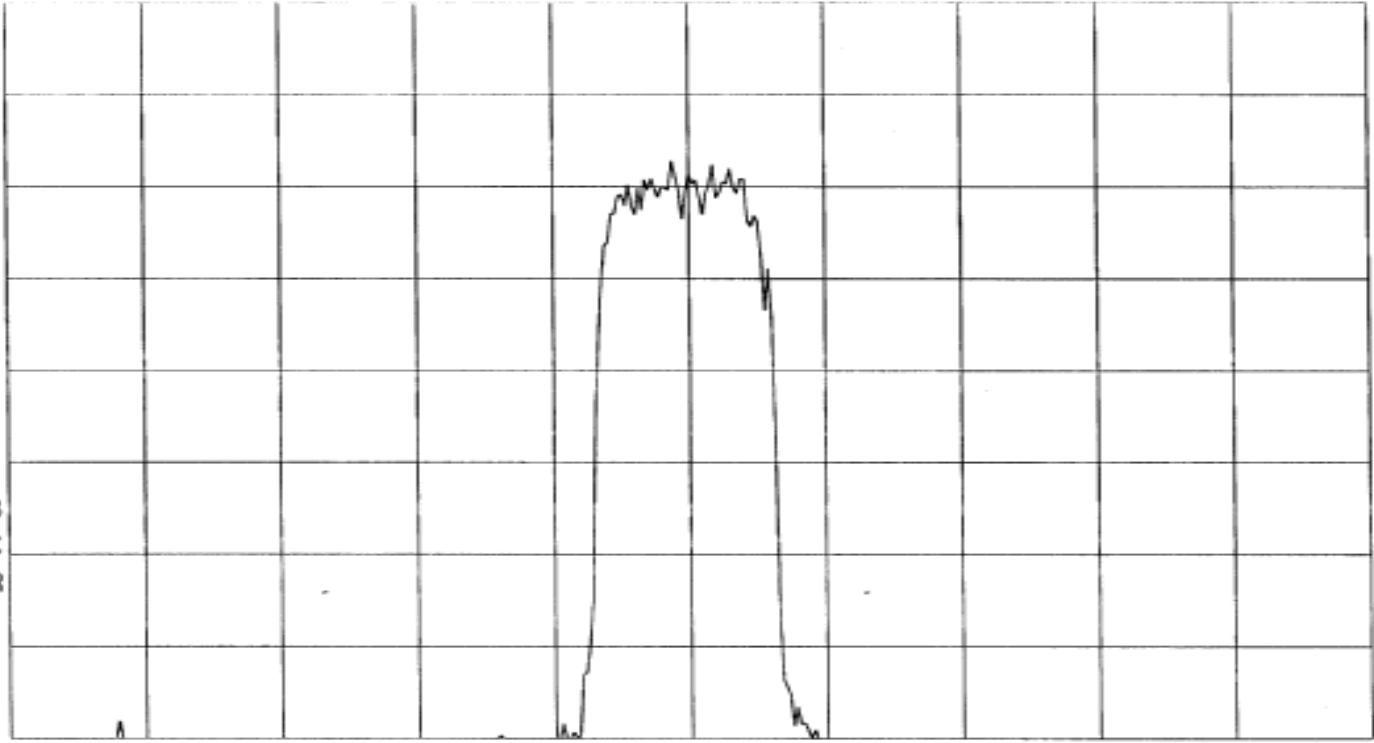

CENTER 824.0300 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec


# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Uplink (High) - Output at 848.97 MHz		

10:55:52 AUG 14, 2006

REF 30.0 dBm AT 10 dB

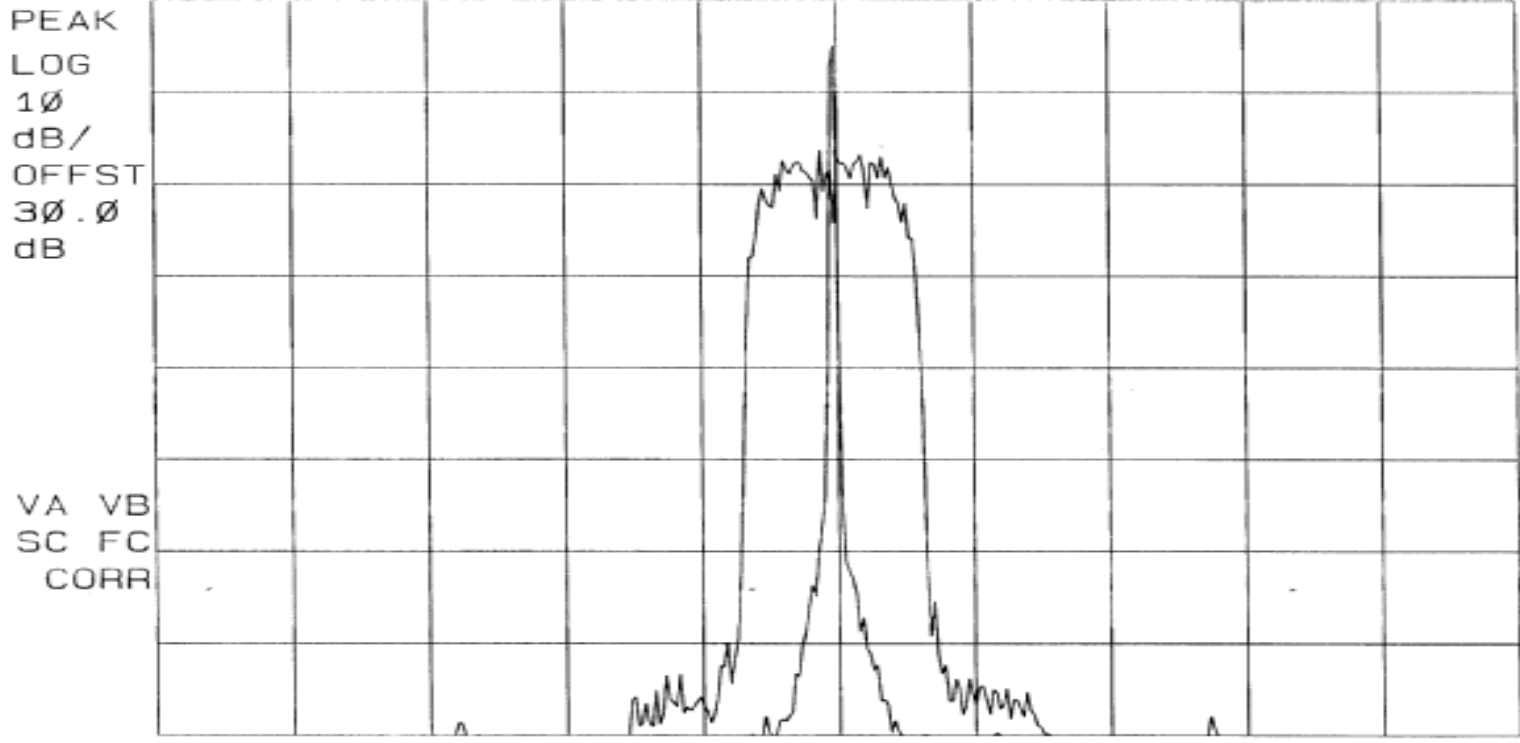

CENTER 848.9700 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec


# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth			
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier	
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002	
Test Specification:	FCC Part 2	Paragraph:	2.1049	
Operating Mode:	Amplifying input signal			
Notes:	TDMA - Uplink (High) - Input at 848.97 MHz			
Job No:	R-4609N-1		Technician:	M.Seamans
Date:	8/16/2006			

10:49:47 AUG 14, 2006

REF 30.0 dBm AT 10 dB

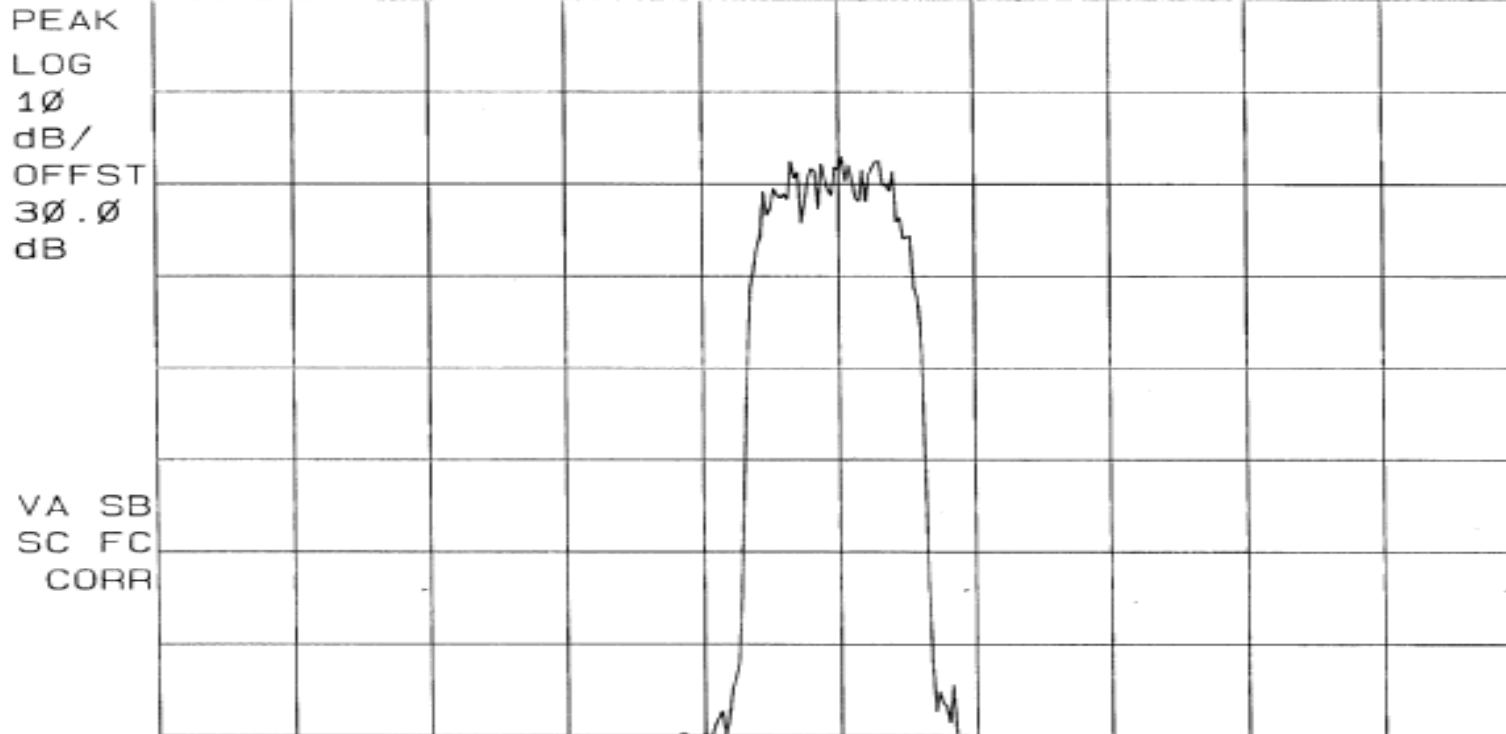

CENTER 848.9700 MHz  
#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz  
SWP 8.33 sec

# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth			
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier	
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002	
Test Specification:	FCC Part 2	Paragraph:	2.1049	
Operating Mode:	Amplifying input signal			
Notes:	TDMA - Downlink (low) - Output at 869.03 MHz			
Job No:	R-4609N-1		Technician:	M.Seamans
Date:	8/16/2006			

10:31:35 AUG 14, 2006

REF 30.0 dBm AT 10 dB

PEAK  
LOG  
10  
dB/  
OFFST  
30.0  
dB

VA VB  
SC FC  
CORR

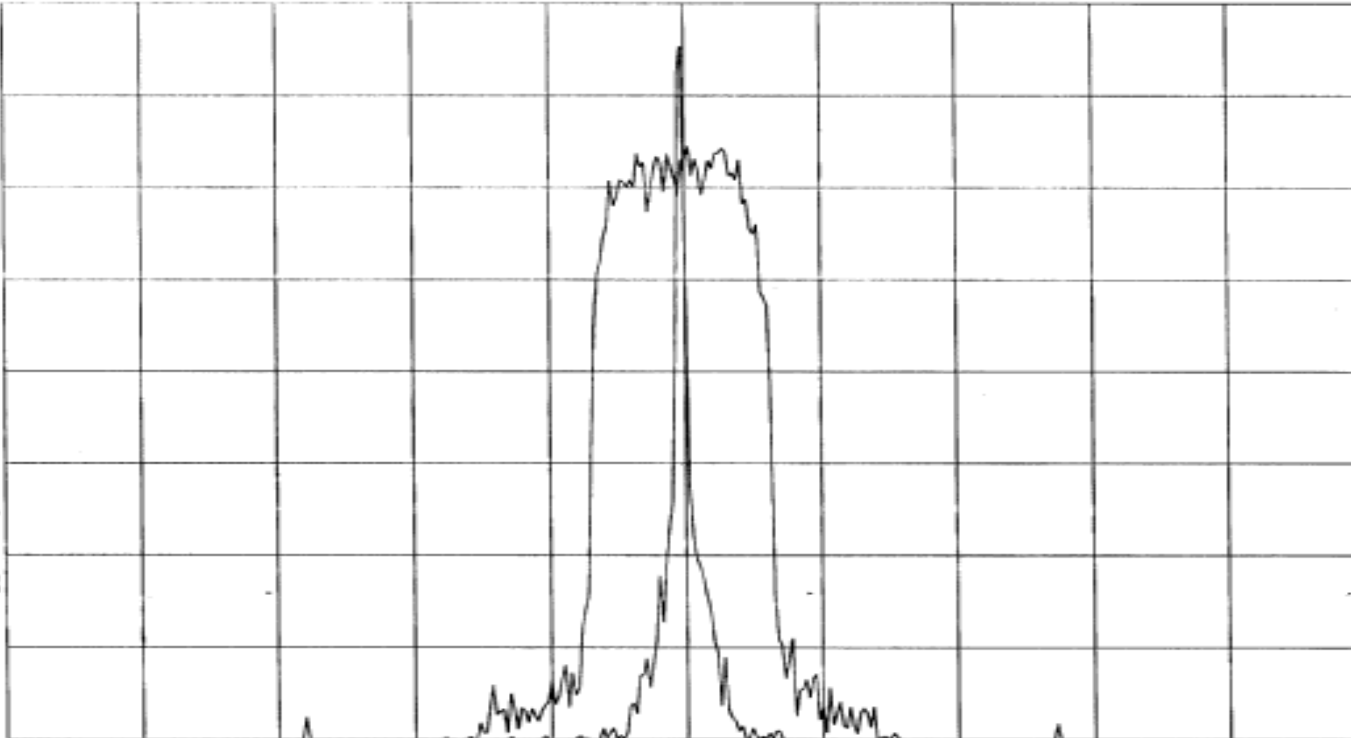

CENTER 869.03 MHz  
#RES BW 300 Hz

#VBW 1 kHz

SPAN 250 kHz  
SWP 8.33 sec

# RETLIF TESTING LABORATORIES


## EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth			
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier	
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002	
Test Specification:	FCC Part 2	Paragraph:	2.1049	
Operating Mode:	Amplifying input signal			
Notes:	TDMA - Downlink (low) - Input at 869.03 MHz			
Job No:	R-4609N-1		Technician:	M.Seamans
Date:	8/16/2006			

10:34:39 AUG 14, 2006

REF 30.0 dBm AT 10 dB

PEAK  
LOG  
10  
dB/  
OFFST  
30.0  
dB

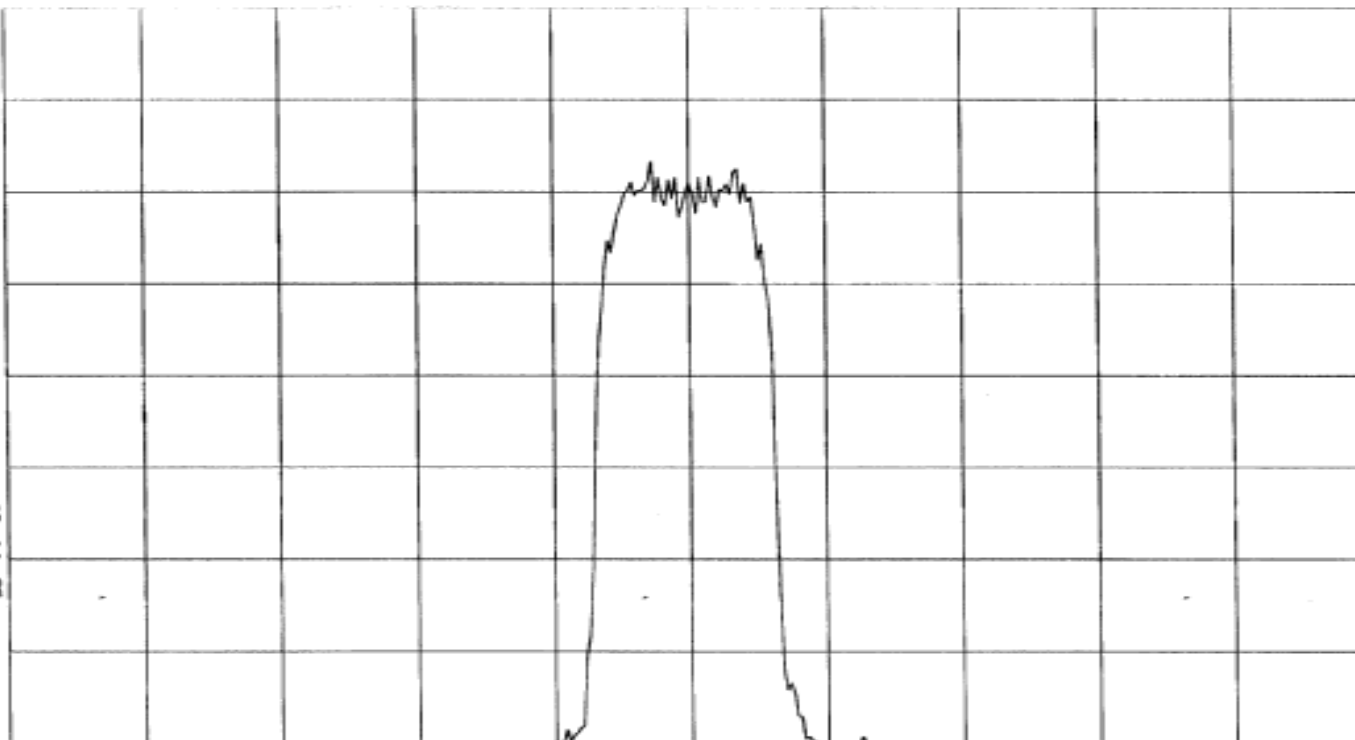

CENTER 869.0300 MHz  
#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz  
SWP 8.33 sec

# RETLIF TESTING LABORATORIES

## EMISSIONS DATA SHEET


Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph:	2.1049
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Downlink (High) - Output at 893.97 MHz		

10: 22: 38 AUG 14, 2006

REF 30.0 dBm AT 10 dB

PEAK  
LOG  
10  
dB/  
OFFST  
30.0  
dB

VA VB  
SC FC  
CORR

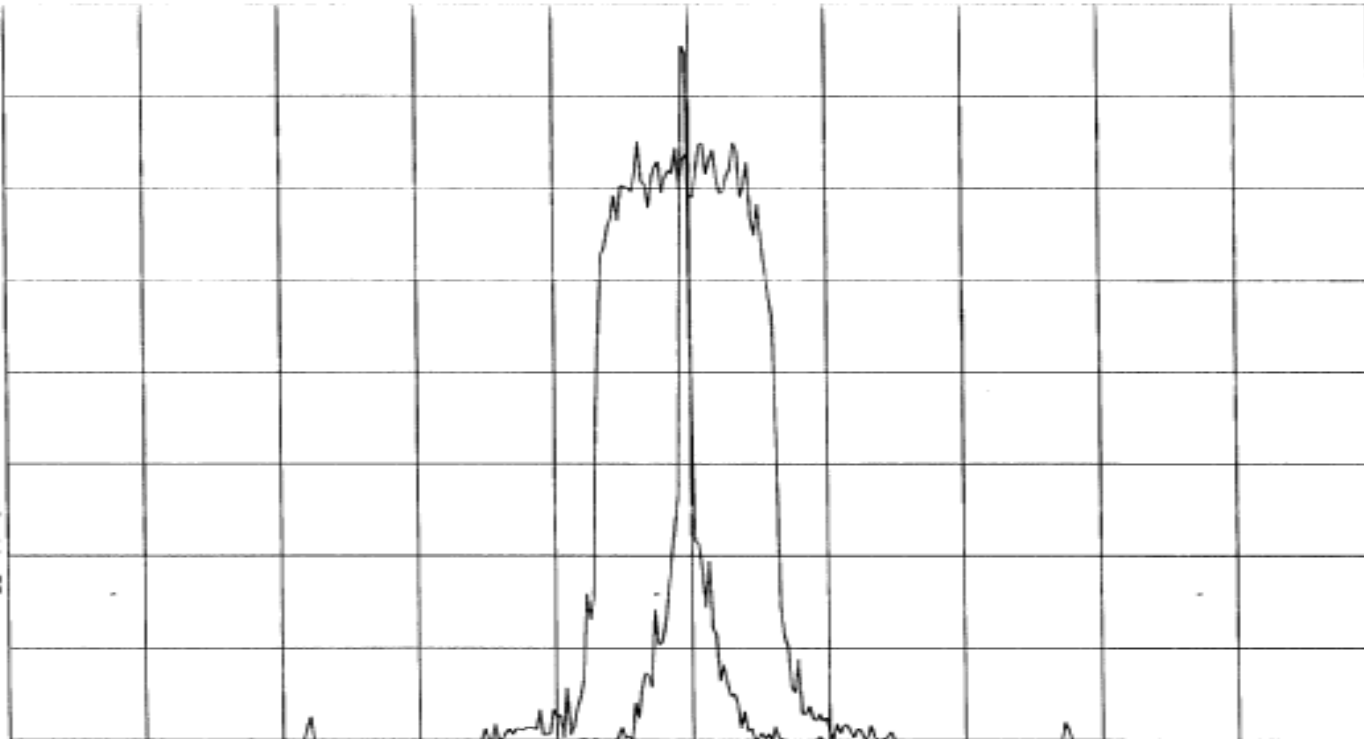

CENTER 893.9700 MHz  
#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz  
SWP 8.33 sec

# RETLIF TESTING LABORATORIES


## EMISSIONS DATA SHEET

Test Method:	Occupied Bandwidth		
Customer:	Cellular Specialties, Inc.	Test Sample:	Dual Band Bidirectional Amplifier
Model No:	CSI-BDA51062-C/P	Serial No:	CC060002
Test Specification:	FCC Part 2	Paragraph: 2.1049	Date:
Operating Mode:	Amplifying input signal		
Notes:	TDMA - Downlink (High) - Input at 893.97 MHz		
Job No:	R-4609N-1		Technician:
		M.Seamans	

10:26:06 AUG 14, 2006

REF 30.0 dBm AT 10 dB

PEAK  
LOG  
10  
dB/  
OFFST  
30.0  
dB

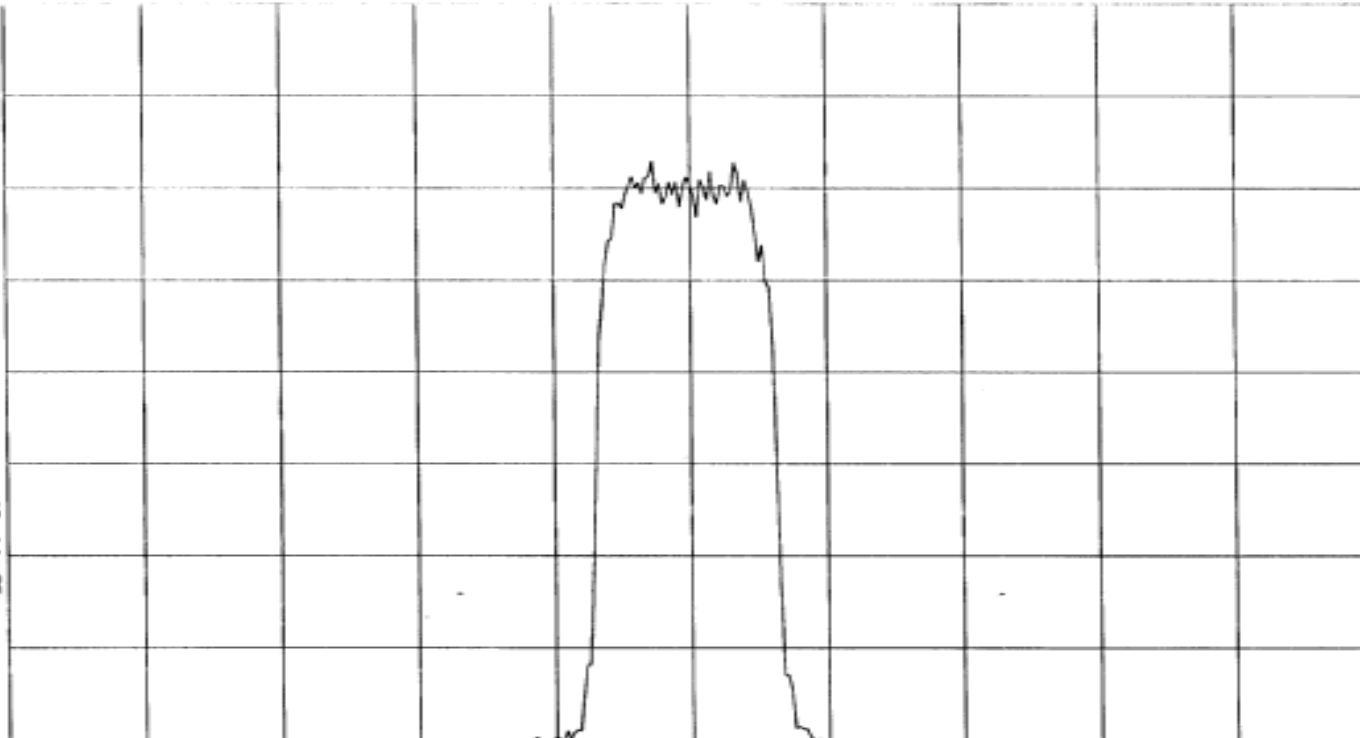

CENTER 893.9700 MHz

#RES BW 300 Hz

#VBW 1 kHz

SPAN 250.0 kHz

SWP 8.33 sec

WA SB  
SC FC  
CORR