

08:50:03 OCT 23, 2002

REF 35.0 dBm

AT 30 dB

PEAK

LOG

10

dB/

OFFST


20.0

dB

VA VB

SC FC

CORR

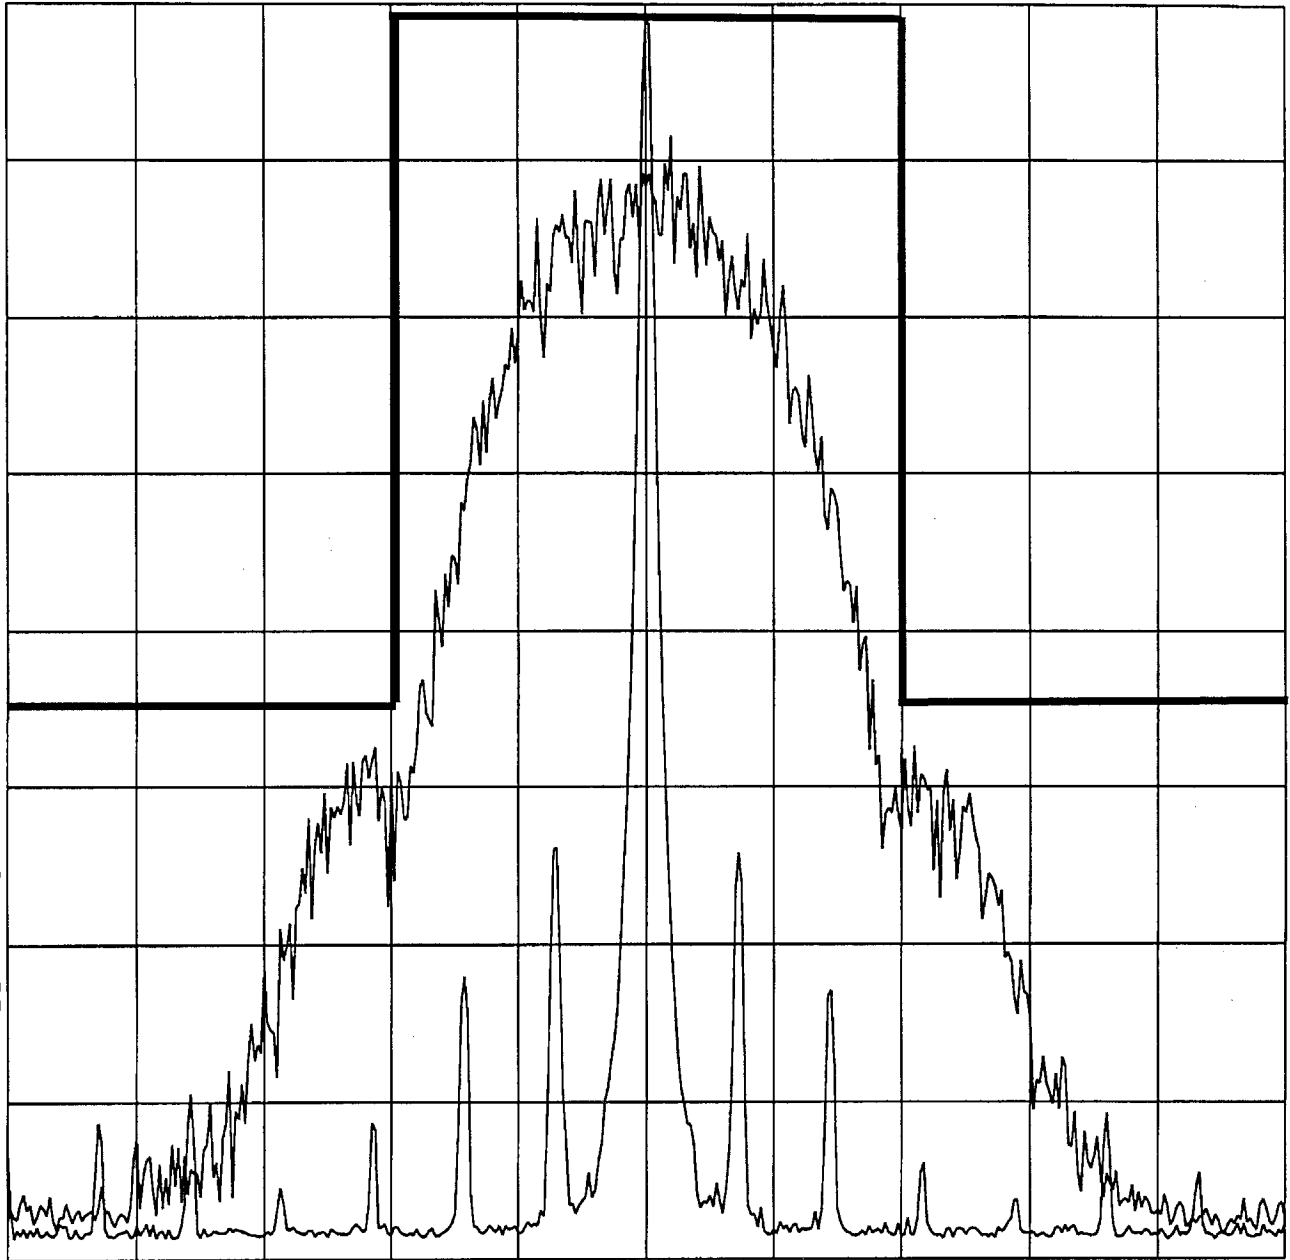

CENTER 1.880000 GHz

SPAN 1.000 MHz

#RES BW 3.0 kHz

#VBW 300 kHz

SWP 333 msec

Customer: Cellular Specialties, Inc.  
 Test Sample: Bidirectional Amplifier  
 Model No: 610 PCS  
 Test Method: Occupied Bandwidth, FCC Part 2, para 2.1049  
 Notes: Uplink Frequency 1880 MHz  
 Modulation: GSM

Date: 10/23/02

Tech: T. Hannemann

Sheet 1 of 2



Retlif Testing Laboratories

Report No. R-4023N


08:57:28 OCT 23, 2002

REF 35.0 dBm

AT 30 dB

PEAK  
LOG  
10  
dB/  
OFFST  
20.0  
dB

VA VB  
SC FC  
CORR

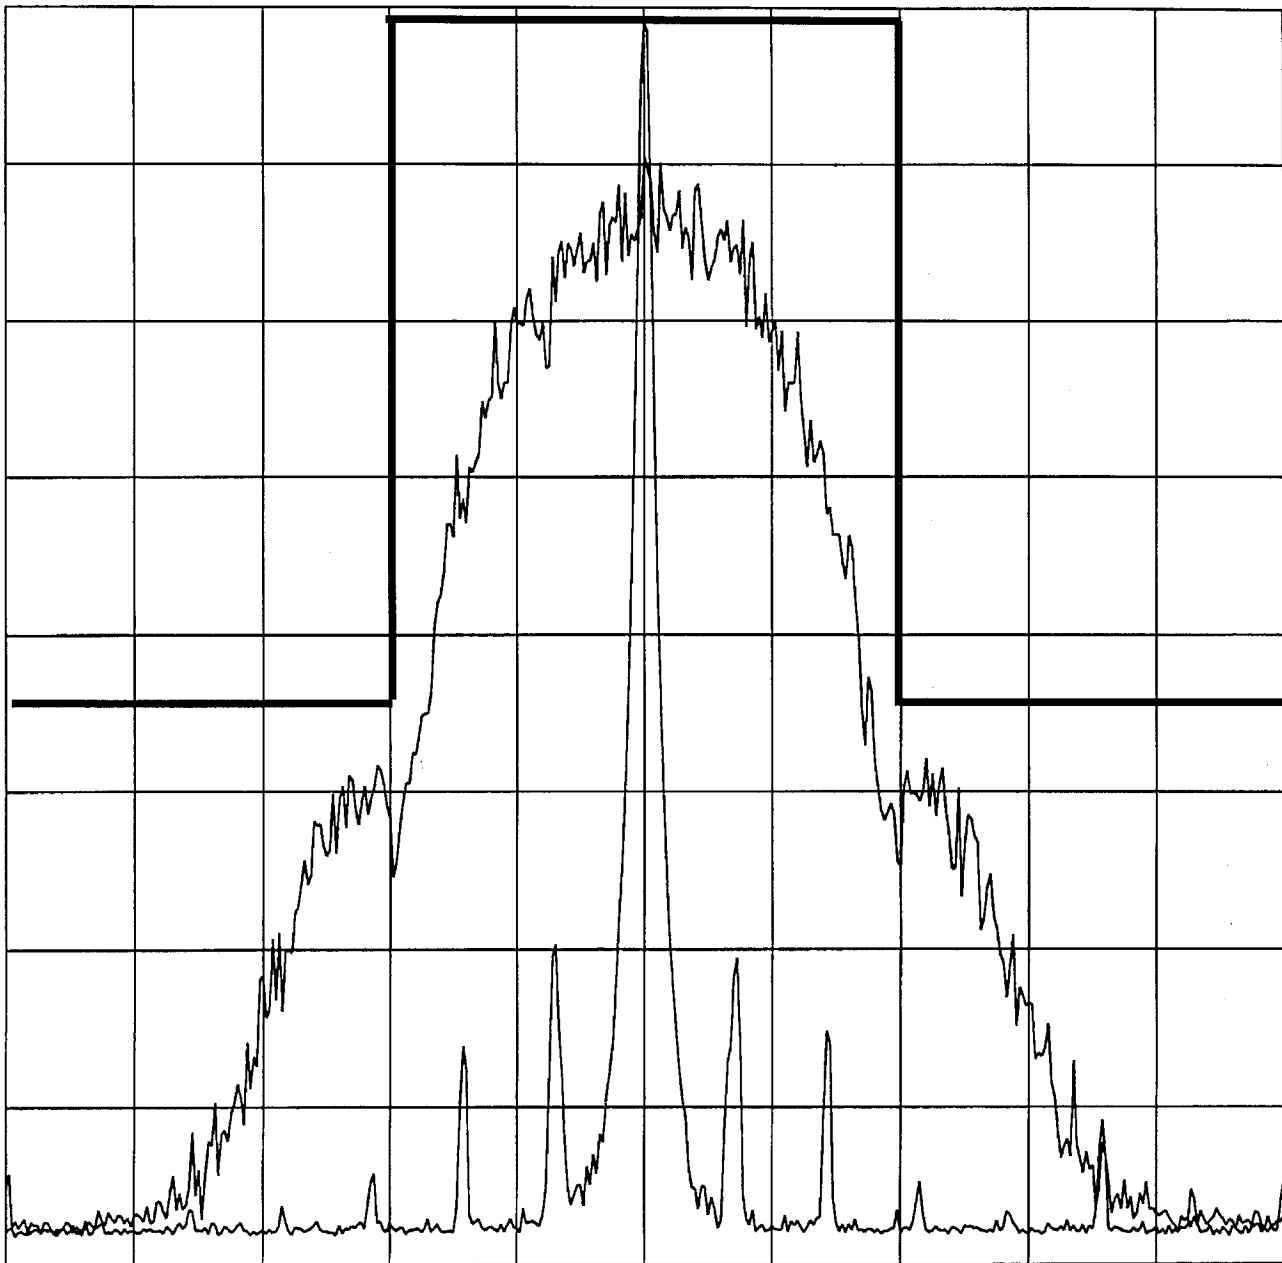

CENTER 1.960000 GHz

SPAN 1.000 MHz

#RES BW 3.0 kHz

#VBW 300 kHz

SWP 333 msec

Customer:	Cellular Specialties, Inc.
Test Sample:	Bidirectional Amplifier
Model No:	610 PCS
Test Method:	Occupied Bandwidth, FCC Part 2, para 2.1049
Notes:	Downlink Frequency 1960 MHz Modulation: GSM

Date: 9/23/02

Tech: T. Hannemann

Sheet 2 of 2



Retlif Testing Laboratories

Report No. R-4023N