PANASONIC FCC ID:NWJ10A002A -- PCS TDMA Body SAR

Generic Twin Phantom; Flat Section; Probe: ET3DV5 - SN1370 -- Probe Cal Date 02/00

Med. Parameters 1900 MHz Muscle: σ = 1.85 mho/m ε_r = 54.2 ρ = 1.00 g/cm^3; Antenna Position -- Out; Crest Factor 3.0

SAR (1g): 0.408 mW/g, SAR (10g): 0.225 mW/g

Panasonic Tri-mode Model:EBTX-220

PCS TDMA Mode, Ch.0002 [1851MHz]; Spacing = 2.5cm from flat phantom to phone, w/Holster

Conducted Power = 26.2dBm [Level: PL2]; S/N: P8.2-4, standard battery

Test Date - 10/27/2000

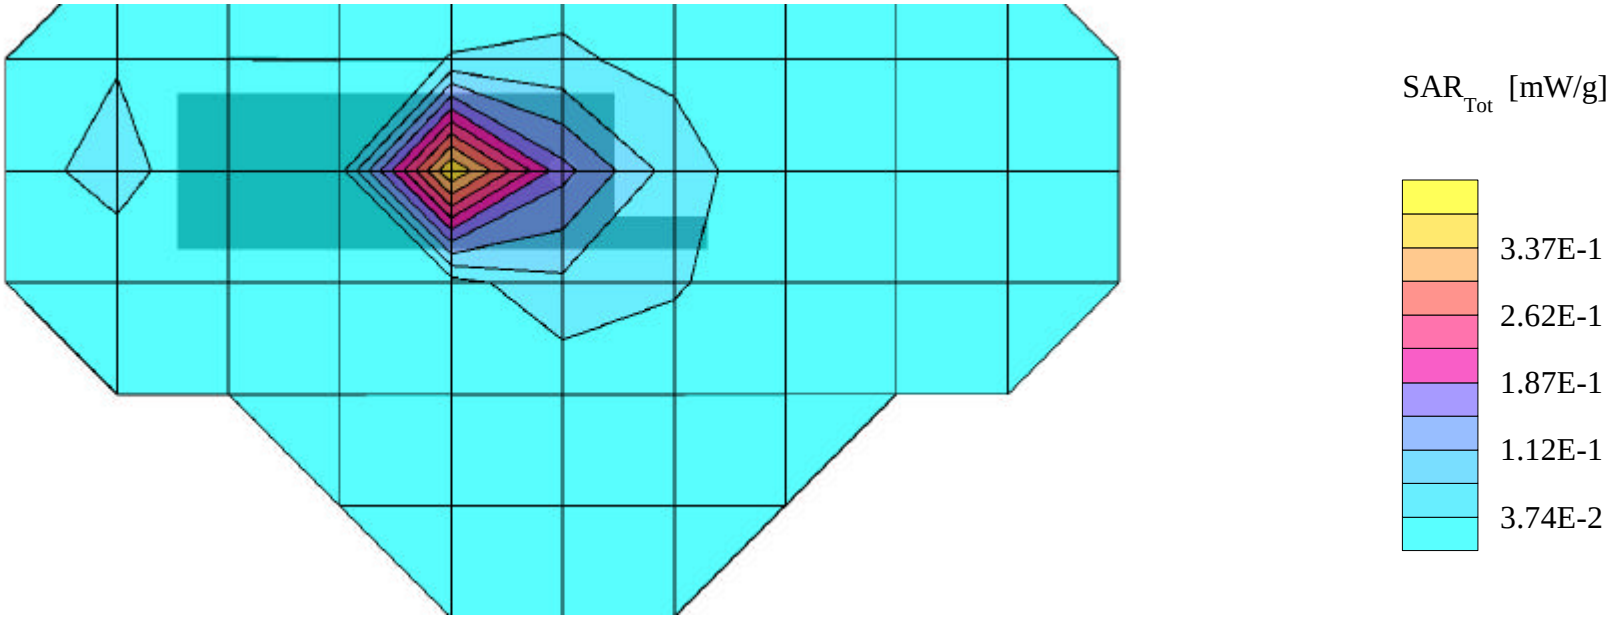

PANASONIC FCC ID:NWJ10A002A -- PCS TDMA Body SAR

Generic Twin Phantom; Flat Section; Probe: ET3DV5 - SN1370 -- Probe Cal Date 02/00

Med. Parameters 1900 MHz Muscle: σ = 1.85 mho/m ε_r = 54.2 ρ = 1.00 g/cm^3; Antenna Position -- Out; Crest Factor 3.0

SAR (1g): 0.384 mW/g, SAR (10g): 0.207 mW/g

Panasonic Tri-mode Model:EBTX-220

PCS TDMA Mode, Ch.1000 [1880MHz]; Spacing = 2.5cm from flat phantom to phone, w/Holster

Conducted Power = 26.2dBm [Level: PL2]; S/N: P8.2-4, standard battery

Test Date - 10/27/2000

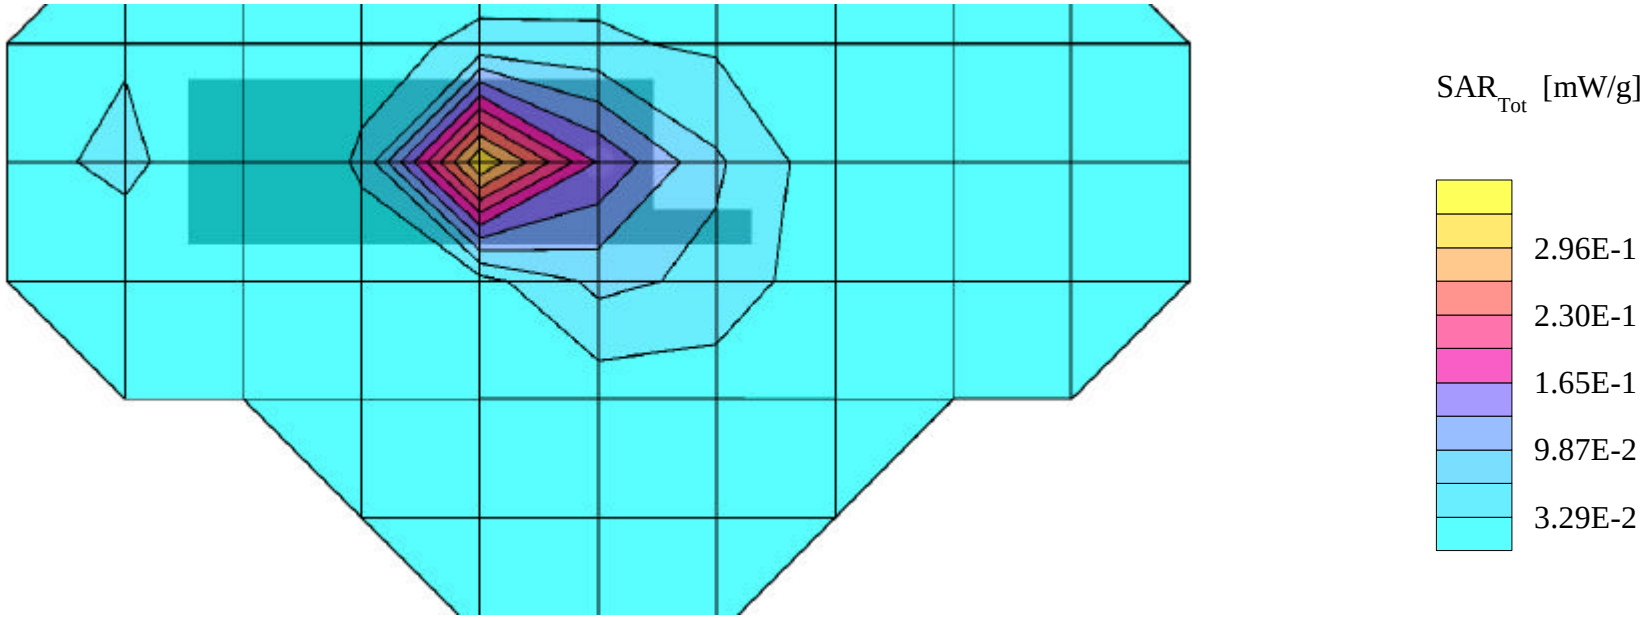

PANASONIC FCC ID:NWJ10A002A -- PCS TDMA Body SAR

Generic Twin Phantom; Flat Section; Probe: ET3DV5 - SN1370 -- Probe Cal Date 02/00

Med. Parameters 1900 MHz Muscle: σ = 1.85 mho/m ε_r = 54.2 ρ = 1.00 g/cm^3; Antenna Position -- Out; Crest Factor 3.0

SAR (1g): 0.282 mW/g, SAR (10g): 0.150 mW/g

Panasonic Tri-mode Model:EBTX-220

PCS TDMA Mode, Ch.1998 [1910MHz]; Spacing = 2.5cm from flat phantom to phone, w/Holster

Conducted Power = 26.2dBm [Level: PL2]; S/N: P8.2-4, standard battery

Test Date - 10/27/2000