

VT240SC2D 150mW

VIDEO TRANSMITTER MODULE

F.C.C. I.D. NVRVT240SC2D



END-USER INSTRUCTION MANUAL

F

LMW Electronics Ltd

LMW House

Leeside

Merry Lees Industrial Estate

Desford

LEICESTER

LE9 9FS

ENGLAND

Tel: +44 (0)1530 231141 Fax: +44 (0)1530 231143

E-Mail: sales@Imw.co.uk Web Page: www.lmw.co.uk

CONTENTS

1. INTRODUCTION	2
2. VT240SC2D LOW POWER MICROWAVE VIDEO TRANSMITTER	3
2.1 Connectors	3
2.2 Use	3
 2.3 Typical connections 2.3.1 Power connections 2.3.2 One Sound Channel Fitted SCREENED LEAD 2.3.3 Twin Sound Channels Fitted SCREENED LEAD 2.4 Specifications	4 4 5 5 5
3. BLOCK DIAGRAM FOR VT240SC2D VIDEO TRANSMITTER	6
4. LIMITED WARRANTY STATEMENT	7
5. IDENTIFICATION AND APPROVAL LABELS	9
6 WARRANTY REGISTRATION DOCUMENT	10

1. INTRODUCTION

Thank you for your purchase of the LMW Model VT240SC2D 150W Video Transmitter Module. The VT240SC2D is part of a series of innovative low power Video Transmitters that include the VT24SC2D, VT2400SC2D and VT2450SC2D Video Transmitters. These small 12V DC Video Transmitter modules can be used for various applications in custom Wireless Video Transmission systems, including Wireless Video Surveillance Systems. These modules are the same as those embedded within the LMW Electronics Ltd., series of Wireless Video Surveillance systems available as turnkey, fully duplex, remote video monitoring equipment.

Practical applications for these Video Transmitters range beyond the law enforcement and security communities. They have been employed by the military, in research, by industry, and in a variety of recreational applications both mobile and fixed. LMW Electronics Ltd., of Leicester, England has been the leader in the design and manufacture of rugged and reliable Wireless Video systems for over ten years. LMW Wireless Video Products are guaranteed for one year and are a proven reputation within the Wireless Video world.

The End-User Instruction Manual is part of a two manual set that accompanies your VT240SC2D and provides service details, alignment instruction, schematic drawings and parts listing for this transmitter. Additional service assistance for the VT series of LMW Video Transmitters can be obtained from the closest LMW Electronics Ltd., U.S. Distributor/Representative included on page??? of this manual

WARNING: THE SEMICONDUCTORS IN THIS MODULE MAY CONTAIN TOXIC BERYLLIUM OXIDE AND THEREFORE MUST BE HANDLED WITH EXTREME CAUTION. DISPOSAL OF THESE SEMICONDUCTORS MUST BE VIA A SPECIALIST DISPOSAL COMPANY.

2. VIZ4UOCZU LUVV FUVVEK IVIICKUVVAVE VIDEU IKANOIVIII IEK

The VT240SC2D video transmitter is a small video TX with a minimum output power of 150mW and housed in our Milled Housing 110mm x 60mm x 25mm. All the input connections for video, sound and 12V DC are BNC and LEMO. The RF output is presented on an SMA connector.

This module can be specified over the frequency range 2.4GHz to 2.5GHz.



2.1 Connectors

Power LEMO - 4 Pin plug Part No. FGGIB304C

Video input BNC - 75 - various

Audio - single channel LEMO - 5 Pin Plug Part No. FGGIB305C

Audio - dual channel LEMO - 5 pin Plug Part No. FGGIB305C

2.2 Use

This transmitter is better suited to applications where a greater range, up to a kilometre, is required without a great penalty in drawing excessive DC current combined with a rugged housing to withstand large amounts of abuse. The unit will withstand being out in wet and dusty conditions, all the connectors are water resisting, but some extra protection may be needed for the BNC video cable.

Suggested antennas for this unit are the AE03, AE07, AE08 and AE04 (or suitable Directional or Omnidirectional 50 Ohm S-Band antenna).

The unit has channel change facility built in. To access this, remove the top cover, the one with the label on, and locate the miniature rotary switch. Rotate this selector until the desired channel number is displayed. Replace the lid.

The Audio inputs are 600Ω balanced or unbalanced.

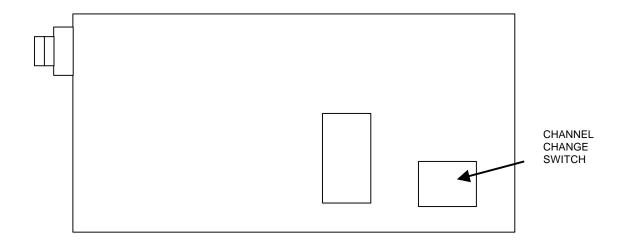


Figure i: Location of channel change switch on VT240SC2D

2.3 Typical connections

2.3.1 Power connections

Function	Wire Colour	Pin number
GND	Black	2
Power	Red	4

Table i: VT240SC2D Power Connections




Figure ii: 4 Pin LEMO pin out orientation viewed from solder spill side

CAUTION

These points should be noted when the VT240SC2D is used on its own without the MDR16 camera outstation.

- 1. The Antenna should always be connected before the transmitter is switched on. Also the antenna and interconnecting Coax cable should be of a good VSWR. Always use good low loss cable such as RG400, RG213, RG8, and 9913F, etc. And make sure the connectors are terminated correctly.
- 2. When the VT240SC2D is used with a stand alone, 12v DC source. Please select a Power Supply of a suitable standard as to supply a continuous current of 0.5 Amps, fully regulated, and handle a switch-on current in excess of 1 Amps accurately. Failure to do this will result in an over-voltage surge, causing the internal PCB fuze to blow. A reverse supply is catered for, with a series diode, but caution, any voltage in excess of 16V will cause the internal protection circuit to take out the fuze, protecting the more sensitive circuits in the transmitter. Please refer to the Manufacturer or Agent if you are unsure. If the Internal fuze does blow, or the Transmitter fails to give satisfactory results, the unit should be returned to your Agent, or Authorised Service Engineer

4

Function	Wire Colour	Pin number
AF In	Red	2
AF In	Blue	3
GND	Screen	1

Table ii : VT240SC2D Single Sound Channel Connections

To use with an unbalanced input leave the BLUE wire unconnected.



Figure iii: 5 Pin LEMO pin out orientation viewed from solder spill side

2.3.3 Twin Sound Channels Fitted SCREENED LEAD

Function	Wire Colour	Pin number
AF In Ch. 1	Red	2
AF In Ch 1	Blue	3
AF In Ch. 2	Green	4
AF In Ch 2	Yellow	5
GND	Screen	1

Table iii: VT240SC2D Twin Sound Channel Connections

To use with an unbalanced input leave the RED and YELLOW wires unconnected.

2.4 Specifications

DC connection	LEMO
RF connection	50Ω, SMA
Audio Connections	LEMO
Video Input	75 Ω , BNC

Video Bandwidth 20Hz to 5.5MHz, ±1dB

Audio Input 1V pk to pk into 600Ω unbalanced

Audio Bandwidth 50Hz to 10KHz ±1dB Audio Subcarriers 6.8MHz & 7.5MHz

Audio Pre-emphasis 50uS

Carrier Frequencies 2.458GHz & 2.474GHz RF Power out. 150mW +3dB -1dB Spurious Outputs Better than -60dBW Frequency Stability Better than ±30ppm.

No. of RF Channels Up to 16

DC Input 10.7V to 14.6V @ <300mA

Deviation Adjustable, 0 to 8MHz

Channel Bandwidth 12MHz


Video Pre-emphasis 725-6 or CCIR 405

Operational Temperature-

Range -30 to +50°C

Dimensions 75x122x32mm ex. conns.

_

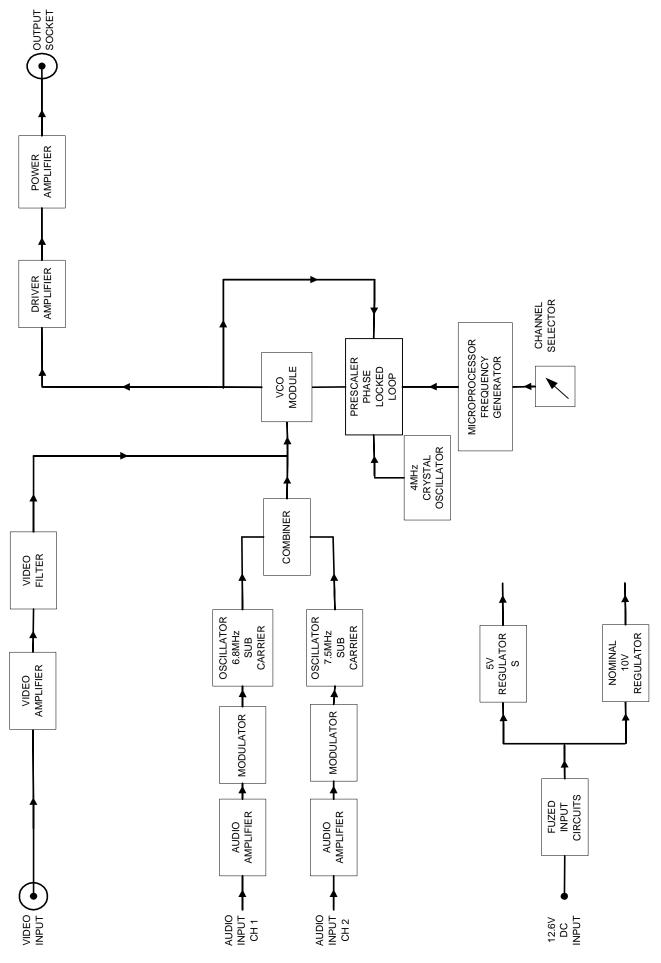

^

4. LIMITED WARRANTT STATEMENT

This limited warranty applies only to LMW Electronics Ltd., product Distributor in the United States.

What is covered:

Any defect in materials or workmanship.

LMW Electronics Ltd U.S.Distributor does not warrant the operation of any VT Video Transmitters to be uninterrupted or error-free.

For how long:

One Year.

What we will do:

If your Video Transmitter is defective and returned within 30 days of the date it was purchased, we will replace it at no charge to you. If returned after 30 days but within one year of the date of purchase, we will repair it, or, at our option, replace it at no charge to you.

If we repair your Video Transmitter, we may use new or reconditioned parts. If we choose to replace your Video Transmitter, we may replace it with a new or reconditioned one of the same or similar design or functionality. The repair or replacement will be warranted for either (a) 90 days or (b) the remainder of the original one-year warranty period, whichever is longer,

Limitations:

IMPLIED WARRANTIES, INCLUDING THOSE OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTIBILITY (AN UNWRITTEN WARRANTY THAT THE PRODUCT IS FOR ORDINARY USE), ARE SPECIFICALLY LIMITED TO ONE YEAR FROM THE DATE OF PURCHASE OF YOUR VIDEO TRANSMITTER AND THEREAFTER ARE SPECIFICALLY DISCLAIMED. WE WILL NOT PAY FOR THE LOSS OF TIME, INCONVENIENCE, LOSS OF USE OF YOUR VIDEO TRANSMITTER, OR PROPERTY DAMAGE CAUSED BY YOUR TRANSMITTER OR ITS FAILURE TO WORK, OR ANY DIRECT OR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING LOST PROFITS.

NEITHER LMW ELECTRONICS LTD., OR ITS U.S. DISTRIBUTOR NOR ANY CREATOR OF SOFTWARE OR FIRMWARE USED IN CONNECTION WITH THE VIDEO TRANSMITTER MAKE ANY WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, WITH RESPECT TO ANY SOFTWARE OR FIRMWARE USED IN CONNECTION WITH THE VIDEO TRANSMITTER, NOR DO THEY WARRANT THAT ANY SUCH SOFTWARE OR FIRMWARE WILL MEET YOUR SPECIFIC REQUIREMENTS. BY USING THE VIDEO TRANSMITTER, YOU HEREBY AGREE TO ASSUME THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF ANY SOFTWARE OR FIRMWARE USED IN CONNECTION WITH THE VIDEO TRANSMITTER. IN NO EVENT SHALL LMW ELECTRONICS LTD., OT ITS U.S. DISTRIBUTOR OR ANY CREATOR OF SOFTWARE OR FIRMWARE USED IN CONNECTION WITH THE VIDEO TRANSMITTER BE LIABLE TO YOU FOR ANY DAMAGES, INCLUDING LOST PROFITS, LOST SAVINGS OR OTHER DIRECT, INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE SOFTWARE OR FIRMWARE USED IN CONNECTION WITH THE VIDEO TRANSMITTER, OR FOR ANY CLAIM BY ANOTHER PARTY.

What we ask you to do:

To get warranty service for your Video Transmitter, you must provide proof of the date of purchase. Within 30 days of the date it was purchased, return your Video Transmitter to your place of purchase for immediate replacement. After 30 days, but within the warranty period described in the second paragraph of "What we will do" above, return your Video Transmitter to your place of purchase for repair or, at our option, replacement at no charge to you. You must ship your Video Transmitter to us prepaid and insured. We suggest you retain your original packing material in the event you need to ship your Video Transmitter. When sending your Video Transmitter to your place of purchase for

operating problem. After repairing or replacing your Video Transmitter, we will ship it to you within the United States at no cost to you. Warranty service is available only in the United States and only during P-Squared Communications, Inc. normal business hours. Repair or replacement of your Video Transmitter at your place of purchase is your exclusive remedy.

What this warranty does not cover:

This limited warranty covers only those defects which arise as a result of normal use of the Video Transmitter. This limited warranty does not cover defects resulting from accidents, negligence, damage while in transit to your place of purchase or service, alterations, modifications, unauthorised repairs, failure to follow instructions or safety precautions, improper installation, improper maintenance, abuse, misuse, mishandling, fire, flood, earthquake, lightning and acts of God. If your Video Transmitter is not covered by our warranty, you may write to the U.S. Distributor for advice as to whether we will repair your Video Transmitter and any other repair information, including charges. We, at our option, may replace rather than repair your Video Transmitter with a new or reconditioned one of the same or similar design and functionality. The repair or replacement will be warranted for either (a) 90 days or (b) the remainder of the one year warranty period, whichever is longer.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IS THE ONLY WARRANTY OFFERED ON YOUR VIDEO TRANSMITTER, AND IT SETS FORTH ALL OF OUR RESPONSIBILITIES REGARDING YOUR VIDEO TRANSMITTER. THERE ARE NO OTHER EXPRESS OR IMPLIED WARRANTIES WITH RESPECT TO YOUR VIDEO TRANSMITTER OTHER THAN THIS LIMITED WARRANTY. NO ORAL OR WRITTEN INFORMATION OR ADVICE GIVEN BY THE U.S. DISTRIBUTOR, ITS AGENTS OR EMPLOYEES SHALL CREATE OR IN ANY WAY INCREASE THE SCOPE OF THIS WARRANTY.

Service after the warranty period:

After your warranty period has expired, you can obtain a Maintenance Agreement by writing to the U.S.Distributor. We recommend that you write 90 days prior to the expiration on your warranty period.

State Law Rights:

This Limited Warranty Statement gives you specific legal rights, and you may also have other rights which may vary from state to state.

TO THE EXTENT THAT THIS LIMITED WARRANTY STATEMENT IS INCONSISTENT WITH THE LAW OF THE LOCALITY WHERE YOU USE THE VIDEO TRANSMITTER, THIS LIMITED WARRANTY STATEMENT SHALL BE DEEMED MODIFIED TO BE CONSISTENT WITH SUCH LOCAL LAW. UNDER SUCH LOCAL LAW, CERTAIN LIMITATIONS OF THIS LIMITED WARRANTY STATEMENT MAY NOT APPLY TO YOU. FOR EXAMPLE, SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS OR THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE EXCLUSIONS OR LIMITATIONS MAY NOT APPLY TO YOU. TO THE EXTENT ALLOWED BY LOCAL LAW, THE REMEDIES PROVIDED IN THIS LIMITED WARRANTY STATEMENT ARE YOUR SOLE AND EXCLUSIVE REMEDIES.

3. IDENTIFICATION AND AFFROVAL LADELS

0. WARRANTI REGISTRATION DUCUMENT

This form should only be returned if you have not purchased the equipment directly from the manufacturers.

Company Name:
Company Address:
Post Code: (Zip Code)
Your Contact Name:
Date Of Purchase:
Suppliers Name:
Product Type
Serial Number

Please Fax this back to us on the number shown on the title page of this manual. We will acknowledge receipt as soon as possible.