

TABLE OF CONTENTS

APPLICANT: SPORTABLE SCOREBOARDS

FCC ID: NXLXCVR3000

TEST REPORT CONTAINING:

PAGE	1-3.....	TEST EQUIPMENT LIST
PAGE	4.....	TEST PROCEDURE
PAGE	5.....	RADIATION INTERFERENCE TEST DATA
PAGE	6.....	OCCUPIED BANDWIDTH
PAGE	7.....	OCCUPIED BANDWIDTH PLOT - LOW
PAGE	8.....	OCCUPIED BANDWIDTH PLOT - MIDDLE
PAGE	9.....	OCCUPIED BANDWIDTH PLOT - HIGH

EXHIBIT ATTACHMENTS:

EXHIBIT 1.....	FCC ID LABEL SAMPLE & LOCATION
EXHIBIT 2.....	BLOCK DIAGRAM
EXHIBIT 3.....	SCHEMATIC
EXHIBIT 4.....	INSTRUCTION MANUAL
EXHIBIT 5.....	EXTERNAL PHOTO
EXHIBIT 6.....	INTERNAL PHOTOS
EXHIBIT 7.....	OPERATIONAL DESCRIPTION
EXHIBIT 8.....	TEST SET UP PHOTOGRAPH

APPLICANT: SPORTABLE SCOREBOARDS

FCC ID: NXLXCVR3000

REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc
TABLE OF CONTENTS

EMC Equipment List

	DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
X	3-Meter OATS	TEI	N/A	N/A	Listed 12/22/99	12/22/02
	3/10-Meter OATS	TEI	N/A	N/A	Listed 3/26/01	3/26/04
	Receiver, Beige Tower Spectrum Analyzer (Tan)	HP	8566B Opt 462	3138A07786 3144A20661	CAL 8/31/01	8/31/03
	RF Preselector (Tan)	HP	85685A	3221A01400	CAL 8/31/01	8/31/03
	Quasi-Peak Adapter (Tan)	HP	85650A	3303A01690	CAL 8/31/01	8/31/03
X	Receiver, Blue Tower Spectrum Analyzer (Blue)	HP	8568B	2928A04729 2848A18049	CHAR 10/22/01	10/22/03
X	RF Preselector (Blue)	HP	85685A	2926A00983	CHAR 10/22/01	10/22/03
X	Quasi-Peak Adapter (Blue)	HP	85650A	2811A01279	CHAR 10/22/01	10/22/03
X	Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
	Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
	Biconnical Antenna	Eaton	94455-1	1057	CHAR 3/15/00	3/15/02
	BiconiLog Antenna	EMCO	3143	9409-1043		
X	Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 10/2/01	10/2/03
	Log-Periodic Antenna	Electro-Metrics	EM-6950	632	CHAR 10/15/01	10/15/03
	Log-Periodic Antenna	Electro-Metrics	LPA-30	409	CHAR 10/16/01	10/16/03
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	152	CAL 3/21/01	3/21/04
	Dipole Antenna Kit	Electro-Metrics	TDA-30/1-4	153	CHAR 11/24/00	11/24/03
	Double-Ridged Horn Antenna	Electro-Metrics	RGA-180	2319	CAL 12/19/01	12/19/03
	Horn Antenna	Electro-Metrics	EM-6961	6246	CAL 3/21/01	3/21/03
	Horn Antenna	ATM	19-443-6R	None	No Cal Required	
	Passive Loop Antenna	EMC Test Systems	EMCO 6512	9706-1211	CHAR 7/10/01	7/10/03
	Line Impedance Stabilization . . .	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03

APPLICANT: SPORTABLE SCOREBOARDS

FCC ID: NXLXCVR3000

REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc

PAGE: 1 of 12

DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
Line Impedance Stabilization . . .	Electro-Metrics	EM-7820	2682	CAL 3/16/01	3/16/03
Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 5/25/99	5/25/01
Termaline Wattmeter	Bird Electronic Corporation	6104	1926	CAL 12/12/01	12/12/03
Oscilloscope	Tektronix	2230	300572	CHAR 2/1/01	2/1/03
Temperature Chamber	Tenney Engineering	TTRC	11717-7	CHAR 1/22/02	1/22/04
AC Voltmeter	HP	400FL	2213A14499	CAL 10/9/01	10/9/03
AC Voltmeter	HP	400FL	2213A14261	CHAR 10/15/01	10/15/03
AC Voltmeter	HP	400FL	2213A14728	CHAR 10/15/01	10/15/03
X	Digital Multimeter	Fluke	77	CHAR 1/8/02	1/8/04
	Digital Multimeter	Fluke	77	CHAR 1/8/02	1/8/04
	Digital Multimeter	HP	E2377A	CHAR 1/8/02	1/8/04
	Multimeter	Fluke	FLUKE-77-3	CAL 9/26/01	9/26/03
	Peak Power Meter	HP	8900C	CHAR 1/26/01	1/26/03
	Digital Thermometer	Fluke	2166A	42032	CAL 1/16/02
	Thermometer	Traulsen	SK-128	CHAR 1/22/02	1/22/04
X	Temp/Humidity gauge	EXTech	44577F	CHAR 1/22/02	1/22/04
	Frequency Counter	HP	5352B	CAL 11/28/01	11/28/03
	Power Sensor	Agilent Technologies	84811A	CAL 1/26/01	1/26/03
	Service Monitor	IFR	FM/AM 500A	CAL 11/22/00	11/22/02
	Comm. Serv. Monitor	IFR	FM/AM 1200S	CAL 5/12/02	5/12/04
	Signal Generator	HP	8640B	CAL 11/15/01	11/15/03
	Modulation Analyzer	HP	8901A	CAL 9/5/01	9/5/03
	Near Field Probe	HP	HP11940A	CHAR 2/1/01	2/1/03
	BandReject Filter	Lorch Microwave	5BR4-2400/60-N	Z1	CHAR 3/2/01
					3/2/03

APPLICANT : SPORTABLE SCOREBOARDS

FCC ID: NXLXCVR3000

REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc

PAGE : 2 of 12

DEVICE	MFGR	MODEL	SERNO	CAL/CHAR DATE	DUE DATE or STATUS
BandReject Filter	Lorch Microwave	6BR6-2442/300-N	Z1	CHAR 3/2/01	3/2/03
BandReject Filter	Lorch Microwave	5BR4-10525/900-S	Z1	CHAR 3/2/01	3/2/03
High Pas Filter	Microlab	HA-10N		CHAR 10/4/01	10/4/03
Audio Oscillator	HP	653A	832-00260	CHAR 3/1/01	3/1/03
Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	3/2/03
Frequency Counter	HP	5385A	3242A07460	CHAR 12/11/01	12/11/03
Preamplifier	HP	8449B-H02	3008A00372	CHAR 3/4/01	3/4/03
Amplifier	HP	11975A	2738A01969	CHAR 3/1/01	3/1/03
Egg Timer	Unk			CHAR 8/31/01	8/31/03
Measuring Tape, 20M	Kraftixx	0631-20		CHAR 2/1/02	2/1/04
Measuring Tape, 7.5M	Kraftixx	7.5M PROFI		2/1/02	2/1/04
Coaxial Cable #51	Insulated Wire Inc.	NPS 2251-2880	Timco #51	CHAR 1/23/02	1/23/04
Coaxial Cable #64	Semflex Inc.	60637	Timco #64	CHAR 1/24/02	1/24/04
Coaxial Cable #65	General Cable Co.	E9917 RG233/U	Timco #65	CHAR 1/23/02	1/23/04
Coaxial Cable #106	Unknown	Unknown	Timco #106	CHAR 1/23/02	1/23/04

APPLICANT: SPORTABLE SCOREBOARDS
 FCC ID: NXLXCVR3000
 REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc
 PAGE: 3 of 12

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. The UUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the UUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The UUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

APPLICANT: SPORTABLE SCOREBOARDS

FCC ID: NXLXCVR3000

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.249, 15.209

REQUIREMENTS:

FIELD STRENGTH	FIELD STRENGTH	S15.209
of Fundamental: 902-928 MHz 2.4-2.4835 GHz 94 dBuV/m @3m	of Harmonics 30 - 88 MHz 88 - 216 MHz 216 - 960 MHz 54 dBuV/m @3m	40 dBuV/m @3M 43.5 46 ABOVE 960 MHz 54dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

TEST RESULTS: This unit DOES meet the FCC requirements.

TEST DATA:

Emission Frequency MHz	Meter Reading dBuV	ANT. POLARITY	Coax Loss dB	Correction Factor dB	Field Strength dBuV/m	Margin dB
904.90	59.8	H	4.09	24.18	88.07	5.93
904.90	61.9	V	4.09	24.18	90.17	3.83
916.48	55.3	H	3.83	24.13	83.26	10.74
916.48	58.5	V	3.83	24.13	86.46	7.54
923.88	57.3	H	3.66	24.10	85.06	8.94
923.88	57.4	V	3.66	24.10	85.16	8.84
1,809.80	21.1	H	2.80	28.65	52.55	1.45
1,809.81	21.1	V	2.80	28.65	52.55	1.45
1,833.02	18.2	V	2.82	28.77	49.79	4.21
1,833.02	21.0	H	2.82	28.77	52.59	1.41
1,847.73	20.8	V	2.84	28.84	52.48	1.52
1,847.73	21.7	H	2.84	28.84	53.38	0.62
2,714.69	1.3	V	3.57	31.24	36.11	17.89
9,048.85	3.8	V	8.29	39.88	51.97	2.03

TEST PROCEDURE: ANSI STANDARD C63.4-1992 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Preselector, a Hewlett Packard Model 85650A Quasi-Peak adapter, and an appropriate antenna. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

PERFORMED BY: JOSEPH SCOGLIO

DATE: MARCH 18, 2003

APPLICANT: SPORTABLE SCOREBOARDS

FCC ID: NXLXCVR3000

REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc

PAGE: 5 of 12

APPLICANT: SPORTABLE SCOREBOARDS

FCC ID: NXLXCVR3000

NAME OF TEST: Occupied Bandwidth

RULES PART NO.: 15.249

REQUIREMENTS: The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.209.

THE PLOTS ON THE NEXT PAGE REPRESENTS THE EMISSIONS TAKEN FOR THIS DEVICE.

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division. The horizontal scale is set to 20, 5, and 10 kHz per division respectively.

TEST RESULTS: The unit DOES meet the FCC requirements.

PERFORMED BY: JOSEPH SCOGLIO

DATE: MARCH 18, 2003


APPLICANT: SPORTABLE SCOREBOARDS

FCC ID: NXLXCVR3000

REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc


PAGE: 6 of 12

OCCUPIED BANDWIDTH PLOT - LOW

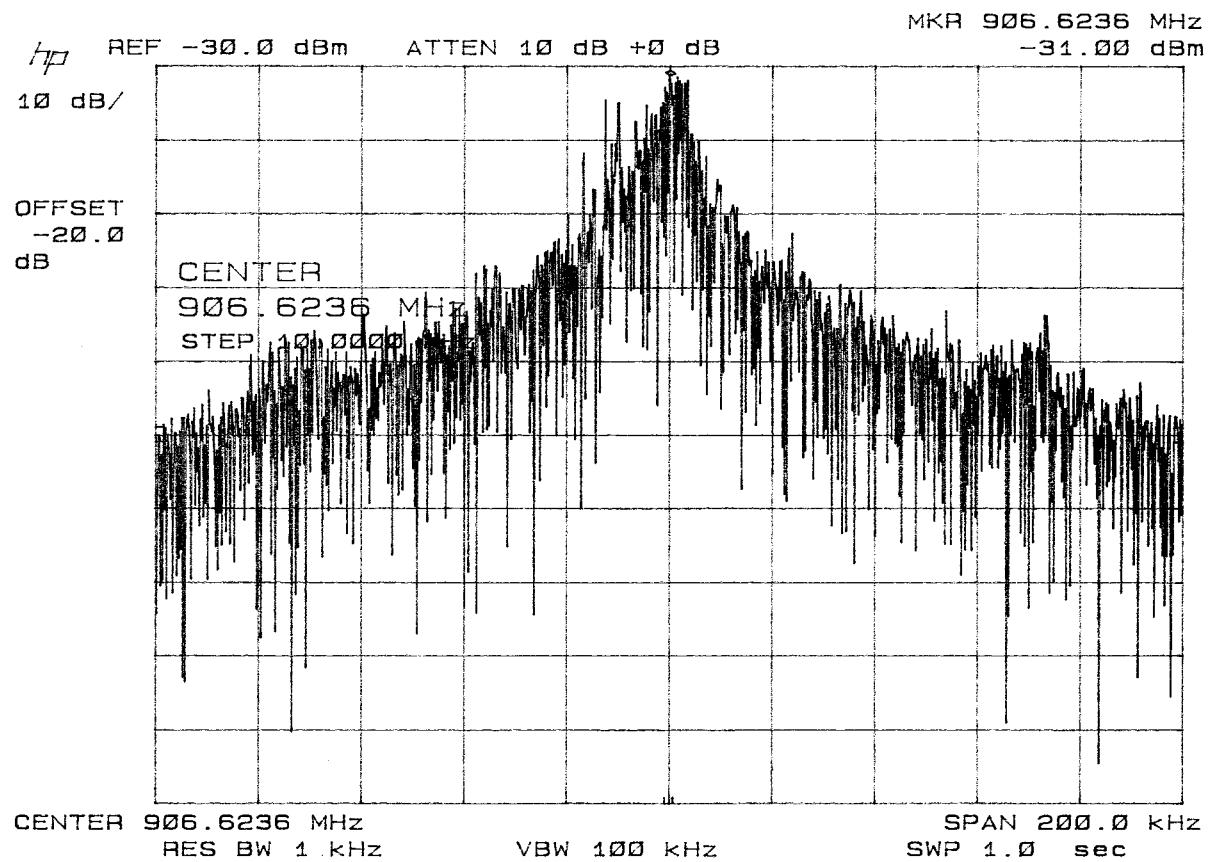


APPLICANT: SPORTABLE SCOREBOARDS
FCC ID: NXLXCVR3000
REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc
PAGE: 7 of 12

OCCUPIED BANDWIDTH PLOT - MIDDLE

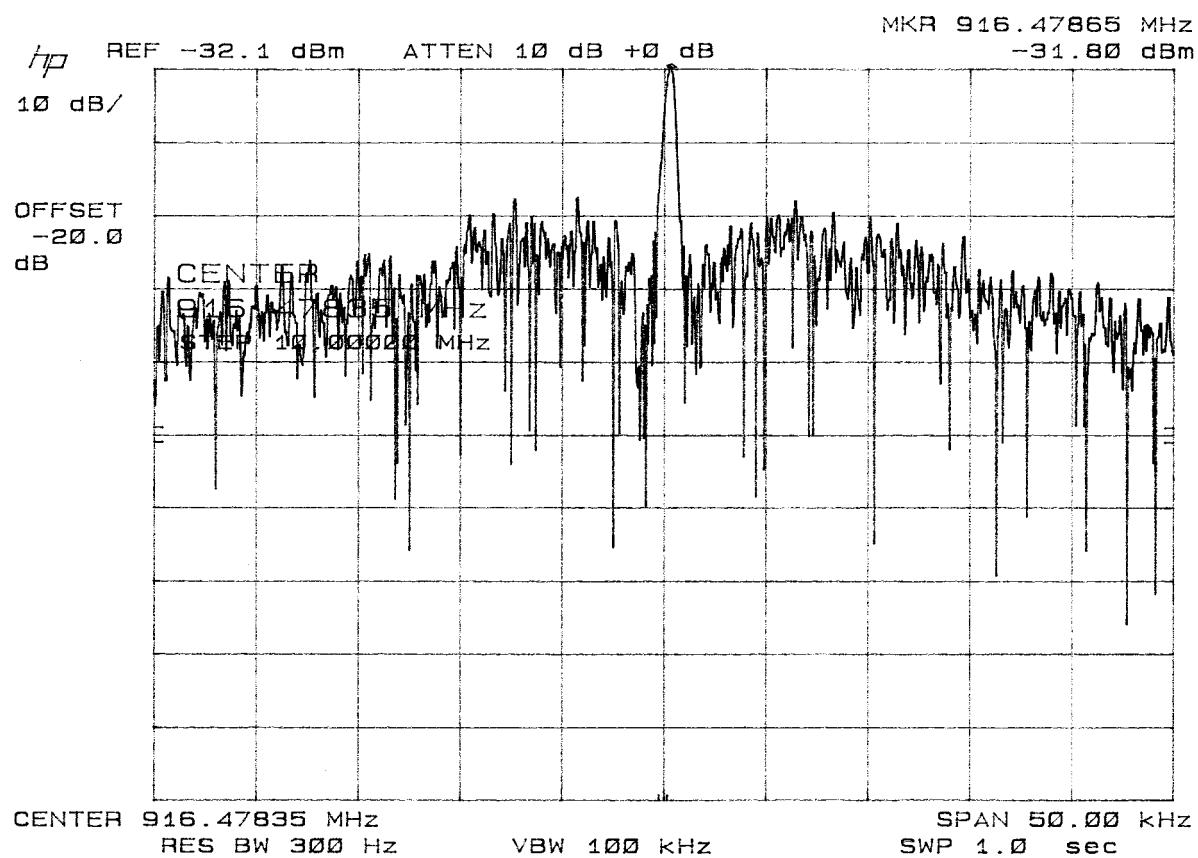

APPLICANT: SPORTABLE SCOREBOARDS
FCC ID: NXLXCVR3000
REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc
PAGE: 8 of 12

OCCUPIED BANDWIDTH - HIGH

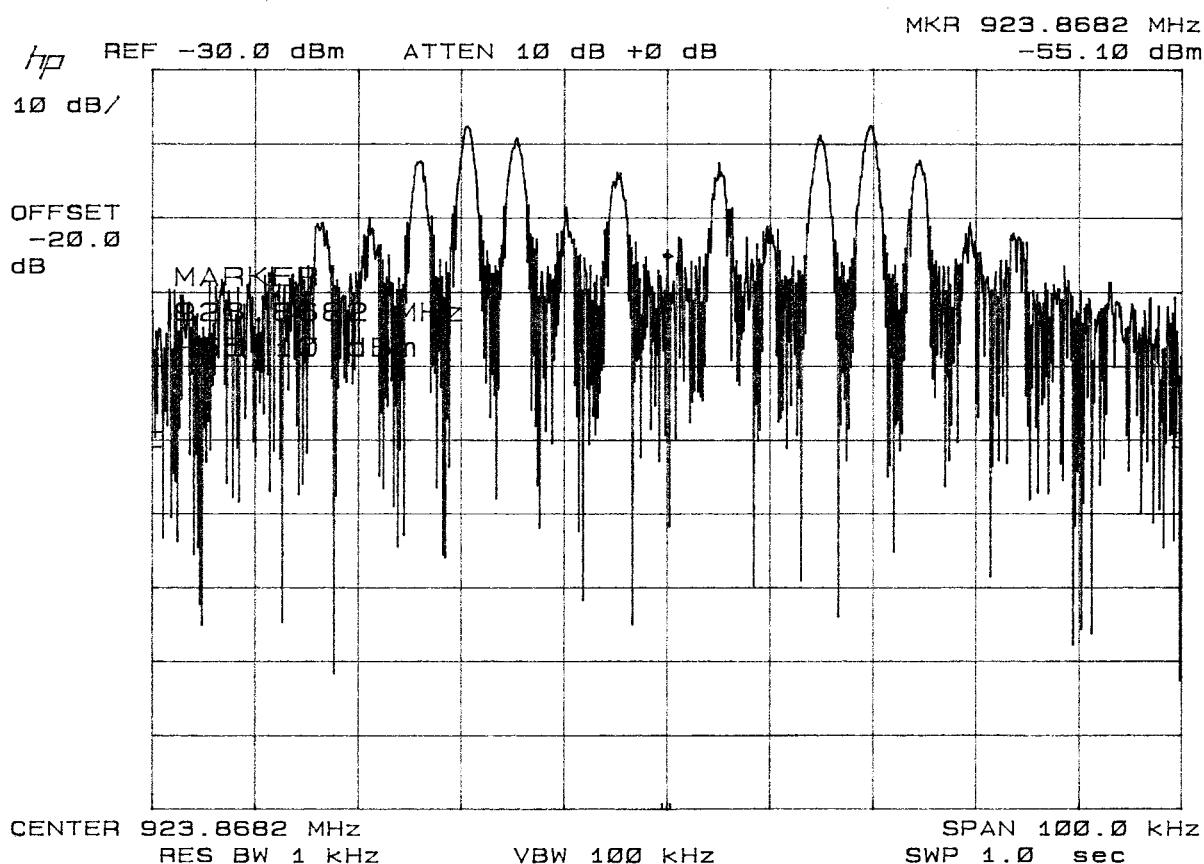

APPLICANT: SPORTABLE SCOREBOARDS
FCC ID: NXLXCVR3000
REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc
PAGE: 9 of 12

APPLICANT: SPORTABLE SCOREBOARDS

FCC ID: NXLXCVR3000

NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE

RULES PART NO.: 15.207

MINIMUM REQUIREMENTS:	FREQUENCY	LEVEL
	<u>MHZ</u>	<u>uV</u>
	0.450-30	250

TEST PROCEDURE: ANSI STANDARD C63.4-1992

THE HIGHEST EMISSION READ FOR LINE 1 WAS 83.20 uV @ 630 kHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 75.0 uV @ 570 kHz.

THE GRAPHS IN THE FOLLOWING PAGES REPRESENT THE EMISSIONS READ FOR POWERLINE CONDUCTED FOR THIS DEVICE.

TEST RESULTS: Both lines were observed. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

PERFORMED BY: JOSEPH SCOGLIO

DATE: MARCH 18, 2003


APPLICANT: SPORTABLE SCOREBOARDS

FCC ID: NXLXCVR3000

REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc


PAGE: 10 of 12

POWERLINE CONDUCTED PLOT- LINE 1

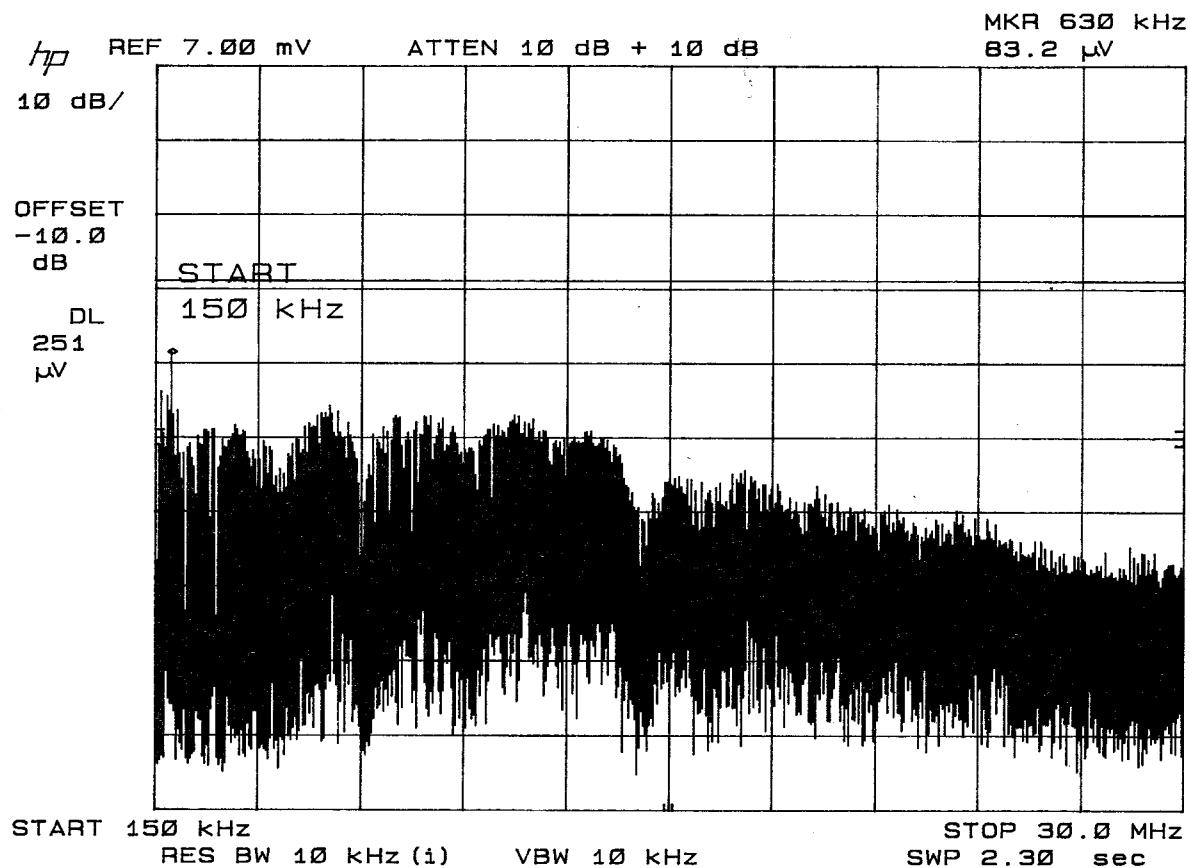

APPLICANT: SPORTABLE SCOREBOARDS
FCC ID: NXLXCVR3000
REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc
PAGE: 11 of 12

POWERLINE CONDUCTED PLOT - LINE 2

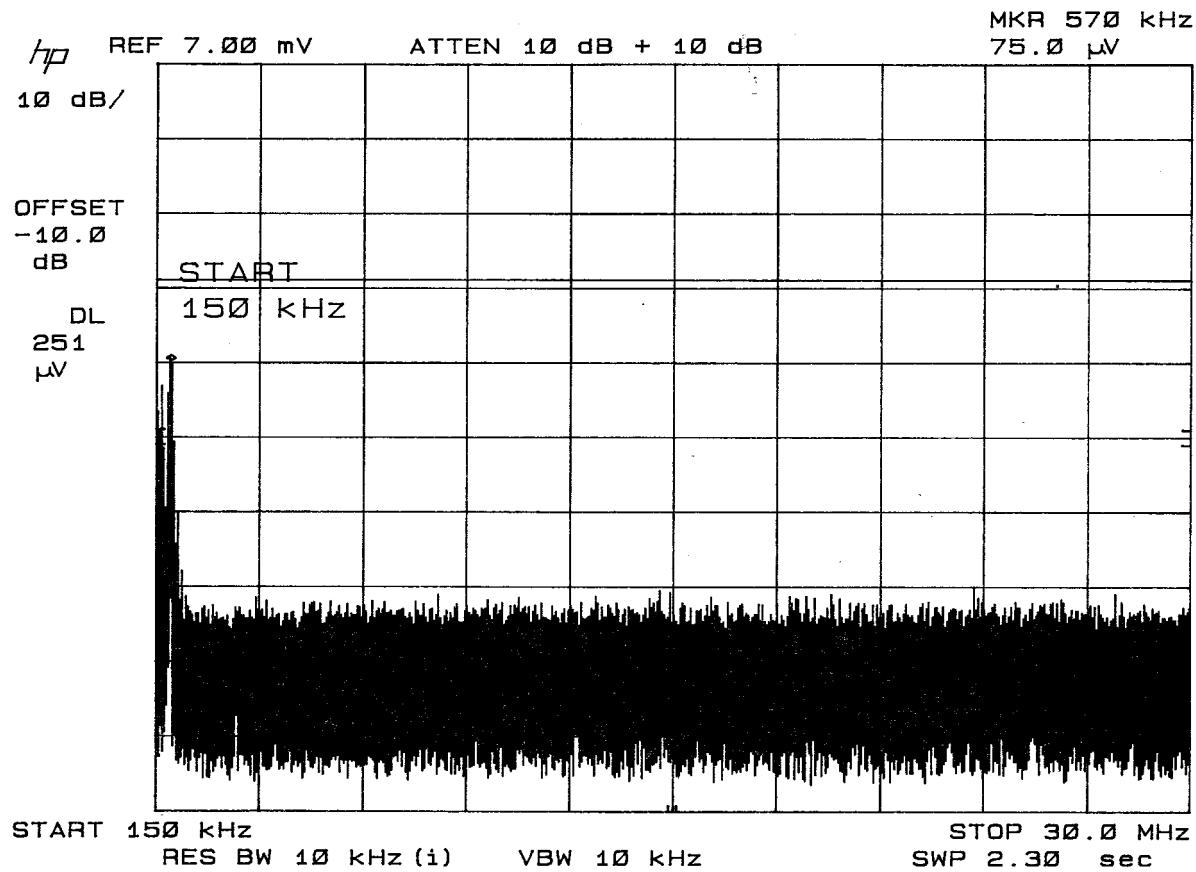

APPLICANT: SPORTABLE SCOREBOARDS
FCC ID: NXLXCVR3000
REPORT #: S/SPORTABLE_NXL\331UT3\331UT3TestReport.doc
PAGE: 12 of 12