



Product Service

Choose certainty.
Add value.

August 19, 2013

Page 1 of 82

Prüfbericht / Test Report

Nr. / No. 14912-27447-2 (Edition 1)

Applicant: Siemens AG, Fürth
Type of equipment: RFID Reader
Type designation: RF310 M
Order No.: 2072052728
Test standards: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.215 and 15.225

Industry Canada Radio Standards Specifications
RSS-GEN Issue 3, Sections 7.2.2, 7.2.5 and
RSS-210 Issue 8, Section A2.6 (Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.



Table of Contents

1	Description of the Equipment Under Test (EUT)	4
2	Administrative Data	5
3	Identification of the Test Laboratory	6
4	Summary	7
5	Operation Mode and Configuration of EUT	8
6	Measurement Procedures	9
6.1	Conducted Output Power	9
6.2	Bandwidth Measurements	11
6.3	Pulse Train Measurement	13
6.4	Conducted AC Powerline Emission	15
6.5	Radiated Emission Measurement 9 kHz to 30 MHz	17
6.6	Radiated Emission in Fully or Semi Anechoic Room	19
6.7	Radiated Emission at Alternative Test Site	21
6.8	Carrier Frequency Stability	23
7	Photographs Taken During Testing	25
8	Test Results	32
8.1	Conducted Output Power	34
8.2	Occupied Bandwidth (ANT8)	35
8.3	Occupied Bandwidth (ANT30)	38
8.4	Bandwidth of the Emission (ANT8)	41
8.5	Bandwidth of the Emission (ANT30)	43
8.6	Designation of Emissions	45
8.7	Spectrum Mask (ANT8)	46
8.8	Spectrum Mask (ANT30)	48
8.9	Radiated Emission Measurement 9 kHz to 30 MHz (ANT8)	50
8.10	Radiated Emission Measurement 9 kHz to 30 MHz (ANT30)	51
8.11	Radiated Emission Measurement 30 MHz to 1 GHz (ANT8)	53
8.12	Radiated Emission Measurement 30 MHz to 1 GHz (ANT30)	54
8.13	Carrier Frequency Stability	55
8.14	Exposure of Humans to RF Fields	58



9	Referenced Regulations	60
10	Test Equipment List with Calibration Data.....	62
11	Revision History	65
Annex A	Charts taken during testing.....	66

1 Description of the Equipment Under Test (EUT)

General data of EUT	
Type designation ¹ :	RF310 M
Parts ² :	1
Serial number(s):	186384.713
Manufacturer:	Siemens AG, Fürth
Type of equipment:	RFID Reader
Version:	
FCC ID:	NXW-RF310M02
Industry Canada ID:	267X-RF310M02
Additional parts/accessories:	

Technical data of EUT	
Application frequency range:	13.110 - 14.010 MHz
Frequency range:	N/A
Operating frequency:	13.560 MHz
Type of modulation:	ASK
Number of RF-channels:	1
Channel spacing:	N/A
Designation of emissions ³ :	
Type of antenna:	Inductive Loop
Size/length of antenna:	8 mm (ANT8) to 30 mm (ANT30) diameter
Connection of antenna:	<input checked="" type="checkbox"/> detachable <input type="checkbox"/> not detachable
Type of power supply:	Battery supply
Specifications for power supply:	nominal voltage: 3.7 V minimum voltage: 3.145 V maximum voltage: 4.225 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".



2 Administrative Data

Application details

Applicant (full address):	Siemens AG, Fürth Siemensstrasse 2-4, 90766 Fürth, Germany
Contact person:	Mr. Norbert Wluka
Order number:	2072052728
Receipt of EUT:	2013-07-22
Date(s) of test:	2013-07-22 til 2013-08-09
Note(s):	

Report details

Report number:	14912-27447-2
Edition:	1
Issue date:	August 19, 2013



3 Identification of the Test Laboratory

Details of the Test Laboratory

Company name:	TÜV SÜD Product Service GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAkKS Registration No. D-PL-11321-11-01
FCC test site registration number	90926
Industry Canada test site registration:	3050A-2
Contact person:	Mr. Johann Roidt
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99



4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the

Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.215 and 15.225

of the Federal Communication Commission (FCC) and the

Radio Standards Specifications

RSS-GEN Issue 3, Sections 7.2.2, 7.2.5 and

RSS-210 Issue 8, Section , A2.6 (Category I Equipment)

of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:

Mr. Johann Roidt

Responsible for testing:

Mr. Thomas Eberl

Responsible for test report:

Mr. Thomas Eberl



5 Operation Mode and Configuration of EUT

Operation Mode(s)

Continuously reading a transponder

Configuration(s) of EUT

EUT operated as a stand alone device, powered from internal battery pack supplied by main device

List of ports and cables

<i>Port</i>	<i>Description</i>	<i>Classification⁴</i>	<i>Cable type</i>	<i>Cable length</i>
1	Antenna port (unique style)	signal/control port	Shielded (coax)	1.5m

List of devices connected to EUT

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	Hand Held Controller	Workeabout Pro ³	---	PSION
2	Antenna	ANT8	---	Siemens AG
3	Antenna	ANT30	---	Siemens AG

List of support devices

<i>Item</i>	<i>Description</i>	<i>Type Designation</i>	<i>Serial no. or ID</i>	<i>Manufacturer</i>
1	None			

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures

6.1 Conducted Output Power


Measurement Procedure:

Rules and specifications: CFR 47 Part 2, section 2.1046(a)
 IC RSS-Gen Issue 3, section 4.8

Guide: CFR 47 Part 2, section 2.1046 / IC RSS-Gen Issue 3

Conducted output power is measured at the RF output terminals (e.g. antenna connector if antenna is detachable) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer and/or a power meter with appropriate sensor. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.

If a spectrum analyzer is used and no other settings are specified resolution bandwidth shall be selected according to the carrier frequency f_c and set to 10 kHz ($150 \text{ kHz} \leq f_c < 30 \text{ MHz}$), 100 kHz ($30 \text{ MHz} \leq f_c < 1 \text{ GHz}$) or 1 MHz ($f_c \geq 1 \text{ GHz}$). The video bandwidth shall be at least three times greater than the resolution bandwidth. The settings used have to be indicated within the appropriate test record(s).

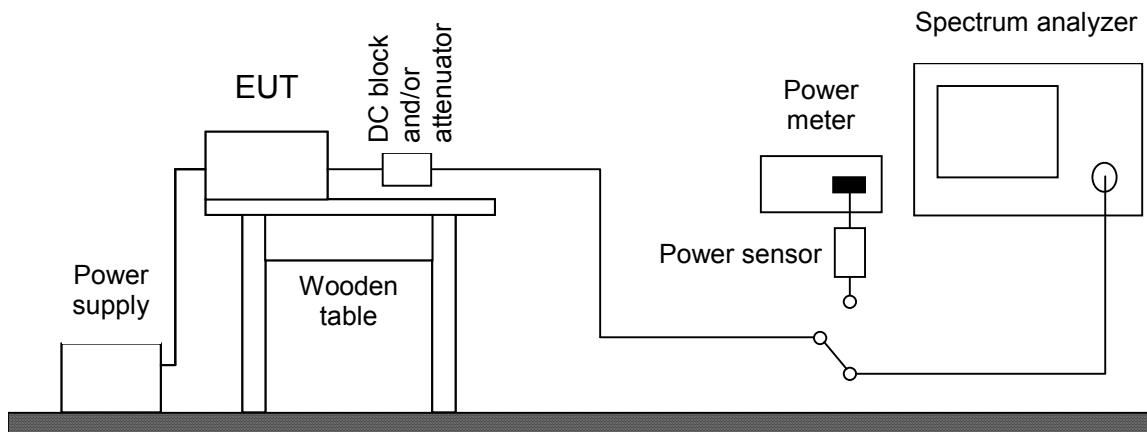




Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100063	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Power meter	NRVS	1264	836856/015	Rohde & Schwarz
<input type="checkbox"/> Peak power sensor	NRV-Z31	1701	8579604.03	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z52	1499	837901/030	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z4	1034	863828/015	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input checked="" type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda

6.2 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2 IC RSS-210 Issue 8, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 3, sections 4.6.1 and 4.6.2
Measurement setup:	<input checked="" type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.5)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

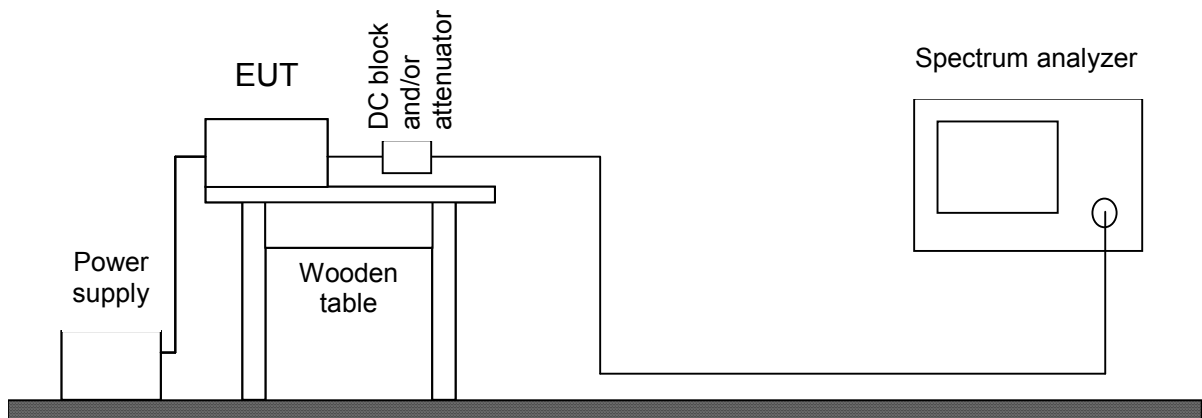


Test instruments used for conducted measurements:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Power meter	NRVS	1264	836856/015	Rohde & Schwarz
<input type="checkbox"/> Peak power sensor	NRV-Z31	1701	8579604.03	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z52	1499	837901/030	Rohde & Schwarz
<input type="checkbox"/> Power sensor	NRV-Z4	1034	863828/015	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda

6.3 Pulse Train Measurement

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, section 15.35(c) IC RSS-Gen Issue 3, section 4.5
Guide:	ANSI C63.4
Measurement setup:	<input type="checkbox"/> Conducted: See below (direct connection or via test fixture) <input type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.5)
<p>If antenna is detachable pulse train measurements shall be performed at the antenna connector (conducted measurement). The RF output terminals are connected to a spectrum analyzer or to a diode detector in combination with an oscilloscope. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If antenna is not detachable a test fixture may be used instead of direct connection to RF output terminals.</p> <p>If radiated measurements are performed similar test setups and instruments are used as with radiated emission measurements for the appropriate frequency range. However, the spectrum analyzer may be replaced by a diode detector connected to an oscilloscope.</p>	

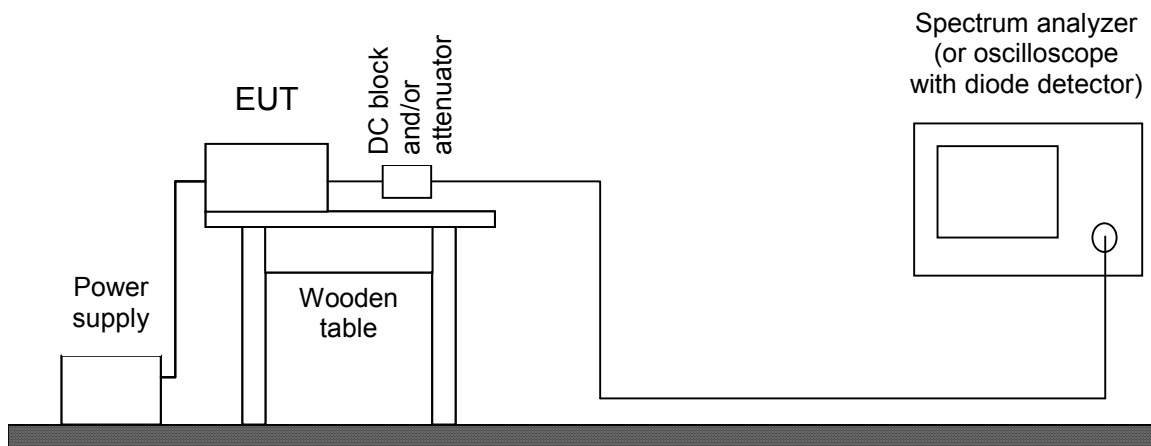



Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> Diode detector negative	8473D	1581	01492	Hewlett Packard
<input type="checkbox"/> Oscilloscope	54602B	1535	US35060304	Hewlett Packard
<input type="checkbox"/> Digital oscilloscope	Wave Surfer 452	1796	LCRY0301J11938	LeCroy
<input type="checkbox"/> Test probe	TP 01	1628	001	TÜV SÜD PS
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda

6.4 Conducted AC Powerline Emission

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, section 15.207
 IC RSS-Gen Issue 3, section 7.2.4

Guide: ANSI C63.4 / CISPR 22


Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:

First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.

If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.

According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.

Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.

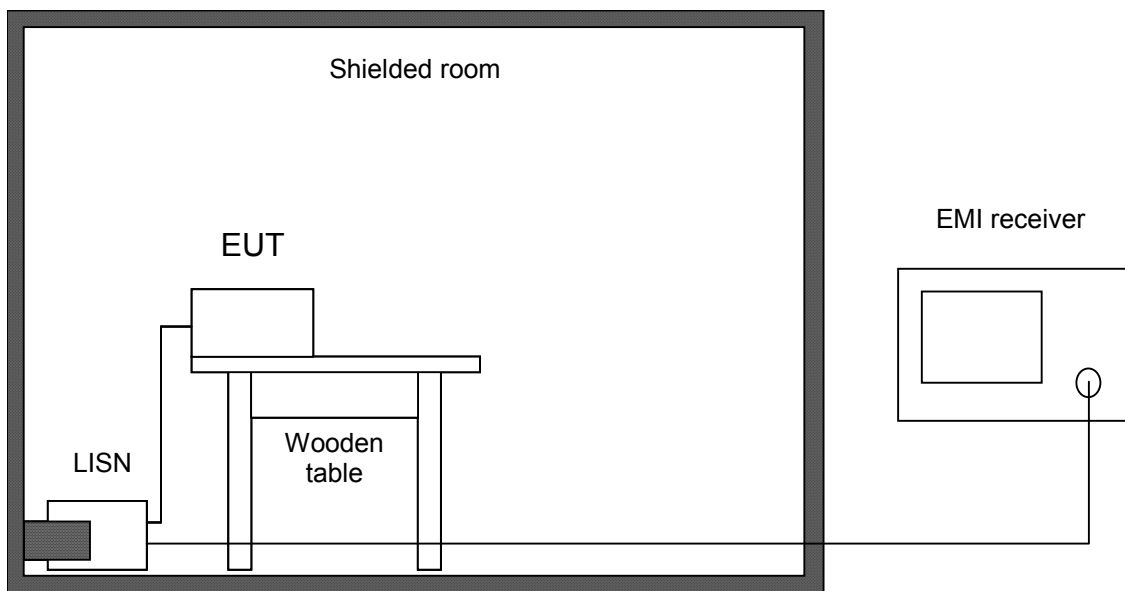



Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input type="checkbox"/> V-network	ESH 3-Z5	1059	894785/005	Rohde & Schwarz
<input type="checkbox"/> V-network	ESH 3-Z5	1218	830952/025	Rohde & Schwarz
<input type="checkbox"/> Artificial mains network	ESH 2-Z5	1536	842966/004	Rohde & Schwarz
<input type="checkbox"/> Shielded room	No. 1	1451	---	Albatross
<input type="checkbox"/> Shielded room	No. 4	1454	3FD 100 544	Euroshield

6.5 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, sections 15.205, 15.215(b) and 15.225(a)-(d)
 IC RSS-GEN Issue 3, sections 7.2.2 and 7.2.5 and
 IC RSS-210 Issue 8, section A2.6

Guide: ANSI C63.4

Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.


Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).

Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

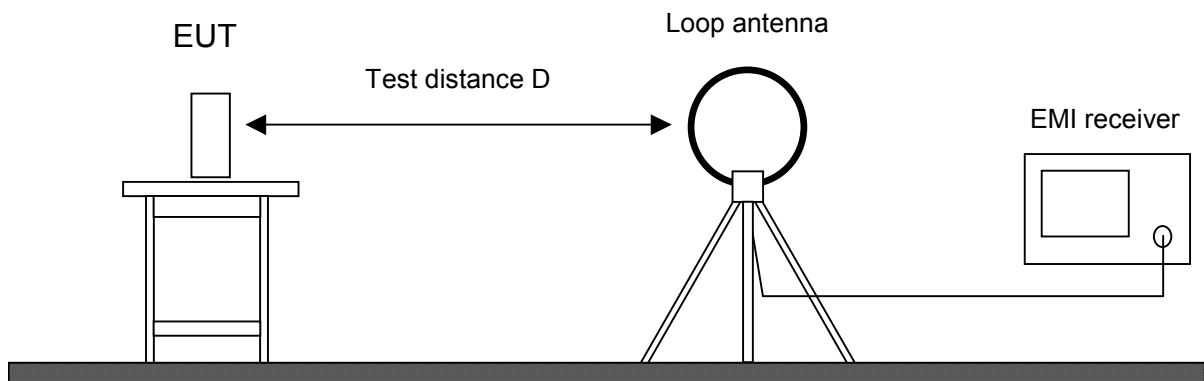




Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/> Test receiver	ESHS 10	1028	860043/016	Rohde & Schwarz
<input type="checkbox"/> Preamplifier	Cabin no. 2 CPA9231A	1716	3557	Schaffner
<input checked="" type="checkbox"/> Loop antenna	HFH2-Z2	1016	882964/1	Rohde & Schwarz
<input type="checkbox"/> Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/> Semi anechoic room	No. 3	1453	---	Siemens
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross



6.6 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-GEN Issue 3, sections 7.2.2(b)(c) and 7.2.5 and IC RSS-210 Issue 8, section A2.6
Guide:	ANSI C63.4
<p>Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz a semi anechoic room complying with the NSA requirements of ANSI C63.4 for alternative test sites is used (see 6.7). If prescans are recorded in fully anechoic room they are indicated appropriately.</p>	

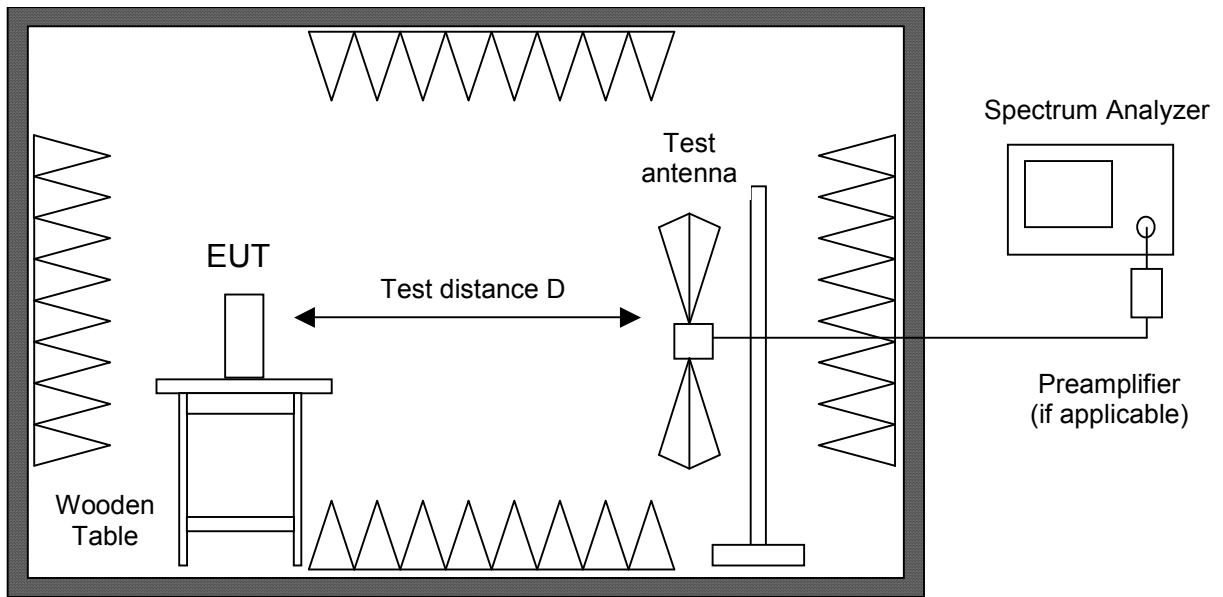

Fully or semi anechoic room


Test instruments used:

Type		Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	Cabin no. 3 ESPI7	2010	101018	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Preamplifier	Cabin no. 2 CPA9231A	1716	3557	Schaffner
<input type="checkbox"/>	Preamplifier	R14601	1142	13120026	Advantest
<input type="checkbox"/>	Preamplifier (1 - 8 GHz)	AFS3-00100800-32-LN	1684	847743	Miteq
<input type="checkbox"/>	Preamplifier (0.5 - 8 GHz)	AMF-4D-005080-25-13P	1685	860149	Miteq
<input type="checkbox"/>	Preamplifier (8 - 18 GHz)	ACO/180-3530	1484	32641	CTT
<input type="checkbox"/>	External Mixer	WM782A	1576	845881/005	Tektronix
<input type="checkbox"/>	Harmonic Mixer Accessories	FS-Z30	1577	624413/003	Rohde & Schwarz
<input checked="" type="checkbox"/>	Trilog antenna	Cabin no. 2 VULB 9163	1802	9163-214	Schwarzbeck
<input type="checkbox"/>	Trilog antenna	Cabin no. 3 VULB 9163	1722	9163-188	Schwarzbeck
<input type="checkbox"/>	Trilog antenna	Cabin no. 8 VULB 9163	2058	9163-408	Schwarzbeck
<input type="checkbox"/>	Horn antenna	3115	1516	9508-4553	EMCO
<input type="checkbox"/>	Horn antenna	3160-03	1010	9112-1003	EMCO
<input type="checkbox"/>	Horn antenna	3160-04	1011	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-05	1012	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-06	1013	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-07	1014	9112-1008	EMCO
<input type="checkbox"/>	Horn antenna	3160-08	1015	9112-1002	EMCO
<input type="checkbox"/>	Horn antenna	3160-09	1265	9403-1025	EMCO
<input type="checkbox"/>	Horn antenna	3160-10	1575	399185	EMCO
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	---	Albatross
<input type="checkbox"/>	Semi anechoic room	No. 3	1453	---	Siemens
<input type="checkbox"/>	Semi anechoic room	No. 8	2057	---	Albatross



6.7 Radiated Emission at Alternative Test Site

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-GEN Issue 3, sections 7.2.2(b)(c) and 7.2.5 and IC RSS-210 Issue 8, section A2.6
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 30 MHz to 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4 for alternative test sites. A linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in fully anechoic room.</p> <p>If no prescan in a fully anechoic room is used first a peak scan is performed in four positions to get the whole spectrum of emission caused by EUT with the measuring antenna raised and lowered from 1 to 4 m to find table position, antenna height and antenna polarization for the maximum emission levels.</p> <p>Data reduction is applied to these results to select those levels having less margin than 10 dB to or exceeding the limit using subranges and limited number of maximums. Further maximization is following.</p> <p>With detector of the test receiver set to quasi-peak final measurements are performed immediately after frequency zoom (for drifting disturbances) and maximum adjustment.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>In cases where prescans in a fully anechoic room are taken (e. g. if EUT is operating for a short time only or battery is discharged quickly) final measurements with quasi-peak detector are performed manually at frequencies indicated by prescan with EUT rotating all around and receiving antenna raising and lowering within 1 meter to 4 meters to find the maximum levels of emission.</p> <p>Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.</p>	

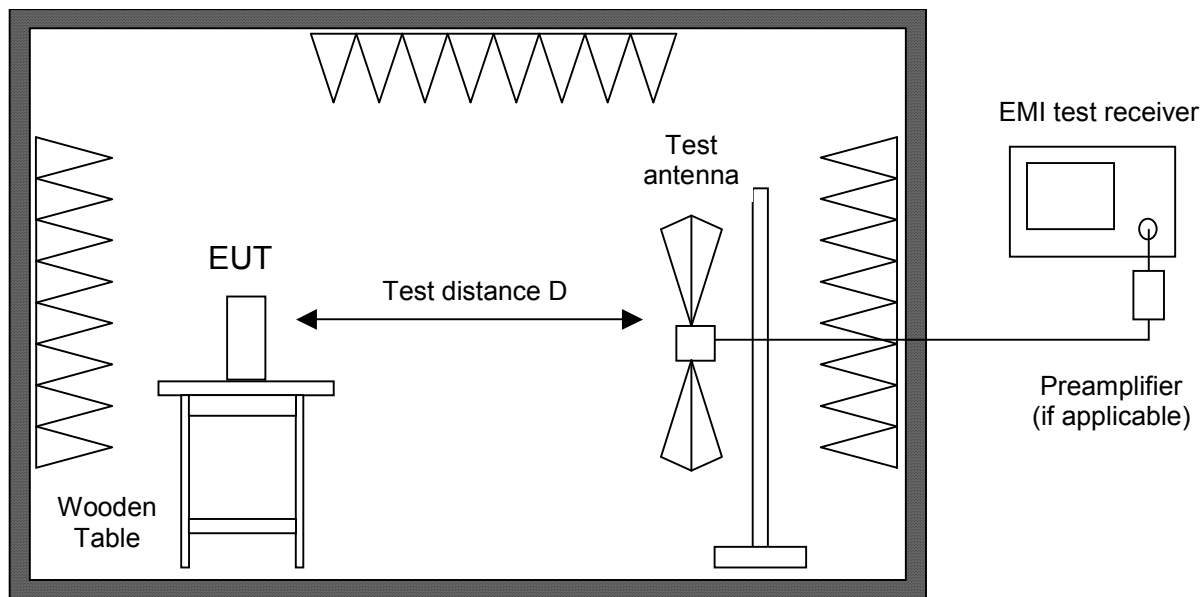

Alternate test site (semi anechoic room)

Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/> EMI test receiver	ESU8	2044	100232	Rohde & Schwarz
<input checked="" type="checkbox"/> Trilog antenna	Cabin no. 8 VULB 9163	2058	9163-408	Schwarzbeck
<input checked="" type="checkbox"/> Semi anechoic room	No. 8	2057	---	Albatross

6.8 Carrier Frequency Stability

Measurement Procedure:

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 3, section 4.7 and IC RSS-210 Issue 8, section A2.6
Guide:	ANSI C63.4

The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 °C.


If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage
- the battery nominal voltage
- 85% of the battery nominal voltage
- the battery operating end point voltage which shall be specified by the equipment manufacturer

The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.

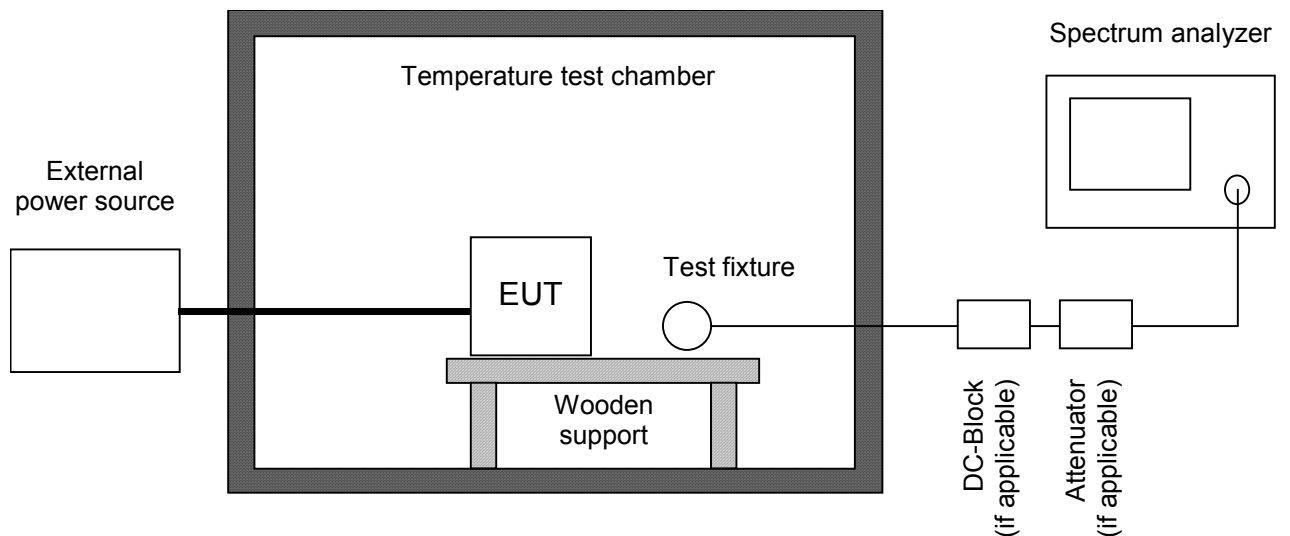



Test instruments used:

Type	Designation	Inv.-no.	Serial No. or ID	Manufacturer
<input type="checkbox"/> Spectrum analyzer	FSP30	1666	100036	Rohde & Schwarz
<input checked="" type="checkbox"/> EMI test receiver	ESPI7	1711	836914/0002	Rohde & Schwarz
<input type="checkbox"/> EMI test receiver	ESMI	1569	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/> DC-block	7006	1636	A2798	Weinschel
<input type="checkbox"/> Attenuator	4776-10	1638	9412	Narda
<input type="checkbox"/> Attenuator	4776-20	1639	9503	Narda
<input type="checkbox"/> Test probe	TP 01	1628	001	TÜV SÜD PS
<input type="checkbox"/> Multimeter	21 III	1653	76530546	Fluke
<input type="checkbox"/> Multimeter	21 III	1654	76381229	Fluke
<input checked="" type="checkbox"/> Multimeter	Fluke 77 III	1975	92370108	Fluke
<input type="checkbox"/> Multimeter	Fluke 77 IV	1976	93090238	Fluke
<input type="checkbox"/> Multimeter	Fluke 177	2025	96720024	Fluke
<input type="checkbox"/> Multimeter	Fluke 177	2026	96720025	Fluke
<input checked="" type="checkbox"/> DC power supply	NGSM 32/10	1267	203	Rohde & Schwarz
<input type="checkbox"/> Isolating transformer	RT 5A	1127	10387	Grundig
<input type="checkbox"/> Isolating transformer	RT 5A	1128	10416	Grundig
<input checked="" type="checkbox"/> Temperature test chamber	HT 4010	1271	07065550	Heraeus





7 Photographs Taken During Testing


Test setup for radiated emission measurement 9 kHz – 30 MHz

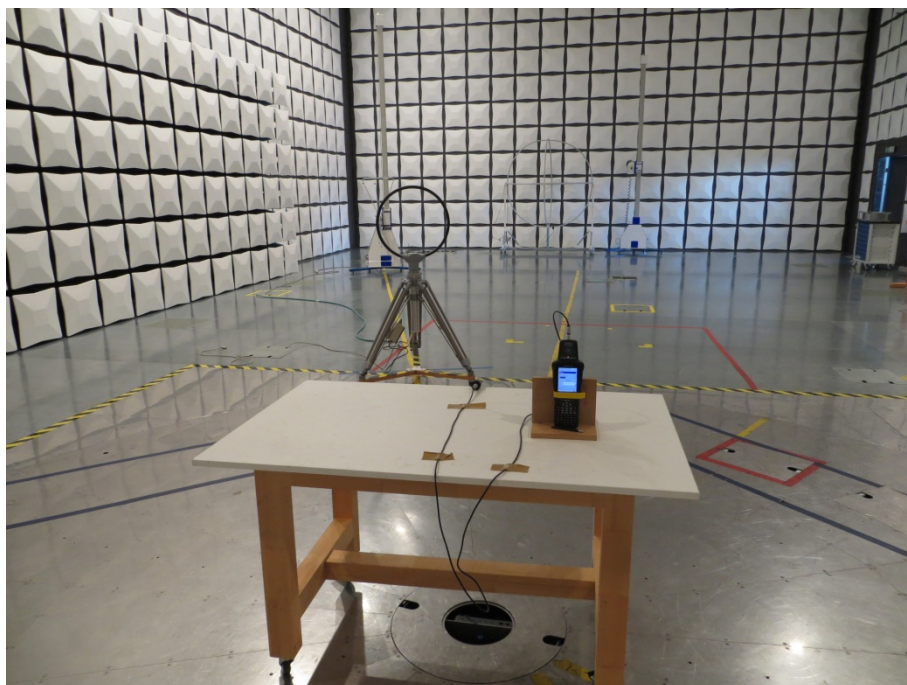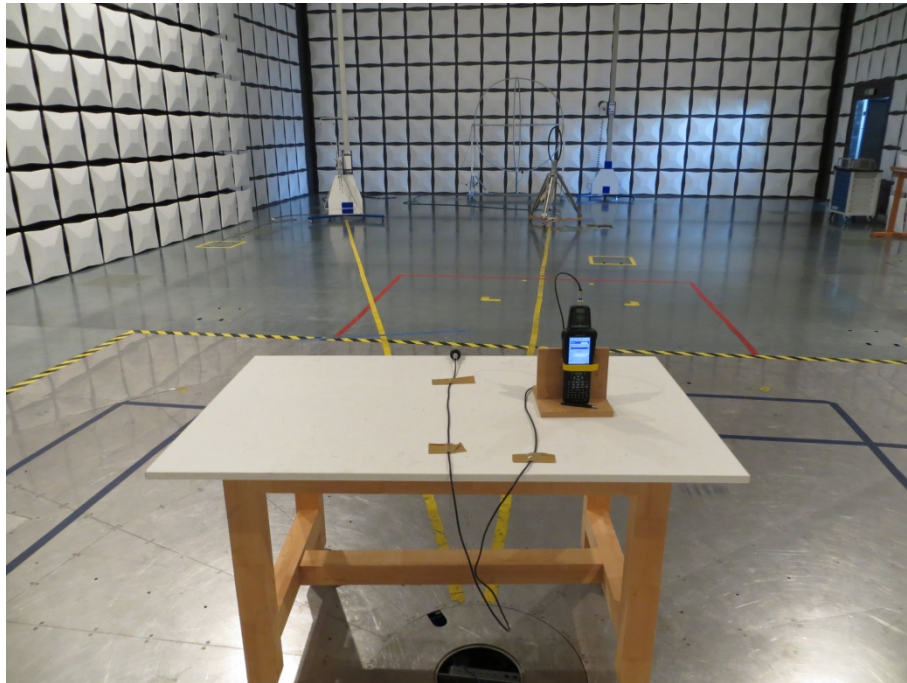



Test setup for radiated emission measurement (fully anechoic room)

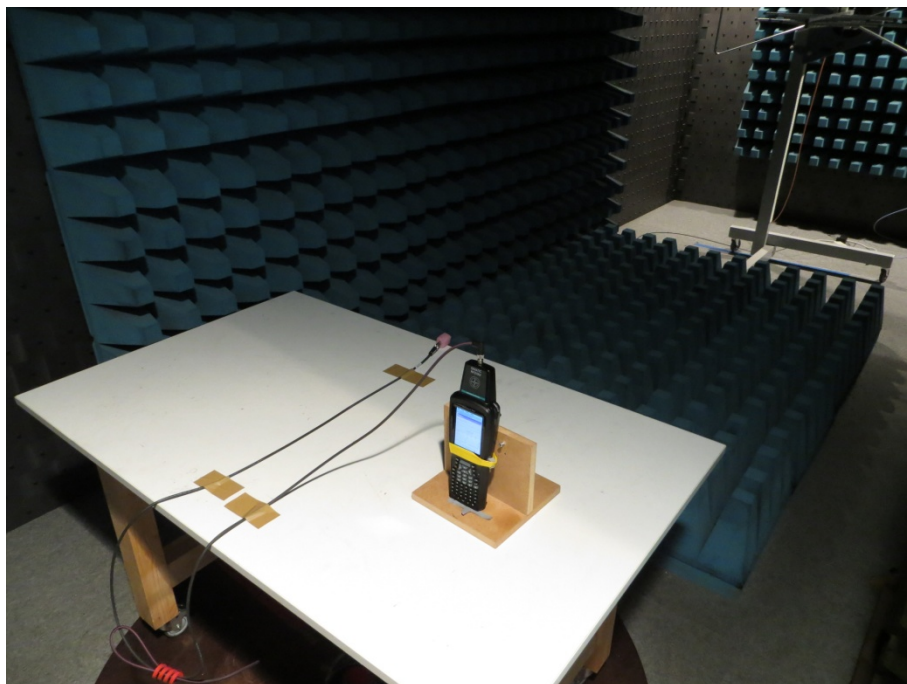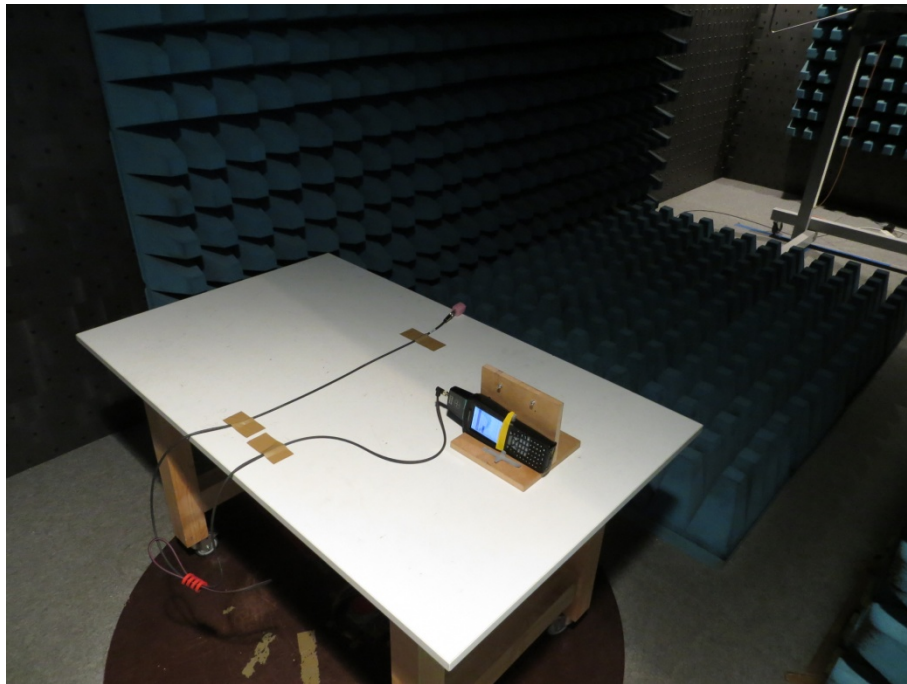



Test setup for radiated emission measurement (fully anechoic room) - continued -

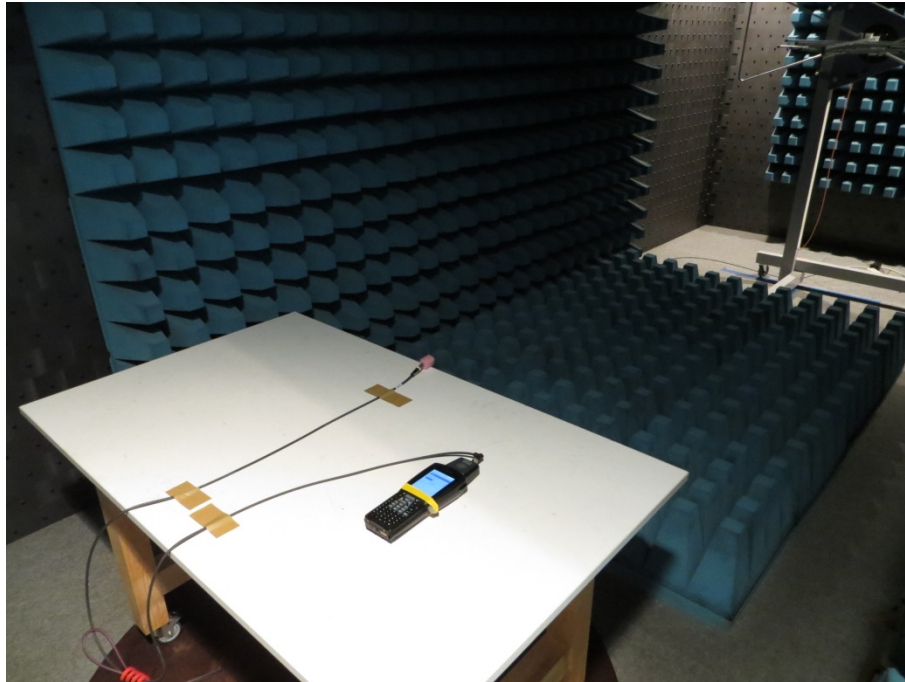


Test setup for radiated emission measurement (alternate test site)

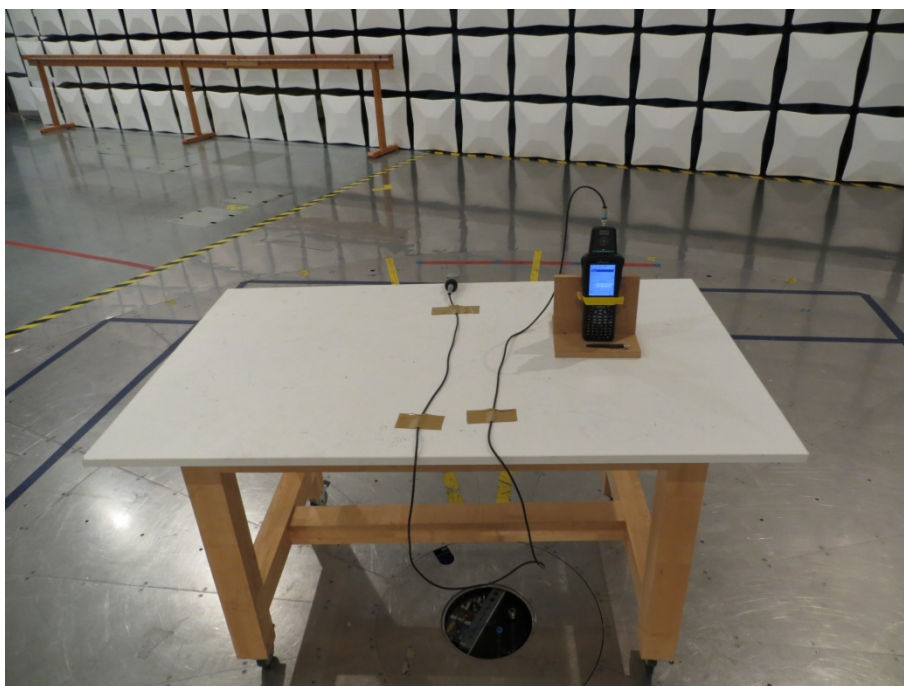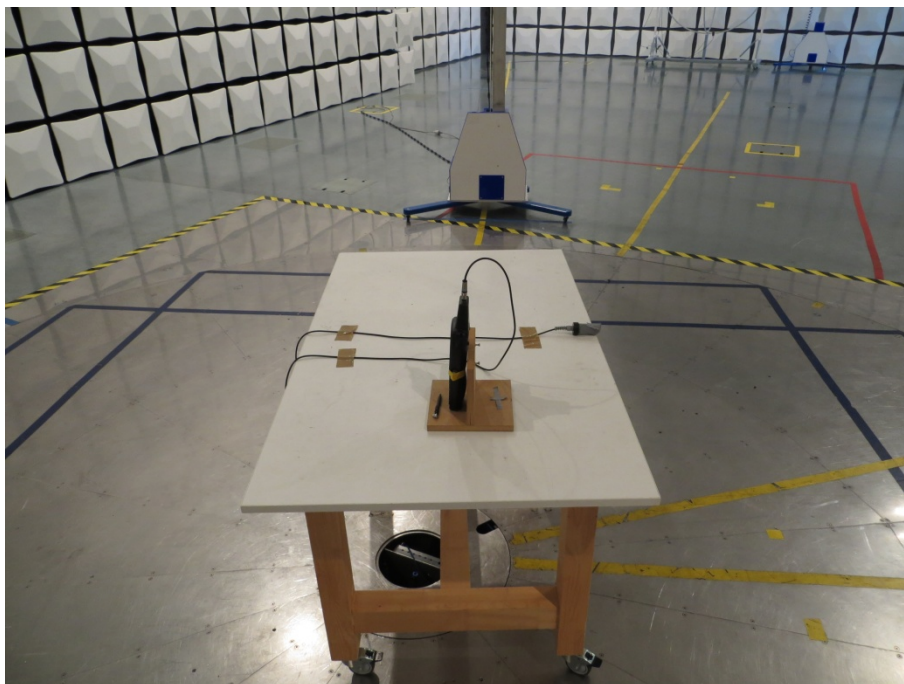

Test setup for radiated emission measurement (alternate test site) - continued -

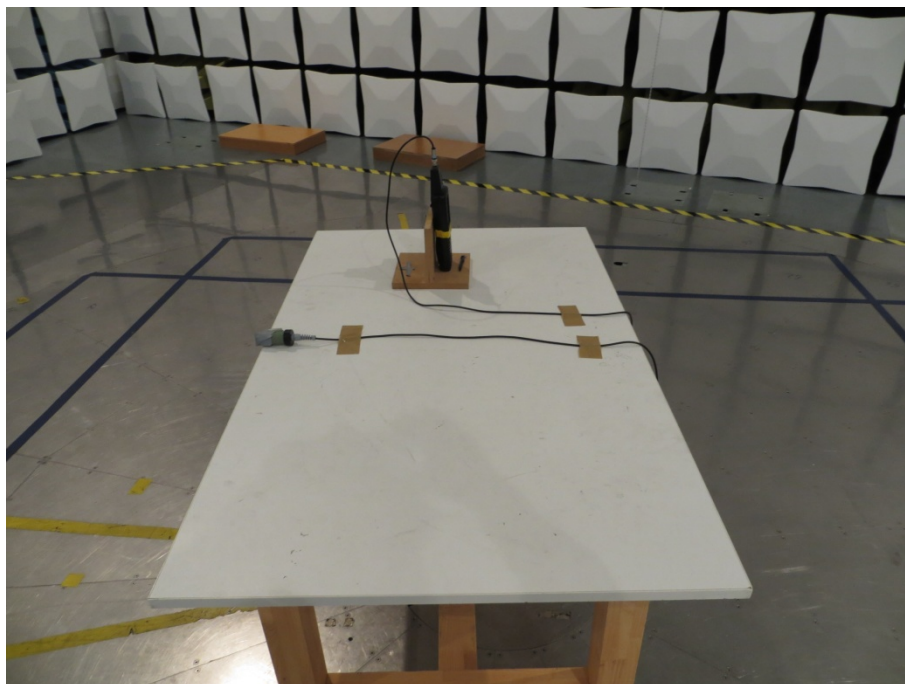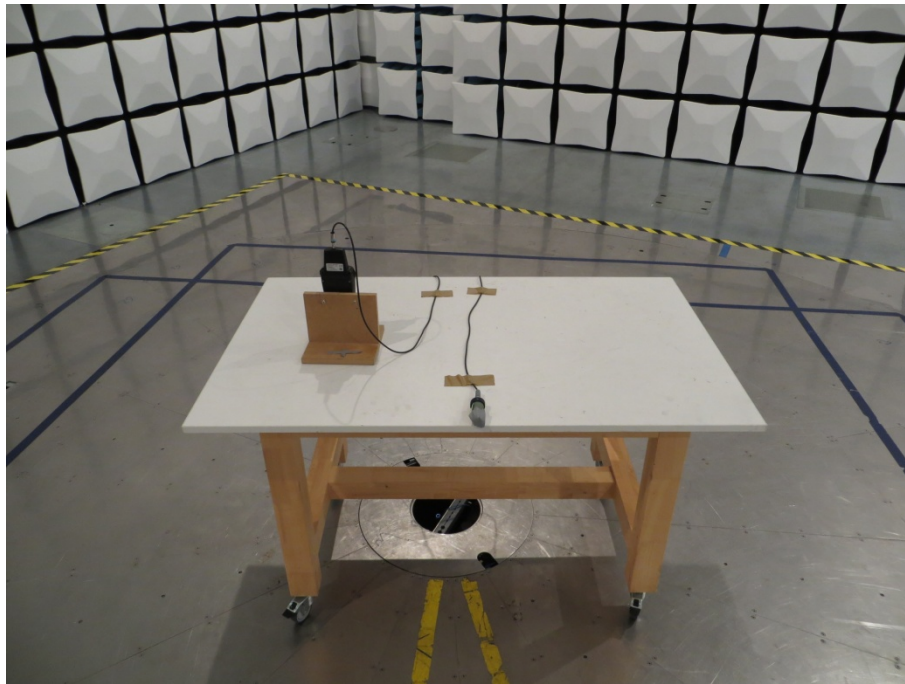

Test setup for carrier frequency stability measurement

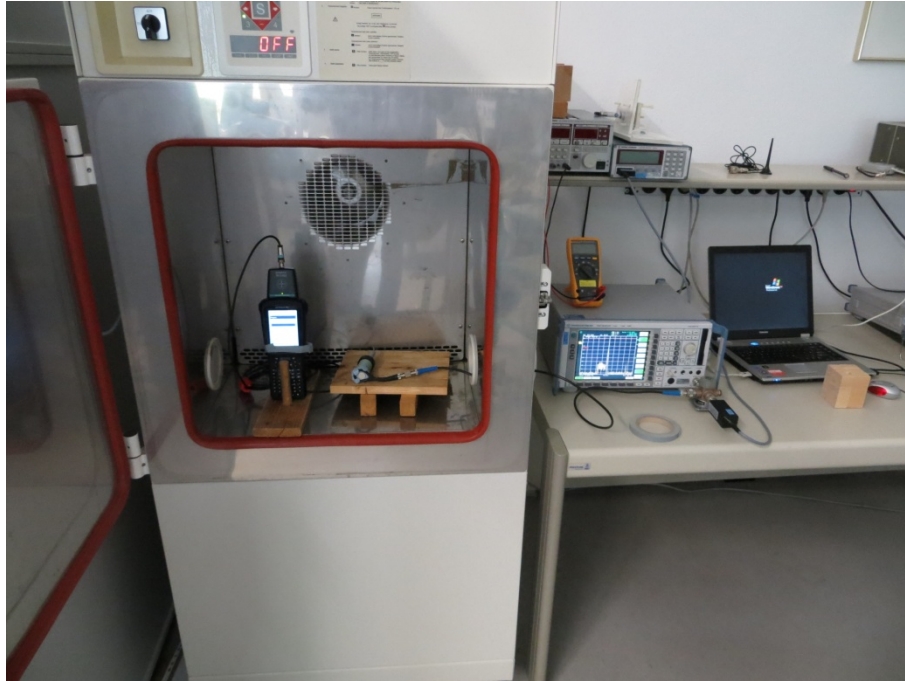



8 Test Results

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.1046(a)	Conducted output power	34	Recorded
2.202(a)	Occupied bandwidth	35	Recorded
15.215(c)	Bandwidth of the emission	41	Test passed
2.201, 2.202	Class of emission	45	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a) 15.205(d)(7)	Restricted bands of operation	--- ⁵	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	---	Not applicable
15.225(a)-(d)	Spectrum Mask	46	Test passed
15.205(b) 15.215(b) 15.225(a)(d)	Radiated emission 9 kHz to 30 MHz	50	Test passed
15.205(b) 15.225(d)	Radiated emission 30 MHz to 1 GHz	53	Test passed
15.225(e)	Carrier frequency stability	55	Test passed

⁵ See "Spectrum Mask" for the 13.36 to 13.41 MHz band. For all other restricted bands see "Radiated Emission".



IC RSS-GEN Issue 3			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.8	Transmitter output power (conducted)	34	Recorded
4.6.1	Occupied Bandwidth	35	Recorded
8	Designation of emissions	45	Calculated
4.5	Pulsed operation	---	Not applicable
2.2(a)	Restricted bands and unwanted emission frequencies	--- ⁶	Test passed
7.2.2(b)(c) 7.2.5	Unwanted emissions 9 kHz to 30 MHz	50	Test passed
2.2(b)(c) 7.2.5	Unwanted emissions 30 MHz to 1 GHz	53	Test passed
7.2.2	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	---	Not applicable
5.5	Exposure of Humans to RF Fields	58	Exempted from SAR and RF evaluation

IC RSS-210 Issue 8			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
A2.6	Spectrum Mask	46	Test passed
A2.6	Unwanted emissions 9 kHz to 30 MHz	50	Test passed
A2.6	Unwanted emissions 30 MHz to 1 GHz	53	Test passed
A2.6	Carrier frequency stability	55	Test passed

⁶ See "Spectrum Mask" and "Unwanted emissions".

8.1 Conducted Output Power

Rules and specifications:	CFR 47 Part 2, section 2.1046(a) IC RSS-Gen Issue 3, section 4.8
Guide:	CFR 47 Part 2, section 2.1046 / IC RSS-Gen Issue 3
Description:	Conducted output power shall be measured at the RF output terminals (e.g. antenna connector if antenna is detachable) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.
Measurement procedure:	Conducted Output Power (6.1)

Comment:	
Date of test:	2013-08-06
Test site:	Unshielded room

Test Result:	Test passed
--------------	-------------

Antenna gain:	1 dBi						
Mode	Frequency (MHz)	Power Type	Reading (dBm)	Correction (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
CW	13,560	PEP	16,5	0,5	17,0		

Note 1: If applicable, PEP (peak envelope power) and RMS values are measured using a power meter with appropriate sensor.

Note 2: If applicable, peak or average values are measured using a spectrum analyzer with resolution and video bandwidth set to: RBW = 10 kHz, VBW = 30 kHz

Note 3: If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power limit is reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.




8.2 Occupied Bandwidth (ANT8)

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	<p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.2)	

Comment:	Tested with ANT8
Date of test:	2013-08-06
Test site:	Fully anechoic room, cabin no. 2


Occupied Bandwidth (99 %):

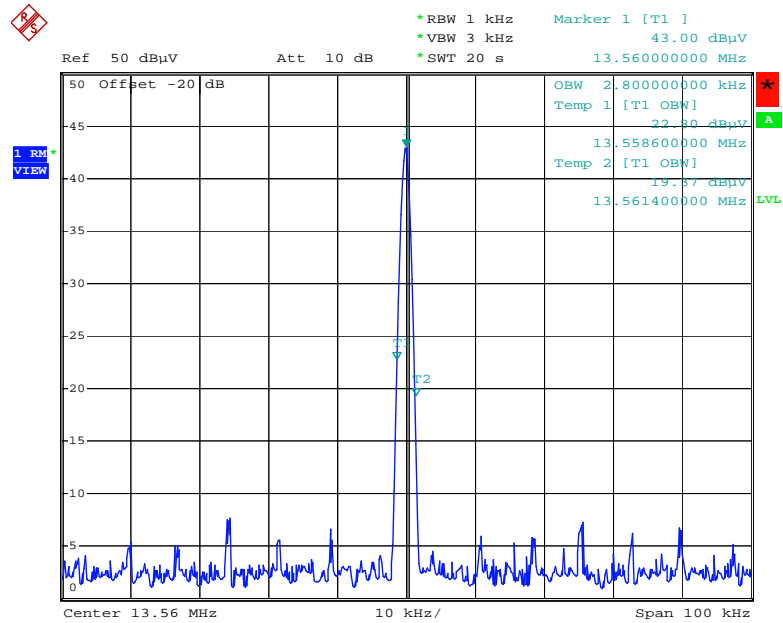

Date: 6.AUG.2013 14:50:39

Occupied Bandwidth (99 %): **2.80 kHz**

Occupied Bandwidth (-26 dB):

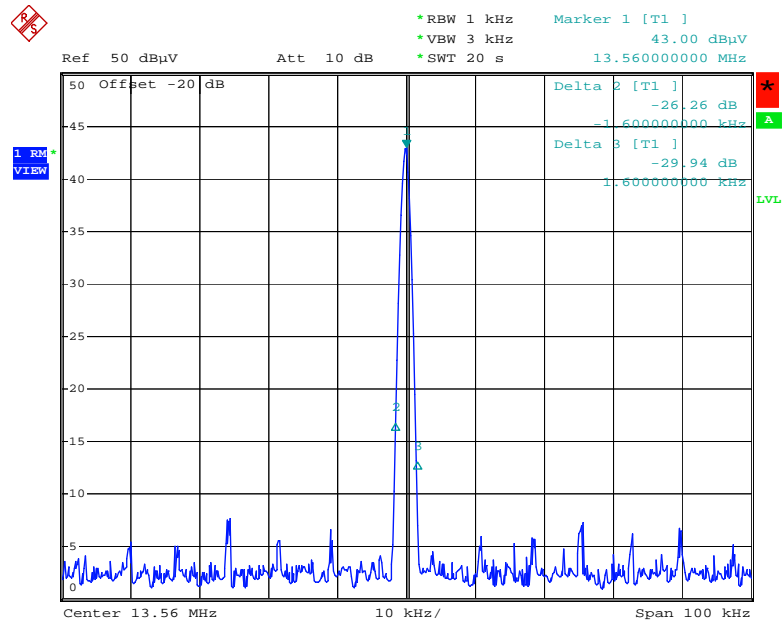

Date: 6.AUG.2013 14:53:41


Occupied Bandwidth (-26 dB): **3.20 kHz**

Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 3, section 4.6.1
Guide:	IC RSS-Gen Issue 3, section 4.6.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.2)

Comment:	Tested with ANT8
Date of test:	2013-08-06
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):

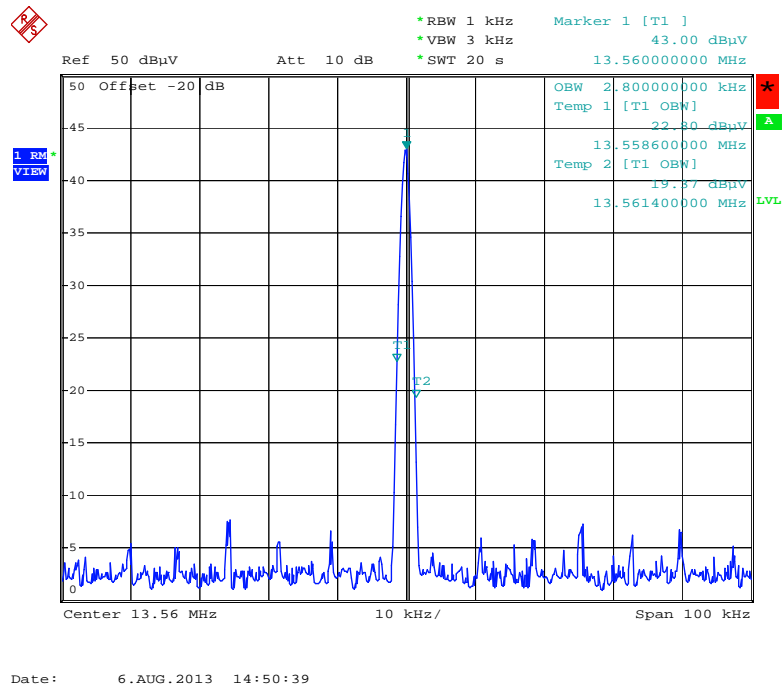

Occupied Bandwidth (99 %):	2.80 kHz
----------------------------	-----------------




8.3 Occupied Bandwidth (ANT30)

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	<p>The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.</p> <p>The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.2)	

Comment:	Tested with ANT30
Date of test:	2013-08-06
Test site:	Fully anechoic room, cabin no. 2


Occupied Bandwidth (99 %):

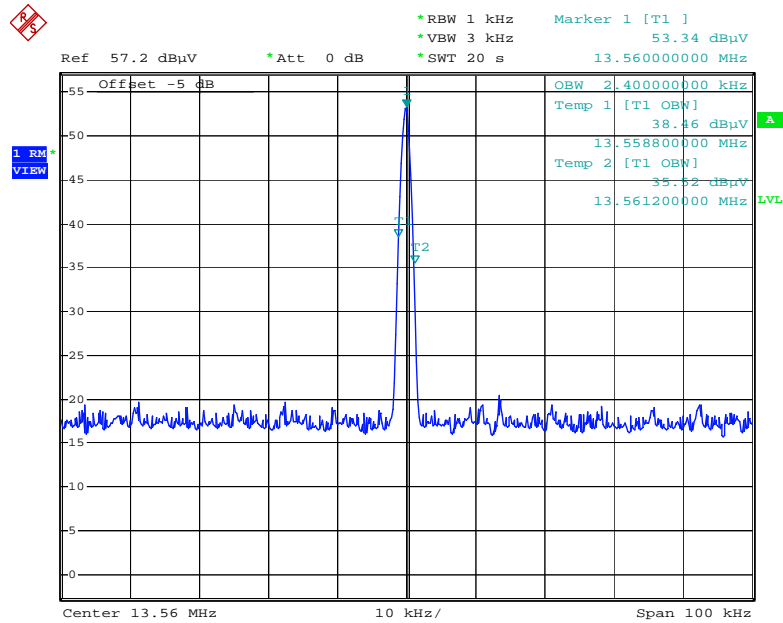

Date: 6.AUG.2013 15:18:26

Occupied Bandwidth (99 %): **2.40 kHz**

Occupied Bandwidth (-26 dB):

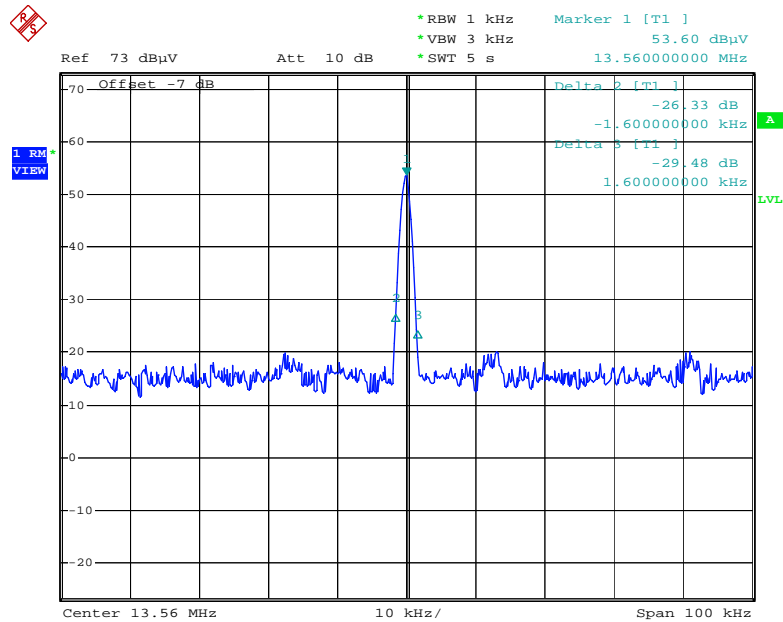

Date: 6.AUG.2013 15:04:23


Occupied Bandwidth (-26 dB): **3.20 kHz**

Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 3, section 4.6.1
Guide:	IC RSS-Gen Issue 3, section 4.6.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.2)

Comment:	Tested with ANT30
Date of test:	2013-08-06
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %):

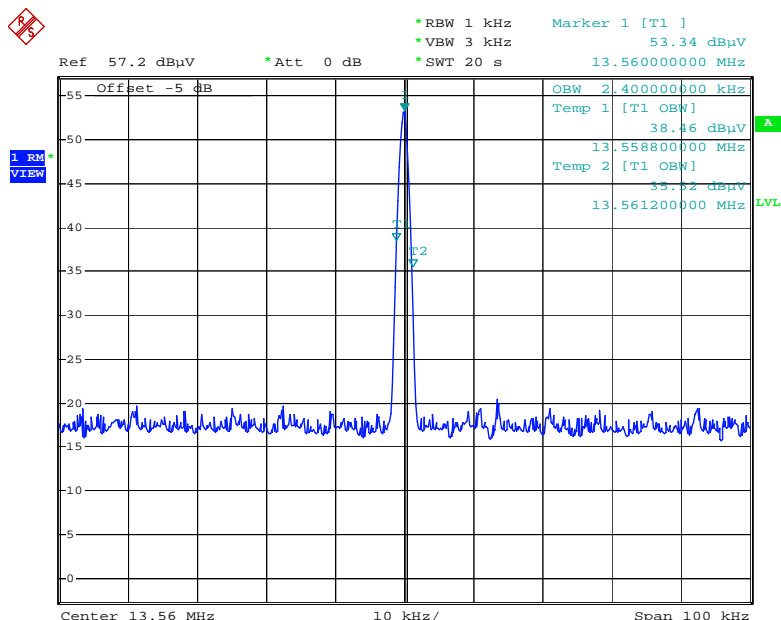


Date: 6.AUG.2013 15:18:26

Occupied Bandwidth (99 %):	2.80 kHz
----------------------------	-----------------

8.4 Bandwidth of the Emission (ANT8)

Rules and specifications:	CFR 47 Part 15, section 15.215(c)	
Guide:	ANSI C63.4	
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
The video bandwidth shall be at least three times greater than the resolution bandwidth.		
Measurement procedure:	Bandwidth Measurements (6.2)	
Comment:	Tested with ANT8	
Date of test:	2013-08-06	
Test site:	Fully anechoic room, cabin no. 2	

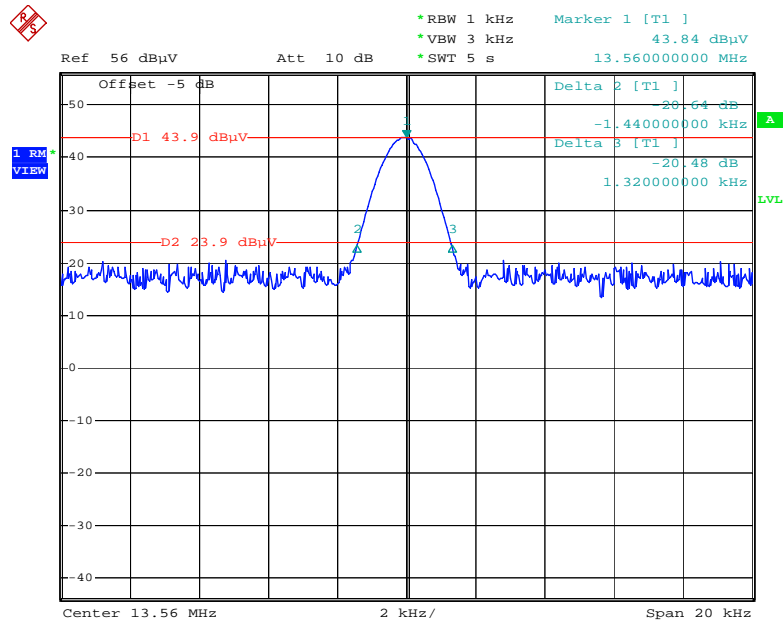

Date: 6.AUG.2013 14:07:38

Permitted frequency band:	13.110 - 14.010 MHz	
20 dB bandwidth:	2.76 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances-:	+0.037 kHz - 0.025 kHz	
Bandwidth of the emission:	2.822 kHz	within permitted frequency band⁷: <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	--------------------


⁷ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.



8.5 Bandwidth of the Emission (ANT30)

Rules and specifications:	CFR 47 Part 15, section 15.215(c)	
Guide:	ANSI C63.4	
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.2)	

Comment:	Tested with ANT30
Date of test:	2013-08-06
Test site:	Fully anechoic room, cabin no. 2

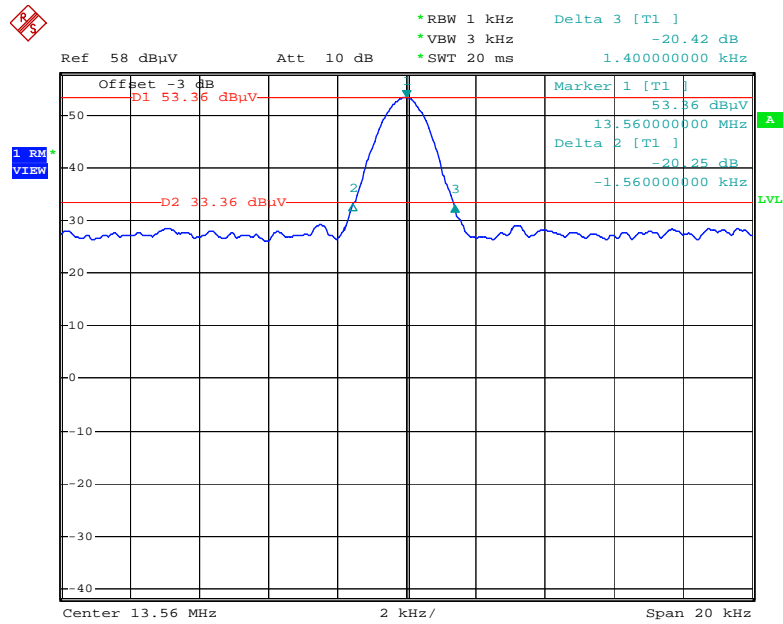

Date: 6.AUG.2013 13:53:32

Permitted frequency band:	13.110 - 14.010 MHz	
20 dB bandwidth:	2.96 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances:	+0.037 kHz - 0.025. kHz	
Bandwidth of the emission:	2.985 kHz	within permitted frequency band⁸: <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁸ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.6 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 3, sections 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------

B_n = Necessary Bandwidth	$B_n = 2BK$
B = Modulation rate	B = 1.4 kHz
K = Overall numerical factor	K = 1
Calculation:	$B_n = 2 \cdot (1.4 \text{ kHz}) \cdot 1 = 2.8 \text{ kHz}$


Designation of Emissions:	2k8A1D
---------------------------	---------------

8.7 Spectrum Mask (ANT8)


Rules and specifications:	CFR 47 Part 15, section 15.225(a)-(d) IC RSS-210 Issue 8, section A2.6			
Guide:	ANSI C63.4			
Description:	Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.5)			

Comment:	Tested with ANT8
Date of test:	2013-08-06
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters
Extrapolation Factor:	40 dB/decade

Test Result:	Test passed
--------------	-------------

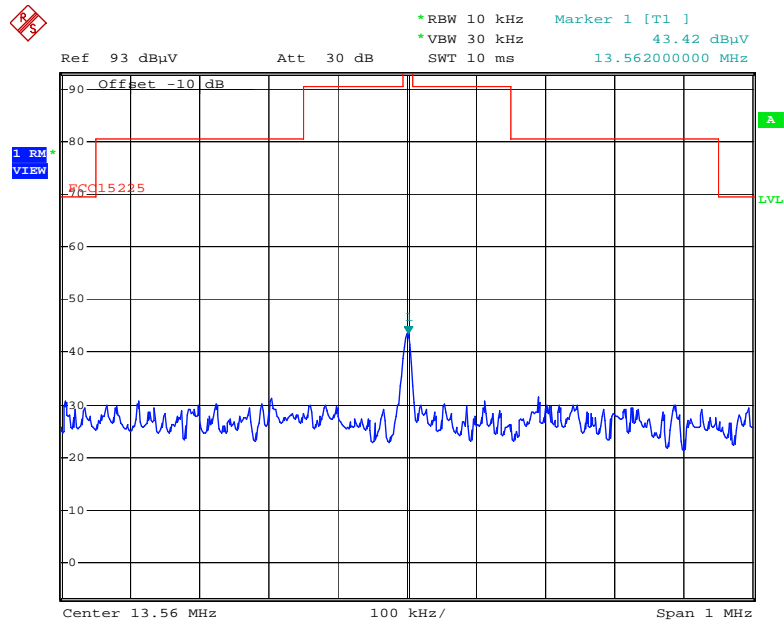

Date: 6.AUG.2013 13:38:30

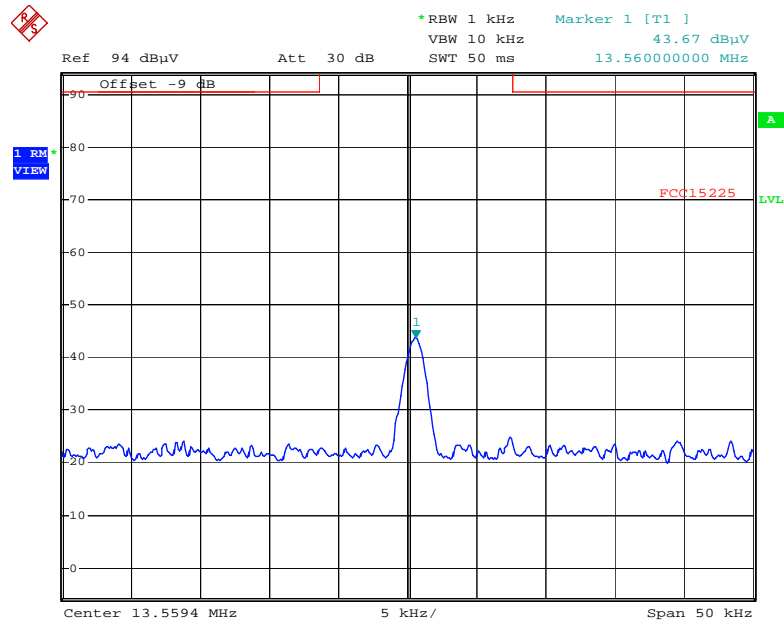

Date: 6.AUG.2013 13:35:08




9.1 Spectrum Mask (ANT30)


Rules and specifications:	CFR 47 Part 15, section 15.225(a)-(d) IC RSS-210 Issue 8, section A2.6			
Guide:	ANSI C63.4			
Description:	Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength (dB $\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.5)			

Comment:	Tested with ANT30
Date of test:	2013-08-06
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters
Extrapolation Factor.:	40 dB/decade

Test Result:	Test passed
--------------	-------------

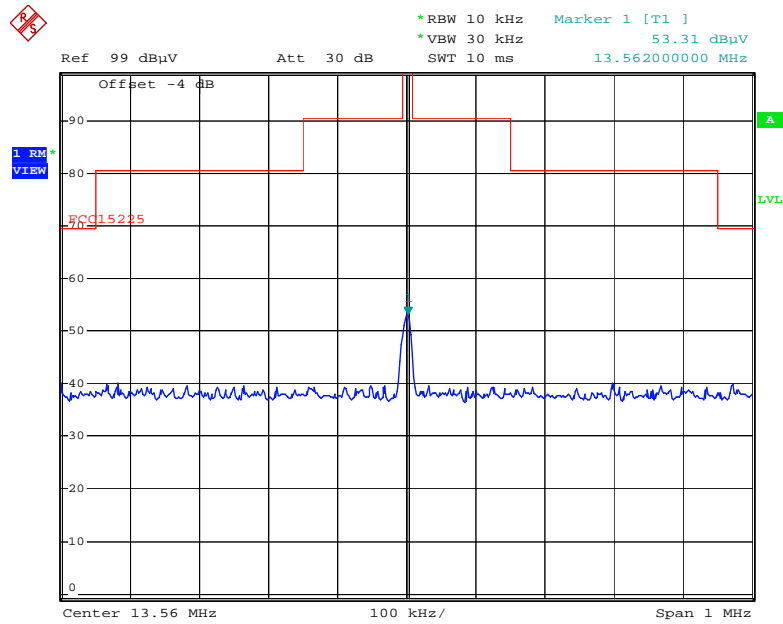

Date: 6.AUG.2013 13:44:23

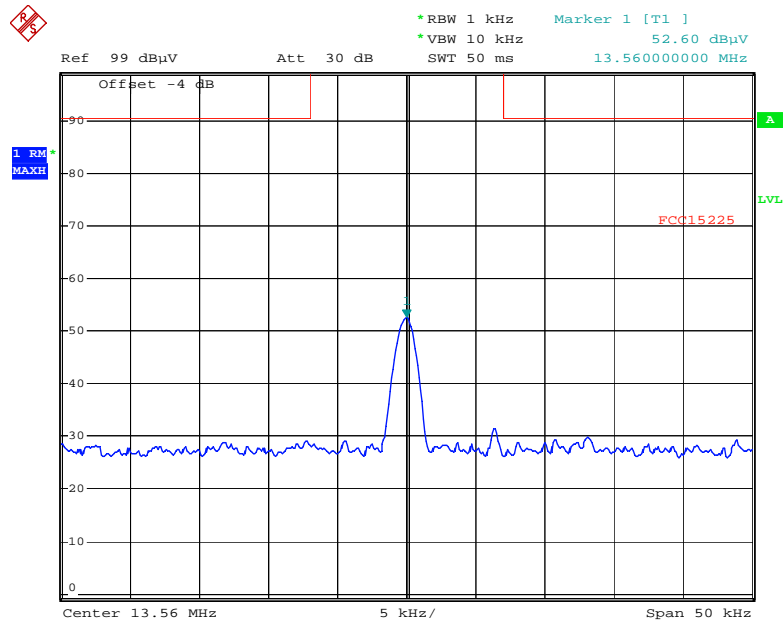

Date: 6.AUG.2013 13:46:21

9.2 Radiated Emission Measurement 9 kHz to 30 MHz (ANT8)

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.225(a)-(d) IC RSS-GEN Issue 3, sections 7.2.2(b)(c) and 7.2.5 and IC RSS-210 Issue 8, section A2.6			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.5)			

Comment:	Tested with ANT8
Date of test:	2013-08-06
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dB μV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dB $\mu\text{V/m}$)	Limit (dB $\mu\text{V/m}$)	Margin (dB)
		d1 (m)	d (m)							
13,56000	Quasi-Peak	10	30	9,2	20,0	-19,1		10,1	84,0	73,9

9.3 Radiated Emission Measurement 9 kHz to 30 MHz (ANT30)

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.225(a)-(d) IC RSS-GEN Issue 3, sections 7.2.2(b)(c) and 7.2.5 and IC RSS-210 Issue 8, section A2.6			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.				
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.5)			

Comment:	Tested with ANT30
Date of test:	2013-08-06
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value ($\text{dB}\mu\text{V}$)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value ($\text{dB}\mu\text{V}/\text{m}$)	Limit ($\text{dB}\mu\text{V}/\text{m}$)	Margin (dB)
		d1 (m)	d (m)							
13,56000	Quasi-Peak	10	30	13,5	20,0	-19,1		14,4	84,0	69,6

Sample calculation of final values:

$$\text{Extrapolation Factor (dB)} = (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)}$$

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value } d_1 \text{ (dB}\mu\text{V)} + \text{Correction Factor (dB/m)} \\ + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)}$$

Note: Extrapolation factor (dB) and final value (dB μ V/m) are relating to distance d.

9.4 Radiated Emission Measurement 30 MHz to 1 GHz (ANT8)

Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-GEN Issue 3, sections 7.2.2(b)(c) and 7.2.5 and IC RSS-210 Issue 8, section A2.6		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.6) Radiated Emission at Alternative Test Site (6.7)		

Comment:	Tested with ANT8
Date of test:	2013-07-27
Test site:	Frequencies ≤ 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies > 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency MHz	QuasiPeak $\text{dB}\mu\text{V}/\text{m}$	Meas. Time ms	Bandwidth kHz	Height cm	Polarization	Azimuth deg	Corr. dB	Margin dB	Limit $\text{dB}\mu\text{V}/\text{m}$
40,660000	37,2	1000,0	120,000	100,0	V	-90,0	15,5	2,8	40,0
88,490000	34,7	1000,0	120,000	223,0	H	-109,0	12,1	8,8	43,5
94,940000	30,9	1000,0	120,000	291,0	H	-109,0	13,3	12,6	43,5
103,210000	36,4	1000,0	120,000	310,0	H	71,0	13,8	7,1	43,5
117,980000	34,1	1000,0	120,000	223,0	H	71,0	12,2	9,4	43,5
132,700000	33,9	1000,0	120,000	100,0	V	-30,0	10,5	9,6	43,5

Sample calculation of final values:

$$\text{Reading Value (dB}\mu\text{V}/\text{m)} = \text{Final Value (dB}\mu\text{V)} - \text{Correction Factor (dB/m)}$$

9.5 Radiated Emission Measurement 30 MHz to 1 GHz (ANT30)

Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-GEN Issue 3, sections 7.2.2(b)(c) and 7.2.5 and IC RSS-210 Issue 8, section A2.6		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.6) Radiated Emission at Alternative Test Site (6.7)		

Comment:	Tested with ANT30
Date of test:	2013-07-27
Test site:	Frequencies \leq 1 GHz: Semi-anechoic room, cabin no. 8 Frequencies $>$ 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

Frequency MHz	QuasiPeak $\text{dB}\mu\text{V/m}$	Meas. Time ms	Bandwidth kHz	Height cm	Polarization	Azimuth deg	Corr. dB	Margin dB	Limit $\text{dB}\mu\text{V/m}$
40,700000	31,3	1000,0	120,000	100,0	V	-87,0	15,5	8,7	40,0
81,330000	27,5	1000,0	120,000	400,0	H	-122,0	9,9	12,5	40,0
88,490000	35,9	1000,0	120,000	200,0	H	-109,0	12,1	7,6	43,5
103,210000	36,5	1000,0	120,000	304,0	H	-104,0	13,8	7,0	43,5
110,590000	25,7	1000,0	120,000	250,0	H	71,0	13,4	17,8	43,5
117,980000	37,2	1000,0	120,000	200,0	H	80,0	12,2	6,3	43,5
132,700000	35,0	1000,0	120,000	100,0	V	-176,0	10,5	8,5	43,5

Sample calculation of final values:


$$\text{Reading Value (dB}\mu\text{V/m)} = \text{Final Value (dB}\mu\text{V)} - \text{Correction Factor (dB/m)}$$

9.6 Carrier Frequency Stability

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 3, section 4.7 and IC RSS-210 Issue 8, section A2.6
Guide:	ANSI C63.4
Limit:	The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % (± 100 ppm) of the carrier frequency under nominal conditions.
Temperature range:	-20°C to +50°C (at normal supply voltage)
Voltage range:	85% to 115% of the rated supply voltage (at a temperature of +20°C)
Measurement procedure:	Carrier Frequency Stability (6.8)

Comment:	
Date of test:	2013-08-07

9.6.2 Carrier Frequency Stability vs. Supply Voltage

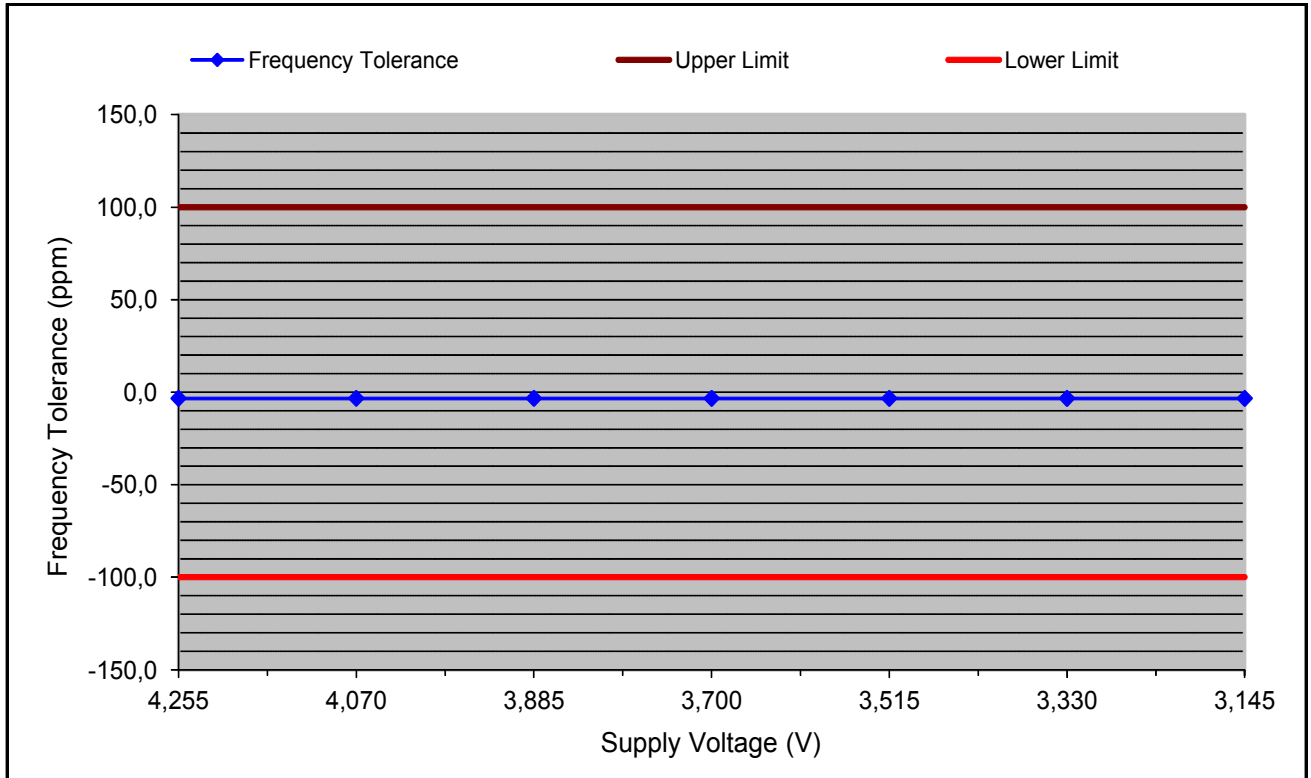

Temperature: +20 °C Battery End Point: 3,000 V
 Nominal frequency: 13,560000 MHz

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
4,255	13,559955	-45	-3,3	+100,0	-100,0	96,7
4,070	13,559955	-45	-3,3	+100,0	-100,0	96,7
3,885	13,559955	-45	-3,3	+100,0	-100,0	96,7
3,700	13,559955	-45	-3,3	+100,0	-100,0	96,7
3,515	13,559955	-45	-3,3	+100,0	-100,0	96,7
3,330	13,559955	-45	-3,3	+100,0	-100,0	96,7
3,145	13,559955	-45	-3,3	+100,0	-100,0	96,7

Test Result: Test passed

9.7 Exposure of Humans to RF Fields

Rules and specifications:	IC RSS-Gen Issue 3, section 5.6
Guide:	IC RSS-102 Issue 4, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption	
The antenna is					
<input checked="" type="checkbox"/> detachable					
<p>The conducted output power (CP in watts) is measured at the antenna connector:</p> <p style="text-align: center;">$CP = 50,12 \text{ mW}$</p> <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$ $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \text{ W}$</p> <p><input checked="" type="checkbox"/> the field strength⁹ in V/m: $FS = 47,32 \text{ }\mu\text{V/m}$ $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = 7,46 \text{ nW}$</p> <p>with: Distance between the antennas in m: $D = 10 \text{ m}$</p>			<input type="checkbox"/>	<input checked="" type="checkbox"/>	
<input type="checkbox"/> not detachable					
<p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by⁹:</p> <p style="text-align: center;">$EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \text{ W}$</p> <p>with: Field strength in V/m: $FS = \dots\dots\dots \text{ V/m}$ Distance between the two antennas in m: $D = 30 \text{ m}$</p>			<input type="checkbox"/>	<input type="checkbox"/>	
Selection of output power					
<p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> <p style="text-align: center;">$TP = \dots\dots\dots \text{ W}$</p>					

⁹ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

Exposure of Humans to RF Fields (continued)	Applicable	Declared by applicant	Measured	Exemption
Separation distance between the user and the transmitting device is				
<input checked="" type="checkbox"/> less than or equal to 20 cm		<input checked="" type="checkbox"/>		
<input type="checkbox"/> greater than 20 cm				
Transmitting device is				
<input type="checkbox"/> in the vicinity of the human head		<input checked="" type="checkbox"/>		
<input type="checkbox"/> body-worn				
SAR evaluation				
SAR evaluation is required if the separation distance between the user and the device is less than or equal to 20 cm.				
<input checked="" type="checkbox"/> The device operates from 3 kHz up to 1 GHz inclusively and with output power (i.e. the higher of the conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 200 mW for general public use and 1000 mW for controlled use.				
<input type="checkbox"/> ;				
<input type="checkbox"/> The device operates above 1 GHz and up to 2.2 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 100 W for general public use and 500 W for controlled use.				
<input type="checkbox"/> The device operates above 2.2 GHz and up to 3 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 20 mW for general public use and 100 mW for controlled use.				
<input type="checkbox"/> The device operates above 3 GHz and up to 6 GHz inclusively and with output power (i.e. the higher of the conducted or radiated (e.i.r.p.) source-based, time-averaged output power) that is less than or equal to 10 mW for general public use and 50 mW for controlled use.				
<input type="checkbox"/> SAR evaluation is documented in test report no.				
RF exposure evaluation				
RF exposure evaluation is required if the separation distance between the user and the device is greater than 20 cm.				
<input checked="" type="checkbox"/> The device operates below 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 2.5 W.				
<input type="checkbox"/> The device operates at or above 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 5 W.				
<input type="checkbox"/> RF exposure evaluation is documented in test report no.				

10 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2012
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	October 1, 2012
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	June 7, 2009 (published on September 15, 2009)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 3 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 8 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	December 2010
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 3 for Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	December 2010
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 4: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), published by Industry Canada	March 2010, footnote 13 updated December 2010
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997



<input type="checkbox"/>	CAN/CSA- CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002
		CAN/CSA CISPR 22-10 Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	
<input type="checkbox"/>	CAN/CSA CISPR 22-10	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement (Adopted IEC CISPR 22:2008, sixth edition, 2008-09)	2010
<input checked="" type="checkbox"/>	TRC-43	Notes Regarding Designation of Emissions (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada	October, 2008



11 Test Equipment List with Calibration Data

Type	Inv.-No.	Type Designation	Serial Number	Manufacturer	Calibration Organization	Last Calibration	Next Calibration
EMI test receiver	1028	ESHS10	860043/016	Rohde & Schwarz	Rohde & Schwarz	03/2013	09/2014
EMI test receiver	1569	ESMI	839699/006	Rohde & Schwarz	Rohde & Schwarz	11/2012	11/2014
EMI test receiver	1711	ESPI7	836914/0002	Rohde & Schwarz	Rohde & Schwarz	11/2012	05/2014
EMI test receiver	1863	ESCI3	100008	Rohde & Schwarz	Rohde & Schwarz	04/2013	10/2014
EMI test receiver	2010	ESPI7	101018	Rohde & Schwarz	Rohde & Schwarz	11/2012	05/2014
EMI test receiver	2044	ESU8	100232	Rohde & Schwarz	Rohde & Schwarz	07/2012	01/2014
Spectrum analyser	1666	FSP30	100063	Rohde & Schwarz	Rohde & Schwarz	11/2012	05/2014
Preamplifier	1484	ACO/180-3530	32641	CTT	TÜV SÜD PS-EMC-STR	12/2012	06/2014
Preamplifier	1651	CPA9231A	3393	Schaffner Electrotest	TÜV SÜD PS-EMC-STR	09/2012	09/2014
Preamplifier	1684	AFS3-00100800-32-LN	847743	MITEQ	TÜV SÜD PS-EMC-STR	04/2013	10/2015
Preamplifier	1685	AMF-4D-005080-25-13P	860149	MITEQ	TÜV SÜD PS-EMC-STR	08/2013	11/2015
Preamplifier	1716	CPA9231A	3557	Schaffner EMC Systems	TÜV SÜD PS-EMC-STR	07/2012	01/2014
Preamplifier	2076	AFS3-00100800-32-LN	1344017	MITEQ			
Detector negative	1581	8473D	01492	Hewlett Packard		see note 3	
V-network	1059	ESH3-Z5	894785/005	Rohde & Schwarz	Rohde & Schwarz	08/2013	08/2015
V-network	1060	ESH3-Z5	862770/021	Rohde & Schwarz	Rohde & Schwarz	05/2012	05/2014
V-network	1218	ESH3-Z5	830952/025	Rohde & Schwarz	Rohde & Schwarz	08/2011	08/2013
Impedance stabization network (ISN)	2080	ISN T800	28597	Teseq	Teseq	08/2012	11/2014
Double ridged horn antenna	2073	HF907	100154	Rohde & Schwarz	Rohde & Schwarz	05/2013	05/2015
Double ridged waveguide horn antenna	1516	3115	9508-4553	EMCO Elektronik	Seibersdorf Laboratories	11/2012	11/2014



Type	Inv.-No.	Type Designation	Serial Number	Manufacturer	Calibration Organization	Last Calibration	Next Calibration
Horn antenna	1010	3160-03	9112 -1003	EMCO Elektronik		see note 1	
Horn antenna	1011	3160-04	9112-1001	EMCO Elektronik		see note 1	
Horn antenna	1012	3160-05	9112-1001	EMCO Elektronik		see note 1	
Horn antenna	1013	3160-06	9112-1001	EMCO Elektronik		see note 1	
Horn antenna	1014	3160-07	9112-1008	EMCO Elektronik		see note 1	
Horn antenna	1015	3160-08	9112-1002	EMCO Elektronik		see note 1	
Horn antenna	1265	3160-09	9403-1025 (931941-010)	EMCO Elektronik		see note 1	
Horn antenna	1575	3160-10	399185	EMCO Elektronik		see note 1	
Horn antenna	2086	24240-20	157845	Flann		see note 1	
Horn antenna	2180	25240-25	205900	Flann		see note 1	
Horn antenna	2182	27240-25	204260	Flann		see note 1	
Loop antenna	1016	HFH2-Z2	882964/0001	Rohde & Schwarz	Rohde & Schwarz	11/2012	05/2014
TRILOG broadband antenna	1722	VULB 9163	9163-188	Schwarzbeck	Rohde & Schwarz	03/2012	09/2013
TRILOG Broadband Antenna	1802	VULB 9163	9163-214	Schwarzbeck	Rohde & Schwarz	05/2013	11/2014
TRILOG Broadband Antenna	2058	VULB 9163	9163-408	Schwarzbeck	Rohde & Schwarz	11/2012	05/2014
Digital multimeter	2025	Fluke 177	96720024	Fluke	ZMK	07/2013	07/2015
Digital multimeter	2026	Fluke 177	96720025	Fluke	ZMK	07/2013	07/2015
Handheld digital multimeter	2252	U1252B	MY53100196	Agilent Technologies Malaysia	Agilent Technologies Malaysia	03/2013	03/2015
Handheld digital multimeter	2253	U1252B	MY53150037	Agilent Technologies Malaysia	Agilent Technologies Malaysia	06/2013	06/2015
Multimeter	1653	21 III	76530546	Fluke	ZMK	11/2012	11/2014
Multimeter	1654	21 III	76381229	Fluke	ZMK	11/2012	11/2014
Multimeter	1975	Fluke 77 III	92370108	Fluke	ZMK	08/2013	08/2015
Coupling network	2151	CNI 503A3	V1150111228	EM Test	EM Test	03/2012	09/2013
Temperature test chamber	1271	HT 4010	07065550	Heraeus	TÜV SÜD PS-EMC-STR	06/2013	06/2015
DC power supply	1267	NGSM 32/10	203	Rohde & Schwarz		see note 4	



<i>Type</i>	<i>Inv.-No.</i>	<i>Type Designation</i>	<i>Serial Number</i>	<i>Manufacturer</i>	<i>Calibration Organization</i>	<i>Last Calibration</i>	<i>Next Calibration</i>
LO amplifier	1577	LO-AMP, FS-Z30	624413/003	Rohde & Schwarz	Rohde & Schwarz	01/2013	01/2015
Waveguide mixer	1576	WM782A, FS-Z40	845881/005	Tektronix	Rohde & Schwarz	01/2013	01/2015
Waveguide mixer	2085	WM780U	B030121	Tektronix	Rohde & Schwarz	01/2013	01/2015
Waveguide mixer	2140	WM782V	B030132	Tektronix	Rohde & Schwarz	01/2013	01/2015
Waveguide mixer	2181	WM782W	B010193	Tektronix	Rohde & Schwarz	01/2013	01/2015

Note 1: No calibration required.

Note 2: Not calibrated separately but with the whole test system when recording calibration data.

Note 3: No calibration required. Devices are checked before use.

Note 4: No calibration required. Devices are checked by calibrated equipment during test.

12 Revision History


Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	2013-09-08	Thomas Eberl (gz)	First Edition

Annex A Charts taken during testing

Radiated Emission Measurement 9 kHz – 30 MHz

Comment:	Tested with ANT8
Date of test:	2013-08-06
Test site:	Open field test site (Test distance : 3m)

Test Result:	Test passed
--------------	-------------

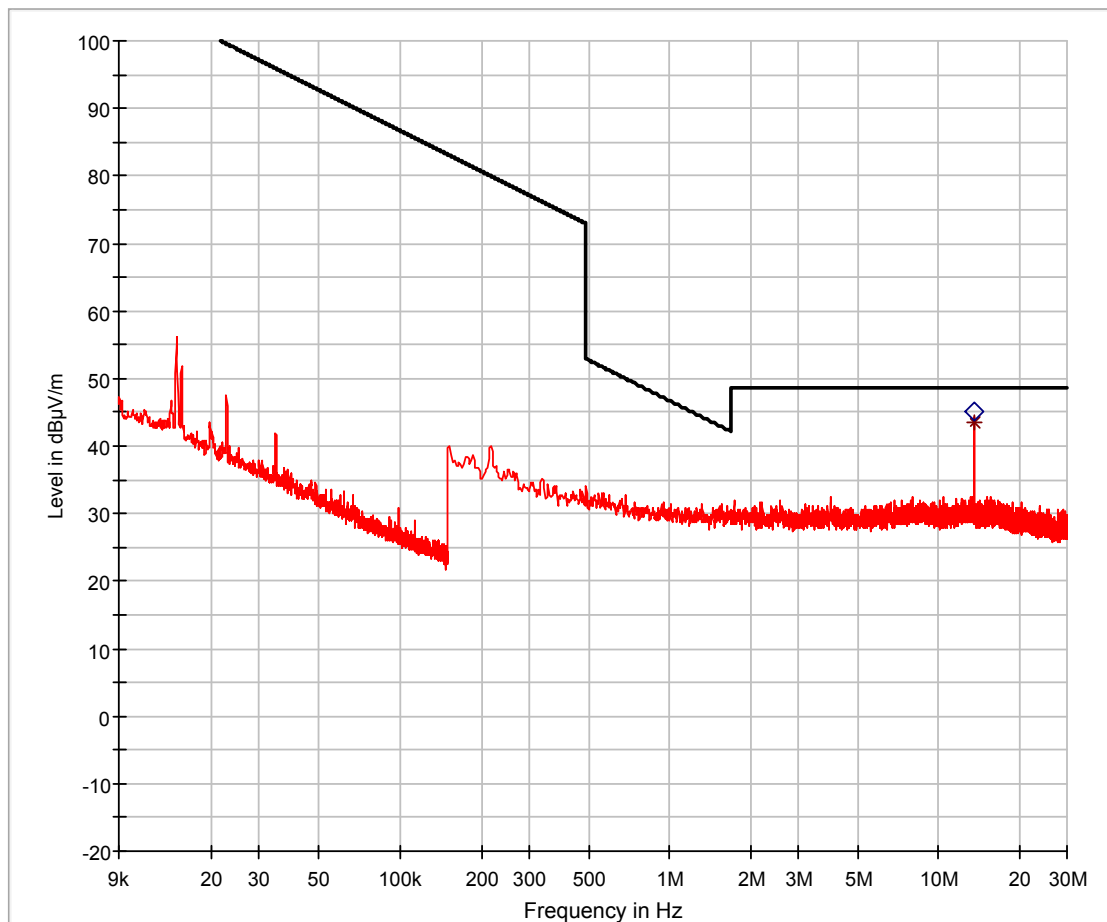

— FCC 15.209 mag (10 m) — Preview Result 1-PK+
* Final Result 1-QPK ◇ Final Result 2-PK+

TÜV SÜD Product Service GmbH
Äußere Frühlingsstraße 45
94315 Straubing
Germany

Phone: +49 9421 5522-0
Fax: +49 9421 5522-99
Web: www.tuev-sued.de




Product Service

Radiated Emission Measurement 9 kHz – 30 MHz

Comment:	Tested with ANT30
Date of test:	2013-08-06
Test site:	Open field test site (Test distance : 3m)

Test Result:	Test passed
--------------	-------------

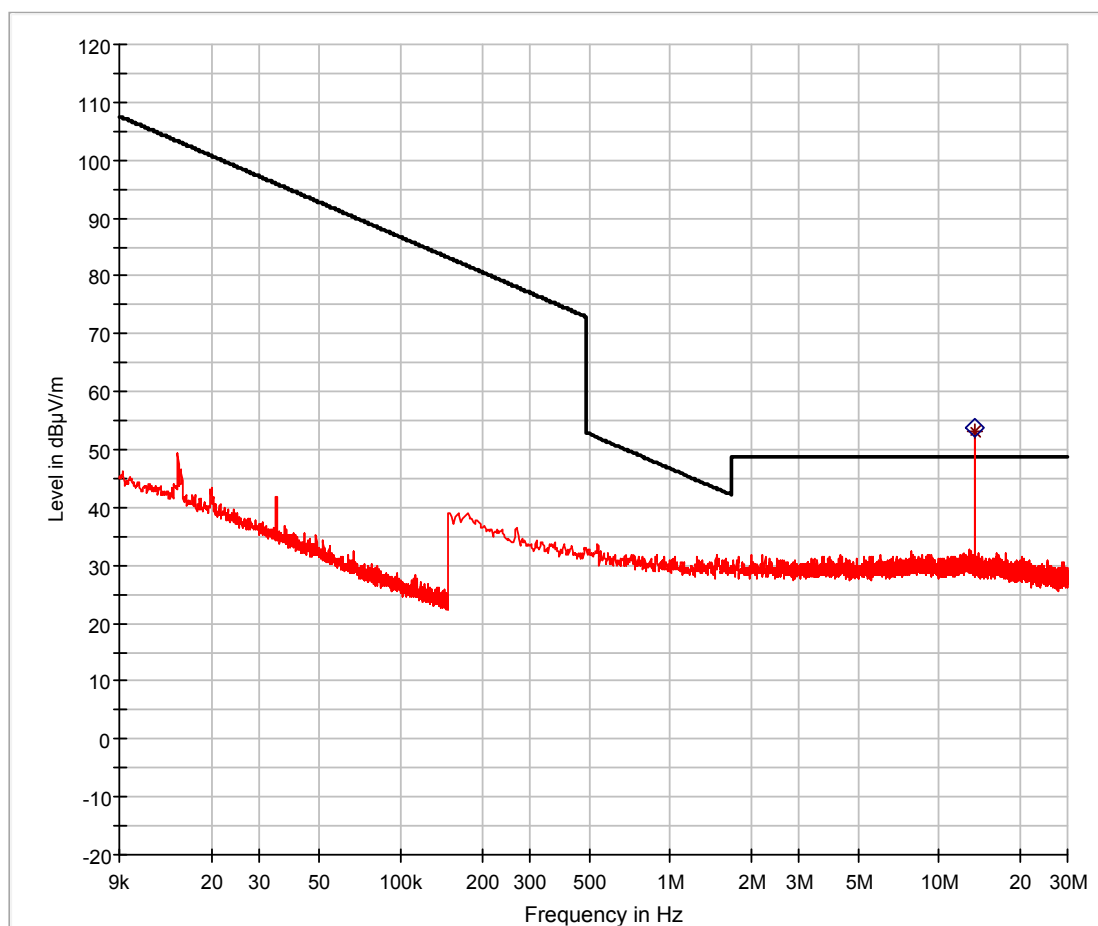


— FCC 15.209 mag (10 m) — Preview Result 1-PK+
* Final Result 1-QPK ◊ Final Result 2-PK+

Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)


Model: R310M	Comment: - TX mode with ISO mode - with Ant 8 - Position 1 - EUT rear side on table
Serial no.: --	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/22/2013	
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin	50 Subranges
-------------------	---------------------------------	--------------

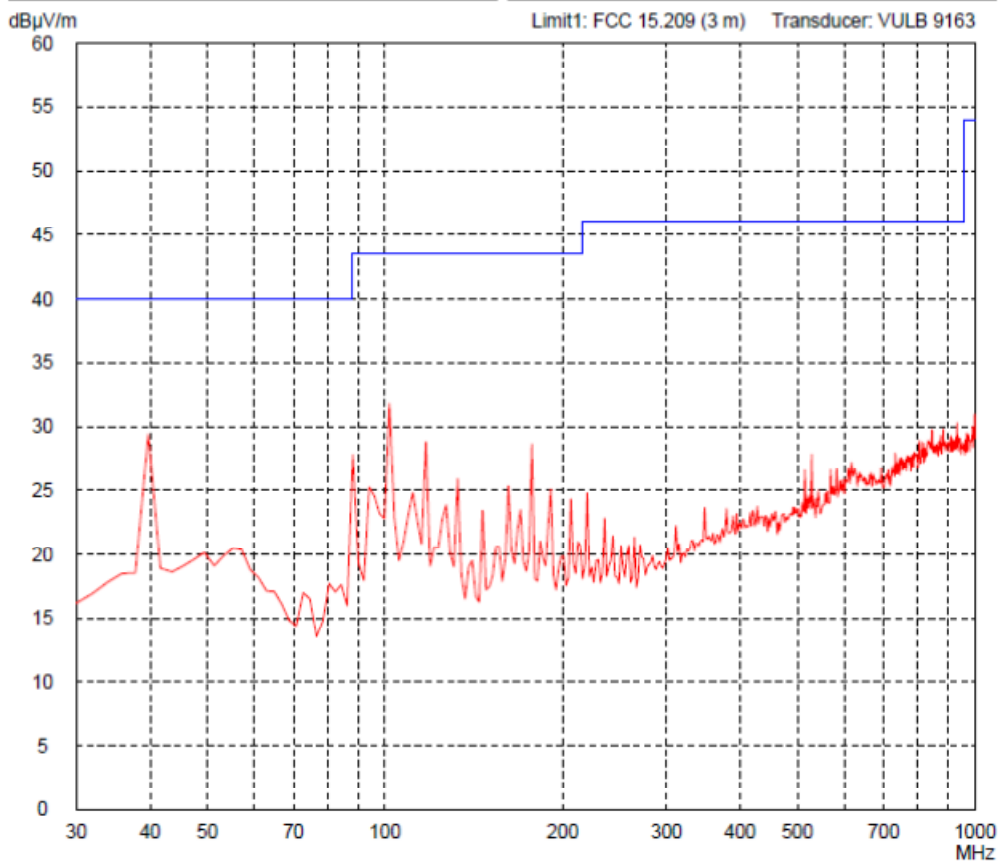


Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)

Model: R310M	Comment: - TX mode with ISO mode - with Ant 30 - Position 1- EUT rear side on table
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/22/2013 Operator: T. Eberl	
Test performed: automatically File name: default.emi	
Detector: Peak	List of values: 10 dB Margin 50 Subranges

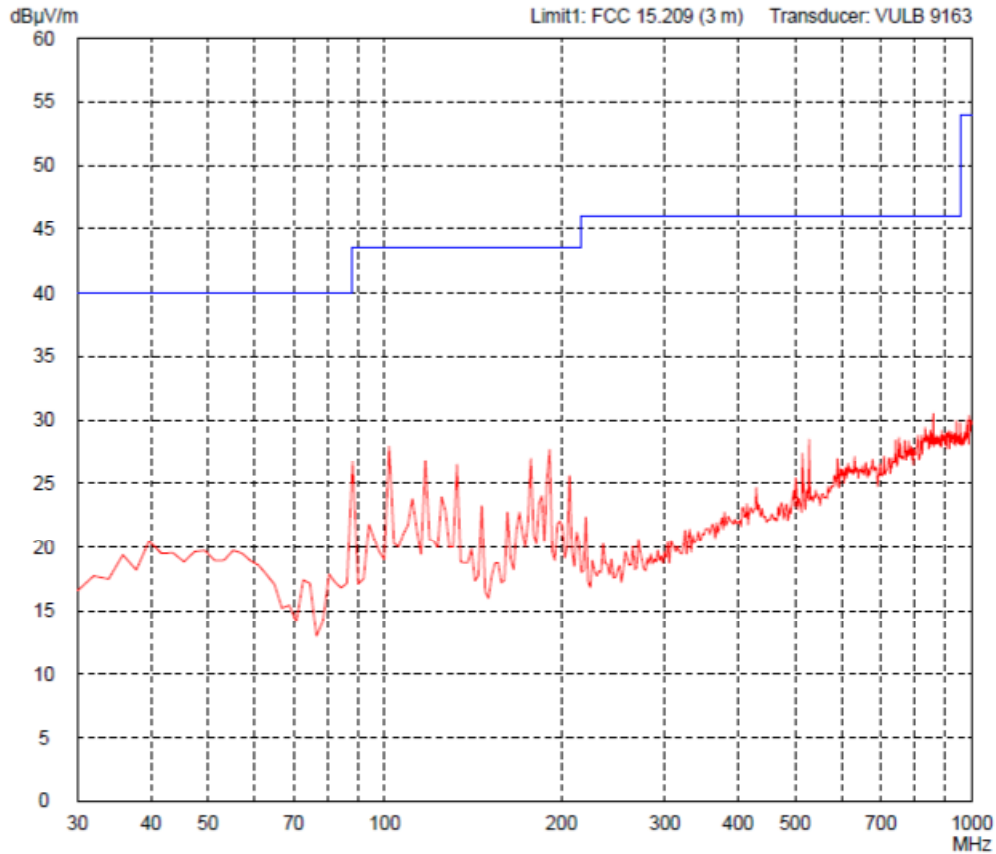


**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: R310M	Comment: - TX mode with ISO mode - with Ant 8 - Position 2 - EUT lin vertical position
Serial no.: --	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/22/2013	Operator: T. Eberl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

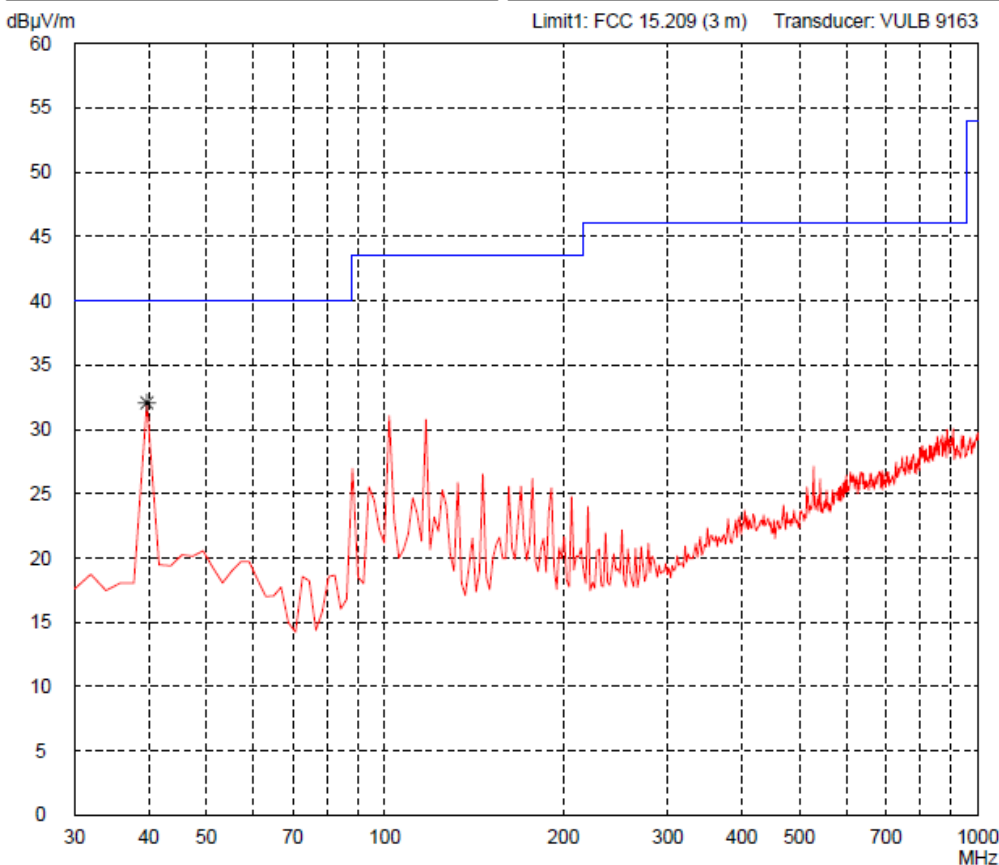


**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: R310M	Comment: - TX mode with ISO mode - with Ant 8 - Position 2 - EUT in vertical position
Serial no.: --	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/22/2013	Operator: T. Eberl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

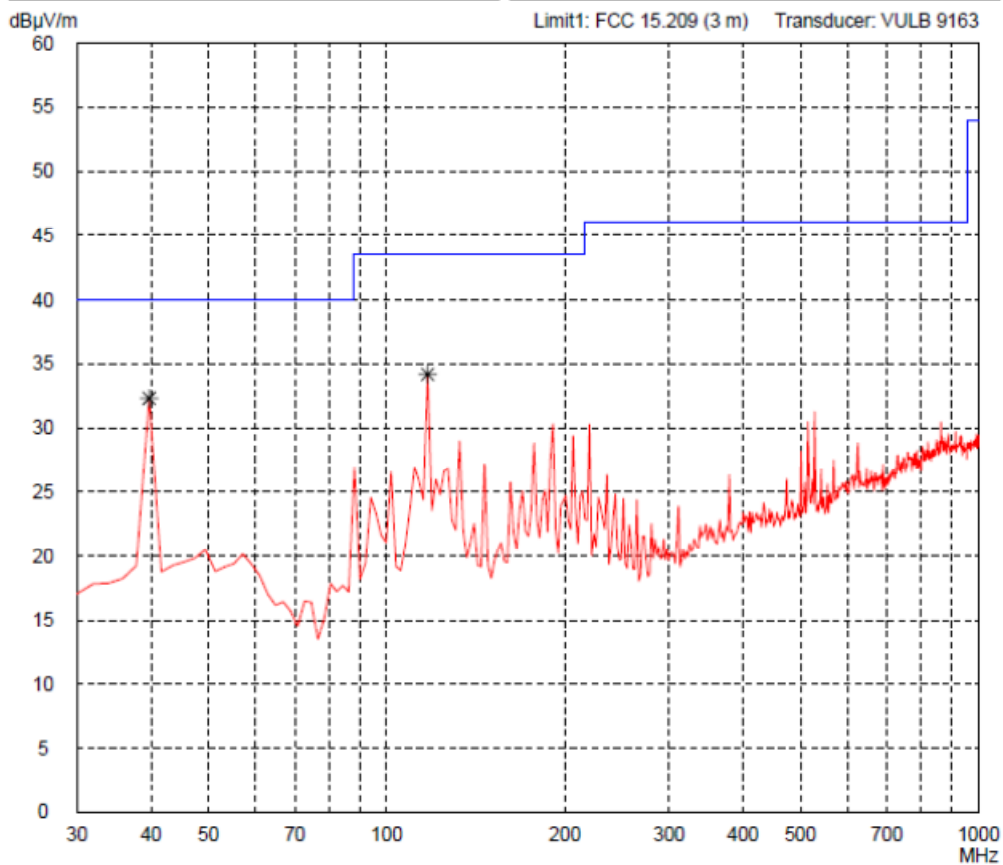


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)	
Model: R310M	Comment: - TX mode with ISO mode - with Ant 8 - Position 3- EUT in left hand side on table
Serial no.: --	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/22/2013 Operator: T. Eberl	
Test performed: automatically File name: default.emi	
Detector: Peak	List of values: 10 dB Margin 50 Subranges

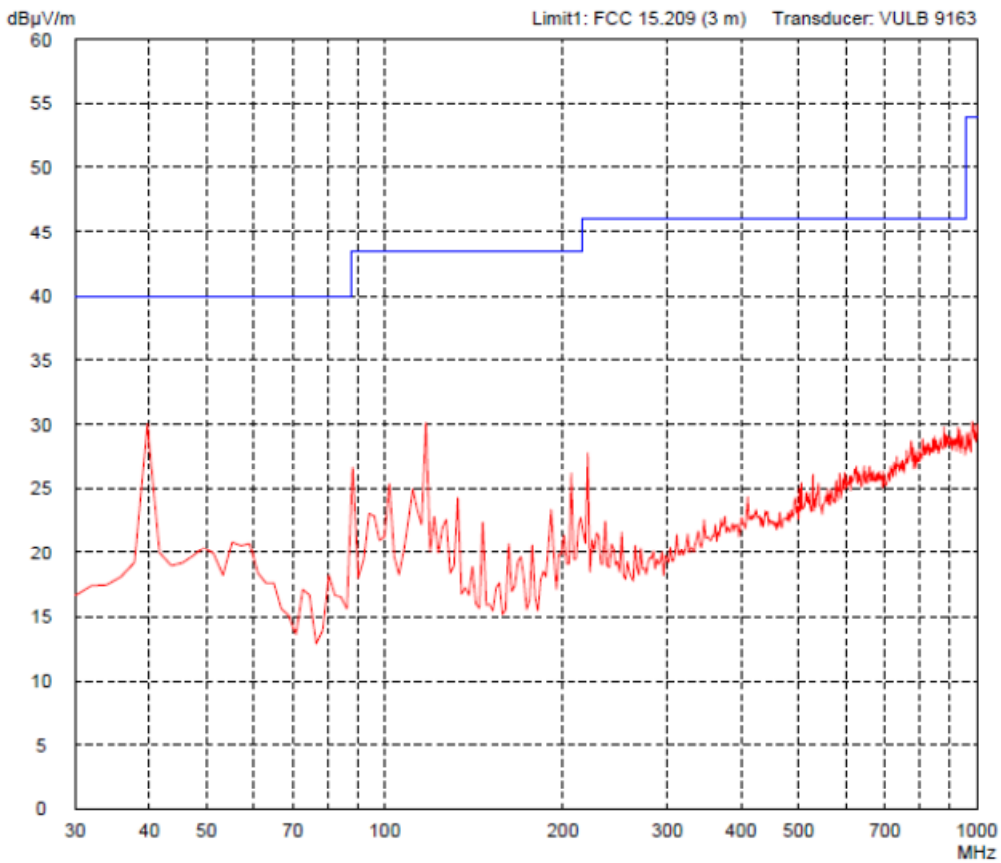


**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: R310M Serial no.: -- Applicant: Siemens AG, Fürth Test site: Fully anechoic room, cabin no. 2 Tested on: Test distance 3 metres Horizontal Polarization Date of test: 07/22/2013 Operator: T. Eberl Test performed: automatically File name: default.emi	Comment: - TX mode with ISO mode - with Ant 8 - Position 3- EUT lin left hand side on table List of values: 10 dB Margin 50 Subranges
Detector: Peak	

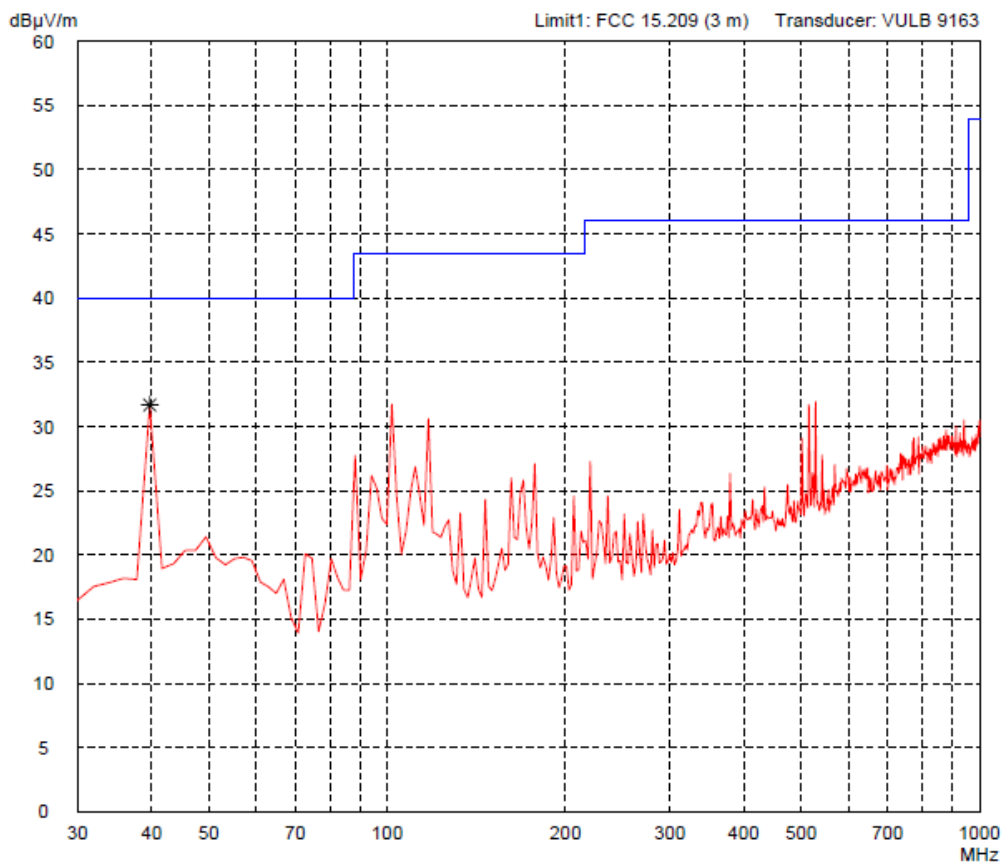


**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: R310M	Comment: - TX mode with ISO mode - with Ant 30 - Position 1- EUT rear side on table
Serial no.: --	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/22/2013	Operator: T. Eberl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

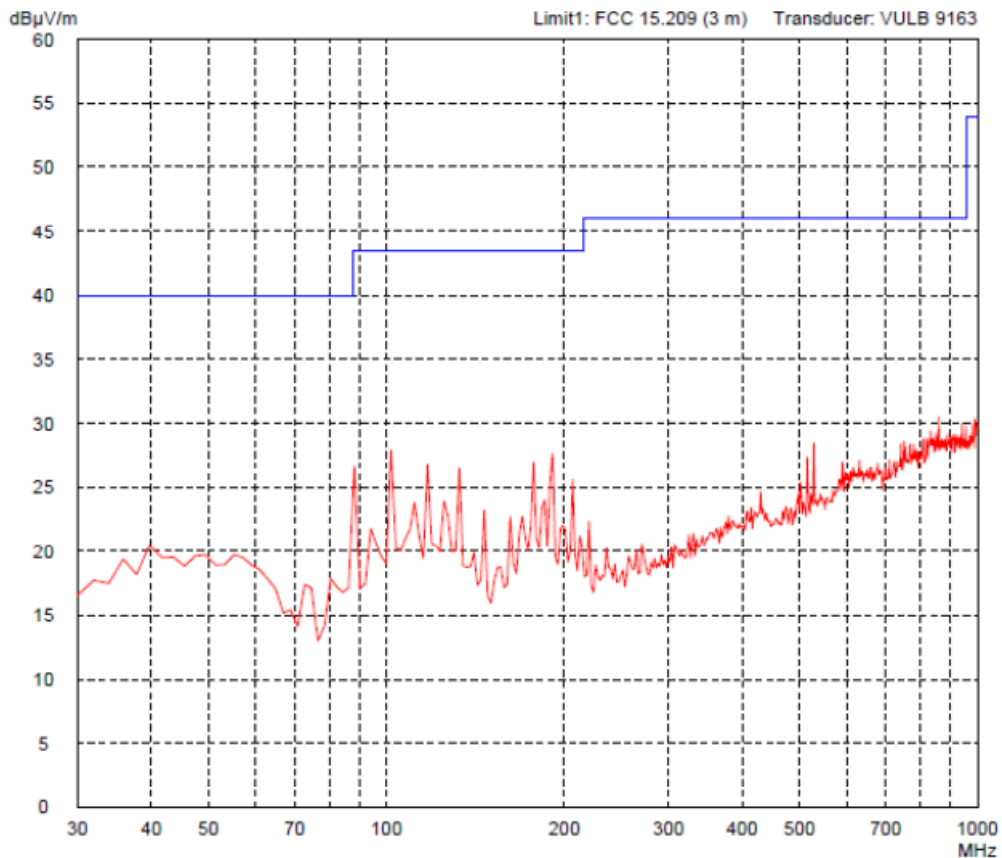


**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**


Model: R310M	Comment: - TX mode with ISO mode - with Ant 30 - Position 1- EUT rear side on table
Serial no.: --	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/22/2013 Operator: T. Eberl	
Test performed: automatically File name: default.emi	
Detector: Peak	List of values: 10 dB Margin 50 Subranges

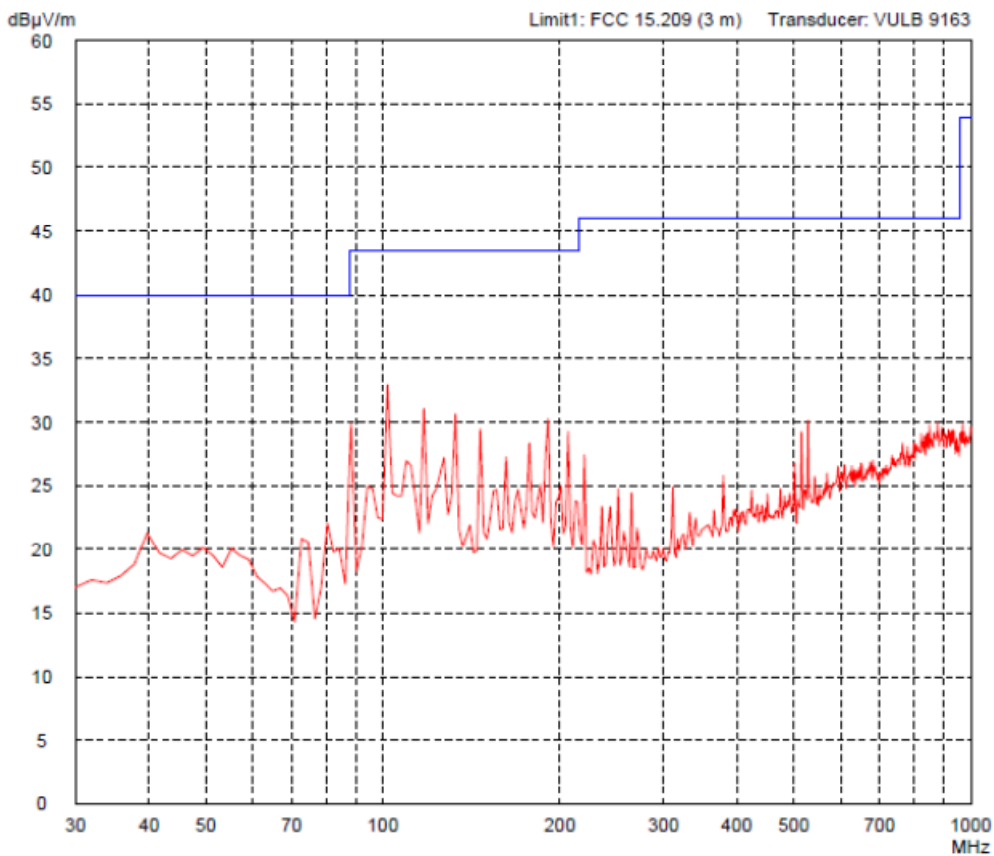

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)	
Model: R310M	Comment: - TX mode with ISO mode - with Ant 30 - Position - EUT in vertical position
Serial no.: --	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/22/2013	Operator: T. Eberl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

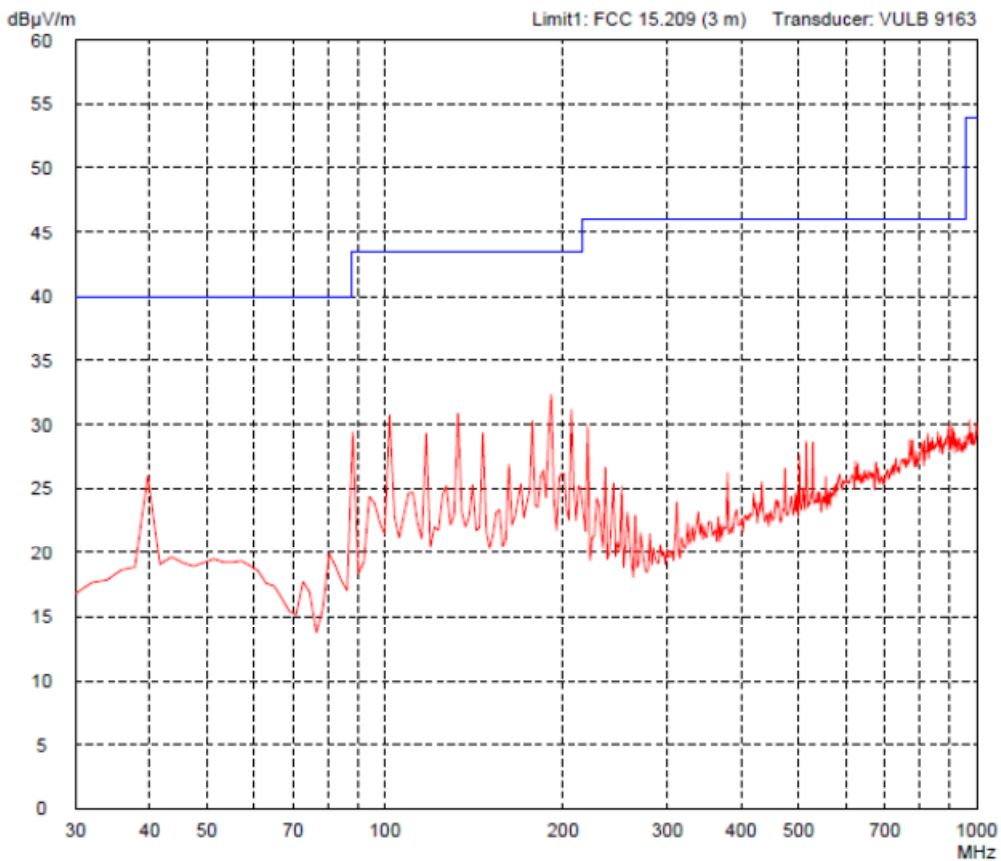


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)	
Model: R310M	Comment: - TX mode with ISO mode - with Ant 30 - Position - EUT in vertical position
Serial no.: --	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/22/2013	Operator: T. Eberl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

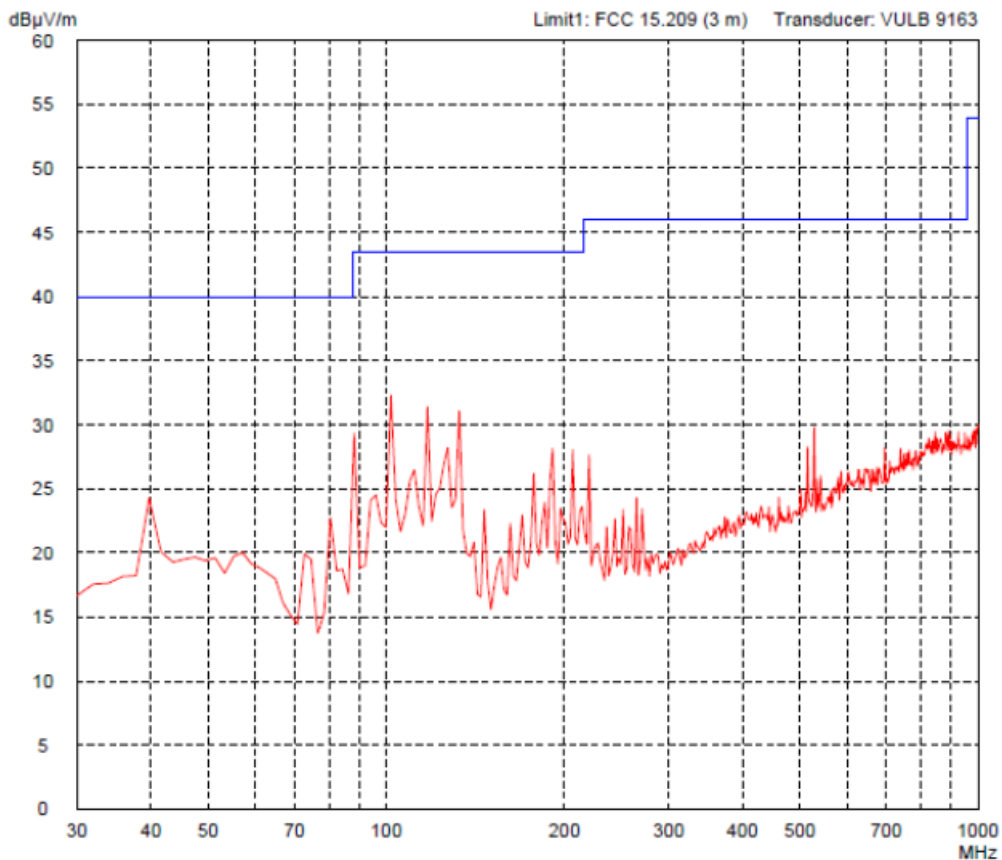


**Radiated Emission Test 30 MHz - 1 GHz
 acc. to FCC Part 15 Subpart C (FAR)**

Model: R310M	Comment: - TX mode with ISO mode - with Ant 30 - Position 3 - EUT left hand side on table
Serial no.: --	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 07/22/2013	
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

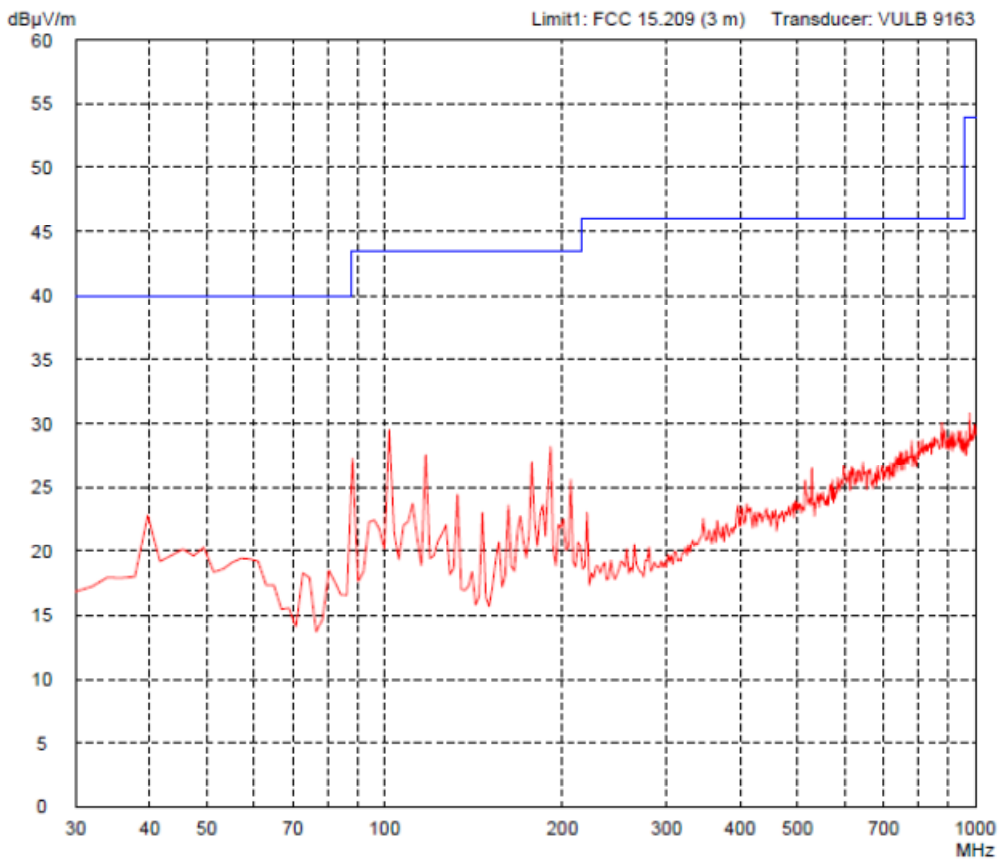


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)	
Model: R310M	Comment: - TX mode with ISO mode - with Ant 30 - Position 3 - EUT left hand side on table
Serial no.: --	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 07/22/2013	Operator: T. Eberl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

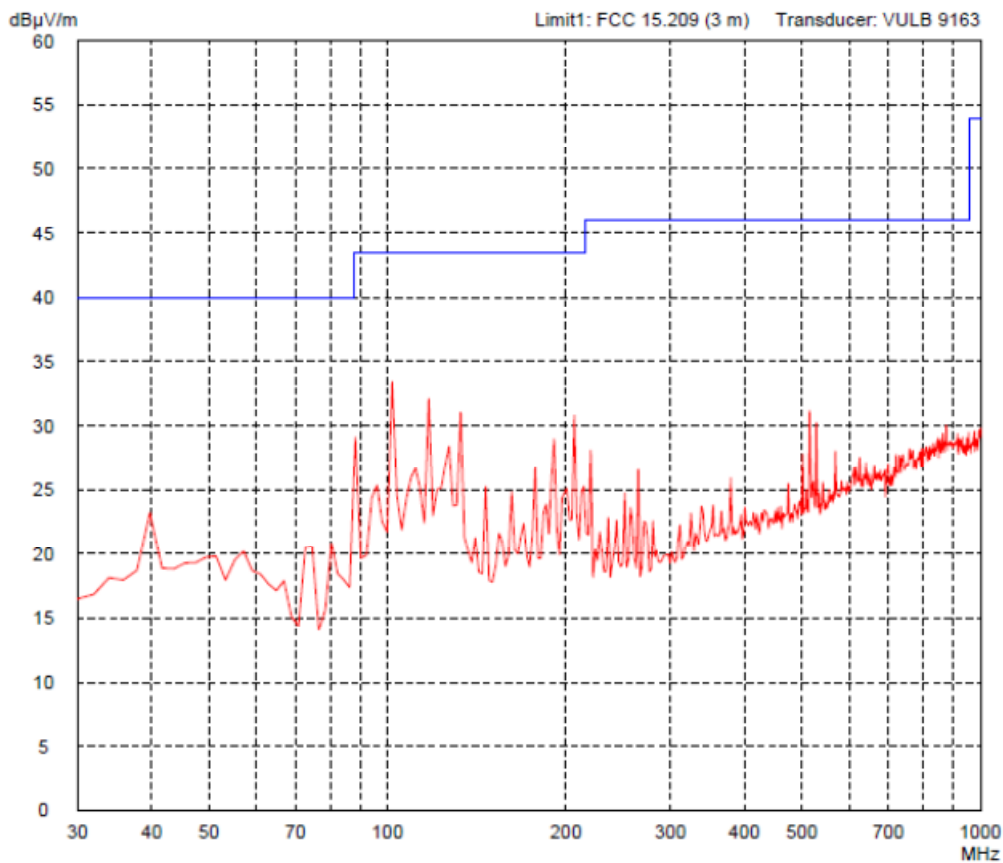

Radiated Emission Measurement 30 MHz – 1000 MHz

Comment:	Tested with ANT8
Date of test:	2013-08-06
Test site:	Semi-anechoic room, cabin no. 8 (Test distance : 3m)

Test Result:	Test passed
--------------	-------------

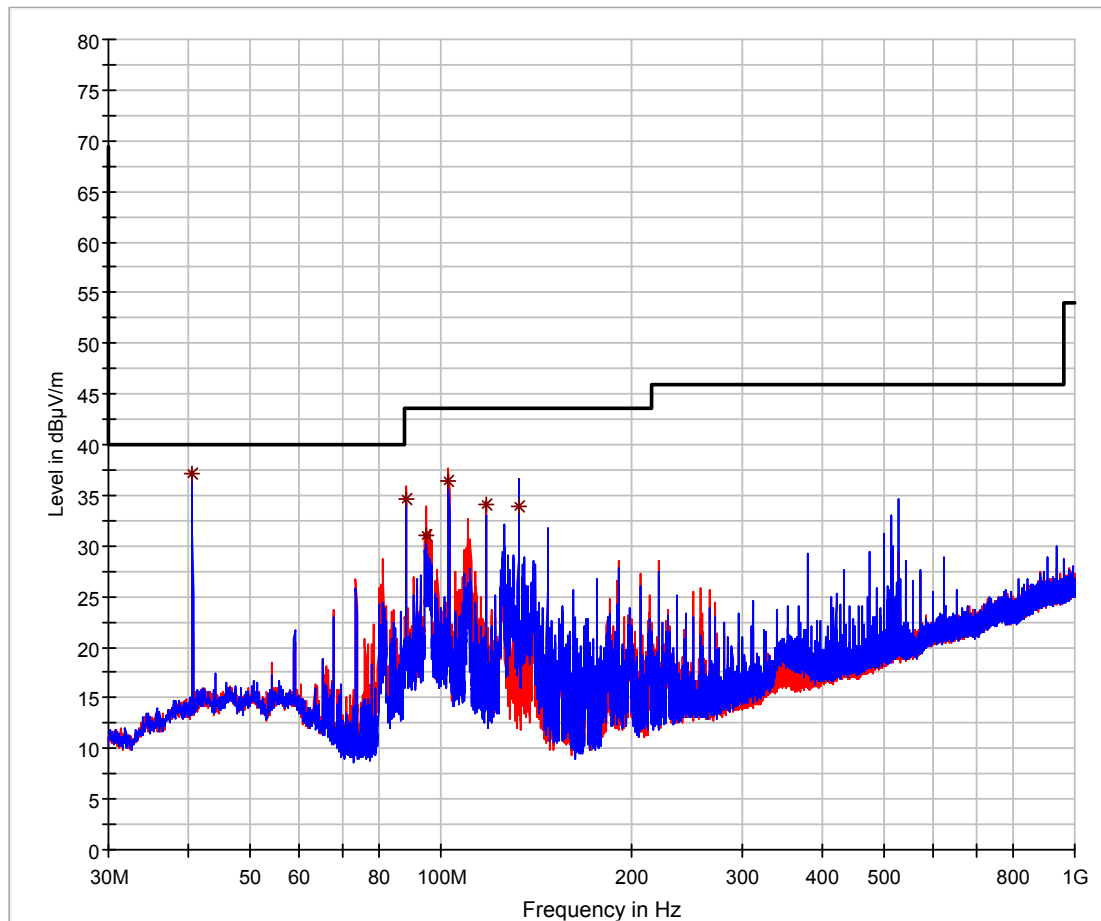


— FCC 15.209
— Preview Result 1V-PK+
— Preview Result 1H-PK+
* Final Result 1-QPK

Radiated Emission Measurement 30 MHz – 1000 MHz

Comment:	Tested with ANT30
Date of test:	2013-08-06
Test site:	Semi-anechoic room, cabin no. 8 (Test distance : 3m)

Test Result:	Test passed
--------------	-------------

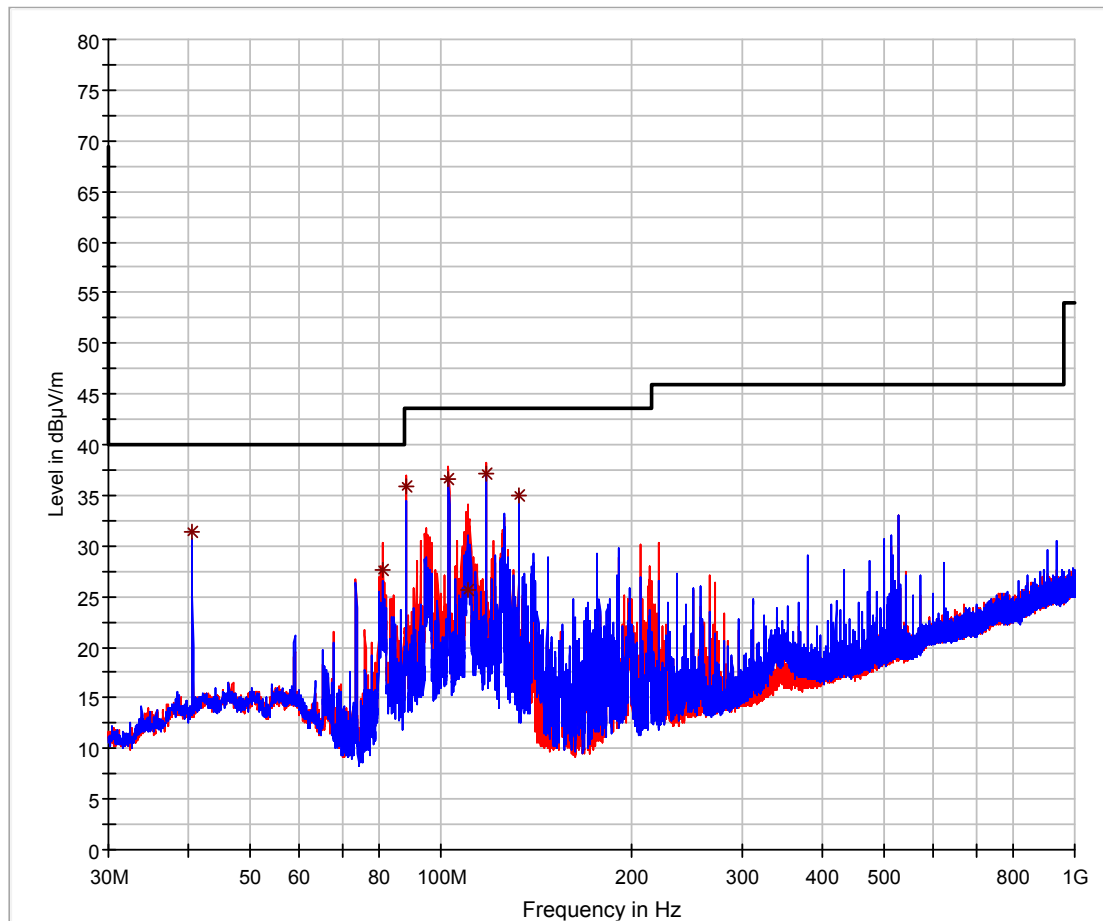

— FCC 15.209 — Preview Result 1H-PK+
— Preview Result 1V-PK+ * Final Result 1-QPK