



SENTON

Choose certainty.
Add value.

Juli 2, 2009

Prüfbericht / Test Report

Nr. / No. 51905-081204-5 (Edition 2)

Applicant: Siemens AG, Fürth
Type of equipment: Inductive TAG Reader
Type designation: RF380R ISO
Order No.: 2072014657
Test standards: FCC Code of Federal Regulations,
CFR 47, Part 15,
Sections 15.205, 15.207, 15.215 and 15.225

Industry Canada Radio Standards Specifications
RSS-Gen Issue 2, Section 7.2.2 and
RSS-210 Issue 7, Sections 2.2, 2.6, A2.6 (Category I Equipment)

Note:

The test data of this report is related only to the individual item which has been tested. This report shall not be reproduced except in full extent without the written approval of the testing laboratory.

Table of Contents

1	Description of the Equipment Under Test (EUT).....	3
2	Administrative Data	4
3	Identification of the Test Laboratory.....	5
4	Summary.....	6
5	Operation Mode and Configuration of EUT	7
6	Measurement Procedures	8
6.1	Bandwidth Measurements	8
6.2	Conducted AC Powerline Emission	9
6.3	Radiated Emission Measurement 9 kHz to 30 MHz.....	11
6.4	Radiated Emission in Fully or Semi Anechoic Room.....	13
6.5	Radiated Emission at Open Field Test Site	15
6.6	Carrier Frequency Stability.....	17
7	Photographs Taken During Testing.....	19
8	Test Results	25
8.1	Occupied Bandwidth	27
8.2	Bandwidth of the Emission.....	37
8.3	Designation of Emissions.....	42
8.4	Conducted Powerline Emission Measurement 150 kHz to 30 MHz.....	43
8.5	Spectrum Mask.....	45
8.6	Radiated Emission Measurement 9 kHz to 30 MHz.....	49
8.7	Radiated Emission Measurement 30 MHz to 1 GHz.....	51
8.8	Carrier Frequency Stability.....	54
8.9	Exposure of Humans to RF Fields	63
9	Referenced Regulations.....	66
10	Revision History	68
11	Charts taken during testing	69

1 Description of the Equipment Under Test (EUT)

General data of EUT

Type designation ¹ :	RF380R ISO
Parts ² :	1
Serial number(s):	#1
Manufacturer:	Siemens AG, Fürth
Type of equipment:	Inductive TAG Reader
Version:	series version
FCC ID:	
Additional parts/accessories:	

Technical data of EUT

Application frequency range:	13.553 MHz - 13.567 MHz	
Frequency range:		
Operating frequency:	13.560 MHz	
Type of modulation:	Amplitude modulation	
Pulse train:	---	
Pulse width:	---	
Number of RF-channels:	1	
Channel spacing:	---	
Designation of emissions ³ :	2k8A1D	
Type of antenna:		
Size/length of antenna:		
Connection of antenna:	<input type="checkbox"/> detachable	<input checked="" type="checkbox"/> not detachable
Type of power supply:	DC supply	
Specifications for power supply:	nominal voltage:	24.0 V
	minimum voltage:	21.6 V
	maximum voltage:	26.4 V

¹ Type designation of the system if EUT consists of more than one part.

² Type designations of the parts of the system, if applicable.

³ Also known as "Class of Emission".

2 Administrative Data

Application details

Applicant (full address):	Siemens AG, Fürth Siemensstraße 2 90766 Fürth Germany
Contact person:	Mr. Norbert Wluka
Order number:	2072014657
Receipt of EUT:	December 2008
Date(s) of test:	January 2009
Note(s):	

Report details

Report number:	51905-081204-5
Edition:	2
Issue date:	July 2, 2009



3 Identification of the Test Laboratory

Details of the Test Laboratory

Company name:	TÜV SÜD SENTON GmbH
Address:	Aeussere Fruehlingstrasse 45 D-94315 Straubing Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-171/94-02
FCC test site registration number	90926
Industry Canada test site registration:	3050A-1
Contact person:	Mr. Johann Roidt
	Phone: +49 9421 5522-0 Fax: +49 9421 5522-99

4 Summary

Summary of test results

The tested sample complies with the requirements set forth in the
Code of Federal Regulations CFR 47, Part 15, Sections 15.205, 15.207, 15.215 and 15.225
of the Federal Communication Commission (FCC) and the
**Radio Standards Specifications
RSS-Gen Issue 2, Section 7.2.2 and
RSS-210 Issue 7, Sections 2.2, 2.6, A2.6 (Category I Equipment)**
of Industry Canada (IC).

Personnel involved in this report

Laboratory Manager:



Mr. Johann Roidt

Responsible for testing:



Mr. Thomas Eberl

Responsible for test report:

Mr. Thomas Eberl

5 Operation Mode and Configuration of EUT

Operation Mode(s)

Transmit mode

Configuration(s) of EUT

EUT was connected to appropriate support devices.
 The support devices were placed outside of the test environment, because these devices are intended for industrial use and achieve FCC class A limits only.

List of ports and cables

Port	Description	Classification ⁴	Cable type	Cable length
1	Interface cable	dc power, signal/control port	Shielded	3m

List of devices connected to EUT

Item	Description	Type Designation	Serial no. or ID	Manufacturer
1	No devices within the test environment connected	---	---	---

List of support devices


Item	Description	Type Designation	Serial no. or ID	Manufacturer
1	TAG	RF 360T	---	Siemens
2	TAG	ISO	---	Siemens
3	Power Supply	PS307	---	Siemens
4	CPU	CPU313C-2DP	---	Siemens
5	IO	DI16/DO16 xDC24V	---	Siemens
6	IO	SM374 IN/OUT 16	---	Siemens
7	Controller	SIMATIC ET 200M	---	Siemens
8	IO	MOBY ASM 452	---	Siemens

⁴ Ports shall be classified as ac power, dc power or signal/control port

6 Measurement Procedures

6.1 Bandwidth Measurements

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 2, section 2.202(a) CFR 47 Part 15, section 15.215(c) IC RSS-Gen Issue 2, sections 4.6.1 and 4.6.2 IC RSS-210 Issue 7, section A1.1.3 ANSI C63.4, annex H.6
Guide:	ANSI C63.4 / IC RSS-Gen Issue 2, sections 4.6.1 and 4.6.2
Measurement setup:	<input type="checkbox"/> Conducted: See below <input checked="" type="checkbox"/> Radiated: Radiated Emission Measurement 9 kHz to 30 MHz (6.3)
<p>If antenna is detachable bandwidth measurements shall be performed at the antenna connector (conducted measurement) when the transmitter is adjusted in accordance with the tune-up procedure, if applicable. The RF output terminals are connected to a spectrum analyzer. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). The electrical characteristics of the radio frequency load attached to the output terminals shall be stated, if applicable.</p> <p>If radiated measurements are performed the same test setups and instruments are used as with radiated emission measurements for the appropriate frequency range.</p> <p>The analyzer settings are specified by the test description of the appropriate test record(s).</p>	

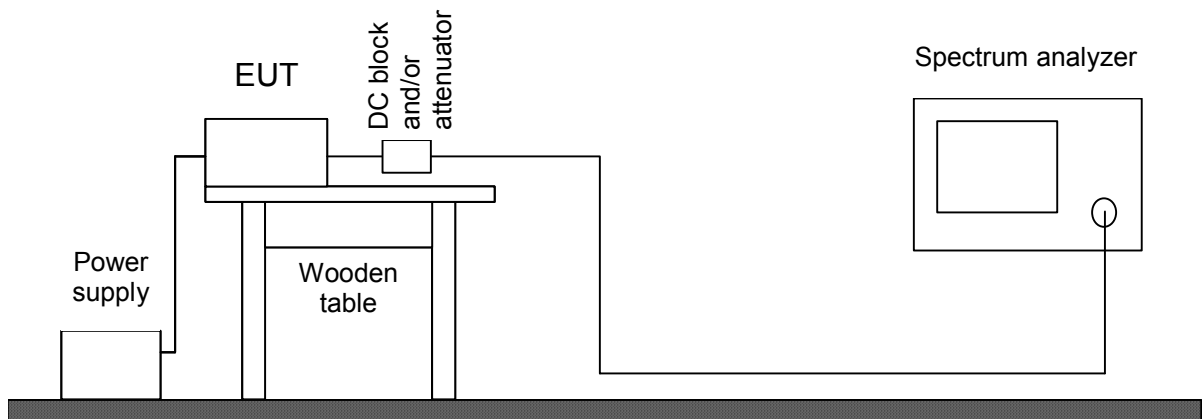

6.2 Conducted AC Powerline Emission

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, section 15.207
 IC RSS-Gen Issue 2, section 7.2.2

Guide: ANSI C63.4 / CISPR 22


Conducted emission tests in the frequency range 150 kHz to 30 MHz are performed using Line Impedance Stabilization Networks (LISNs). To simplify testing with quasi-peak and average detector the following procedure is used:

First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with detector set to peak using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with detector set to quasi-peak.

If average limit is kept with quasi-peak levels no additional scan with average detector is necessary. In cases of emission levels between quasi-peak and average limit an additional scan with detector set to average is performed.

According to ANSI C63.4, section 13.1.3.1, testing of intentional radiators with detachable antenna shall be performed using a suitable dummy load connected to the antenna output terminals. Otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended.

Testing with dummy load may be necessary to distinguish (unintentional) conducted emissions on the supply lines from (intentional) emissions radiated by the antenna and coupling directly to supply lines and/or LISN. Usage of dummy load has to be stated in the appropriate test record(s) and notes should be added to clarify the test setup.

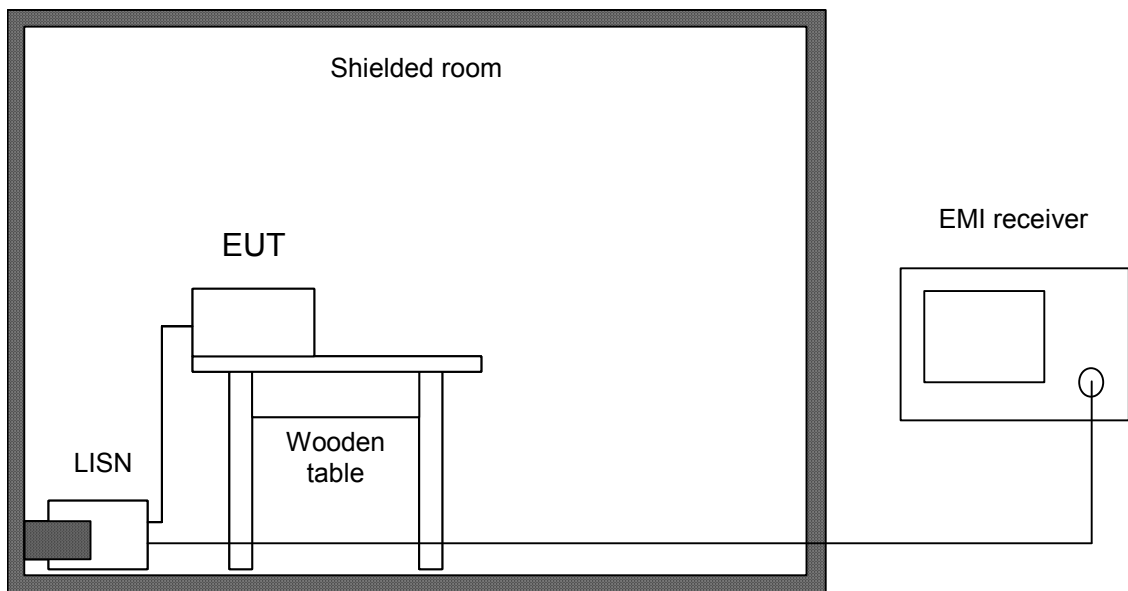




Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	EMI receiver	ESHS 10	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/>	LISN	ESH3-Z5	862770/021	Rohde & Schwarz
<input type="checkbox"/>	LISN	ESH3-Z5	830952/025	Rohde & Schwarz
<input type="checkbox"/>	Artificial mains network	ESH 2-Z5	842966/004	Rohde & Schwarz
<input type="checkbox"/>	Shielded room	No. 1	1451	Albatross Projects
<input checked="" type="checkbox"/>	Shielded room	No. 4	3FD-100 544	Euroshield

6.3 Radiated Emission Measurement 9 kHz to 30 MHz

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205, 15.215(b) and 15.225(a)-(d) IC RSS-210 Issue 7, sections 2.2, 2.6 and A2.6
Guide:	ANSI C63.4
<p>Radiated emission in the frequency range 9 kHz to 30 MHz is measured using an active loop antenna. First the whole spectrum of emission caused by the equipment is recorded at a distance of 3 meters in a fully or semi anechoic room with the detector of the spectrum analyzer or EMI receiver set to peak. This configuration is also used for recording the spectrum of intentional radiators.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>If worst case emission of the EUT cannot be recorded with EUT in standard position and loop antenna in vertical polarization the EUT (or the radiating part of the EUT) is rotated by 90 degrees instead of changing the loop antenna to horizontal polarization. This procedure is selected to minimize the influence of the environment (e.g. effects caused by the floor especially with longer distances).</p> <p>Final measurement is performed at a test distance D of 30 meters using an open field test site. In case the regulation requires testing at other distances, the result is extrapolated by either making measurements at an additional distance D of 10 meters to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). In cases of very low emissions measurements are performed at shorter distances and results are extrapolated to the required distance. The provisions of CFR 47 Part 15 sections 15.31(d) and (f)(2) apply. According to CFR 47 Part 15 section 15.209(d) final measurement is performed with detector function set to quasi-peak except for the frequency bands 9 to 90 kHz and 110 to 490 kHz where, for non-pulsed operation, average detector is employed.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p>	

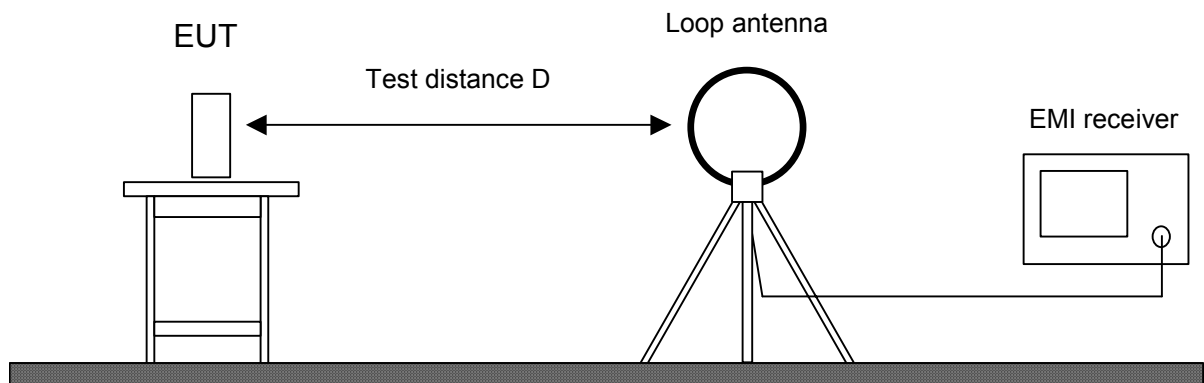




Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Test receiver	ESHS 10	860043/016	Rohde & Schwarz
<input checked="" type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input checked="" type="checkbox"/>	Loop antenna	HFH2-Z2	882964/1	Rohde & Schwarz
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens
<input checked="" type="checkbox"/>	Open field test site	EG 1	1450	Senton

6.4 Radiated Emission in Fully or Semi Anechoic Room

Measurement Procedure:	
Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 7, sections 2.2(b)(c), 2.6 and A2.6
Guide:	ANSI C63.4
<p>Radiated emission in fully or semi anechoic room is measured in the frequency range from 30 MHz to the maximum frequency as specified in CFR 47 Part 15 section 15.33.</p> <p>Measurements are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz (below 1 GHz) or 1 MHz (above 1 GHz).</p> <p>Testing up to 1 GHz is performed with a linear polarized logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna"). For testing above 1 GHz horn antennas are used.</p> <p>All tests below 8.2 GHz are performed at a test distance D of 3 meters. For higher frequencies the test distance may be reduced (e.g. to 1 meter) due to the sensitivity of the measuring instrument(s) and the test results are calculated according to CFR 47 Part 15 section 15.31(f)(1) using an extrapolation factor of 20 dB/decade. If required, preamplifiers are used for the whole frequency range. Special care is taken to avoid overload, using appropriate attenuators and filters, if necessary.</p> <p>If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.</p> <p>Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.</p> <p>During testing the EUT is rotated all around to find the maximum levels of emissions. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.</p> <p>For final testing below 1 GHz an open field test-site is used and the plots recorded in the fully or semi anechoic room are indicated as prescans.</p>	

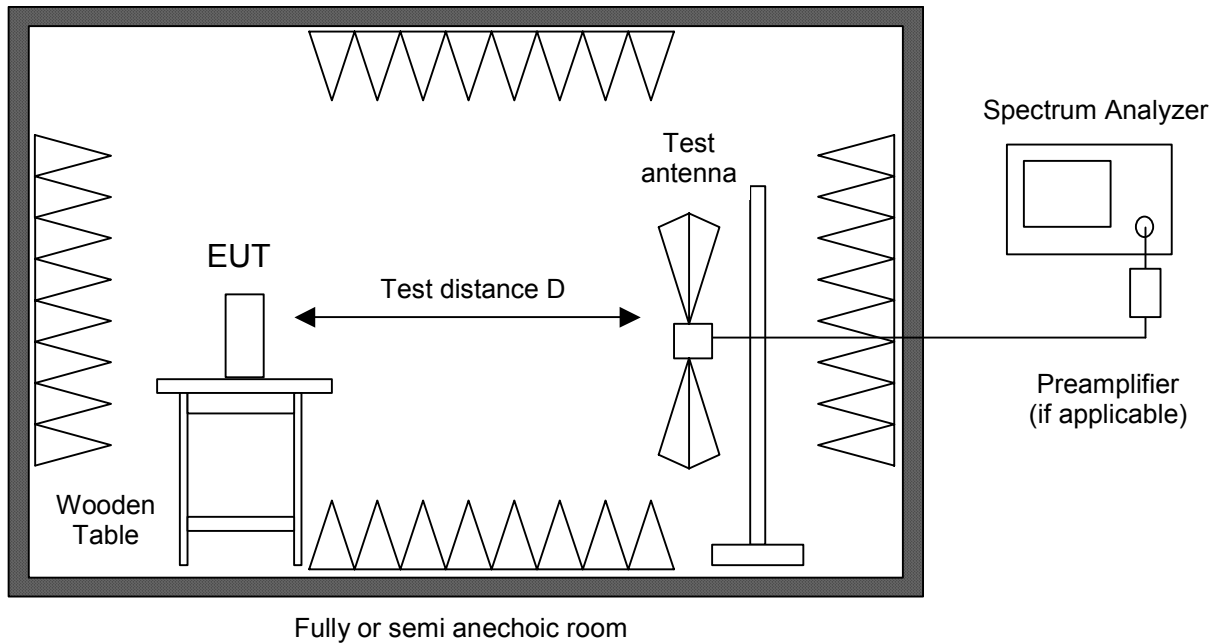

Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESPI7	101018	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input checked="" type="checkbox"/>	Preamplifier	CPA9231A	3393	Schaffner
<input type="checkbox"/>	Preamplifier	R14601		Advantest
<input type="checkbox"/>	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
<input type="checkbox"/>	Preamplifier 0.5-8 GHz	AMF-4D-005080-25-13P	860149	Miteq
<input type="checkbox"/>	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
<input type="checkbox"/>	External Mixer	WM782A	845881/005	Tektronix
<input type="checkbox"/>	Harmonic Mixer	FS-Z30	843389/007	Rohde & Schwarz
	Accessories			
<input checked="" type="checkbox"/>	Trilog broadband antenna	VULB 9163	9163-188	Schwarzbeck
<input type="checkbox"/>	Horn antenna	3115	9508-4553	EMCO
<input type="checkbox"/>	Horn antenna	3160-03	9112-1003	EMCO
<input type="checkbox"/>	Horn antenna	3160-04	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-05	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-06	9112-1001	EMCO
<input type="checkbox"/>	Horn antenna	3160-07	9112-1008	EMCO
<input type="checkbox"/>	Horn antenna	3160-08	9112-1002	EMCO
<input type="checkbox"/>	Horn antenna	3160-09	9403-1025	EMCO
<input type="checkbox"/>	Horn antenna	3160-10	399185	EMCO
<input checked="" type="checkbox"/>	Fully anechoic room	No. 2	1452	Albatross Projects
<input type="checkbox"/>	Semi-anechoic room	No. 3	1453	Siemens

6.5 Radiated Emission at Open Field Test Site

Measurement Procedure:

Rules and specifications: CFR 47 Part 15, sections 15.205(b) and 15.225(d)
 IC RSS-210 Issue 7, sections 2.2(b)(c), 2.6 and A2.6


Guide: ANSI C63.4

Radiated emission at open field test site is measured in the frequency range 30 MHz to 1 GHz using a biconical antenna up to 300 MHz and a logarithmic periodic antenna above. The measurement bandwidth of the test receiver is set to 120 kHz with quasi-peak detector selected.

If the radiated emission limits are expressed in terms of the average value of the emission there also is a peak limit corresponding to 20 dB above the maximum permitted average limit. Additionally, if pulsed operation is employed, the average field strength is determined by averaging over one complete pulse train, including blanking intervals, as specified in CFR 47 Part 15 section 15.35(c). If the pulse train exceeds 0.1 second that 0.1 second interval during which the value of the emission is at its maximum is selected for calculation. The pulse train correction is added to the peak value of the emission to get the average value.

Hand-held or body-worn devices are tested in the position producing the highest emission relative to the limit as verified by prescans in the fully anechoic room. EUT is rotated all around and receiving antenna is raised and lowered within 1 meter to 4 meters to find the maximum levels of emission. Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

For measuring emissions of intentional radiators and receivers a test distance D of 3 meters is selected. Testing of unintentional radiators is performed at a distance of 10 meters. If limits specified for 3 meters shall be used for measurements performed at 10 meters distance the limits are calculated according to CFR 47 Part 15 section 15.31(d) and (f)(1) using an inverse linear-distance extrapolation factor of 20 dB/decade.

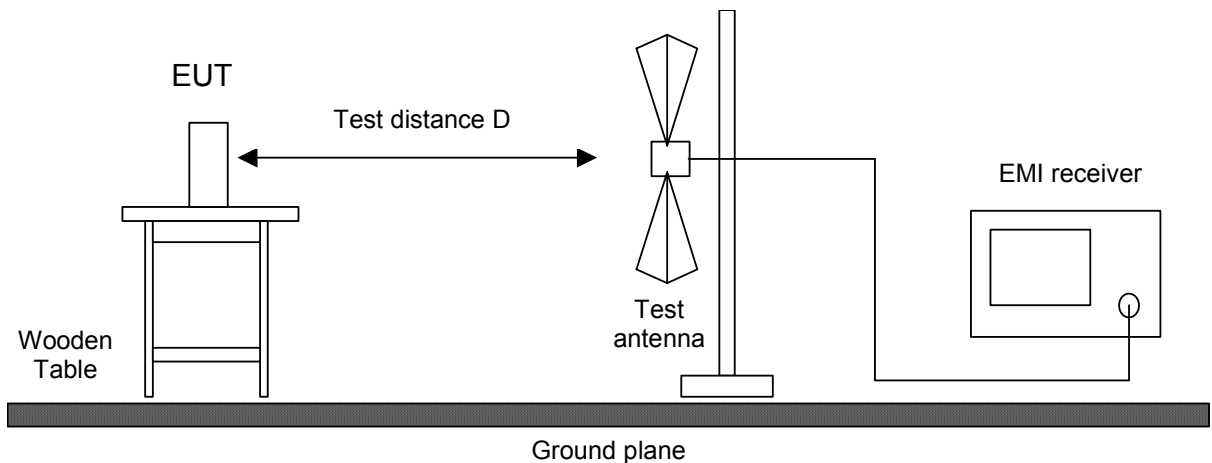



Test instruments used:

Used	Type		Model	Serial No. or ID	Manufacturer
<input checked="" type="checkbox"/>	EMI receiver	EG 1	ESVP	881120/024	Rohde & Schwarz
<input type="checkbox"/>	EMI receiver		ESVP	891846/003	Rohde & Schwarz
<input checked="" type="checkbox"/>	Biconical antenna	EG 1	HK 116	842204/001	Rohde & Schwarz
<input checked="" type="checkbox"/>	Log. per. antenna	EG 1	HL 223	841516/023	Rohde & Schwarz
<input checked="" type="checkbox"/>	Open field test site		EG 1	1450	Senton

6.6 Carrier Frequency Stability

Measurement Procedure:

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 2, section 4.7 and IC RSS-210 Issue 7, section A2.6
Guide:	ANSI C63.4

The frequency tolerance of the carrier signal is measured over a temperature variation of $-20\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of $20\text{ }^{\circ}\text{C}$.


If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as dc block and appropriate attenuators (50 Ohms). In cases where the EUT does not provide an antenna connector a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- the maximum battery voltage as delivered by a new battery or 115% of the battery nominal voltage
- the battery nominal voltage
- 85% of the battery nominal voltage
- the battery operating end point voltage which shall be specified by the equipment manufacturer

The EUT is operating providing an unmodulated carrier. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to the shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point on the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1% of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance allowed is larger than the uncertainty of the measured frequency tolerance.

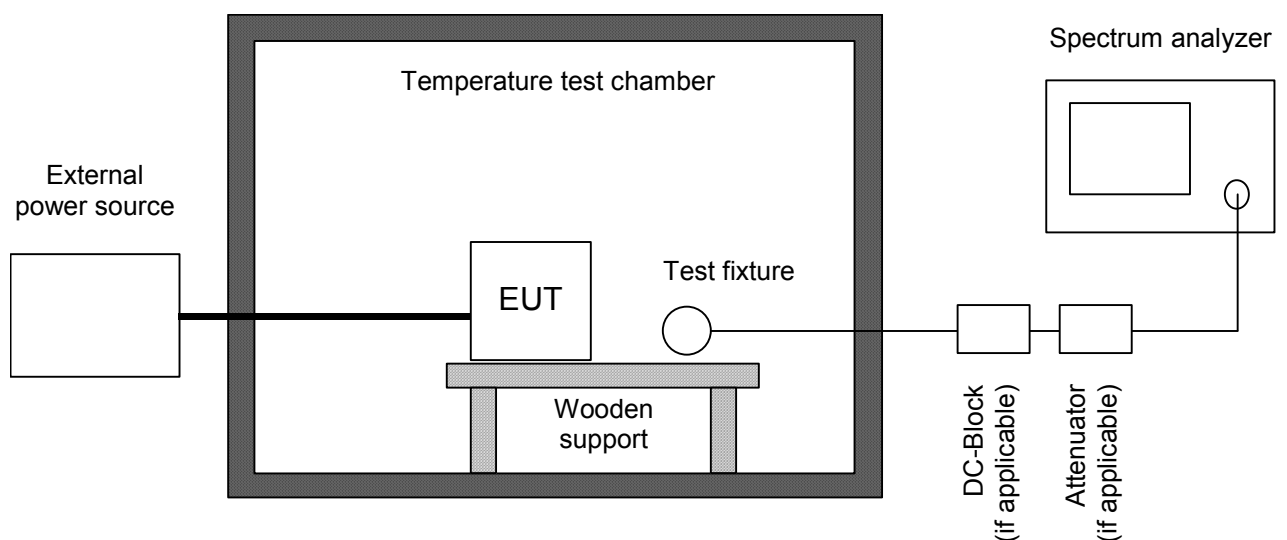




Test instruments used:

Used	Type	Model	Serial No. or ID	Manufacturer
<input type="checkbox"/>	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
<input checked="" type="checkbox"/>	EMI test receiver	ESPI7	836914/0002	Rohde & Schwarz
<input type="checkbox"/>	EMI test receiver	ESMI	839379/013 839587/006	Rohde & Schwarz
<input type="checkbox"/>	DC-block	7006	A2798	Weinschel
<input type="checkbox"/>	Attenuator	4776-10	9412	Narda
<input type="checkbox"/>	Attenuator	4776-20	9503	Narda
<input checked="" type="checkbox"/>	Test probe	TP01	001	Senton
<input checked="" type="checkbox"/>	DC power supply	NGSM 32/10	203	Rohde & Schwarz
<input type="checkbox"/>	Isolating transformer	RT 5A	10387	Grundig
<input type="checkbox"/>	Isolating transformer	RT 5A	10416	Grundig
<input checked="" type="checkbox"/>	Temperature test chamber	HT4010	07065550	Heraeus




7 Photographs Taken During Testing


Test setup for conducted AC powerline emission measurement

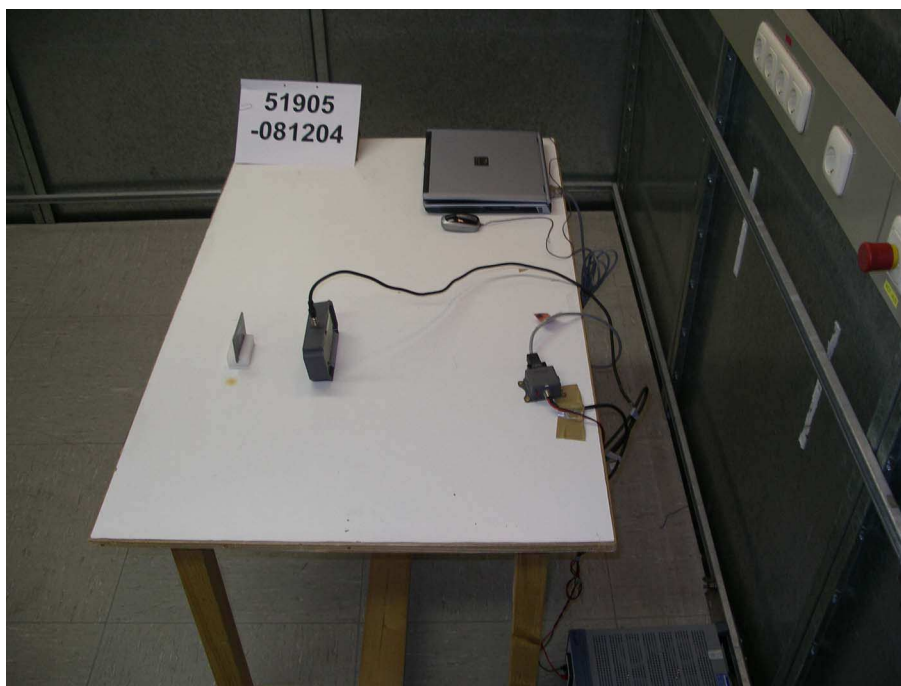

Test setup for conducted AC powerline emission measurement - continued -

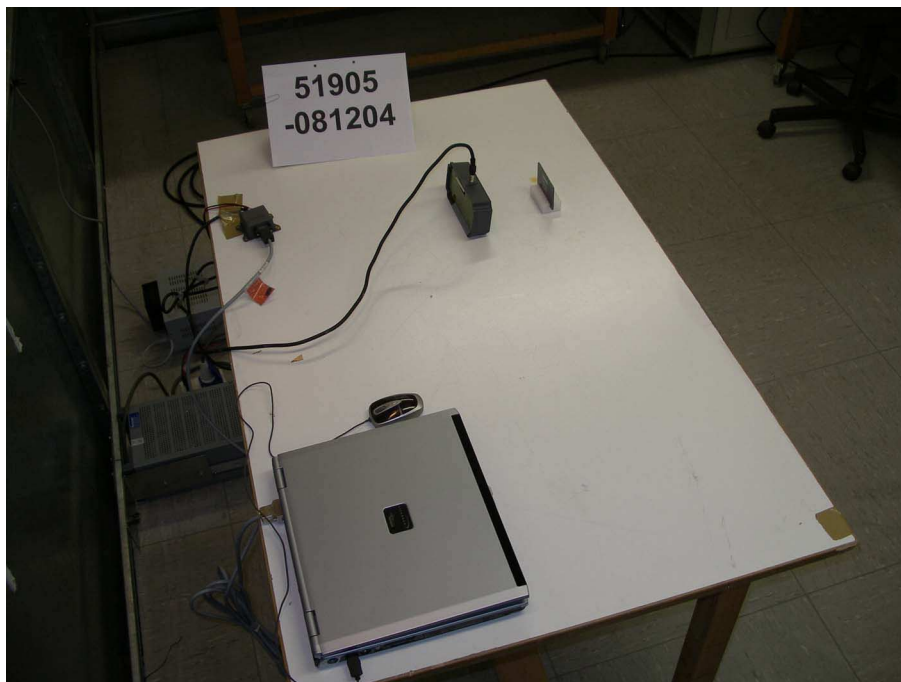

Test setup for radiated emission measurement 9 kHz – 30 MHz

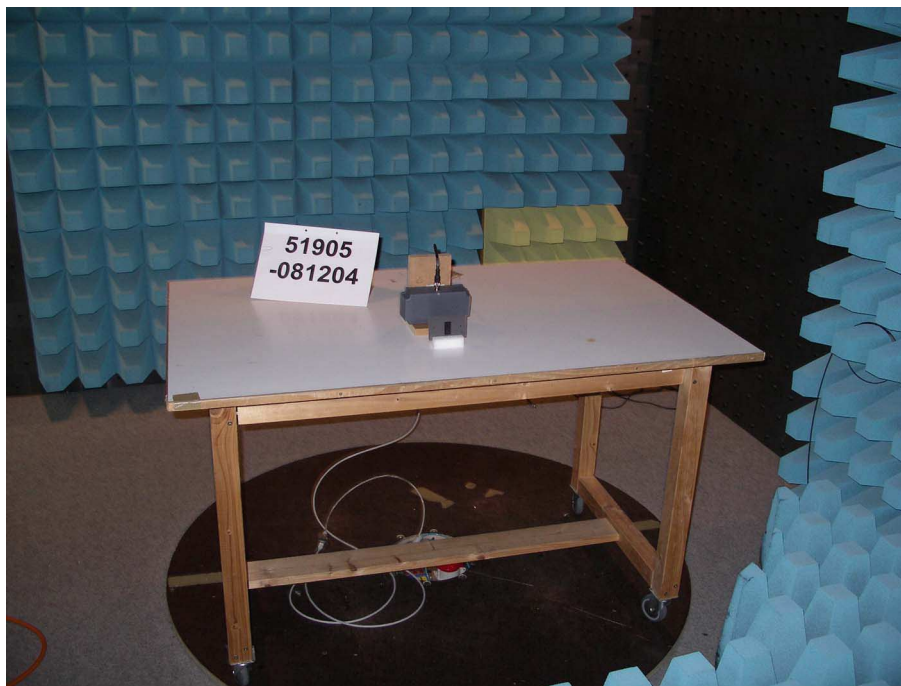

Test setup for radiated emission measurement (open field test site)



**Test setup for radiated emission measurement
(open field test site) - continued -**





8 Test Results

FCC CFR 47 Parts 2 and 15			
Section(s)	Test	Page	Result
2.1046(a)	Conducted output power	---	Not applicable
2.202(a)	Occupied bandwidth	27	Recorded
15.215(c)	Bandwidth of the emission	37	Test passed
2.201, 2.202	Class of emission	42	Calculated
15.35(c)	Pulse train measurement for pulsed operation	---	Not applicable
15.205(a) 15.205(d)(7)	Restricted bands of operation	--- ⁵	Test passed
15.207	Conducted AC powerline emission 150 kHz to 30 MHz	43	Test passed
15.225(a)-(d)	Spectrum Mask	45	Test passed
15.205(b) 15.215(b) 15.225(a)(d)	Radiated emission 9 kHz to 30 MHz	49	Test passed
15.205(b) 15.225(d)	Radiated emission 30 MHz to 1 GHz	51	Test passed
15.225(e)	Carrier frequency stability	54	Test passed

⁵ See "Spectrum Mask" for the 13.36 to 13.41 MHz band. For all other restricted bands see "Radiated Emission".

IC RSS-Gen Issue 2			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
4.8	Transmitter output power (conducted)	---	Not applicable
4.6.1	Occupied Bandwidth	27	Recorded
3.2(h), 8	Designation of emissions	42	Calculated
4.5	Pulsed operation	---	Not applicable
7.2.2	Transmitter AC power lines conducted emissions 150 kHz to 30 MHz	43	Test passed
5.5	Exposure of Humans to RF Fields	63	Exempted from SAR and RF evaluation

IC RSS-210 Issue 7			
<i>Section(s)</i>	<i>Test</i>	<i>Page</i>	<i>Result</i>
2.2(a)	Restricted bands and unwanted emission frequencies	--- ⁶	Test passed
A2.6	Spectrum Mask	45	Test passed
2.2(b)(c), 2.6 A2.6	Unwanted emissions 9 kHz to 30 MHz	49	Test passed
2.2(b)(c), 2.6 A2.6	Unwanted emissions 30 MHz to 1 GHz	51	Test passed
A2.6	Carrier frequency stability	54	Test passed

⁶ See "Spectrum Mask" and "Unwanted emissions".



8.1 Occupied Bandwidth

Rules and specifications:	CFR 47 Part 2, section 2.202(a) ANSI C63.4, annex H.6	
Guide:	ANSI C63.4	
Description:	The occupied bandwidth according to CFR 47 Part 2, section 2.202(a), is measured as the 99% emission bandwidth, i.e. below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.	
	The occupied bandwidth according to ANSI C63.4, annex H.6; is measured as the frequency range defined by the points that are 26 dB down relative to the maximum level of the modulated carrier.	
	The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	

Comment:	ISO and RF 300 protocol
Date of test:	December 15, 2008
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %): ISO (1W)




*RBW 1 kHz Marker 1 [T1]
 *VBW 3 kHz 86.70 dBµV
 *SWT 10 s 13.559800000 MHz

Ref 95 dBµV

Att 10 dB

1 RM*
 VIEW

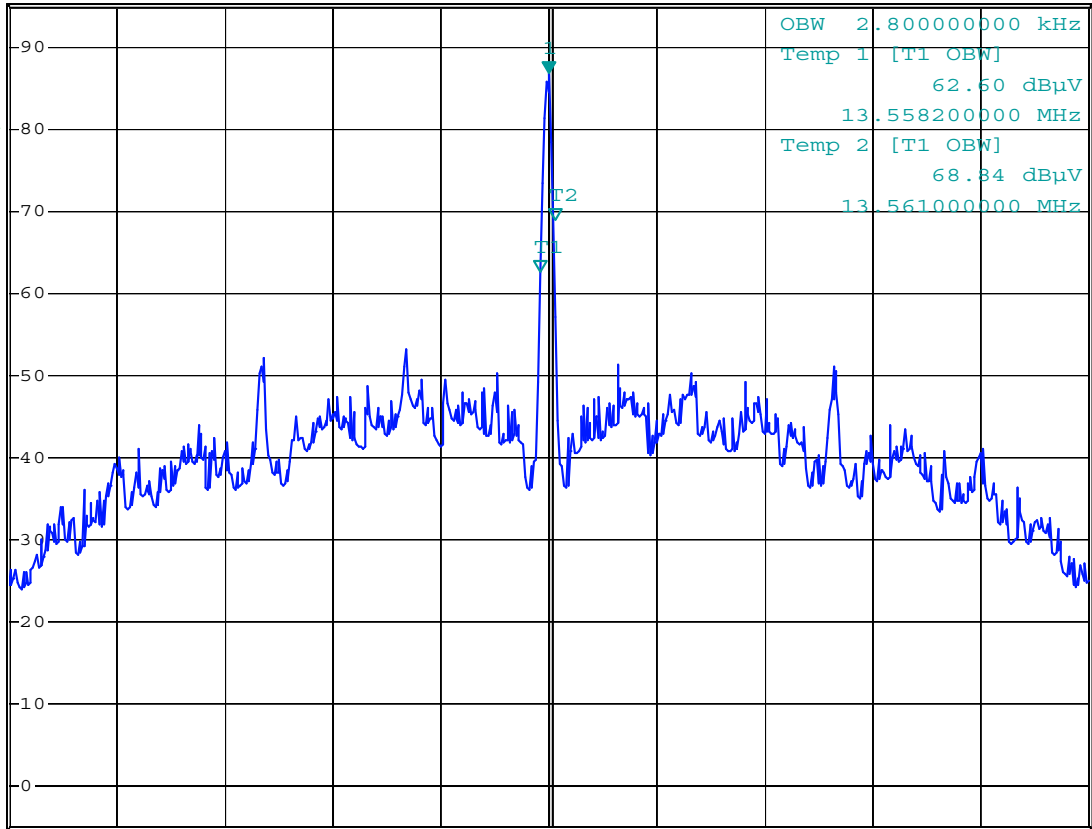

Center 13.5598 MHz

20 kHz/

Span 200 kHz

Date: 15.DEC.2008 12:08:31

Occupied Bandwidth (99 %): **2.8 kHz**

Occupied Bandwidth (99 %): ISO (2W)




*RBW 1 kHz Marker 1 [T1]
 *VBW 3 kHz 88.66 dBµV
 *SWT 10 s 13.559800000 MHz

Ref 95 dBµV

Att 10 dB

1 RM*
 VIEW

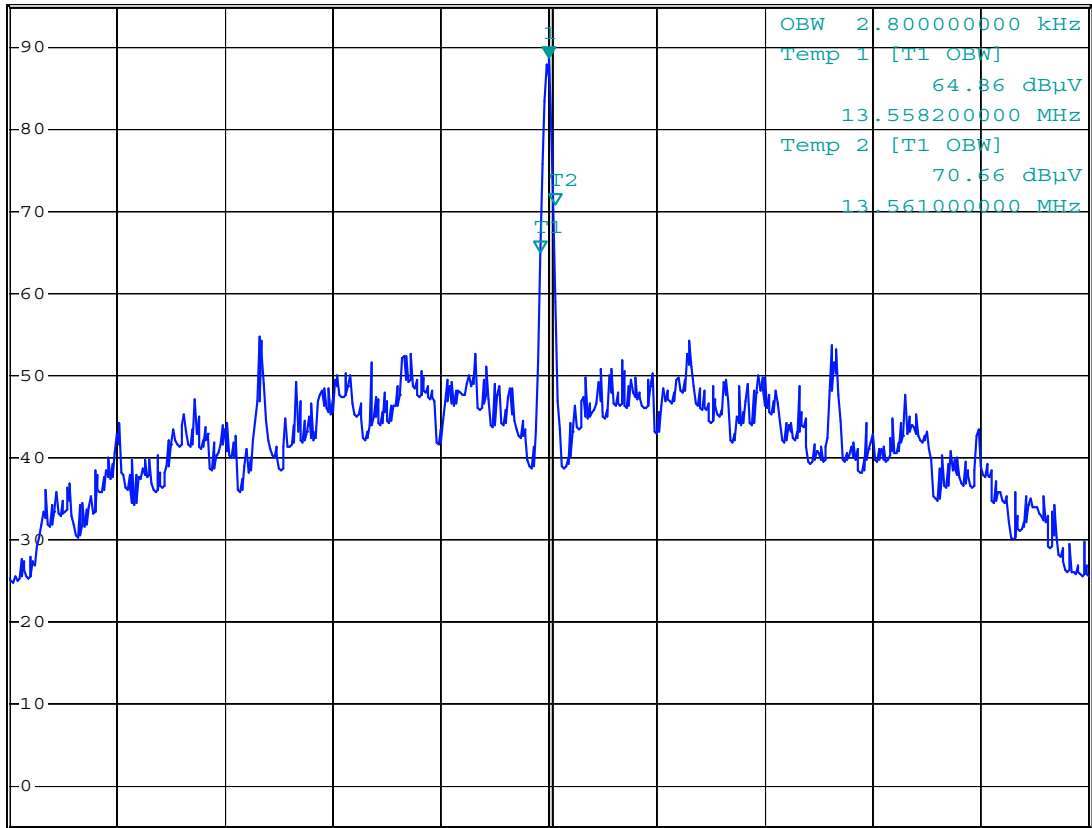


Center 13.5598 MHz

20 kHz/

Span 200 kHz

Date: 15.DEC.2008 13:26:04

Occupied Bandwidth (99 %): RF 300 (1W)

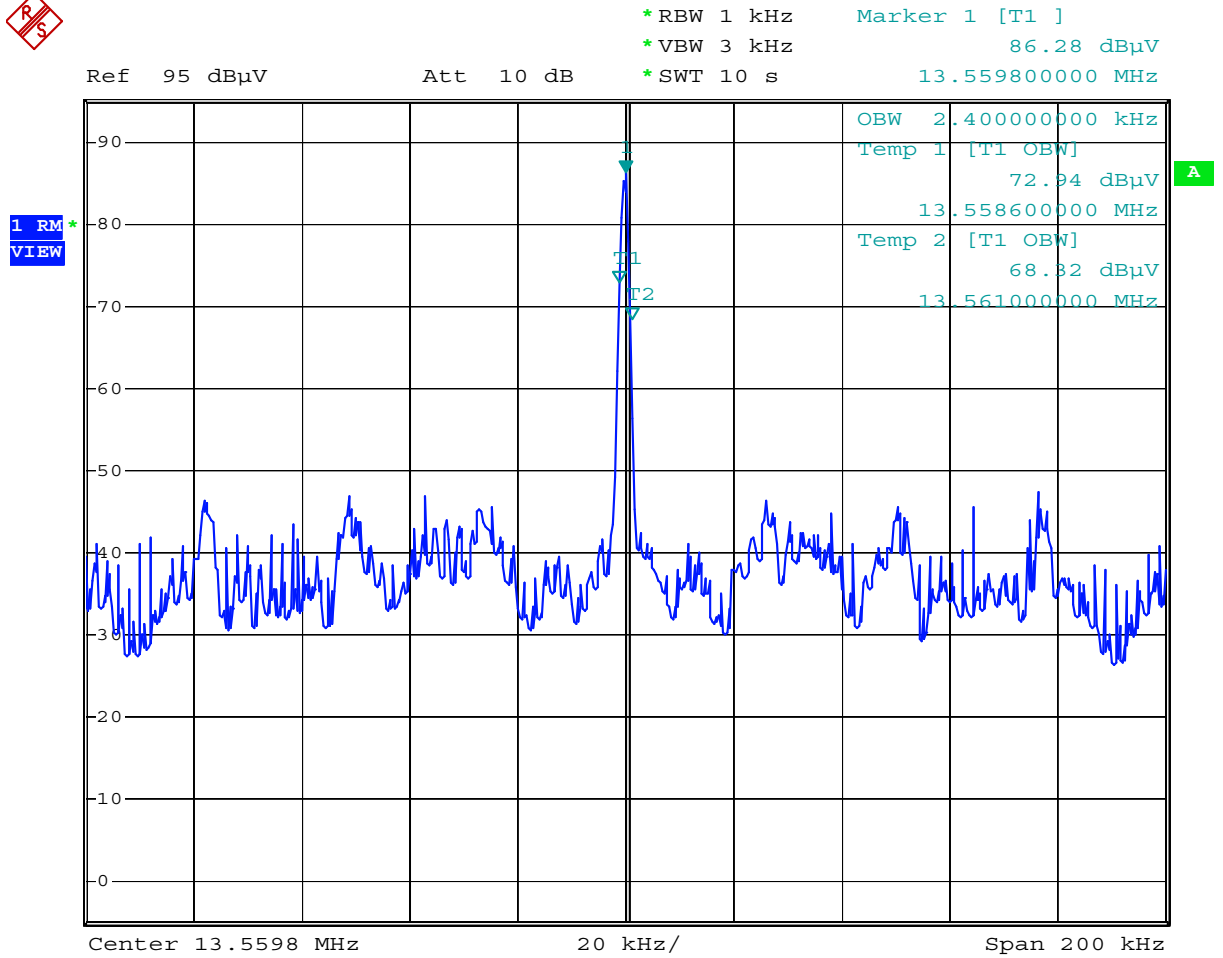

Date: 15.DEC.2008 12:05:40

Occupied Bandwidth (99 %):	2.4 kHz
----------------------------	----------------

Occupied Bandwidth (99 %): RF300 (2W)




*RBW 1 kHz Marker 1 [T1]
 *VBW 3 kHz 88.31 dBµV
 *SWT 10 s 13.559800000 MHz

Ref 95 dBµV

Att 10 dB

1 RM
 VIEW

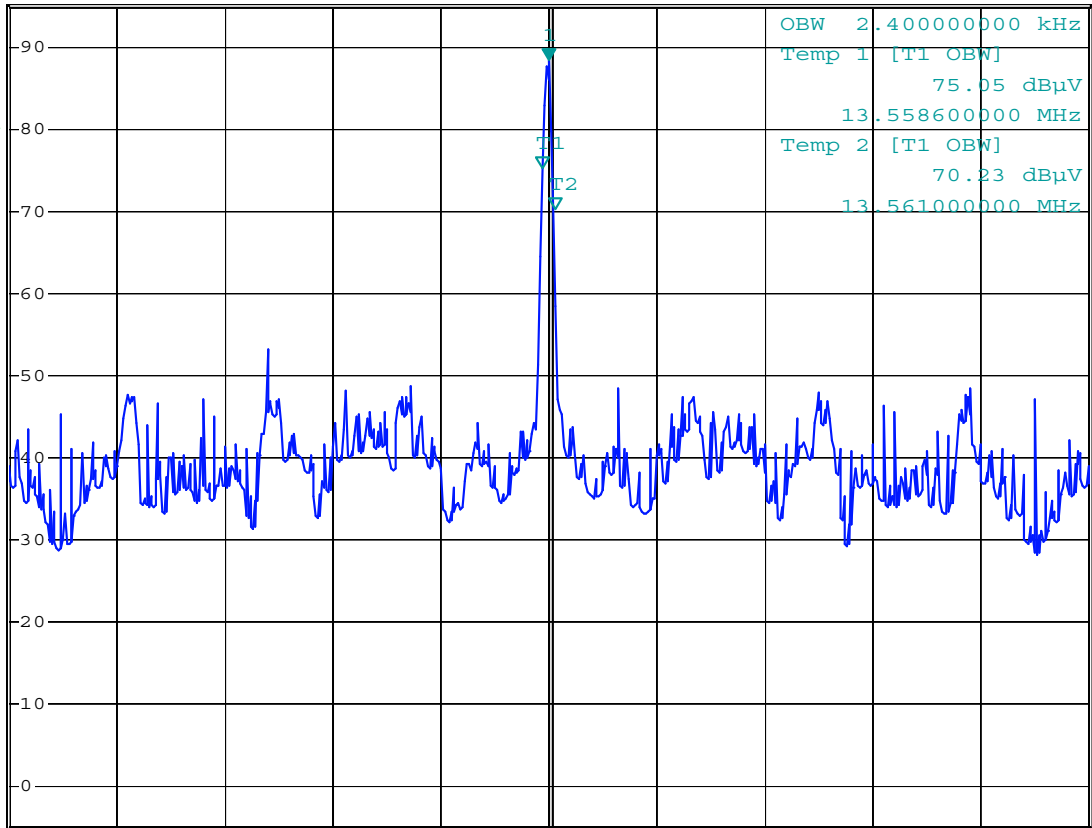

OBW	2.400000000 kHz
Temp 1 [T1 OBW]	75.05 dBµV
	13.558600000 MHz
Temp 2 [T1 OBW]	70.23 dBµV
	13.561000000 MHz

Center 13.5598 MHz

20 kHz/

Span 200 kHz

Date: 15.DEC.2008 13:24:05

Occupied Bandwidth (99 %):	2.4 kHz
----------------------------	----------------




Occupied Bandwidth (continued)

Rules and specifications:	IC RSS-Gen Issue 2, section 4.6.1
Guide:	IC RSS-Gen Issue 2, section 4.6.1
Description:	<p>If not specified in the applicable RSS the occupied bandwidth is measured as the 99% emission bandwidth.</p> <p>The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.</p> <p>The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is also recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>
Measurement procedure:	Bandwidth Measurements (6.1)

Comment:	ISO and RF 300 mode
Date of test:	January 15, 2009
Test site:	Fully anechoic room, cabin no. 2

Occupied Bandwidth (99 %): RF 300 2W

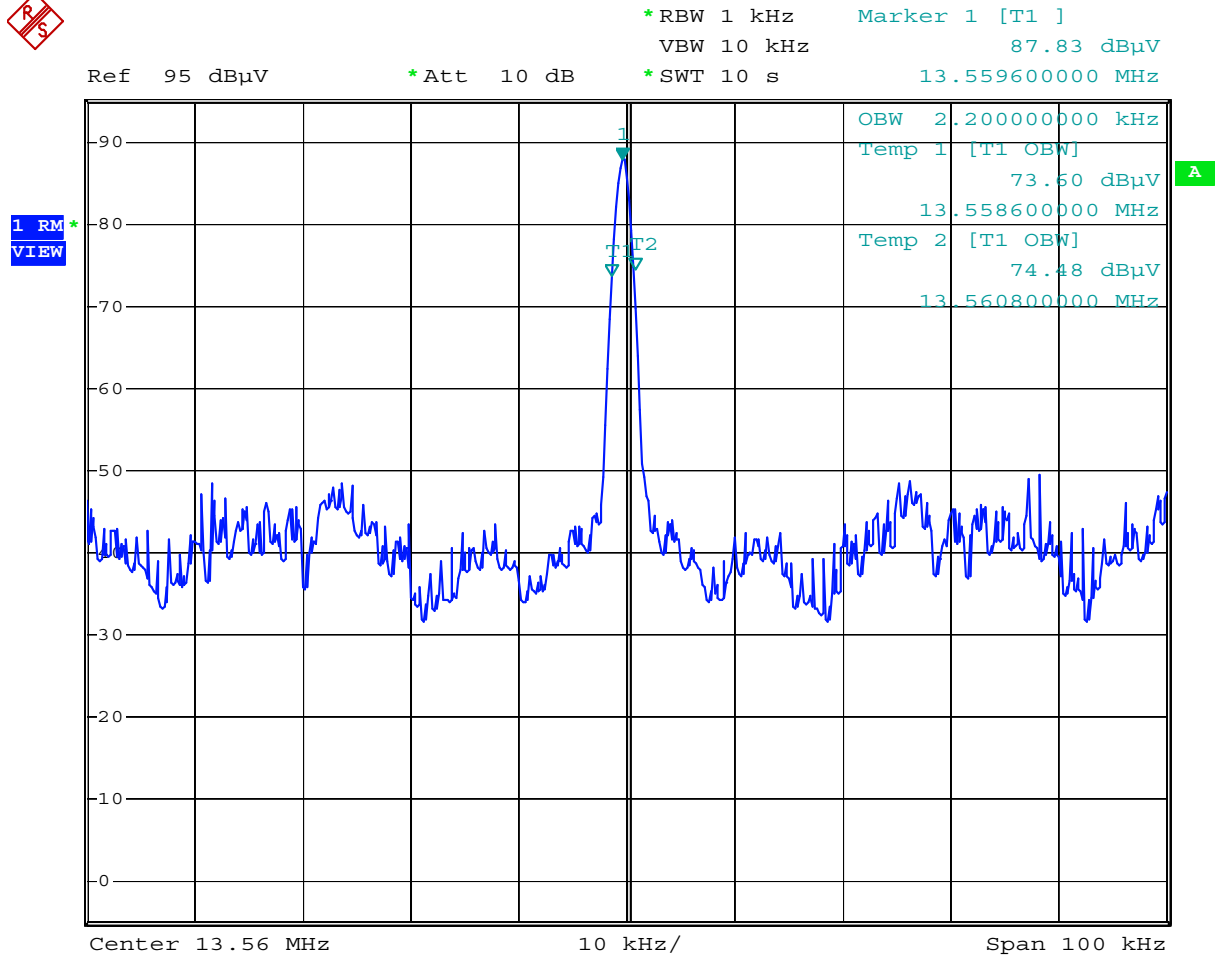

Date: 15.JAN.2009 09:22:41


Occupied Bandwidth (99 %):	2.2 kHz
----------------------------	----------------



8.2 Bandwidth of the Emission

Rules and specifications:	CFR 47 Part 15, section 15.215(c)	
Guide:	ANSI C63.4	
Description:	<p>The 20 dB bandwidth of the emission is measured as the frequency range defined by the points that are 20 dB down relative to the maximum level of the modulated carrier.</p> <p>For intentional radiators operating under the alternative provisions to the general emission limits the requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.</p> <p>The resolution bandwidth of the spectrum analyzer shall be set to a value greater than 5.0% of the allowed bandwidth. If no bandwidth specifications are given, the following guidelines are used:</p>	
	Fundamental frequency	Minimum resolution bandwidth
	9 kHz to 30 MHz	1 kHz
	30 MHz to 1000 MHz	10 kHz
	1000 MHz to 40 GHz	100 kHz
	The video bandwidth shall be at least three times greater than the resolution bandwidth.	
Measurement procedure:	Bandwidth Measurements (6.1)	
Comment:	ISO and RF 300 protocol	
Date of test:	December 15, 2008	
Test site:	Fully anechoic room, cabin no. 2	

Bandwidth of emission: ISO 1W

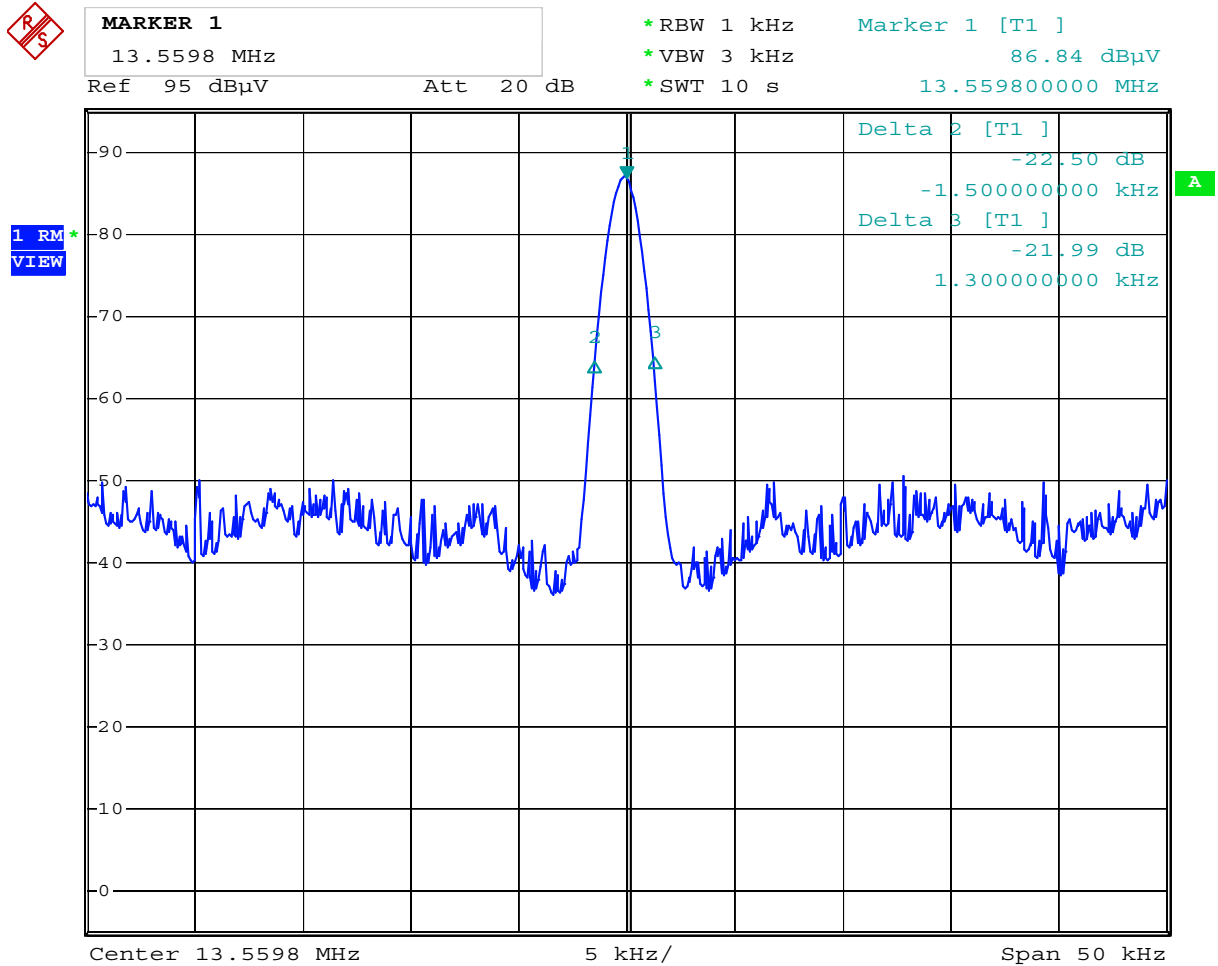


Date: 15.DEC.2008 13:15:45

Permitted frequency band:	13.553 MHz - 13.567 MHz	
20 dB bandwidth:	2.8 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances:	+0.107 kHz -0.078 kHz	
Bandwidth of the emission:	2.985 kHz	within permitted frequency band⁷: <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁷ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Bandwidth of emission: ISO 2W

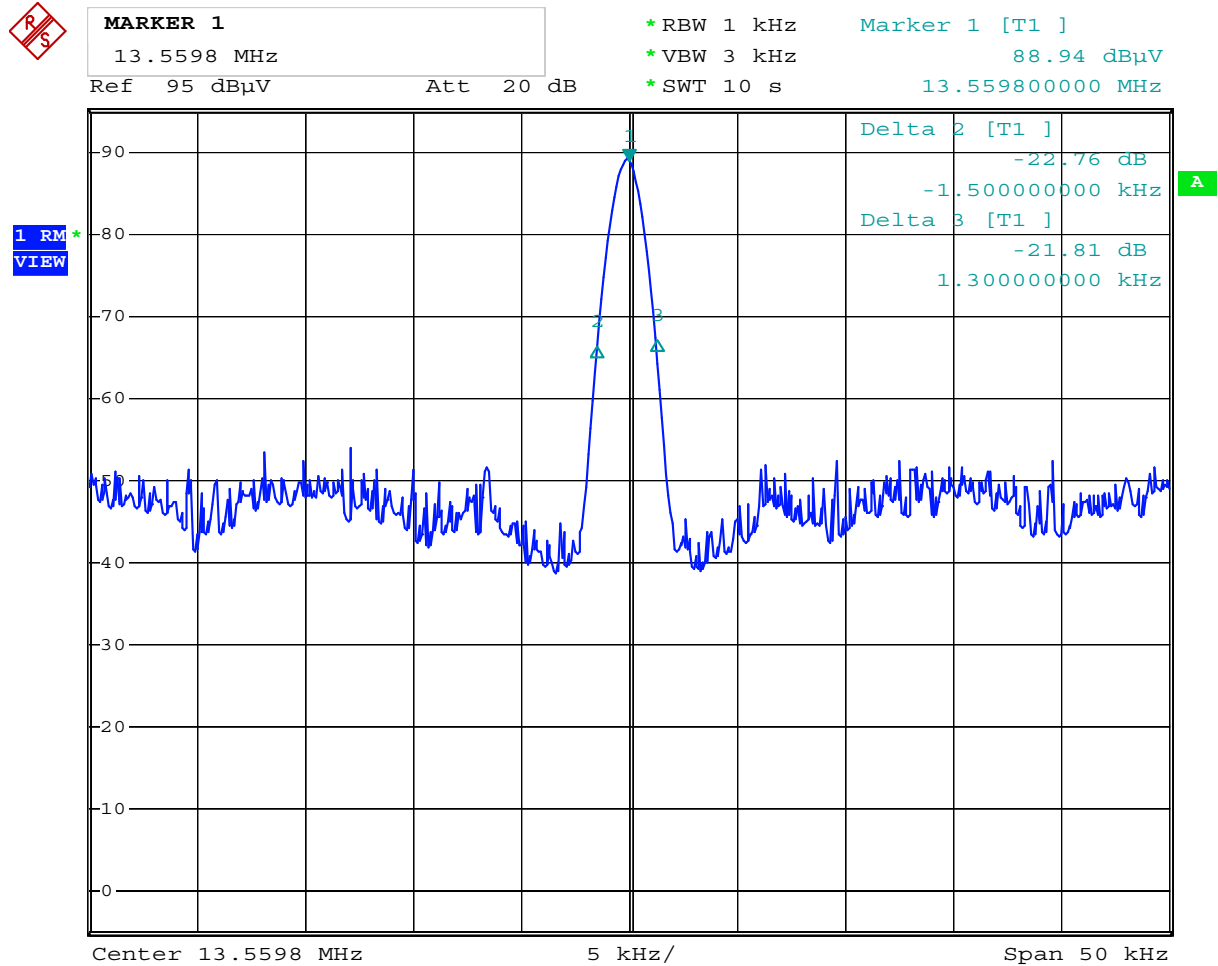


Date: 15.DEC.2008 13:18:54

Permitted frequency band:	13.553 MHz - 13.567 MHz	
20 dB bandwidth:	2.8 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances:	+0.107 kHz - 0.078 kHz	
Bandwidth of the emission:	2.985 kHz	within permitted frequency band⁸: <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	-------------

⁸ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Bandwidth of emission: RF 300 1W

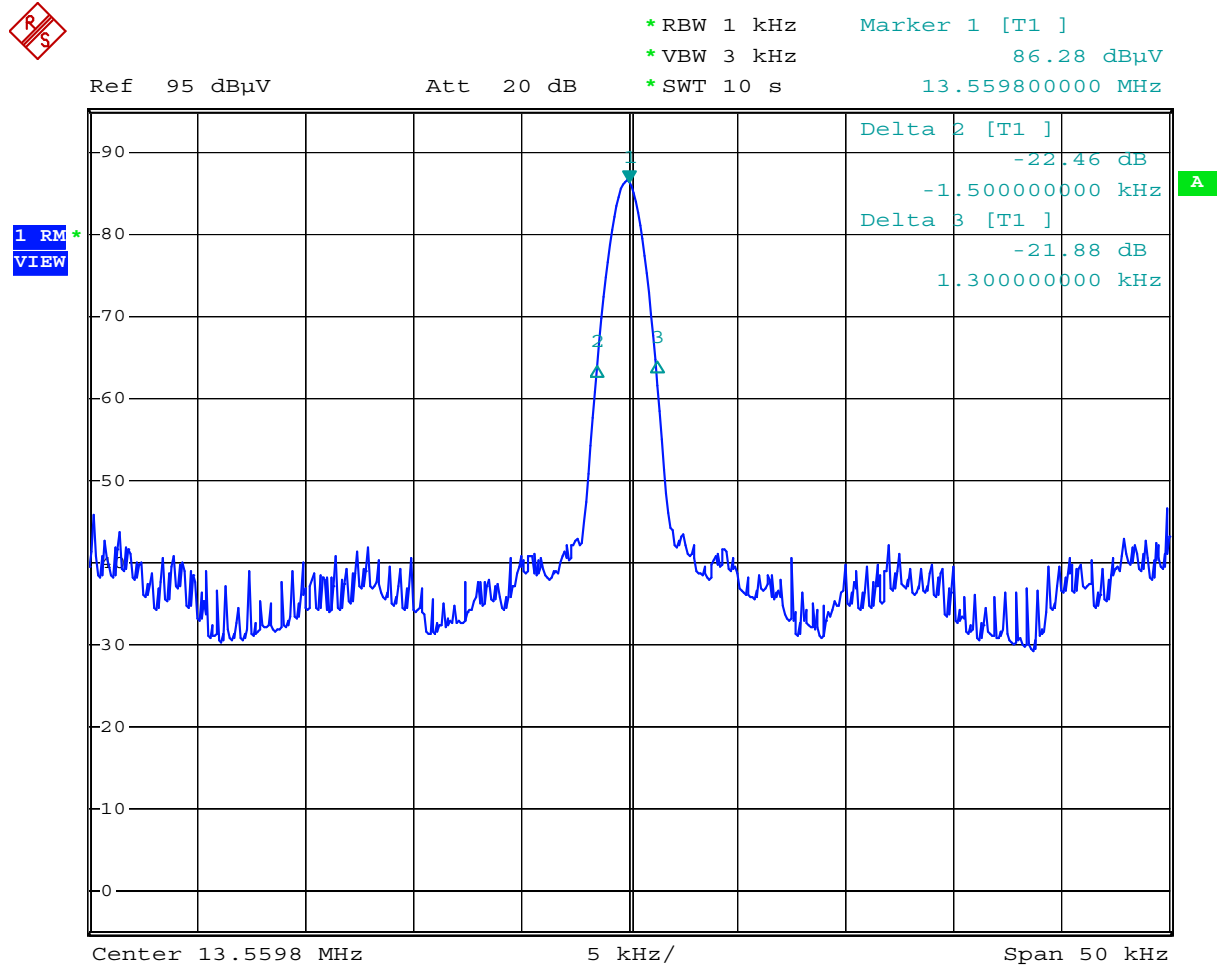


Date: 15.DEC.2008 13:14:03

Permitted frequency band:	13.553 MHz - 13.567 MHz	
20 dB bandwidth:	2.8 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances:	+0.107 kHz - 0.078 kHz	
Bandwidth of the emission:	2.985 kHz	within permitted frequency band⁹: <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	--------------------

⁹ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Bandwidth of emission: RF 300 2W

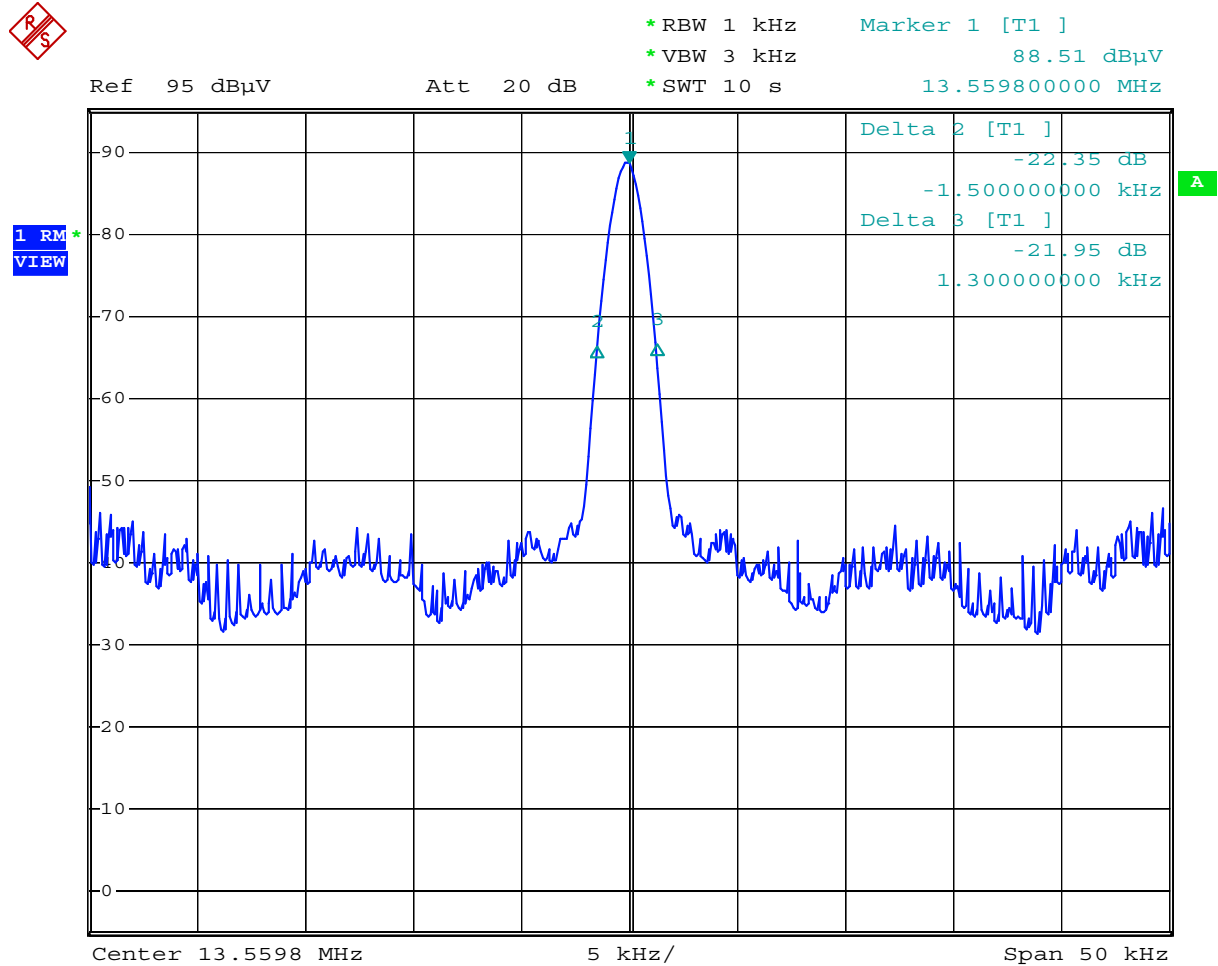

Date: 15.DEC.2008 13:20:48

Permitted frequency band:	13.553 MHz - 13.567 MHz	
20 dB bandwidth:	2.8 kHz	
Carrier frequency stability:	<input checked="" type="checkbox"/> specified	<input type="checkbox"/> not specified
Maximum frequency tolerances:	+0.107 kHz - 0.078 kHz	
Bandwidth of the emission:	2.985 kHz	within permitted frequency band¹⁰: <input checked="" type="checkbox"/> yes <input type="checkbox"/> no

Test Result:	Test passed
--------------	--------------------

¹⁰ If a frequency stability is not specified, it is recommended that the fundamental emission is kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.3 Designation of Emissions

Rules and specifications:	CFR 47 Part 2, sections 2.201 and 2.202 IC RSS-Gen Issue 2, sections 3.2(h) and 8
Guide:	ANSI C63.4 / TRC-43

Type of modulation:	Amplitude Modulation
---------------------	----------------------

B_n = Necessary Bandwidth	$B_n = 2BK$
B = Modulation rate	B = 1.4 kHz
K = Overall numerical factor	K = 1
Calculation:	$B_n = 2 \cdot (1.4 \text{ kHz}) \cdot 1 = 2.8 \text{ kHz}$

Designation of Emissions:	2k8A1D
---------------------------	---------------

8.4 Conducted Powerline Emission Measurement 150 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 2, section 7.2.2		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dBµV)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		

Comment:	RF power set to 1 W
Date of test:	October 16, 2008
Test site:	Shielded room, cabin no. 1

Test Result:	Test passed
--------------	-------------

Tested on:	DC supply - minus
------------	-------------------

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
13.560	Quasi-Peak	45.1	0.0	45.1	60.0	14.9

Tested on:	DC supply - plus 24 V
------------	-----------------------

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
13.560	Quasi-Peak	45.2	0.0	45.2	60.0	14.8

Sample calculation of final values:

$$\text{Final Value (dBµV)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB)}$$



Rules and specifications:	CFR 47 Part 15, section 15.207 IC RSS-Gen Issue 2, section 7.2.2		
Guide:	ANSI C63.4 / CISPR 22		
Limit:	Frequency of Emission (MHz)	Conducted Limit (dBµV)	
		Quasi-peak	Average
	0.15 - 0.5	66 to 56	56 to 46
	0.5 - 5	56	46
	5 - 30	60	50
Measurement procedure:	Conducted AC Powerline Emission (6.2)		

Comment:	RF power set to 2 W
Date of test:	October 16, 2008
Test site:	Shielded room, cabin no. 1

Test Result:	Test passed
--------------	-------------

Tested on:	DC supply - minus
------------	-------------------

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
13.560	Quasi-Peak	48.6	0.0	48.6	60.0	11.4
27.120	Quasi-Peak	43.6	0.0	43.6	60.0	16.4

Tested on:	DC supply plus 24 V
------------	---------------------

Frequency (MHz)	Detector	Reading Value (dBµV)	Correction Factor (dB)	Final Value (dBµV)	Limit (dBµV)	Margin (dB)
13.560	Quasi-Peak	48.6	0.0	48.6	60.0	11.4
27.120	Quasi-Peak	43.6	0.0	43.6	60.0	16.4

Sample calculation of final values:

$$\text{Final Value (dBµV)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB)}$$


8.5 Spectrum Mask

Rules and specifications:	CFR 47 Part 15, section 15.225(a)-(d) IC RSS-210 Issue 7, section A2.6			
Guide:	ANSI C63.4			
Description:	Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			


Comment:	ISO mode
Date of test:	October 29, 2008
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters
Extrapolation Factor:	-40dB/decade

Test Result:	Test passed
--------------	-------------

ISO 1W

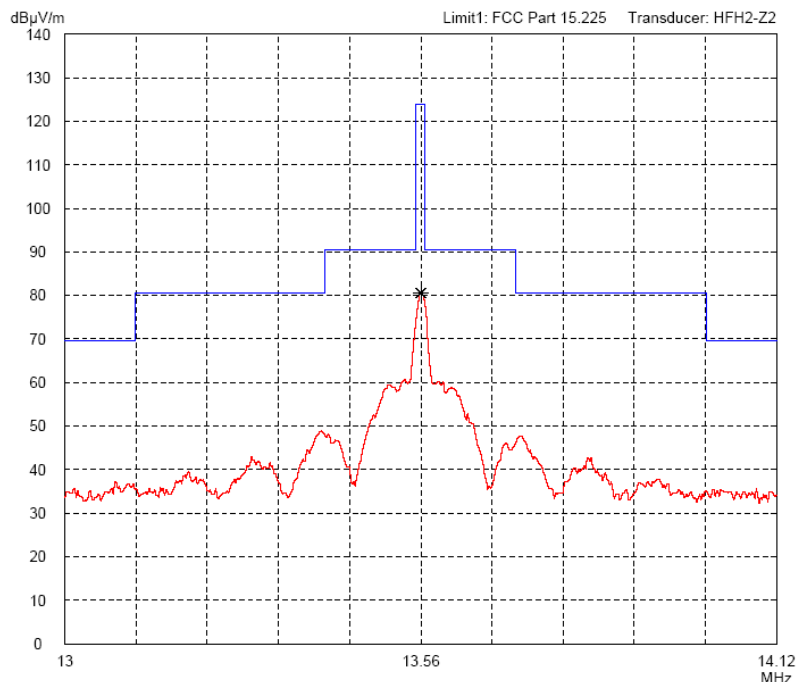

ISO 2W

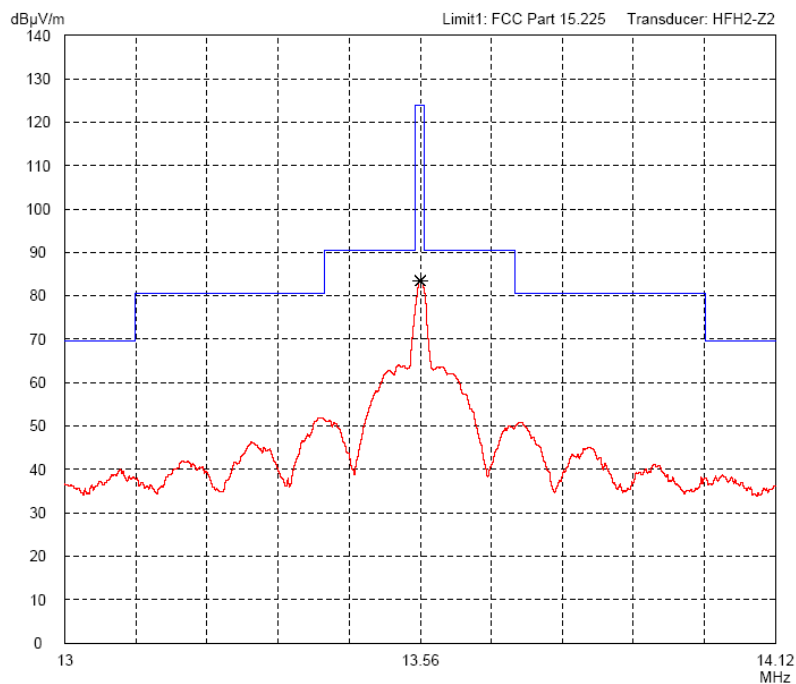




Rules and specifications:	CFR 47 Part 15, section 15.225(a)-(d) IC RSS-210 Issue 7, section A2.6			
Guide:	ANSI C63.4			
Description:	Compliance with the spectrum mask is tested using a spectrum analyzer with resolution bandwidth set to a 1 kHz for the band 13.553 to 13.567 MHz and to 10 kHz outside this band. The video bandwidth shall be at least three times greater than the resolution bandwidth.			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			


Comment:	RF 300 mode
Date of test:	October 29, 2008
Test site:	Fully anechoic room, cabin no. 2
Test distance:	3 meters
Extrapolation Factor:	-40dB/decade

Test Result:	Test passed
--------------	-------------

RF 300 1W

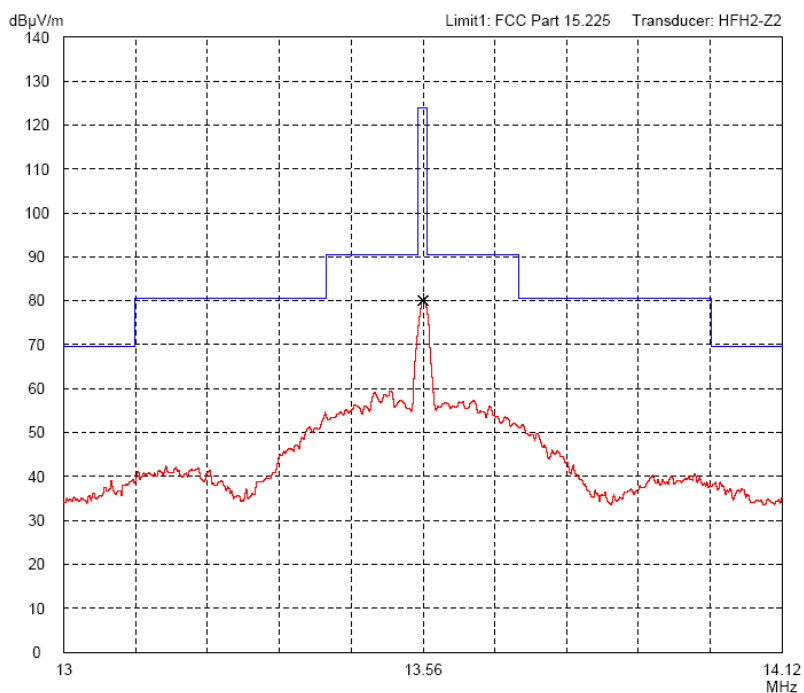

RF 300 2W

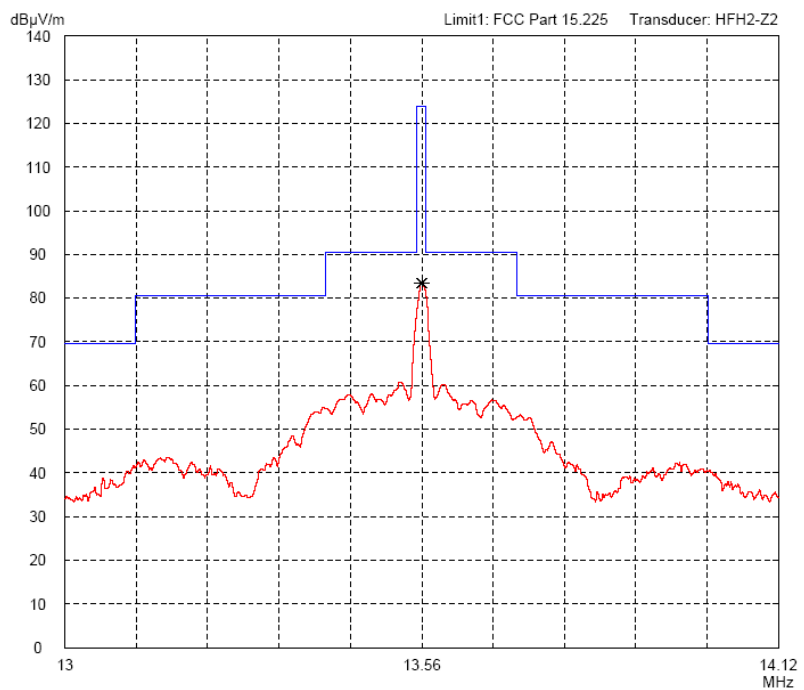



8.6 Radiated Emission Measurement 9 kHz to 30 MHz

Rules and specifications:	CFR 47 Part 15, sections 15.205 and 15.225(a)-(d) IC RSS-210 Issue 7, sections 2.2(b)(c), 2.6 and A2.6			
Guide:	ANSI C63.4			
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance d (meters)
	0.009 - 0.490	2400/F(kHz)	67.6 - 20 · log(F(kHz))	300
	0.490 - 1.705	24000/F(kHz)	87.6 - 20 · log(F(kHz))	30
	1.705 - 13.110	30	29.5	30
	13.110 - 13.410	106	40.5	30
	13.410 - 13.553	334	50.5	30
	13.553 - 13.567	15848	84.0	30
	13.567 - 13.710	334	50.5	30
	13.710 - 14.010	106	40.5	30
	14.010 - 30.000	30	29.5	30
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.			
Measurement procedure:	Radiated Emission Measurement 9 kHz to 30 MHz (6.3)			

Comment:	ISO and RF 300 mode
Date of test:	10/29/2008
Test site:	Open field test site

Test Result:	Test passed
--------------	-------------

ISO 1 W

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d1 (m)	d (m)							
13.56000	Quasi-Peak	10	30	55.0	20.0	-19.1		55.9	84.0	28.1

ISO 2 W

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d1 (m)	d (m)							
13.56000	Quasi-Peak	10	30	58.0	20.0	-19.1		58.9	84.0	25.1

RF 300 1 W

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d1 (m)	d (m)							
13.56000	Quasi-Peak	10	30	55.0	20.0	-19.1		55.9	84.0	28.1

RF300 2 W

Extrapolation factor: -40 dB/decade										
Frequency (MHz)	Detector	Distance		Reading Value (dBµV)	Correction Factor (dB/m)	Extrapolation Factor (dB)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d1 (m)	d (m)							
13.56000	Quasi-Peak	10	30	58.0	20.0	-19.1		58.9	84.0	25.1

Sample calculation of final values:

$$\begin{aligned} \text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_1)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dBµV/m)} &= \text{Reading Value } d_1 \text{ (dBµV)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} + \text{Pulse Train Correction (dB)} \end{aligned}$$

Note: Extrapolation factor (dB) and final value (dBµV/m) are relating to distance d.



8.7 Radiated Emission Measurement 30 MHz to 1 GHz

Rules and specifications:	CFR 47 Part 15, sections 15.205(b) and 15.225(d) IC RSS-210 Issue 7, sections 2.2(b)(c), 2.6 and A2.6		
Guide:	ANSI C63.4		
Limit:	Frequency of Emission (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)
	30 - 88	100	40.0
	88 - 216	150	43.5
	216 - 960	200	46.0
	Above 960	500	54.0
	Additionally, the level of any unwanted emissions shall not exceed the level of the fundamental emission.		
Measurement procedures:	Radiated Emission in Fully or Semi Anechoic Room (6.4) Radiated Emission at Open Field Test Site (6.5)		

Comment:	
Date of test:	10/24/2008
Test site:	Frequencies \leq 1 GHz: Open field test site Frequencies $>$ 1 GHz: Fully anechoic room, cabin no. 2
Test distance:	3 meters

Test Result:	Test passed
--------------	-------------

ISO 1W

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
40.680	vertical	Quasi-Peak	10.2	11.7		21.9	40.0	18.1
108.480	horizontal	Quasi-Peak	3.2	11.5		14.7	43.5	28.8
122.040	horizontal	Quasi-Peak	4.8	12.5		17.3	43.5	26.2
135.600	horizontal	Quasi-Peak	13.8	13.3		27.1	43.5	16.4
149.160	vertical	Quasi-Peak	15.2	13.8		29.0	43.5	14.5
162.700	horizontal	Quasi-Peak	17.3	14.3		31.6	43.5	11.9
162.720	vertical	Quasi-Peak	19.5	14.3		33.8	43.5	9.7
176.280	vertical	Quasi-Peak	15.2	15.0		30.2	43.5	13.3
203.400	vertical	Quasi-Peak	14.2	16.6		30.8	43.5	12.7
216.960	vertical	Quasi-Peak	12.3	16.8		29.1	46.0	16.9
230.400	horizontal	Quasi-Peak	3.5	17.1		20.6	46.0	25.4
230.520	vertical	Quasi-Peak	1.2	17.1		18.3	46.0	27.7
244.000	horizontal	Quasi-Peak	11.5	17.6		29.1	46.0	16.9
244.080	vertical	Quasi-Peak	9.5	17.6		27.1	46.0	18.9
325.440	horizontal	Quasi-Peak	12.3	16.4		28.7	46.0	17.3

ISO 2W

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
40.680	vertical	Quasi-Peak	13.2	11.7		24.9	40.0	15.1
54.240	vertical	Quasi-Peak	7.5	10.0		17.5	40.0	22.5
135.600	horizontal	Quasi-Peak	17.5	13.3		30.8	43.5	12.7
149.160	horizontal	Quasi-Peak	17.2	13.8		31.0	43.5	12.5
162.720	vertical	Quasi-Peak	22.5	14.3		36.8	43.5	6.7
163.720	horizontal	Quasi-Peak	16.8	14.3		31.1	43.5	12.4
176.280	vertical	Quasi-Peak	17.5	15.0		32.5	43.5	11.0
189.840	vertical	Quasi-Peak	12.4	15.9		28.3	43.5	15.2
203.400	horizontal	Quasi-Peak	17.5	16.6		34.1	43.5	9.4
216.960	vertical	Quasi-Peak	15.5	16.8		32.3	46.0	13.7
244.000	vertical	Quasi-Peak	11.5	17.6		29.1	46.0	16.9
244.080	horizontal	Quasi-Peak	12.3	17.6		29.9	46.0	16.1

RF 300 1W

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
67.780	vertical	Quasi-Peak	12.0	9.6		21.6	40.0	18.4
67.800	horizontal	Quasi-Peak	8.0	9.6		17.6	40.0	22.4
108.480	vertical	Quasi-Peak	12.3	11.3		23.6	43.5	19.9
122.040	vertical	Quasi-Peak	9.3	12.8		22.1	43.5	21.4
135.600	vertical	Quasi-Peak	20.3	13.5		33.8	43.5	9.7
149.160	vertical	Quasi-Peak	15.0	13.9		28.9	43.5	14.6
162.720	horizontal	Quasi-Peak	16.5	14.6		31.1	43.5	12.4
176.200	horizontal	Quasi-Peak	5.9	15.2		21.1	43.5	22.4
176.280	vertical	Quasi-Peak	6.8	15.2		22.0	43.5	21.5
203.400	horizontal	Quasi-Peak	12.1	16.7		28.8	43.5	14.7
216.960	horizontal	Quasi-Peak	6.8	16.9		23.7	46.0	22.3
230.400	horizontal	Quasi-Peak	3.5	17.3		20.8	46.0	25.2
230.520	vertical	Quasi-Peak	1.2	17.3		18.5	46.0	27.5
244.000	horizontal	Quasi-Peak	10.9	17.5		28.4	46.0	17.6
244.080	vertical	Quasi-Peak	7.0	17.5		24.5	46.0	21.5
325.440	horizontal	Quasi-Peak	12.5	16.6		29.1	46.0	16.9

RF 300 2W

Frequency (MHz)	Antenna Polarization	Detector	Receiver Reading (dBµV)	Correction Factor (dB/m)	Pulse Train Correction (dB)	Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
54.240	horizontal	Quasi-Peak	3.7	10.0		13.7	40.0	26.3
67.780	vertical	Quasi-Peak	12.8	9.6		22.4	40.0	17.6
67.800	horizontal	Quasi-Peak	8.2	9.6		17.8	40.0	22.2
108.480	vertical	Quasi-Peak	12.5	11.3		23.8	43.5	19.7
122.040	vertical	Quasi-Peak	10.3	12.8		23.1	43.5	20.4
135.600	vertical	Quasi-Peak	21.5	13.5		35.0	43.5	8.5
149.160	horizontal	Quasi-Peak	17.5	13.9		31.4	43.5	12.1
149.162	vertical	Quasi-Peak	17.5	13.9		31.4	43.5	12.1
162.720	horizontal	Quasi-Peak	17.5	14.6		32.1	43.5	11.4
176.200	horizontal	Quasi-Peak	10.3	15.2		25.5	43.5	18.0
176.280	vertical	Quasi-Peak	16.5	15.2		31.7	43.5	11.8
203.400	vertical	Quasi-Peak	13.6	16.7		30.3	43.5	13.2
216.960	vertical	Quasi-Peak	12.7	16.9		29.6	46.0	16.4
230.400	horizontal	Quasi-Peak	15.4	17.3		32.7	46.0	13.3
230.520	vertical	Quasi-Peak	2.5	17.3		19.8	46.0	26.2
244.000	horizontal	Quasi-Peak	11.7	17.5		29.2	46.0	16.8
244.080	vertical	Quasi-Peak	8.3	17.5		25.8	46.0	20.2
325.440	horizontal	Quasi-Peak	12.5	16.6		29.1	46.0	16.9

Sample calculation of final values:

$$\text{Final Value (dBµV/m)} = \text{Reading Value (dBµV)} + \text{Correction Factor (dB/m)} + \text{Pulse Train Correction (dB)}$$


8.8 Carrier Frequency Stability

Rules and specifications:	CFR 47 Part 15, section 15.225(e) IC RSS-Gen Issue 2, section 4.7 and IC RSS-210 Issue 7, section A2.6
Guide:	ANSI C63.4
Limit:	The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % (± 100 ppm) of the carrier frequency under nominal conditions.
Temperature range:	-20°C to +50°C (at normal supply voltage)
Voltage range:	85% to 115% of the rated supply voltage (at a temperature of +20°C)
Measurement procedure:	Carrier Frequency Stability (6.6)

Comment:	ISO and RF 300 mode
Date of test:	December 15, 2008

8.8.1 Carrier Frequency Stability vs. Temperature

ISO 1W

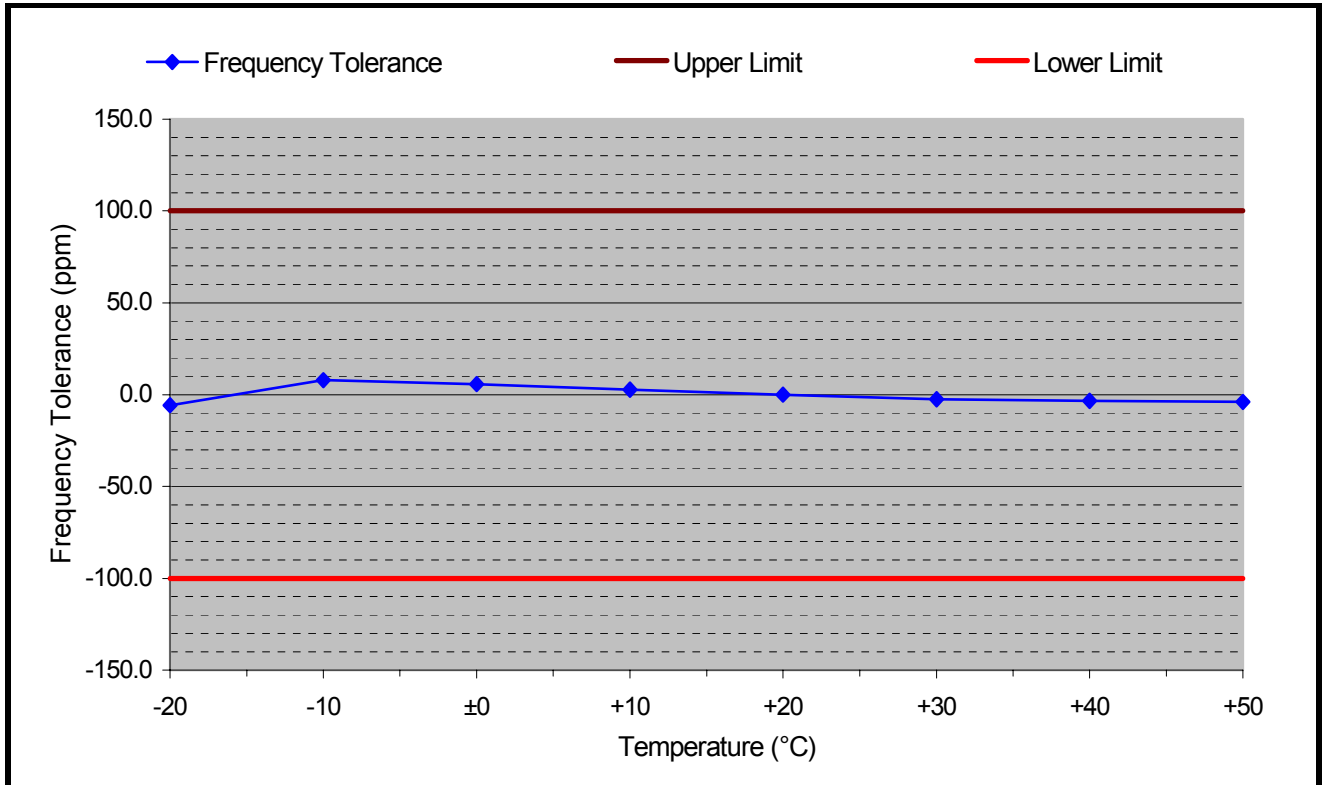


Supply voltage: 24 V Nominal frequency: 13.559750 MHz

Temperature (°C)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
-20	13.559671	-79	-5.8	+100.0	-100.0	94.2
-10	13.559857	107	7.9	+100.0	-100.0	92.1
±0	13.559828	78	5.8	+100.0	-100.0	94.2
+10	13.559786	36	2.7	+100.0	-100.0	97.3
+20	13.559750	0	0.0	+100.0	-100.0	100.0
+30	13.559717	-33	-2.4	+100.0	-100.0	97.6
+40	13.559703	-47	-3.5	+100.0	-100.0	96.5
+50	13.559697	-53	-3.9	+100.0	-100.0	96.1

Test Result: Test passed

8.8.2 Carrier Frequency Stability vs. Supply Voltage

ISO 1W

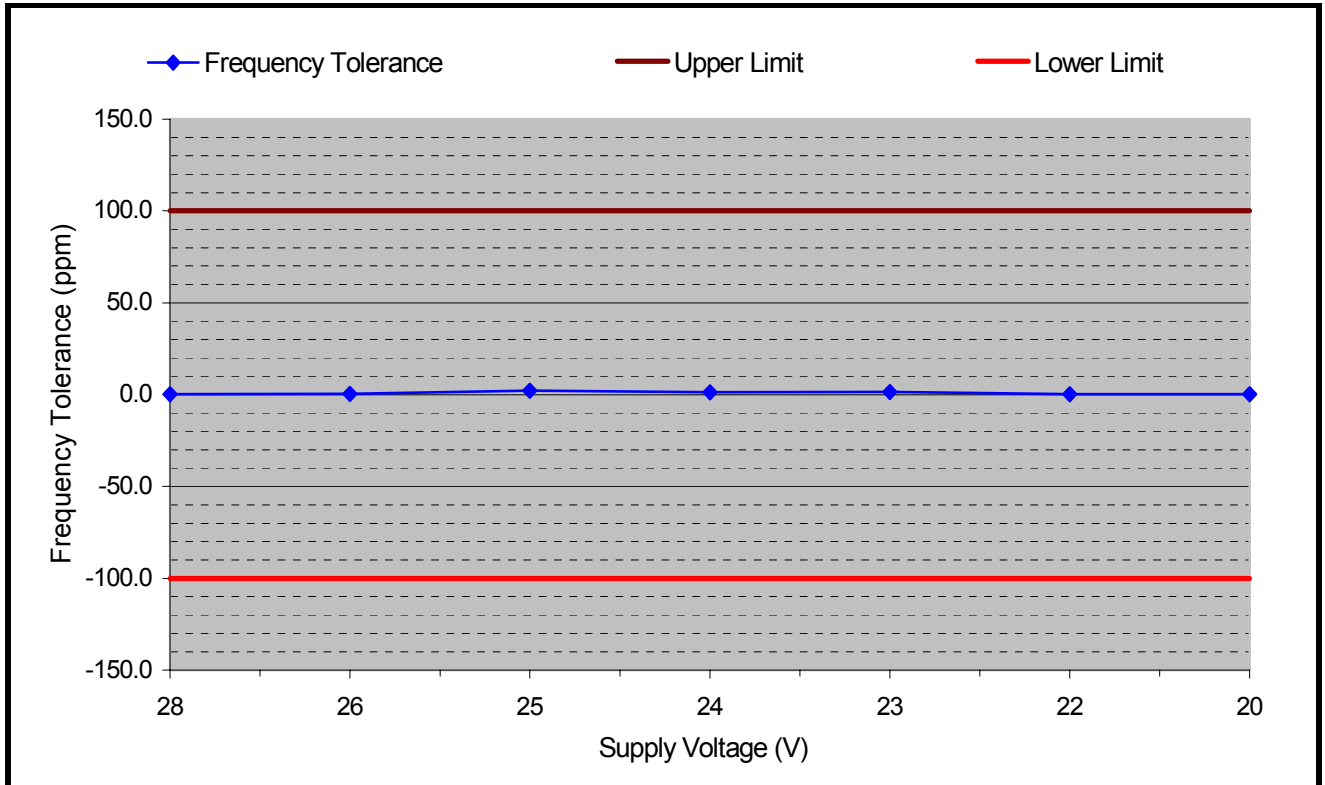


Temperature: +20 °C Battery End Point: Not applicable
 Nominal frequency: 13.559750 MHz

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
28	13.559752	2	0.1	+100.0	-100.0	99.9
26	13.559754	4	0.3	+100.0	-100.0	99.7
25	13.559780	30	2.2	+100.0	-100.0	97.8
24	13.559767	17	1.3	+100.0	-100.0	98.7
23	13.559769	19	1.4	+100.0	-100.0	98.6
22	13.559752	2	0.1	+100.0	-100.0	99.9
20	13.559752	2	0.1	+100.0	-100.0	99.9

Test Result: Test passed

ISO 2W

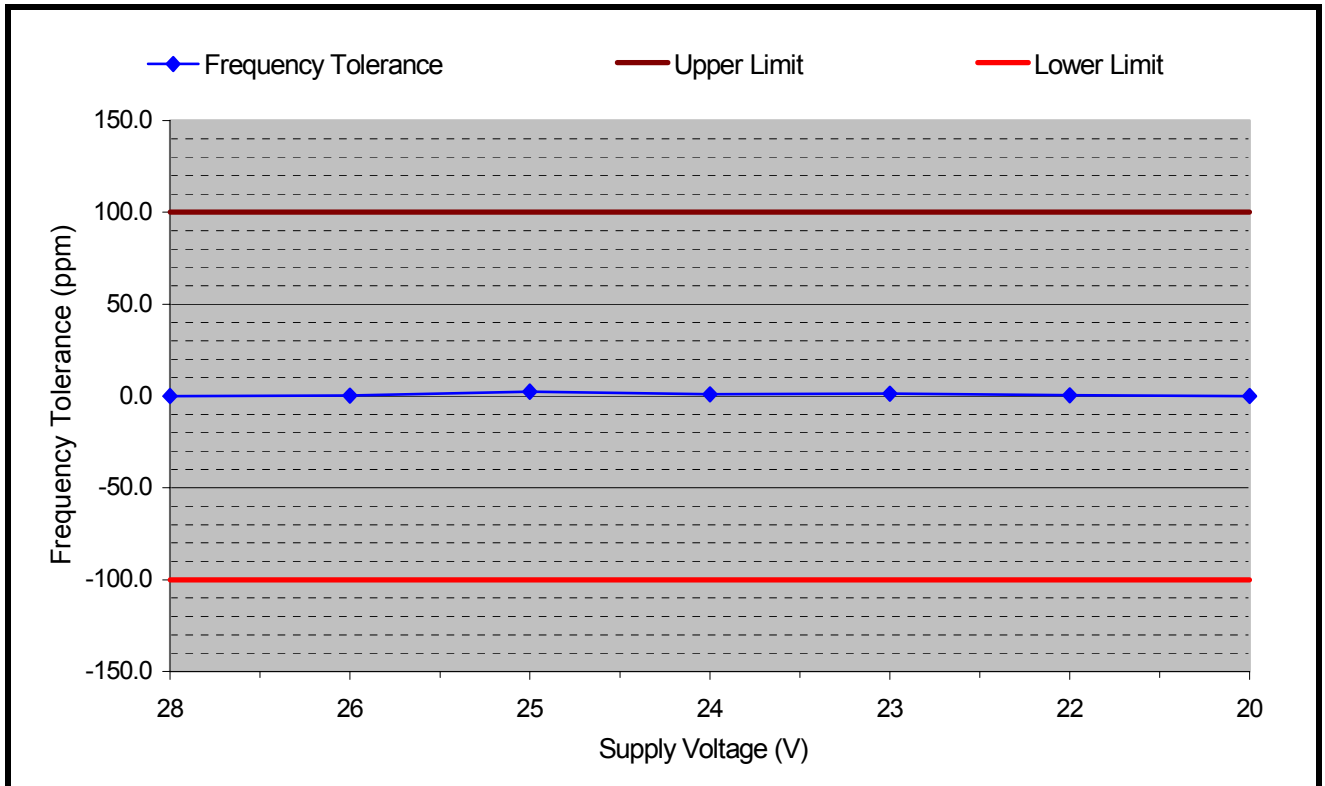


Temperature: +20 °C Battery End Point: Not applicable
 Nominal frequency: 13.559750 MHz

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
28	13.559750	0	0.0	+100.0	-100.0	100.0
26	13.559753	3	0.2	+100.0	-100.0	99.8
25	13.559782	32	2.4	+100.0	-100.0	97.6
24	13.559761	11	0.8	+100.0	-100.0	99.2
23	13.559767	17	1.3	+100.0	-100.0	98.7
22	13.559755	5	0.4	+100.0	-100.0	99.6
20	13.559750	0	0.0	+100.0	-100.0	100.0

Test Result: Test passed

RF 300 1W

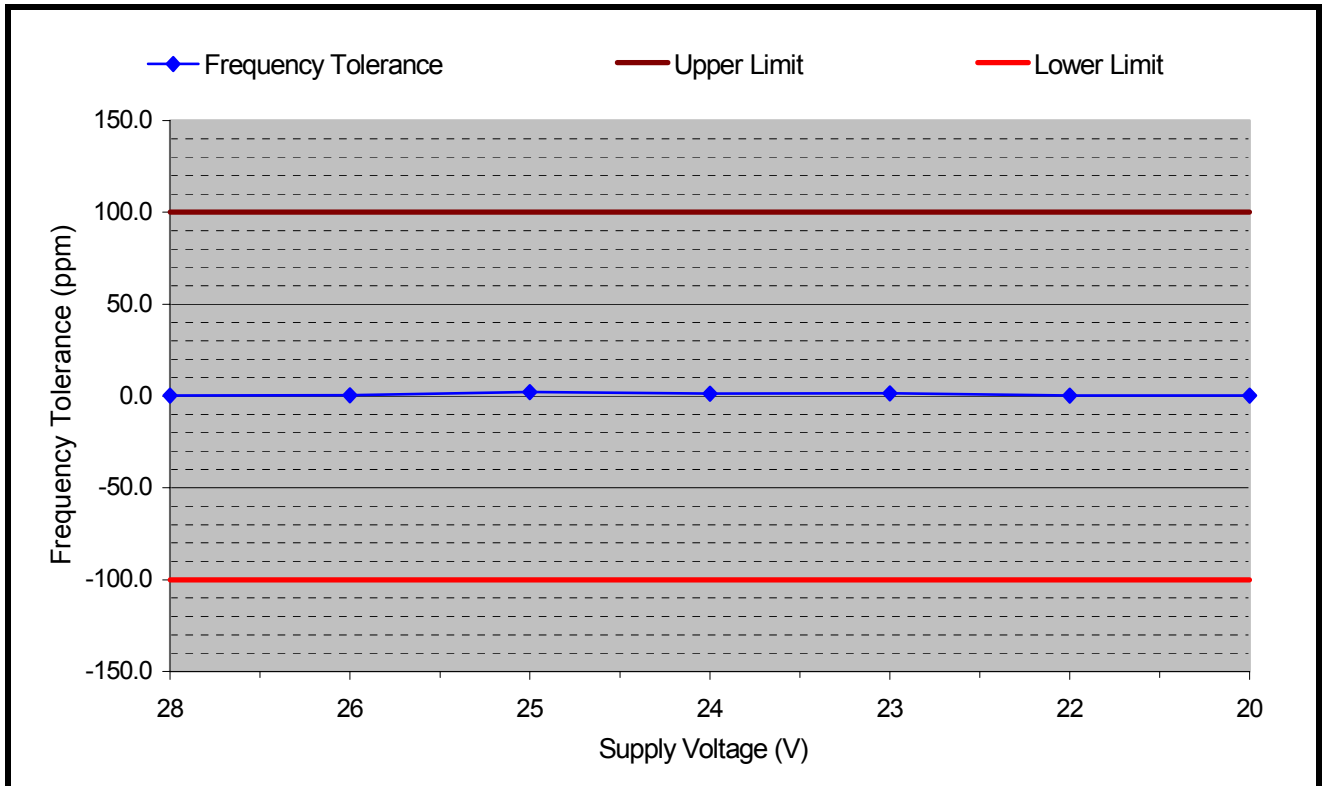


Temperature: +20 °C Battery End Point: Not applicable
 Nominal frequency: 13.559750 MHz

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
28	13.559752	2	0.1	+100.0	-100.0	99.9
26	13.559754	4	0.3	+100.0	-100.0	99.7
25	13.559780	30	2.2	+100.0	-100.0	97.8
24	13.559767	17	1.3	+100.0	-100.0	98.7
23	13.559769	19	1.4	+100.0	-100.0	98.6
22	13.559752	2	0.1	+100.0	-100.0	99.9
20	13.559752	2	0.1	+100.0	-100.0	99.9

Test Result: Test passed

RF 300 2W

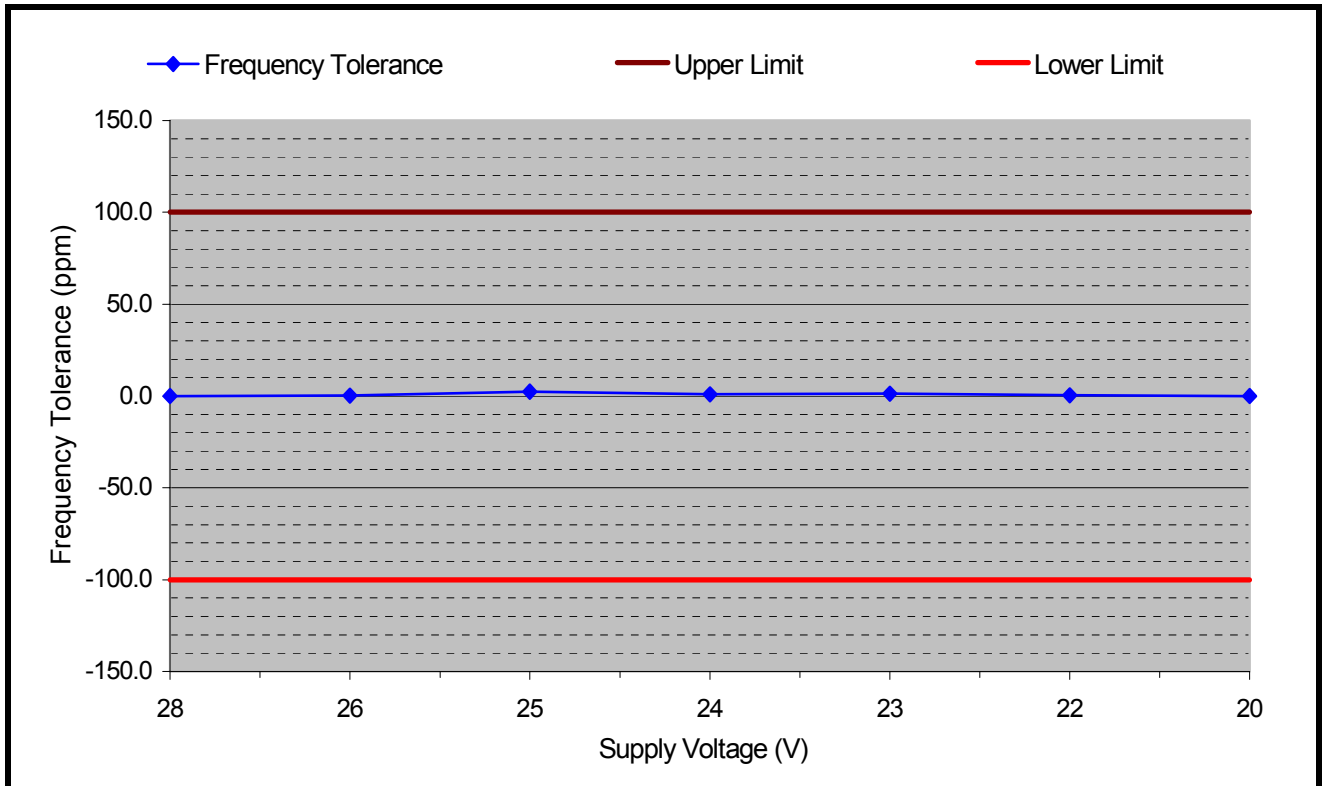

Temperature: +20 °C Battery End Point: Not applicable
 Nominal frequency: 13.559750 MHz

Supply Voltage (V)	Frequency (MHz)	Frequency Tolerance (Hz)	Frequency Tolerance (ppm)	Upper Limit (ppm)	Lower Limit (ppm)	Margin (ppm)
28	13.559750	0	0.0	+100.0	-100.0	100.0
26	13.559753	3	0.2	+100.0	-100.0	99.8
25	13.559782	32	2.4	+100.0	-100.0	97.6
24	13.559761	11	0.8	+100.0	-100.0	99.2
23	13.559767	17	1.3	+100.0	-100.0	98.7
22	13.559755	5	0.4	+100.0	-100.0	99.6
20	13.559750	0	0.0	+100.0	-100.0	100.0

Test Result: Test passed

8.9 Exposure of Humans to RF Fields

RF power setting : 1W

Rules and specifications:	IC RSS-Gen Issue 2, section 5.5
Guide:	IC RSS-102 Issue 2, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
<input type="checkbox"/> detachable				
<p>The conducted output power (CP in watts) is measured at the antenna connector:</p> $CP = \dots\dots\dots \mathbf{W}$ <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$</p> $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ <p><input type="checkbox"/> the field strength¹¹ in V/m: $FS = \dots\dots\dots \mathbf{V/m}$</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ <p>with:</p> <p>Distance between the antennas in m: $D = \dots\dots\dots \mathbf{m}$</p>			<input type="checkbox"/>	
<input checked="" type="checkbox"/> not detachable				
<p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by¹²:</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \mathbf{1.2^4 W}$ <p>with:</p> <p>Field strength in V/m: $FS = \mathbf{0.006 V/m}$</p> <p>Distance between the two antennas in m: $D = \mathbf{10m}$</p>			<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Selection of output power				
<p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> $TP = \mathbf{1.2^4 W}$				

¹¹ The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

RF power setting : 2W

Rules and specifications:	IC RSS-Gen Issue 2, section 5.5
Guide:	IC RSS-102 Issue 2, section 2.5

Exposure of Humans to RF Fields	Applicable	Declared by applicant	Measured	Exemption
The antenna is				
<input type="checkbox"/> detachable				
<p>The conducted output power (CP in watts) is measured at the antenna connector:</p> $CP = \dots\dots\dots \mathbf{W}$ <p>The effective isotropic radiated power (EIRP in watts) is calculated using</p> <p><input type="checkbox"/> the numerical antenna gain: $G = \dots\dots\dots$</p> $EIRP = G \cdot CP \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ <p><input type="checkbox"/> the field strength¹² in V/m: $FS = \dots\dots\dots \mathbf{V/m}$</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \dots\dots\dots \mathbf{W}$ <p>with:</p> <p>Distance between the antennas in m: $D = \dots\dots\dots \mathbf{m}$</p>				
<input checked="" type="checkbox"/> not detachable				
<p>A field strength measurement is used to determine the effective isotropic radiated power (EIRP in watts) given by¹²:</p> $EIRP = \frac{(FS \cdot D)^2}{30} \Rightarrow EIRP = \mathbf{2.13^4 W}$ <p>with:</p> <p>Field strength in V/m: $FS = \mathbf{0.008 V/m}$</p> <p>Distance between the two antennas in m: $D = \mathbf{10m}$</p>				
Selection of output power				
<p>The output power TP is the higher of the conducted or effective isotropic radiated power (e.i.r.p.):</p> $TP = \mathbf{2.13^4 W}$				

¹² The conversion formula is valid only for properly matched antennas. In other cases the transmitter output power may have to be measured by a terminated measurement when applying the exemption clauses. If an open area test site is used for field strength measurement, the effect due to the metal ground reflecting plane should be subtracted from the maximum field strength value in order to reference it to free space, before calculating TP.

9 Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	CFR 47 Part 2	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)	October 1, 2007
<input checked="" type="checkbox"/>	CFR 47 Part 15	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)	September 20, 2007
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	December 11, 2003 (published on January 30, 2004)
<input checked="" type="checkbox"/>	RSS-Gen	Radio Standards Specification RSS-Gen Issue 2 containing General Requirements and Information for the Certification of Radiocommunication Equipment, published by Industry Canada	June 2007
<input checked="" type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 7 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, published by Industry Canada	June 2007
<input type="checkbox"/>	RSS-310	Radio Standards Specification RSS-310 Issue 1 for Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category II Equipment, published by Industry Canada	September 2005
<input checked="" type="checkbox"/>	RSS-102	Radio Standards Specification RSS-102 Issue 2: Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)	November 2005
<input type="checkbox"/>	ICES-003	Interference-Causing Equipment Standard ICES-003 Issue 4 for Digital Apparatus, published by Industry Canada	February 7, 2004
<input checked="" type="checkbox"/>	CISPR 22	Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment – Radio Disturbance Characteristics – Limits and Methods of Measurement"	1997
<input type="checkbox"/>	CAN/CSA-CEI/IEC CISPR 22	Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment	2002



TRC-43

Notes Regarding Designation of Emission (Including Necessary Bandwidth and Classification), Class of Station and Nature of Service, published by Industry Canada

October 9, 1982



10 Revision History

Revision History			
<i>Edition</i>	<i>Date</i>	<i>Issued by</i>	<i>Modifications</i>
1	17.03.09	T. Eberl (cj)	First Edition
2	02.07.09	C. Jäger	Edition 2 Modification required for FCC Certification Page 8/9: Measurement Procedures for Bandwidth Measurements - Test Equipment List removed (not required for radiated Test)



11 Charts taken during testing


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord EUT Plus 24 V	
Date of test: 10/16/2008	Operator: T. Eberl
Test performed: automatically	File name:

Mode: - Antenna subst.with R load = 50 Ohm - Coax Att. - TX pow. : 1 W - Direct supply via Y- patch

Detector: Peak / Final Results: QP

Final results: 20 dB Margin	25 Subranges
--------------------------------	--------------

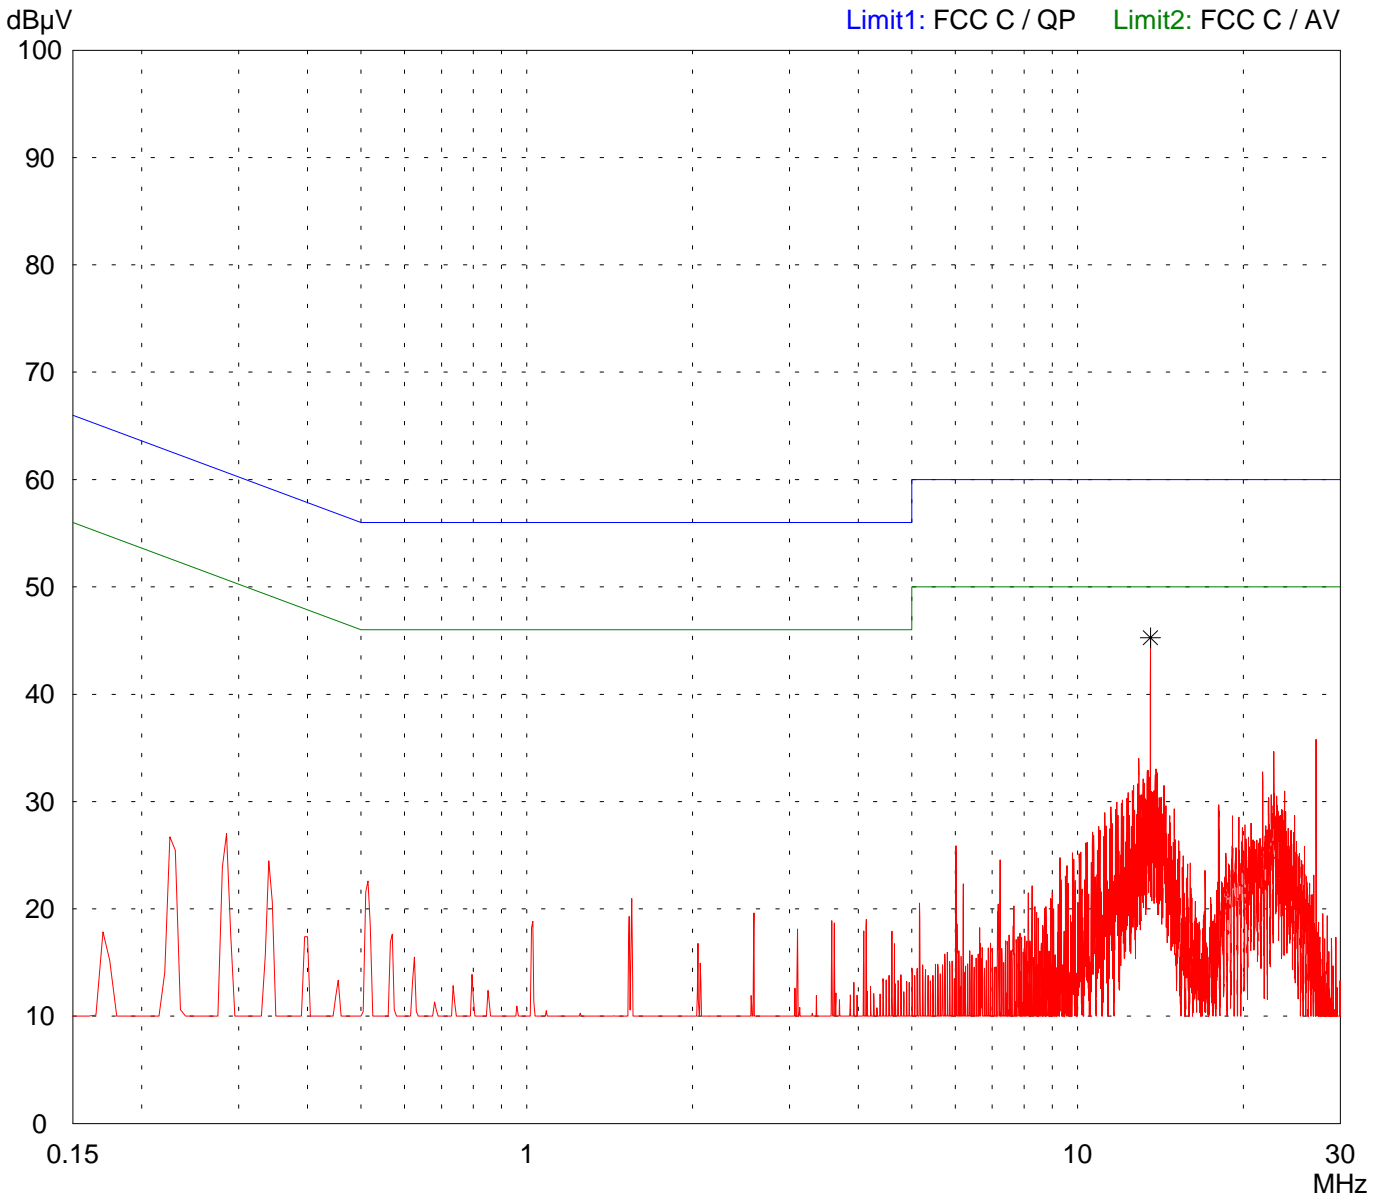

Result: Limit kept

Project file: 51905-81204-5

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
RF380R ISO

Serial no.:

Applicant:
Siemens AG, Fürth

Test site:
Shielded room, cabin no. 4

Tested on:
Linecord EUT
Minus

Date of test: 10/16/2008
Operator: T. Eberl

Test performed: automatically
File name:

Mode:
- Antenna subst.with R load = 50 Ohm
- Coax Att.
- TX pow. : 1 W


- Direct supply via Y- patch

Detector:
Peak / Final Results: QP

Final results:
20 dB Margin 25 Subranges

dB μ V

Limit1: FCC C / QP Limit2: FCC C / AV

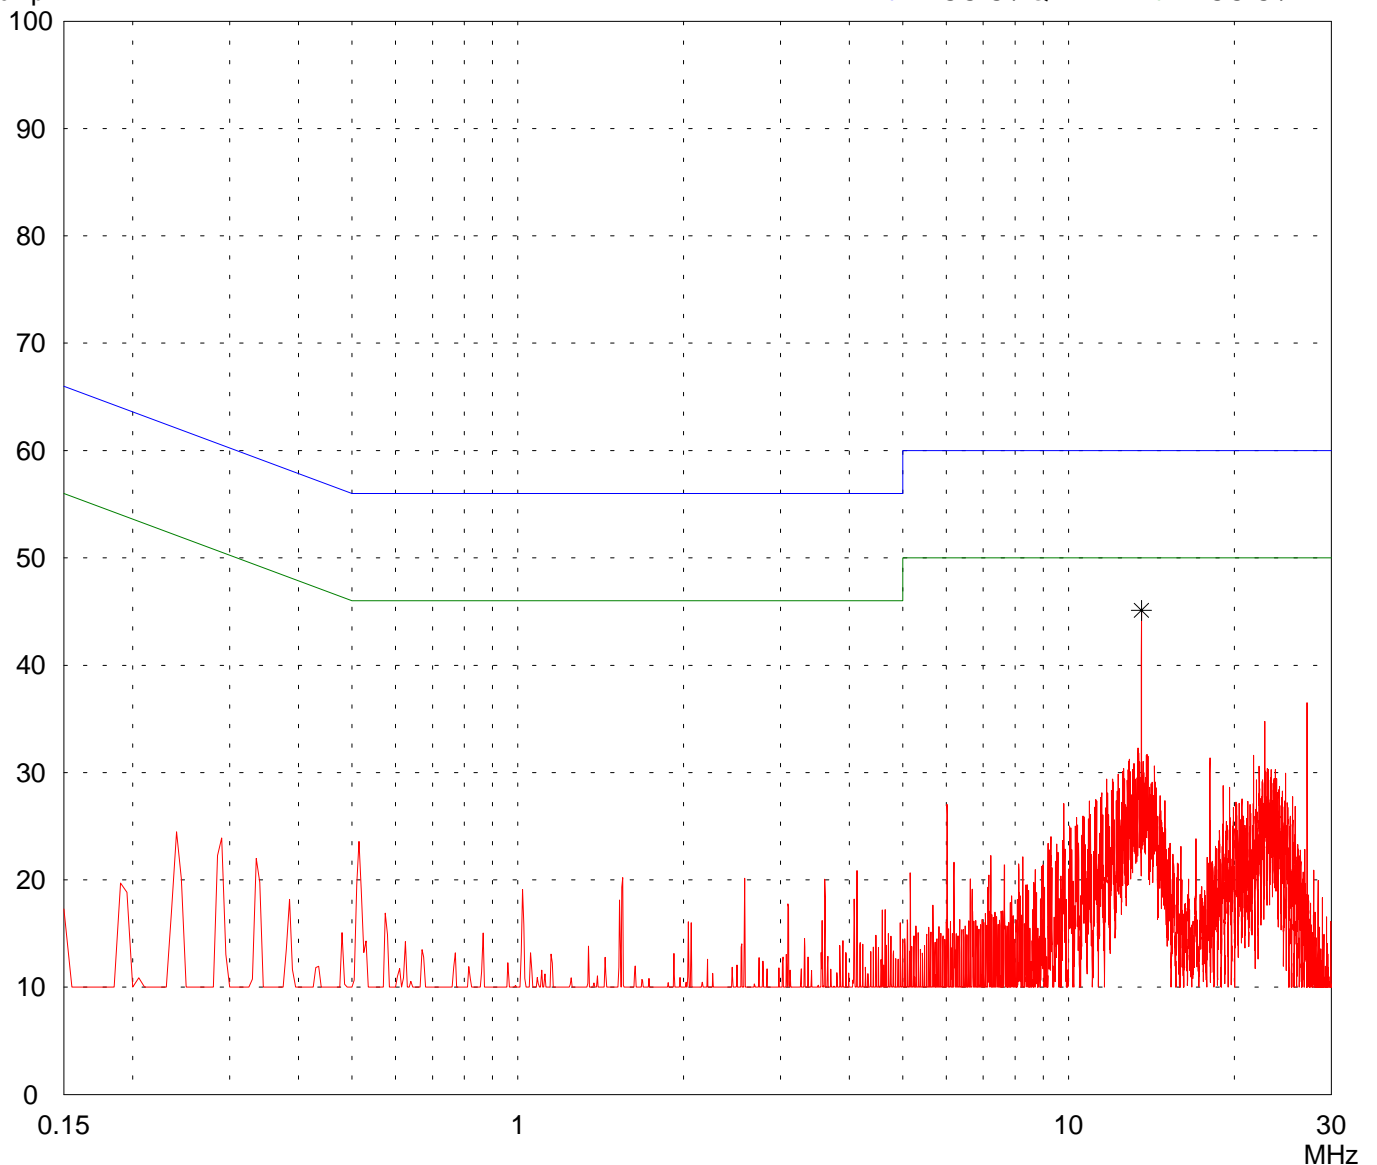

Result:
Limit kept

Project file:
51905-81204-5


Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Shielded room, cabin no. 4	
Tested on: Linecord EUT Plus 24 V	
Date of test: 10/16/2008	Operator: T. Eberl
Test performed: automatically	File name:

Mode:	
- Antenna subst.with R load = 50 Ohm	
- Coax Att.	
- TX pow. : 2 W	
- Direct supply via Y- patch	

Detector: Peak / Final Results: QP

Final results: 20 dB Margin	25 Subranges
--------------------------------	--------------

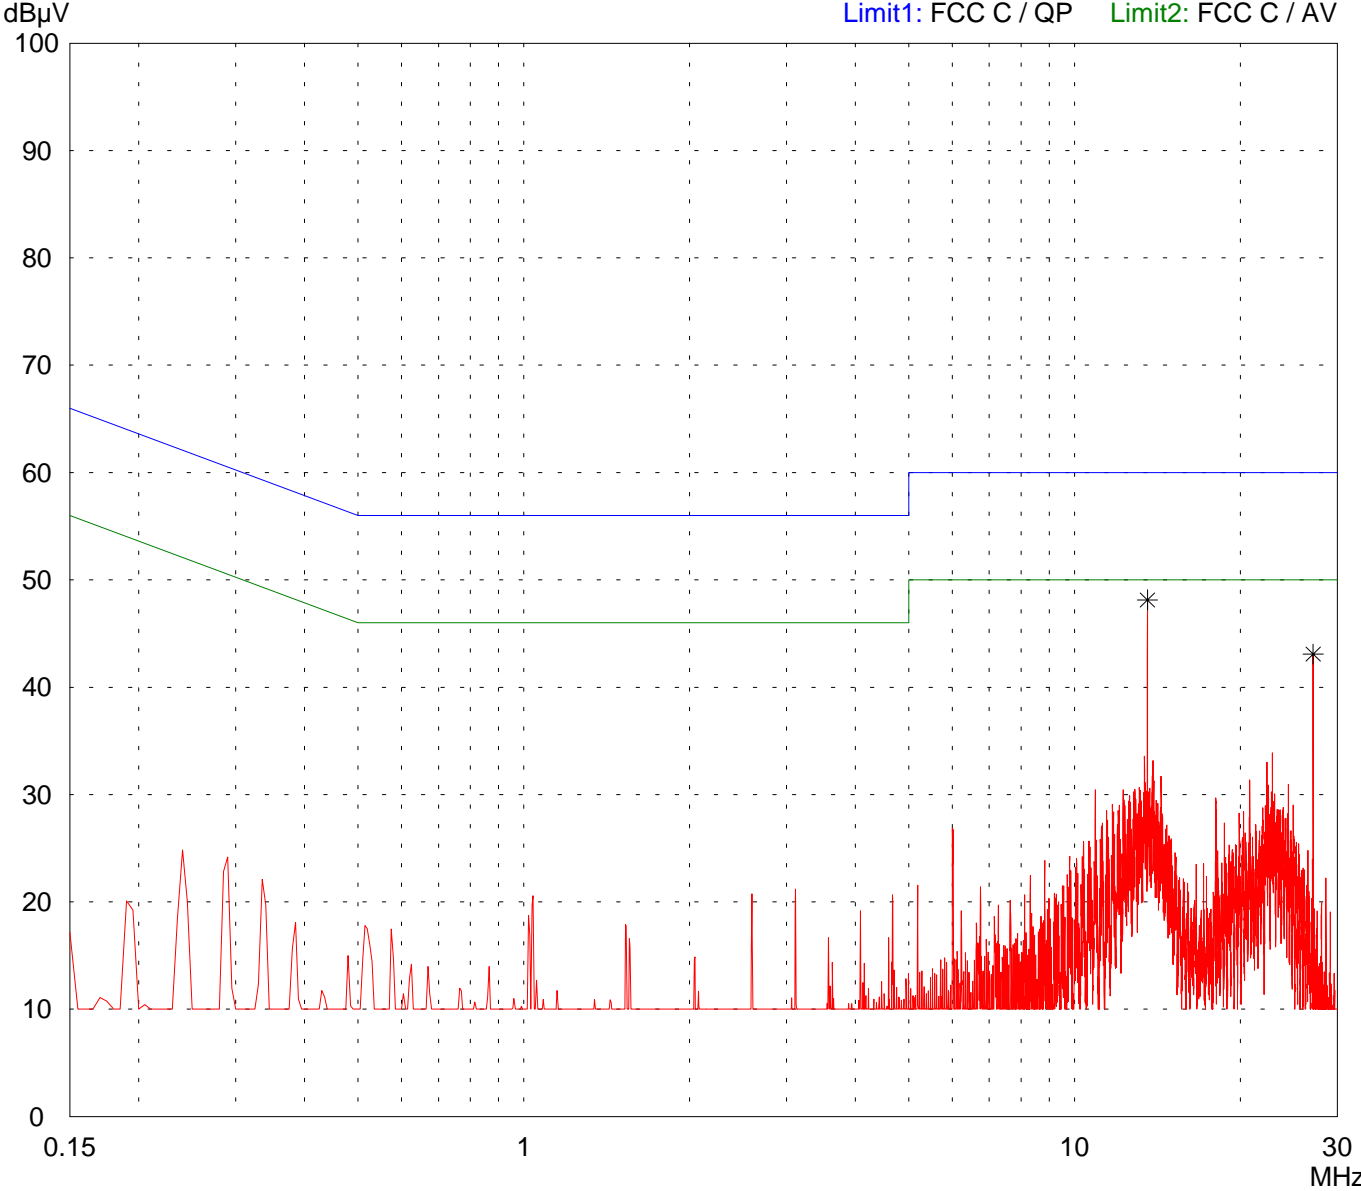

Result: Limit kept

Project file: 51905-81204-5

Conducted Emission Test 150 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
RF380R ISO

Serial no.:

Applicant:
Siemens AG, Fürth

Test site:
Shielded room, cabin no. 4

Tested on:
Linecord EUT
Minus

Date of test: 10/16/2008 Operator: T. Eberl

Test performed: automatically File name:


Mode:

- Antenna subst.with R load = 50 Ohm
- Coax Att.
- TX pow. : 2 W

- Direct supply via Y- patch

Detector:
Peak / Final Results: QP

Final results:
20 dB Margin 25 Subranges

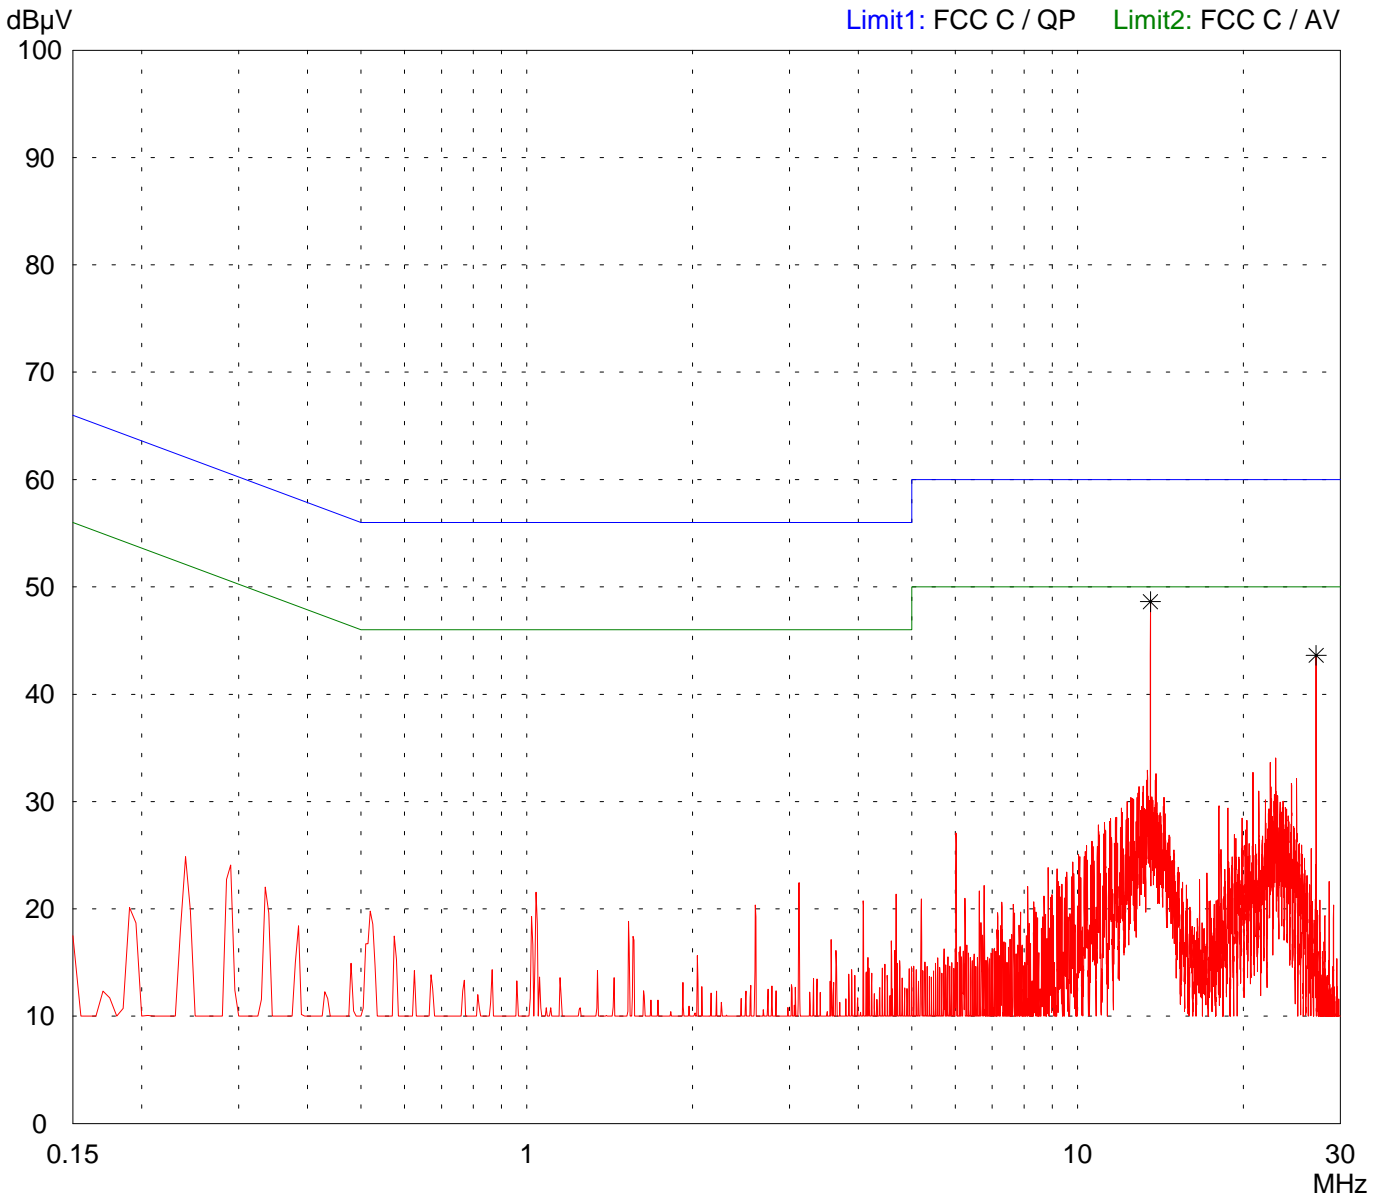

Result:
Limit kept

Project file:
51905-81204-5

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 Subpart C (FAR)

Model:
RF380R ISO

Serial no.:

Applicant:
Siemens AG, Fürth

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres

Date of test:
10/29/2008

Operator:
T. Eberl

Test performed:
by hand


File name:
default.emi

Comment:

- with TAG (ISO)
- Reading distance 70 %
- TX pow. : 1W

Detector:
Peak

List of values:
Selected by hand

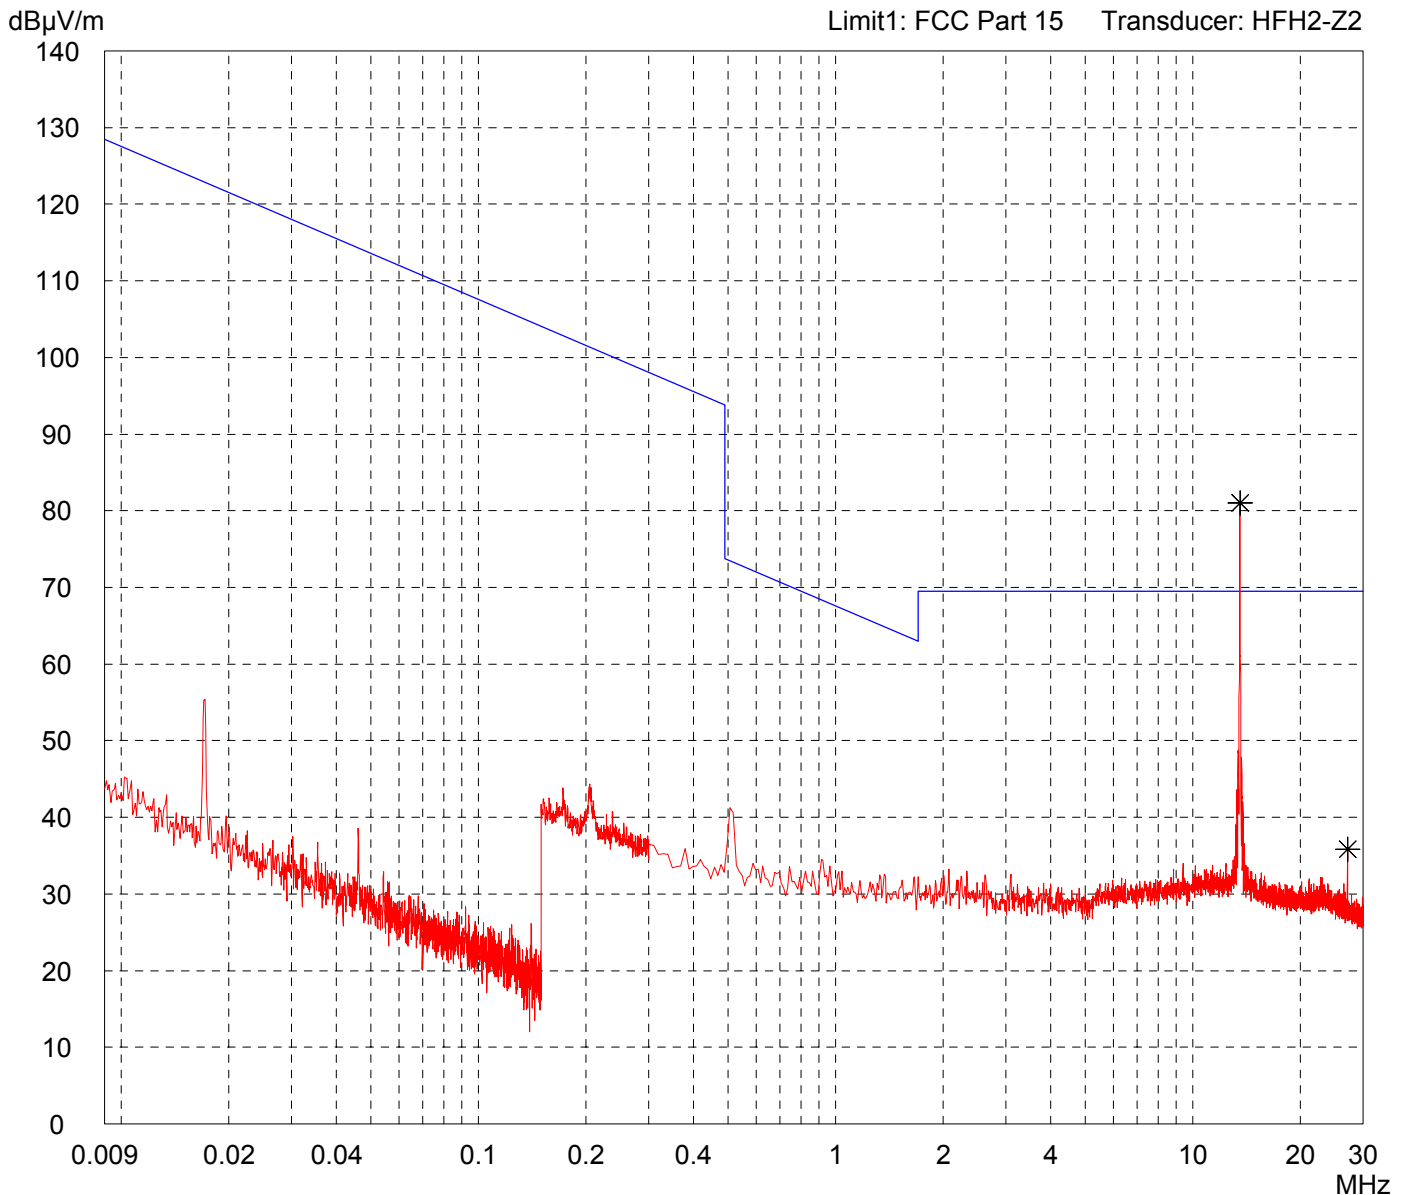

Result:
Prescan

Project file:
51905-81204-5


Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 Subpart C (FAR)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - withoutTAG (ISO) - TX pow. : 1W
--

Detector: Peak

List of values: Selected by hand

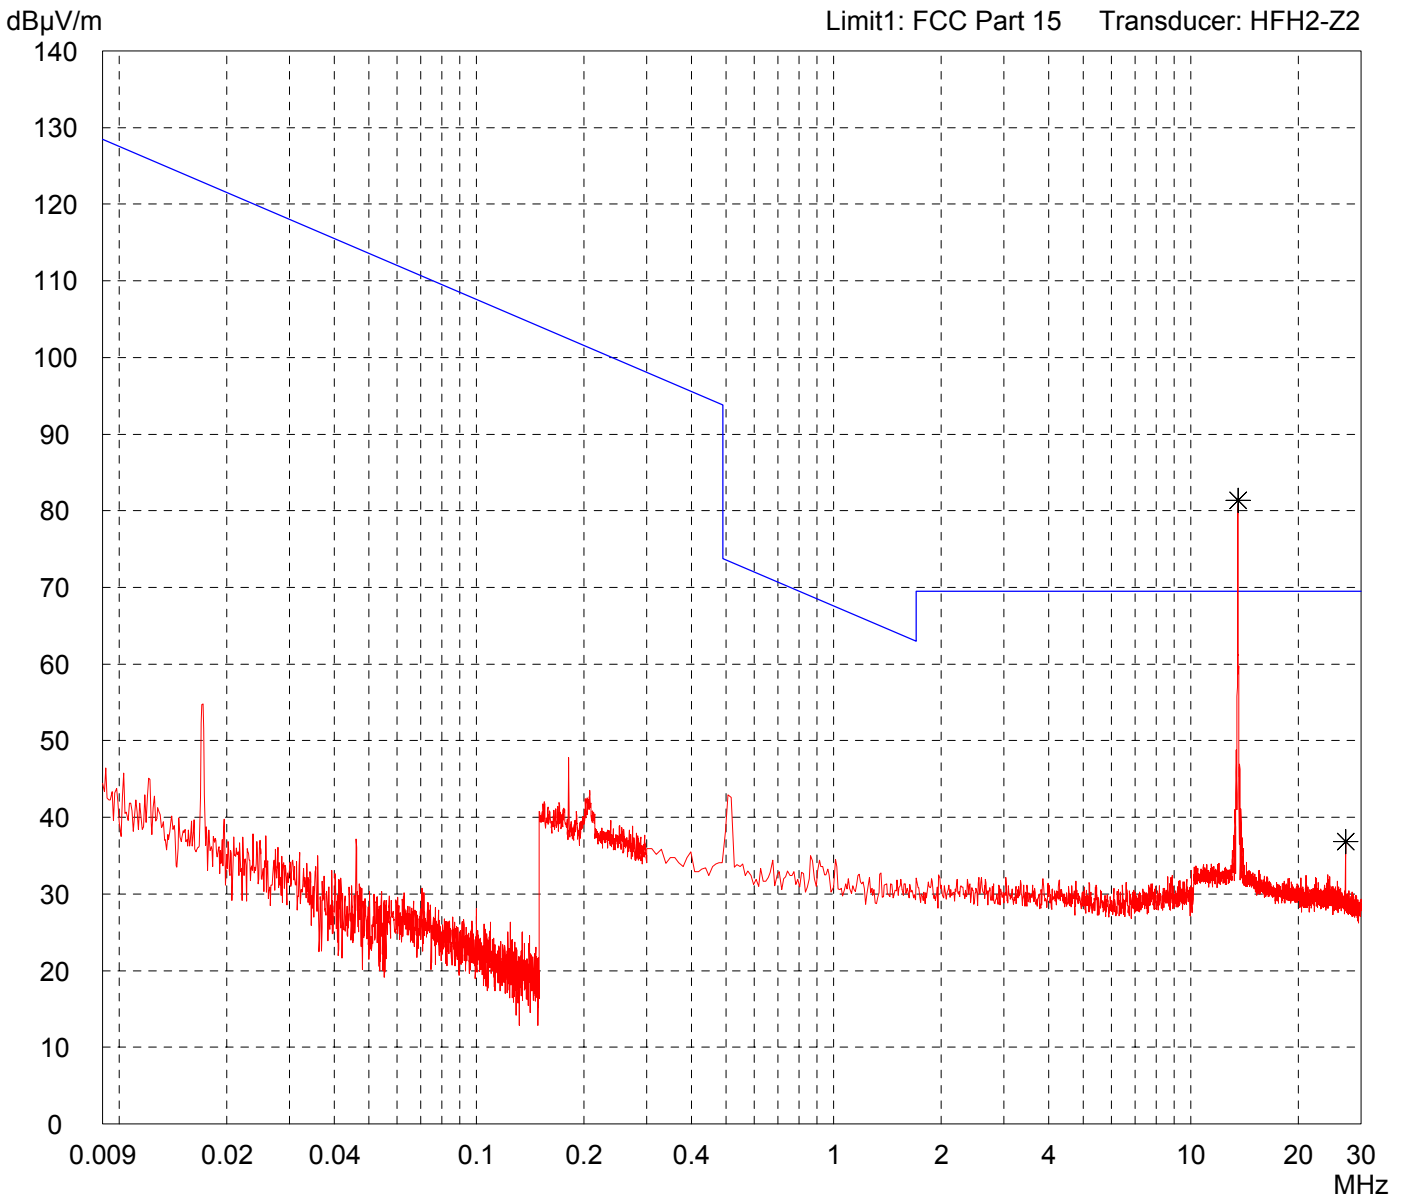

Result: Prescan

Project file: 51905-81204-5

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 Subpart C (FAR)

Model:
RF380R ISO

Serial no.:

Applicant:
Siemens AG, Fürth

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres

Date of test:
10/29/2008

Operator:
T. Eberl

Test performed:
by hand


File name:
default.emi

Comment:

- with TAG (ISO)
- Reading distance 70 %
- TX pow. : 2W

Detector:
Peak

List of values:
Selected by hand

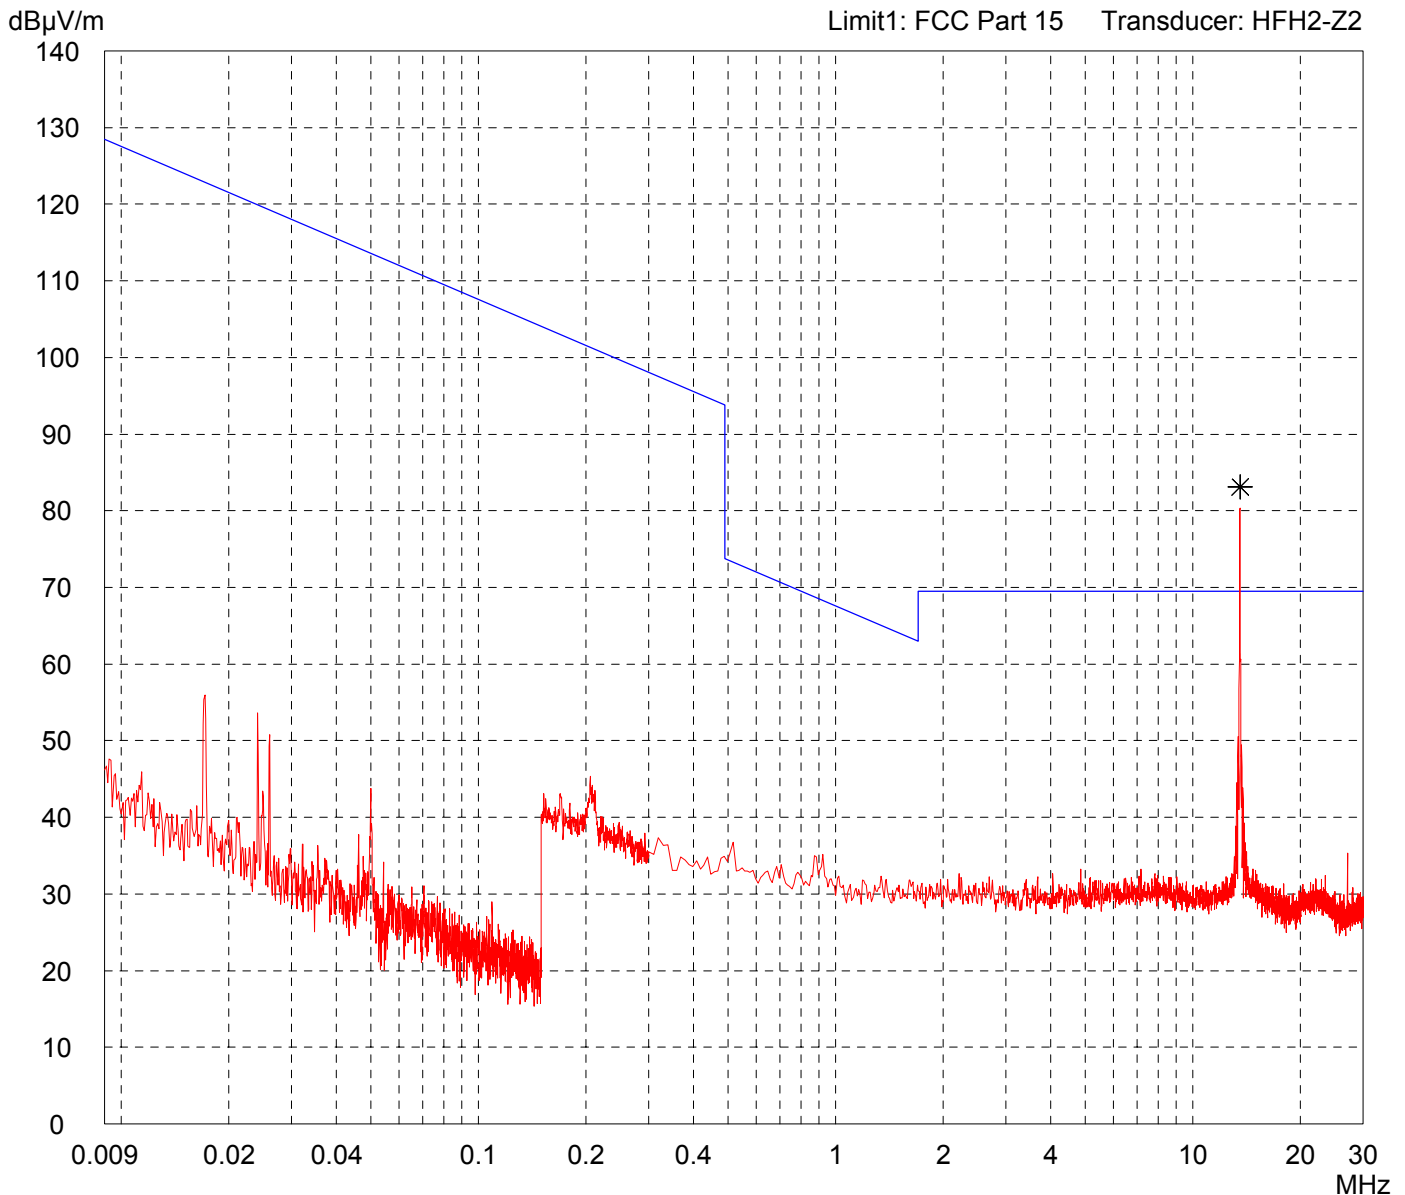


Result:
Prescan

Project file:
51905-81204-5

Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 Subpart C (FAR)

Model: RF380R ISO	Comment: - without TAG (ISO) - TX pow. : 2W
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi
Detector: Peak	List of values: Selected by hand

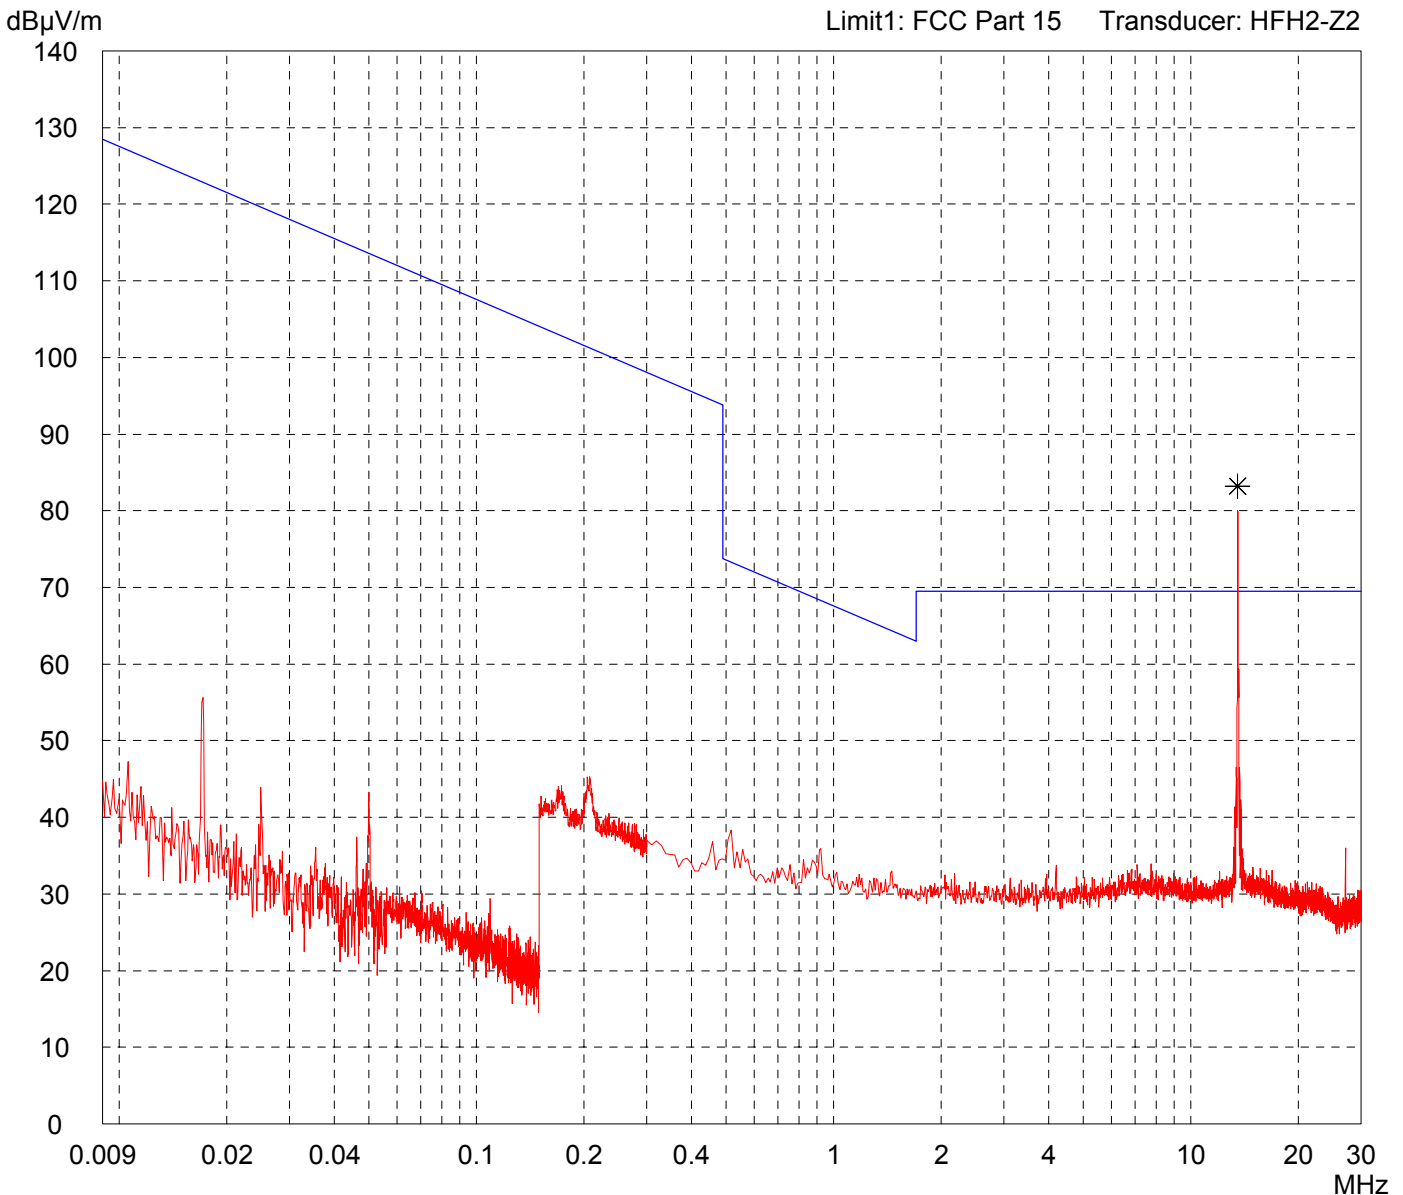

Result: Prescan	Project file: 51905-81204-5
--------------------	--------------------------------


Radiated Emission Test 13 MHz - 14.12 MHz acc. to FCC Part 15.225 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - with TAG (ISO) - Reading distance 70 % - TX pow. : 1W

Detector: Peak

List of values: Selected by hand

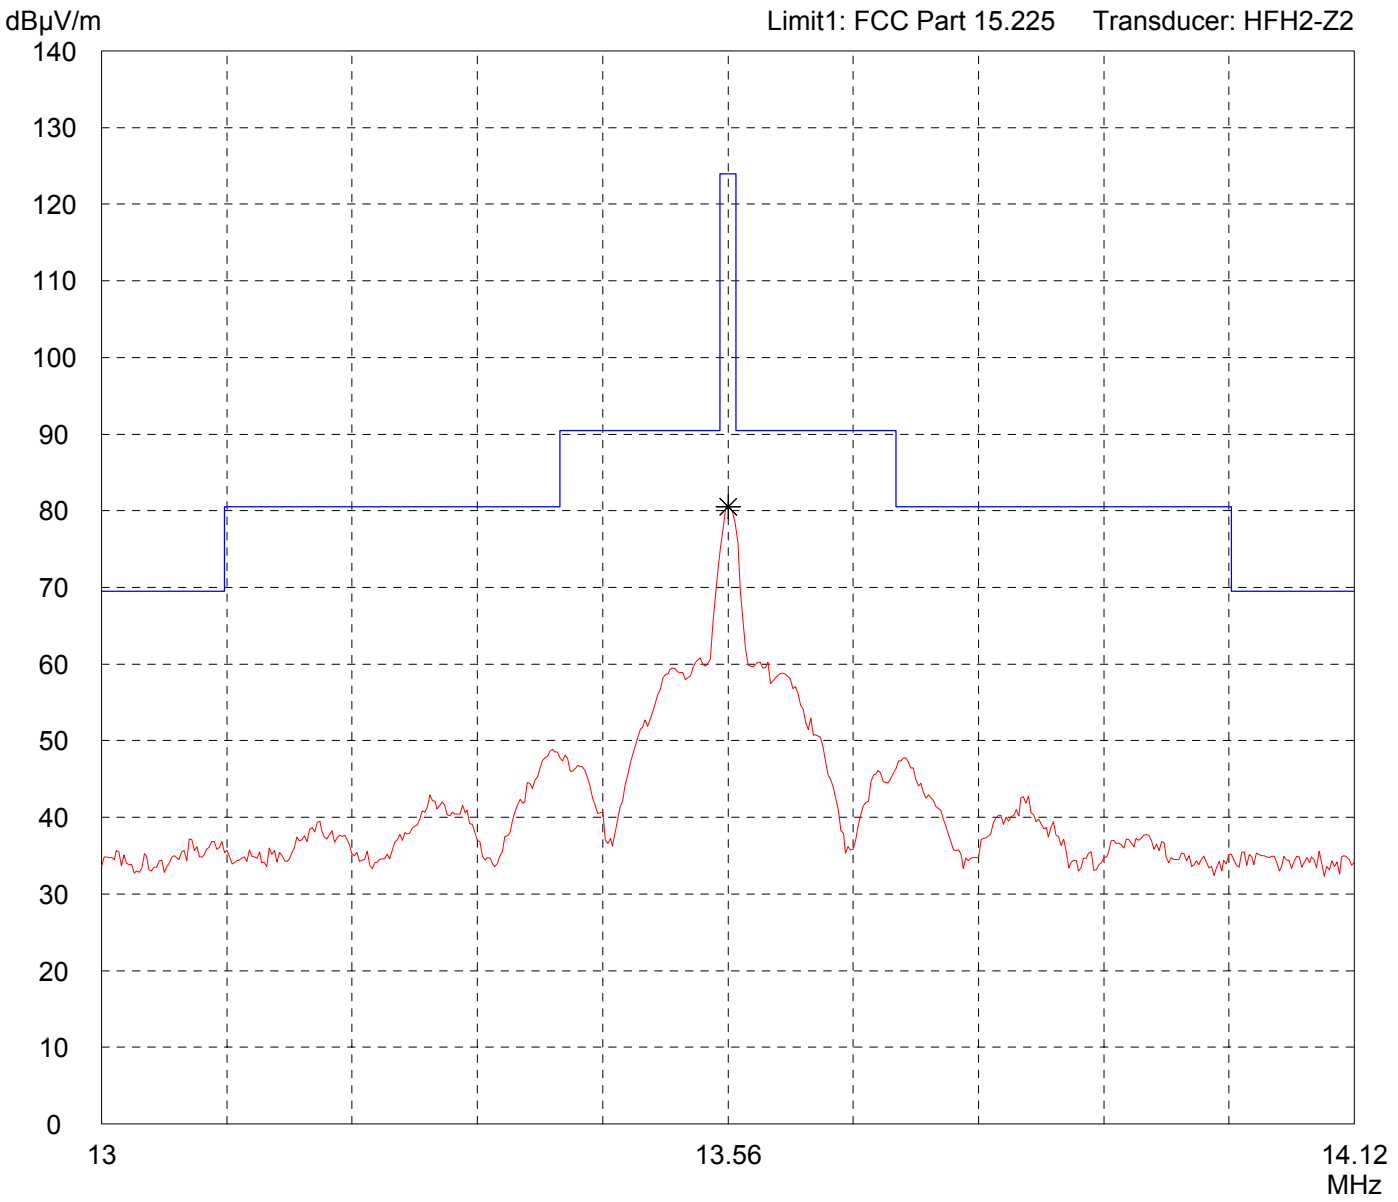

Result: Limit kept

Project file: 51905-81204-5


Radiated Emission Test 13 MHz - 14.12 MHz acc. to FCC Part 15.225 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - without TAG (ISO) - TX pow. : 1W

Detector: Peak

List of values: Selected by hand

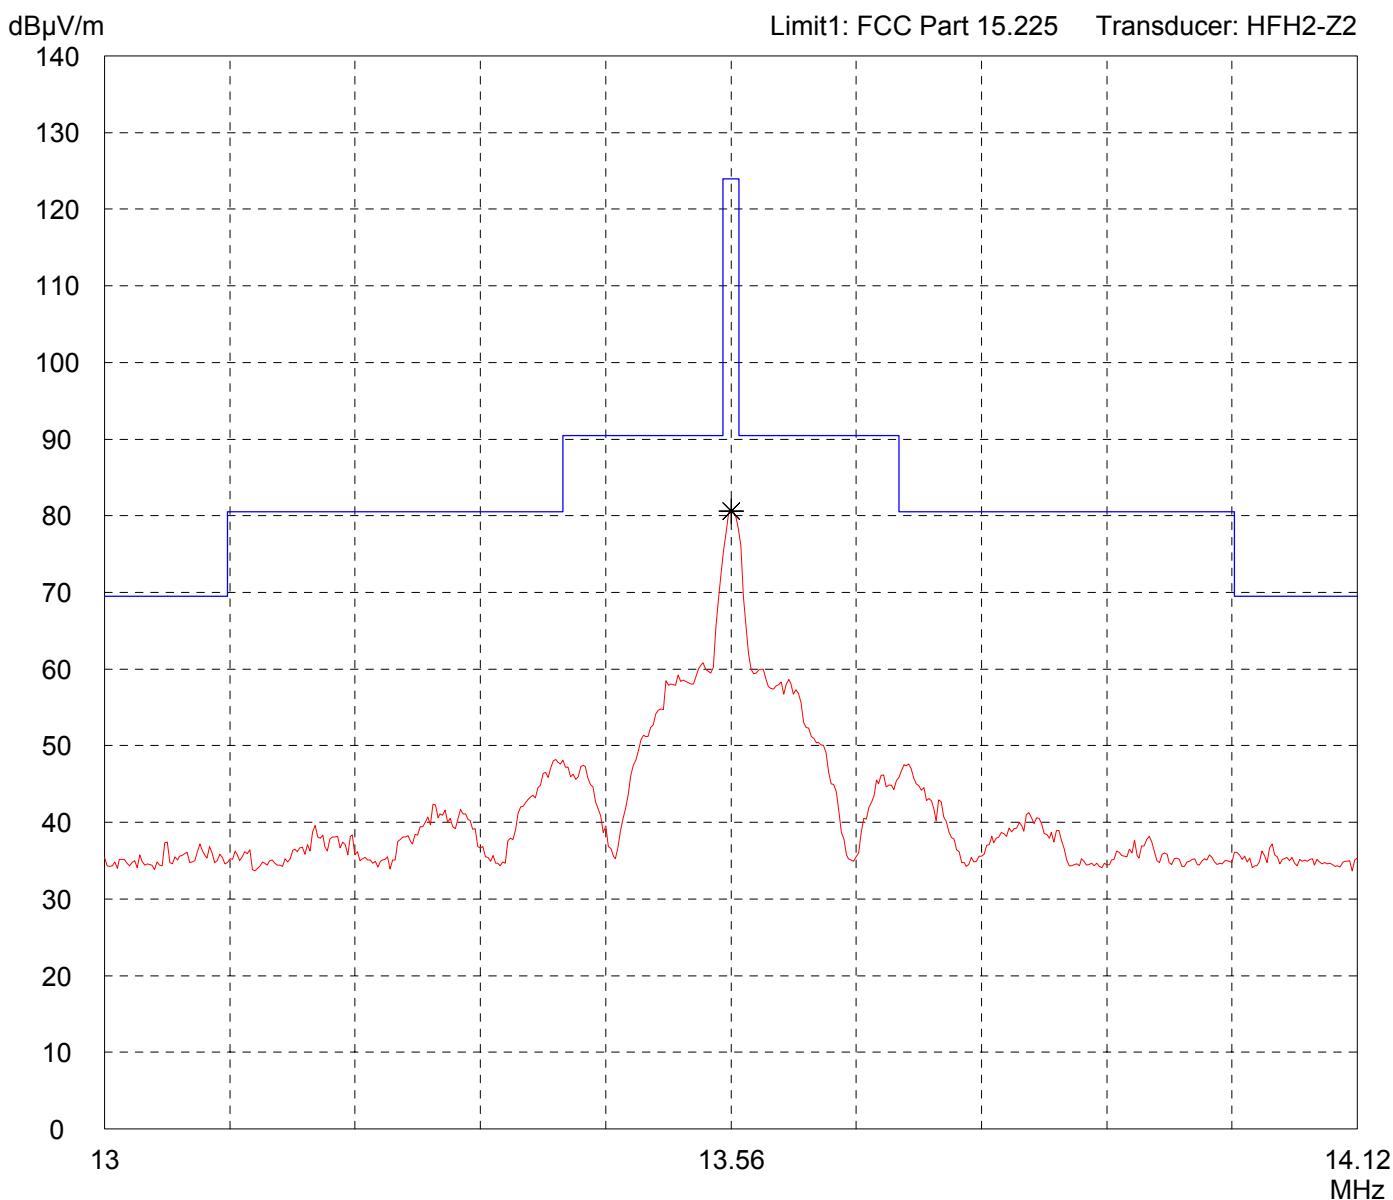

Result: Limit kept

Project file: 51905-81204-5


Radiated Emission Test 13 MHz - 14.12 MHz acc. to FCC Part 15.225 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - withTAG (ISO) - Reading distance 70 % - TX pow. : 2W
--

Detector: Peak

List of values: Selected by hand

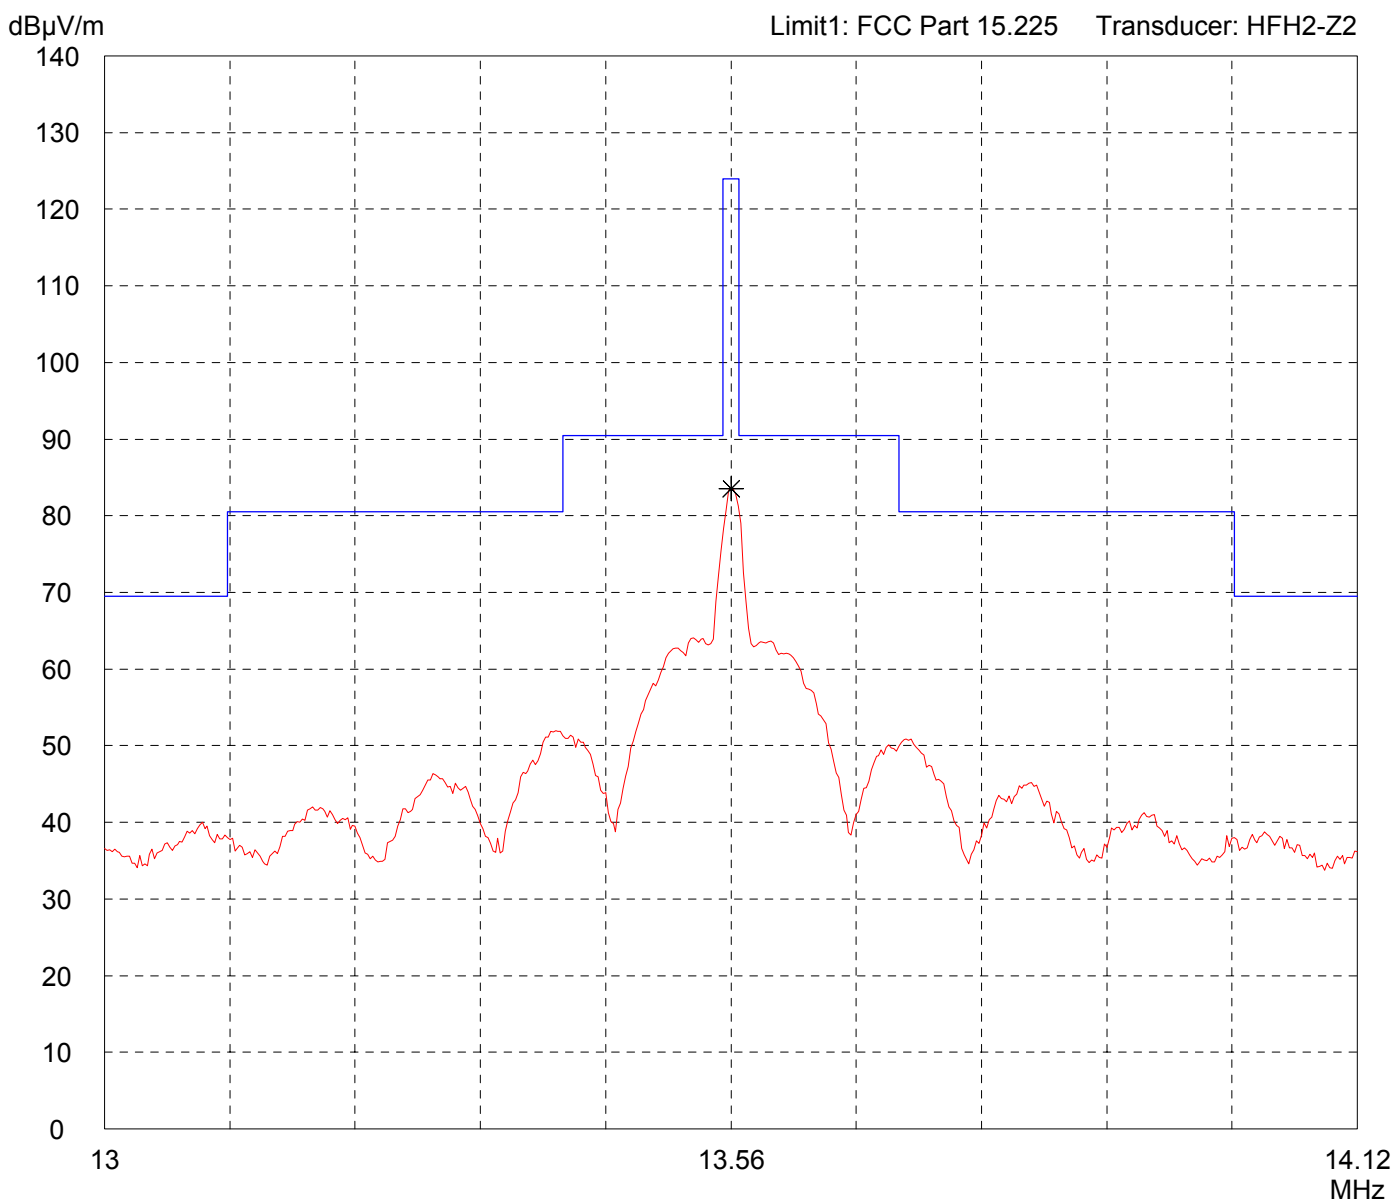

Result: Limit kept

Project file: 51905-81204-5


Radiated Emission Test 13 MHz - 14.12 MHz acc. to FCC Part 15.225 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - without TAG (ISO) - TX pow. : 2W

Detector: Peak

List of values: Selected by hand

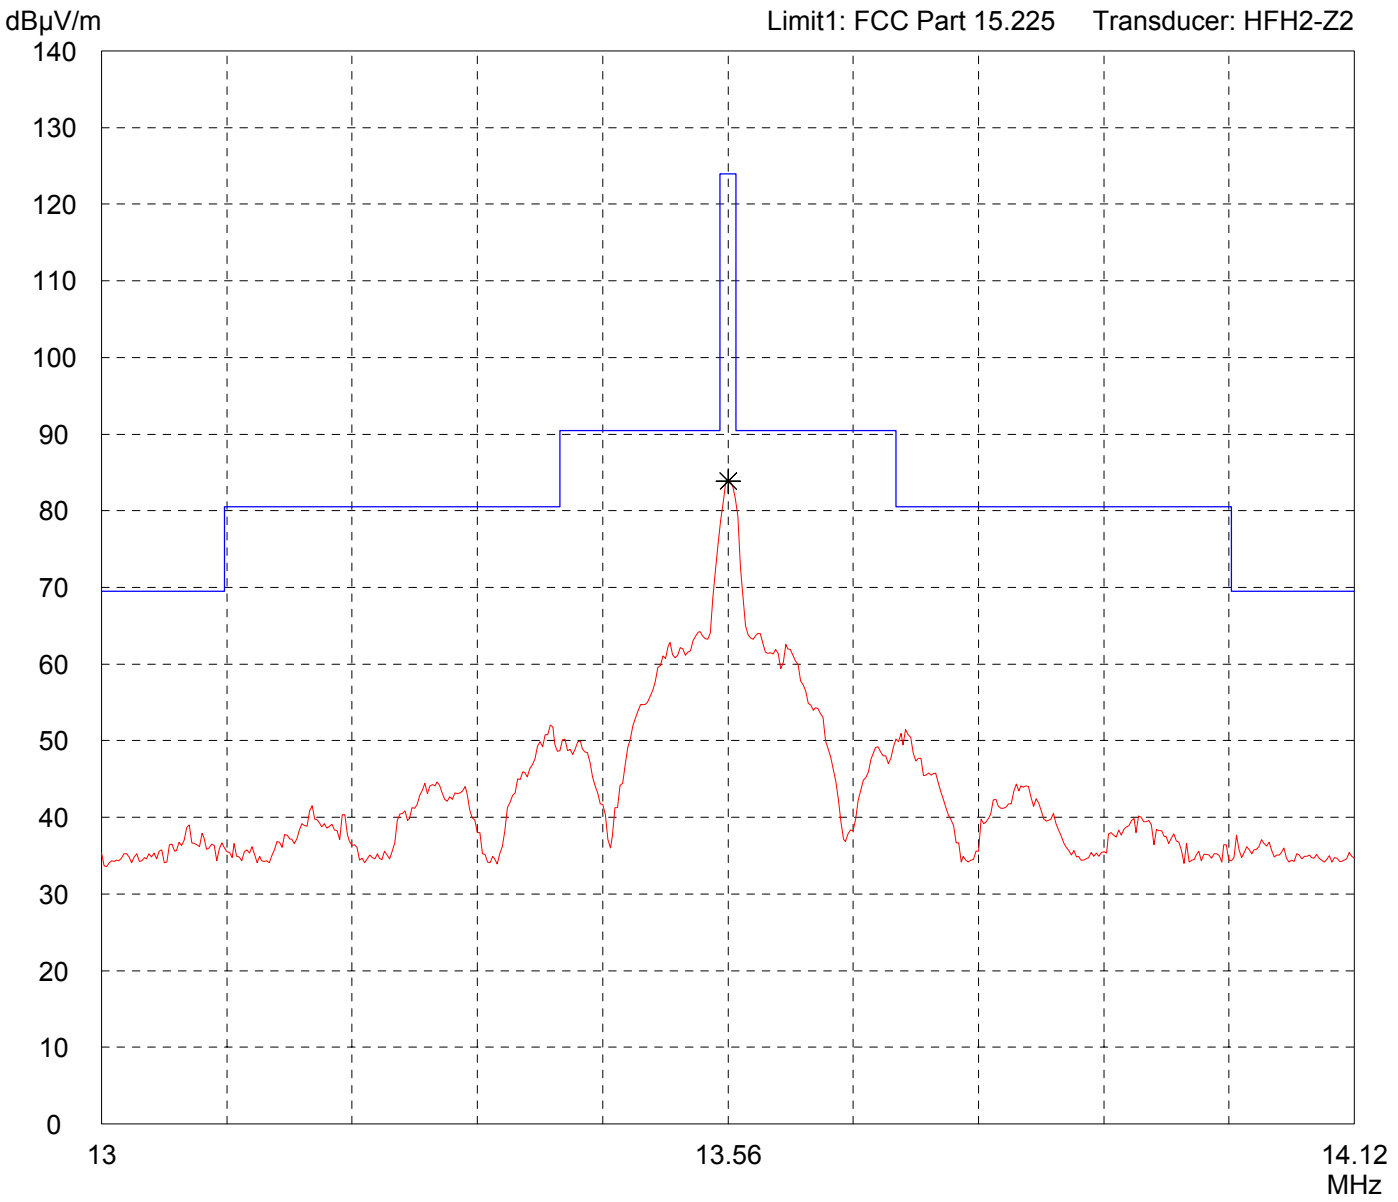

Result: Limit kept

Project file: 51905-81204-5


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/24/2008	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Comment: - withoutTAG (ISO) - Reading distance 70 % - TX pow. : 1W

Detector: Peak

List of values: Selected by hand

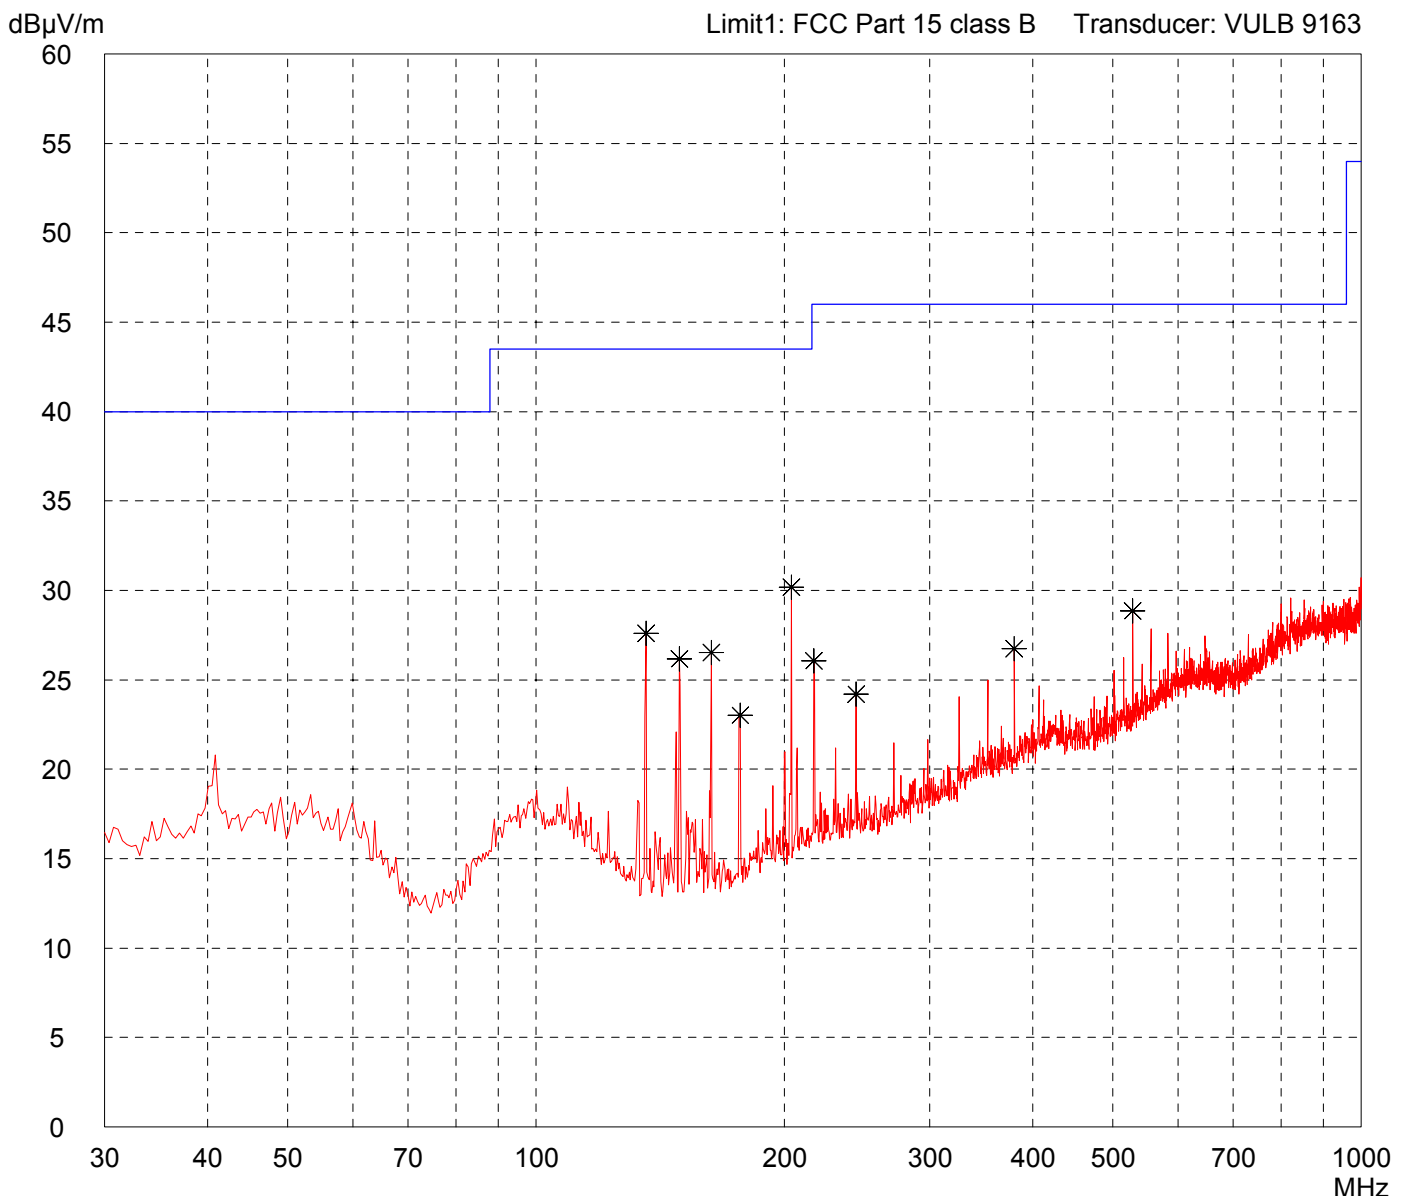

Result: Prescan

Project file: 50243-81204-5


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/24/2008	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Comment: - withoutTAG (ISO) - TX pow. : 1W
--

Detector: Peak

List of values: Selected by hand

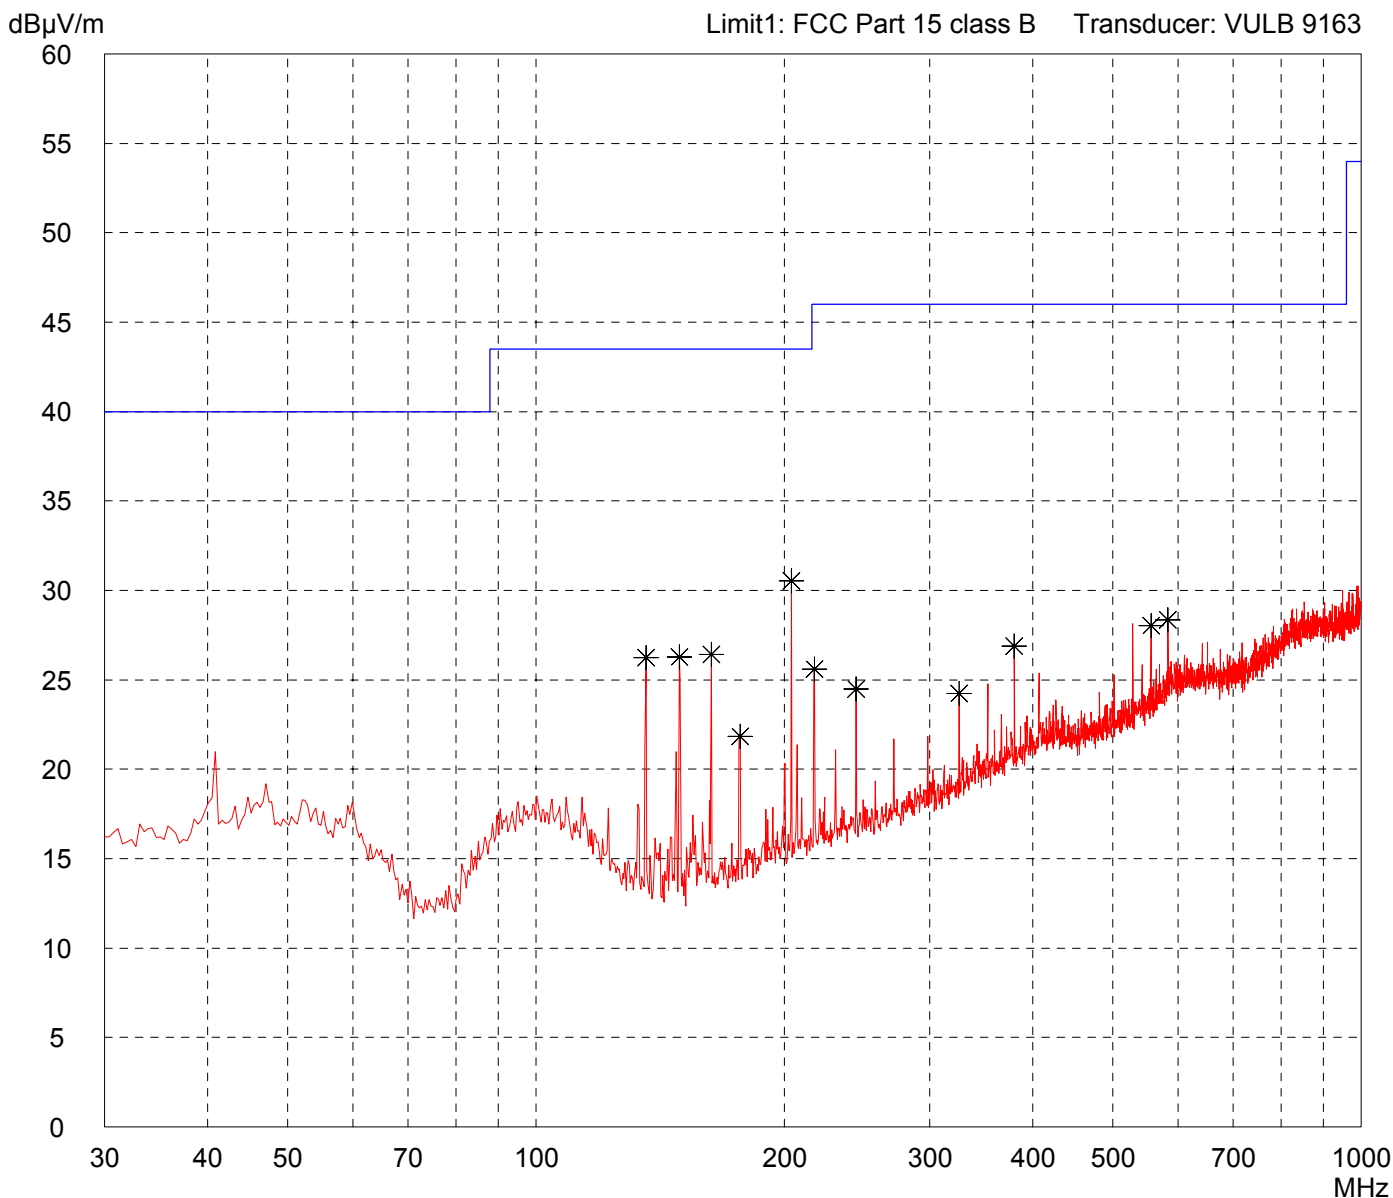

Result: Prescan

Project file: 50243-81204-5


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/24/2008	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Comment: - withoutTAG (ISO) - Reading distance 70 % - TX pow. : 1W

Detector: Peak

List of values: Selected by hand

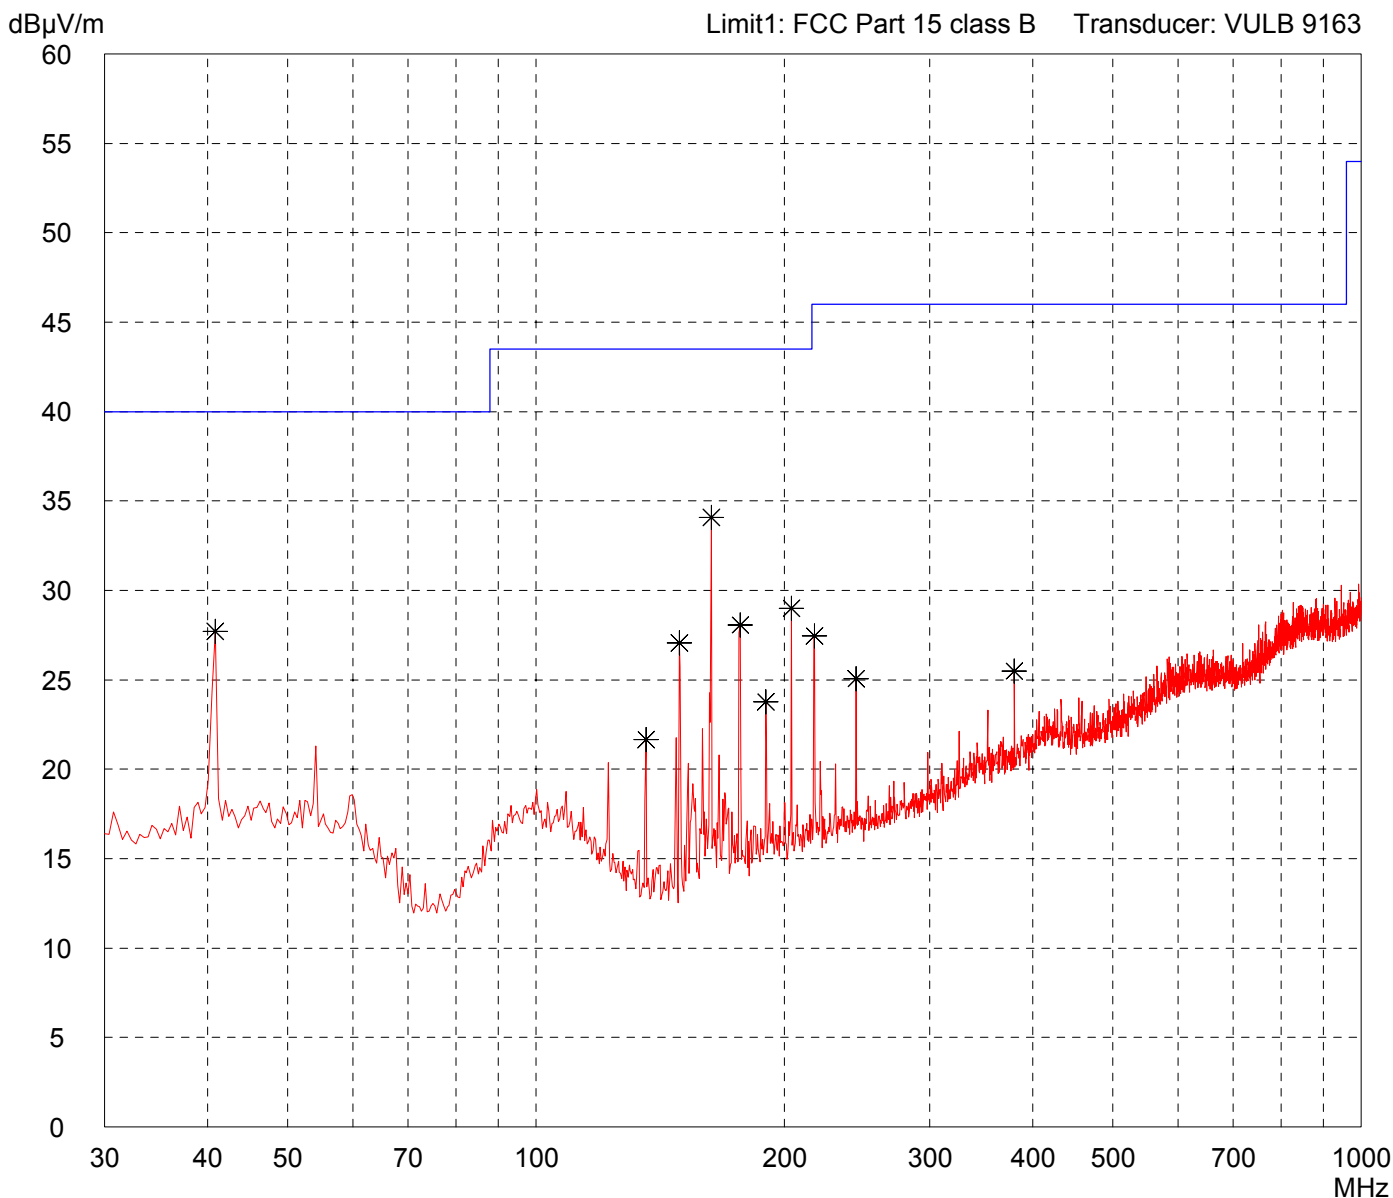

Result: Prescan

Project file: 50243-81204-5


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/24/2008	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Comment: - withoutTAG (ISO) - TX pow. : 1W
--

Detector: Peak

List of values: Selected by hand

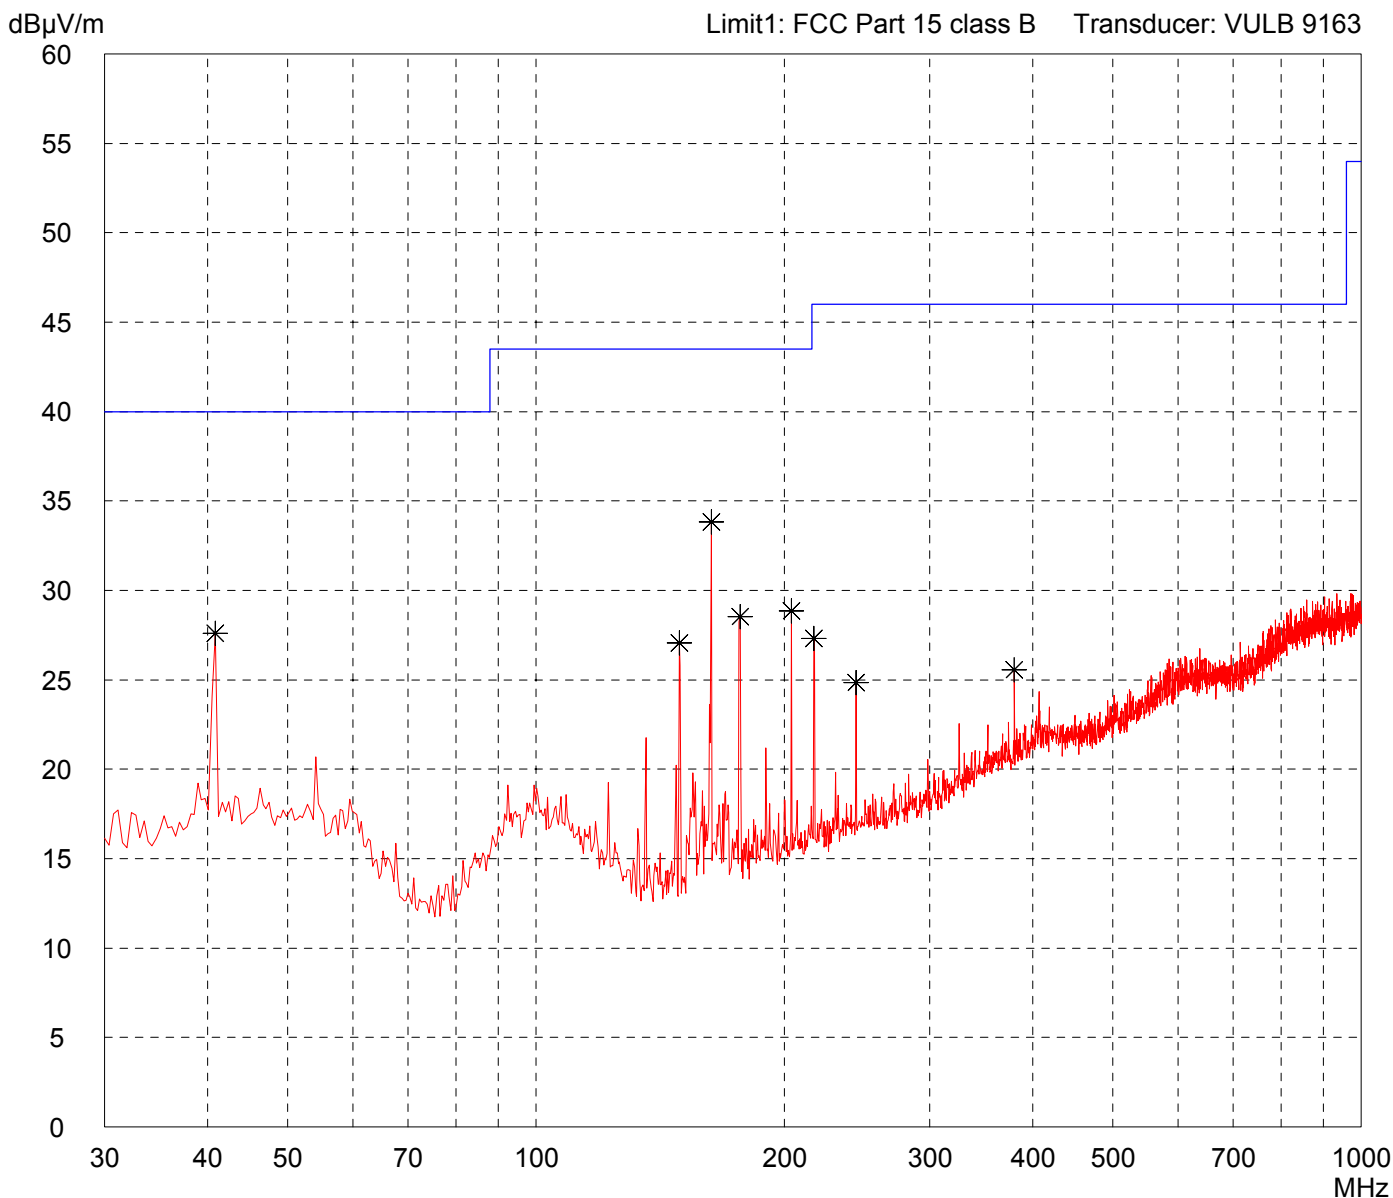

Result: Prescan

Project file: 50243-81204-5


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/24/2008	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Comment: - withTAG (ISO) - Reading distance 70 % - TX pow. : 2 W

Detector: Peak

List of values: Selected by hand

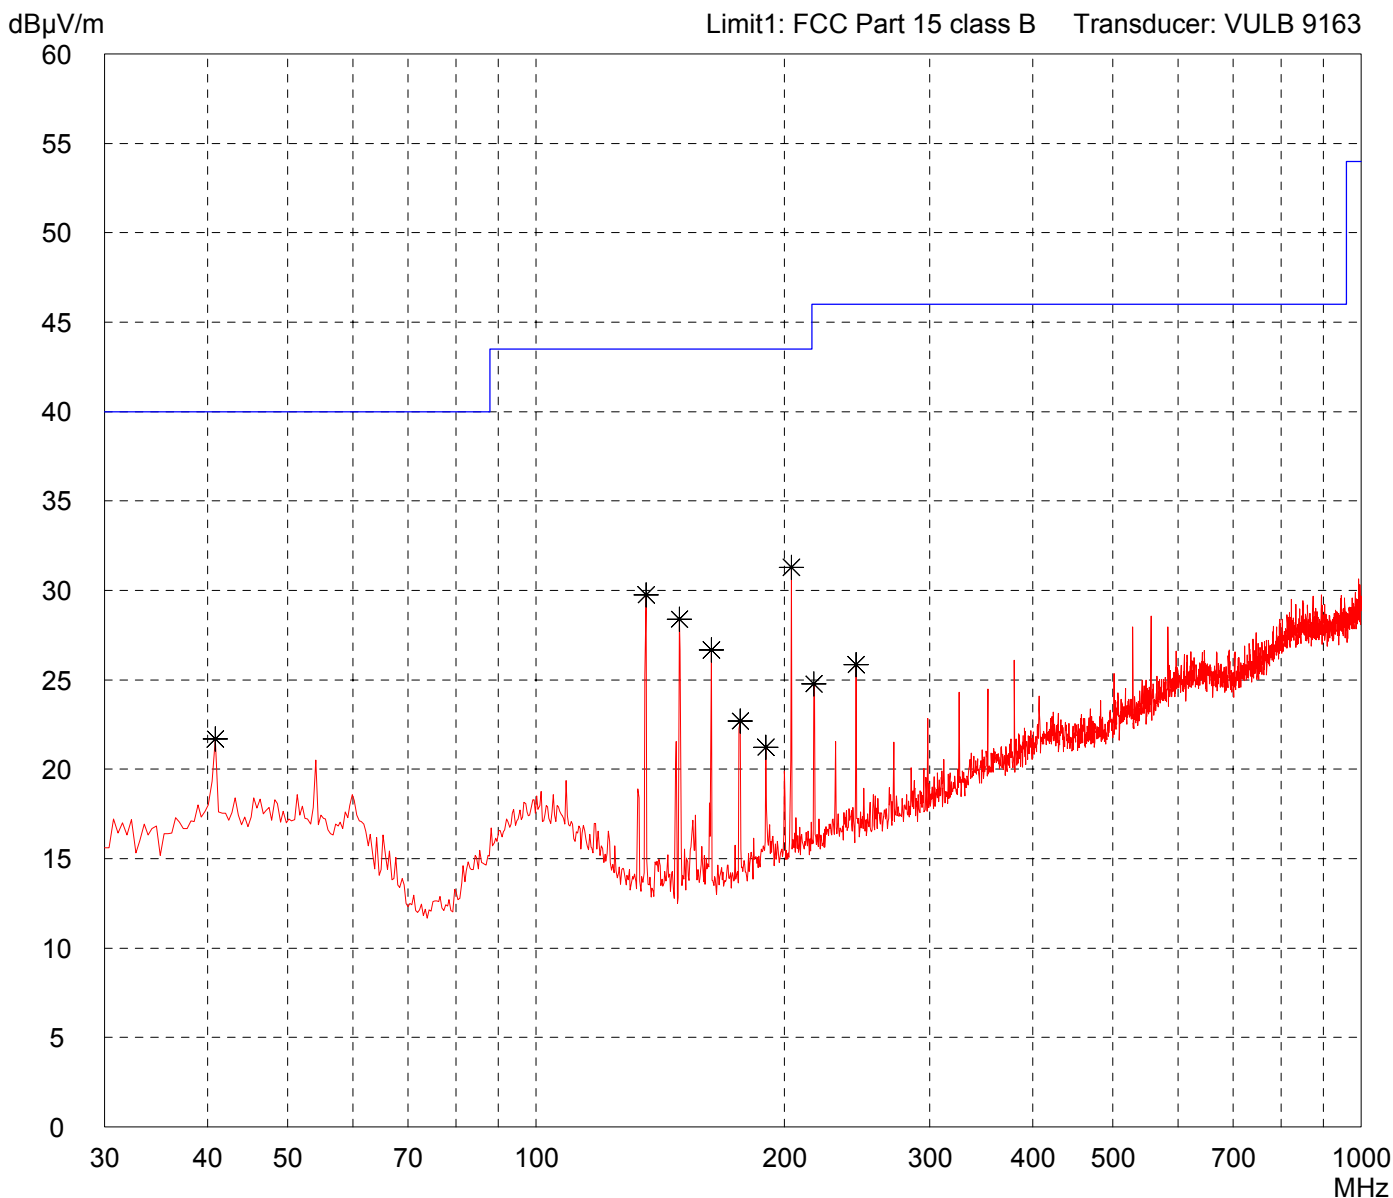

Result: Prescan

Project file: 50243-81204-5

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/24/2008	Operator: T. Eberl
Test performed: automatically	File name: default.emi


Comment:

- withoutTAG (ISO)

- TX pow. : 2W

Detector: Peak

List of values:
Selected by hand

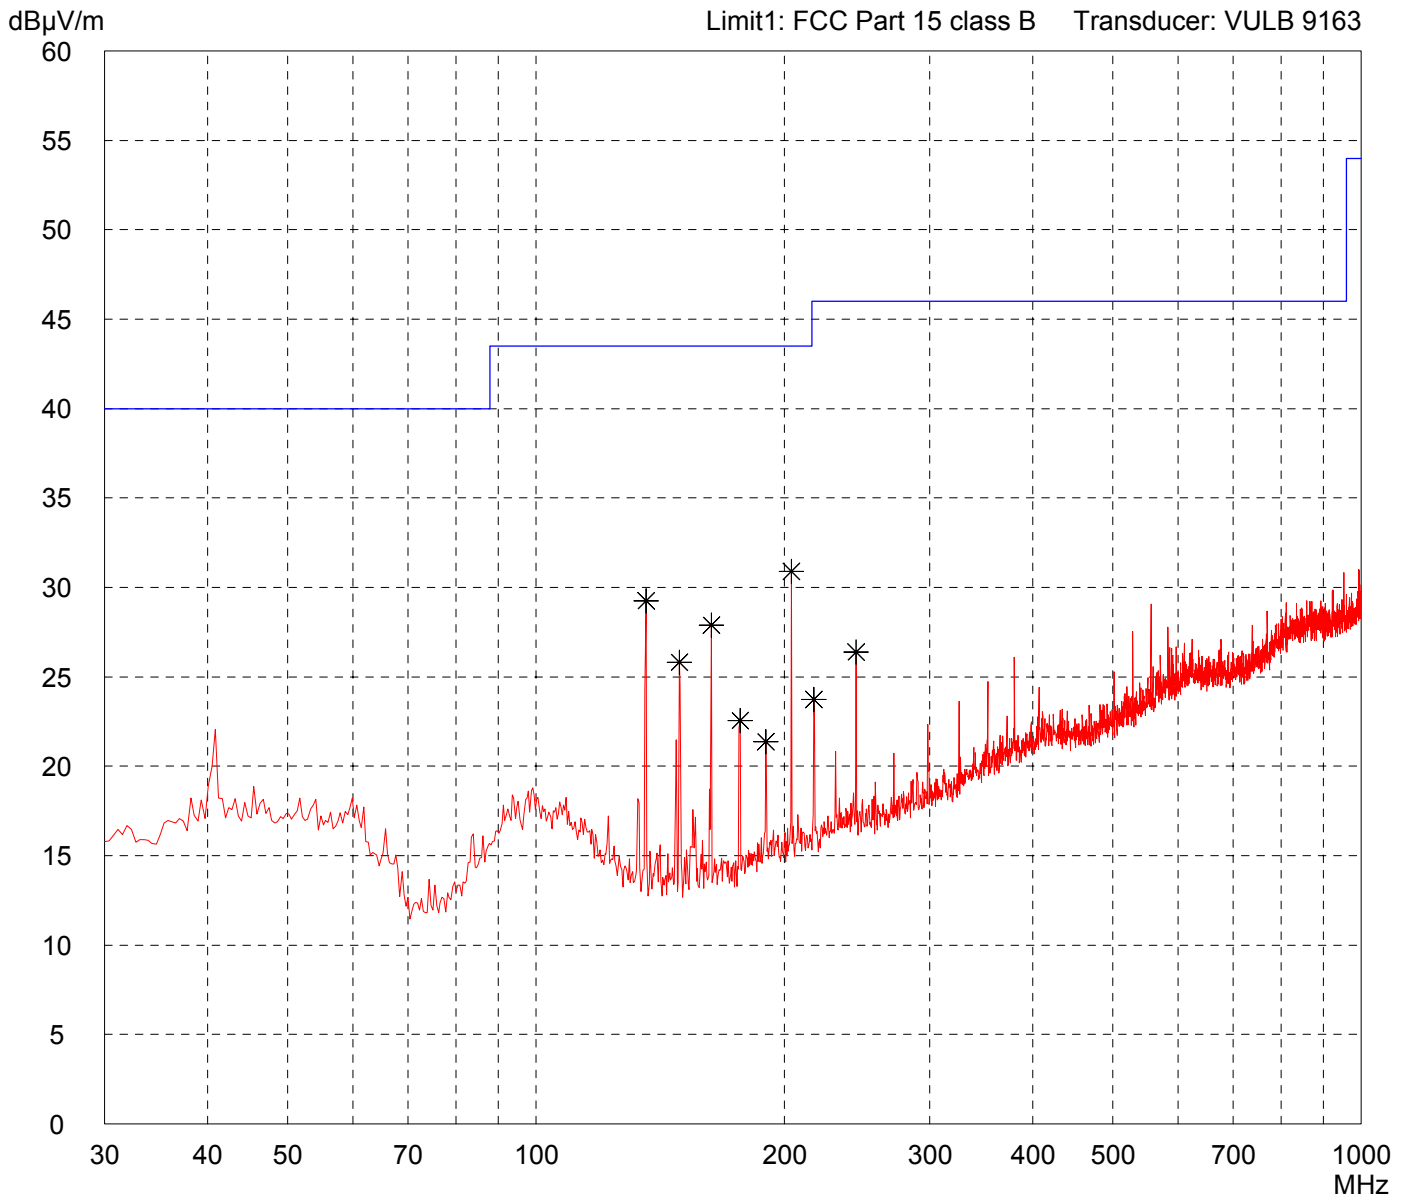

Result: Prescan

Project file: 50243-81204-5


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/24/2008	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Comment: - withTAG (ISO) - Reading distance 70 % - TX pow. : 2 W

Detector: Peak

List of values: Selected by hand

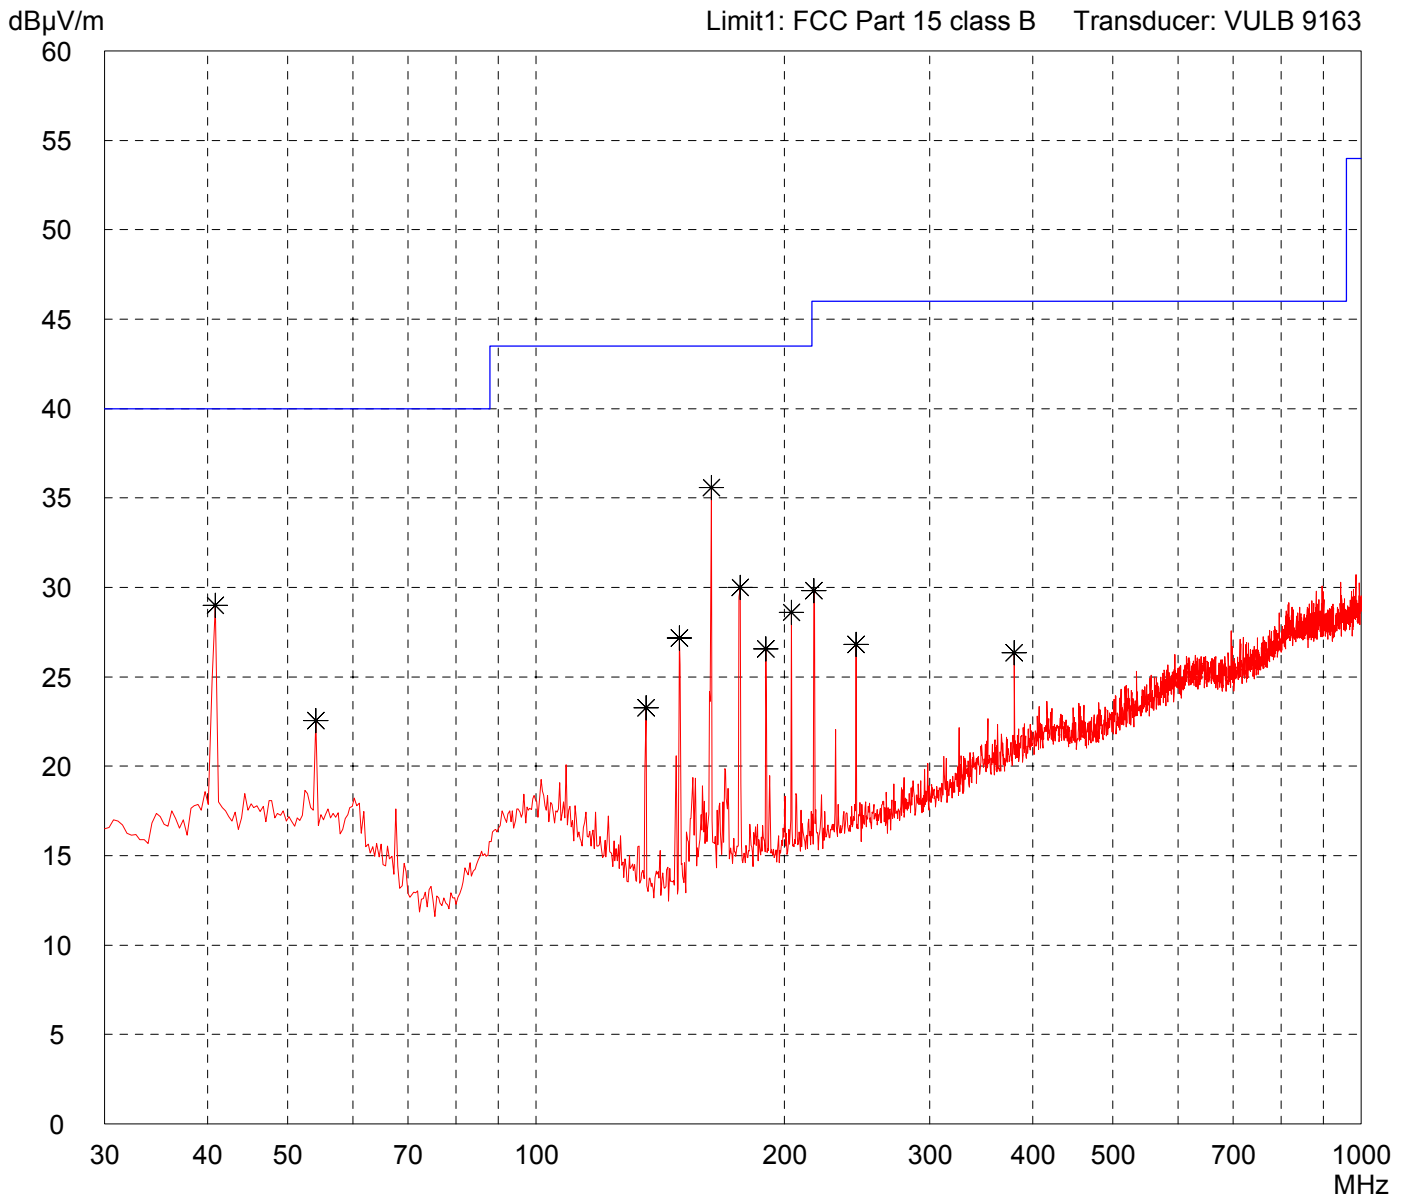

Result: Prescan

Project file: 50243-81204-5

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:
RF380R ISO

Serial no.:

Applicant:
Siemens AG, Fürth

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test:
10/24/2008

Operator:
T. Eberl

Test performed:
automatically

File name:
default.emi

Comment:


- without TAG (ISO)
- Reading distance 70 %
- TX pow. : 2 W

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC Part 15 class B Transducer: VULB 9163

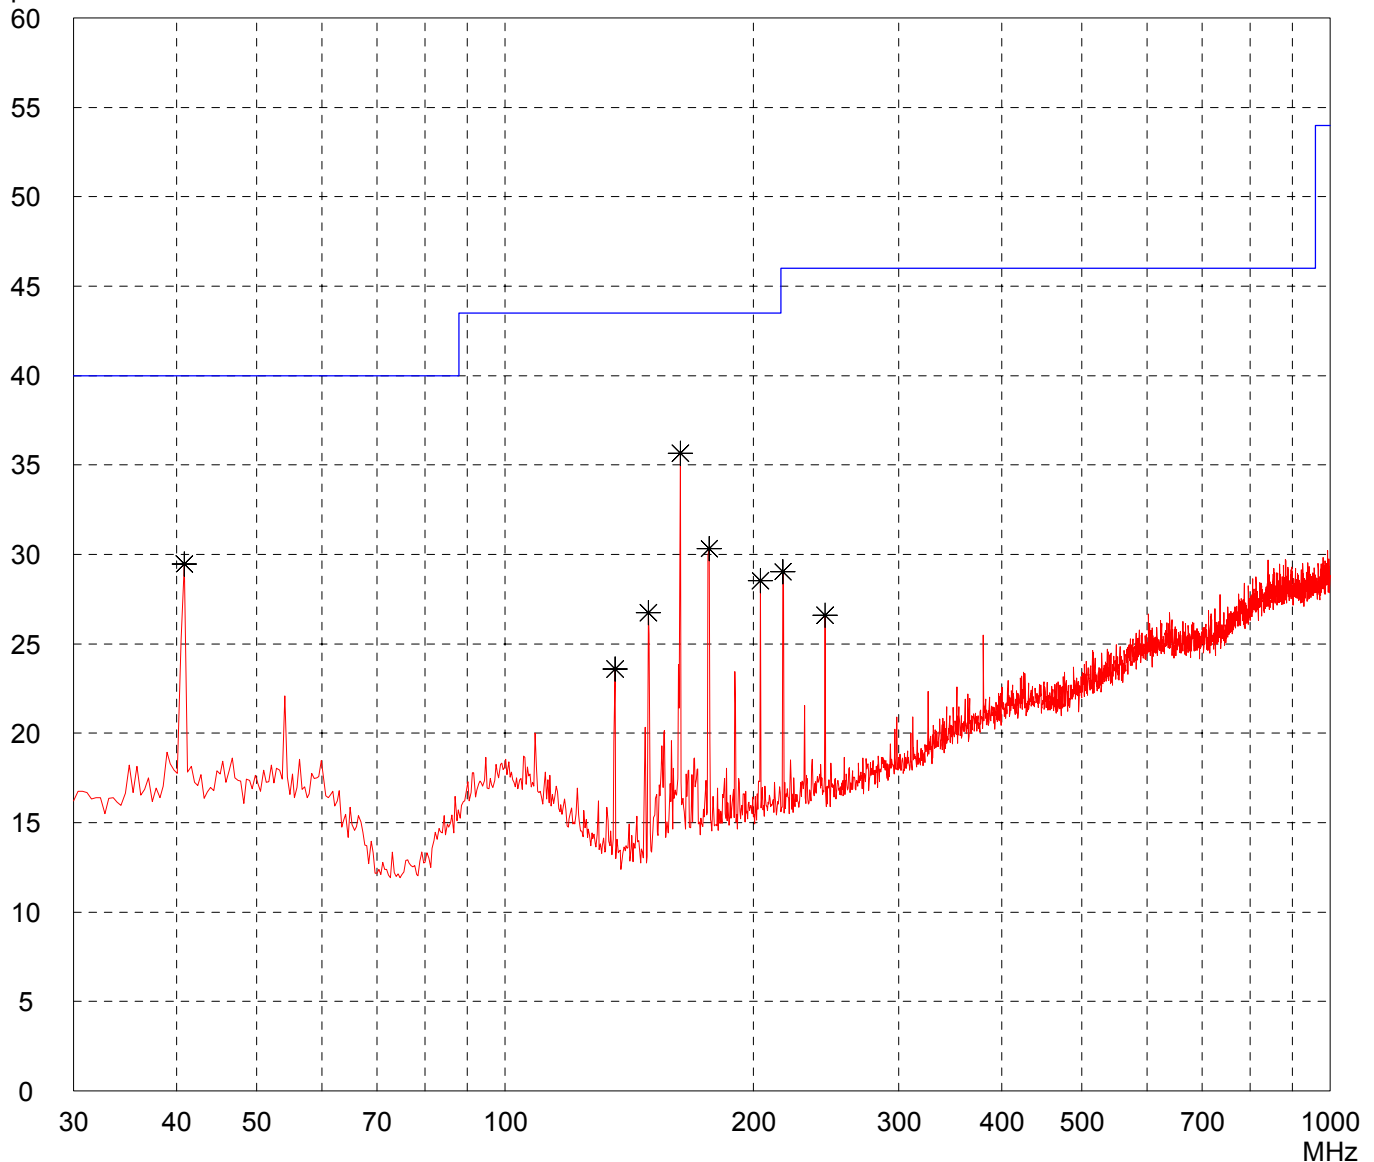

Result:
Prescan

Project file:
50243-81204-5


Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 Subpart C (FAR)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - without TAG (RF300) - Reading distance 70 % - TX pow. : 1W
--

Detector: Peak

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

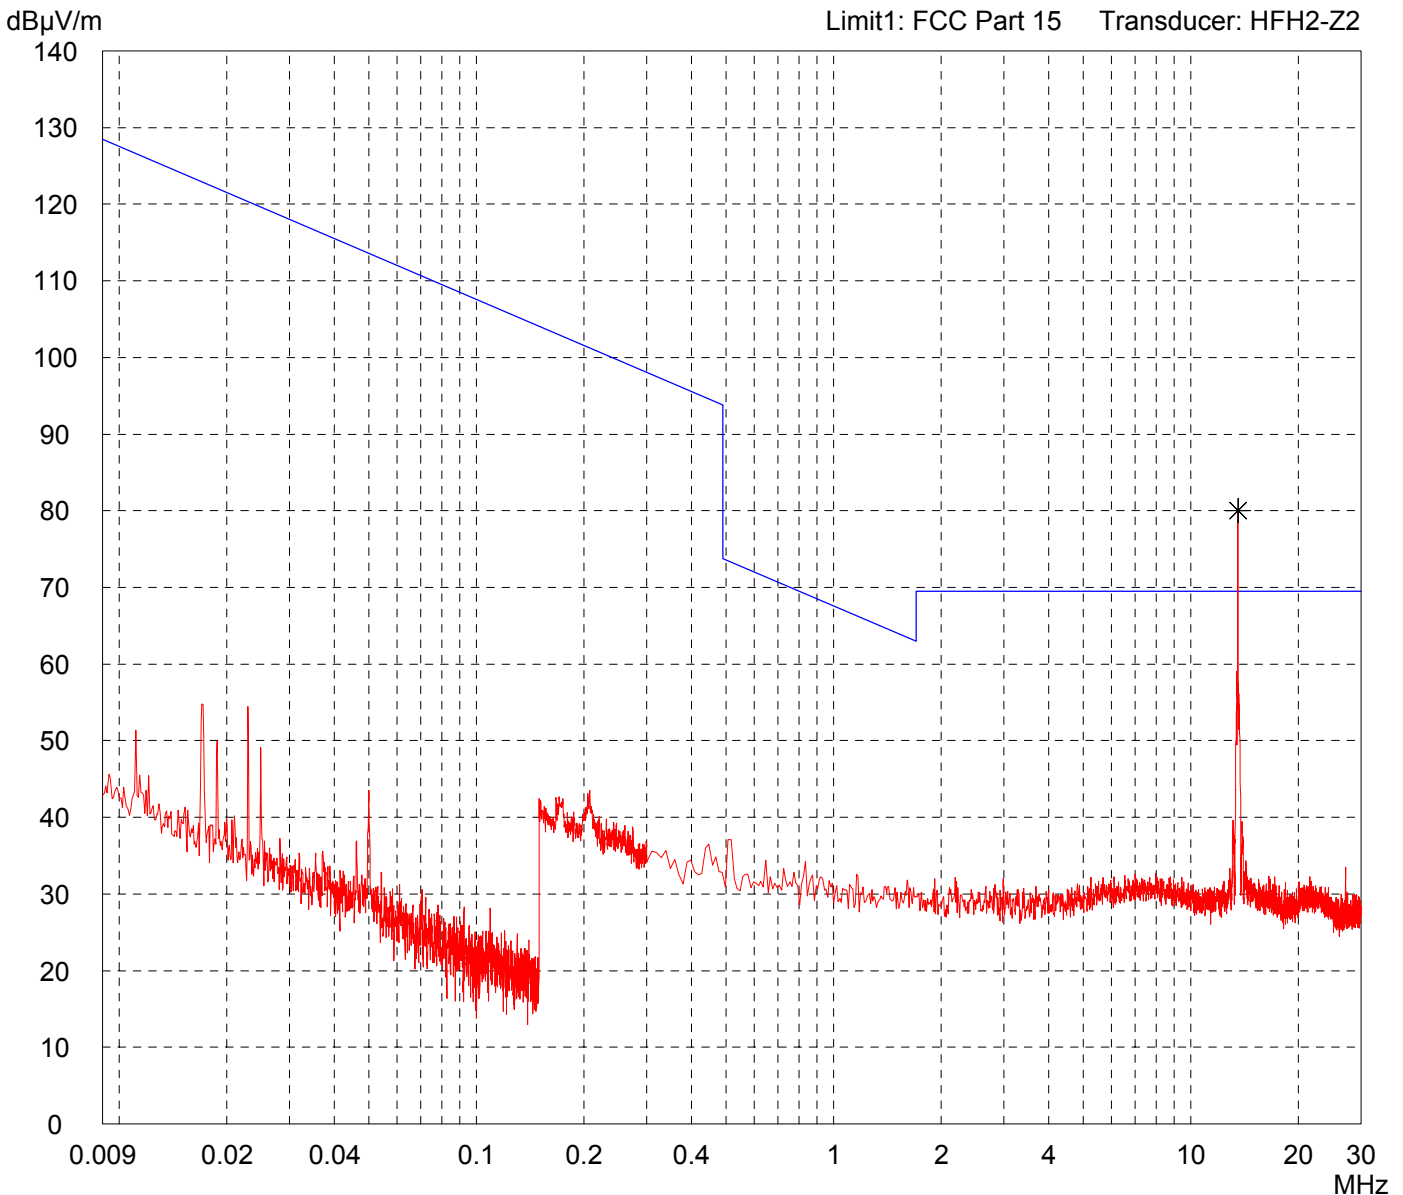

Result: Prescan

Project file: 51905-81204-5


Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 Subpart C (FAR)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - without TAG (RF300) - TX pow. : 1W	
---	--

Detector: Peak

List of values: 10 dB Margin	50 Subranges
---------------------------------	--------------

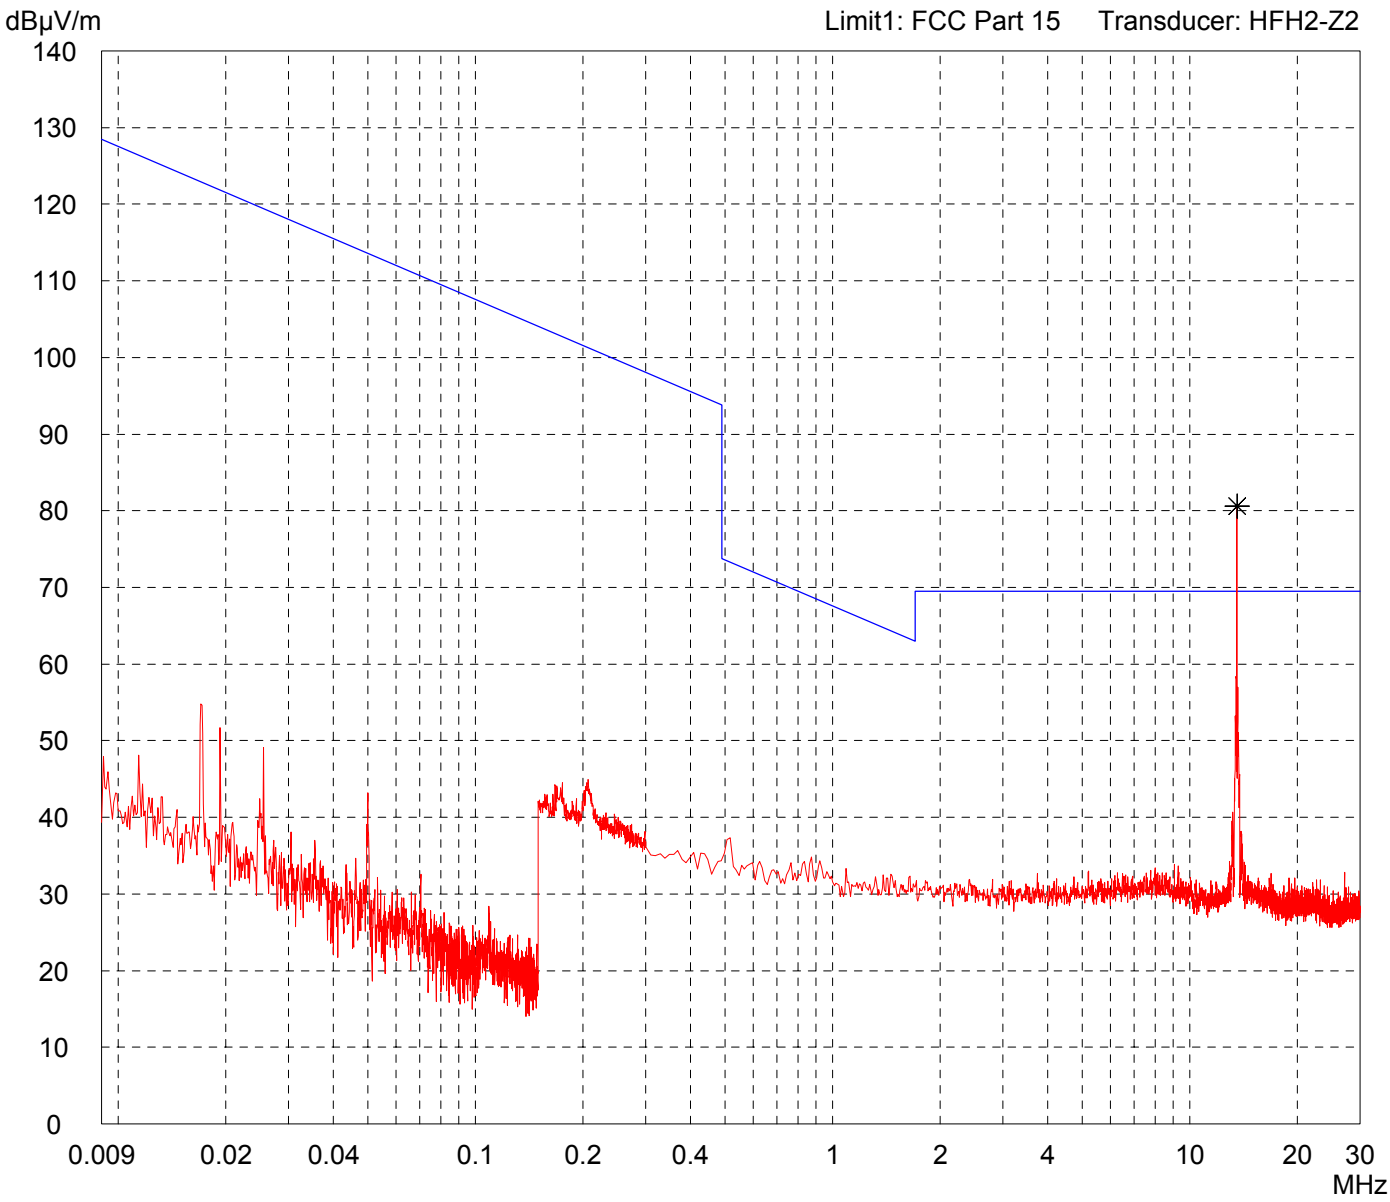

Result: Prescan

Project file: 51905-81204-5


Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 Subpart C (FAR)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - with TAG (RF300) - Reading distance 70 % - TX pow. : 2W

Detector: Peak

List of values: Selected by hand

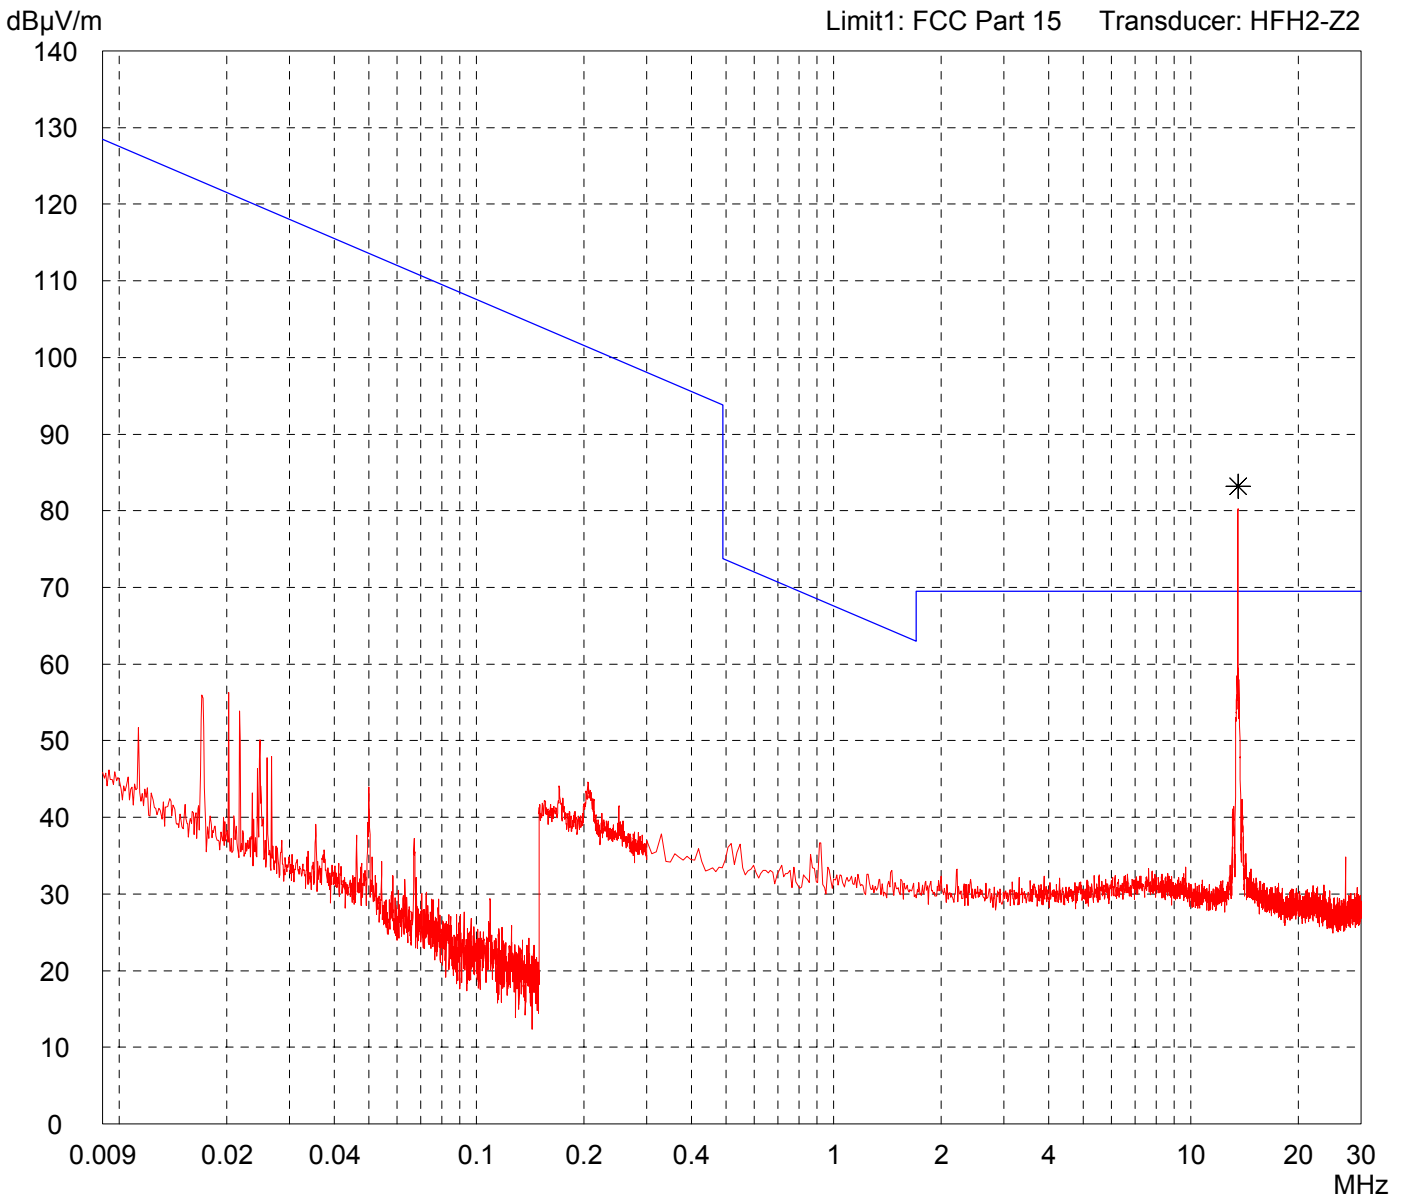

Result: Prescan

Project file: 51905-81204-5


Radiated Emission Test 9 kHz - 30 MHz acc. to FCC Part 15 Subpart C (FAR)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - without TAG (RF300) - TX pow. : 2W

Detector: Peak

List of values: Selected by hand

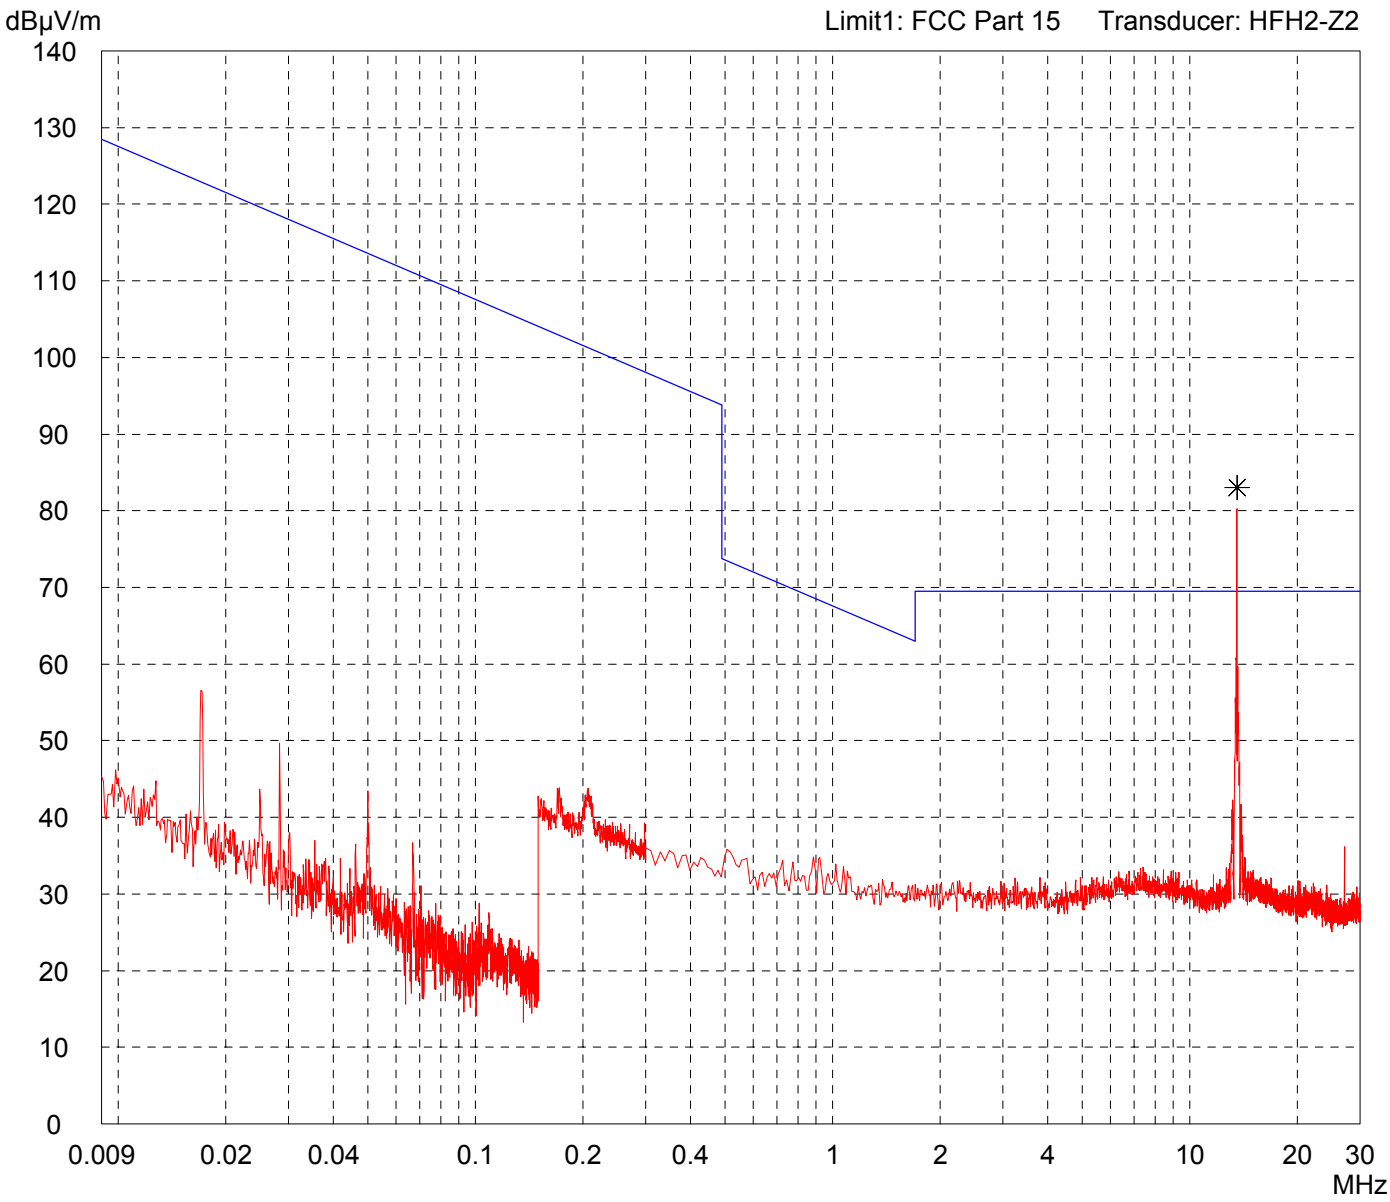

Result: Prescan

Project file: 51905-81204-5


Radiated Emission Test 13 MHz - 14.12 MHz acc. to FCC Part 15.225 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - with TAG (RF360T) Reading distance 70 % - TX pow. : 1W
--

Detector: Peak

List of values: Selected by hand

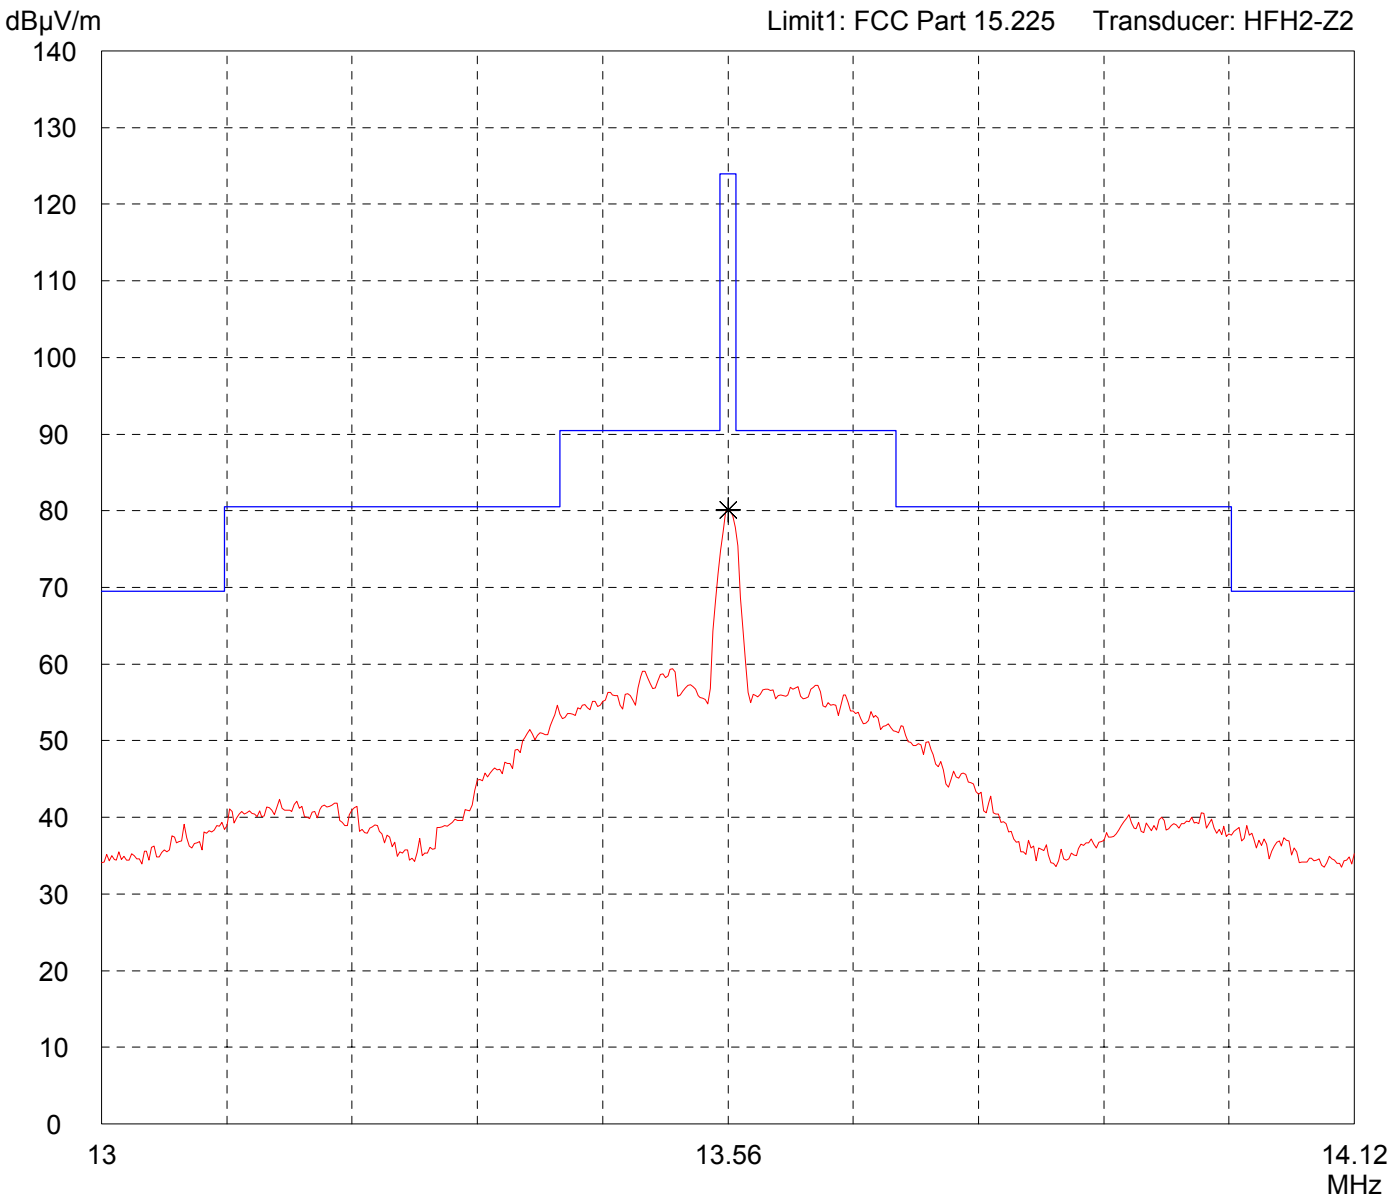

Result: Limit kept

Project file: 51905-81204-5


Radiated Emission Test 13 MHz - 14.12 MHz acc. to FCC Part 15.225 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - withoutTAG (RF360T) - TX pow. : 1W

Detector: Peak

List of values: Selected by hand

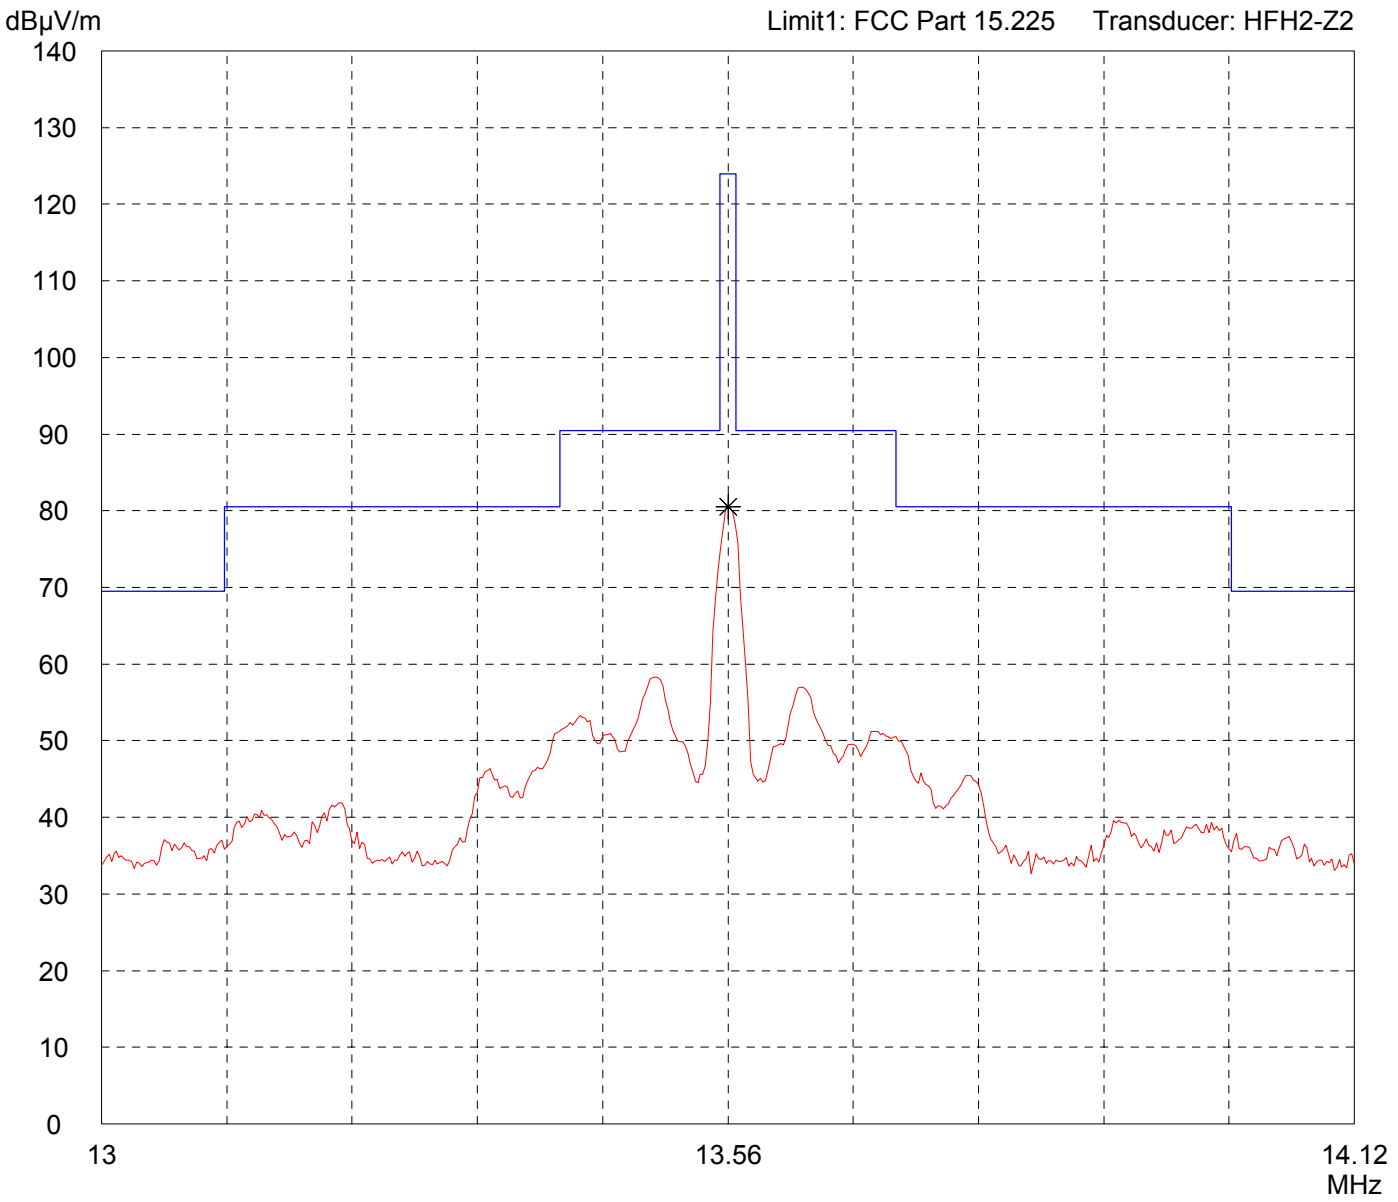

Result: Limit kept

Project file: 51905-81204-5


Radiated Emission Test 13 MHz - 14.12 MHz acc. to FCC Part 15.225 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - withTAG (RF360T) - Reading distance 70 % - TX pow. : 2W

Detector: Peak

List of values: Selected by hand

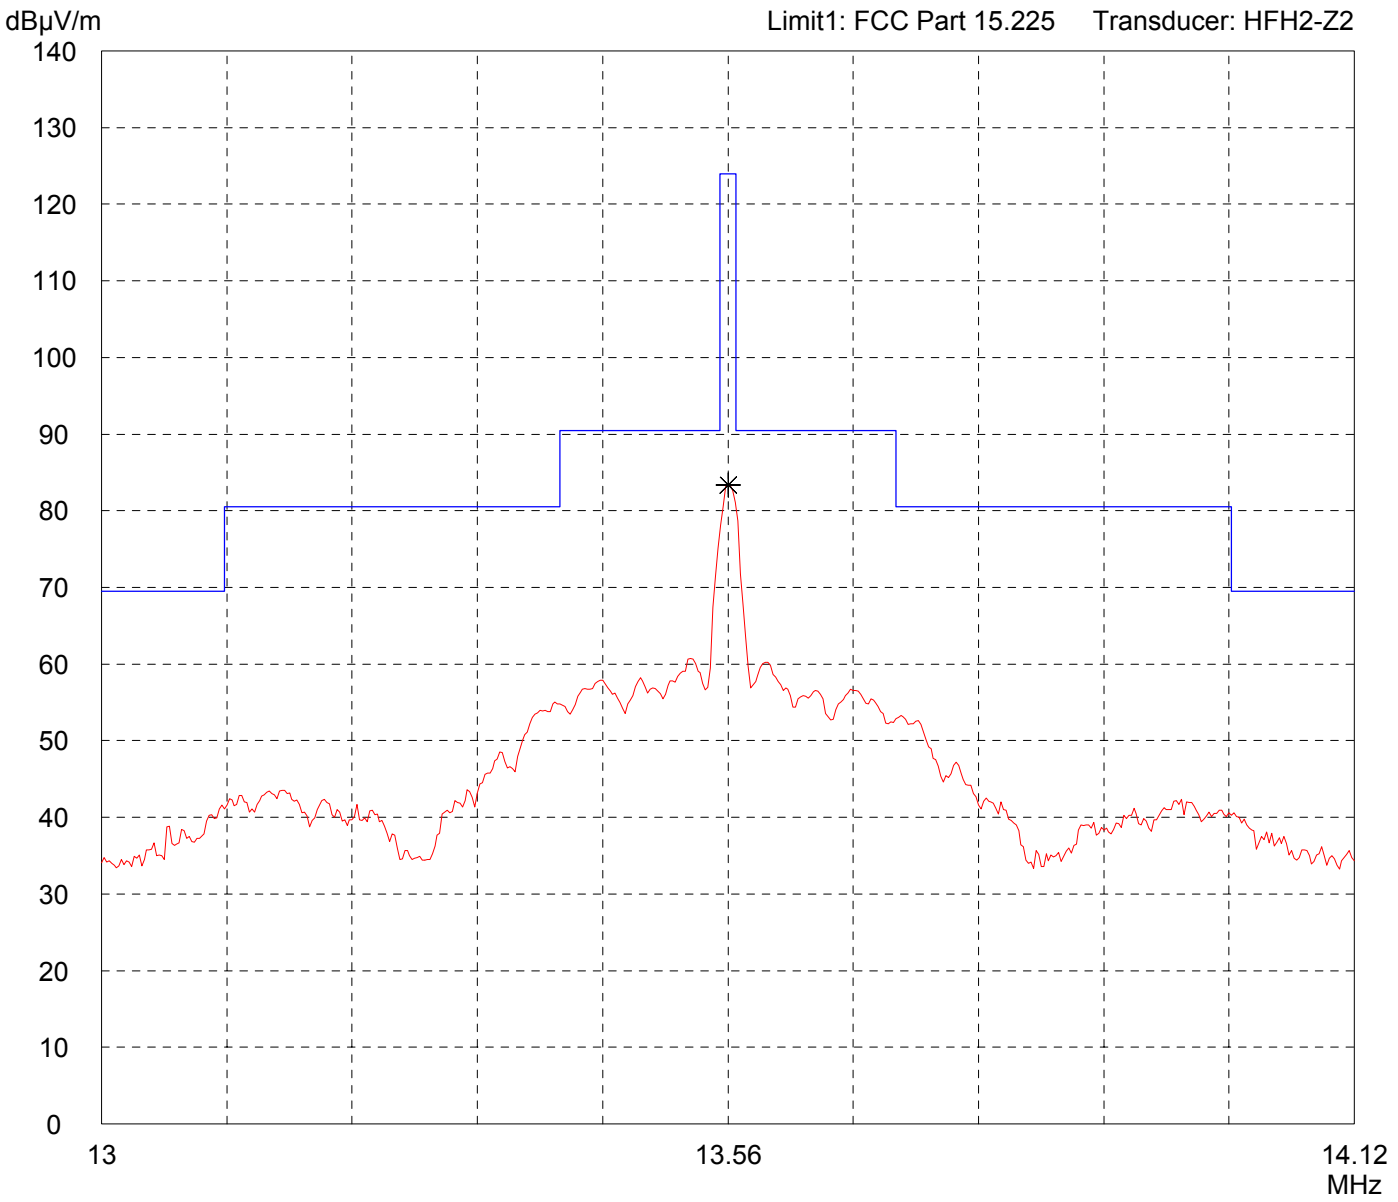

Result: Limit kept

Project file: 51905-81204-5


Radiated Emission Test 13 MHz - 14.12 MHz acc. to FCC Part 15.225 (Fully Anechoic Chamber)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 10/29/2008	Operator: T. Eberl
Test performed: by hand	File name: default.emi

Comment: - withoutTAG (RF360T) - TX pow. : 2W

Detector: Peak

List of values: Selected by hand

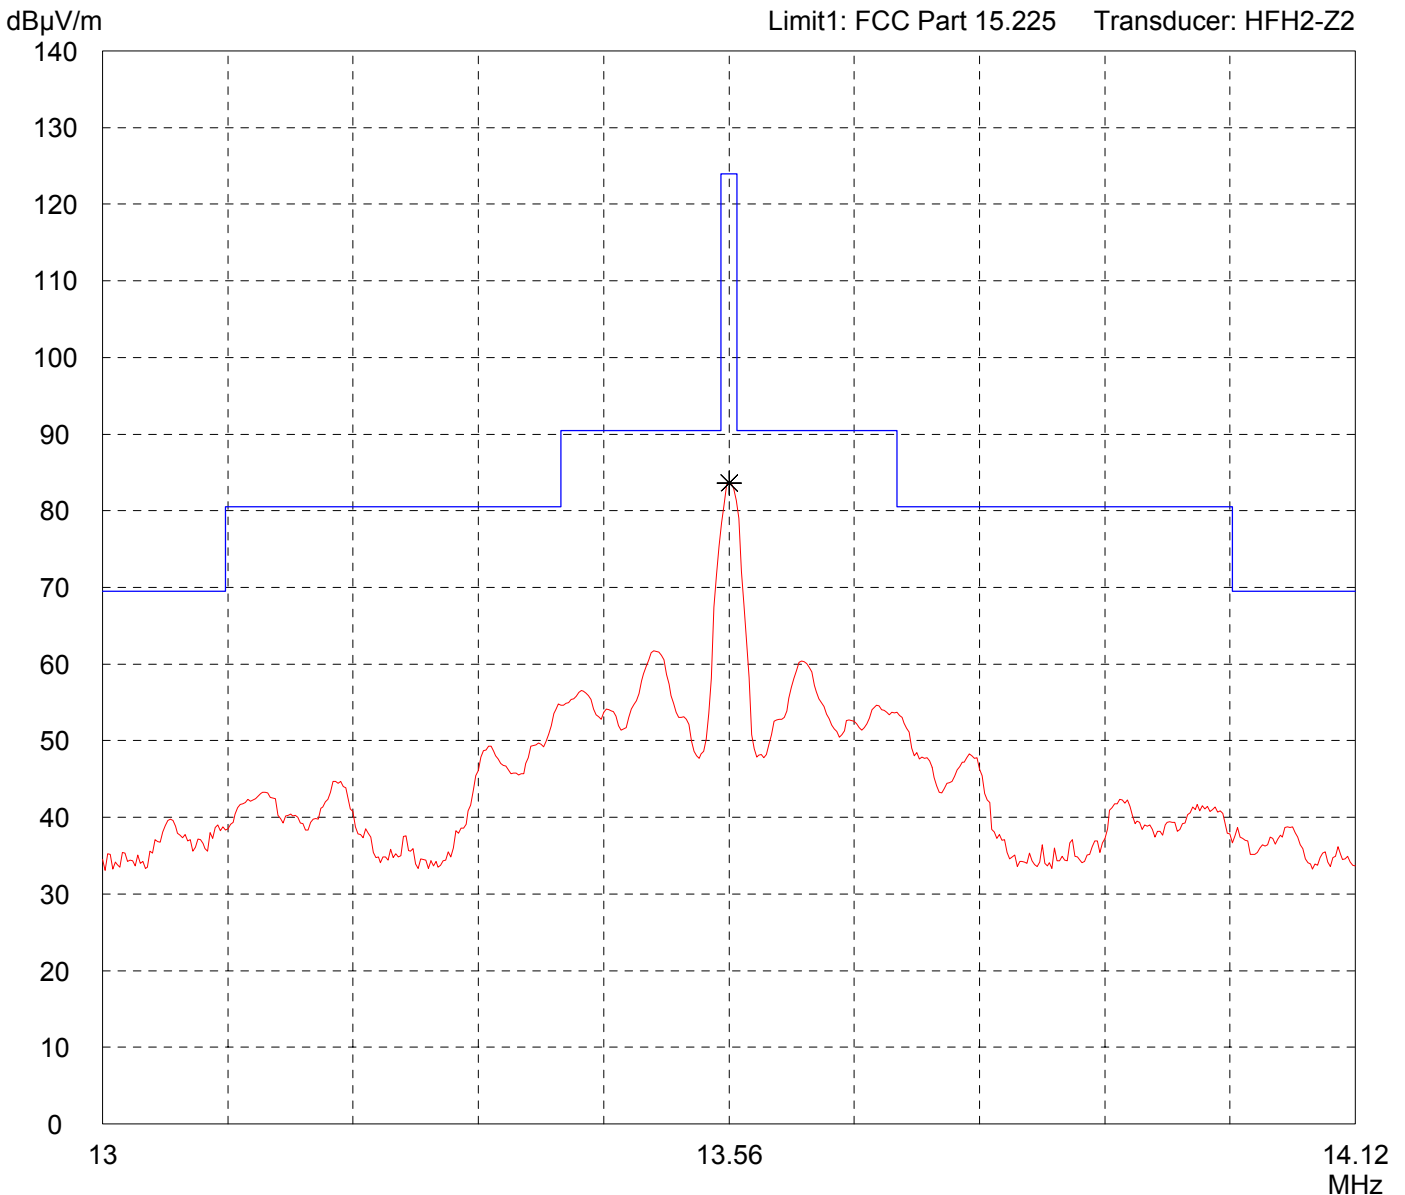

Result: Limit kept

Project file: 51905-81204-5

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)

Model:
RF380R ISO

Serial no.:

Applicant:
Siemens AG, Fürth

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
10/16/2008

Operator:
T. Eberl

Test performed:
automatically

File name:
default.emi

Comment:


- withTAG (RF360T)
- Reading distance 70 %
- TX pow. : 1 W

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC 15.209 (3 m) Transducer: VULB 9163

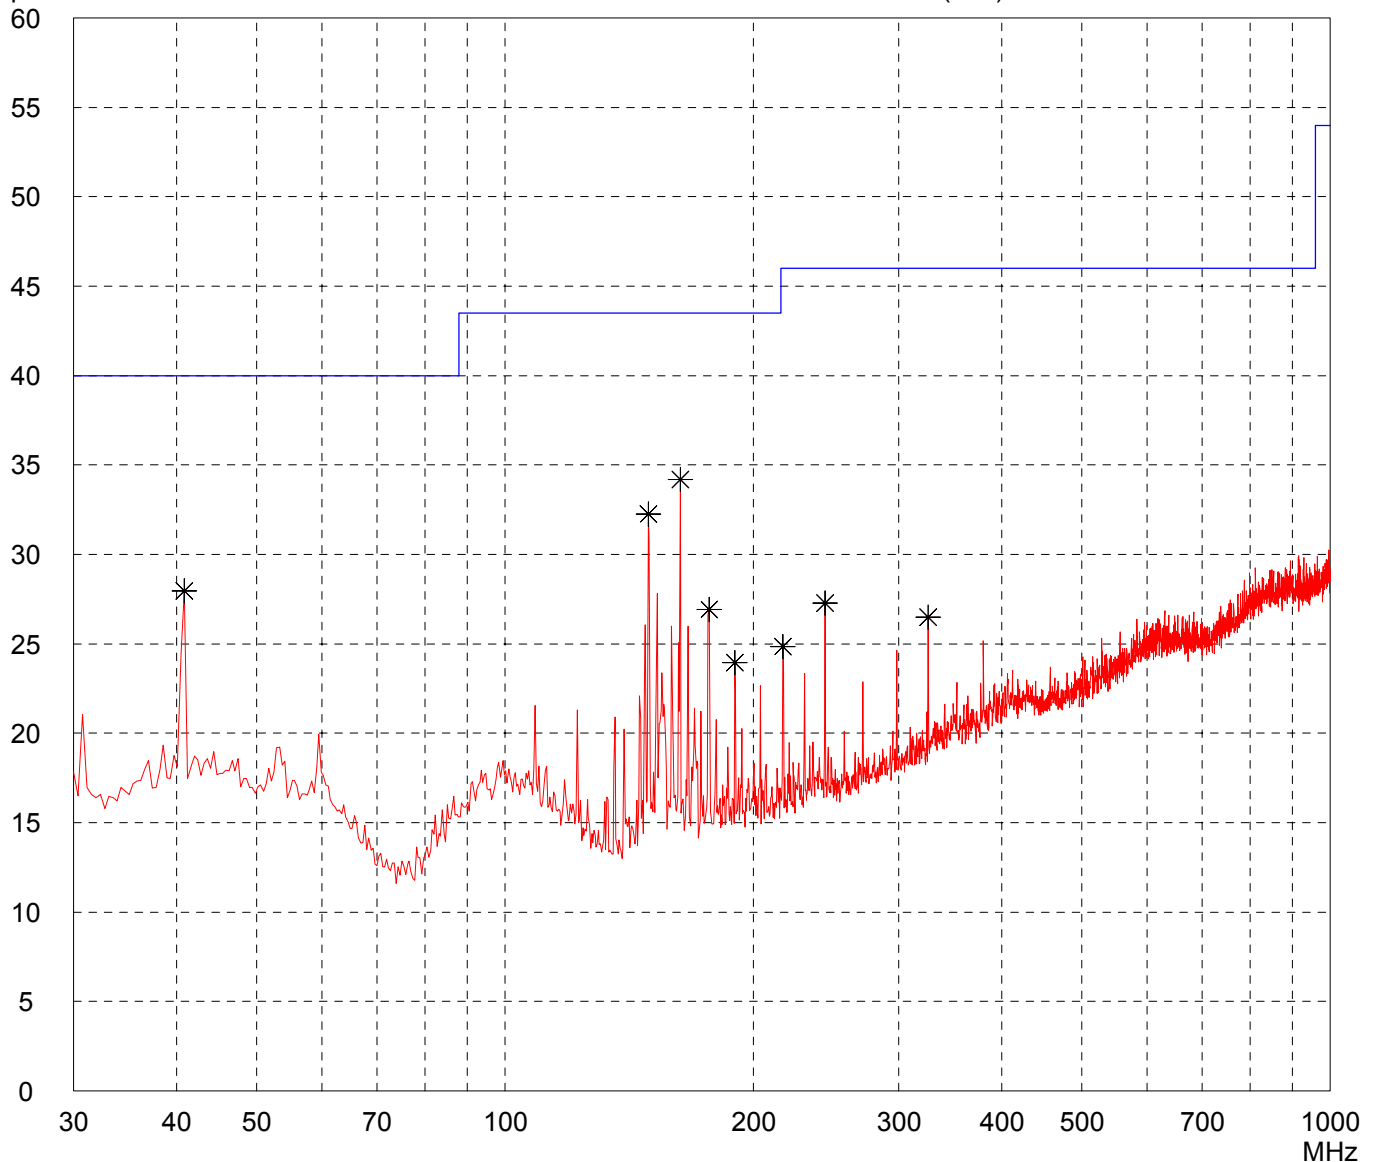

Result:
Prescan

Project file:
51905-81204-5

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)

Model:
RF380R ISO

Serial no.:

Applicant:
Siemens AG, Fürth

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
10/16/2008

Operator:
T. Eberl

Test performed:
automatically

File name:
default.emi

Comment:

-- without TAG (RF360T)


- TX pow. : 1 W

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC 15.209 (3 m) Transducer: VULB 9163

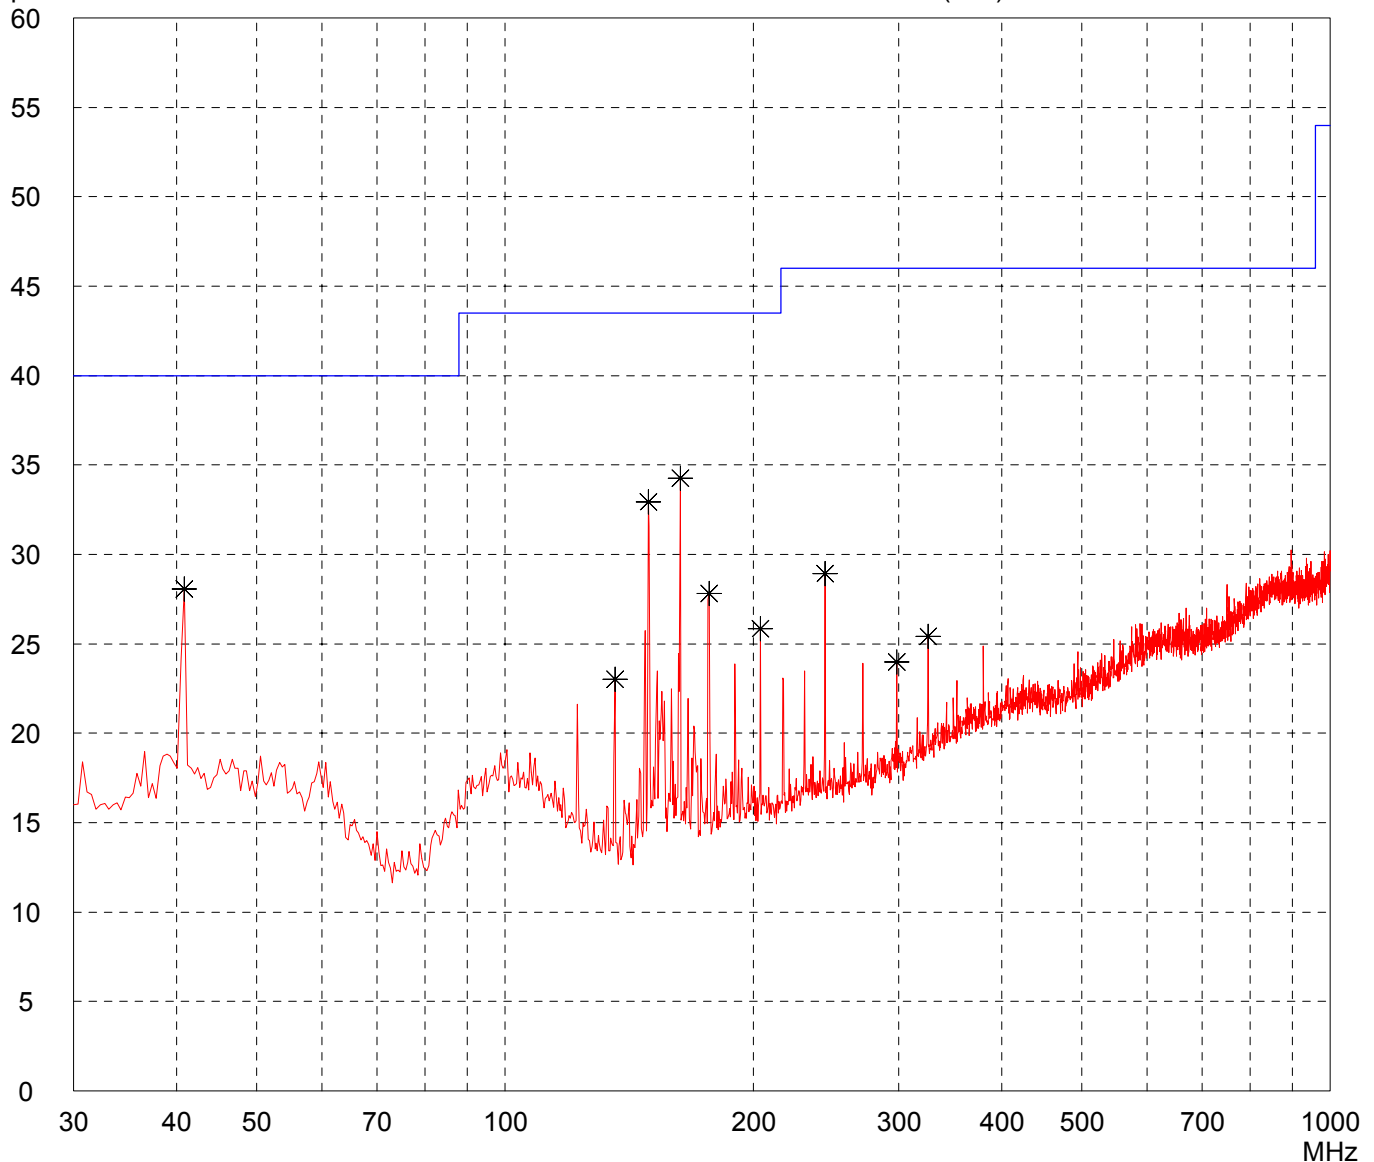

Result:
Prescan

Project file:
51905-81204-5

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)

Model:
RF380R ISO

Serial no.:

Applicant:
Siemens AG, Fürth

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test: 10/16/2008
Operator: T. Eberl


Test performed: automatically
File name: default.emi

Comment:

- withTAG (RF360T)
- Reading distance 70 %
- TX pow. : 1 W

Detector:
Peak

List of values:
Selected by hand

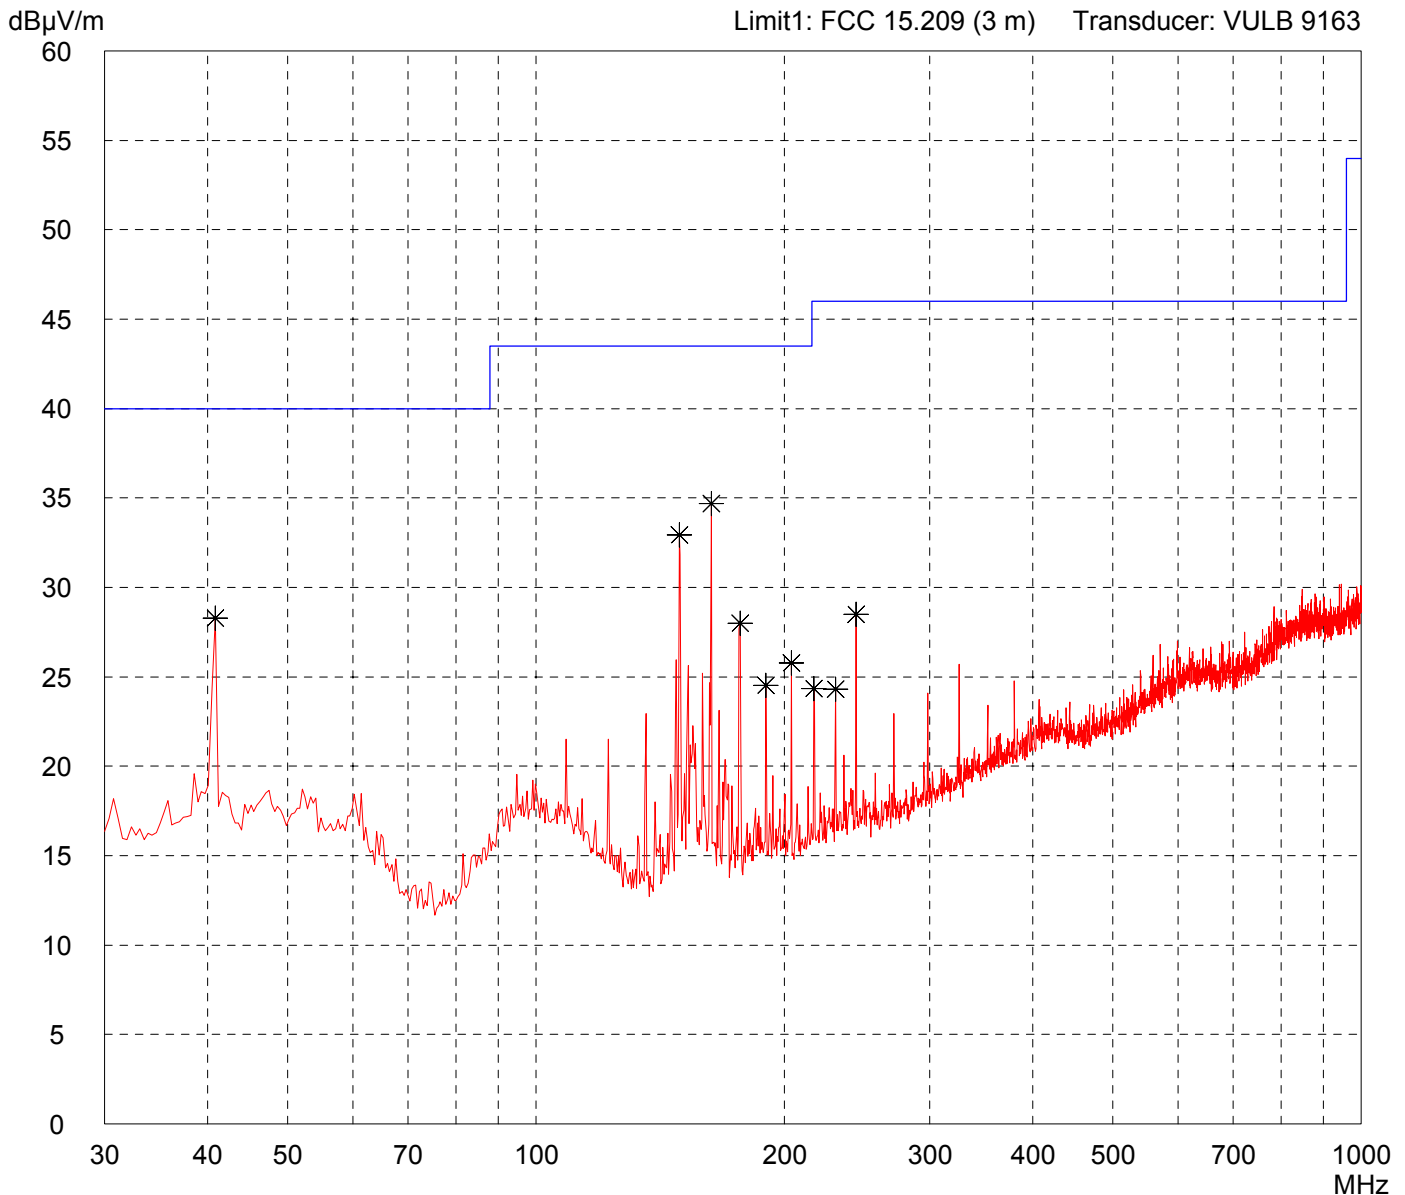

Result:
Prescan

Project file:
51905-81204-5


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/16/2008	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Comment: -- without TAG (RF360T) - TX pow. : 1 W
--

Detector: Peak

List of values: Selected by hand

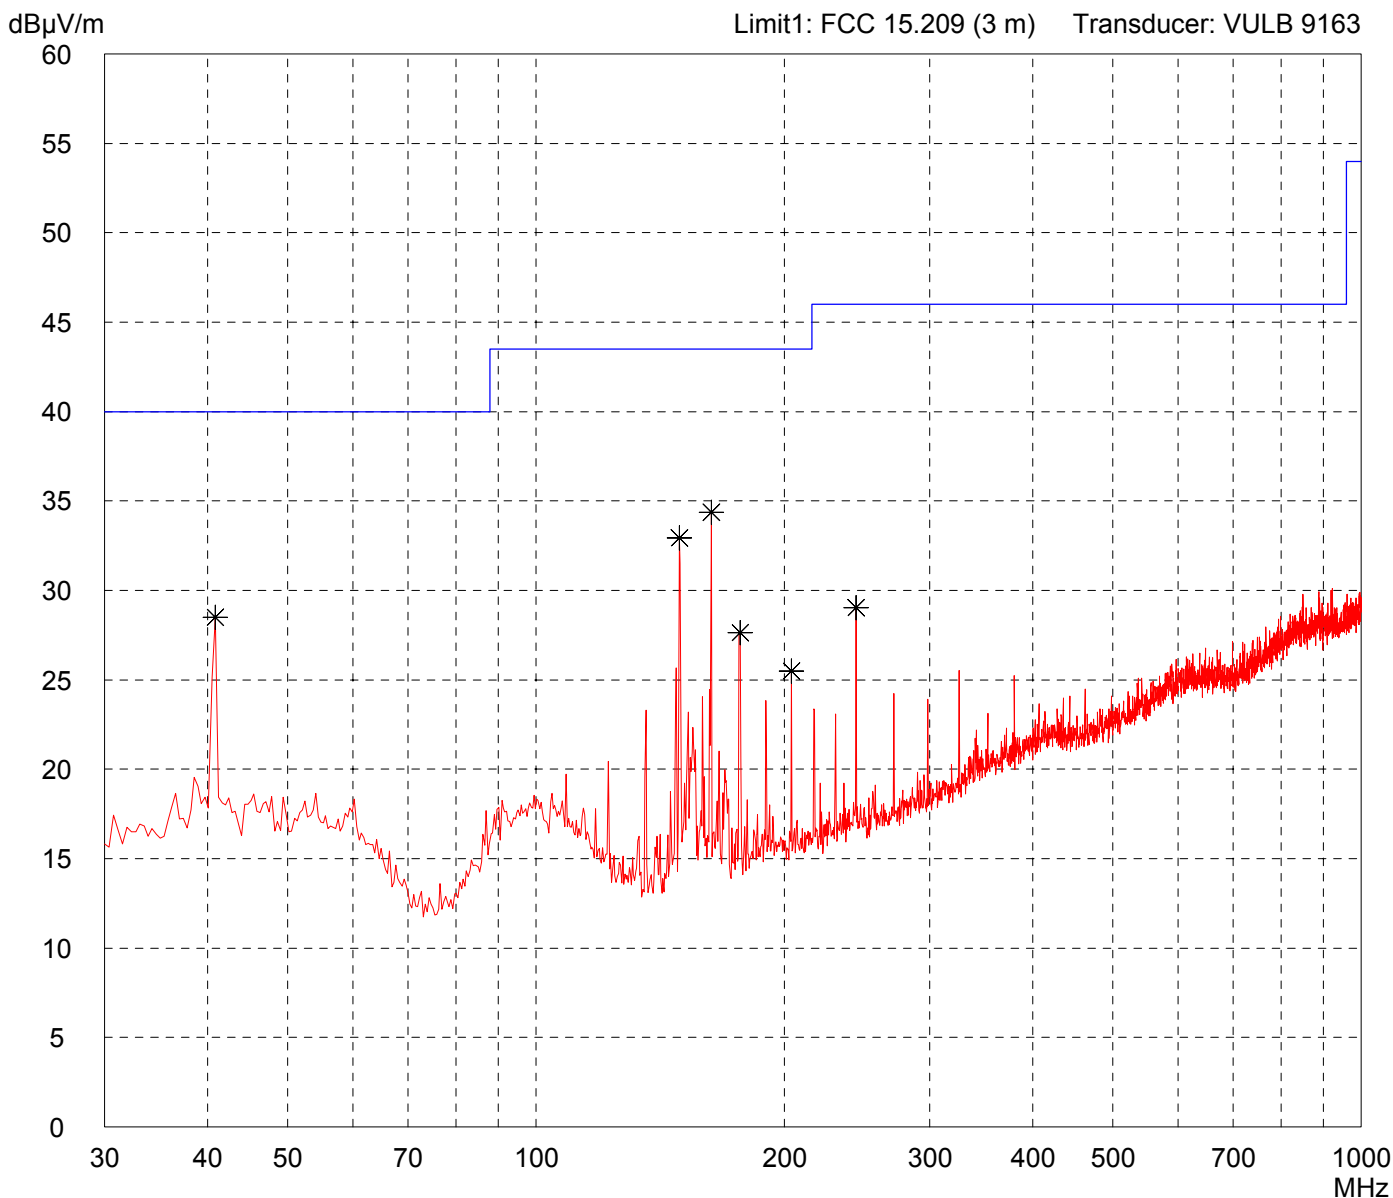

Result: Prescan

Project file: 51905-81204-5

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)

Model:
RF380R ISO

Serial no.:

Applicant:
Siemens AG, Fürth

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Horizontal Polarization

Date of test:
10/16/2008

Operator:
T. Eberl

Test performed:
automatically

File name:
default.emi

Comment:


- with TAG (RF360T)
- Reading distance 70 %
- TX pow. : 2 W

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC 15.209 (3 m) Transducer: VULB 9163

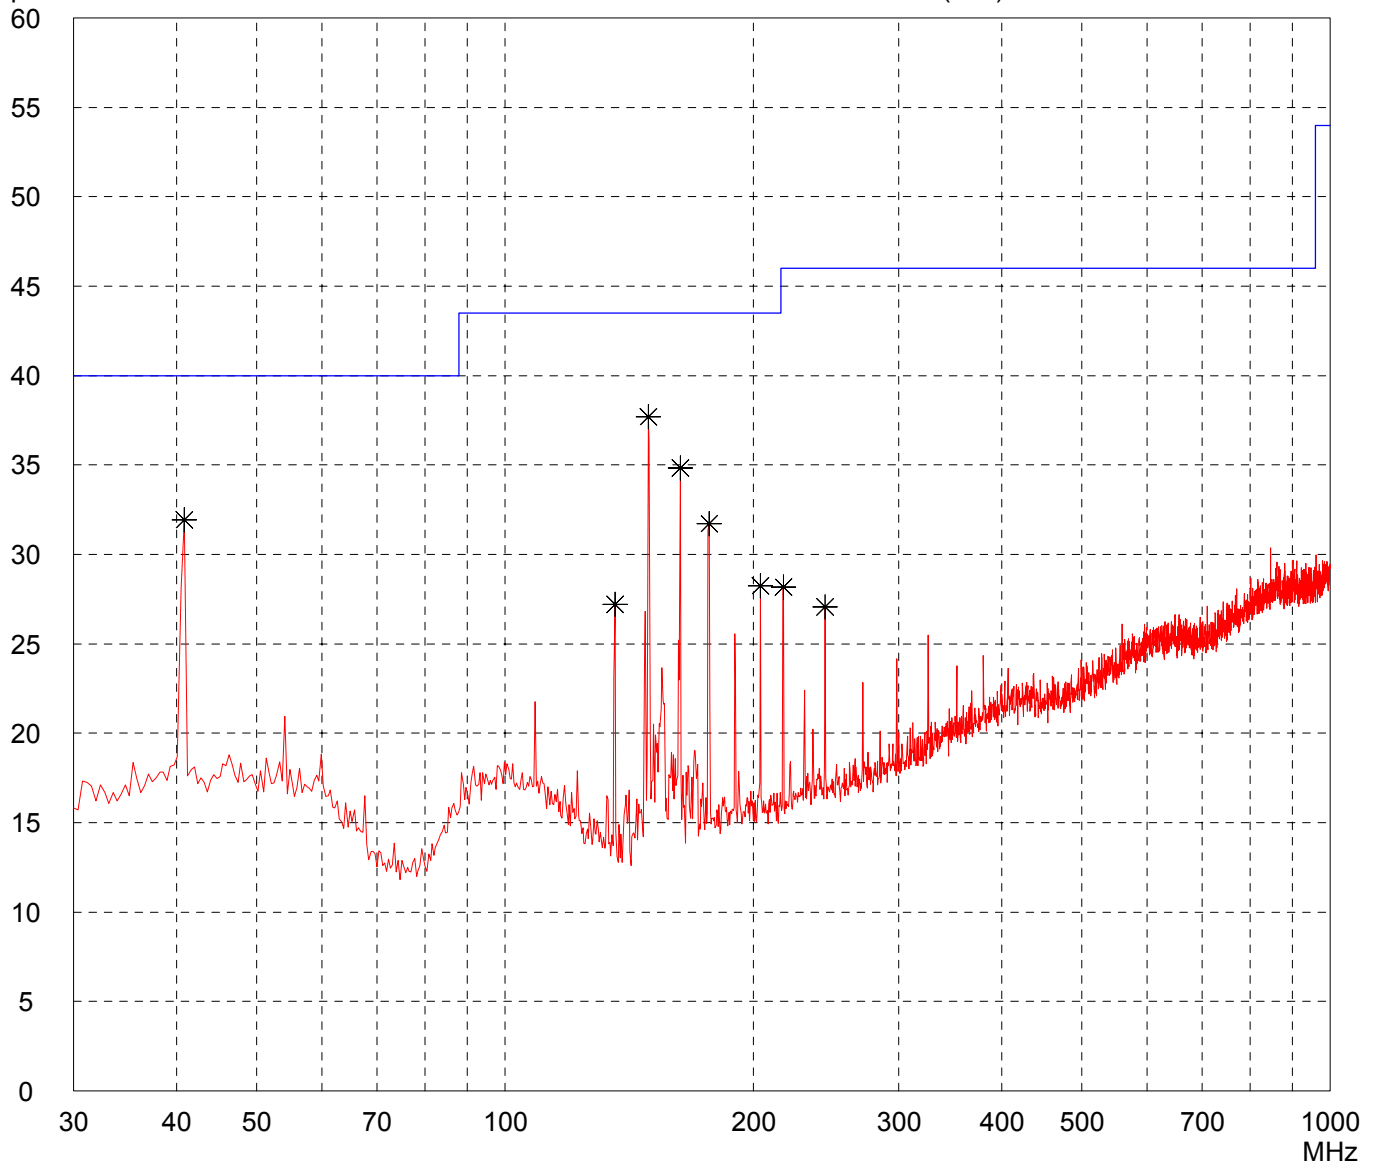

Result:
Prescan

Project file:
51905-81204-5


Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)

Model: RF380R ISO	
Serial no.: ---	
Applicant: Siemens AG, Fürth	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/16/2008	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Comment: -- without TAG (RF360T) - TX pow. : 2 W
--

Detector: Peak

List of values: Selected by hand

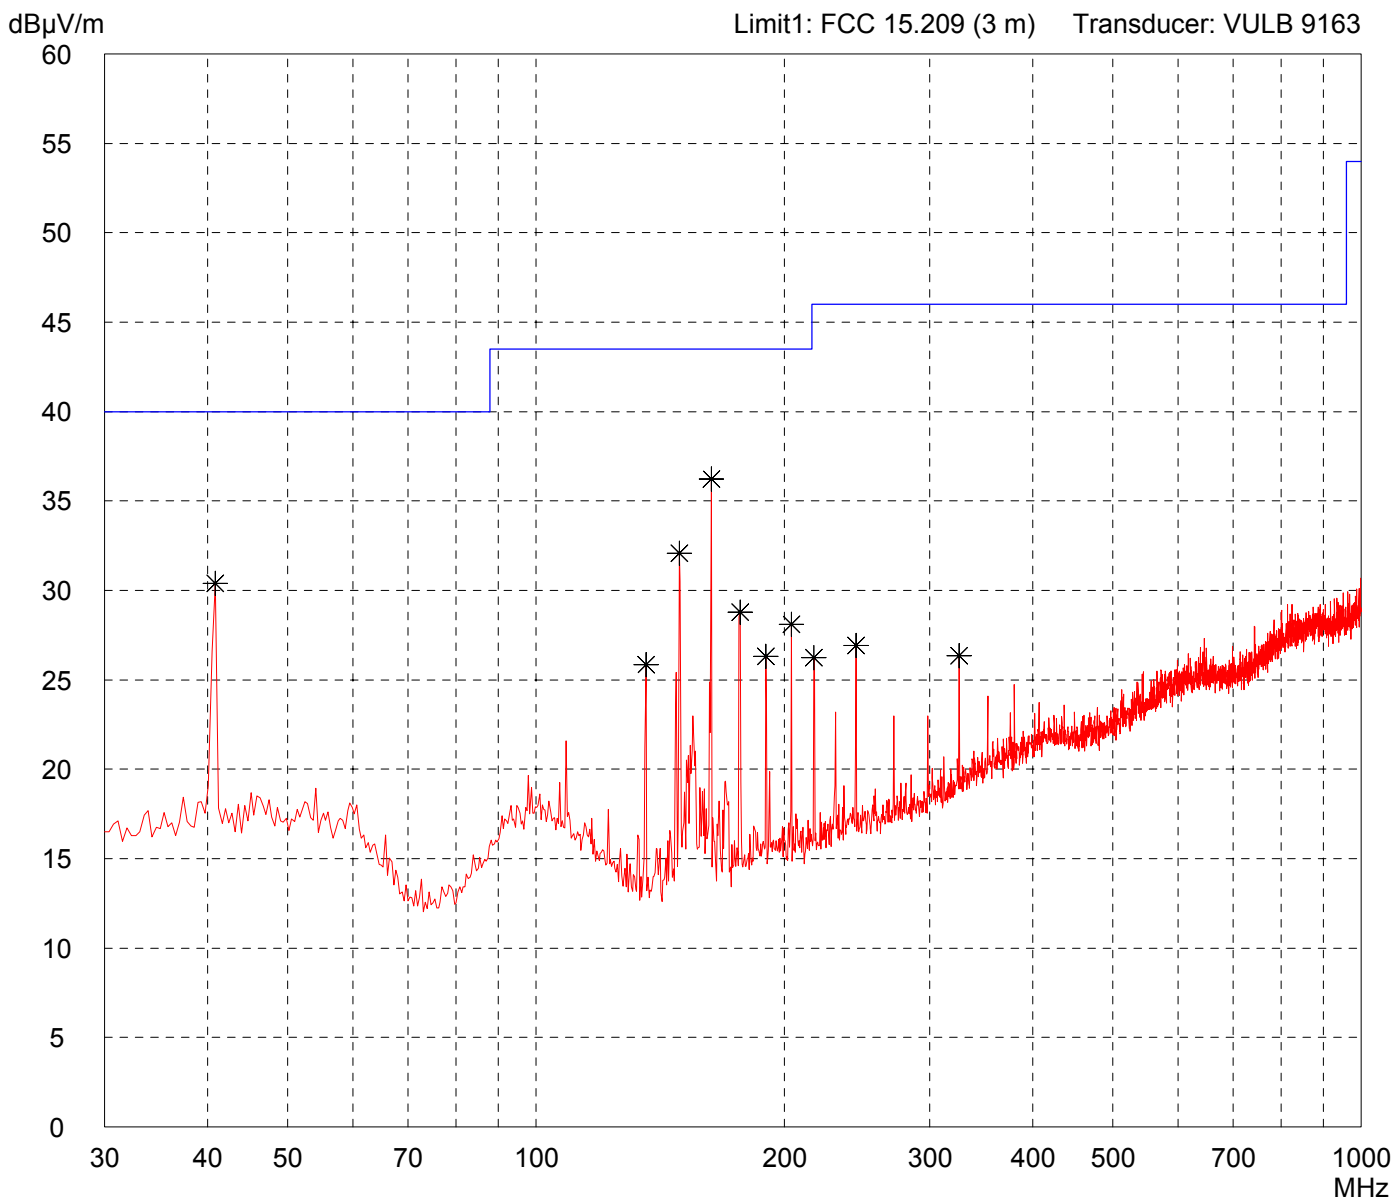

Result: Prescan

Project file: 51905-81204-5

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)

Model:
RF380R ISO

Serial no.:

Applicant:
Siemens AG, Fürth

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test:
10/16/2008

Operator:
T. Eberl

Test performed:
automatically

File name:
default.emi

Comment:


- with TAG (RF360T)
- Reading distance 70 %
- TX pow. : 2 W

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC 15.209 (3 m) Transducer: VULB 9163

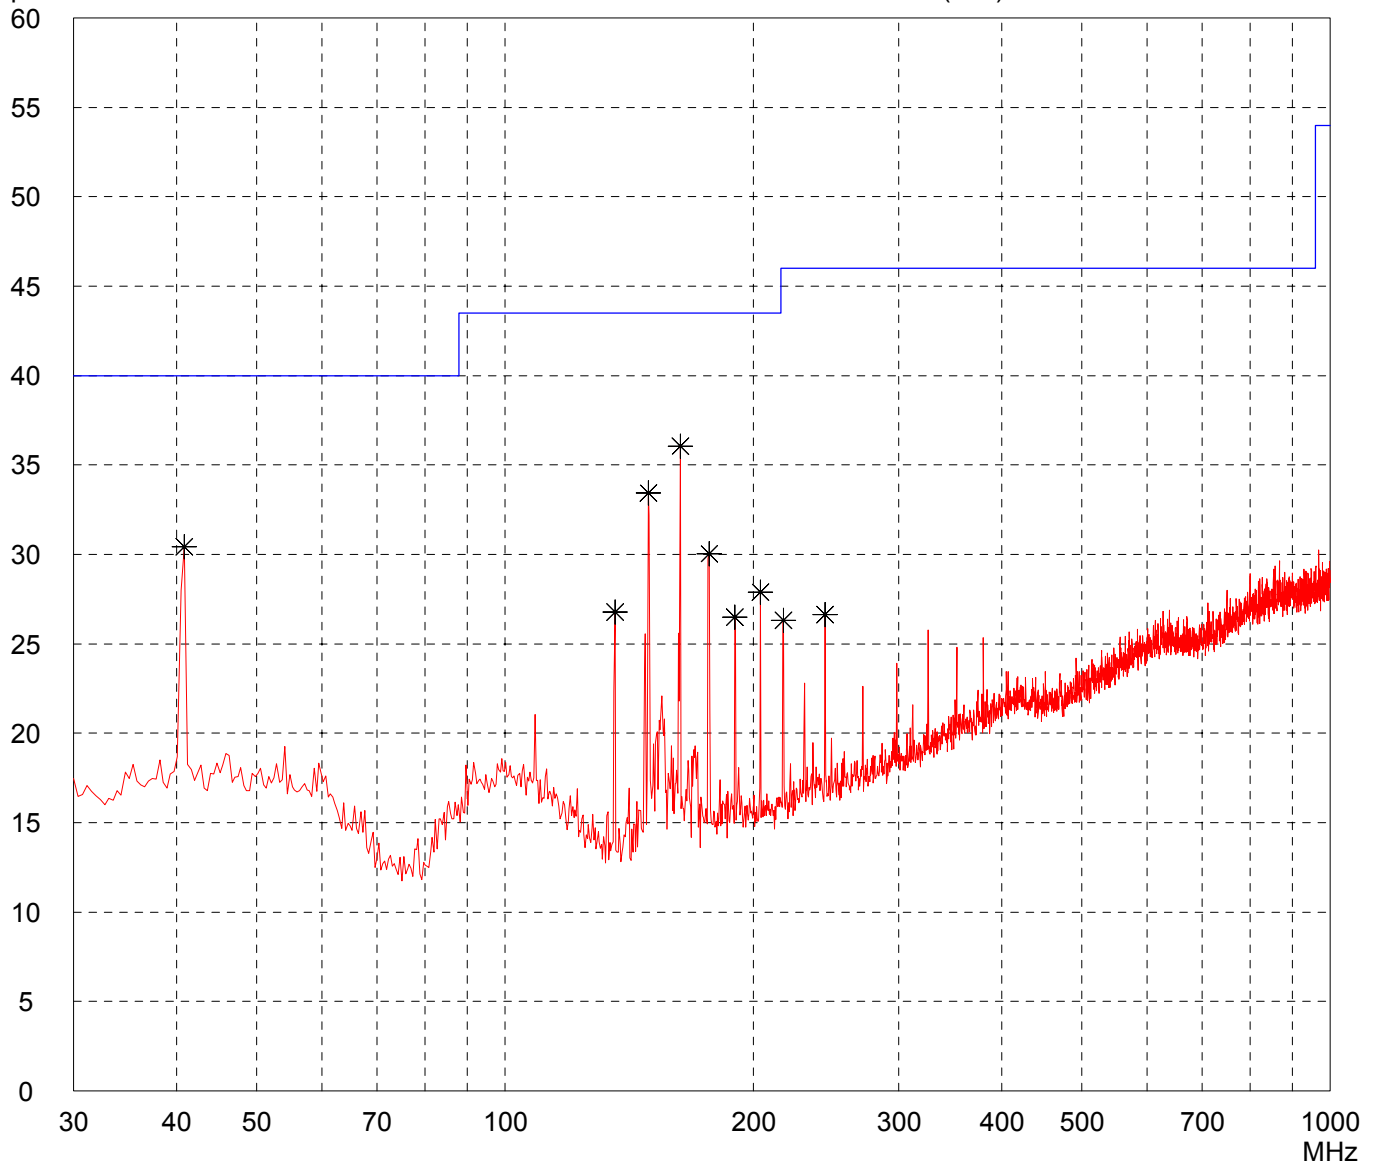

Result:
Prescan

Project file:
51905-81204-5

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 Subpart C (FAR)

Model:
RF380R ISO

Serial no.:

Applicant:
Siemens AG, Fürth

Test site:
Fully anechoic room, cabin no. 2

Tested on:
Test distance 3 metres
Vertical Polarization

Date of test: 10/16/2008
Operator: T. Eberl

Test performed: automatically
File name: default.emi

Comment:


-- without TAG (RF360T)
- TX pow. : 2 W

Detector:
Peak

List of values:
Selected by hand

dB μ V/m

Limit1: FCC 15.209 (3 m) Transducer: VULB 9163

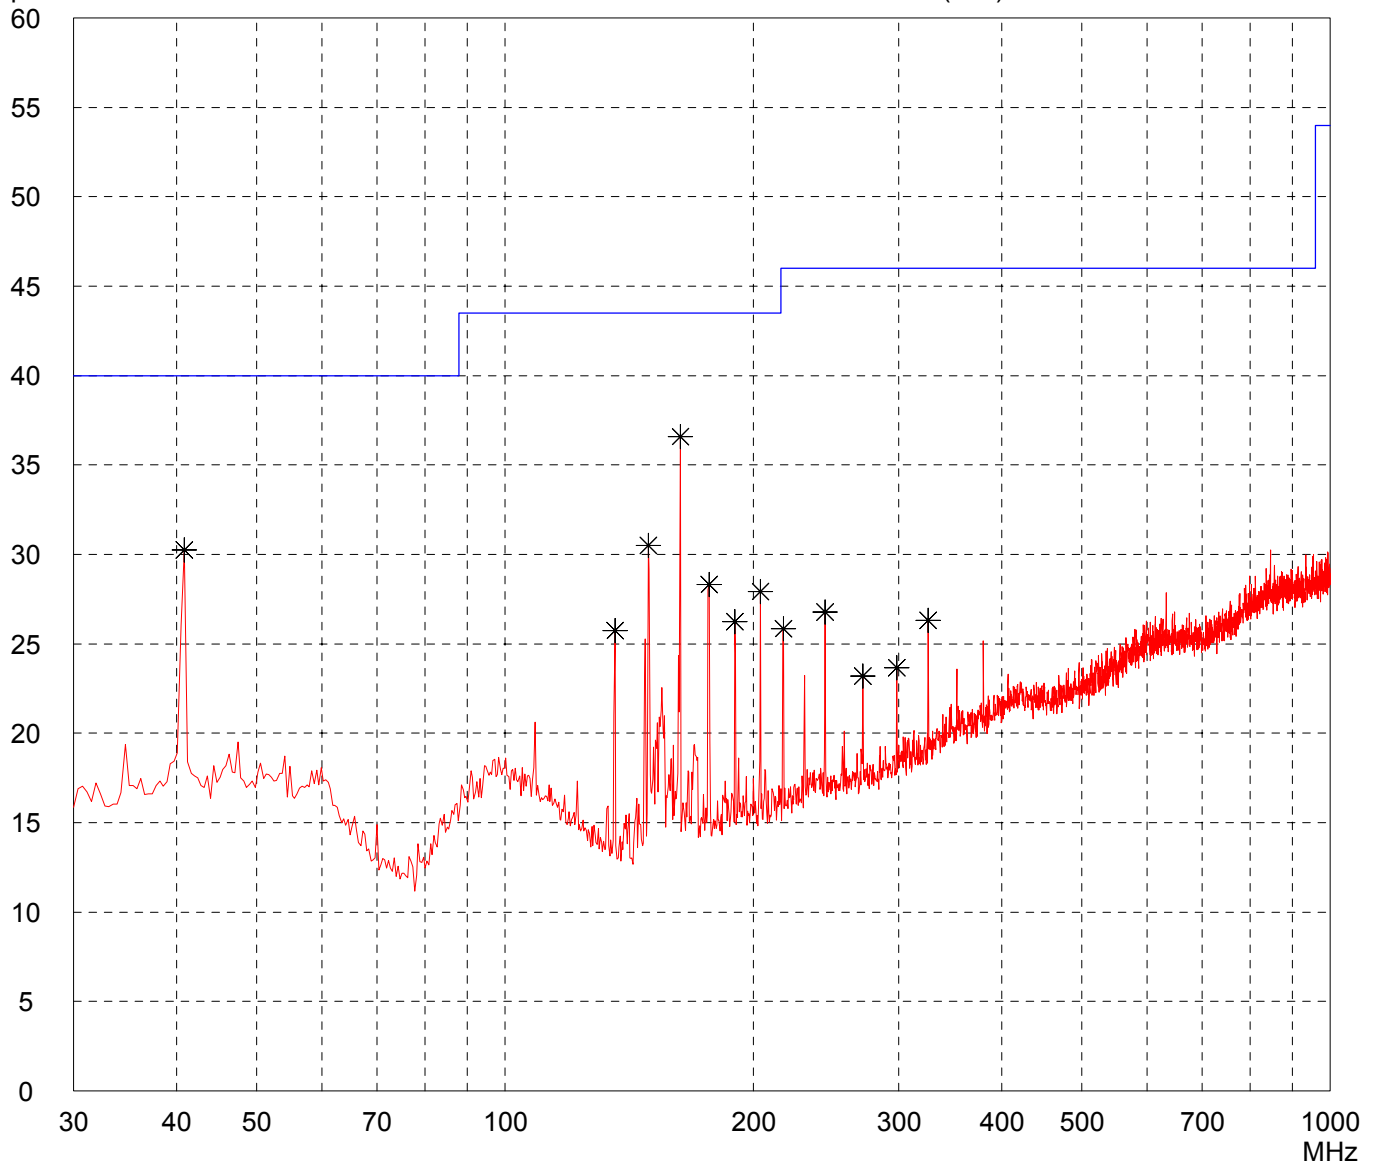

Result:
Prescan

Project file:
51905-81204-5