

**TEST REPORT**  
of the accredited test laboratory

TÜV Nr.:M/FG-03/130

**Applicant:** Siemens AG Österreich  
Erdberger Lände 26  
A-1030 Wien

**Tested Product:** Identification system

**Type:** MOBY U SLG U92 RS 422  
tested in combination with MOBY U MDS U 589

**Manufacturer:** Siemens AG Österreich  
A-1030 Wien; Erdberger Lände 26

**Output power /  
field strength:** 16,5 mV/m @ Spannungsversorgung: 20 – 30 VDC  
3m distance

**Frequency range:** 2400 – 2483,5 MHz      **Channel separation:** 819,2 kHz

**Standard:** FCC: 47 CFR 15.249

Geschäftsbereich  
Medizintechnik,  
Nachrichtentechnik  
und EMV

Prüfstelle für  
Nachrichtentechnik  
und EMV

Prüfzentrum Wien  
A - 1230 Wien  
Deutschstraße 10

Tel: +43-1-61091-0  
Fax: DW 6505  
Mail: office@tuev.or.at

Akkreditierte Prüf-,  
Überwachungs-,  
Zertifizierungs- und  
Kalibrierstelle

Notified Body 0408

TÜV Österreich  
Test laboratory for EMC

Deputy supervisor of EMC-  
laboratory:

Ing. Wilhelm Seier



checked by:

Ing. Michael Emminger

Copy Nbr.: 01

A publication of this test report is only permitted literally.  
Copying or reproduction of partial sections needs a written permission of TÜV Österreich.

The results of this test report only refer to the provided equipment.

## LIST OF MEASUREMENTS

The complete list of measurements called for in 47 CFR 15.249 is given below.

SUBCLAUSE	PARAMETER TO BE MEASURED	PAGE
<b>Intentional Radiators</b>		
15.249 a	Field strength	3-5
15.249 c	Radiated emissions	6
<b>Unintentional Radiators</b>		
15.109	Radiated emissions	7
<b>Additional information</b>		
		8



FIELD STRENGTH (Intentional Radiator)

§ 15.249/a

Measured on channel 0 / 13 (see page 8 for details)

Field strength at a distance of 3m						
f (MHz)	Bandwidth (MHz)	Limit ( $\mu\text{V}/\text{m}$ ) (Average)	Average detector		Peak detector	
			dB $\mu\text{V}/\text{m}$	$\mu\text{V}/\text{m}$	dB $\mu\text{V}/\text{m}$	$\mu\text{V}/\text{m}$
2401,11	1	50000	77,8	7762,5	86,6	21379,6
2411,76	1	50000	84,3	16405,9	89,7	30549,2
4802,22	1	500	33,9	49,5	47,1	226,5
4823,52	1	500	45,8	195,0	53,1	451,9
7235,28	1	500	53,5	473,2	62,8	1380,4

Measurement uncertainty  $\pm 6 \text{ dB}$

Bandwidth: this refers to the bandwidth of the measurement receiver

LIMIT                                  § 15.249/a

f (MHz)	Bandwidth (MHz)	Field strength at a distance of 3 m	
		of fundamental emissions ( $\text{mV}/\text{m}$ )	of harmonic emissions ( $\mu\text{V}/\text{m}$ )
2400-2483,5	1	50	500

The above standing field strength limit is based on average limits.

Reference numbers of test equipment used:

NT-100; NT-110; NT-111; NT-112; NT-125; NT-126; NT-150; NT-207; NT-500; NT-520; NT-550



FIELD STRENGTH (Intentional Radiator)

§ 15.249/a

Measured on channel 44 / 57 (see page 8 for details)

Field strength at a distance of 3m						
f (MHz)	Bandwidth (MHz)	Limit ( $\mu\text{V/m}$ ) (Average)	Average detector		Peak detector	
			dB $\mu\text{V/m}$	$\mu\text{V/m}$	dB $\mu\text{V/m}$	$\mu\text{V/m}$
2437,15	1	50000	75,7	6095,4	86,8	21877,6
2447,8	1	50000	82,6	13489,6	89,4	29512,1
4874,3	1	500	33,9	49,5	46,7	216,3
4895,6	1	500	49,3	291,7	56,7	683,9
7343,4	1	500	48,9	278,6	61,9	1244,5

Measurement uncertainty  $\pm 6 \text{ dB}$

Bandwidth: this refers to the bandwidth of the measurement receiver

LIMIT                    § 15.249/a

f (MHz)	Bandwidth (MHz)	Field strength at a distance of 3 m	
		of fundamental emissions ( $\text{mV/m}$ )	of harmonic emissions ( $\mu\text{V/m}$ )
2400-2483,5	1	50	500

The above standing field strength limit is based on average limits.

Reference numbers of test equipment used:

NT-100; NT-110; NT-111; NT-112; NT-125; NT-126; NT-150; NT-207; NT-500; NT-520; NT-550



FIELD STRENGTH (Intentional Radiator)

§ 15.249/a

Measured on channel 86 / 99 (see page 8 for details)

Field strength at a distance of 3m						
f (MHz)	Bandwidth (MHz)	Limit ( $\mu$ V/m) (Average)	Average detector		Peak detector	
			dB $\mu$ V/m	$\mu$ V/m	dB $\mu$ V/m	$\mu$ V/m
2471,56	1	50000	78,0	7943,3	85,8	19498,4
2482,21	1	50000	83,8	15488,2	90,6	33884,4
4943,12	1	500	36,5	66,8	46,2	204,2
4964,42	1	500	48,4	263,0	55,9	623,7
7446,63	1	500	48,7	272,3	60,5	1059,3

Measurement uncertainty  $\pm$  6 dB

Bandwidth: this refers to the bandwidth of the measurement receiver

LIMIT                          § 15.249/a

f (MHz)	Bandwidth (MHz)	Field strength at a distance of 3 m	
		of fundamental emissions (mV/m)	of harmonic emissions ( $\mu$ V/m)
2400-2483,5	1	50	500

The above standing field strength limit is based on average limits.

Reference numbers of test equipment used:

NT-100; NT-110; NT-111; NT-112; NT-125; NT-126; NT-150; NT-207; NT-500; NT-520; NT-550



RADIATED EMISSIONS (Intentional Radiator)

§ 15.249/c

Radiated Emissions at a distance of 3 m				
No other emissions additional to the harmonics were found above noise level.				
Measurement uncertainty $\pm$ 6 dB				

Bandwith: this refers to the bandwith of the measurement receiver

LIMIT                    § 15.249/c according to § 15.209

f (MHz)	Bandwith (kHz)	Meas. distance (m)	Field strength ( $\mu$ V/m)
0,009-0,150	0,2	300	2400/f (kHz)
0,150-0,490	9	300	2400/f (kHz)
0,490-1,705	9	30	24000/f (kHz)
1,705-30,0	9	30	30
30-88	120	3	100
88-216	120	3	150
216-960	120	3	200
960-1000	120	3	500
1000-2400	1000	3	500
above 2483,5	1000	3	500

The above standing field strength limits in the frequency band 9-90kHz, 110-490 kHz and above 1 GHz are based on average limits. All other above standing limits are based on quasi peak limits.

Reference numbers of test equipment used:

01-04, 34, 59, 65

RADIATED EMISSIONS (Unintentional Radiator)

§ 15.109/a

Radiated Emissions at a distance of 3 m				
f (MHz)	BWV (kHz)	Limit ( $\mu\text{V}/\text{m}$ )	Field strength ( $\text{dB}\mu\text{V}/\text{m}$ ) QP	Field strength ( $\mu\text{V}/\text{m}$ ) QP
72,00	120	100	35,8	61,7
Measurement uncertainty $\pm$ 6 dB				

Bandwidth: this refers to the bandwidth of the measurement receiver

LIMIT (Class B digital device)

§ 15.109/a

f (MHz)	Bandwith (kHz)	Meas. distance (m)	Field strength ( $\mu\text{V}/\text{m}$ )
30-88	120	3	100
88-216	120	3	150
216-960	120	3	200
960-1000	120	3	500
above 1000	1000	3	500

The above standing field strength limits in the frequency band above 1 GHz are based on average limits.  
All other above standing limits are based on quasi peak limits.

Reference numbers of test equipment used:

01-04, 34, 59, 65



### Additional information supplementary to the test report

The „Moby U“ system is intended to be used for identification purposes. It uses one or more SLGs (writing and reading station) and one ore multiple MDSs (mobile data memory).

The SLG operates, also during the test, as follows:

Two signals are transmitted in the downlink mode (writing data from SLG to MDS). The lower is a CW carrier without modulation. The data carrier, modulated with a 384 ksym/s GMSK modulation, is situated 10.6496 MHz (13 channels) above the CW carrier.

During the uplink only the CW carrier will get transmitted.

Every SLG is able to handle more than one MDS at a time. The value, how much MDSs can be handled at a time is selectable. The maximum number is 12, minimum 1. This number is depending on the number of timeslots used for one MDS. During the test all timeslots were used, to get the minimal transmit interval. The MDS does not contain any RF generation, the MDS uses the RF energy of the two transmitted channels of the SLG to demodulate and receive data from SLG. It uses the unmodulated carrier from SLG for transmitting an answer back. Because of this, the MDS and SLG were tested together and all test results contained in this report refer to both products.

Measurement diagrams:

Page No.		Remarks
1	9 kHz – 30 MHz	Mode of operation as declared above on channels 44/57
2	30 – 200 MHz	Mode of operation as declared above on channels 44/57
3	200 – 1000 MHz	Mode of operation as declared above on channels 44/57
4	1 – 3 GHz	Mode of operation as declared above on channels 44/57

Because there were nothing to see in the spectrum above 3 GHz above noise level, except the harmonics, we didn't plot graphs, although we measured to the 10<sup>th</sup> harmonic.

## Appendix 1

### Test equipment used

<input type="checkbox"/> Anechoic Chamber with 3m measurement distance	NT-100	<input type="checkbox"/> ESPC - Test receiver 9 kHz - 2,5 GHz	NT-203	Medizintechnik/ Nachrichtentechnik/EMV
<input type="checkbox"/> MA 240 - Antenna mast 1 - 4 m height	NT-110	<input type="checkbox"/> ESI26 – Test receiver 20 Hz – 26,5 GHz	NT-207	Department: FG
<input type="checkbox"/> DS 412 - Turntable 0 - 400 ° Azimuth	NT-111	<input type="checkbox"/> Digital Radio Tester CTS55	NT-208	Test report number: M/FG-03/130
<input type="checkbox"/> HD 100 Controller Mast+Turntable	NT-112	<input type="checkbox"/> Noise-gen., ITU-R 559-2 20 Hz – 20 kHz	NT-209	Page: 1 of 3
<input type="checkbox"/> HUF-Z2 - Bicon. Antenna 20 - 300 MHz	NT-120	<input type="checkbox"/> CMTA - Radiocommunication analyzer ; 0,1 - 1000 MHz	NT-210	Date: 4. 12. 2003
<input type="checkbox"/> HUF-Z3 - Log. Per. Antenna 200 - 1000 MHz	NT-121	<input type="checkbox"/> 3271 - Spectrum analyzer 100 Hz - 26,5 GHz	NT-211	Checked by:
<input type="checkbox"/> HFH-Z2 - Loop Antenna. 9 kHz - 30 MHz	NT-122	<input type="checkbox"/> Radiocommunicationanalyzer Marconi 2945A	NT-212	
<input type="checkbox"/> HFH-Z6 - Rod Antenna 9 kHz - 30 MHz	NT-123	<input type="checkbox"/> 2855S - Communication analyzer	NT-213	
<input type="checkbox"/> 3121C - Dipole Antenna 28 - 1000 MHz	NT-124	<input type="checkbox"/> Mixer M28HW 26,5 GHz - 40 GHz	NT-214	
<input type="checkbox"/> 3115 - Horn Antenna 1 - 18 GHz	NT-125	<input type="checkbox"/> Diode Detector 0,01 GHz - 26,5 GHz	NT-215	
<input type="checkbox"/> 3116 - Horn Antenna 18 - 40 GHz	NT-126	<input type="checkbox"/> 3160-10 Horn Antenna 26,5 GHz - 40 GHz	NT-216	
<input type="checkbox"/> SAS-200/543 - Bicon. Ant. 20 MHz - 300 MHz	NT-127	<input type="checkbox"/> Radiocommunicationanalyzer SWR 1180 MD	NT-217	
<input type="checkbox"/> AT-1080 - Log. Per. Ant. 80 - 1000 MHz	NT-128	<input type="checkbox"/> Mixer M19HWD 40 GHz - 60 GHz	NT-218	
<input type="checkbox"/> HK-116 - bicon. Ant. 20 MHz - 300 MHz	NT-129	<input type="checkbox"/> Mixer M12HWD 60 GHz - 90 GHz	NT-219	
<input type="checkbox"/> HK-116 - bicon. Ant. 20 MHz - 300 MHz	NT-130	<input type="checkbox"/> TDS - 540 DSO Digital scope	NT-220	
<input type="checkbox"/> 3146 - Log. Per. Ant. 200 - 1000MHz	NT-131	<input type="checkbox"/> PM97 Scopemeter	NT-221	
<input type="checkbox"/> Loop Antenna H-Field	NT-132	<input type="checkbox"/> B9-DSP-IS Digital Analyzer for voltage fluctuations	NT-230	
<input type="checkbox"/> Horn Antenna 500 MHz - 2900 MHz	NT-133	<input type="checkbox"/> DFT 555 - Power and harmonics analyzer	NT-231	
<input type="checkbox"/> Log per. Antenna 800 MHz - 2500 MHz	NT-134	<input type="checkbox"/> EFA-3 H-field- / E-field probe	NT-243	
<input type="checkbox"/> Log per. Antenna 800 MHz - 2500 MHz	NT-135	<input type="checkbox"/> E-field measuring instrument EMR-200; 100 kHz – 3 GHz	NT-244	
<input type="checkbox"/> BiConiLog Antenna 26 MHz – 2000 MHz	NT-137	<input type="checkbox"/> E-field probe 100 kHz – 3 GHz	NT-245	
<input type="checkbox"/> Conical Dipol Antenna PCD8250	NT-138	<input type="checkbox"/> Magneticfield-Sensor 300 kHz – 30 MHz	NT-246	
<input type="checkbox"/> HZ-1 Antenna tripod	NT-150	<input type="checkbox"/> E-field probe 10 MHz – 18 GHz	NT-247	
<input type="checkbox"/> BN 1500 Antenna tripod	NT-151	<input type="checkbox"/> H-field probe 10 MHz – 1 GHz	NT-248	
<input type="checkbox"/> Ant. tripod for EN61000-4-3 Model TP1000A	NT-156	<input type="checkbox"/> ELT-400 1 Hz – 400 kHz	NT-249	
<input type="checkbox"/> ESVP - Test receiver 20 - 1000 MHz	NT-201	<input type="checkbox"/> MDS 21 - Absorbing clamp 30 - 1000 MHz	NT-250	
<input type="checkbox"/> Switchbox	NT-202			



## Appendix 1 (continued)

### Test equipment used

<input type="checkbox"/> FCC-203I EM Injection clamp	NT-251	<input type="checkbox"/> T82-50 RF-Amplifier 2 GHz – 8 GHz	NT-331	Medizintechnik/ Nachrichtentechnik/EMV
<input type="checkbox"/> FCC-203I-DCN Ferrite decoupling network	NT-252	<input type="checkbox"/> 500W1000M7 - RF-Amplifier 80 - 1000 MHz / 500 W	NT-332	Department: FG
<input type="checkbox"/> PR50 Current Probe	NT-253	<input type="checkbox"/> AS0102-65R - RF-Amplifier 1 GHz - 2 GHz	NT-333	Test report number: M/FG-03/130
<input type="checkbox"/> Model 2000 Digital Multimeter	NT-261	<input type="checkbox"/> APA01 – RF-Amplifier 0,5 GHz – 2,5 GHz	NT-334	Page: 2 of 3
<input type="checkbox"/> Fluke 97 Digital Multimeter	NT-262	<input type="checkbox"/> Preamplifier 1 GHz - 4 GHz	NT-335	Date: 4. 12. 2003
<input type="checkbox"/> Fluke 97 Digital Multimeter	NT-263	<input type="checkbox"/> Preamplifier for GPS MKU 152 A	NT-336	Checked by:
<input type="checkbox"/> ESH2-Z5 Artificial mains network 4x25A	NT-300	<input type="checkbox"/> Preamplifier 100 MHz – 23 GHz	NT-337	
<input type="checkbox"/> ESH3-Z5 Artificial mains network 2x10A	NT-301	<input type="checkbox"/> DC Block 10 MHz – 18 GHz Model 8048	NT-338	
<input type="checkbox"/> ESH3-Z6 Artificial mains network 1x100A	NT-302	<input type="checkbox"/> 2-97201 Electronic load	NT-341	
<input type="checkbox"/> ESH3-Z4 T-Artificial network	NT-303	<input type="checkbox"/> TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-344	
<input type="checkbox"/> PHE 4500/B Power amplifier	NT-304	<input type="checkbox"/> TSX3510P - Power supply 0-30 V / 0 - 10 A	NT-345	
<input type="checkbox"/> EZ10 T-Artificial network	NT-305	<input type="checkbox"/> VDS 200 Mobil-impuls-generator	NT-350	
<input type="checkbox"/> MidiStar Telephone exchange	NT-306	<input type="checkbox"/> LD 200 Mobil-impuls-generator	NT-351	
<input type="checkbox"/> SMG - Signal generator 0,1 - 1000 MHz	NT-310	<input type="checkbox"/> MPG 200 Mobil-Impuls-Generators	NT-352	
<input type="checkbox"/> PM 5518 TXVPS Video generator	NT-311	<input type="checkbox"/> EFT 200 Mobil-impuls-generator	NT-353	
<input type="checkbox"/> RefRad Reference generator	NT-312	<input type="checkbox"/> FP 16/3-1 3 ph. Coupling filter (Burst)	NT-400	
<input type="checkbox"/> SMP 02 Signal generator 10 MHz - 20 GHz	NT-313	<input type="checkbox"/> PHE 4500 - Mains impedance network	NT-401	
<input type="checkbox"/> 40 MHz Arbitrary Generator T1241	NT-315	<input type="checkbox"/> FP-SURGE 32.1 3 ph. Coupling filter (Surge)	NT-402	
<input type="checkbox"/> PEFT - Burst generator up to 4 kV	NT-320	<input type="checkbox"/> IP 6.2 Coupling filter for data lines (Surge)	NT-403	
<input type="checkbox"/> PSD - ESD generator up to 25 kV	NT-321	<input type="checkbox"/> ESH2-Z3 - Probe 9 kHz - 30 MHz	NT-410	
<input type="checkbox"/> ESD-Pistol	NT-322	<input type="checkbox"/> IP 4 - Capacitive clamp (Burst)	NT-411	
<input type="checkbox"/> Vacuum-Relais up to 8 kV	NT-323	<input type="checkbox"/> HV-Attenuator 54,5 dB (Burst)	NT-420	
<input type="checkbox"/> PSURGE 4.1 Surge generator	NT-324	<input type="checkbox"/> RF-Attenuator 20 dB 0,1 - 1000 MHz / 25 W	NT-421	
<input type="checkbox"/> TRANSIENT 1000 Immunity test system	NT-325	<input type="checkbox"/> RF-Attenuator 10 dB 0,1 - 1000 MHz / 20 W	NT-422	
<input type="checkbox"/> VCS 500-M6 Surge-Generator	NT-326	<input type="checkbox"/> RF-Attenuator 30 dB 0,1 - 1000 MHz / 1 W	NT-423	
<input type="checkbox"/> BTA-250 - RF-Amplifier 9 kHz - 220 MHz / 250 W	NT-330	<input type="checkbox"/> RF-Attenuator 30 dB	NT-424	



# Appendix 1 (continued)

## Test equipment used

<input type="checkbox"/> RF-Attenuator 6 dB 0,1 - 1000 MHz / 1 W	NT-425	<input type="checkbox"/> PC P450 - Test computer	NT-500
<input type="checkbox"/> RF-Attenuator 6 dB 0,1 - 1000 MHz / 1 W	NT-426	<input type="checkbox"/> PC P4 1700 MHz Notebook	NT-505
<input type="checkbox"/> Voltage-divider 1:100	NT-427	<input type="checkbox"/> PC PIII 933 MHz Notebook	NT-506
<input type="checkbox"/> RF-Attenuator 6 dB	NT-428	<input type="checkbox"/> Monitoring camera with Monitor	NT-511
<input type="checkbox"/> RF-Attenuator 0 dB - 81 dB	NT-429	<input type="checkbox"/> BSR-V1 - Video transmission system (optical fiber link)	NT-512
<input type="checkbox"/> WRU 27 - Band blocking 27 MHz	NT-430	<input type="checkbox"/> ES-K1 Test software	NT-520
<input type="checkbox"/> WHJ450C9 AA - High pass 450 MHz	NT-431	<input type="checkbox"/> SPS_PHE - Test software voltage fluctuations/harmonics	NT-525
<input type="checkbox"/> WHJ250C9 AA - High pass 250 MHz	NT-432	<input type="checkbox"/> SPS_EM - Test software for PHE 4500/B	NT-527
<input type="checkbox"/> RF-Load 150 W	NT-433	<input type="checkbox"/> Noise power test apparatus according to EN 55014	NT-530
<input type="checkbox"/> Impedance transducer 50 Ohm – 800 Ohm	NT-435	<input type="checkbox"/> Vertical coupling plane (ESD)	NT-531
<input type="checkbox"/> RF-Attenuator DC – 18 GHz 6 dB	NT-436	<input type="checkbox"/> Equipment for ESD-pulse verification.	NT-532
<input type="checkbox"/> RF-Attenuator DC – 18 GHz 6 dB	NT-437	<input type="checkbox"/> TEM-Zelle	NT-533
<input type="checkbox"/> RF-Attenuator DC – 18 GHz 10 dB	NT-438	<input type="checkbox"/> Test cables	NT-550
<input type="checkbox"/> RF-Attenuator DC – 18 GHz 20 dB	NT-439	<input type="checkbox"/> Test cable #4 for EN 61000-4-6	NT-553
<input type="checkbox"/> I+P 7780 Directional coupler 100 - 2000 MHz	NT-440	<input type="checkbox"/> Test cable #3 for conducted emission	NT-554
<input type="checkbox"/> ESH3-Z2 - Pulse limiter 9 kHz - 30 MHz	NT-441	<input type="checkbox"/> Test cable #5 ESD-cable (2x470k)	NT-555
<input type="checkbox"/> Power Divider 6 dB/1 W/50 Ohm	NT-443	<input type="checkbox"/> Test cable #6 ESD-cable (2x470k)	NT-556
<input type="checkbox"/> Directional coupler 0,1 MHz – 70 MHz	NT-444	<input type="checkbox"/> Serial data - fiber optic link	NT-557
<input type="checkbox"/> Directional coupler 0,1 MHz – 70 MHz	NT-445	<input type="checkbox"/> Test cable #8 Sucoflex 104EA	NT-559
<input type="checkbox"/> Tube imitations according to EN 55015	NT-450	<input type="checkbox"/> Test cable #9 (for outdoor measurements)	NT-580
<input type="checkbox"/> FCC-801-M2-50A Coupling decoupling network	NT-459	<input type="checkbox"/> Test cable #10 (for outdoor measurements)	NT-581
<input type="checkbox"/> FCC-801-M5-25 Coupling decoupling network	NT-460	<input type="checkbox"/> Test cable #13 Sucoflex 104PE	NT-584
<input type="checkbox"/> FCC-801-AF10 Coupling decoupling network	NT-461	<input type="checkbox"/> Shield chamber	NT-600
<input type="checkbox"/> FCC-801-S25 Coupling decoupling network	NT-462	<input type="checkbox"/> Climatic chamber -55°C to +180°C	M-512
<input type="checkbox"/> FCC-801-T4 Coupling decoupling network	NT-463	<input type="checkbox"/> Control and simulation equipment for EUT	
<input type="checkbox"/> FCC-801-C1 Coupling decoupling network	NT-464		
<input checked="" type="checkbox"/> F-16A - Current probe 1kHz - 70MHz	NT-465		


Medizintechnik/  
Nachrichtentechnik/EMV

Department: FG


Test report number:  
M/FG-03/130

Page: 3 of 3


Date: 4. 12. 2003

Checked by: 

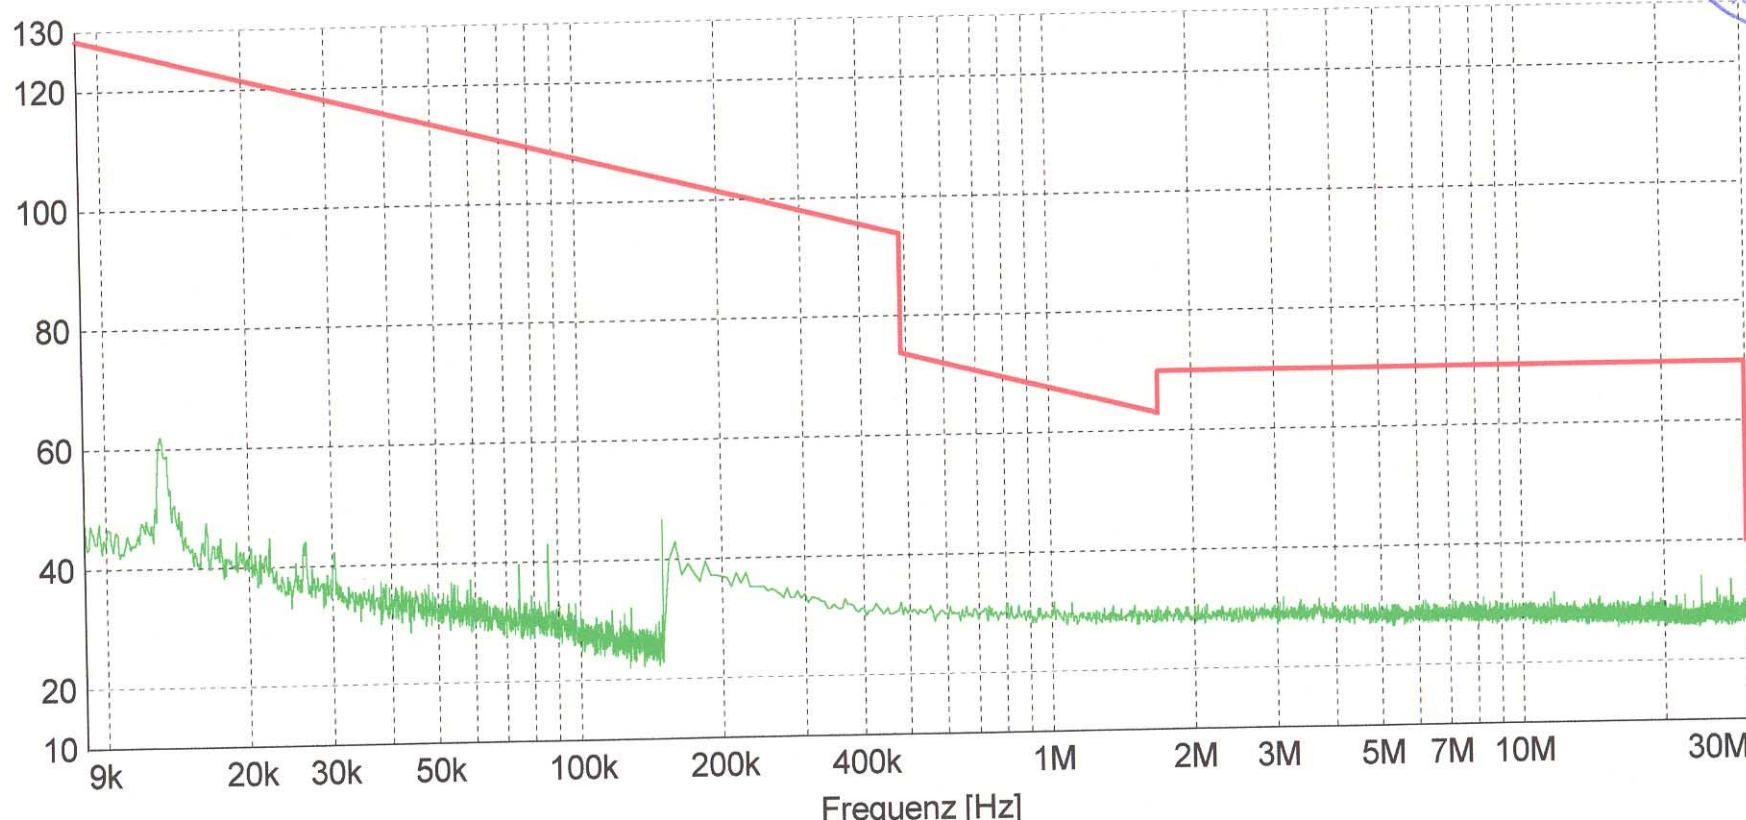

Pegel [dB $\mu$ V/m]

MES MOBY\_2\_C2\_F0\_pre PK  
LIM FCC ClassB F QP 40dB FCC ClassB, field strength 3m

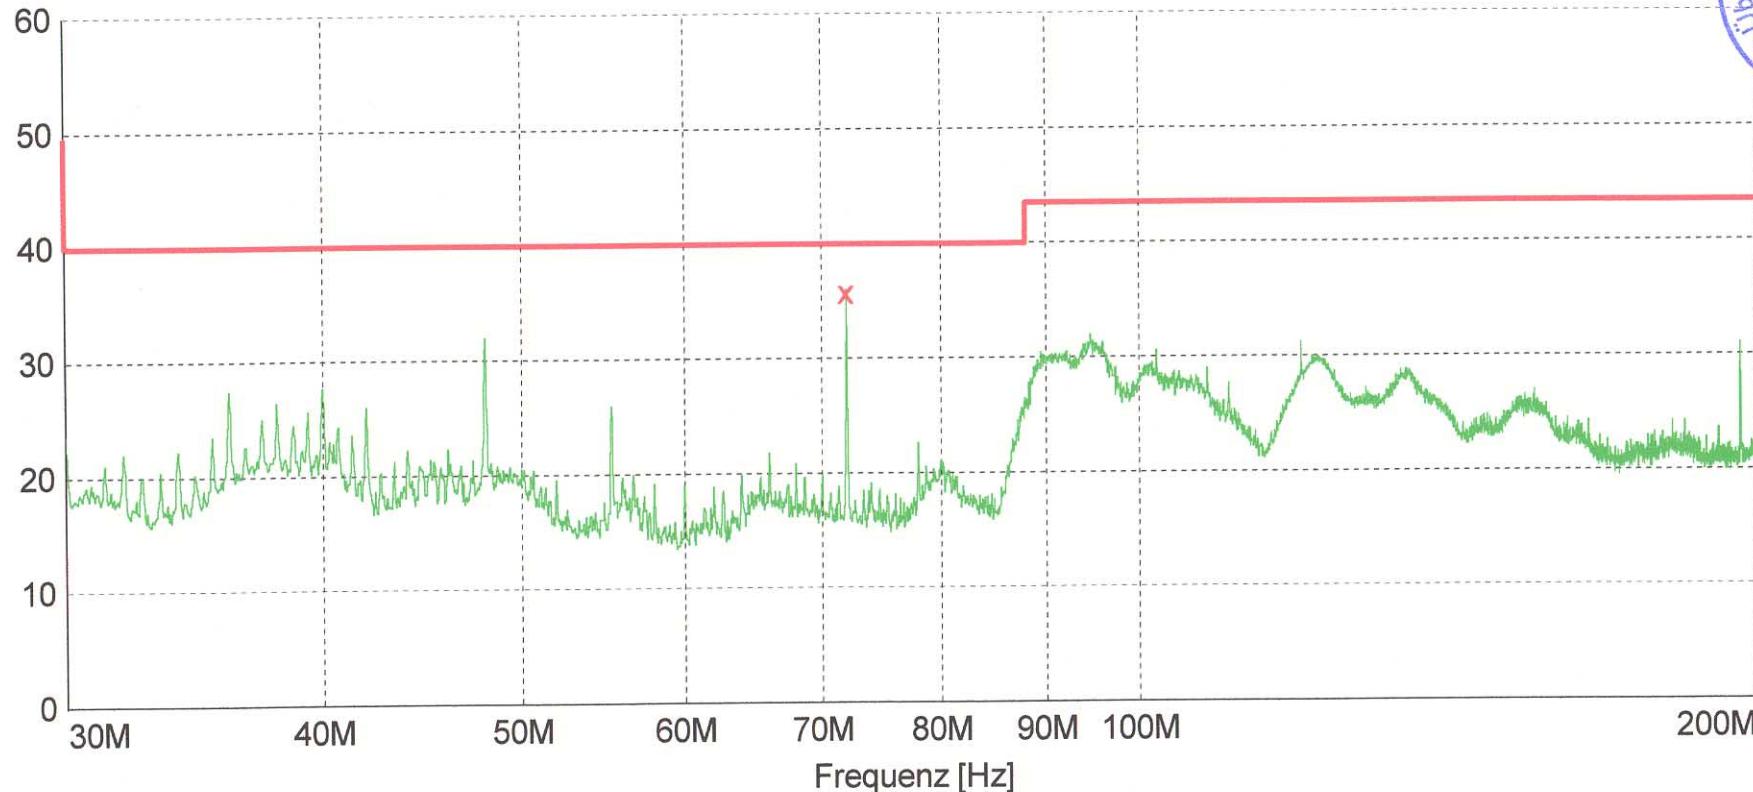
Pegel [dB $\mu$ V/m]

**x x** : MES    MOBY\_2\_C2\_F2\_fin\_QP  
— MES    MOBY\_2\_C2\_F2\_pre\_PK  
— LIM    FCC ClassB F QP/AV

FCC ClassB, field strength 3m



Pegel [dBμV/m]

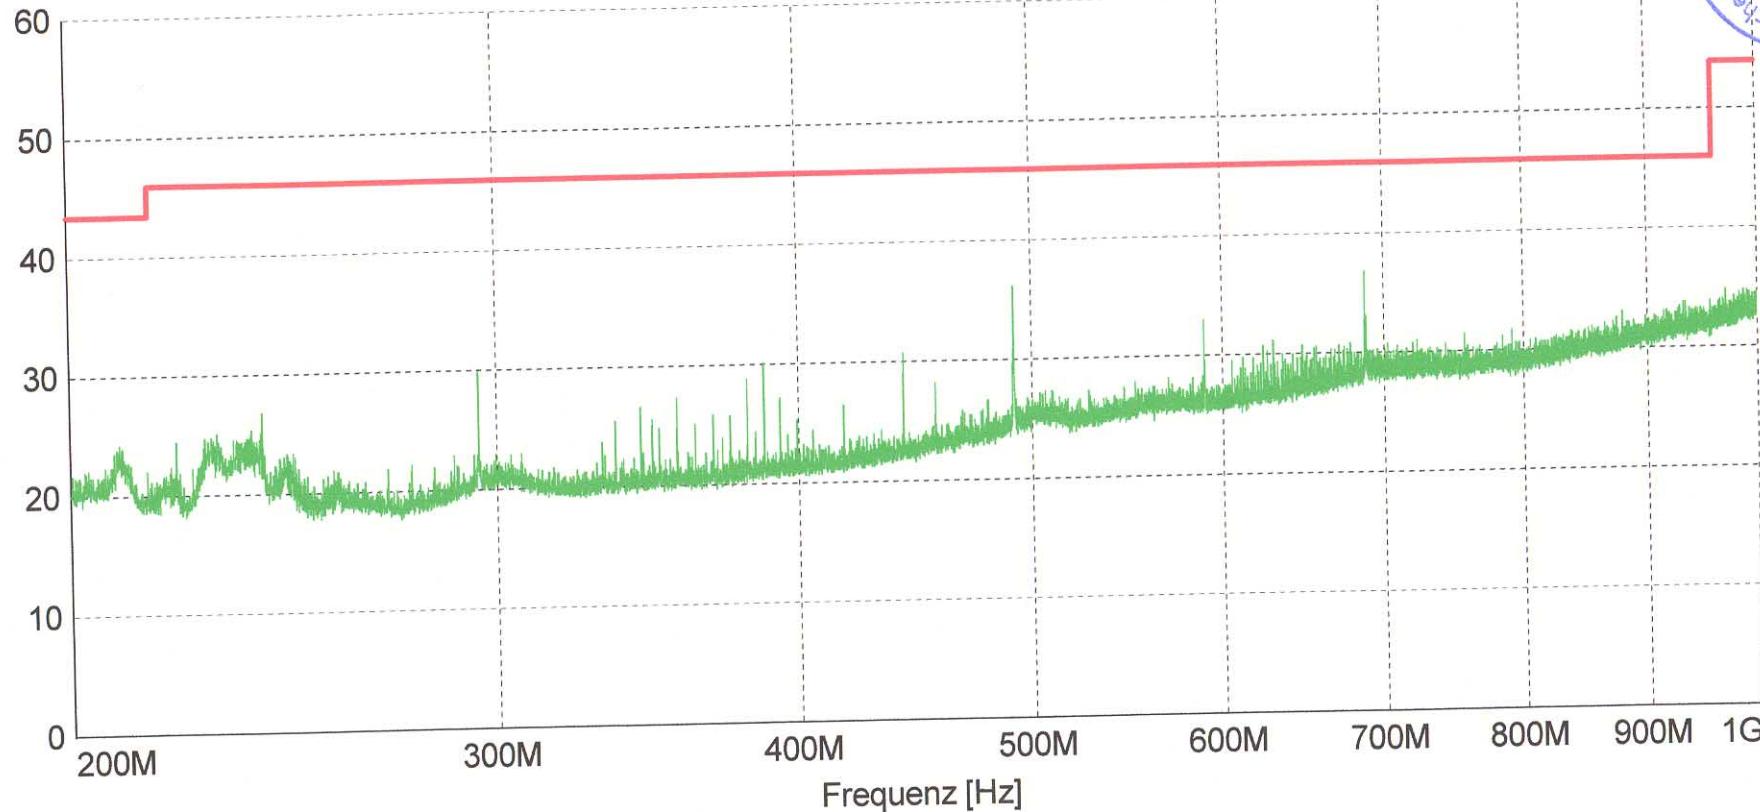

MES MOBY\_2\_C2\_F3\_pre PK  
LIM FCC ClassB F QP/AV      FCC ClassB, field strength 3m

