

<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	<b>18092001.r01</b>	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	89214158	Seite 1 von 18 <i>Page 1 of 18</i>
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	4603457	<b>Auftragsdatum:</b> <i>Order date:</i>	09.08.2018	
<b>Auftraggeber:</b> <i>Client:</i>	MYLAPS BV, Zuiderhoutlaan 4 2012PJ Haarlem , Netherlands			
<b>Prüfgegenstand:</b> <i>Test item:</i>	DXX Part 15 Low Power Communication Device Transmitter			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	RC4 Pro			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	Compliance with regulatory requirements			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	47 CFR PART 15 (10-1-17 EDITION), Subpart 15C			
	-			
	-			

<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	09.08.2018	
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	1143137	
<b>Prüfzeitraum:</b> <i>Testing period:</i>	04.09.2018	
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	Leek	
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland Nederland B.V. Leek Laboratory	
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass	

<b>geprüft von / tested by:</b> <i>R.vd Meer</i>			<b>Kontrolliert von / reviewed by:</b> <i>Dijs</i>		
05.12.2018	R.van der Meer/Test Eng.		05.12.2018	E. van der Wal/Senior Eng.	
<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b> -					
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>			Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
<p>* Legende: 1 = sehr gut      2 = gut      3 = befriedigend      4 = ausreichend      5 = mangelhaft  P(ass) = entspricht o.g. Prüfgrundlage(n)      F(ail) = entspricht nicht o.g. Prüfgrundlage(n)      N/A = nicht anwendbar      N/T = nicht getestet</p> <p>Legend: 1 = very good      2 = good      3 = satisfactory      4 = sufficient      5 = poor  P(ass) = passed a.m. Test specification(s)      F(ail) a.m. test specification(s)      N/A = not applicable      N/T = not tested</p>					
<p><b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b>  <i>This test report only relates to the above mentioned testsample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This report does not entitle to carry any test mark</i></p>					

**Prufbericht-Nr: 18092001.r01**  
Test report No: 18092001.r01

Seite 2 von 18  
Page 2 of 18

**Liste der verwendeten Prüfmittel**  
**List of used test equipment**

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.  
NA= Not Applicable



<b>Prüfmittel</b> Kind of Equipment	<b>Hersteller /</b> Manufacturer	<b>Bezeichnung /</b> Model Name	<b>Prüfmittel- Nr. / ID-Nr.</b> Equipment No. / ID-No.	<b>Kalibrierung</b> Calibration (mm/yyyy)	<b>Nächste Kalibrierung</b> Next calibration (mm/yyyy)
<b>For Radiated Emissions</b>					
Measurement Receiver	Rohde & Schwarz	ESCI	A00314	03/2018	03/2019
RF Cable S-AR	Gigalink	APG0500	A00447	01/2018	01/2019
Controller	Maturo	SCU/088/ 8090811	A00450	NA	NA
Controller	EMCS	DOC202	A00257	NA	NA
Test facility	Comtest	FCC listed: 786213 IC: 2932G-2	A00235	10/2017	10/2020
Antenna mast	EMCS	AP-4702C	A00258	NA	NA
Temperature- Humiditymeter	Extech	SD500	A00444	06/2018	06/2019
Magnetic Loop Antenna 60cm	Chase	HLA6120	A01491	12/2017	12/2020
Loop antenna, 6cm	NA	7405-901	A00309	09/2017	09/2019
Biconilog Testantenna	Teseq	CBL 6111D	A00466	10/2017	10/2018

Prufbericht-Nr: 18092001.r01  
Test report No: 18092001.r01


Seite 3 von 18  
Page 3 of 18

**Produktbeschreibung**  
*Product description*

1	<b>Produktdetails</b> <i>Product details</i>	MYLAPS Sports Timing – RC4 Pro
2	<b>Maße / Gewicht</b> <i>Dimensions / Weight</i>	See product documents
3	<b>Bedienelemente</b> <i>Operating elements</i>	None
4	<b>Ausstattung / Zubehör</b> <i>Equipment / Accessories</i>	None
5	<b>Verwendete Materialien</b> <i>Used materials</i>	None
6	<b>Sonstiges</b> <i>Other</i>	None

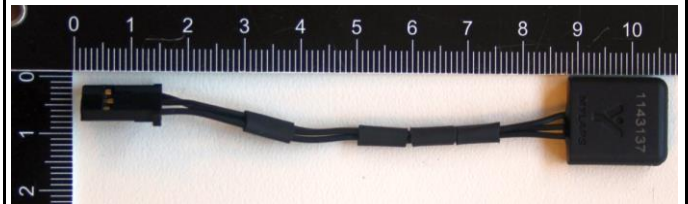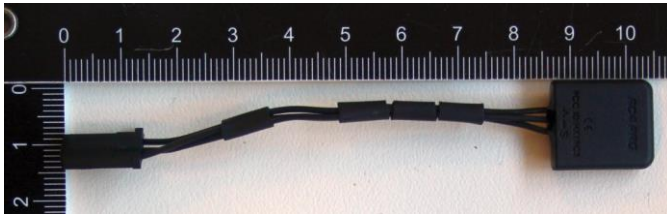

Note: FCC ID will be NXYRC4

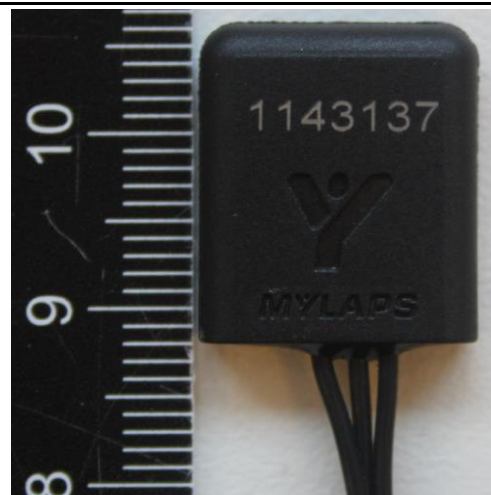

<b>Absatz</b>				
<b>Clause</b>	<b>Anforderungen – Prüfungen / Requirements - Tests</b>			
1	47 CFR Part 15 (10-1-17 Edition) - 15.207(a)  Not Applicable – EUT is battery operated only	AC Power Line Conducted Emissions	P F N/A N/T	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>
2	47 CFR Part 15 (10-1-17 Edition) - 15.209, 15.223	Radiated unwanted emissions	P F N/A N/T	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

Testmethods: ANSI C63.10-2013.

<b>Revisions</b> <i>Revisions</i>			
<b>Revision</b> Revision	<b>Datum</b> Date	<b>Anmerkung</b> Remark	<b>Verfasser</b> Author
-	30.10.2018	First release	R. van der Meer
-	05.12.2018	Equipment Class corrected to DXX	R. van der Meer
Note: Latest revision report will replace all previous reports			

--

**Table of contents**

1.1	Test methodology.....	6
1.2	Test facility.....	6
1.3	Test conditions.....	6
2	System test configuration.....	7
2.1	Justification.....	7
2.2	EUT mode of operation.....	7
2.3	Special accessories.....	7
2.4	Equipment modifications.....	7
3	Radiated emission data.....	8
3.1	Radiated emission data, H-field.....	8
3.2	Radiated field strength measurements H-field, frequency range of 0.009-30 MHz.....	9
3.3	Radiated field strength measurements (30 MHz – 1 GHz, E-field).....	11
3.4	Radiated field strength measurements (30 MHz – 1 GHz, E-field).....	12
3.4.1	Test equipment used (for reference see test equipment listing).....	12
3.5	Test setup photograph.....	13
3.6	Plot of the emissions below 30 MHz.....	14
3.7	Plot of the emissions 30 - 1000 MHz.....	15

### 1.1 Test methodology.

The test methodology used is based on the requirements of 47 CFR Part 15 (10-1-17 Edition), sections 15.31, 15.209 and 15.223. The test methods, which have been used, are based on ANSI C63.10-2013.

Radiated emission tests were performed at a measurement distance of 3 meters and measurement results were extrapolated to the applicable distance.

The receivers are switching automatically to the right bandwidth in accordance with CISPR 16. This is implemented in the receiver. The antenna factors are programmed in the test receiver. The receiver automatically calculates the appropriate correction factor for the utilized antenna and also the appropriate antenna factor for the cable loss. The total correction is automatically added to the measured value.

### 1.2 Test facility.

The Federal Communications Commission has reviewed the technical characteristics of the test facilities at TÜV Rheinland Nederland B.V., located at Eiberkamp 10, 9351 VT Leek, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 786213. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

### 1.3 Test conditions.

Normal test conditions:

Temperature (\*) : +15°C to +35°C  
Relative humidity(\*) : 20 % to 75 %  
Supply voltage : 9Vdc, Battery powered (new battery used during testing).

*\*When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.*



## 2 System test configuration.

### 2.1 Justification.

The EUT was configured for testing as normally used. The EUT was powered by a 9 V battery (See Figure 1). The test sample was configured by the applicant to enable continuous transmit.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10-2013.

**Figure 1: Test Setup Diagram .**

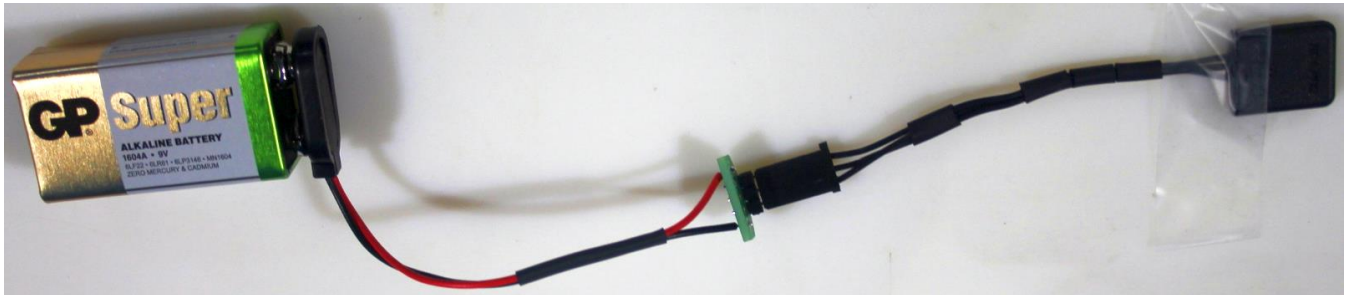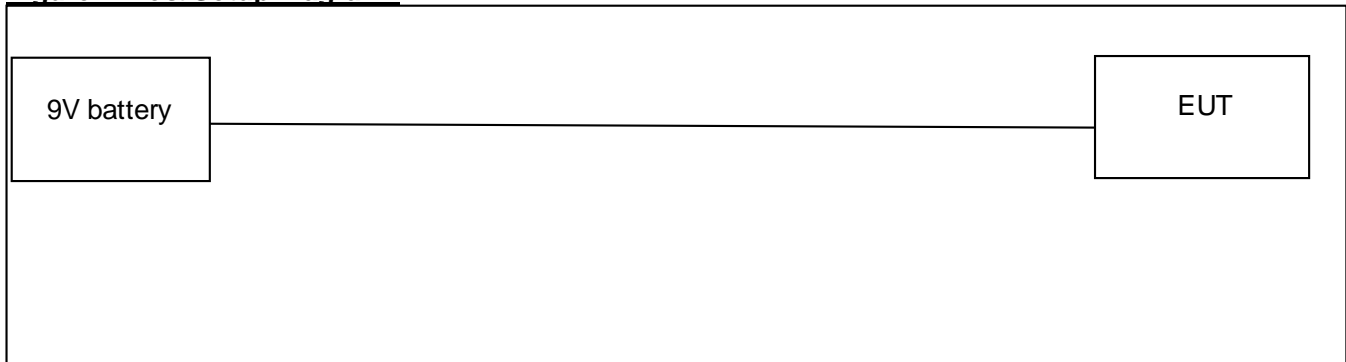

### 2.2 EUT mode of operation.

The tests have been performed with a complete functioning EUT.

### 2.3 Special accessories.

None.

### 2.4 Equipment modifications.

None.

### 3 Radiated emission data.

#### 3.1 Radiated emission data, H-field

**RESULT: Pass**

Date of testing: 2018-09-04

Frequency range: 9kHz - 30 MHz

Requirements:

FCC 15.209, 15.223 and 15.35.

15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Field strength (dB $\mu$ V/m)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	43.5-13.8	300
0.490-1.705	24000/F(kHz)	33.8-22.9	30
1.705-30.0	30	29.5	30

Table 2. Field strength limits

Test procedure:

ANSI C63.10-2013.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

Radiated emission testing was performed at a distance of 3 meters in a 5 meter semi-anechoic chamber. The measured values were corrected to the applicable distance using the extrapolation factor of 40dB/decade or 80sB/decade as per FCC Part 15.31(f)(2).

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The six highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.



### 3.2 Radiated field strength measurements H-field, frequency range of 0.009-30 MHz.

Frequency	(a) Measurement results	(b) Antenna factor	(c) Cable loss	(d) Distance extrapolation factor	Detector	Measurement results (calculated = a+b+c-d)	Limits
MHz	dBµV @3m	dB	dB	dB		dBµV/m @30m	dBµV/m @30m
4.425	29.6	19.5	1	40	Pk	10.1	60.0
4.690	32.3	19.5	1	40	Pk	12.8	60.0
4.865	32.5	19.5	1	40	Pk	13.0	60.0
4.880	32.3	19.5	1	40	Pk	12.8	60.0
4.970	34.3	19.5	1	40	Pk	15.1	60.0
5.005	35.3	19.5	1	40	Pk	15.8	60.0
5.165	31.5	19.5	1	40	Pk	12.0	60.0

Table 3a Radiated emissions of the EUT, Peak values

Frequency	(a) Measurement results	(b) Antenna factor	(c) Cable loss	(d) Distance extrapolation factor	Detector	Measurement results (calculated = a+b+c-d)	Limits
MHz	dBµV @3m	dB	dB	dB		dBµV/m @30m	dBµV/m @30m
4.425	13.9	19.5	1	40	Av	-5.6	60.0
4.690	15.7	19.5	1	40	Av	-3.8	60.0
4.865	15.1	19.5	1	40	Av	-4.4	60.0
4.880	15.3	19.5	1	40	Av	-4.2	60.0
4.970	16.3	19.5	1	40	Av	-3.2	60.0
5.005	16.4	19.5	1	40	Av	-3.1	60.0
5.165	14.3	19.5	1	40	Av	-5.2	60.0

Table 3b Radiated emissions of the EUT, Average values

The results of the radiated emission tests in the frequency range 0.009 – 30 MHz, carried out in accordance with 47 CFR Part 15 section 15.209 and 15.223 with the EUT operating in continuous transmit mode, are depicted in Tables 3a and 3b.

See notes on the next page.


**Notes:**

1. Calculated measurement results are obtained by using the 40 dB/decade extrapolation factor and the antenna factor and cable loss is included. For instance the corrected value for 5.005 MHz fundamental frequency is calculated as:  
Measurement result + Antenna Factor + Cable loss – Extrapolation Factor =>  
35.3 dBµV + 19.5 dB + 1 dB – 40 dB = 15.8 dBµV/m.
2. Field strength values of radiated emissions at frequencies in the frequency range 0.009 – 30 MHz not listed in Tables 3a/3b are more than 20 dB below the applicable limit. The reported value is the worst case found at the reported frequency which were for EUT in vertical position.
3. The measurement distance was 3m and measured values were corrected to the applicable limit distance.
4. Measurement uncertainty is ±5.0dB.
5. Both Peak and Average test results were higher (by a margin higher than the measurement uncertainty) than the original certification test results as can be found in test report 09101201.fcc01\_Rev01. According to KDB 178919 D01 v06, section 1 B footnote 3 this increase in fundamental emission is a degradation of EMC parameters.

Test equipment used (for reference see test equipment listing):

A01491	A00235	A00141	A00314		

Test setup photograph

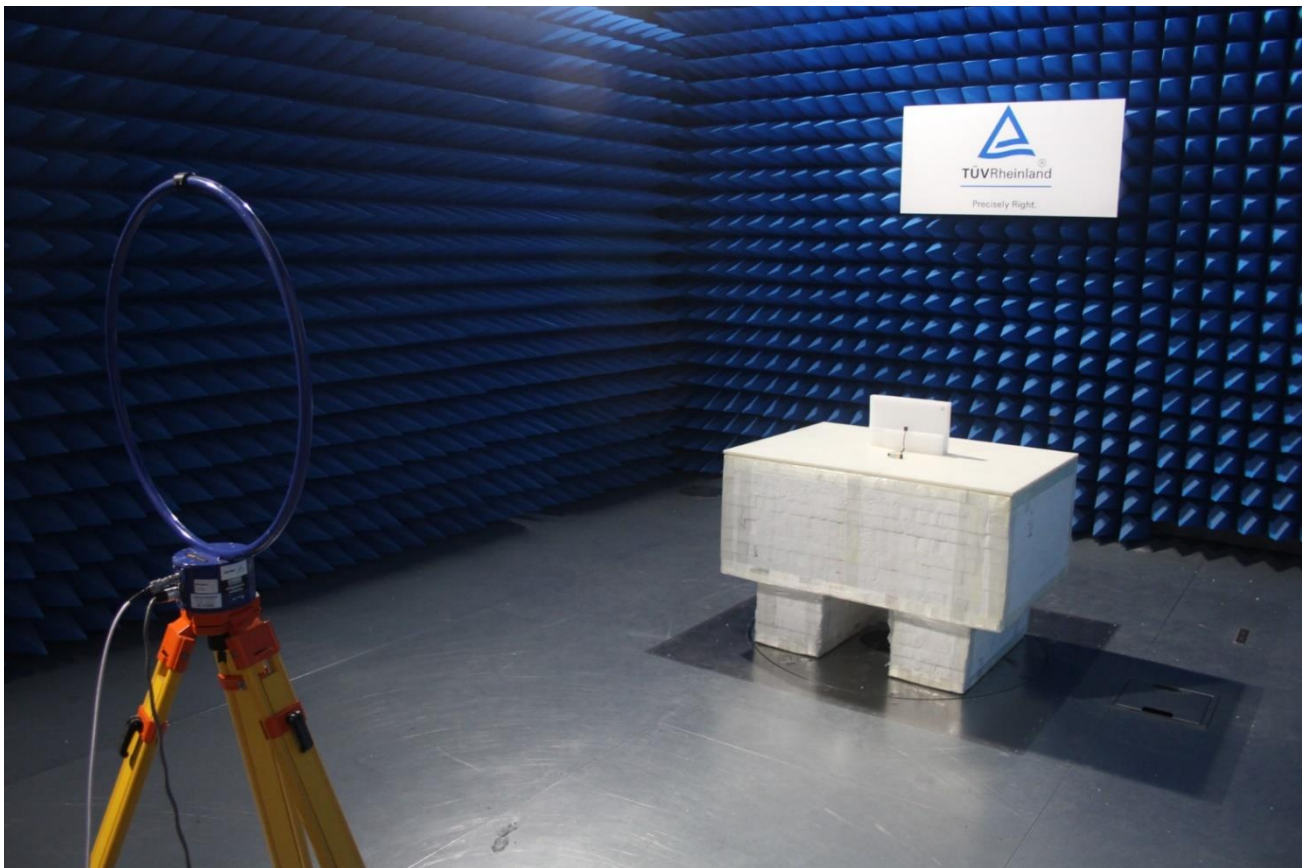

### 3.3 Radiated field strength measurements (30 MHz – 1 GHz, E-field)

**RESULT: PASS**

Date of testing: 2018-09-04

Frequency range: 30MHz - 1000MHz

Requirements:

FCC 15.209(a)

Except for Class A digital devices, the field strength of radiated emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (µV/meter)	Field strength (dBµV/m)	Measurement distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0 (Av), 74 (Pk)	3

Table of applicable limits

Test procedure:

Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The spectrum was examined from 30MHz to 1 GHz. Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

### 3.4 Radiated field strength measurements (30 MHz – 1 GHz, E-field)

Frequency [MHz]	Antenna Orientation	Detector / Bandwidth	Level [dB $\mu$ V/m]	Limit QP [dB $\mu$ V/m]	Result Pass/Fail
54	Horizontal	Qp / 120 kHz	5.0	40.0	Pass
58	Horizontal	Qp / 120 kHz	5.0	40.0	Pass
149.5	Horizontal	Qp / 120 kHz	10.4	46.0	Pass
354.6* <sup>N</sup>	Horizontal	Qp / 120 kHz	15.0	46.0	Pass
364.3* <sup>N</sup>	Horizontal	Qp / 120 kHz	15.3	46.0	Pass
490.5	Horizontal	Qp / 120 kHz	19.4	46.0	Pass
560.5	Horizontal	Qp / 120 kHz	21.8	46.0	Pass

Table 4 Radiated emissions of the EUT

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15 section 15.205, 15.209 are depicted in Table 4.


**Notes:**

1. Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.
2. Measurement uncertainty is 5.22 dB.
3. The reported value is the worst case found at the reported frequency.
4. \*<sup>N</sup> new emissions found compared to original certification due to improved test setup noise floor. Values obtained were below the noise floor of the original certification.
5. a selection of plots is provided on the next pages.


#### 3.4.1 Test equipment used (for reference see test equipment listing).

A00257	A00258	A00314	A00447	A00235	A00466	
--------	--------	--------	--------	--------	--------	--

### 3.5 Test setup photograph

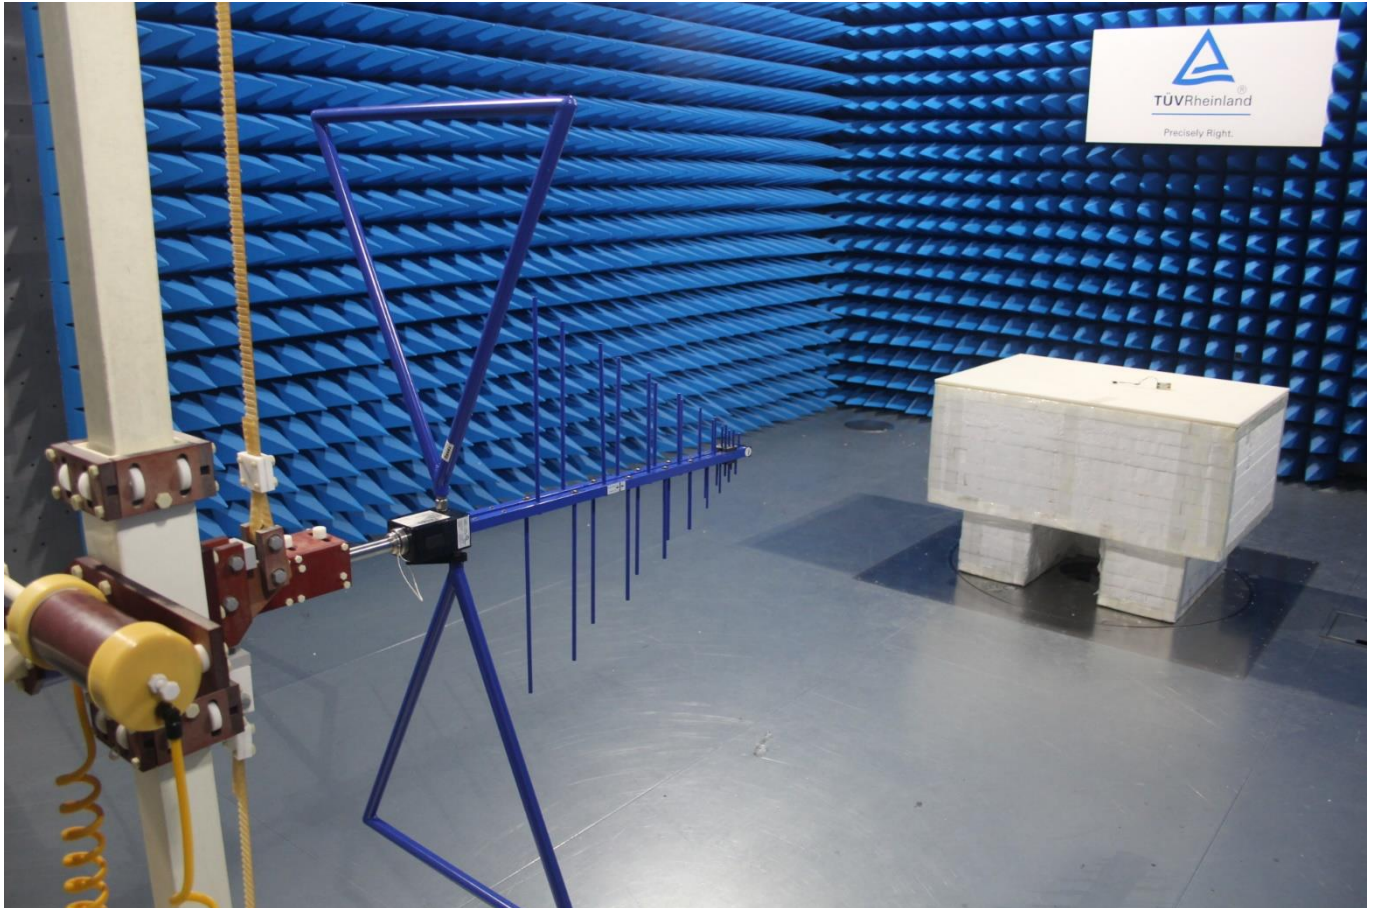


### 3.6 Plot of the emissions below 30 MHz

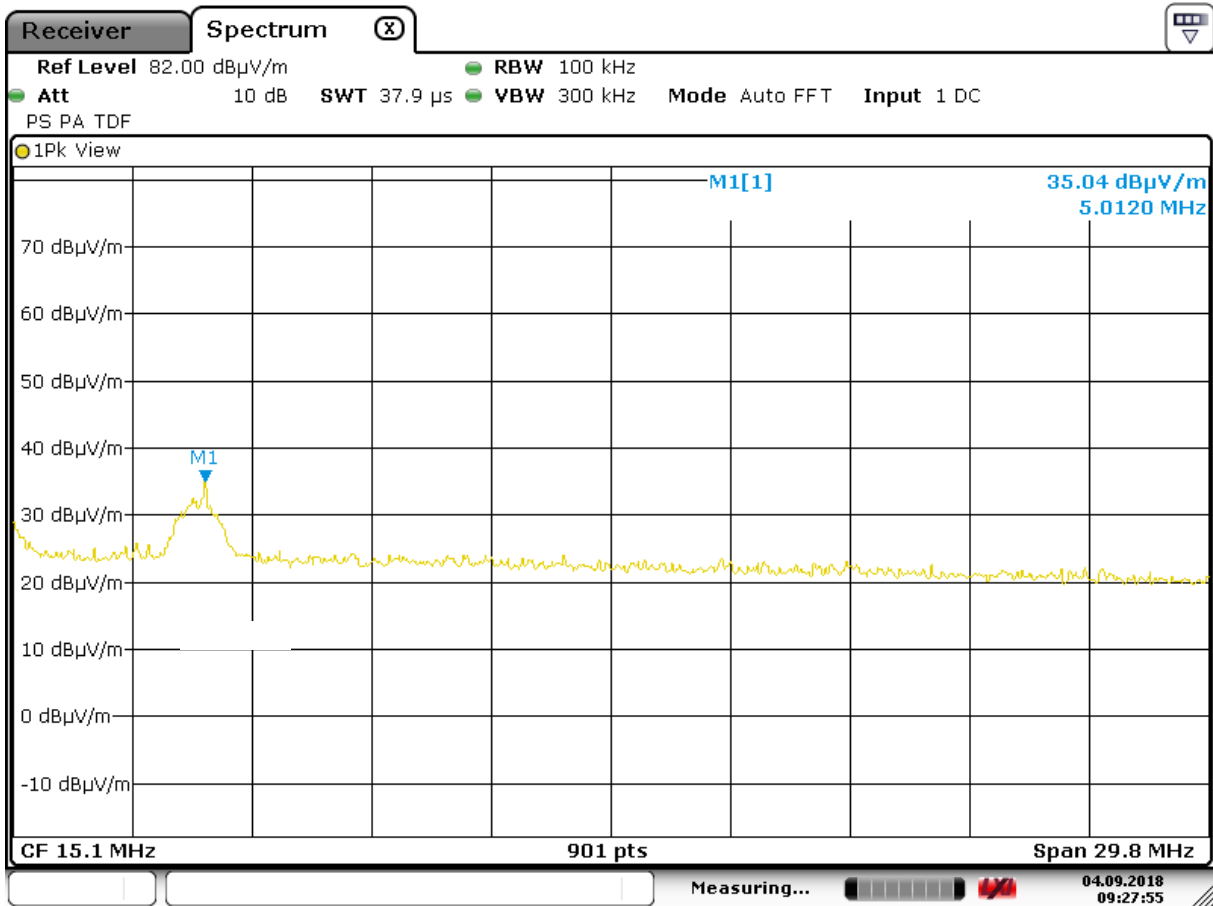


Date: 4.SEP.2018 09:27:56

Plot 1: Plot of the emissions, EUT Vertical, Peak values shown


### 3.7 Plot of the emissions 30 - 1000 MHz

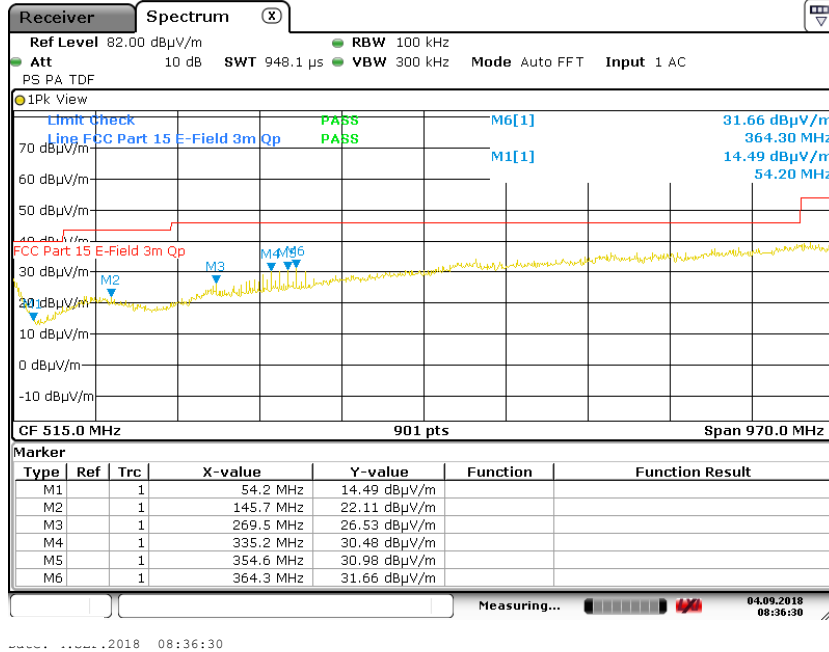

Plot 2: Plot of the emissions, EUT Horizontal, Antenna Horizontal polarization, Peak values shown

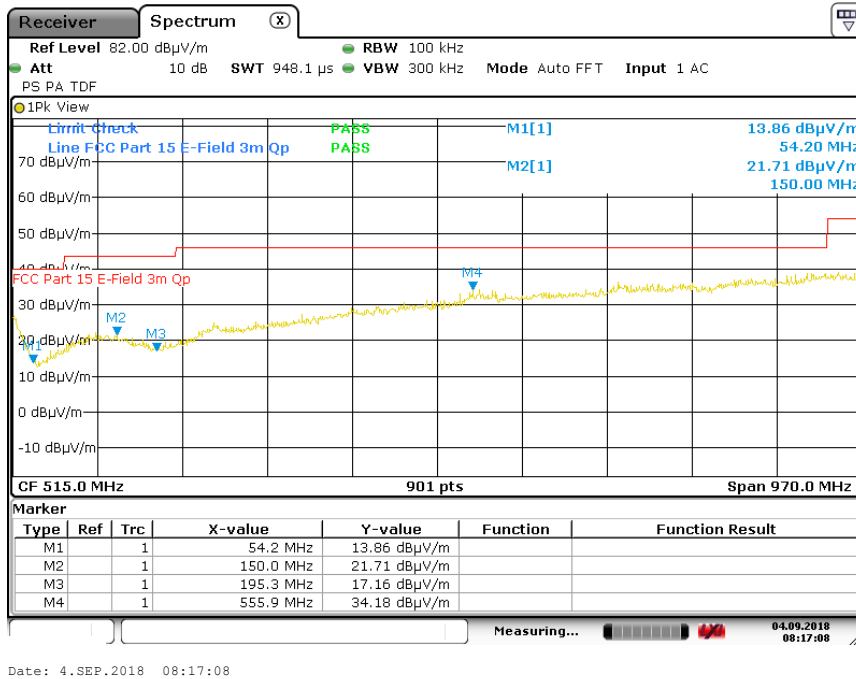

Plot3: Plot of the emissions, EUT Horizontal, Antenna Vertical polarization, Peak values shown

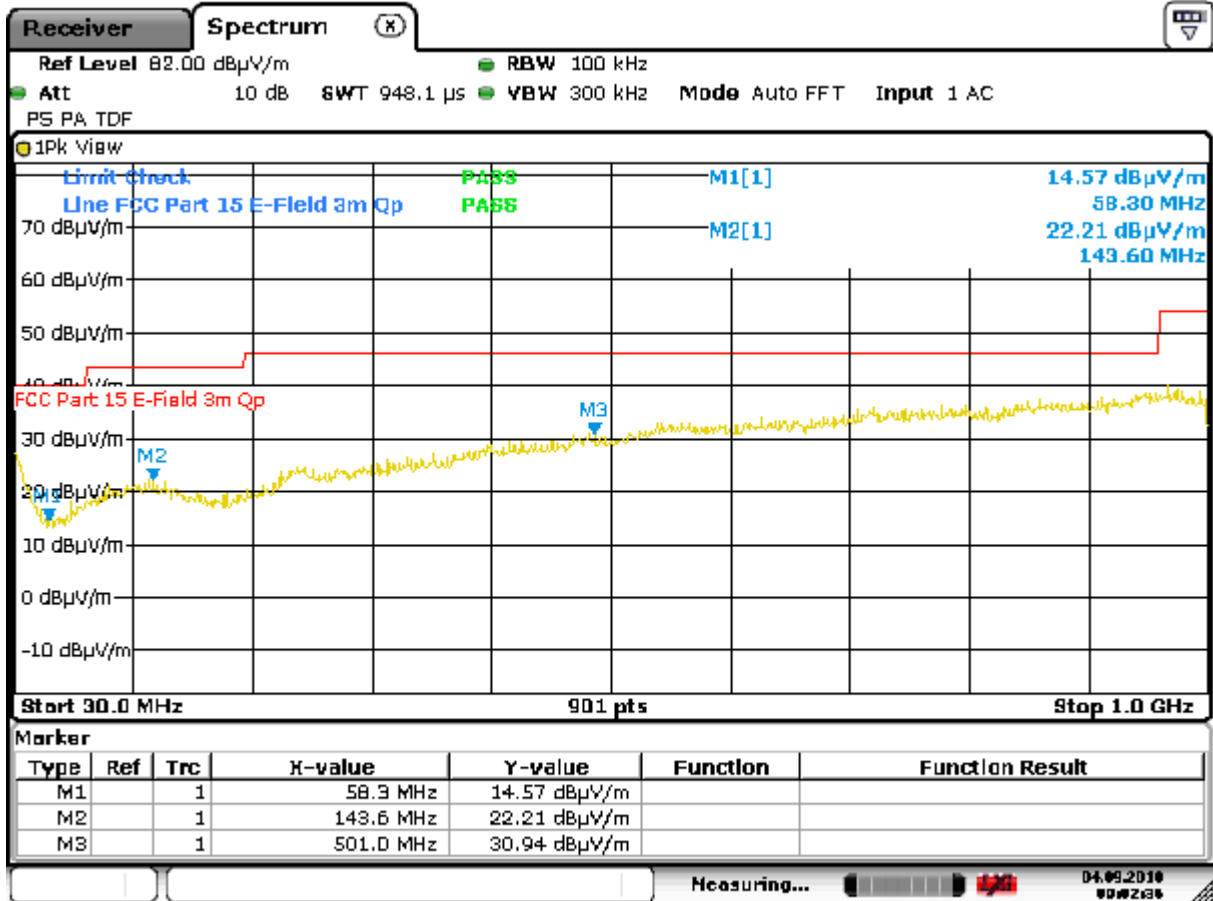

Date: 4.SEP.2018 09:02:36

Plot4: Plot of the emissions, EUT Vertical, Antenna Vertical polarization, Peak values shown



## 4 Plot of the carrier bandwidth

### 4.1 Bandwidth of the emission


**RESULT: PASS**

Date of testing: 2015-11-

#### Requirements:


The 6 dB bandwidth of the fundamental emission shall be measured in order to find out the exact allowed limit of the field strength of any emission within the band 1.705-10.0 MHz.

Test procedure: ANSI C63.10:2013

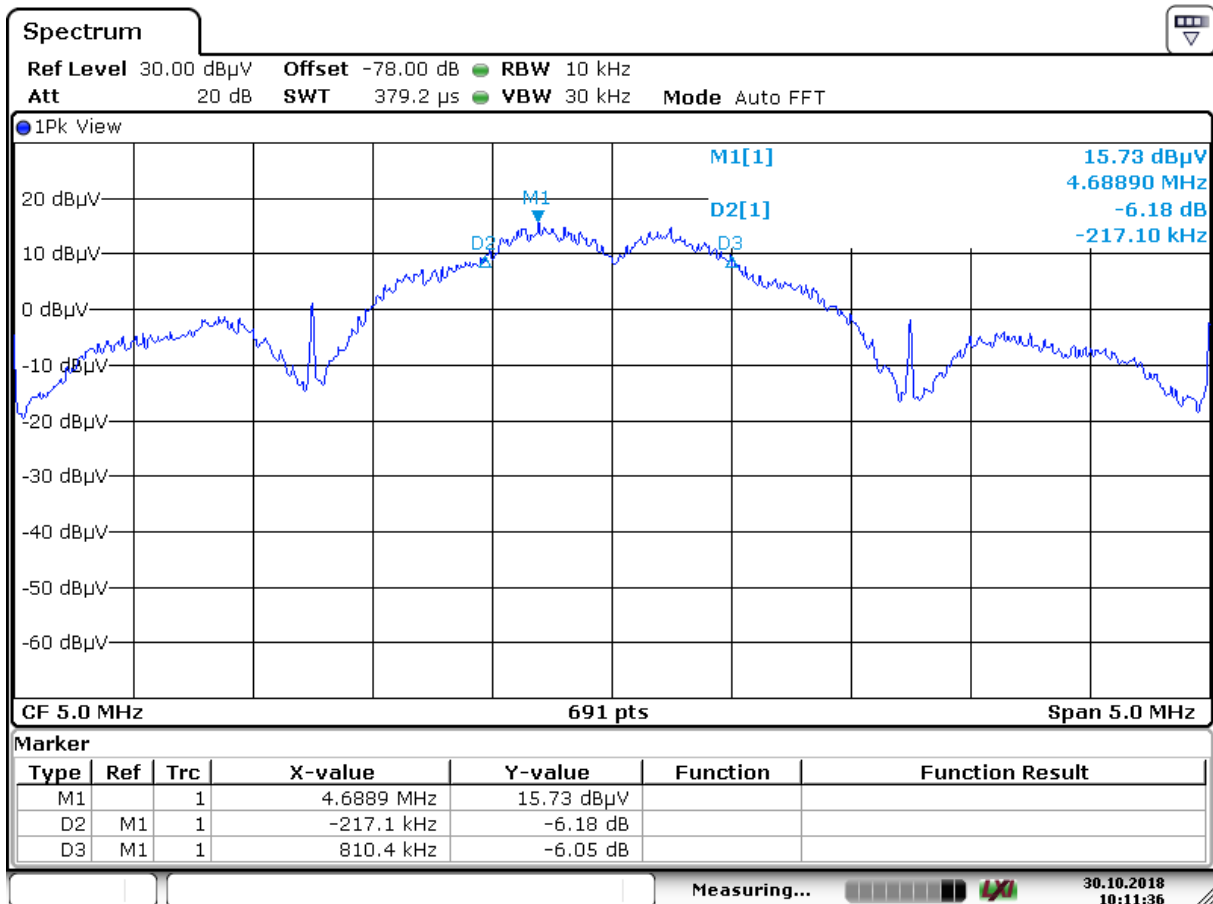

Date: 30 OCT 2018 10:11:37

Plot 5a: 6 dB bandwidth of the carrier, actual bandwidth is 1027 kHz, which is more than 10% of the center frequency there for the 40 dB $\mu$ V/m limit for radiated emissions is applicable according to 47 CFR Part 15.223.

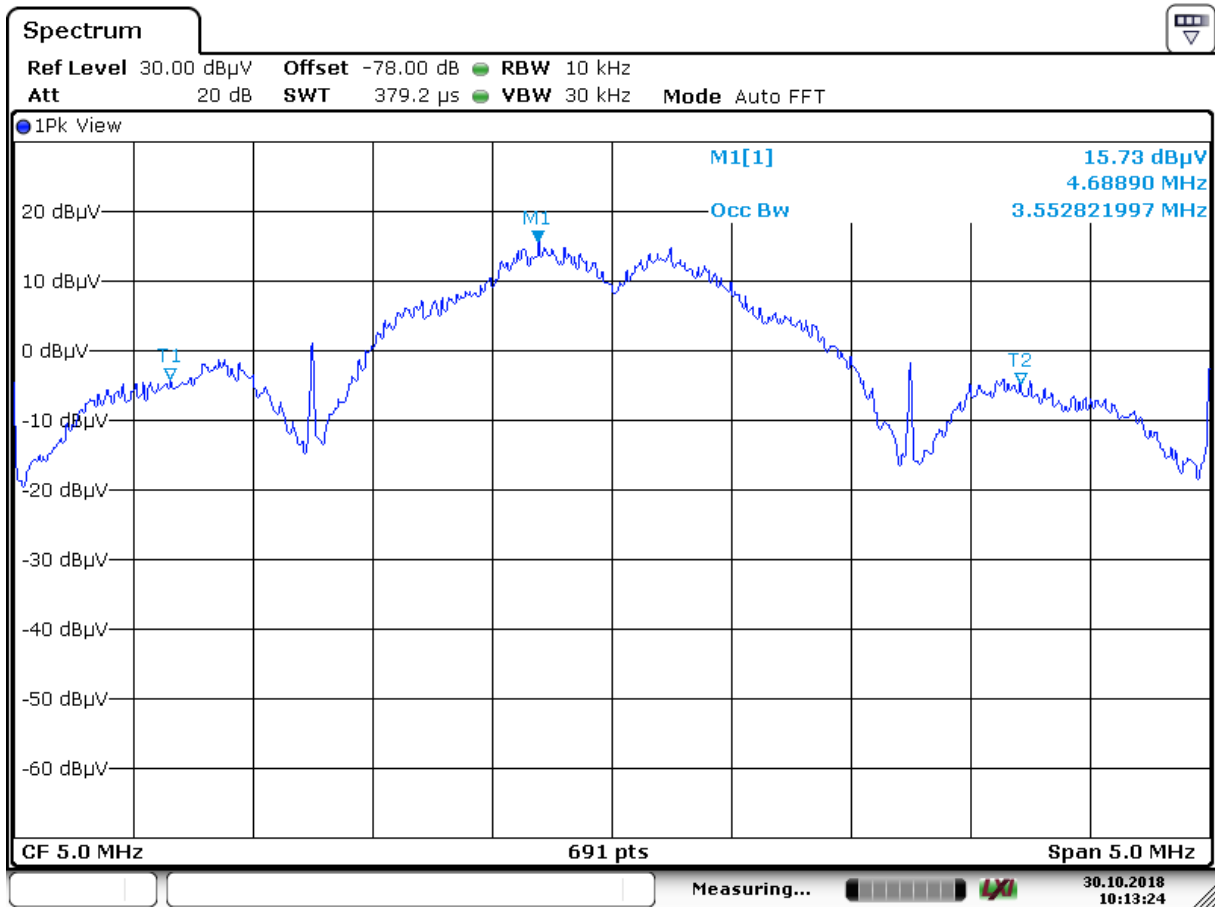

Date: 30.OCT.2018 10:13:24

Plot 5b: 20 dB bandwidth of the carrier, actual bandwidth is 3553 kHz as measured on a spectrum analyzer

**<< End of report >>**