

# FCC Part 15 Subpart B&C §15.247 RSS-247 Issue 2

## Test Report

|                      |                                   |
|----------------------|-----------------------------------|
| Equipment Under Test | Vehicle Bluetooth Low Energy Unit |
| Model Name           | SYECBLE1911                       |
| Variant Model Name   | -                                 |
| FCC ID               | NYOSYECBLE1911                    |
| IC Number            | 3109A-SYECBLE1911                 |
| Applicant            | SEOYON ELECTRONICS CO., LTD.      |
| Manufacturer         | SEOYON ELECTRONICS CO., LTD.      |
| Date of Test(s)      | 2019. 10. 02 ~ 2019. 10. 16       |
| Date of Issue        | 2019. 10. 17                      |

In the configuration tested, the EUT complied with the standards specified above.

| Issue to                                                                                                                                                                                           | Issue by                                                                                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SEOYON ELECTRONICS CO., LTD.</b><br>100, Saneop-ro 156beon-gil,<br>Gwonseon-gu, Suwon-si,<br>Gyeonggi-do, Korea<br><br>100, Saneop-ro 156beon-gil, Gwonseon-gu,<br>Suwon-si, Gyeonggi-do, Korea | <b>MOVON CORPORATION</b><br>498-2, Geumeo-ro, Pogok-eup,<br>Cheoin-gu, Yongin-si, Gyeonggi-do,<br>Korea, 17030<br><br>7, Seolleung-ro 94-gil, Gangnam-gu,<br>Seoul-si ,Korea |

**Revision history**

| Revision | Date of issue | Description | Revised by |
|----------|---------------|-------------|------------|
| --       | Oct. 17, 2019 | Initial     | -          |
|          |               |             |            |

## **Table of contents**

|                                                                                 |    |
|---------------------------------------------------------------------------------|----|
| 1. Applicant Information .....                                                  | 4  |
| 2. Laboratory Information .....                                                 | 4  |
| 3. Summary of test results.....                                                 | 5  |
| 4. EUT Description .....                                                        | 6  |
| 5. Measurement equipment .....                                                  | 7  |
| 6. Antenna requirement .....                                                    | 8  |
| 7. DTS bandwidth& 99% bandwidth measurement .....                               | 9  |
| 8. Maximum peak conducted output power .....                                    | 13 |
| 9. Peak power spectral density .....                                            | 16 |
| 10. Transmitter radiated spurious emissions and conducted spurious emissions .. | 19 |

## 1. Applicant Information

### 1.1. Details of applicant

FCC Applicant : SEOYON ELECTRONICS CO., LTD.  
FCC Address : 100, Saneop-ro 156beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea  
IC Applicant : SEOYON ELECTRONICS CO., LTD  
IC Address : 100, Saneop-ro 156beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea  
Contact Person : Hee Tack Ryu  
Telephone : +82-31-420-3481  
Fax : +82-31-426-9325

### 1.2. Manufacturer Information

FCC Manufacturer : SEOYON ELECTRONICS CO., LTD.  
FCC Address : 100, Saneop-ro 156beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea  
IC Manufacturer : SEOYON ELECTRONICS CO., LTD  
IC Address : 100, Saneop-ro 156beon-gil, Gwonseon-gu, Suwon-si, Gyeonggi-do, Korea

## 2. Laboratory Information

Company name : MOVON CORPORATION  
Test site number : FCC (KR0151), IC (24841)  
FCC Address : 498-2, Geumeo-ro, Pogok-eup, Cheoin-gu, Yongin-si, Gyeonggi-do, South Korea  
IC Address : 7, Seolleung-ro 94-gil, Gangnam-gu, Seoul-si ,Korea  
Web site : <http://www.movonlab.com>  
Telephone : +82-31-338-8837  
Facsimile : +82-31-338-8847

### 3. Summary of test results

The EUT has been tested according to the following specifications:

| FCC Rule<br>FCC part 15             | IC Rule<br>RSS-247, RSS-GEN                | Description                                                             | Result               |
|-------------------------------------|--------------------------------------------|-------------------------------------------------------------------------|----------------------|
| 15.203<br>15.247(b)(4)              | -                                          | Antenna requirement                                                     | C                    |
| 15.247(a)(2)                        | RSS-247 5.2(a)<br>RSS-GEN 6.7              | DTS Bandwidth & 99 % bandwidth                                          | C                    |
| 15.247(b)(3)                        | RSS-247 5.4(d)                             | Maximum peak conducted output power                                     | C                    |
| 15.247(e)                           | RSS-247 5.2(b)                             | Peak Power Spectral Density                                             | C                    |
| 15.205(a)<br>15.209(a)<br>15.247(d) | RSS-GEN 8.10<br>RSS-GEN 8.9<br>RSS-247 5.5 | Transmitter radiated spurious emissions,<br>Conducted spurious emission | C                    |
| 15.207(a)                           | RSS-GEN 8.8                                | AC Conducted power line test                                            | N/A <sup>Note1</sup> |


#### ※ Abbreviation

C Complied  
N/A Not applicable  
F Fail

#### The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C63.4:2014, ANSI C63.10:2013  
FCC Public Notice KDB 558074 D01 v05r02  
RSS-247 Issue 2  
RSS-GEN Issue 5

#### Approval Signatories
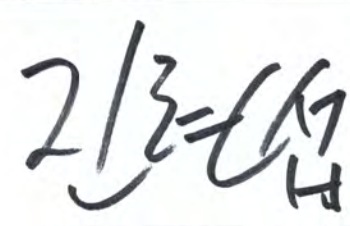
| Test and Report Completed by :                                                      | Report Approval by :                                                                 |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |
| David park<br>Test Engineer<br>MOVON CORPORATION                                    | Issac Jin<br>Technical Manager<br>MOVON CORPORATION                                  |

#### 4. EUT Description

|                               |                                      |
|-------------------------------|--------------------------------------|
| Kind of product               | Vehicle Bluetooth Low Energy Unit    |
| Model Name                    | SYECBLE1911                          |
| Variant Model Name            | -                                    |
| FCC ID                        | NYOSYECBLE1911                       |
| IC Number                     | 3109A-SYECBLE1911                    |
| Power supply                  | DC 12.0 V                            |
| Frequency range               | 2 402 MHz ~ 2 480 MHz (Bluetooth LE) |
| Modulation technique          | GFSK                                 |
| Number of channels            | 40 ch. (Bluetooth LE)                |
| Antenna gain                  | 4.03 dB i (Max.)                     |
| Test Site Registration Number | FCC (KR0151), IC (24841)             |
| H/W version / S/W version     | 1.0 / 1.0                            |
| Test S/W version              | V2.12.1(Smart RF Studio7)            |

##### 4.1. Table for Test Modes and Frequency

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Mode         | Data rate (Worst case) | Frequency (Freq. MHz)                             |
|--------------|------------------------|---------------------------------------------------|
| Bluetooth LE | 1 Mbps                 | Lowest (2 402) / Middle (2 440) / Highest (2 480) |

## 5. Measurement equipment

| Equipment             | Manufacturer | Model                        | Serial number             | Calibration Interval | Calibration date | Calibration due. |
|-----------------------|--------------|------------------------------|---------------------------|----------------------|------------------|------------------|
| Test Receiver         | R&S          | ESVS30                       | 829673/015                | 1 year               | 2018-12-06       | 2019-12-06       |
| Signal Generator      | R&S          | SMB100A                      | 178128                    | 1 year               | 2018-12-07       | 2019-12-07       |
| Spectrum Analyzer     | R&S          | FSV-40                       | 100832                    | 1 year               | 2019-05-27       | 2020-05-27       |
| Power Meter           | Agilent      | E4416A                       | GB41290645                | 1 year               | 2019-05-27       | 2020-05-27       |
| Power Sensor          | Agilent      | 9327A                        | US40441490                | 1 year               | 2019-05-27       | 2020-05-27       |
| Horn Antenna          | R&S          | HF906                        | 100236                    | 2 year               | 2019-04-09       | 2021-04-09       |
| Horn Antenna          | AH Systems   | SAS-572                      | 269                       | 2 year               | 2017-08-01       | 2020-08-01       |
| Horn Antenna          | AH Systems   | SAS-573                      | 164                       | 2 year               | 2018-04-26       | 2020-04-26       |
| Bi-Log Ant.           | S/B          | VULB 9161SE                  | 4159                      | 2 year               | 2018-06-11       | 2020-06-11       |
| Loop Antenna          | ETS LINDGREN | 6502                         | 00118166                  | 2 year               | 2018-10-30       | 2020-10-30       |
| Power Amplifier       | TESTEK       | TK-PA18H                     | 170013-L                  | 1 year               | 2019-05-27       | 2020-05-27       |
| Power Amplifier       | MITEQ        | AFS43-01002600               | 2048519                   | 1 year               | 2018-10-29       | 2019-10-29       |
| Power Amplifier       | MITEQ        | AMF-6F-2600400<br>0-33-8P-HS | 1511665                   | 1 year               | 2018-12-10       | 2019-12-10       |
| Step Attenuator       | Agilent      | 8494B                        | US37181955                | 1 year               | 2019-05-29       | 2020-05-29       |
| Controller            | INNCO        | CO2000                       | CO2000/064/6961003/<br>L  | N/A                  | N/A              | N/A              |
| Antenna Master        | INNCO        | MA4000                       | MA4000/038/6961003/<br>L  | N/A                  | N/A              | N/A              |
| Controller            | INNCO        | CO3000                       | CO3000/812/34240914<br>/L | N/A                  | N/A              | N/A              |
| Antenna Master        | INNCO        | MA4640-XP-ET                 | None                      | N/A                  | N/A              | N/A              |
| RF Cable              | SUHNER       | SUCOFLEX100                  | 84047746                  | 3 month              | 2019-09-09       | 2019-12-09       |
| RF Cable              | SUHNER       | SUCOFLEX102                  | 801270/2                  | 3 month              | 2019-09-09       | 2019-12-09       |
| RF Cable              | SUHNER       | SUCOFLEX102                  | 801532/2                  | 3 month              | 2019-09-09       | 2019-12-09       |
| Band Rejection Filter | Micro-Tonics | BRM50702                     | 064                       | 1 year               | 2019-05-29       | 2020-05-29       |
| DC Power Supply       | Agilent      | U8002A                       | MY56110033                | 1 year               | 2018-10-30       | 2019-10-30       |

### ※Remark Support equipment

| Description       | Manufacturer | Model         | Serial number |
|-------------------|--------------|---------------|---------------|
| Notebook computer | DELL         | Latitude D510 | -             |

## **6. Antenna requirement**

### **6.1. Standard applicable**

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (c) if transmitting antennas of directional gain greater than 6dBi are used.


### **6.2. Antenna connected construction**

Antenna used in this product is Chip antenna,  
Antenna gain is 4.03 dBi.



## 7. DTS bandwidth& 99% bandwidth measurement

### 7.1. Test setup



### 7.2. Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 825 MHz bands. The minimum of 6 dB Bandwidth shall be at least 500 kHz

### 7.3. Test procedure

1. The 6dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 6dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 100kHz, VBW ≥ 3 x RBW, Span= 2times the DTS bandwidth  
Detector= peak, Trace = max hold, Sweep=auto couple

### 7.4. Test results


Test mode : Bluetooth LE

| Frequency(MHz) | 6 dB bandwidth(MHz) | 99% bandwidth(MHz) |
|----------------|---------------------|--------------------|
| 2 402          | 0.71                | 1.07               |
| 2 440          | 0.71                | 1.07               |
| 2 480          | 0.73                | 1.08               |


### 7.4.1. Test plot

Test mode : Bluetooth LE


#### A.1. Lowest Ch. (2 402 MHz)\_6dB Bandwidth

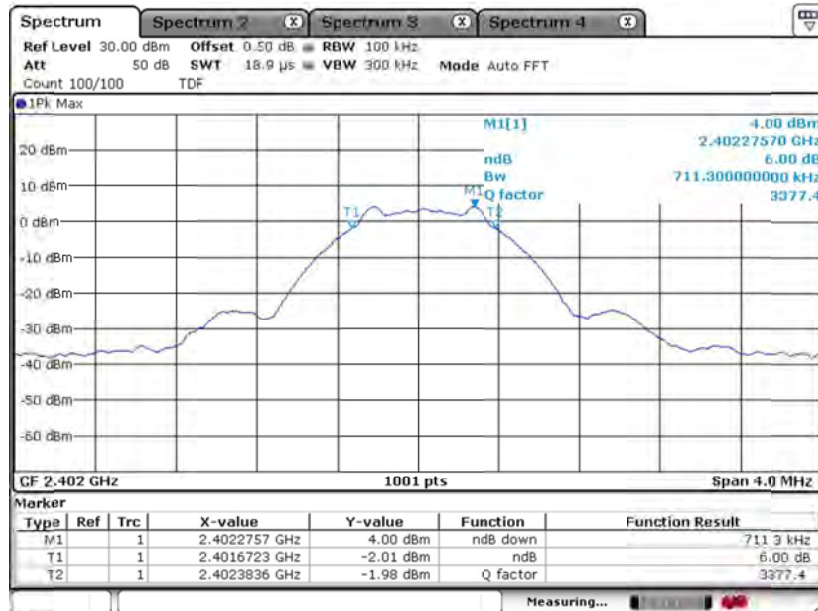


#### A.2. Lowest Ch. (2 402 MHz)\_99% Bandwidth

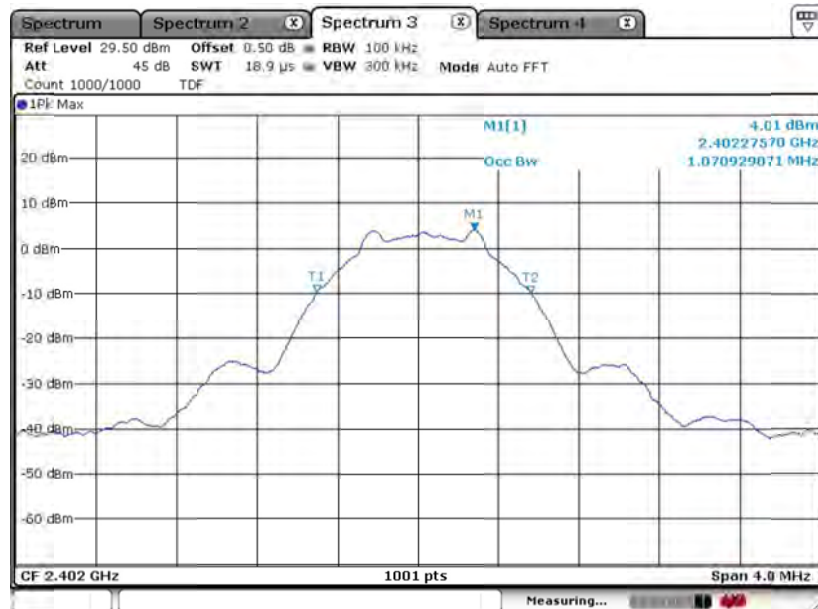


## B.1. Middle Ch. (2 440 MHz)\_6dB Bandwidth

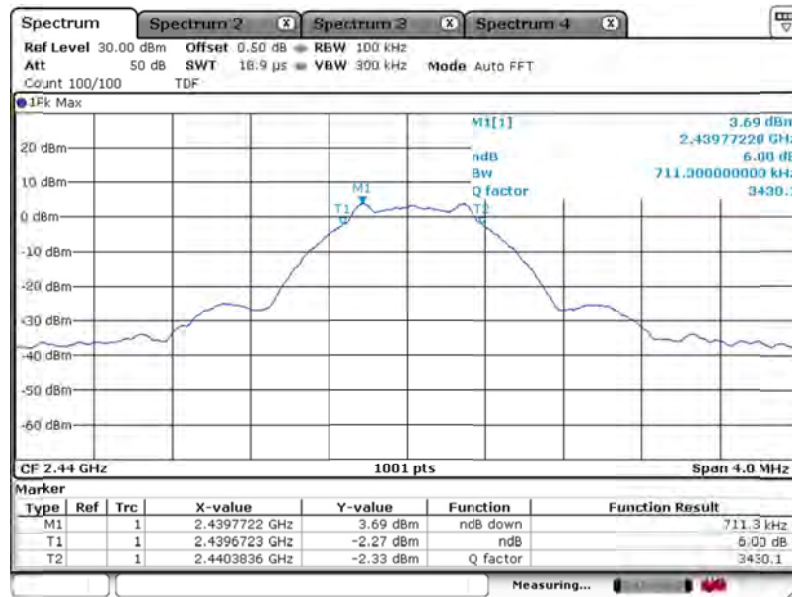

## B.2. Middle Ch. (2 440 MHz)\_99% Bandwidth

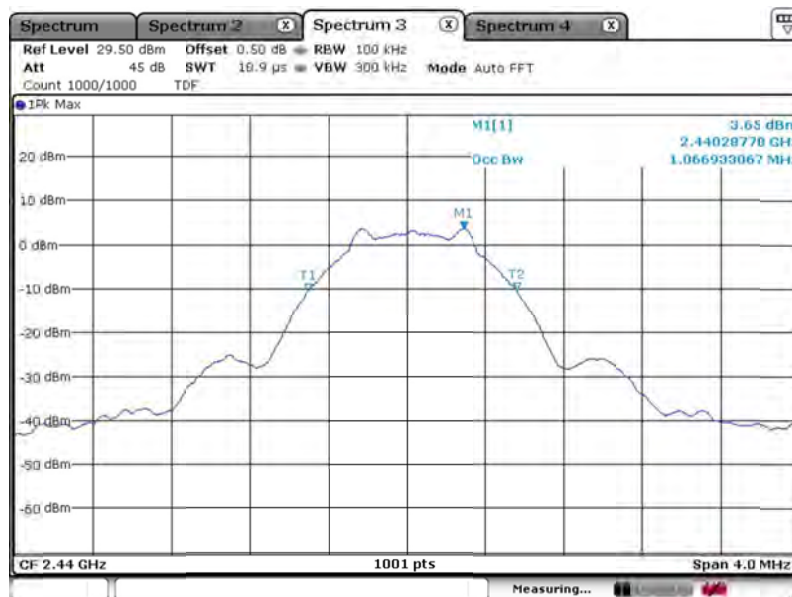

### C.1. Highest Ch. (2 480 MHz)\_6dB Bandwidth

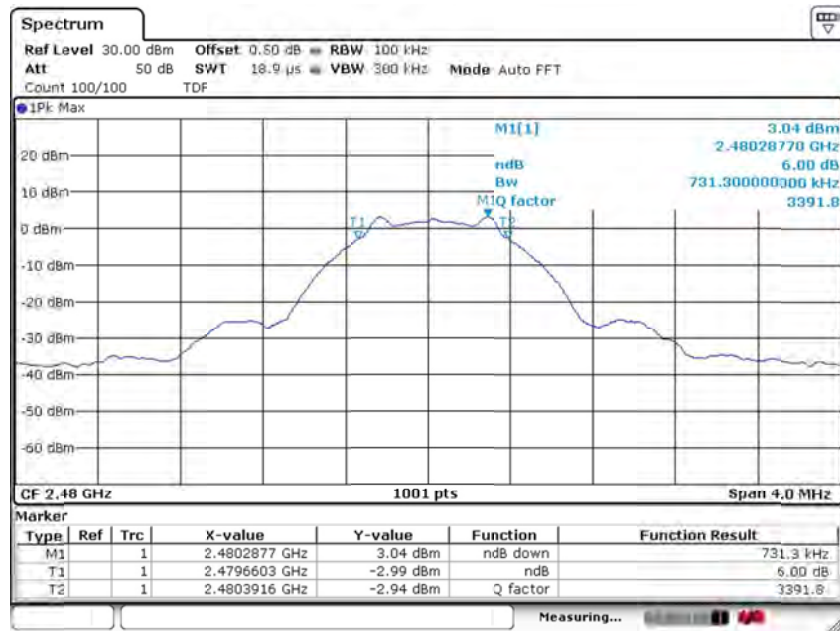


### C.2. Highest Ch. (2 480 MHz)\_99% Bandwidth



## 8. Maximum peak conducted output power

### 8.1. Test setup



### 8.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

- §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 6 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW
- §15.247(b)(1), For frequency hopping systems operating in the 2400–2483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5805 MHz band: 1Watt.

### 8.3. Test procedure

Maximum Peak Conducted Output Power is measured using the following procedure (RBW ≥ DTS bandwidth).

- Set the RBW ≥ DTS bandwidth.
- Set VBW ≥ 3 x RBW. / Set Span = 4 times the DTS bandwidth.
- Sweep time = auto couple
- Detector = peak
- Trace mode = max hold
- Allow trace to fully stabilize
- Use peak marker function to determine the peak amplitude level.

### 8.4. Test results

Test mode : Bluetooth LE

| Frequency(MHz) | Conducted power (dBm) | Limit (dBm) |
|----------------|-----------------------|-------------|
| 2 402          | 5.15                  | 30.00       |
| 2 440          | 4.71                  |             |
| 2 480          | 4.08                  |             |


\*remark

#### 1. Unit conversion


### 8.4.1. Test plot

Test mode : Bluetooth LE


#### A. Lowest Ch. (2 402 MHz)

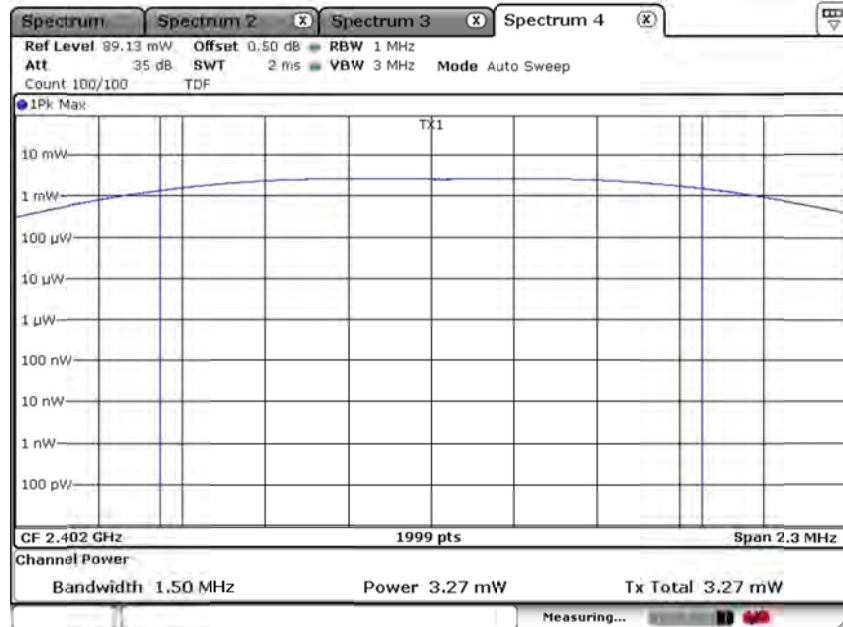

#### B. Middle Ch. (2 440 MHz)

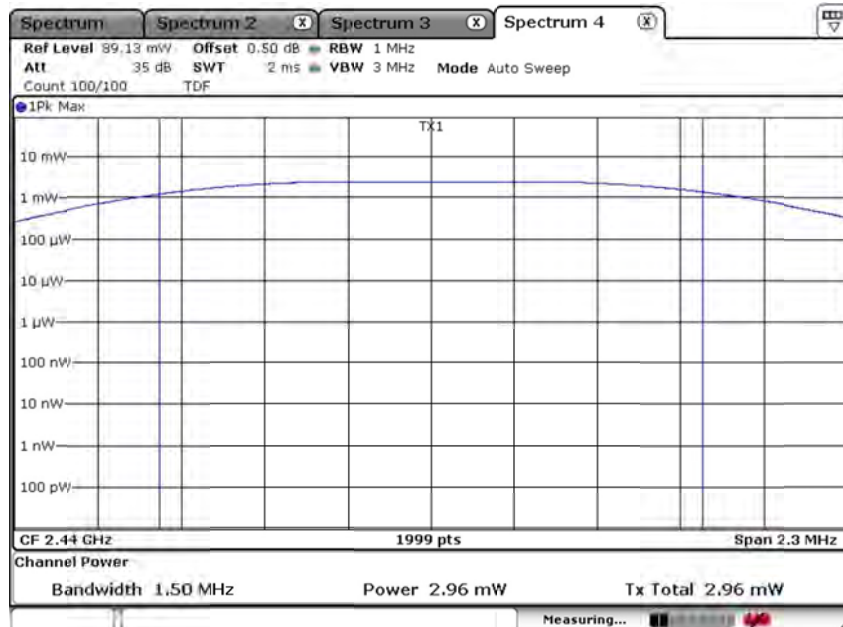


C. Highest Ch. (2 480 MHz)

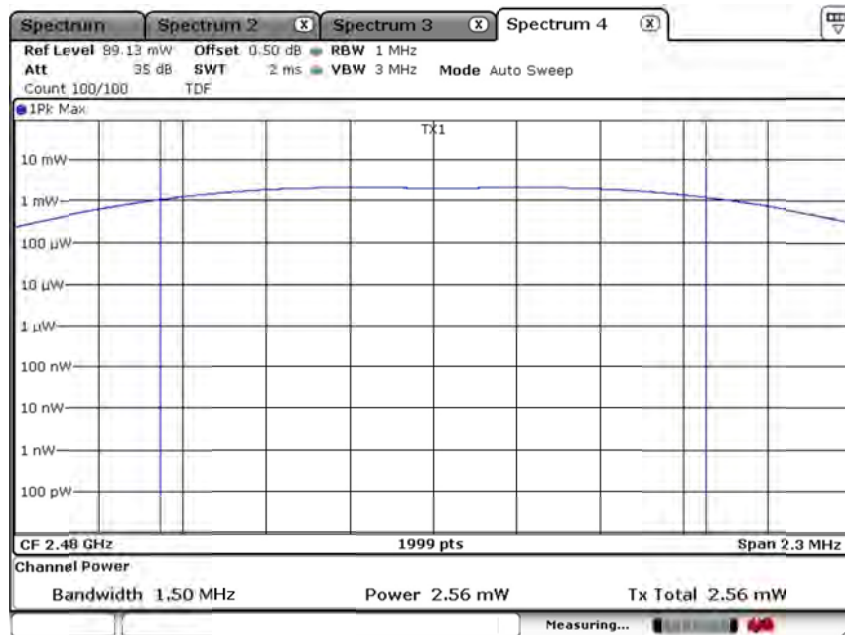



## 9. Peak power spectral density

### 9.1. Test setup



### 9.2. Limit

< 8dBm @ 3kHz BW

### 9.3. Test procedure (PKPSD)

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using;  
Span = 1.5 times the DTS bandwidth  
RBW = 3kHz ≤ RBW ≤ 100kHz  
VBW ≥ 3 x RBW, Sweep = Auto couple  
Detector function = peak, Trace = max hold

### 9.4. Test results

Test mode : Bluetooth LE


| Frequency(MHz) | Peak output power(dBm) | Limit (dBm) |
|----------------|------------------------|-------------|
| 2 402          | -5.71                  | 8.00        |
| 2 440          | -6.11                  |             |
| 2 480          | -6.67                  |             |




### 9.4.1. Test plot

Test mode : Bluetooth LE


#### A. Lowest Ch. (2 402 MHz)

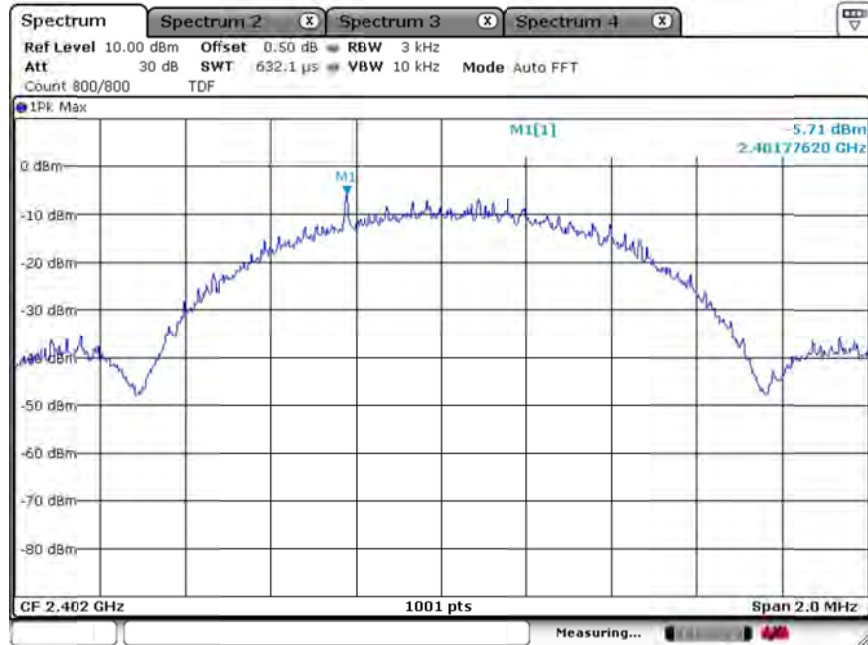

#### B. Middle Ch. (2 440 MHz)

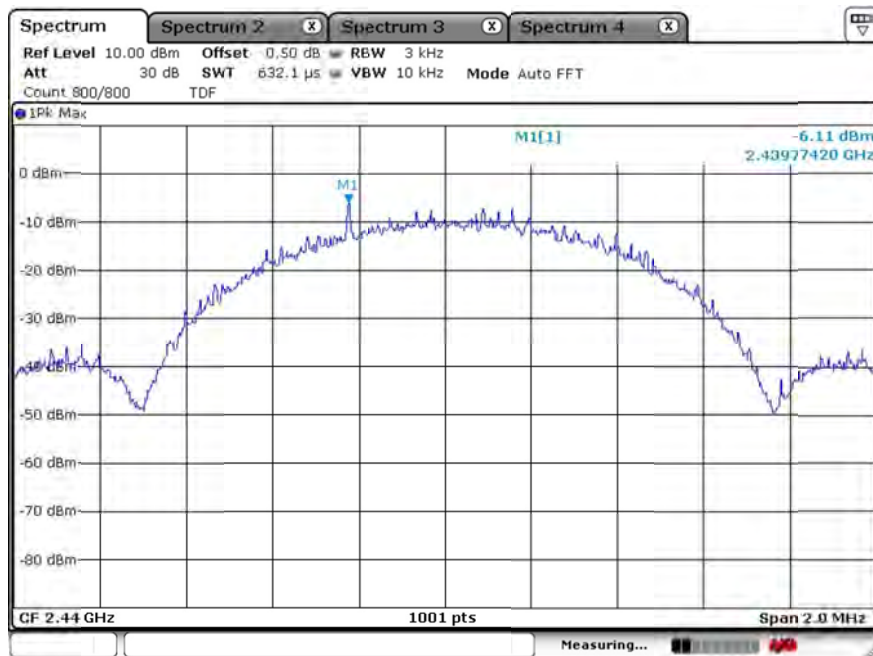

C. Highest Ch. (2 480 MHz)

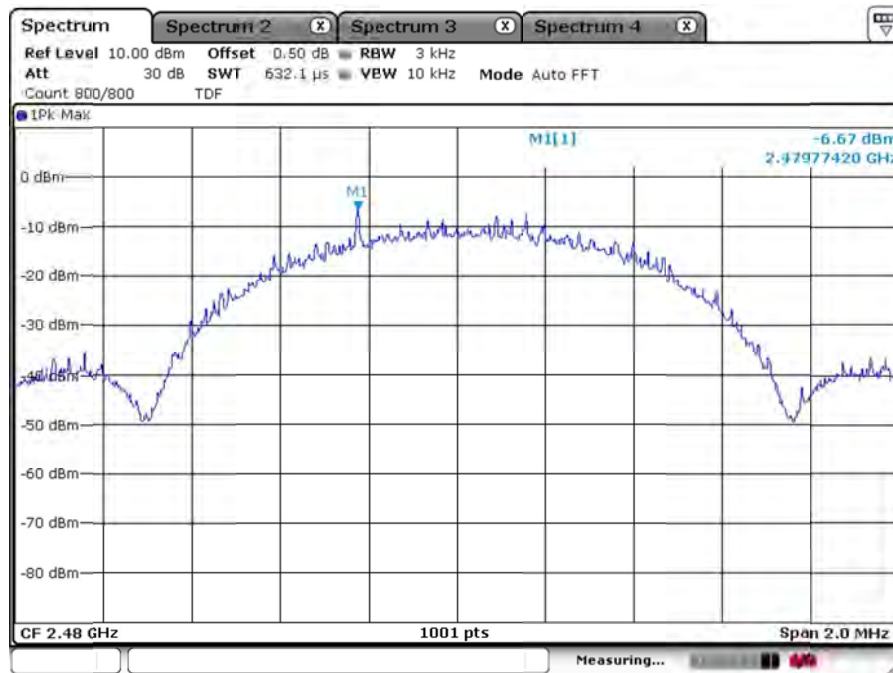


## 10. Transmitter radiated spurious emissions and conducted spurious emissions


### 10.1. Test setup

#### 10.1.1. Transmitter radiated spurious emissions


The diagram below shows the test setup that is utilized to make the measurements for emission from 9kHz to 30MHz Emissions.

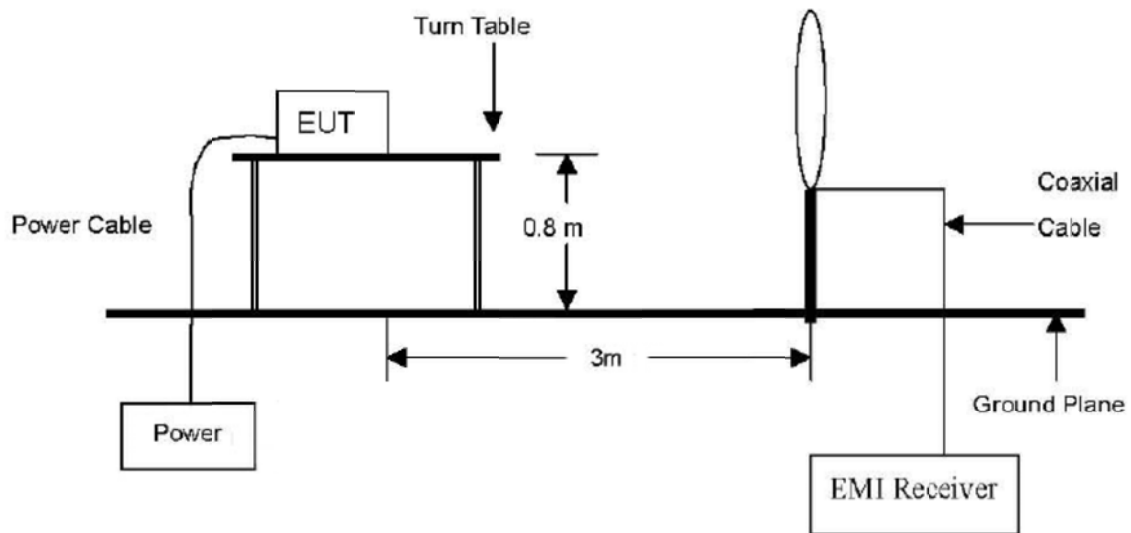

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

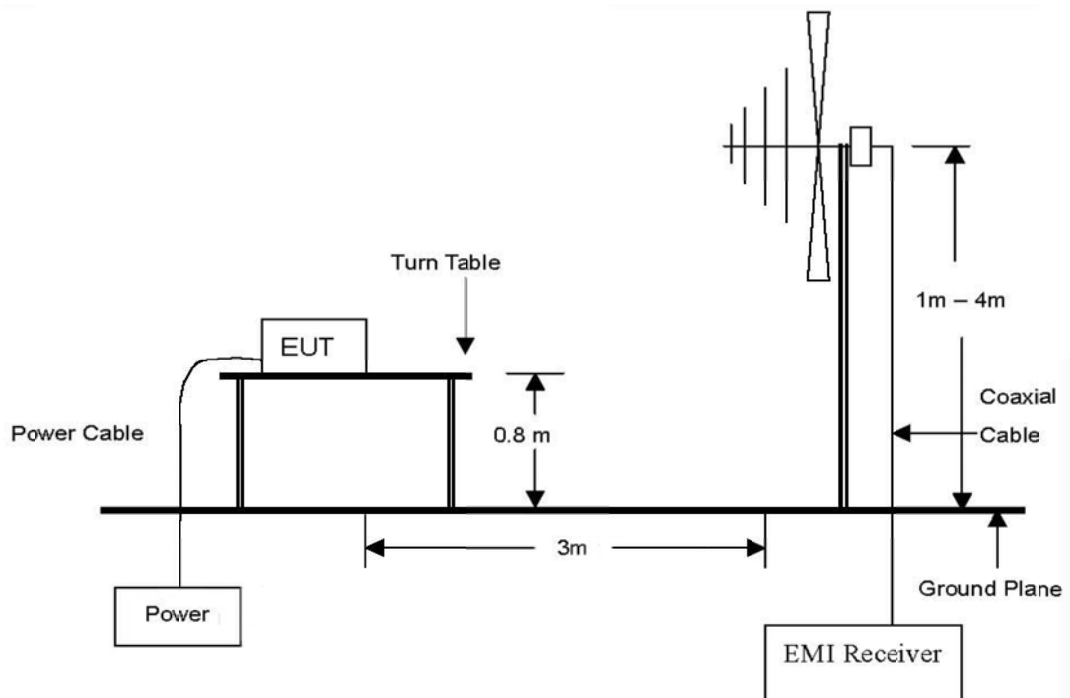

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 40 GHz emissions.

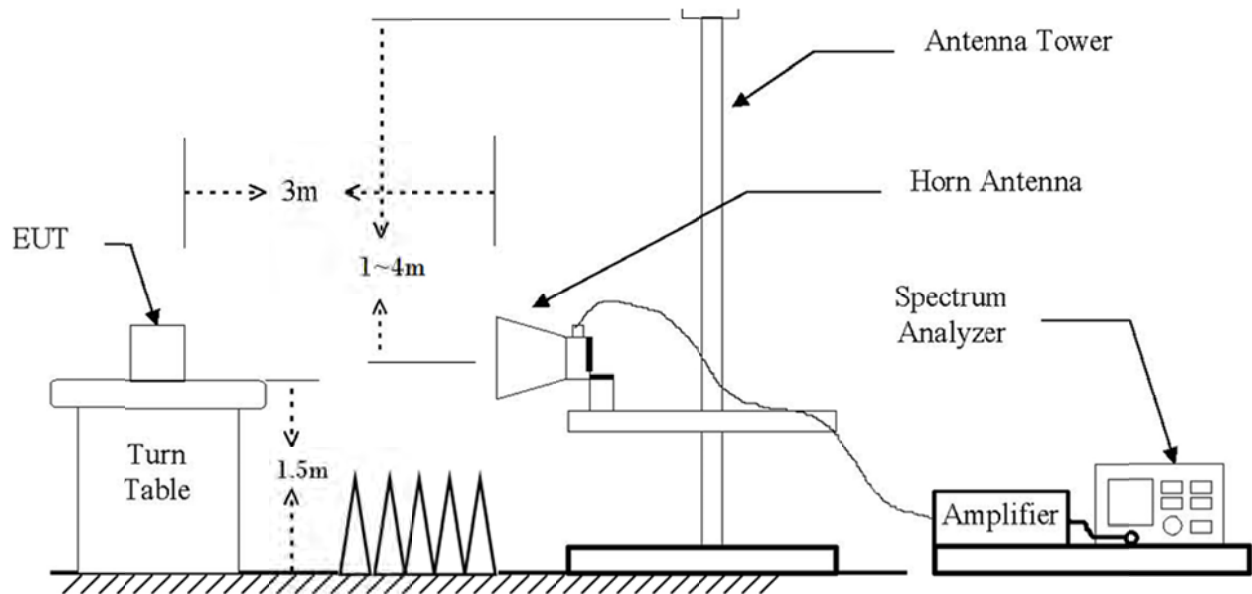

## 10.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (Meters) | Radiated at 3M (dBμV/m) | Radiated (μV/m) |
|-----------------|-------------------|-------------------------|-----------------|
| 0.009–0.490     | 300               | See the remark          | 2400/F(kHz)     |
| 0.490–1.705     | 30                |                         | 24000/F(kHz)    |
| 1.705–30.0      | 30                |                         | 30              |
| 30 - 88         | 3                 | 40.0                    | 100             |
| 88 – 216        | 3                 | 43.52                   | 150             |
| 216 – 960       | 3                 | 46.02                   | 200             |
| Above 960       | 3                 | 53.97                   | 500             |

### ※Remark

1. Emission level in dB uV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Distance extrapolation factor =20log(Specific distance/ test distance)(dB)  
Limit line=Specific limits(dB uV) + distance extrapolation factor.

### 10.3. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.10:2013. In case of the air temperature of the test site is out of the range is 10 to 40°C before the testing proceeds the warm-up time of EUT maintain adequately.

#### 10.3.1. Test procedures for radiated spurious emissions

1. The EUT is placed on a turntable, which is 0.8 m (Below 1 GHz)/ 1.5 m (Above 1 GHz) above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

#### ※Remark

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for Peak detection (PK) at frequency below 30 MHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

#### 10.3.2. Test procedures for conducted spurious emissions

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW=100 kHz, VBW=100 kHz.

## 10.4. Test results

### 10.4.1. Radiated spurious emissions (9 kHz to 30 MHz)

The frequency spectrum from 9kHz to 30MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Test mode : Bluetooth LE\_2 480 MHz (Worst case)

| Radiated emissions                                                         |                |               | Ant. | Correction factors |             |                  | Total           | Limit          |             |
|----------------------------------------------------------------------------|----------------|---------------|------|--------------------|-------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz)                                                            | Reading (dBuV) | Detector Mode | Pol. | Ant. factor (dB/m) | Amp+CL (dB) | Duty factor (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                |               |      |                    |             |                  |                 |                |             |

#### ※Remark

1. Actual = Reading + Ant. factor - Amp + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

#### 10.4.2. Radiated spurious emissions (30 MHz to 1 000 MHz)

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

**Test mode : Bluetooth LE\_2 480 MHz (Worst case)**

| Radiated emissions                                                         |                |               | Ant. | Correction factors |             |                  | Total           | Limit          |             |
|----------------------------------------------------------------------------|----------------|---------------|------|--------------------|-------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz)                                                            | Reading (dBuV) | Detector Mode | Pol. | Ant. factor (dB/m) | Amp+CL (dB) | Duty factor (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                |               |      |                    |             |                  |                 |                |             |

#### ※Remark

1. Actual = Reading + Ant. factor - Amp + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



### 10.4.3. Radiated spurious emissions & Bandedge (Above 1 000 MHz)

The frequency spectrum above 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

**Test mode : Bluetooth LE**

#### A. Lowest Ch. (2 402 MHz)

| Radiated emissions           |                |               | Ant. | Correction factors |             |                  | Total           | Limit          |             |
|------------------------------|----------------|---------------|------|--------------------|-------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz)              | Reading (dBuV) | Detector Mode | Pol. | Ant. factor (dB/m) | Amp+CL (dB) | Duty factor (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| *2389.80                     | 38.59          | Peak          | H    | 28.09              | 38.78       | -                | 45.03           | 74.00          | 28.97       |
| *2389.96                     | 25.14          | Average       | H    | 28.09              | 38.78       | -                | 24.37           | 54.00          | 29.63       |
| *4804.61                     | 50.95          | Peak          | H    | 32.86              | 35.47       | -                | 48.34           | 74.00          | 25.66       |
| *4804.04                     | 46.43          | Average       | H    | 32.86              | 35.47       | -                | 43.82           | 54.00          | 10.18       |
| Above 5 000 MHz Not detected |                |               |      |                    |             |                  |                 |                |             |

#### B. Middle Ch. (2 440 MHz)

| Radiated emissions           |                |               | Ant. | Correction factors |             |                  | Total           | Limit          |             |
|------------------------------|----------------|---------------|------|--------------------|-------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz)              | Reading (dBuV) | Detector Mode | Pol. | Ant. factor (dB/m) | Amp+CL (dB) | Duty factor (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| *4880.46                     | 47.90          | Peak          | H    | 32.86              | 35.47       | -                | 46.77           | 74.00          | 27.23       |
| *4879.96                     | 40.27          | Average       | H    | 32.86              | 35.47       | -                | 41.68           | 54.00          | 12.32       |
| Above 5 000 MHz Not detected |                |               |      |                    |             |                  |                 |                |             |

#### ※Remark

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Actual = Reading + Ant. factor - Amp + CL (Cable loss)
4. 15.31 Measurement standards.  
The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.
5. \* is Restricted band.
6. Duty cycle 100%

**C. Highest Ch. (2 480 MHz)**

| Radiated emissions           |                |               | Ant. | Correction factors |             |                  | Total           | Limit          |             |
|------------------------------|----------------|---------------|------|--------------------|-------------|------------------|-----------------|----------------|-------------|
| Frequency (MHz)              | Reading (dBuV) | Detector Mode | Pol. | Ant. factor (dB/m) | Amp+CL (dB) | Duty factor (dB) | Actual (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
| *2490.38                     | 38.80          | Peak          | V    | 28.09              | 38.78       | -                | 28.11           | 74.00          | 45.89       |
| *2488.50                     | 25.37          | Average       | V    | 28.09              | 38.78       | -                | 14.68           | 54.00          | 39.32       |
| *4959.50                     | 46.69          | Peak          | H    | 32.86              | 35.47       | -                | 44.08           | 74.00          | 29.92       |
| *4959.96                     | 41.25          | Average       | H    | 32.86              | 35.47       | -                | 38.64           | 54.00          | 15.36       |
| Above 5 000 MHz Not detected |                |               |      |                    |             |                  |                 |                |             |


**※Remark**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Actual = Reading + Ant. factor - Amp + CL (Cable loss)
4. 15.31 Measurement standards.  
The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.
5. \* is Restricted band.
6. Duty cycle 100%


#### 10.4.4. Test plot (Conducted spurious emissions & Bandedge)

Test mode : Bluetooth LE


##### A.1. Lowest Ch. (2 402 MHz)\_Band edge

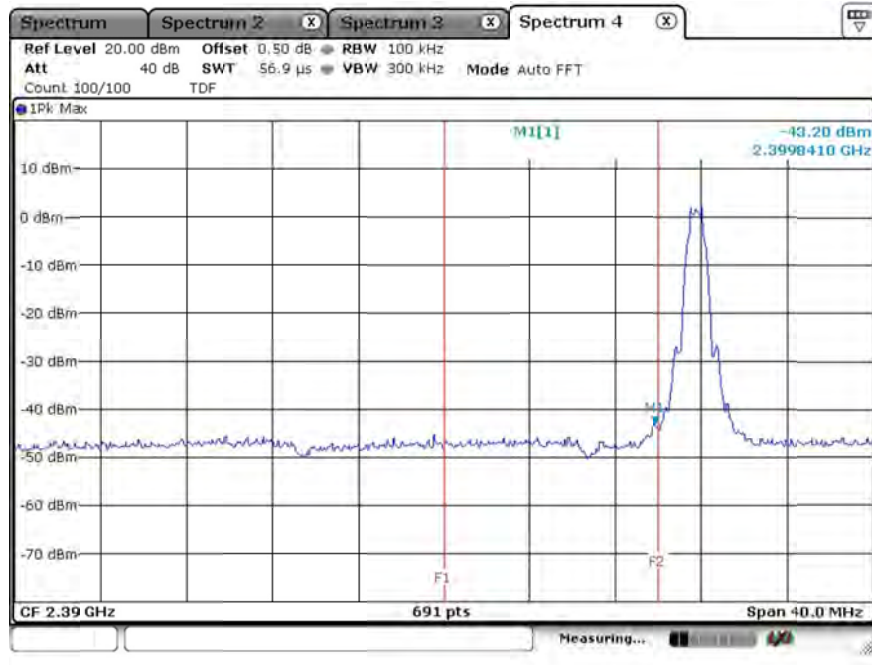


##### A.2. Lowest Ch. (2 402 MHz)\_Spurious emissions

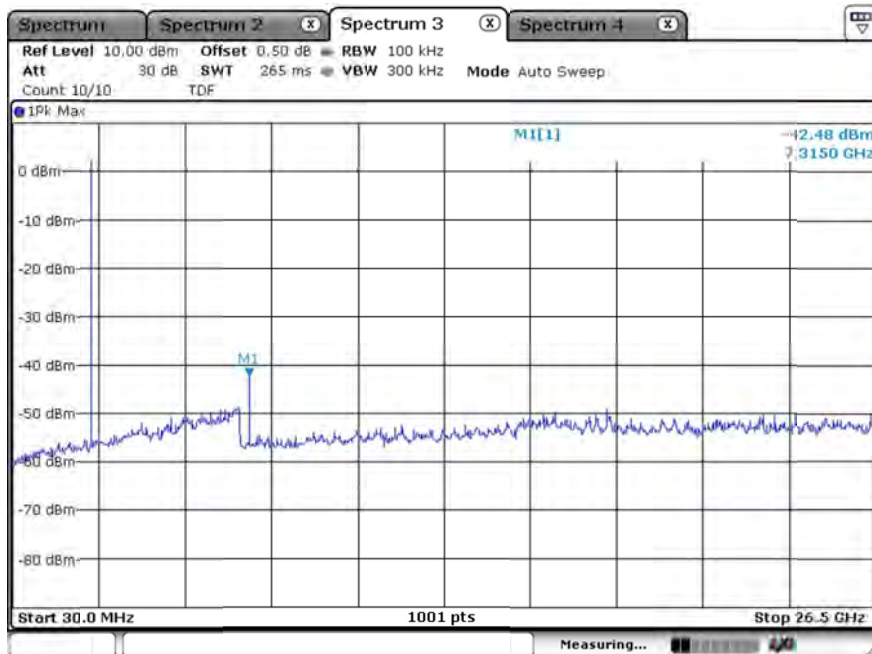

## B.1. Middle Ch. (2 440 MHz)\_Spurious emissions

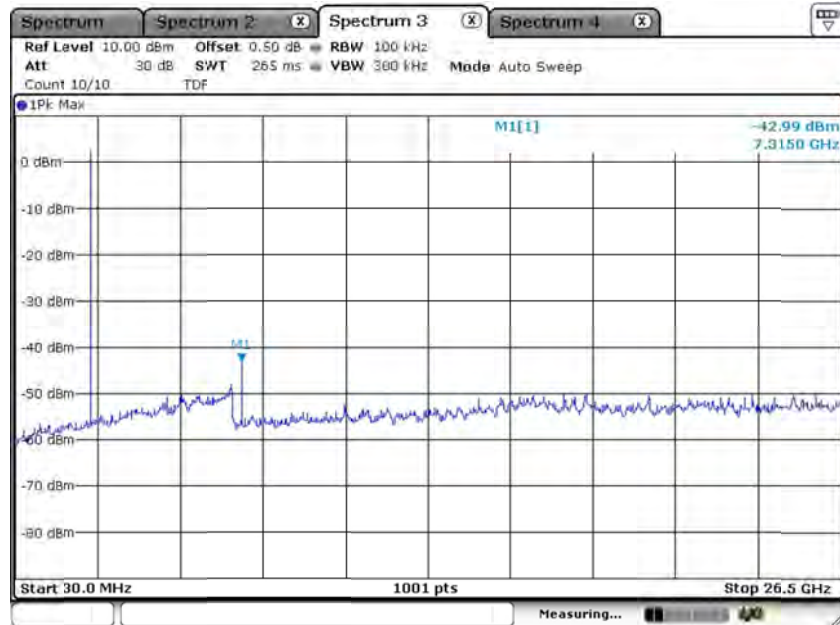

## C.1. Highest Ch. (2 480 MHz)\_ Band edge

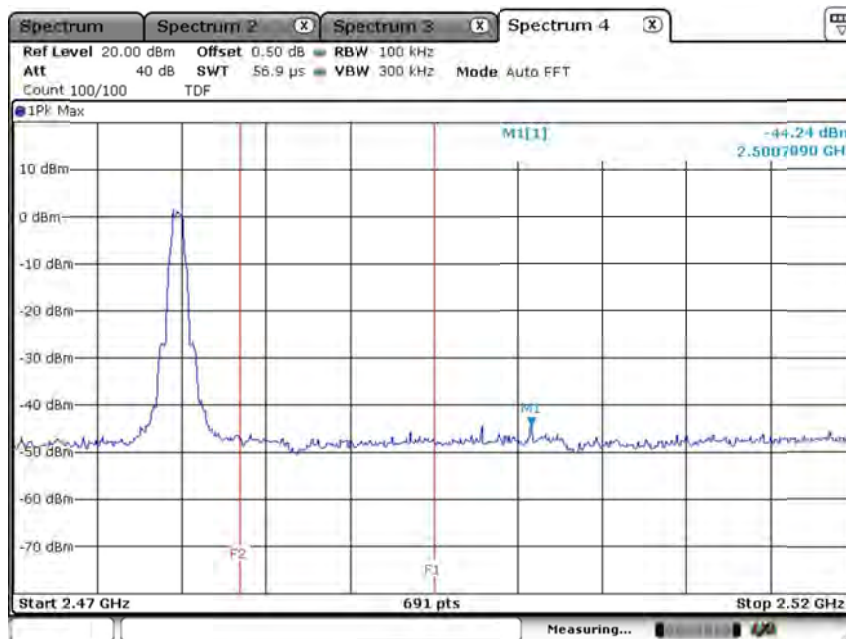

## C.2. Highest Ch. (2 480 MHz)\_Spurious emissions

