

# FCC TEST REPORT

**FCC ID** : NYOSYECWPC1903  
**Equipment** : Wireless Charging System  
**Brand Name** : HYUNDAI, KIA  
**Model Name** : SYECWPC1903  
**Applicant** : SEOYON ELECTRONICS Co.,Ltd  
100, Saneop-ro 156beon-gil, Gwonseon-gu,  
Suwon-si, Gyeonggi-do, South Korea  
**Manufacturer** : SEOYON ELECTRONICS Co.,Ltd  
100, Saneop-ro 156beon-gil, Gwonseon-gu,  
Suwon-si, Gyeonggi-do, South Korea  
**Standard** : 47 CFR FCC Part 15.209

The product was received on Jan. 09, 2019, and testing was started from Jan. 24, 2019 and completed on Jan. 25, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

- 1 GENERAL DESCRIPTION .....5**
- 1.1 Information.....5
- 1.2 Testing Applied Standards .....7
- 1.3 Testing Location Information .....7
- 1.4 Measurement Uncertainty .....7
- 2 TEST CONFIGURATION OF EUT.....8**
- 2.1 Test Condition .....8
- 2.2 The Worst Case Configuration .....8
- 2.3 The Worst Charger Frequencies Configuration .....8
- 2.4 The Worst Case Measurement Configuration.....9
- 2.5 Support Equipment.....9
- 2.6 Test Setup Diagram .....10
- 3 TRANSMITTER TEST RESULT .....11**
- 3.1 AC Power-line Conducted Emissions .....11
- 3.2 Transmitter Radiated Emissions .....15
- 3.3 Emission Bandwidth .....23
- 4 TEST EQUIPMENT AND CALIBRATION DATA.....25**

### APPENDIX A. TEST PHOTOS

#### PHOTOGRAPHS OF EUT v01





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.209	Transmitter Radiated Emissions	PASS	-
3.3	15.215(c)	Emission Bandwidth	PASS	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
None.

Reviewed by: Sam Tsai

Report Producer: Amber Chiu



# 1 General Description

## 1.1 Information

### 1.1.1 General Information

Wireless Power Transfer General Information			
Frequency Range	Modulation Mode	Charging Freq. (kHz)	Field Strength (dBuV/m)
112-145 kHz	ASK	119.63	77.05
Power Transfer Method	Output power from each primary coil	That may have multiple primary coils	Charging Method
Magnetic induction and only single primary coil coupling secondary coil	<15W	Yes	Client directly contact

Note 1: Field strength performed peak level at 3m.

### 1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)

Antenna General Information		
No.	Ant. Cat.	Ant. Type
1	Integral	Coil



1.1.3 EUT Information

Operational Condition	
EUT Power Type	From DC Power Supply
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)
	Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)
	Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other: The EUT place with the platform.

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/>	Operated normally mode for worst duty cycle
<input type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	
<input checked="" type="checkbox"/>	100%



## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ KDB 680106 D01 RF Exposure Wireless Charging Apps v03

## 1.3 Testing Location Information

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.			

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Lego	23°C / 54%	25/Jan/2019
RF Conducted	TH01-HY	Barry	23.8°C / 61%	24/Jan/2019
Radiated Emission	03CH03-HY	Paul	22.6°C / 52.8%	24/Jan/2019

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
Radio Frequency		$\pm 6.7 \times 10^{-8}$	$\pm 1 \times 10^{-7}$
All emissions, radiated	9 – 150 kHz	$\pm 1.6$ dB	$\pm 6$ dB
	0.15 – 30 MHz	$\pm 1.6$ dB	$\pm 6$ dB
	30 – 1000 MHz	$\pm 2.6$ dB	$\pm 6$ dB
Temperature		$\pm 0.8$ °C	$\pm 1$ °C
Humidity		$\pm 5$ %	$\pm 5$ %
DC and low frequency voltages		$\pm 0.9$ %	$\pm 3$ %



## 2 Test Configuration of EUT

### 2.1 Test Condition

Condition Item	Abbreviation/Remark	Remark
Tnom Vnom	Tnom	20°C
-	Vnom	120V

### 2.2 The Worst Case Configuration

Modulation Mode	Field Strength (dBuV/m at 3m)
ASK	77.05

Wireless charger were performed all charging conditions including variable loading and non-charging operation, the worst mode is full charging loading.

### 2.3 The Worst Charger Frequencies Configuration


Modulation Mode	Charger Frequencies (kHz)
ASK	119.63

Wireless charger frequencies are variable frequency range (112-145 kHz) and depend on charging loading.



## 2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 110Vac / 60Hz
Operating Mode	<input checked="" type="checkbox"/> 1. DC Power Supply mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Transmitter Radiated Emissions, Emission Bandwidth
Test Condition	Radiated measurement
User Position	<input type="checkbox"/> EUT will be placed in fixed position.
	<input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions.
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.
Operating Mode	<input checked="" type="checkbox"/> 1. DC Power Supply mode
Orthogonal Planes of EUT	<b>Z Plane</b>
	
Worst Planes of EUT	V

## 2.5 Support Equipment

Support Equipment – AC Conduction				
No.	Equipment	Brand Name	Model Name	FCC ID
1	DC Power Supply	GW	GPS-3030DD	-
2	WPC Load	-	-	-

Note: Support equipment No.2 was provided by customer.


Support Equipment – Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	DC Power Supply	GW	GPS-3030DD	-
2	WPC Load	-	-	-

Note: Support equipment No.2 was provided by customer.

Support Equipment – Radiated				
No.	Equipment	Brand Name	Model Name	FCC ID
1	DC Power Supply	GW	GPS-3030DD	-
2	WPC Load	-	-	-

Note: Support equipment No.2 was provided by customer.

## 2.6 Test Setup Diagram

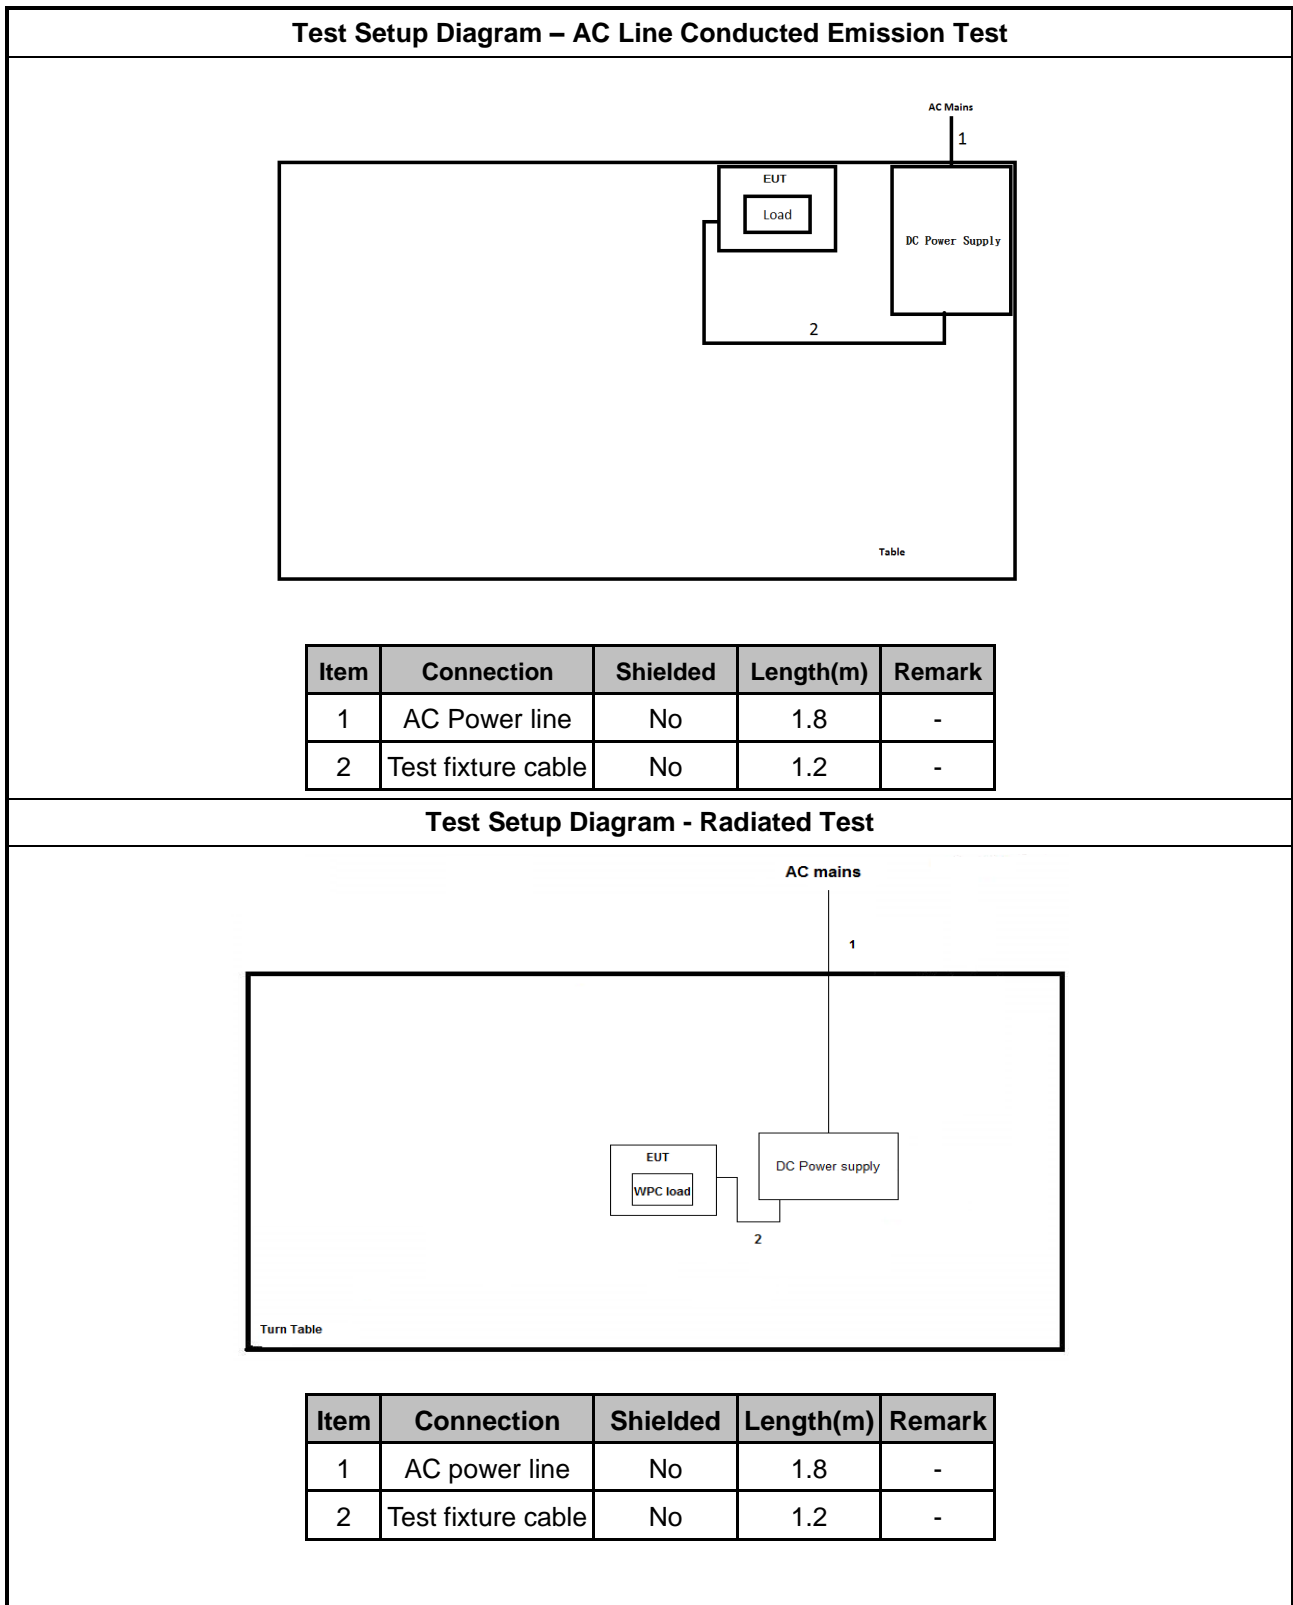



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.
<input checked="" type="checkbox"/>	If AC conducted emissions fall in operating band, then following below test method confirm final result.
<input type="checkbox"/>	Accept measurements done with a suitable dummy load replacing the antenna under the following conditions: (1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.
<input checked="" type="checkbox"/>	For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.

**3.1.4 Test Setup**

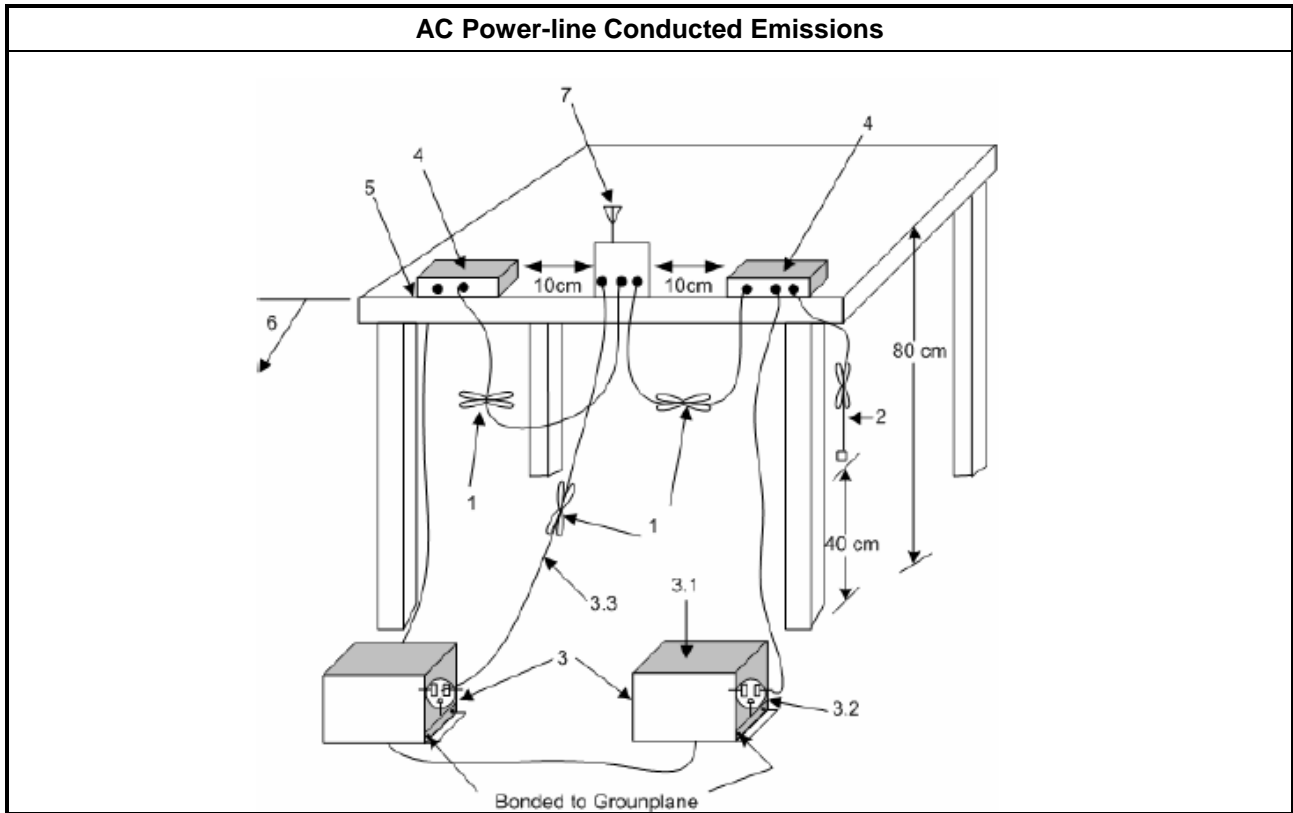



### 3.1.5 Test Result of AC Power-line Conducted Emissions

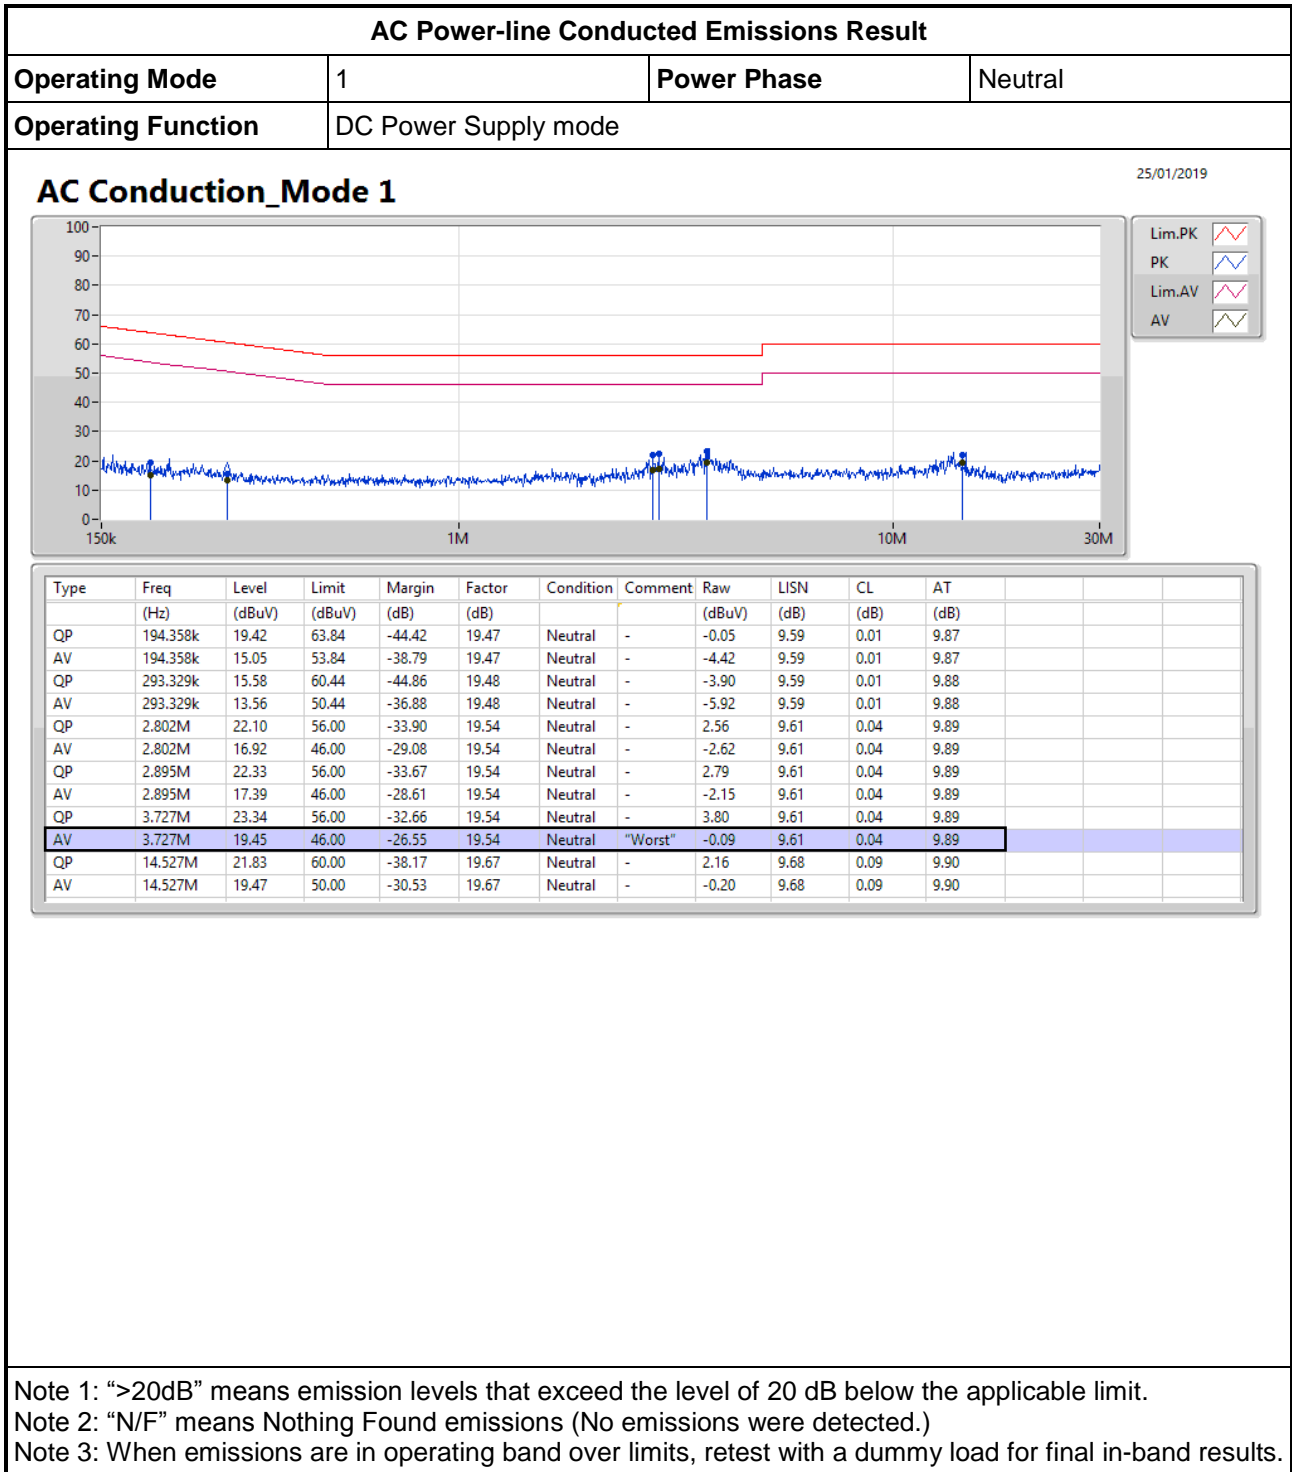




**AC Power-line Conducted Emissions Result**

<b>Operating Mode</b>	1	<b>Power Phase</b>	Line
<b>Operating Function</b>	DC Power Supply mode		

**AC Conduction\_Mode 1**

25/01/2019

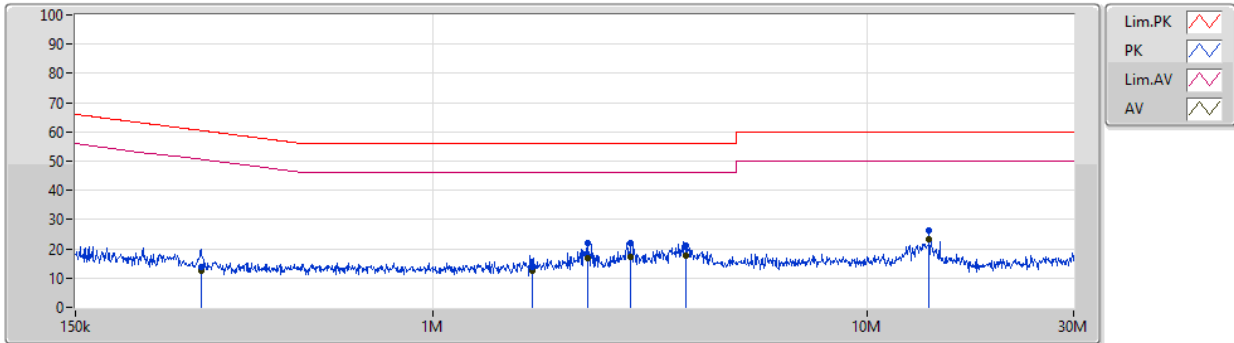

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	292.16k	13.97	60.46	-46.49	19.48	Line	-	-5.51	9.59	0.01	9.88
AV	292.16k	12.49	50.46	-37.97	19.48	Line	-	-6.99	9.59	0.01	9.88
QP	1.696M	13.94	56.00	-42.06	19.54	Line	-	-5.60	9.62	0.03	9.89
AV	1.696M	12.57	46.00	-33.43	19.54	Line	-	-6.97	9.62	0.03	9.89
QP	2.281M	22.09	56.00	-33.91	19.55	Line	-	2.54	9.62	0.04	9.89
AV	2.281M	16.62	46.00	-29.38	19.55	Line	-	-2.93	9.62	0.04	9.89
QP	2.85M	21.89	56.00	-34.11	19.56	Line	-	2.33	9.63	0.04	9.89
AV	2.85M	17.14	46.00	-28.86	19.56	Line	-	-2.42	9.63	0.04	9.89
QP	3.823M	21.21	56.00	-34.79	19.56	Line	-	1.65	9.63	0.04	9.89
AV	3.823M	17.53	46.00	-28.47	19.56	Line	-	-2.03	9.63	0.04	9.89
QP	13.92M	26.17	60.00	-33.83	19.64	Line	-	6.53	9.65	0.09	9.90
AV	13.92M	23.28	50.00	-26.72	19.64	Line	"Worst"	3.64	9.65	0.09	9.90

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)  
 Note 3: When emissions are in operating band over limits, retest with a dummy load for final in-band results.



### 3.2 Transmitter Radiated Emissions

#### 3.2.1 Transmitter Radiated Emissions Limit

Transmitter Radiated Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: the frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 1GHz measurements employing a CISPR quasi-peak detector.

#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.





3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz the frequency bands 9-90 kHz, 110-490 kHz measurements employing an average detector and other below 30MHz measurements employing a CISPR quasi-peak detector. Test distance is 3m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.




### 3.2.4 Test Setup

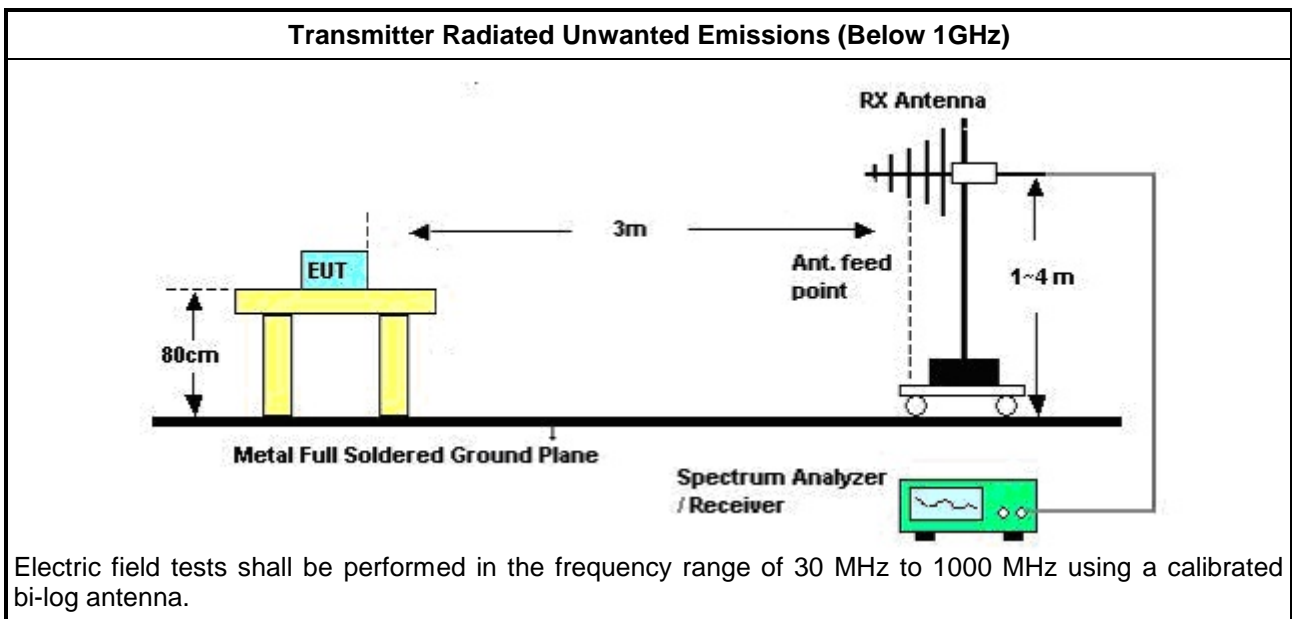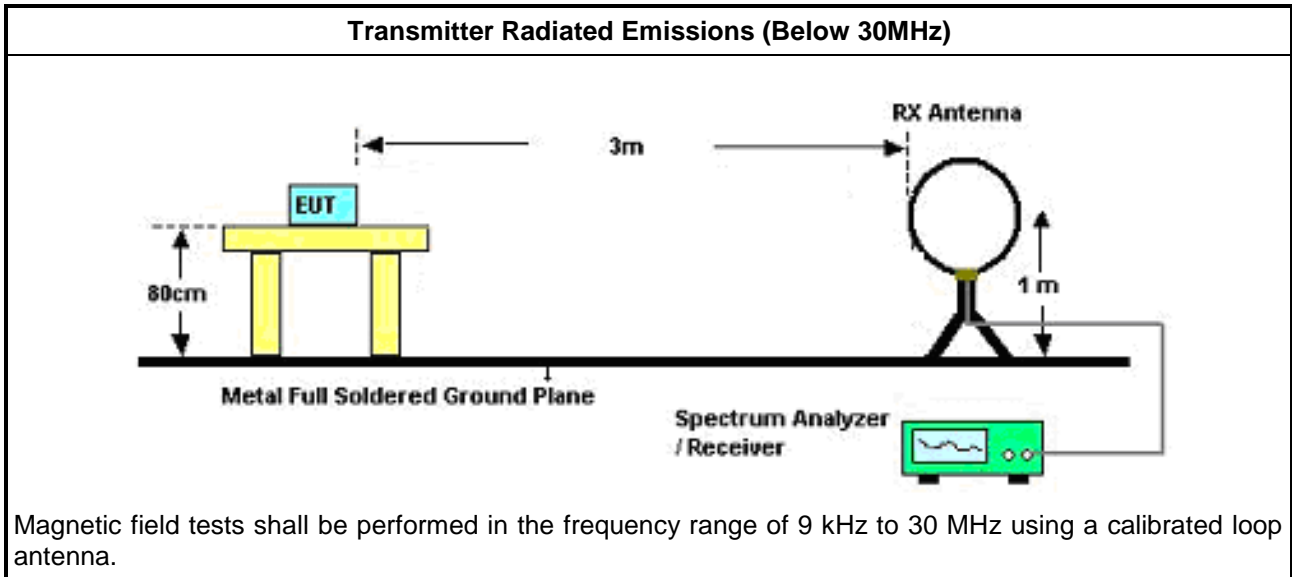



3.2.5 Transmitter Radiated Emissions (Below 30MHz)

Transmitter Radiated Emissions(Fundamental emission)			
Modulation Mode	ASK	Test Freq. (kHz)	119.63
Operating Mode	1	Polarization	H

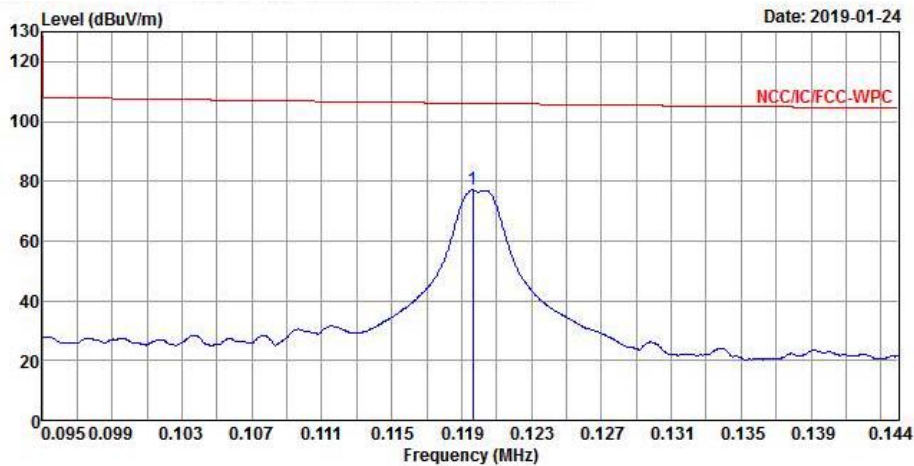


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	0.11963	77.05	-29.00	106.05	56.28	20.68	0.09	0.00	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement worst emissions of receive antenna polarization: H(Horizontal).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.  
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.  
 Note 6: The test result in peak detector is less than average limit , so that we tested in peak detector only.



Transmitter Radiated Emissions (9 kHz – 150 kHz)			
Modulation Mode	ASK	Test Freq. (kHz)	119.63
Operating Mode	1	Polarization	H

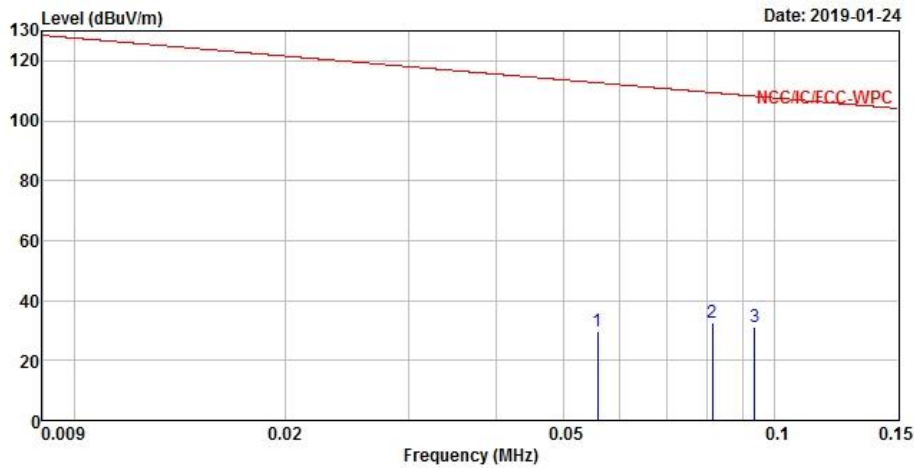


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	0.05581	29.68	-82.99	112.67	8.56	21.05	0.07	0.00	Peak
2	0.08147	32.69	-76.70	109.39	11.76	20.85	0.08	0.00	Peak
3	0.09360	31.36	-76.82	108.18	10.53	20.75	0.08	0.00	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement worst emissions of receive antenna polarization: H(Horizontal).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.  
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.



Transmitter Radiated Emissions (150 kHz – 30 MHz)

Modulation Mode	ASK	Test Freq. (kHz)	119.63
Operating Mode	1	Polarization	H

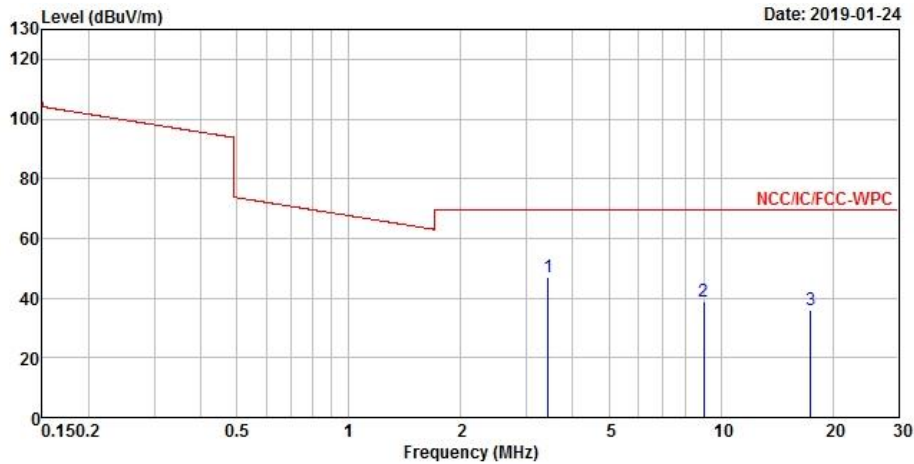


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	3.43350	46.91	-22.63	69.54	26.05	20.47	0.39	0.00	Peak
2	8.98560	38.79	-30.75	69.54	16.89	21.34	0.56	0.00	Peak
3	17.46300	36.03	-33.51	69.54	13.09	22.17	0.77	0.00	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement worst emissions of receive antenna polarization: H(Horizontal).  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.  
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.




3.2.6 Transmitter Radiated Emissions (Above 30MHz)

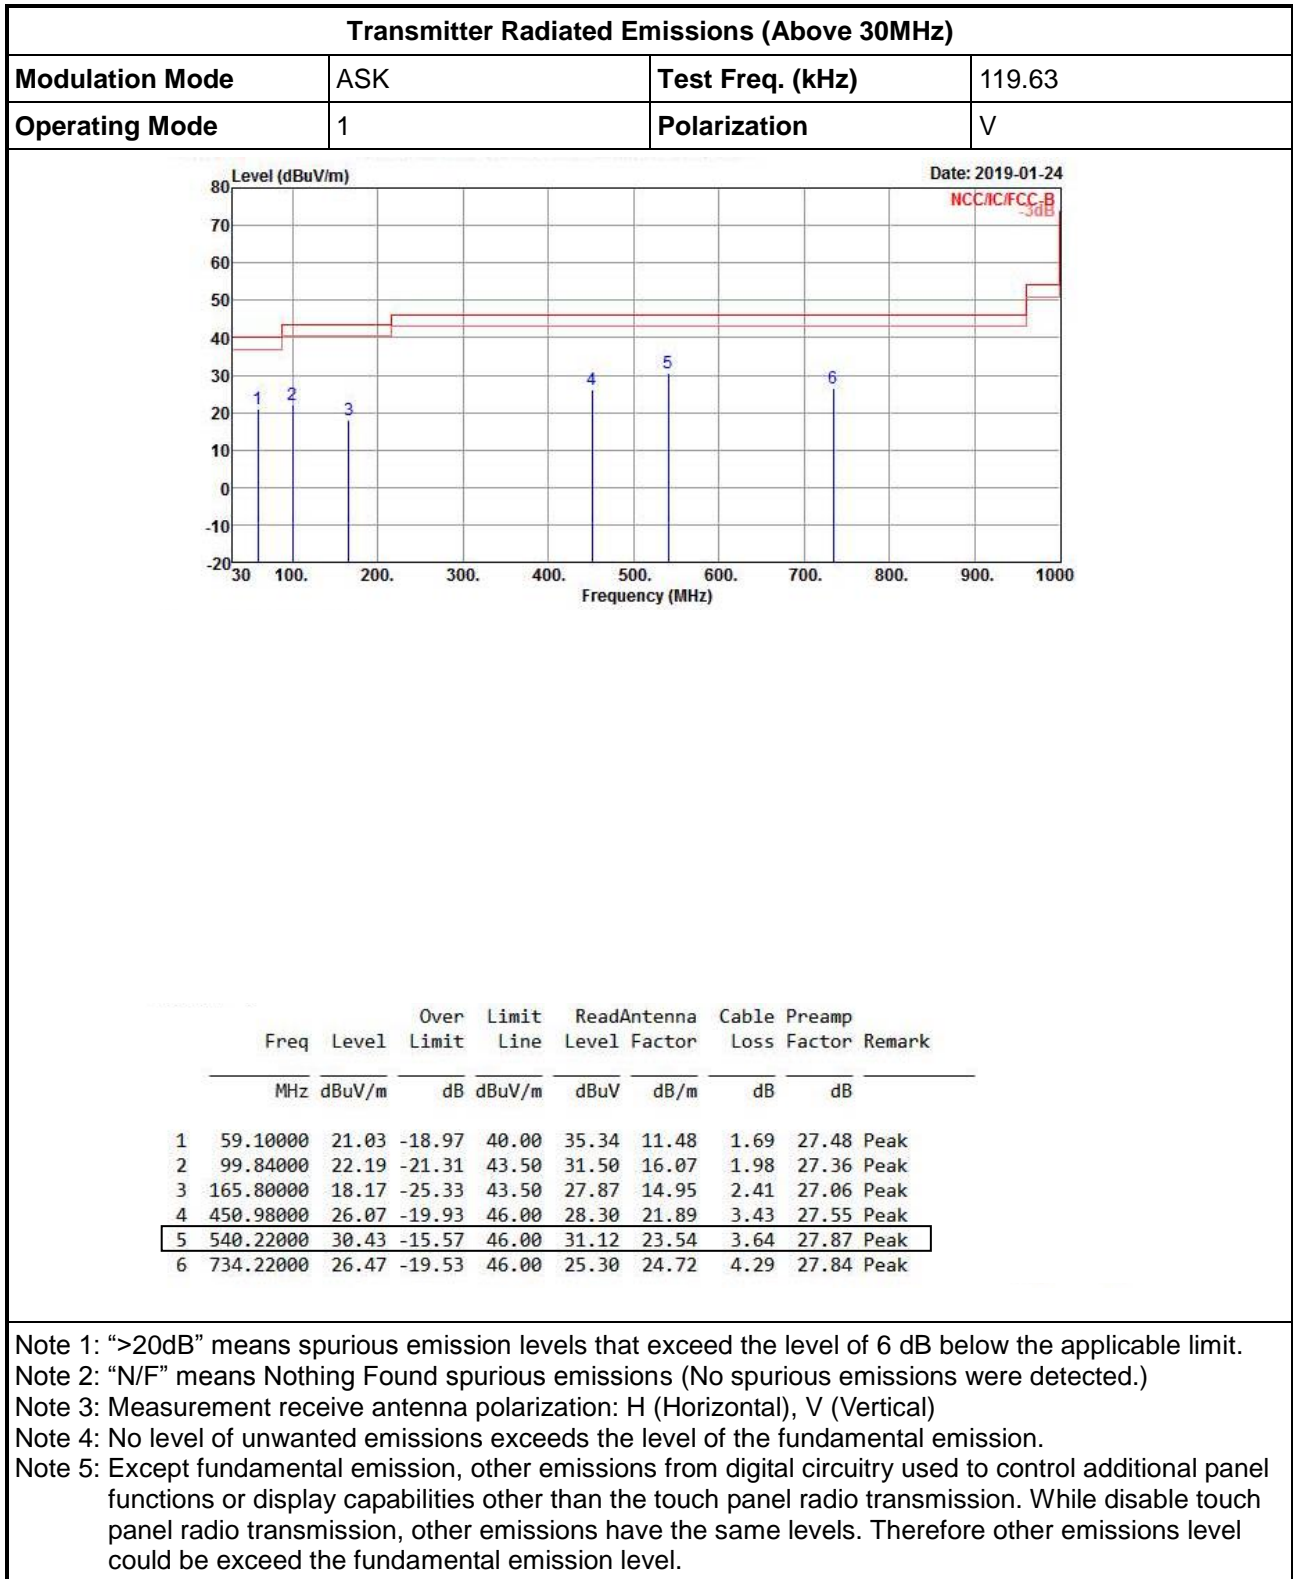



**Transmitter Radiated Emissions (Above 30MHz)**

<b>Modulation Mode</b>	ASK	<b>Test Freq. (kHz)</b>	119.63
<b>Operating Mode</b>	1	<b>Polarization</b>	H

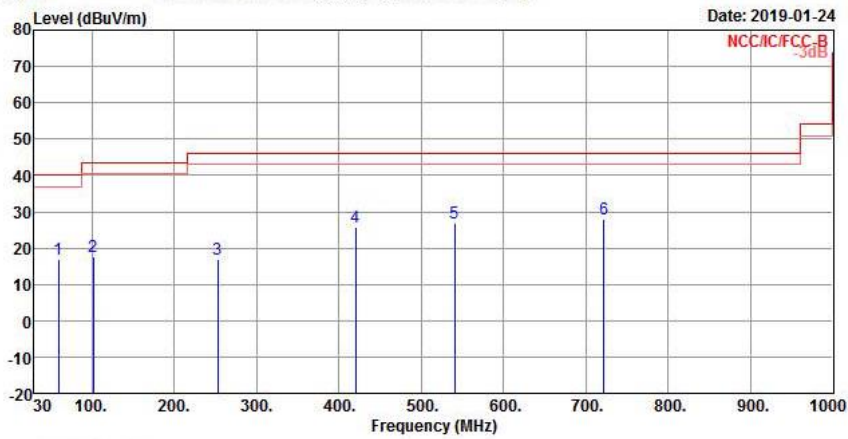

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	59.10000	17.04	-22.96	40.00	31.35	11.48	1.69	27.48	Peak
2	101.78000	17.77	-25.73	43.50	26.90	16.24	1.98	27.35	Peak
3	253.10000	17.02	-28.98	46.00	23.48	17.83	2.47	26.76	Peak
4	419.94000	25.71	-20.29	46.00	27.98	21.91	3.21	27.39	Peak
5	540.22000	26.99	-19.01	46.00	27.68	23.54	3.64	27.87	Peak
6	721.61000	27.89	-18.11	46.00	27.11	24.41	4.23	27.86	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)  
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)  
 Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.  
 Note 5: Except fundamental emission, other emissions from digital circuitry used to control additional panel functions or display capabilities other than the touch panel radio transmission. While disable touch panel radio transmission, other emissions have the same levels. Therefore other emissions level could be exceed the fundamental emission level.

### 3.3 Emission Bandwidth

#### 3.3.1 Emission Bandwidth Limit

Emission Bandwidth Limit
N/A


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures



Test Method
<input checked="" type="checkbox"/> For the emission bandwidth refer ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.

#### 3.3.4 Test Setup

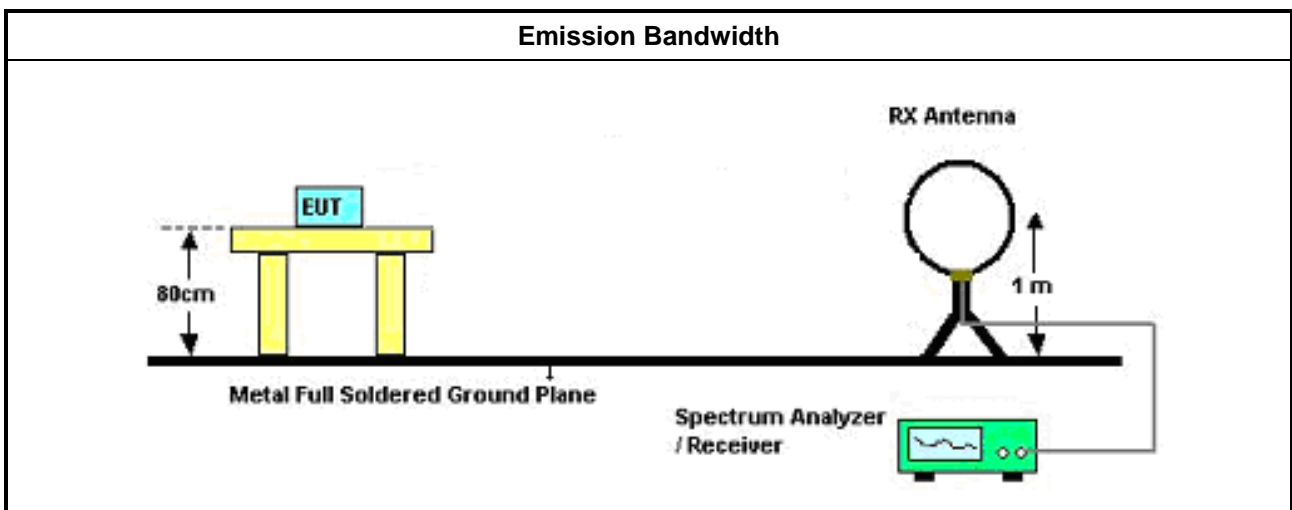

### 3.3.5 Test Result of Emission Bandwidth

Occupied Channel Bandwidth Result			
Modulation Mode	Frequency (kHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
ASK	119.63	2.620	2.240
Limit		N/A	N/A
Result		Complied	

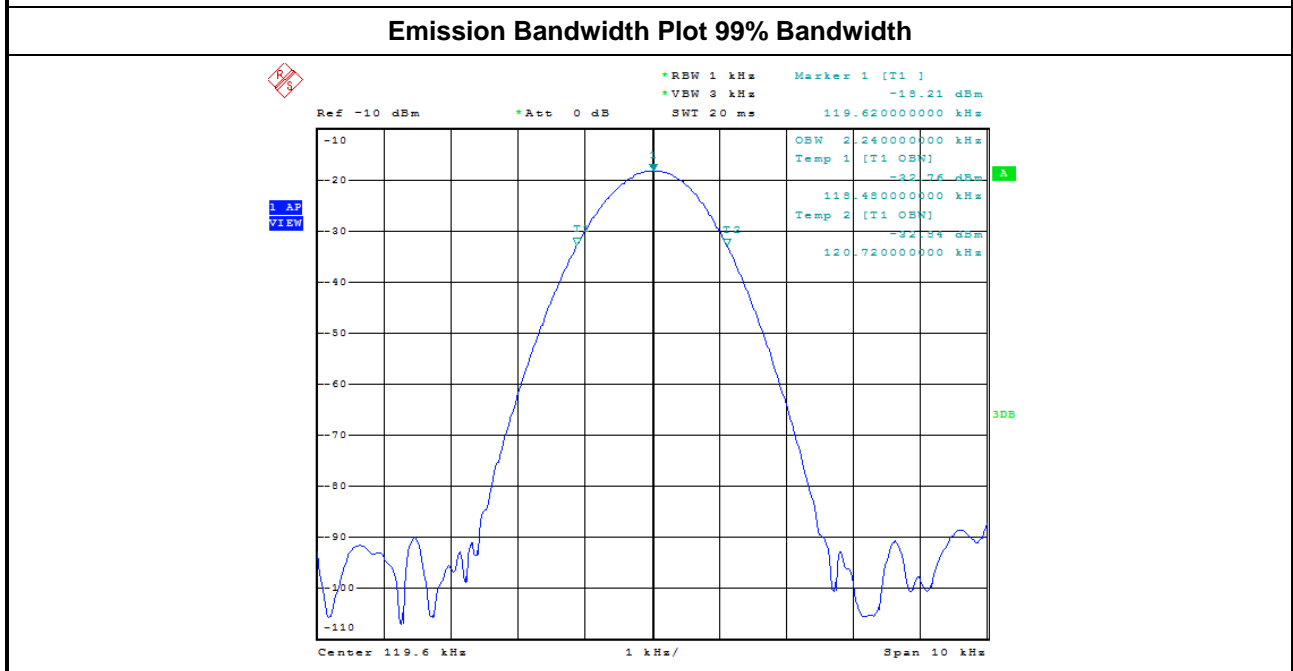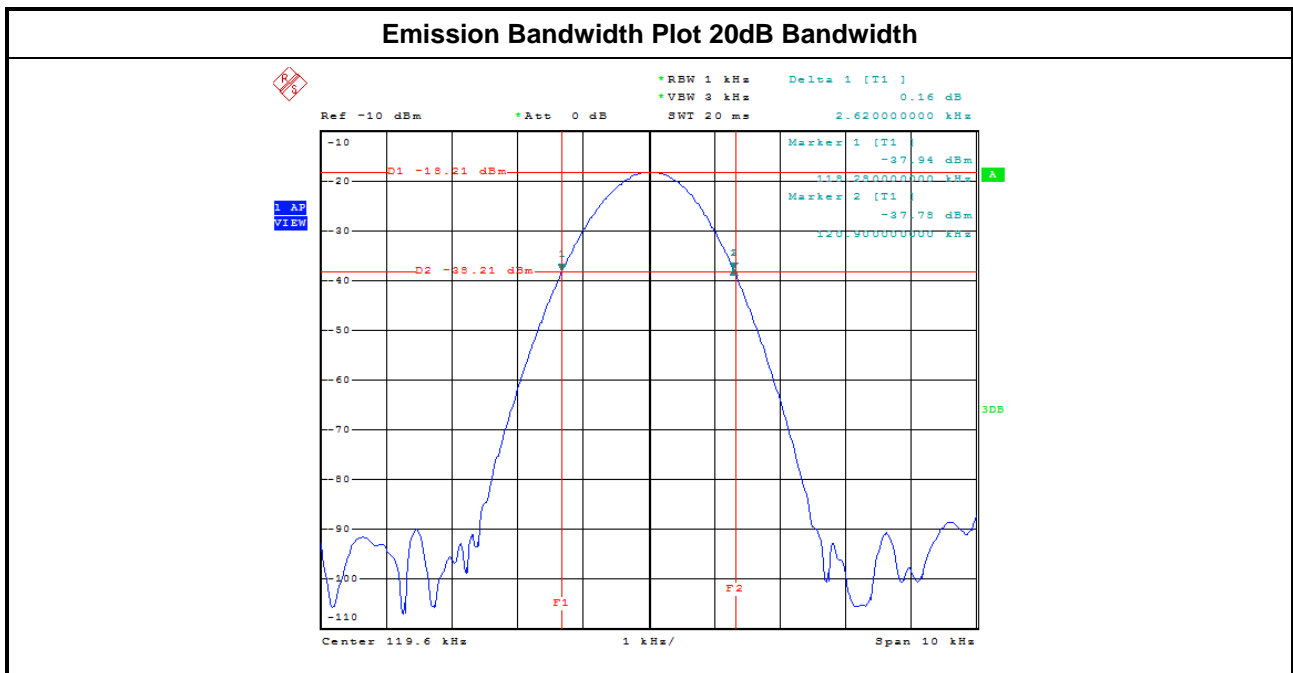





## 4 Test Equipment and Calibration Data

### Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR	102051	9KHz ~ 3.6GHz	03/May/2018	02/May/2019
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	08/Nov/2018	07/Nov/2019
RF Cable-CON	MTJ	RG142	CB002-CO	9kHz ~ 200MHz	17/Sep/2018	16/Sep/2019
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9 kHz ~ 30 MHz	12/Oct/2018	11/Oct/2019

### NCR : Non-Calibration Require

### Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	9kHz~40GHz	05/Feb/2018	04/Feb/2019
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	28/Mar/2018	27/Mar/2019

### Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	30/Oct/2018	29/Oct/2019
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	23/Apr/2018	19/Apr/2019
EMI Test Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	10/Apr/2018	09/Apr/2019
Bilog Antenna with 5dB Pad	ETS	3142B & MTJ6102-05	00022055	26 MHz - 3 GHz	19/Nov/2018	18/Nov/2019
Signal Analyzer	R&S	FSV40	101500	10Hz ~ 40GHz	18/Jul/2018	17/Jul/2019
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	29/Jan/2018	28/Jan/2019
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	28/Mar/2018	27/Mar/2019